


Dead-End Barricade

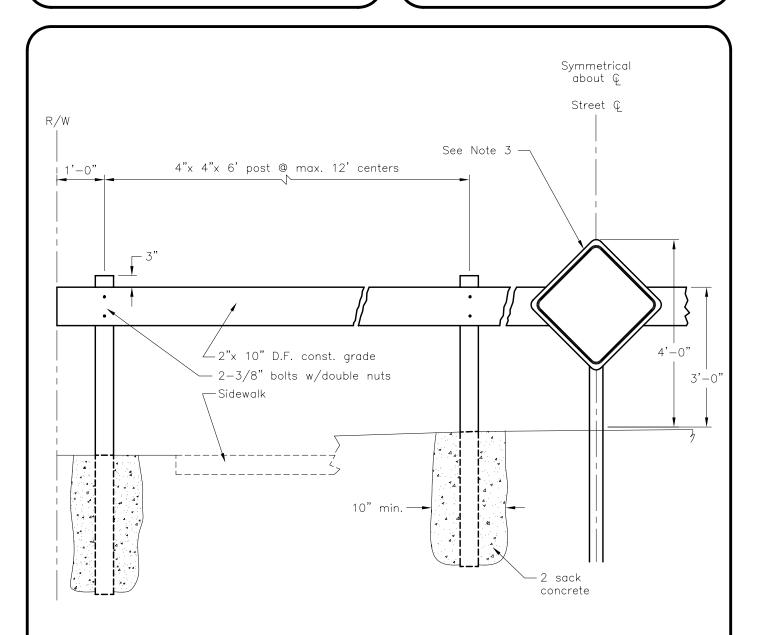

Notes:

- 1. All posts shall be redwood or plastic.
- 2. Entire barrier shall be painted white -3 coats.
- 3. Install one fully reflective red Type N Marker 18"x 18" at centerline. (& 12' right of Q when c-c width is over 60'.)
 Backing: 0.080 in aluminum 606IT6 alloy.
 Reflectorization: Wide angle flat top Scotchlite high intensity reflective sheeting. Mount with 5/16 Ø bolts w/double nuts.
- 4. Servicable portions of barricades being removed may be reused at new locations as approved by the Engineer.

D۱	r.	ΚT	No.	Date	Revision	Appr.	Approved By:/	STD PLAN
	1	111					11, , /	
Cł	n.	WS					J Wally Sandelin 12/28/00	128
D	ate	,					City Engineev Date	
	1	2/00					R.C.E. 39895	