


Saddle Manhole

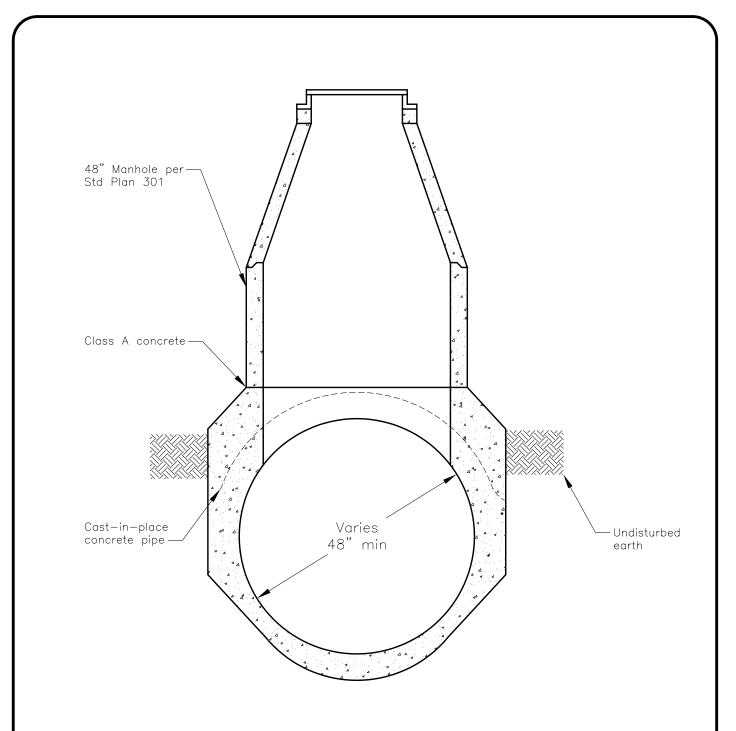

<u>Notes:</u>

1. Make manhole opening in top of pipe before concrete sets and place barrel within following 7 days.

2. Grout all joints.

Г	Dr. _{KT}	No.	Date	Revision	Appr.	Approved By:/	STD PLAN
ŀ						<i>f</i> , ()	310 1 0 11
ı	Ch. WS					J. Wally Sandelin 12/28/00	1 マハつ
t	Date ,					F. Wally Sandelin Date	I JUZ
•	12/00					R.C.E. 39895	