




CITY OF LODI

PUBLIC WORKS DEPARTMENT

Curb Return Layout Plan

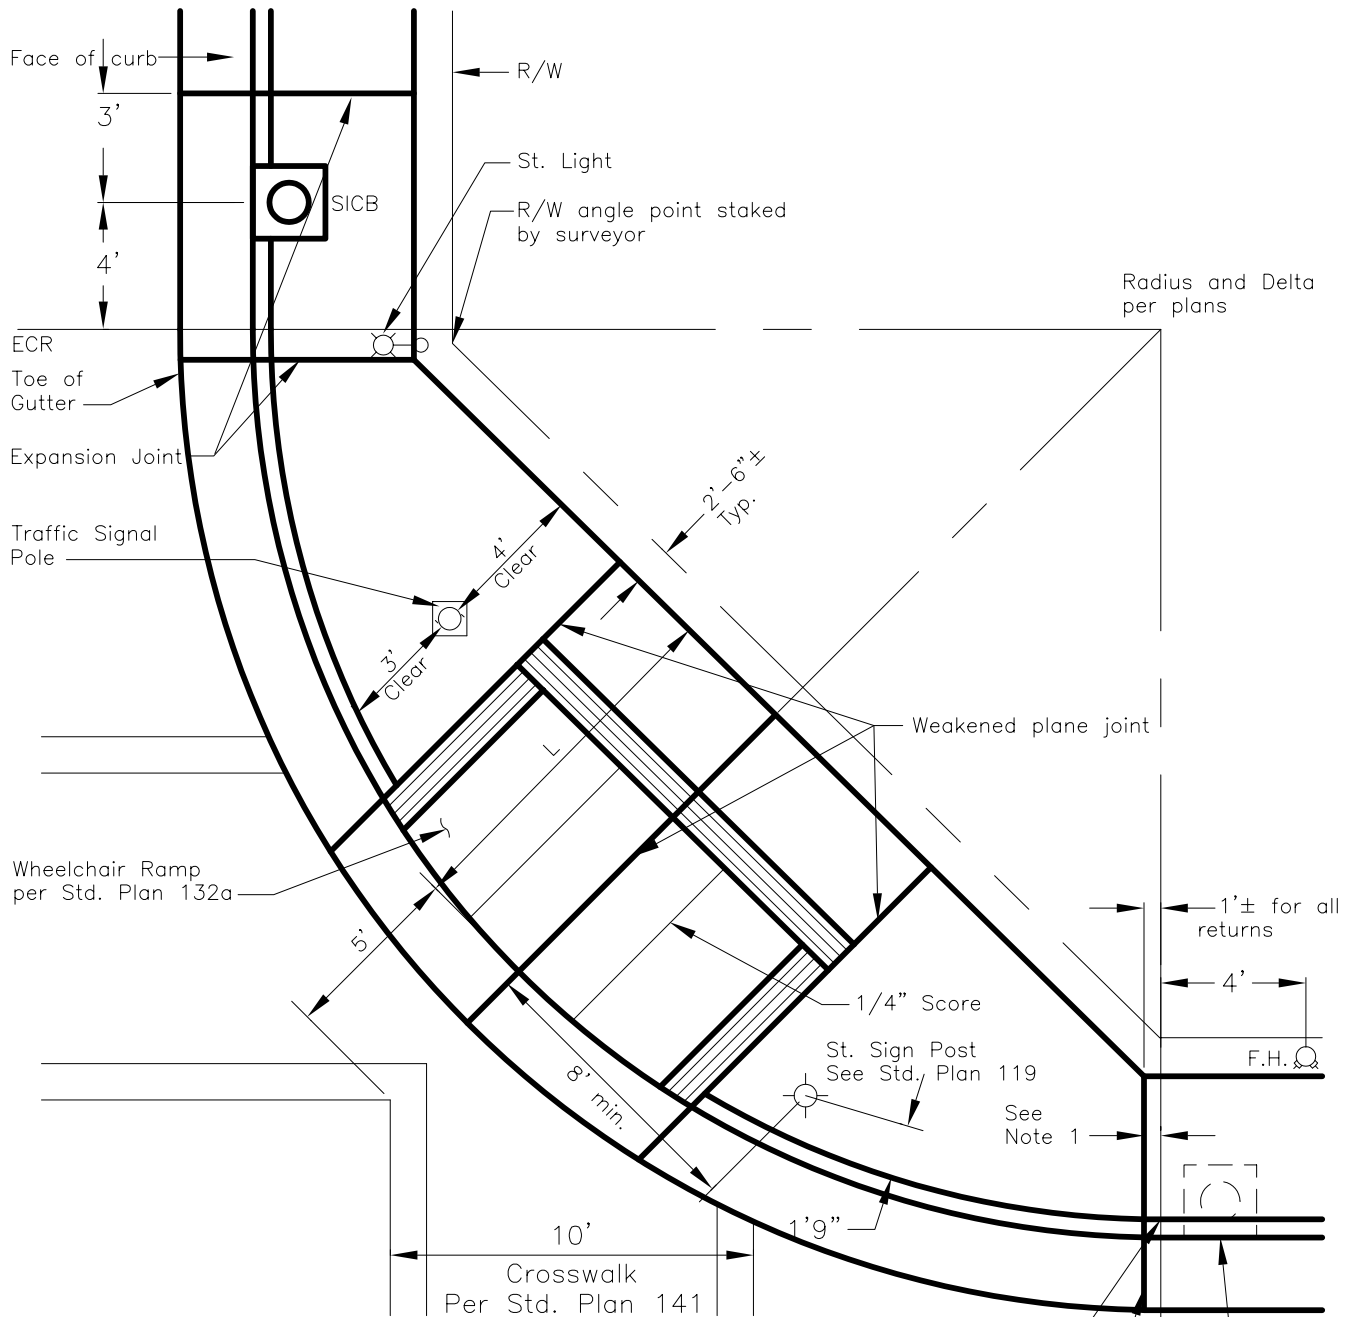

Notes:

1. Curb return to back of walk angle point distance varies. When actual distance is less than 2', curb return shall be placed at back of walk angle point and curb return curve forced to fit.
2. BCR and ECR station per plans (nominal, see note 1)
3. L=10' for R=20' and 25'; 12' for R=30' and 35'

Expansion joint
Weakened Plane joint
BCR
Optional SICB location, joints per ECR

Dr. KT	No.	Date	Revision	Appr.	Approved By: <i>F. Wally Sandelin</i>	12/28/00	STD PLAN
Ch. WS					F. Wally Sandelin City Engineer R.C.E. 39895	Date	612
Date 12/00							