CCSP Synthesis and Assessment Product 2.1, Part A: Scenarios of Greenhouse Gas Emissions and Atmospheric Concentrations

Draft for CCSP Review Wednesday, December 06, 2006

Leon Clarke, James Edmonds, Henry Jacoby, Hugh Pitcher, John Reilly, and Richard Richels

THIS PAGE INTENTIONALLY LEFT BLANK

1	TABLE OF CO	NTENTS
2		
3		
4	EXECUTIVE SU	JMMARY
5		
6	CHAPTER 1:	INTRODUCTION AND OVERVIEW
7		
8	CHAPTER 2:	MODELS USED IN THIS STUDY
9		
10	CHAPTER 3:	REFERENCE SCENARIOS
11		
12	CHAPTER 4:	STABILIZATION SCENARIOS
13		
14	CHAPTER 5:	SUMMARY, APPLICATIONS, AND FUTURE DIRECTIONS

THIS PAGE INTENTIONALLY LEFT BLANK

1	Acronyms	
2	-	
3	AEEI	autonomous energy efficiency improvement
4	AOGCMs	atmosphere-ocean general circulation models
5	CCS	carbon capture and storage
6	CCSP	Climate Change Science Program
7	CCTP	Climate Change Technology Program
8	CFCs	chlorofluorocarbons
9	CGE	computable general equilibrium
10	DOE	U.S. Department of Energy
11	EMF	Energy Modeling Forum
12	EPPA	Emissions Prediction and Policy Analysis
13	FCCC	U.N. Framework Convention on Climate Change
14	GCMs	general circulation models
15	GDP	Gross Domestic Product
16	GHGs	greenhouse gases
17	GWP	Global Warming Potential
18	HFCs	hydrofluorocarbons
19	IAMs	Integrated Assessment Models
20	IGCC	undefined
21	IGSM	Integrated Global Systems Model
22	IPCC	Intergovernmental Panel on Climate Change
23	MAC	marginal abatement cost
24	MAGICC	Model for the Assessment of Greenhouse-Gas Induced Climate
25		Change
26	MERGE	Model for Evaluating the Regional and Global Effects
27	NCAR	National Center for Atmospheric Research
28	NGCC	natural gas combined cycle
29	NMVOCs	undefined
30	OECD	Organization for Economic Cooperation and Development
31	PFCs	perfluorocarbons
32	PPP	purchasing power parity
33	SRES	Special Report on Emissions Scenarios
34	TAR	Third Assessment Report
35	U.N.	United Nations
36	U.S.	United States

1	Units	
2		
3	\$2000	U.S. 2000 dollars
4	bbl	barrel
5	c/kWh	cents per kilowatt hour
6	EJ	exajoule
7	gal	gallon
8	GJ	gigajoule
9	Gt	gigatonne
10	GtC	gigatonne carbon
11	MT	megatonne
12	MtC	megatonne carbon
13	PgC	petagram carbon
14	ppbv	parts per billion by volume
15	ppmv	parts per million by volume
16	ppt	parts per trillion
17	Quad	quadrillion btu
18	tcf	thousand cubic feet
19	Wm^{-2}	watts per meter squared
20	yr	year
21		
22		
23	Chemica	ıl Formulas
24		
25	CH_4	methane
26	CO	carbon monoxide
27	CO_2	carbon dioxide
28	N_2O	nitrous oxide
29	O_3	ozone
30	SF_6	sulfur hexafluoride
31		
32		

44

45

1 2 3	ES. EXECUTIVE SUMMARY: SCENARIOS OF GREENHOUSE GAS EMISSIONS AND ATMOSPHERIC CONCENTRATIONS: CCSP PRODUCT 2.1 A
4 5	ES. EXECUTIVE SUMMARY: SCENARIOS OF GREENHOUSE GAS
6	EMISSIONS AND ATMOSPHERIC CONCENTRATIONS: CCSP PRODUCT
7	2.1 A
8	ES.1. Highlights of the Report
9	ES.1.1. Background
10	ES.1.2. Highlights of the Report
11	ES.2. Background
12	ES.3. Models Used to Develop the Scenarios
13	ES.4. Approach
14	ES.5. Overview of the Scenarios
15	ES.5.1. Reference Scenarios
16	ES.5.2. Stabilization Scenarios
17	ES.6. Using the Scenarios and Future Work
18	ES.7. References 17
19	
20	ES.1. Highlights of the Report
21	
22	ES.1.1. Background
23	This was at a second second from Countries and Assessment Daylor 2.1 and the Climate
2425	This report presents research from Synthesis and Assessment Product 2.1a of the Climate
25 26	Change Science Program, <i>Scenarios of Greenhouse Gas Emissions and Atmospheric Concentrations</i> . The scenarios in this research product are designed to stabilize the
27	influence of a suite of greenhouse gases (GHGs)—carbon dioxide (CO ₂), methane (CH ₄),
28	nitrous oxide (N_2O), hydrofluorocarbons (HFCs), perfluorocarbons (PFCs) and sulfur
29	hexafluoride (SF ₆)—on the Earth's radiation balance, measured in terms of radiative
30	forcing. Four radiative forcing stabilization levels are considered. The resulting
31	atmospheric concentrations of the largest single contributor, CO ₂ , are roughly 450, 550,
32	650 and 750 ppmv. In response to the Prospectus for this research product, this report
33	presents scenarios with an emphasis on (1) GHG emissions trajectories, (2) global and
34	U.S. energy system implications, and (3) economic implications of stabilization.
35	
36	This research was conducted using computer-based research tools known as integrated
37	assessment models. Three modeling groups each independently developed a reference
38	scenario, in which all climate policies were assumed to expire in 2012, and then
39	developed four stabilization scenarios as departures from their respective reference
40	scenarios. Idealized emissions-reduction measures – designed to achieve emissions
41	reductions wherever, whenever, and using whichever GHG was most cost-effective –

were imposed to limit GHG emissions and meet the four radiative forcing limits.

Evidence from previous literature suggests that if less idealized measures were employed to stabilize radiative forcing, costs could be substantially higher. Further, this research

considers only the costs of stabilization; it does not consider the benefits of potential

climate change avoided or of possible ancillary benefits of emissions reduction (e.g., less air pollution).

The scenarios in this report are not predictions or best-judgment forecasts from the modeling groups. Rather, they constitute new research intended to advance understanding of the forces that lead to GHG emissions and that shape opportunities to stabilize GHG concentrations and radiative forcing. Although the future is uncertain and the scenarios are strongly dependent on many underlying assumptions, this research provides useful insights for those engaged in climate-related decision making.

ES.1.2. Highlights of the Report

In the reference scenarios, economic and energy growth, combined with continued fossil fuel use, lead to changes in the Earth's radiation balance that are three to four times that already experienced since the beginning of the industrial age. By 2100, primary energy consumption increases from over three to nearly four times 2000 levels as economic growth outpaces improvements in the efficiency of energy use. Non-fossil energy use grows some five-fold over the century, but this growth is insufficient to supplant fossil fuels as the major source of energy. As a result, global CO₂ emissions more than triple between 2000 and 2100, and emissions are rising at the end of the 21st century. Combined with the effects of non-CO₂ GHGs, the increase in anthropogenic radiative forcing from preindustrial levels is substantial.

In the stabilization scenarios, CO_2 emissions peak and decline during the twenty-first century or soon thereafter. Emissions of non- CO_2 GHGs are also reduced. The timing of reduction in GHG emissions varies substantially across the stabilization levels. In the most stringent scenarios, CO_2 emissions begin to decline immediately or within a matter of decades. In the less stringent scenarios, CO_2 emissions do not peak until late in the century or beyond, and they are $1\frac{1}{2}$ to over $2\frac{1}{2}$ times today's levels in 2100.

In the stabilization scenarios, GHG emissions reductions require a transformation of the global energy system, including reductions in the demand for energy and changes in the mix of energy technologies and fuels. This transformation is more substantial and takes place more quickly at the more stringent stabilization levels. Fossil fuel use and energy consumption are reduced in all the stabilization scenarios due to increased consumer prices for fossil fuels. Use of shale oil, tar sands, and synthetic fuels from coal are greatly reduced or, at the most stringent stabilization levels, eliminated. CO₂ emissions from electric power generation are reduced at relatively lower prices than CO₂ emissions from other sectors, such as transport, industry, and buildings. Emissions are reduced from electric power by increased use of technologies such as CO₂ capture and storage (CCS), nuclear energy, and renewable energy. Other sectors respond to rising greenhouse gas prices by reducing demands for fossil fuels; substituting low- or non-emitting energy sources such as bioenergy, electricity, and hydrogen; and applying CCS where possible.

Substantial differences in GHG emissions prices and associated economic costs arise among the modeling groups for each stabilization level, and these are illustrative of some of the unavoidable uncertainties in long term scenarios. Among the most important factors influencing the variation in economic costs are: (1) differences in assumptions – such as those regarding economic growth over the century, the behavior of the oceans and terrestrial biosphere in taking up CO₂, and opportunities for reduction in non-CO₂ GHG emissions – that determine the amount that CO₂ emissions that must be reduced to meet the radiative forcing stabilization levels; and (2) differences in assumptions about technologies, particularly in the second half of the century, to shift final demand to low-CO₂ sources such as biofuels, low-carbon electricity, or hydrogen in transportation, industrial, and buildings end uses. All other things being equal, scenarios with more low-cost technology options and lower required emissions reductions have lower economic costs.

ES.2. Background

The Strategic Plan for the U.S. Climate Change Science Program (CCSP 2003) noted that "sound, comprehensive emissions scenarios are essential for comparative analysis of how climate might change in the future, as well as for analyses of mitigation and adaptation options." The Plan includes Product 2.1, which consists of two parts: Scenarios of Greenhouse Gas Emissions and Atmospheric Concentrations and Review of Integrated Scenario Development and Application. This report presents the scenario development component (Product 2.1A); the review of scenario methods (Product 2.1B) is the subject of a separate report.

Guidelines for producing these scenarios were set forth in a Prospectus (CCSP 2005), which specified that the new scenarios focus on alternative levels of atmospheric stabilization of the radiative forcing from the combined effects of a suite of the main anthropogenic greenhouse gases (GHGs). The Prospectus also set forth criteria for the facilities to be used in the analysis. Scenarios developed using three models that meet the Prospectus conditions are reported here.

The scenarios in this report are intended as one of many inputs to public and private discussions regarding the threat of climate change and what to do about it, and they may also serve as a point of departure for further CCSP and other analyses that might inform these discussions in the future. The possible users of these scenarios are many and diverse. They include climate modelers and the science community; those involved in national public policy formulation; managers of Federal research programs; state and local government officials who face decisions that might be affected by climate change and mitigation measures; and individual firms, farms, and members of the public. Such a varied clientele implies an equally diverse set of possible needs, and no single scenario exercise can hope to fully satisfy all of these needs.

Each of the three participating modeling groups first developed a no-climate policy scenario—referred to as a reference scenario—which serves as baseline for development

of alternative scenarios with emissions control. Each modeling group then developed four control scenarios leading to stabilization of radiative forcing at four alternative levels. The resulting scenarios provide insight into questions such as the following:

• What emissions trajectories over time are consistent with meeting the four stabilization levels, and what are the key factors that shape them?

• What energy system characteristics are consistent with each of the four alternative stabilization levels, and how do they differ from one another?

• What are the possible economic consequences of meeting each of the four alternative stabilization levels?

Although each of the models used to develop these scenarios represents the world as a set of interconnected nations and multi-nation regions, as specified in the Prospectus, this report focuses on the U.S. and world totals.

With the exception of the stabilization levels themselves and a common hypothesis about international burden sharing, there was no direct coordination among the modeling groups either in the assumptions underlying the reference scenario or the precise path to stabilization. Furthermore, the scenarios were not designed to span the full range of possible futures, and no explicit uncertainty analysis was called for. Although the future is uncertain and the scenarios are depend on many underlying assumptions, this research illuminates a range of possible future developments and provides useful insights for those engaged in climate-related decision making.

The scenarios in this report do not constitute a cost-benefit analysis of climate policy. They focus exclusively on the issues associated with reducing emissions to meet various stabilization levels; they do not consider the damages avoided through stabilization or ancillary benefits that could be realized by emissions reductions, such as reductions in local air pollution reduction. Thus, although the scenarios should serve as a useful input to climate-related decision making, they address only one of the several components of a benefit-cost analysis of climate policy.

Scenario research such as this continues a tradition of research and analysis that has gone on for over 20 years. This work will be continued and refined as the field advances, new information becomes available, and decision makers raise new questions and issues. Similar work is conducted by modeling groups in Europe and Asia. The scenarios developed here add to this larger body of scholarship and should be viewed as one additional piece of information in an ongoing and iterative process of scenario development.

ES.3. Models Used to Develop the Scenarios

The Prospectus set out the following criteria for participating models: they must (1) be global in scale, (2) be capable of producing global emissions totals for designated GHGs, (3) represent multiple regions, (4) be capable of simulating the radiative forcing from these GHGs and substances, (5) have technological resolution capable of distinguishing among major sources of primary energy (e.g., renewable energy, nuclear energy, biomass, oil, coal, and natural gas) as well as between fossil fuel technologies with and without carbon capture and storage systems, (6) be economics-based and capable of simulating macroeconomic cost implications of stabilization, and (7) look forward at least to the end of the twenty-first century. In addition, modeling groups were required to have a track record of publications in professional, refereed journals, specifically in the use of their models for the analysis of long-term GHG emission scenarios.

Application of these criteria led to the selection of three models:

- The Integrated Global Systems Model (IGSM) of the Massachusetts Institute of Technology's Joint Program on the Science and Policy of Global Change
- The MiniCAM Model of the Joint Global Change Research Institute, which is a
 partnership between the Pacific Northwest National Laboratory and the
 University of Maryland
- The Model for Evaluating the Regional and Global Effects (MERGE) of GHG reduction policies developed jointly at Stanford University and the Electric Power Research Institute.

Each of these models has been used extensively for climate change analysis. The roots of each extend back more than a decade, during which time features and details have been refined, modified and added. Research using each has appeared widely in peer-reviewed publications.

ES.4. Approach

As directed by the Prospectus, each of the three modeling groups produced one reference scenario and four stabilization scenarios, for a total of 15 scenarios. First, the reference scenarios were developed under the assumption that no climate policy would be implemented beyond the set of policies currently in place (e.g., the Kyoto Protocol and the U.S. carbon intensity goal, each terminating in 2012 because goals beyond that date have not been identified). Each modeling group developed its own reference scenario. The Prospectus required only that each reference scenario be based on assumptions believed by the participating modeling groups to be "meaningful" and "plausible". Each of the three reference scenarios is based on a different set of assumptions about how the future might unfold without additional climate policies. These assumptions are not intended as predictions or best judgment forecasts of the future by the respective modeling groups. Rather, they represent possible paths that the future might follow to serve as a platform for examining how emissions might be reduced to achieve stabilization.

Each group then produced four stabilization scenarios by constraining the models to achieve four alternative radiative forcing levels. Stabilization was defined in terms of the total long-term radiative impact of a suite of GHGs including carbon dioxide (CO_2), nitrous oxide (N_2O) , methane (CH_4) , hydrofluorocarbons (HFCs), perfluorocarbons (PFCs), and sulfur hexafluoride (SF₆). These are the gases enumerated in the U.S. goal to reduce the intensity of GHG emissions relative to gross domestic product (GDP) as well as the Kyoto Protocol. Other substances with radiative impact, such as gases controlled under the Montreal Protocol, carbon monoxide (CO), ozone (O₃), and aerosols were not included in the radiative forcing levels.

9 10 11

12

13

14

1

2

3

4

5

6

7

8

The four stabilization scenarios were developed so that the increased radiative forcing from these gases was constrained to no more than 3.4 Wm⁻² for Level 1, 4.7 Wm⁻² for Level 2, 5.8 Wm⁻² for Level 3, and 6.7 Wm⁻² for Level 4. These levels were defined as increases above the preindustrial level, so they include the roughly 2.2 Wm⁻² increase that had already occurred as of the year 2000 (Table ES.1).

15 16 17

Table ES.1. Greenhouse Gas Concentrations and Forcing. Concentrations of GHGs have increased since 1750 (preindustrial).

18 19

	Preindustrial Concentration (1750)	Current Concentration (1998)	Increased Forcing Wm ⁻² (1750-1998)
CO ₂	278 ppmv	365 ppmv	1.46
CH ₄	700 ppbv	1745 ppbv	0.48
N ₂ O	270 ppbv	314 ppbv	0.15
HFCs, PFCs, SF ₆	0	various	≈ 0.02
Total			2.11

20 Source: IPCC, 2001

21 22

23

24

25

26

27

28

29

30

31

These radiative forcing levels were chosen so that the associated CO₂ concentrations would be roughly 450 ppmv, 550 ppmv, 650 ppmv, and 750 ppmv after accounting for the contributions to radiative forcing from the non-CO₂ GHGs. Thus, these CO₂ concentrations are not the CO₂ equivalent concentrations associated with the four radiative forcing levels. Furthermore, they are approximations that were used as a guide to develop the radiative forcing stabilization levels for the full suite of gases considered in this research (Table ES.2). The CO₂ concentrations in the scenarios do not exactly match these approximations, and the CO₂ concentrations in the scenarios differ among modeling groups because of differences in the treatment of the forces that influence emissions of GHGs, possibilities for emissions reductions, and tradeoffs between reductions among GHGs.

32 33 34

35

36

37

Table ES.2. Radiative Forcing Stabilization Levels (Wm-2) and Approximate Resulting CO₂ Concentrations (ppmv). The radiative forcing levels were constructed so that the CO₂ concentrations resulting from stabilization of total radiative forcing, after accounting for radiative forcing from the non-CO₂ GHGs, would be roughly 450 ppmv, 550 ppmv, 650 ppmv, and 750 ppmv.

		Approximate Contribution to	Approximate	
		Radiative	Contribution	Corresponding
	Total Radiative	Forcing from	to Radiative	CO ₂
	Forcing from	non-CO ₂	Forcing from	Concentration
	GHGs (Wm ⁻²)	GHGs (Wm ⁻²)	CO ₂ (Wm ⁻²)	(ppmv)
Level 1	3.4	0.8	2.6	450
Level 2	4.7	1.0	3.7	550
Level 3	5.8	1.3	4.5	650
Level 4	6.7	1.4	5.3	750
Year 1998	2.11	0.65	1.46	365
Preindustrial	0	0	0	275

ES.5. Overview of the Scenarios

1 2

 stabilization scenarios: four for each of the three modeling groups.

ES.5.1. Reference Scenarios

The difficulty in achieving any specified level of atmospheric stabilization depends heavily on the emissions that would occur absent actions to address GHG emissions. In other words, the reference scenario strongly influences the stabilization scenarios. If the reference scenario has cheap fossil fuels and high economic growth, then larger changes to the energy sector and other parts of the economy may be required to stabilize the atmosphere. On the other hand, if the reference scenario shows lower growth and emissions, and perhaps increased exploitation of non-fossil sources even in the absence of climate policy, then the effort required to stabilize radiative forcing will not be as great.

Findings are summarized here first for the three reference scenarios, then for the twelve

Energy production, transformation, and consumption are central features in all of these scenarios, although non-CO₂ gases and changes in land use also make a significant contribution to aggregate GHG emissions. Demand for energy over the coming century will be driven by economic growth and will also be strongly influenced by the way that energy systems respond to depletion of resources, changes in prices, and improvements in technology. Demand for energy in developed countries remains strong in all scenarios and is even stronger in developing countries, where millions of people seek greater access to commercial energy. These developments strongly influence the emissions of GHGs, their disposition, and the resulting change in radiative forcing under reference conditions.

The three reference scenarios show the implications of this increasing demand and the improved access to energy, with the ranges reflecting the variation among the three modeling groups. Global primary energy production rises substantially in all three reference scenarios, from about 400 EJ/yr in 2000 to between roughly 1275 EJ/yr and 1500 EJ/yr in 2100 (Figure ES.1). U.S. primary energy production also grows substantially, about 1¼ to 2½ times present levels by 2100 (Figure ES.2). Primary energy growth occurs despite continued improvements in the efficiency of energy use and energy

production technologies. For example, the U.S. energy intensity—the ratio of energy consumption to economic output—declines 60% to 75% between 2000 and 2100 across the three reference scenarios.

Figure ES.1. Global Primary Energy Consumption (EJ/yr)

Figure ES.2. U.S. Primary Energy Consumption (EJ/yr)

All three reference scenarios include a gradual reduction in the consumption of conventional oil resources. However, in all three reference scenarios, a range of alternative fossil-based resources, such as synthetic fuels from coal and unconventional oil resources (e.g., tar sands and oil shales), are available and become economically viable. Fossil fuels provide almost 90% of the global energy supply in the year 2000, and they remain the dominant energy source in the three reference scenarios throughout the twenty-first century, supplying 70% to 80% of total primary energy in 2100.

However, non-fossil fuel energy use also grows over the century in all three reference scenarios. Contributions in 2100 range from 250 EJ to 450 EJ—an amount equaling roughly ½ times to a little over total global energy consumption today. Despite this growth, these sources never supplant fossil fuels, although they provide an increasing share of the total, particularly in the second half of the century.

Consistent with the characteristics of primary energy, global and U.S. electricity production continues to rely on coal, although this contribution varies among the reference scenarios (Figure ES.3 and Figure ES.4). The contribution of renewable and nuclear energy varies considerably in the different reference scenarios, depending on resource availability, technology, and non-climate policy considerations. For example, global nuclear generation in the reference scenarios ranges from about 1½ times current levels (if non-climate concerns such as safety, waste, and proliferation constrain its growth as is the case in one reference scenario), to an expansion of almost an order of magnitude assuming relative economics as the only constraint.

Figure ES.3. Global Electricity Production (EJ/yr)

Figure ES.4. U.S. Electricity Production (EJ/yr)

In the reference scenarios, oil and natural gas prices rise through the century relative to year 2000 levels, whereas coal and electricity prices remain relatively stable. It should be emphasized, however, that the models used in this research were not designed to simulate short-term, fuel-price spikes, such as those that occurred in the 1970s, early 1980s, and more recently in 2005. Thus, price trends in the scenarios should be interpreted as multi-year averages.

As a combined result of all these influences, emissions of CO₂ from fossil fuel combustion and industrial processes in the reference scenarios increase from

approximately 7 GtC/yr in 2000 to between 22.5 GtC/yr and 24.0 GtC/yr in 2100; that is, from 3 to 3½ times current levels (Figure ES.5).

Figure ES.5. Global Emissions of CO₂ from Fossil Fuels and Industrial Sources [CO₂ from land-use change excluded] Across Reference Scenarios (GTC/yr)

 It is instructive to see how emissions are divided between industrialized countries (Annex 1) and developing countries (Non-Annex 1). Developing country emissions overtake those of developed countries in the 2020 to 2030 timeframe in the reference scenarios (Figure ES.6). This suggests the difficulty of stabilizing radiative forcing without developing-country participation. Indeed, even if developed countries were to reduce their emissions to zero, global involvement would still be necessary for stabilization.

Figure ES.6. Global Emissions of Fossil Fuel and Industrial CO₂ by Annex I and Non-Annex I Countries Across Reference Scenarios (GtC/yr)

The capacity of the ocean to absorb CO₂ differs among the three models. The ocean is a major sink for CO₂, and the rate at which the oceans take up CO₂ generally increases in the reference scenarios as concentrations rise early in the century. However, processes in the ocean can slow this rate of increase at high concentrations late in the century. The three reference scenarios have ocean uptake in the range of 2 GtC/yr in 2000, rising to about 5 GtC/yr to 11 GtC/yr by 2100. The three ocean models behave more similarly in the stabilization scenarios; for example, the difference between ocean uptake in the most stringent stabilization scenarios is less than 1 GtC/yr in 2100.

Two of the three participating models include sub-models of the exchange of CO₂ with the terrestrial biosphere, including the net uptake by plants and soils and the emissions from deforestation. In the reference scenarios from these modeling groups, the terrestrial biosphere acts as a small annual net sink (less than 1 GtC/yr) in 2000, increasing to an annual net sink of roughly 2 GtC/yr to 3 GtC/yr by the end of the century. The third modeling group assumed a zero net exchange. Changes in emissions from terrestrial systems over time in the reference scenarios reflect assumptions about human activity (including a decline in deforestation) as well as increased CO₂ uptake by vegetation as a result of the positive effect of CO₂ on plant growth. There remains substantial uncertainty about this carbon fertilization effect and its evolution under a changing climate.

Although this Executive Summary focuses on the most important anthropogenic GHG, CO₂, the models include a number of other GHGs (CH₄, N₂O SF₆, PFCs, and HFCs), which are emitted from various sources, including agriculture, waste management, biomass burning, fossil fuel production and consumption, and a number of industrial activities. Future global anthropogenic emissions of CH₄ and N₂O vary widely among the reference scenarios, ranging from flat or declining emissions to increases of 2 to 2½ times present levels. These differences reflect alternative views of technological opportunities and different assumptions about whether current emissions rates will be reduced

significantly for non-climate reasons, such as air pollution control and/or higher natural gas prices that would further stimulate the capture of CH₄ emissions for its fuel value.

Increases in emissions from the global energy system and other human activities lead to higher atmospheric GHG concentrations and radiative forcing. This increase is moderated by natural biogeochemical removal processes. As a result, GHG concentrations rise substantially over the century in the reference scenarios. By 2100, CO_2 concentrations range from about 700 ppmv to 900 ppmv, up from 365 ppmv in 1998. CH_4 concentrations in 2100 range from 2000 ppbv to 4000 ppbv, up from 1745 ppbv in 1998, and N_2O concentrations in 2100 range from about 375 ppbv to 500 ppbv, up from 314 ppbv in 1998.

As a result, radiative forcing in 2100 ranges from 6.4 Wm⁻² to 8.6 Wm⁻² relative to preindustrial levels, up from a little over 2 Wm⁻² today. The non-CO₂ GHGs account for about 20% to 25% of the forcing at the end of the century (Figure ES.7).

Figure ES.7. Radiative Forcing by Gas Across Reference Scenarios (Wm-2)

ES.5.2. Stabilization Scenarios

Important assumptions underlying the stabilization scenarios include the flexibility that exists in a policy design and, as represented by the modeling groups, seeking out least cost options for emissions control regardless of where they occur, what substances are controlled, or when they occur. This set of conditions is referred to as where, what, and when flexibility. Equal marginal costs of abatement among regions, across time (taking into account discount rates and the lifetimes of substances), and among substances (taking into account their relative warming potential and different lifetimes) will, under specified conditions, lead to least cost abatement. Each modeling group applied an economic instrument that priced GHGs in a manner consistent with the group's interpretation of where, what and when flexibility. The economic characteristics of the scenarios thus assume a policy designed with the intent of achieving the required reductions in GHG emissions in a least-cost way. Key implications of these assumptions are that: (1) all nations proceed together in restricting GHG emissions from 2012 and continue together throughout the century, and that the same marginal cost is applied across sectors (where flexibility); (2) the marginal cost of abatement rises over time in based on each modeling group's interpretation of when flexibility, with the effect of linking emissions mitigation efforts over the time horizon of the scenarios; and (3) stabilization of radiative forcing is achieved by combining control of all GHGs – with differences in how modeling groups compared them and assessed the implications of what flexibility.

Although these assumptions are convenient for analytical purposes, to gain an impression of the implications of stabilization, they are idealized versions of possible outcomes. For the abatement costs be representative of actual abatement costs would require, among other things, that a negotiated international agreement include these features. Failure in that regard would have a substantial effect on the difficulty of achieving any of the

stabilization levels in considered in this research. For example, a delay of many years in the participation of some large countries would require greater effort by the others, and policies that impose differential burdens on different sectors without mechanisms to allow for equalizing marginal costs across sectors can result in a many-fold increase in the cost of any environmental gain. Therefore, *it is important to view these result as scenarios under specified conditions, not as predictions or best-judgment forecasts of the most likely outcome within the national and international political system.* Further, none of the scenarios considered the extent to which variation from these least-cost rules might be improved upon given interactions with existing taxes, technology spillovers, or other non-market externalities.

If the developments in these reference scenarios were to occur, concerted efforts to reduce GHG emissions would be required to stabilize radiative forcing at the levels considered in this research. Such limits would shape technology deployment throughout the century and have important economic consequences. The scenarios demonstrate that there is no single technology pathway consistent with a given level of radiative forcing. Furthermore, there are other possible pathways than those considered in this research.

Stabilization of radiative forcing at the levels examined in this research would require a substantially different energy system globally, and in the U.S., than what emerges in the reference scenarios. The degree and timing of change in the global energy system depends on the level at which radiative forcing is stabilized (Figure ES.8 and Figure ES.9).

Figure ES.8. Global Primary Energy by Fuel Across Scenarios (EJ/yr)

Figure ES.9. U.S. Primary Energy by Fuel Across Scenarios (EJ/yr)

Across the stabilization scenarios, the energy system relies more heavily on non-fossil energy sources, such as nuclear, solar, wind, biomass, and other renewable energy forms, than in the associated reference scenarios. The scenarios differ in the degree to which these technologies are deployed, depending on assumptions about: technological improvements; the ability to overcome obstacles, such as intermittency in the case of solar and wind power, or safety, waste, and proliferation issues in the case of nuclear power; and the policy environment surrounding these technologies. End-use energy consumption, while still higher than today's levels, is lower in the stabilization scenarios than in the reference scenarios.

Carbon dioxide capture and storage (CCS) is widely deployed because each modeling group assumed that the technology can be successfully developed and that concerns about storing large amounts of carbon do not impede its expansion. Removal of this assumption would make the stabilization levels more difficult to achieve and would lead to greater demand for low-carbon sources such as renewable energy and nuclear power, to the extent that growth of these other sources is not otherwise constrained.

Significant fossil fuel use continues across the stabilization scenarios, both because stabilization allows for some level of carbon emissions in 2100 depending on the stabilization level and because of the presence in all the stabilization scenarios of CCS technology.

Increased use is made of biomass energy crops, the contribution of which is ultimately limited by competition with agriculture and forestry. One modeling group examined the importance of valuing terrestrial carbon similarly to the way fossil fuel carbon is valued in stabilization scenarios. It was found that important interactions between large-scale deployment of commercial bioenergy crops and land use occurred to the detriment of unmanaged ecosystems when no economic value was placed on terrestrial carbon.

The lower the radiative forcing stabilization level, the larger the scale of change in the global energy system relative to the reference scenario required over the coming century and the sooner those changes would need to occur (Figure ES.10).

Figure ES.10. Carbon emissions (GtC/yr) in the Reference and Stabilization Scenarios

Across the stabilization scenarios, the scale of the emissions reductions required relative to the reference scenario increases over time, with the bulk of emissions reductions taking place in the second half of the century. But emissions reductions occur in the first half of the century in every stabilization scenario.

The 2100 time horizon of this research limited examination of the ultimate stabilization requirements. Further reductions in CO_2 emissions after 2100 would be required in all of the stabilization scenarios, because atmospheric stabilization at any of the levels considered in this research requires human emissions of CO_2 in the long term to be essentially halted. Despite the fact that much of the carbon emissions will eventually make its way into oceans and terrestrial sinks, some will remain in the atmosphere for thousands of years. Only CCS can allow continued burning of fossil fuels. Higher radiative forcing limits can delay the point in time at which emissions must be reduced toward zero, but this requirement must ultimately be met.

Fuel sources and electricity generation technologies change substantially, both globally and in the U.S., under stabilization scenarios compared to the reference scenarios. There are a variety of technological options in the electricity sector that reduce carbon emissions in these scenarios (Figure ES.11 and Figure ES.12).

Figure ES.11. Global Electricity by Fuel across Scenarios (EJ/yr)

Figure ES.12. U.S. Electricity by Fuel across Scenarios (EJ/yr)

By the end of the century, electricity produced by conventional fossil technology that freely emits CO_2 is reduced in the stabilization scenarios relative to reference scenario scenarios. The level of electricity production from technologies that emit CO_2 varies

substantially with the stabilization level; in the most stringent stabilization scenarios, electricity production from these technologies is reduced toward zero.

The economic effects of stabilization are substantial in many of the stabilization scenarios, although much of this cost is borne later in the century if the mitigation paths assumed in these scenarios are followed. As noted earlier, each of the modeling groups assumed that a global policy was implemented after 2012, with universal participation by the world's nations, and that the time path of reductions approximated a least-cost solution. These assumptions of *where*, *when*, and *what* flexibility lower the economic consequences of stabilization relative to what they might be with other implementation approaches.

The stabilization scenarios follow a pattern where, in most scenarios, the carbon price rises steadily over time (Table ES.3), providing an opportunity for the energy system to adjust gradually. Although the general shape of the carbon price trajectory over time is similar across the models, the carbon prices vary substantially across the models. For example, for the less stringent stabilization levels two of the modeling groups produced scenarios with carbon prices of \$10 or below per tonne of carbon in 2020, with carbon prices rising to roughly \$100 per tonne in 2020 at the most stringent stabilization level. The scenarios from the third modeling group show higher initial carbon prices in 2020, ranging from around \$20 for the least stringent stabilization level to over \$250 for the most stringent stabilization level.

Table ES.3: Carbon Prices at Various Points in Time for the Stabilization Scenarios

	2020 (\$/tonne C)			2030 (\$/tonne C)		
Stabilization						
Level	IGSM	MERGE	MiniCAM	IGSM	MERGE	MiniCAM
Level 4	\$18	\$1	\$1	\$26	\$2	\$2
Level 3	\$30	\$2	\$4	\$44	\$4	\$7
Level 2	\$75	\$8	\$15	\$112	\$13	\$26
Level 1	\$259	\$110	\$93	\$384	\$191	\$170

	2050 (\$/tonne C)			2100 (\$/tonne C)		
Stabilization						
Level	IGSM	MERGE	MiniCAM	IGSM	MERGE	MiniCAM
Level 4	\$58	\$6	\$5	\$415	\$67	\$54
Level 3	\$97	\$11	\$19	\$686	\$127	\$221
Level 2	\$245	\$36	\$69	\$1,743	\$466	\$420
Level 1	\$842	\$574	\$466	\$6,053	\$609	\$635

 These differences in carbon prices, along with other model features, lead to similar variation in the costs of stabilization. At the most stringent stabilization level, for example, for example, gross world product (aggregating country figures using market exchange rates) is reduced in 2050 from around 1% in the scenarios from two of the modeling groups to approximately 5% in the scenario from the third, and in 2100 from less than 2% in two of the scenarios to over 16% in the third.

The variation in carbon prices and reductions in gross world product is attributable to many factors, but two are most prominent. First, the amount that CO₂ emissions must be reduced to achieve stabilization differs among the models (Table ES.4), because of differing assumptions regarding economic growth and other factors that determine emissions in the reference scenarios; levels of CO₂ uptake by the oceans and terrestrial biosphere; and availability of control for non-CO₂ GHGs.

Second, the modeling groups chose different assumptions regarding the technologies available for emissions reductions, particularly in the second half of the century. Most prominent are differences in assumptions about technologies to shift final energy demand to low-CO₂ sources such as biofuels, low-carbon electricity or hydrogen, in transportation, industrial and buildings end uses. The differences in technological assumptions among the modeling groups is reflected the relationship between carbon prices and percentage abatement (Figure ES.13), a form of marginal abatement cost curve, for the three models in 2050 and 2100. The scenarios exhibit very similar behavior to mid-century, but different assumptions about technological options lead to divergence by 2100.

Table ES.4. Cumulative Emissions Reductions from the Reference Scenarios across Models in the Stabilization Scenarios (GtC through 2100)

	`	0	,
	IGSM	MERGE	MiniCAM
Level 4	472	112	97
Level 3	674	258	267
Level 2	932	520	541
Level 1	1172	899	934

Figure ES.13. Relationship Between Carbon Price and Percentage Abatement in 2050 and 2100

 In all of the scenarios, emissions reductions in electric power sector come at relatively lower prices than in other sectors (e.g. buildings, industry, and transport) so that the electricity sector is essentially decarbonized in the most stringent scenarios from all three modeling groups (Figure ES.14). At somewhat higher cost other sectors can respond to rising carbon prices by reducing demands for fossil fuels, applying CCS technologies where possible, and substituting non-emitting energy sources such as bioenergy, low-carbon electricity, and hydrogen. All of the scenarios increase the amount of electricity used per unit of total primary energy (Figure ES.15), but those scenarios with the highest relative use of electricity tend to exhibit lower stabilization costs in part because of the larger role of decarbonized power generation. Assumptions regarding costs and performance of technologies to facilitate these adjustments, particularly in the post-2050 period, play an important role in determining stabilization costs.

Figure ES.14. Percentage of World Electricity from Low-or Zero-Emissions Technologies

conditions assumed.

1 2 3

Figure ES.15. Ratio of Global Electricity Production to Primary Energy Consumption

The assumption of when flexibility links elements of a scenario through time. This in turn

4 5

> 6 means that in addition to near-term technology availability, differences in assumptions 7 about technology in the post-2050 period are also reflected in near-term emissions 8 reductions and GHG prices.

9 10

11 12

13 14 15

16 17

18 19

20 21 22

23

24 25 26 As noted earlier, the overall cost levels are strongly influenced by the idealized policy scenario that has all countries participating from the start, the assumption of where flexibility, an efficient pattern of emissions reductions over time, and integrated reductions in emissions of the different GHGs. Assumptions in which policies are implemented in a less efficient manner would lead to higher cost. Thus,

these scenarios should not be interpreted as applying beyond the particular

rise with more stringent stabilization levels in these scenarios.

Constraints on GHG emissions also affect fuel prices. Generally, the producer price for fossil fuels falls as demand for them is depressed by the stabilization measures. Users of fossil fuels, on the other hand, pay for the fuel plus a carbon price if the CO₂ emissions were freely released to the atmosphere (Table ES.5). Therefore, consumer costs of energy

Table ES.5. Relationship Between a \$100/tonne Carbon Tax and Fuel Prices. (This table does not include any adjustments in producer prices due to changes in energy demands under stabilization.)

Fuel	Base Cost (\$2005)	Added Cost (\$)	Added Cost (%)
Crude Oil (\$/bbl)	\$60.0	\$12.2	20%
Regular Gasoline (\$/gal)	\$2.39	\$0.26	11%
Heating Oil (\$/gal)	\$2.34	\$0.29	12%
Wellhead Natural Gas (\$/tcf)	\$10.17	\$1.49	15%
Residential Natural Gas (\$/tcf)	\$15.30	\$1.50	10%
Utility Coal (\$/short ton)	\$32.6	\$55.3	170%
Electricity (c/kWh)	\$9.6	\$1.76	18%

Source: Bradley et al. 1991, updated with U.S. average prices for the 4th quarter of 2005 as reported in DOE, 2006

28 29 30

27

Non-CO₂ gases play an important role in shaping the degree of change in the energy 31 system. Scenarios that assume relatively better performance of technologies for reducing 32 non-CO₂ emissions allow a given radiative forcing limit to be met with greater forcing 33 from CO₂ and, all other things being equal, less extensive changes to the energy system.

34 Differences in the gas concentrations among the three models reflect differences in

35 assumed mitigation opportunities for non-CO₂ GHGs relative to CO₂. For example, lower CH_4 and N_2O emissions exhibited in the scenarios from one of the modeling groups reflects a greater market penetration of technologies that reduce CH_4 and N_2O emissions with positive profits even in the reference scenario, and significant abatement in the stabilization scenarios. With lower levels of CH_4 and N_2O than is the case in the scenarios from the other two modeling groups, higher levels of CO_2 are still consistent with the overall radiative forcing levels (Figure ES. 14).

Figure ES.16. Total Radiative Forcing in 2100 Across Scenarios (Wm-2 relative to preindustrial)

Achieving stabilization of atmospheric GHGs poses a substantial technological and policy challenge. It would require important transformations of the global energy system. The cost and feasibility of such a goal depends on the evolution of technology and its ability to overcome existing limits and barriers to adoption, and it depends on the efficiency and effectiveness of the policy instruments employed to achieve stabilization. These scenarios provide a means to gain insight into the challenge of stabilization and the implications of technology.

ES.6. Using the Scenarios and Future Work

The scenarios in this report are intended as one of many inputs to public and private discussions regarding the threat of climate change and what to do about it. They are also intended to serve as a point of departure for further CCSP and other analyses that might inform these discussions in the future. A range of such analyses are possible. For example, they could be applied as the basis for assessing the climate implications of alternative stabilization levels. They might also be used in studies exploring possible technology cost and performance goals, using information from the scenarios on energy prices and technology deployment levels. Similarly, the scenarios might inform analyses of the non-climate environmental implications of implementing potential new energy sources at a large scale. Another possibility is that the scenarios could serve as an input to a more complete analysis of the welfare effects of stabilizing at the different radiative forcing levels, such as indicators of consumer impact in the U.S. (The reader is reminded, however, that these effects do not include the benefits that alternative stabilization levels might yield in reduced climate change risk or ancillary effects, such as effects on air pollution). The scenarios could also be compared against past and future scenarios analyses.

The scenarios in this report represent but one step in a long process of research and assessment, and the scenarios and their underlying models will benefit from further work. The review process has identified at least five different areas that hold the promise of potentially fruitful research: (1) technology sensitivity analysis, (2) consideration of non-idealized policy architectures, (3) expansion and improvement of the land use and terrestrial carbon cycle linkages to the energy and economic model components, (4) inclusion of other radiatively-important substances such as emissions affecting tropospheric ozone and aerosols, and (5) decision-making under uncertainty. These needs for additional research and analysis are elaborated in Chapter 5.

ES.7. References

- 3 CCSP Climate Change Science Program. 2003. Strategic Plan for the U.S. Climate
- 4 Change Science Program.
- 5 CCSP Climate Change Science Program. 2005. Final Prospectus for Synthesis and
- 6 Assessment Product 2.1.
- 7 U.S. DOE Department of Energy, Energy Information Administration, 2006, Short-
- 8 Term Energy, and Winter Fuels Outlook October 10th, 2006 Release
- 9 IPCC Intergovernmental Panel on Climate Change. 2001. Climate Change 2001: The
- 10 Scientific Basis. eds JT Houghton, Y Ding, DJ Griggs, N Noguer, PJ van der Linden, X
- Dai, K Maskell and CA Johnson, Cambridge University Press, Cambridge, U.K.

Figure ES.1. Global Primary Energy Consumption (EJ/yr). Global primary energy consumption rises in all three reference scenarios, from about 400 EJ/yr in 2000 to between roughly 1275 EJ/yr and 1500 EJ/yr in 2100. There is a gradual reduction in the dependence on conventional oil resources. However, a range of alternative fossil-based resources, such as synthetic fuels from coal and unconventional oil resources (e.g., tar sands and oil shales) are available and become economically viable. Fossil fuels provided almost 90% of the global energy supply in the year 2000, and they remain the dominant energy source in the three reference scenarios throughout the twenty-first century, supplying 70% to 80% of total primary energy in 2100. Non-fossil fuel energy use grows over the century in all three reference scenarios. The range of contributions in 2100 is from 250 EJ/yr to 450 EJ/yr— between roughly ½ and 1½ times global energy consumption today.

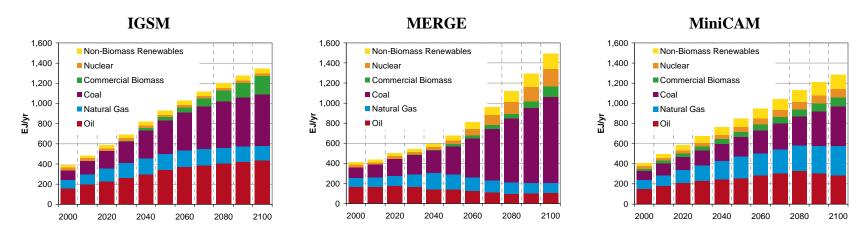


Figure ES.2. U.S. Primary Energy Consumption (EJ/yr). U.S. primary energy production rises in all three reference scenarios. Growth is in the range of 1½ to 2½ times present levels by 2100. This growth occurs despite continued improvements in the efficiency of energy use and production. U.S. energy intensity declines 60% to 75% between 2000 and 2100.

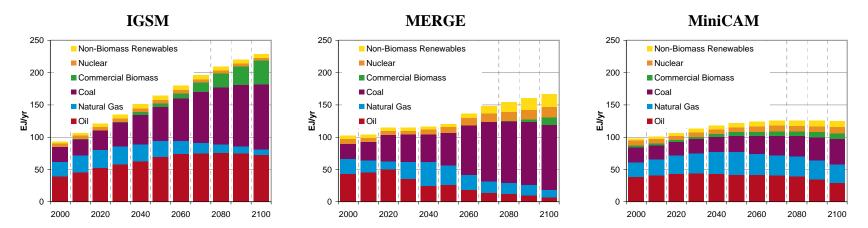


Figure ES.3. Global Electricity Production (EJ/yr). Global electricity production grows to over four times production in 2000 in all the reference scenarios. Global electricity production shows continued reliance on coal, although this contribution varies among the reference scenarios. The contribution of renewable energy and nuclear energy varies considerably in the different reference scenarios, depending on resource availability, technology, and non-climate policy considerations. For example, global nuclear generation in the reference scenarios ranges from about 1½ times current levels (if non-climate concerns such as safety, waste, and proliferation constrain its growth as is the case in one reference scenario), to an expansion of almost an order of magnitude assuming relative economics as the only constraint.

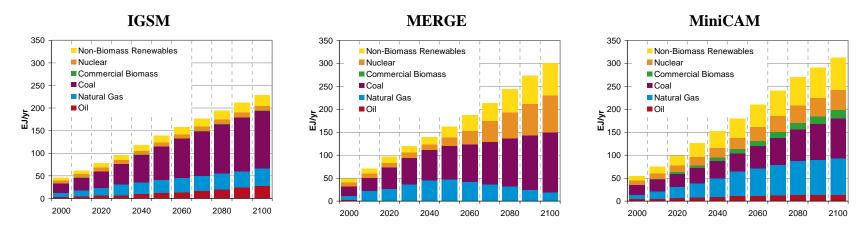


Figure ES.4. U.S. Electricity Production (EJ/yr). Continued dependence on coal for electricity generation is a feature of the reference scenario, with the degree of dependence varying among scenarios. Differences in nuclear power reflect assumptions about the degree to which issues of safety, waste, and proliferation constrain its growth.

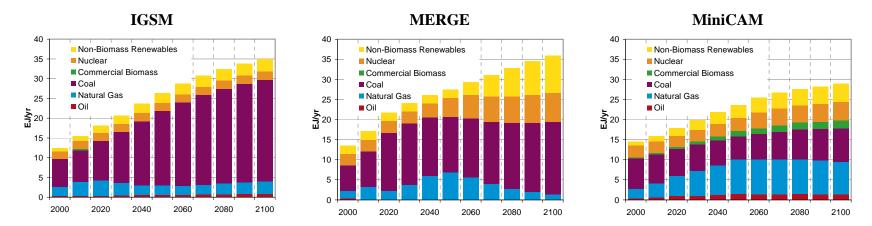


Figure ES.5. Global Emissions of CO₂ from Fossil Fuels and Industrial Sources [CO₂ from land-use change excluded] Across Reference Scenarios (GTC/yr). Global emissions of CO₂ from fossil fuel combustion and other industrial sources, mainly cement production, increase over the century in all three reference scenarios. By 2100 emissions reach 22.5 GtC/yr to 24 GtC/yr. Note that CO₂ from land-use change is excluded from this figure.





Figure ES.6. Global Emissions of Fossil Fuel and Industrial CO₂ by Annex I and Non-Annex I Countries Across Reference Scenarios (GtC/yr). Emissions of fossil fuel and industrial CO₂ in the reference scenarios show Non-Annex I emissions exceeding Annex I emissions for in all three reference scenarios by 2030 or earlier. Two reference scenarios show continued relative rapid growth in emissions in Non-Annex I regions after that such that their emissions are on the order of twice the level of Annex I by 2100. The third does not show continued divergence, due in part to relatively slower economic growth in Non Annex I regions; faster growth in Annex I; and increased emissions in Annex I as they become producers and exporters of shale oil, tar sands, and synthetic fuels from coal.



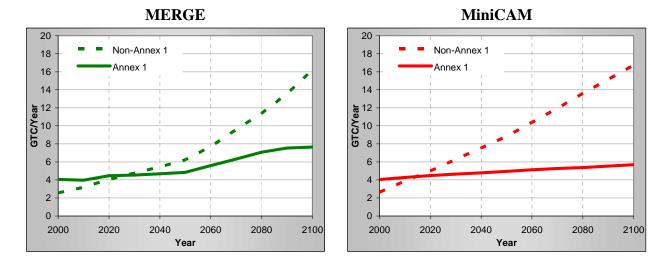


Figure ES.7. Radiative Forcing by Gas Across Reference Scenarios (Wm⁻²). The contribution of different GHGs to increased radiative forcing through 2100 show CO₂ accounting for 75% to 80% of the increased forcing from preindustrial for all 3 models. The total increase ranges from about 6.4 Wm⁻² to 8.6 Wm⁻² above preindustrial levels.

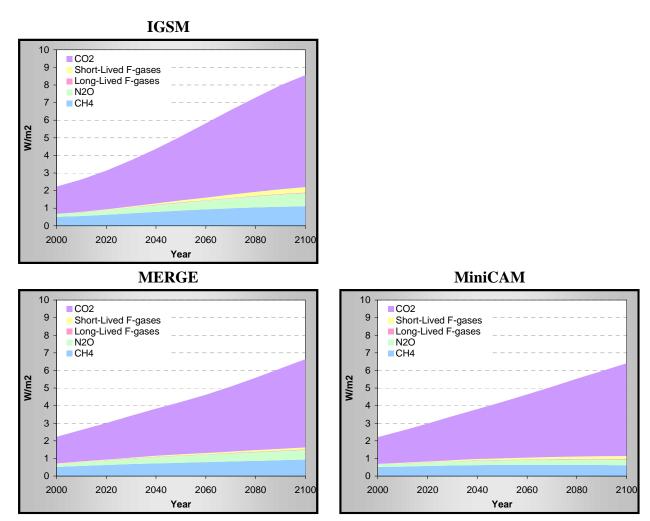
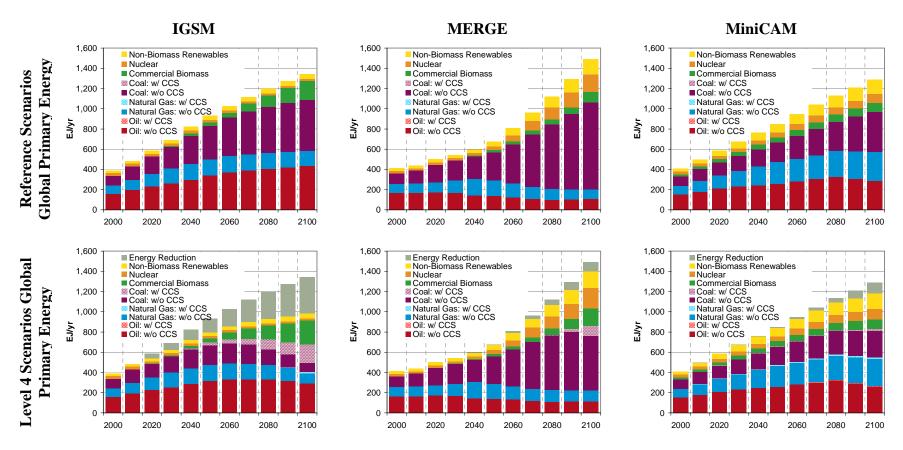


Figure ES.8. Global Primary Energy by Fuel Across Scenarios (EJ/yr): The global energy system undergoes a significant transformation in the stabilization scenarios from all three modeling groups. This transformation begins earlier the more stringent the stabilization level, and would continue into the next century for all stabilization levels. The transformation includes reduction in energy use, increased use of carbon-free sources of energy (biomass, other renewables, and nuclear), and addition of carbon capture and sequestration. The contribution of each of these varies among the models reflecting different assumptions about cost and performance, policy, and resource limits.



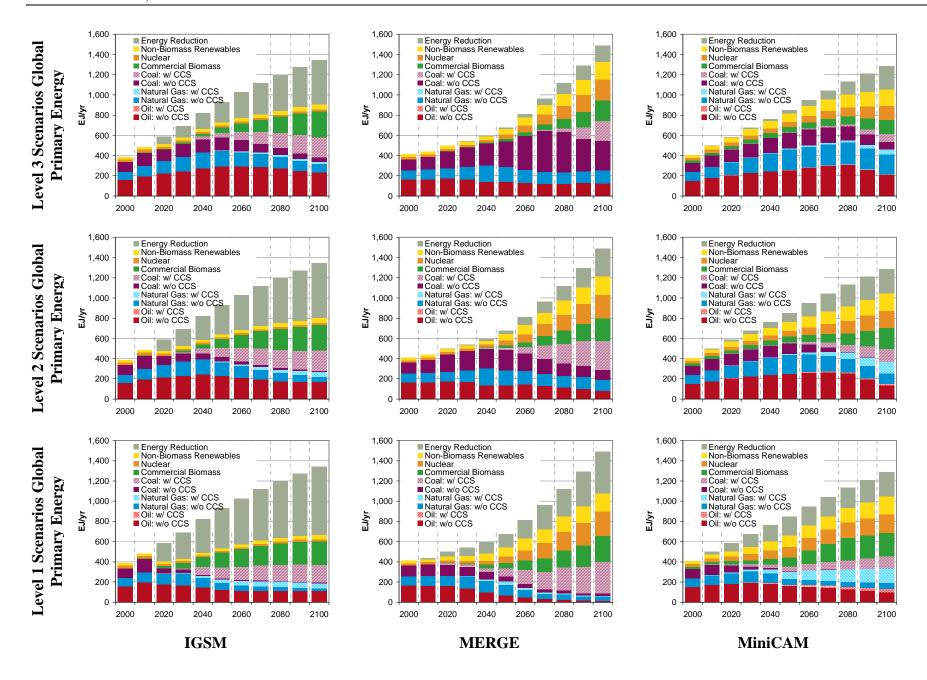
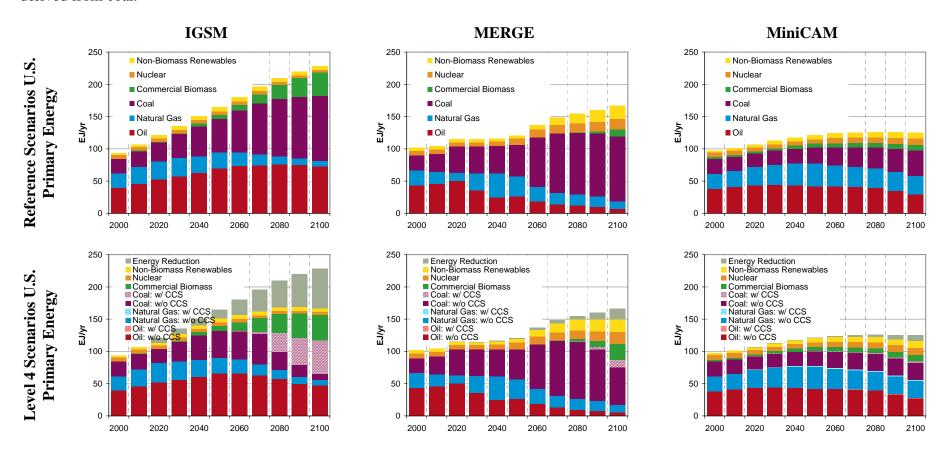


Figure ES.9. U.S. Primary Energy by Fuel Across Scenarios (EJ/yr): The U.S. energy system undergoes a significant transformation in the stabilization scenarios similar to the transformation in the global energy system. One difference, not obvious in this figure, is the transformation from conventional oil and gas to synthetic fuel production derived from shale oil or coal. One model (IGSM) includes heavy use of shale oil in the reference with some coal gasification, whereas another (MERGE) includes primarily synthetic liquid and gaseous fuels derived from coal.



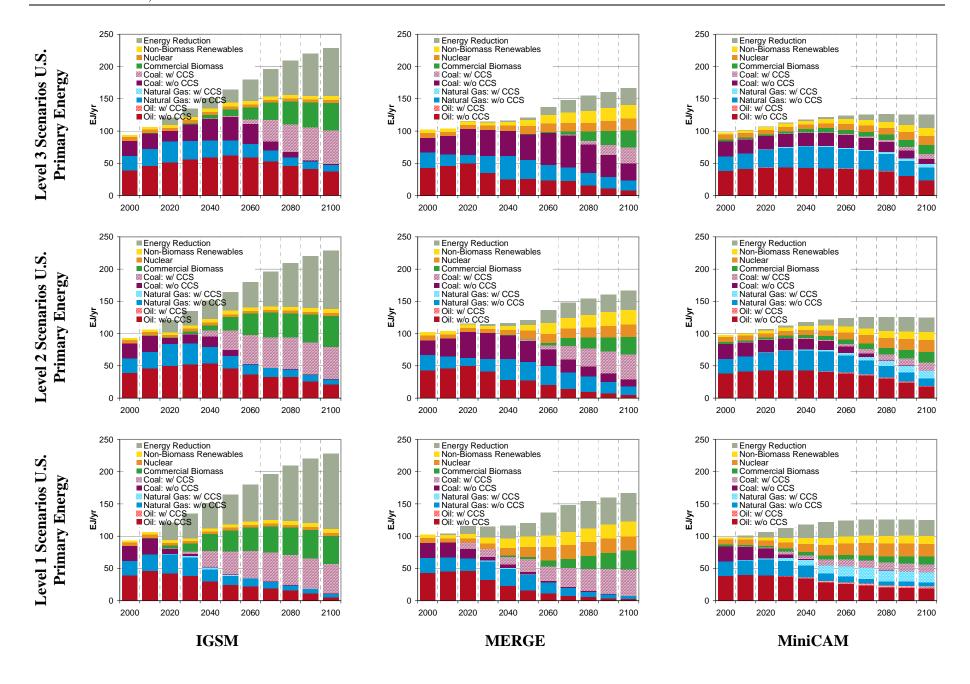


Figure ES.10: Carbon emissions (GtC/yr) in the Reference and Stabilization Scenarios. The tighter the constraint on the stabilization level, the faster the rate at which carbon emissions must decline from the baseline. This is because the stabilization level defines a long-term carbon budget, that is, the remaining amount of carbon that can be emitted in the future. The gradual deflection of the emissions from the reference reflects the assumption of *when* flexibility, with carbon prices rising gradually. The most stringent scenarios require global emissions to begin to fall absolutely from the start of the policy, whereas the other scenarios allow for some further increase.

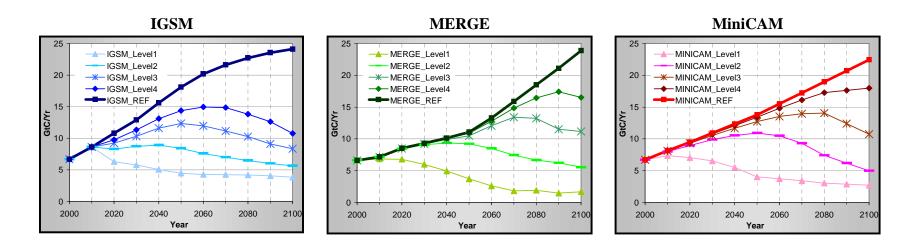
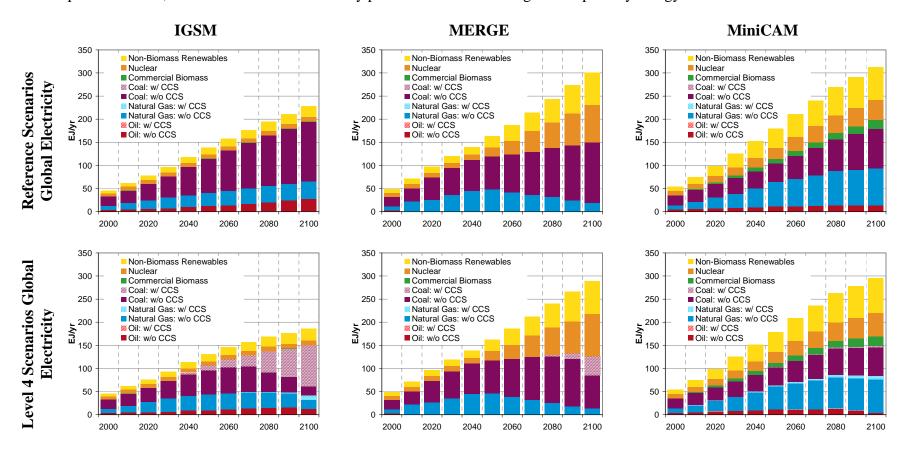


Figure ES.11. Global Electricity by Fuel across Scenarios (EJ/yr): Various electricity technology options could be competitive in the future, and different assumptions regarding their relative economic viability, reliability, and resource availability lead to considerably different scenarios of the global electricity sector in reference and stabilization scenarios across modeling groups. One reference scenario includes relatively little change in the electricity sector in the reference scenario, with continued reliance on coal. The other two reference scenarios include large transformations from the present. In all scenarios, large changes from reference are required to stabilize radiative forcing at the levels considered in this research. In all of the stabilization scenarios, the relative proportion of electricity in energy consumption increases, so the reductions in electricity production are not as large as for primary energy.



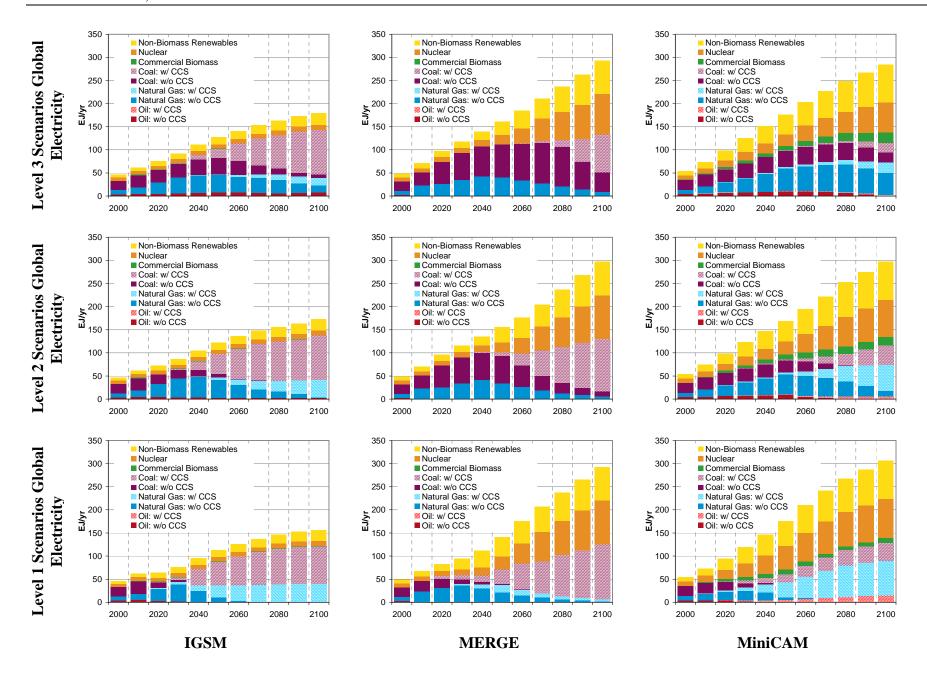
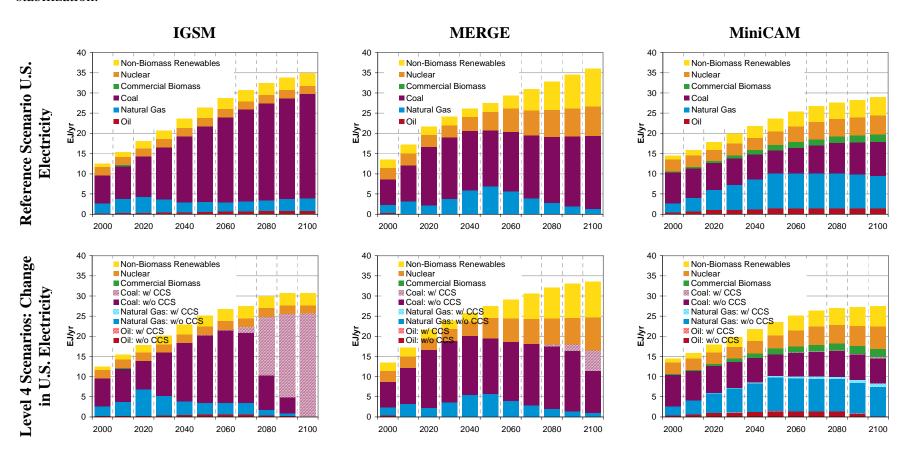


Figure ES.12. U.S. Electricity by Fuel across Scenarios (EJ/yr): U.S. electricity generation sources and technologies will need to be substantially transformed to meet the four radiative forcing stabilization levels. Carbon capture and sequestration figure in all three models under stabilization scenarios, but the contribution of other sources and technologies and the total amount of electricity used differ substantially. In all of the stabilization scenarios, the relative proportion of electricity in energy consumption increases, so the reductions in electricity production are not as large as for primary energy. In one scenario (MiniCAM Level 1), electricity production in the U.S. increases under stabilization.



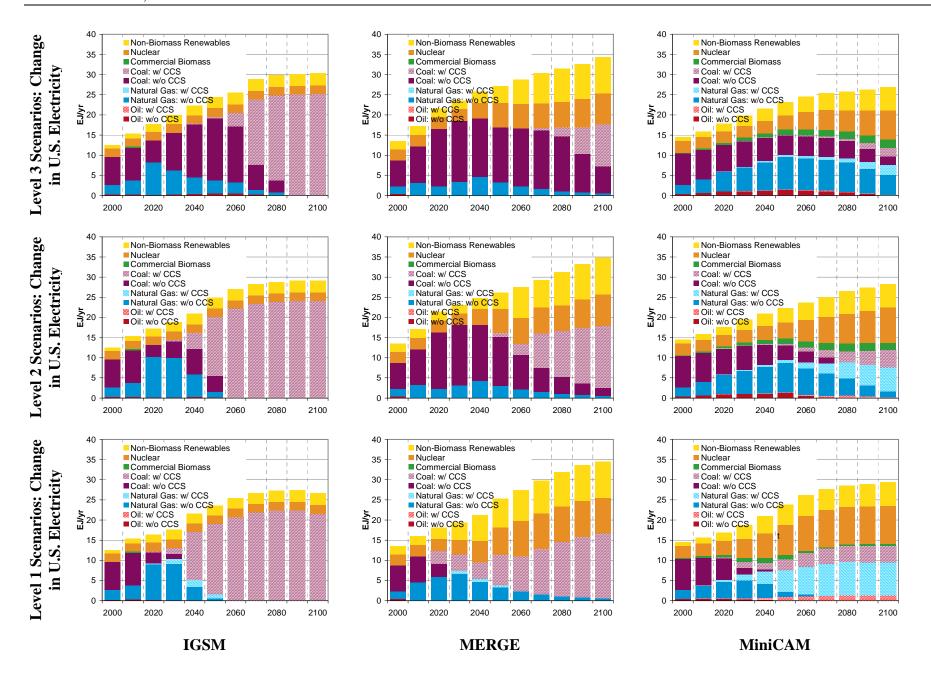



Figure ES.13. Relationship Between Carbon Price and Percentage Abatement in 2050 and 2100: The relationship between carbon price and percentage abatement is very similar among the models in 2050. In 2100, the relationship between carbon price and abatement diverges across the models, due in large part to different assumptions regarding the technologies available to facilitate emissions reductions late in the century. (Note that CO₂ emissions vary across the reference scenarios from the three modeling groups, so that similar percentage reductions, as shown in this figure, imply differing levels of total emissions reduction.)






Figure ES.14. Percentage of World Electricity from Low-or Zero-Emissions Technologies. All three modeling groups assumed sufficient technological options to allow for substantially reduced carbon emissions from electric power production. Options include fossil power plants with CCS, nuclear power, and renewable energy such as hydroelectric power, wind power, and solar power. In the Level 1 Scenarios, the electricity sector is almost fully decarbonized by the end of the century in all of the models.

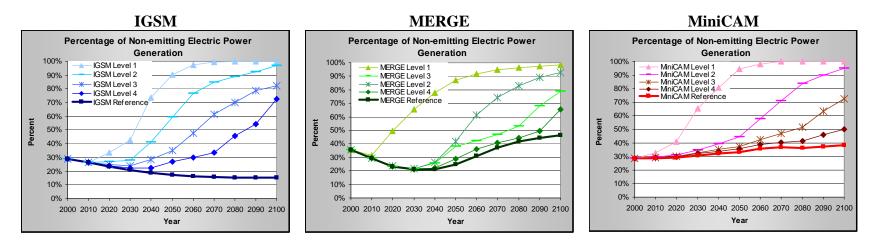


Figure ES.15. Ratio of Global Electricity Production to Primary Energy Consumption. Efforts to constrain CO₂ emissions result in increased use of electricity as a fraction of total primary energy in all three of the models. This is because all three modeling groups assumed lower cost technology options for reductions in emissions from electricity production than for substitution of fossil fuels in direct uses such as transportation. The MERGE and MiniCAM scenarios generally include greater electrification than the IGSM scenarios, with MiniCAM having the highest proportion of electricity to primary energy. Greater opportunities to electrify reduce the economic impacts of stabilization.


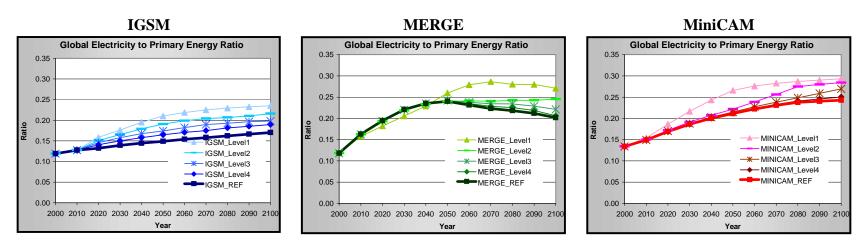


Figure ES.16. Total Radiative Forcing in 2100 Across Scenarios (Wm⁻² relative to preindustrial): CO₂ is the main contributor to radiative forcing in the year 2100. The opportunities to reduce control emissions from non-CO₂ GHGs influence the CO₂ emissions reductions required to meet a given radiative forcing stabilization level. At any stabilization level, scenarios with lower contributions to radiative forcing from non-CO₂ GHGs allow for greater radiative forcing from CO₂.

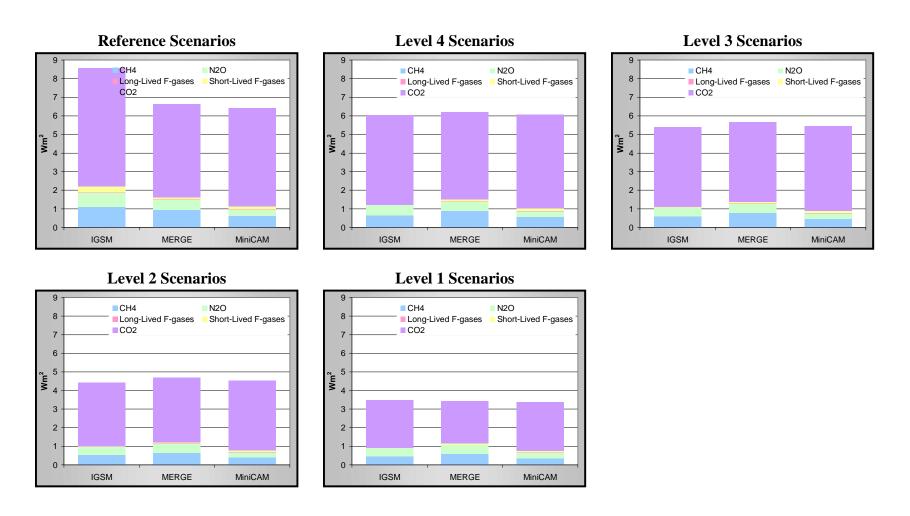

PAGE INTENTIONALLY LEFT BLANK

1.	INTRODUCTION AND OVERVIE	W
----	--------------------------	---

3	1.	INTRODUCTION AND OVERVIEW	1
4	1.1.	Introduction	1
5	1.2.	Background: Human Activities, Emissions, Concentrations, and Climate	
6		Change	4
7	1.3.	Research Design	7
8	1.3.	1. Model Selection	7
9	1.3.	2. Development of Reference Scenarios	8
10	1.3.	3. Development of the Stabilization Scenarios	9
11	1.4.	Interpreting Scenarios: Uses, Limits, and Uncertainty	10
12	1.5.	Report Outline	12
13	1.6.	References	13

1 2

1.1. Introduction

The Strategic Plan for the U.S. Climate Change Science Program (CCSP 2003) calls for the preparation of 21 synthesis and assessment products. Noting that "sound, comprehensive emissions scenarios are essential for comparative analysis of how climate might change in the future, as well as for analyses of mitigation and adaptation options," the Plan includes Product 2.1, Scenarios of Greenhouse Gas Emissions and Atmospheric Concentrations and Review of Integrated Scenario Development and Application. This report presents the scenarios created in the scenario-development component of Product 2.1; the review of scenario methods is the subject of a separate report. The guidelines for the development of these scenarios are set forth in the Final Prospectus for Synthesis and Assessment Product 2.1 (CCSP 2005). Consistent with the Prospectus and the nature of the climate change issue, these scenarios were developed using long-term models of global energy-agriculture-land-use-economy systems coupled to models of global atmospheric composition and radiation.

This report discusses the overall design of scenarios (Chapter 1); describes the key features of the participating models (Chapter 2); presents and compares the newly prepared scenarios (Chapters 3 and 4); and discusses emerging insights from these new scenarios, the uses and limitations of the scenarios, and avenues for further research (Chapter 5). Scenario details are available in a separate data archive.¹

The scenarios in this report are intended as one of many inputs to public and private discussions regarding the threat of climate change and what to do about it, and they may also serve as a point of departure for further Climate Change Science Program (CCSP) and other analyses that might inform these discussions in the future. The possible users of these scenarios are many and diverse. They include climate modelers and the science community; those involved in national public policy formulation; managers of Federal research programs; state and local government officials who face decisions that might be affected by climate change and mitigation measures; and individual firms, farms, and

-

¹ This data archive will be made available upon publication of the final draft of this report.

members of the public. Such a varied clientele implies an equally diverse set of possible needs, and no single scenario research product can hope to fully satisfy all of these needs. The Prospectus for this Product highlighted three particular areas in which the scenarios might provide valuable insights:

1. *Emissions Trajectories*. What emissions trajectories over time are consistent with meeting the four stabilization levels, and what are the key factors that shape them?

2. *Energy Systems*. What energy system characteristics are consistent with each of the four alternative stabilization levels, and how do they differ from one another?

3. *Economic Implications*. What are the possible economic consequences of meeting each of the four alternative stabilization levels?

It should be emphasized that there are issues of climate change decision making that these scenarios do not address. For example, they were not designed for use in exploring the role of aerosols in climate change. Also, they lack the regional detail that may be desired for many aspects of local or regional decision-making. In addition, the scenarios in this report do not constitute a cost-benefit analysis of climate policy. They focus exclusively on the issues associated with reducing emissions to meet various stabilization levels; they do not consider the damages avoided through stabilization or ancillary benefits that could be realized by emissions reductions, such as reductions in local air pollution reduction. Thus, although the scenarios should serve as a useful input to climate-related decision making, they address only one of the several components of a benefit-cost analysis of climate policy.

Three analytical models, all meeting the criteria set forth in the Prospectus, were used in preparing the new scenarios. As also directed in the Prospectus, fifteen scenarios are presented in this document, five from each of the three modeling groups. First, each group produced a unique reference scenario based on the assumption that no climate policy would be implemented either nationally or globally beyond the current set of policies in place (e.g., the Kyoto Protocol and the President's greenhouse gas emissions intensity target for the U.S.). These reference scenarios were developed independently by the modeling groups, so they provide three separate visions of how the future might unfold across the globe over the 21st century without additional climate policies.²

Each group then produced four additional stabilization scenarios, which are departures from each group's reference scenario. The Prospectus specified that stabilization levels, common across the groups, be defined in terms of the total long-term radiative impact of the suite of greenhouse gases (GHGs) that includes carbon dioxide (CO₂), nitrous oxide (N₂O), methane (CH₄), hydrofluorocarbons (HFCs), perfluorocarbons (PFCs), and sulfur hexafluoride (SF₆). This radiative impact is expressed in terms of radiative forcing, which

.

² Although there are many reasons to expect that the three reference scenarios would be different, it is worth noting that the modeling groups met periodically during the development of the scenarios to review progress and to exchange information. Thus, while not adhering to any formal protocol of standardization the three reference scenarios are not entirely independent.

is a measure of the additional heat trapped in the atmosphere by these six GHGs relative to preindustrial levels.

Although stabilization is defined in terms of radiative forcing, the stabilization levels were constructed so that the resulting CO₂ concentrations, after accounting for radiative forcing from the non-CO₂ GHGs, would be roughly 450 ppmv, 550 ppmv, 650 ppmv, and 750 ppmv. The radiative forcing limits therefore are higher than the forcing from CO₂ alone at these concentrations. Based on this requirement, the four stabilization levels were chosen as 3.4 Wm⁻² (Level 1), 4.7 Wm⁻² (Level 2), 5.8 Wm⁻² (Level 3), and 6.7 Wm⁻² (Level 4). In comparison, radiative forcing relative to preindustrial levels for this suite of gases stood at roughly 2.2 Wm⁻² in 2000. Details of these stabilization assumptions are elaborated in Section 1.3 and Chapter 4.

The production of emissions scenarios consistent with these stabilization goals required analysis beyond the study of the emissions themselves because of physical, chemical, and biological feedbacks within the Earth system. Scenarios focused only on emissions of GHGs and other substances generated by human activity (anthropogenic sources) can rely exclusively on energy-agriculture-economic models that represent human activity and the emissions that result. However, relating emissions paths to concentrations of GHGs in the atmosphere requires models that account for both anthropogenic and natural sources as well as the sinks for these substances.

Models that attempt to capture these complex interactions and feedbacks must, because of computational limits, use simplified representations of individual components of the Earth system. These simplified representations are typically designed to mimic the behavior of more complex models but cannot represent all of the elements of these systems. Thus, while the scenario research undertaken here uses models that represent both the anthropogenic sources (the global energy-industrial-agricultural economy) and the Earth system processes (ocean, atmosphere, and terrestrial systems), it is not intended to supplant detailed analysis of these systems using full scale, state-of-the-art models and analytic techniques. Rather, these scenarios provide a common point of departure for more complex analyses of individual components of the Earth system as it is affected by human activity. These might include detailed studies of sub-components of the energy sector, regional scenarios of climate change using three-dimensional general circulation models (GCMs) and further downscaling techniques, and assessment of the implications of climate change under various stabilization goals for economic activity and natural ecosystems.

The remainder of this chapter is organized into four sections. Section 1.2 provides an overview of scientific aspects of the climate issue as background for interpretation of these scenarios. Section 1.3 then presents the research design with a focus on the characteristics of the stabilization scenarios to be investigated in Chapter 4. Section 1.4 briefly discusses how scenarios of this type have been used to examine the climate change issue and the intended uses and limits of the new scenarios, focusing on interpretation of these scenarios under conditions of uncertainty. Section 1.5 provides a guide to the structure of the remaining chapters and the associated data archive.

1.2. Background: Human Activities, Emissions, Concentrations, and Climate Change

Materials that influence the Earth's radiation balance come in various forms, and most have natural as well as anthropogenic sources. Some are gases which remain in the atmosphere from days to millennia, trapping heat. They are known as GHGs because, while transparent to incoming short-wave radiation (the visible spectrum that people commonly perceive as light), they capture and reflect back to Earth long-wave radiation, thus increasing the temperature of the lower atmosphere. These naturally occurring GHGs, plus clouds and water vapor (the most important GHG of all), are responsible for creating a habitable climate on Earth. Without them, the average temperature at the Earth's surface would be colder than it is today by roughly 55°F (31°C).

GHGs are not the only influences on the Earth's radiative balance. Other gases such as oxides of nitrogen (NO_x) have no direct greenhouse effect, but they are components of the atmospheric chemistry that determine the lifetime of some of the heat-trapping GHGs and are involved in the reactions that produce tropospheric ozone, another GHG. Aerosols (non-aqueous particles suspended in air) may have positive or negative effects, depending on their relative brightness. Some present a white surface and reflect the sun's energy back to space; others are black and absorb solar energy, adding to the solar warming of the atmosphere. Aerosols also have an indirect effect on climate in that they influence the density and lifetime of clouds, which have a strong influence on the radiation balance and on precipitation. Humans also alter the land surface, changing its reflective properties, and these changes can have climate consequences with effects most pronounced at a local scale (e.g., urban heat islands) and regional levels (e.g., large-scale changes in forest cover). In addition, the climate itself has positive and negative feedbacks, such as the decrease in global albedo that would result from melting land and sea ice or the potential release of GHGs, such as CH_4 from wetlands.

Climate policy concerns are driven by the fact that emissions from human activities (mainly combustion of fuels and biomass, industrial activities, and agriculture) are increasing the atmospheric concentrations of these substances. Climate policy discussions have focused heavily on CO_2 , CH_4 , N_2O , and a set of fluorine-containing industrial chemicals – SF_6 and two families of substances that do not exist naturally, hydrogenated halocarbons (including hydrochlorofluorocarbons [HCFCs] and HFCs)³ and PFCs. Some of these substances remain in the atmosphere for decades (CH_4 and most HFCs), others for about 100 years (CO_2 and N_2O), and some for thousands of years (PFCs and SF_6).

Other naturally occurring substances whose levels have also been greatly enhanced by human activities remain in the atmosphere for days to months. With such short lifetimes, they are not well mixed in the atmosphere, so their effects have a regional pattern as well as global consequences. These substances include aerosols such as black carbon and other particulate matter; sulfur dioxide, which is the main precursor of the reflecting aerosols; and other gases such as volatile organic compounds, nitrogen dioxide, other

.

³ For simplicity, all hydrogenated halocarbons will be referred to as HFCs in the subsequent text. The greenhouse gas methyl chloroform is often also grouped along with HFCs and HCFCs.

oxides of nitrogen, and carbon monoxide. All are important components of atmospheric chemistry.

2 3 4

5

6

7

1

This suite of substances with different radiative potency and different lifetimes in the atmosphere presents a challenge in defining what is meant by atmospheric stabilization. Specification in terms of quantities of the gases themselves is problematic because there is no simple way to add them together in their natural units, such as tonnes or ppmy. Thus, a meaningful metric is needed to combine the effects of different GHGs.

8 9 10

11

12

13

14

15

One approach is to define stabilization in terms of some ultimate climate measure, such as the change in the global average temperature. One drawback of such measures is that they interject large uncertainties into the consideration of stabilization because the ultimate climate system response to added GHGs is uncertain. Climate models involve complex and uncertain interactions and feedbacks, such as increasing levels of water vapor, changes in reflective polar ice, cloud effects of aerosols, and changes in ocean circulation that determine the ocean's uptake of CO₂ and heat.

16 17 18

19

20

21

22

23

24

25

For the design of these scenarios, the Prospectus called for an intermediate, less uncertain measure of climate effect: the direct heat-trapping impact of a change in the concentrations of the six categories of GHGs listed earlier. It is constructed to represent the change in the net balance of the Earth with the sun (energy in versus energy out) in Wm⁻² of the Earth's shell. Generally referred to as radiative forcing (see Box 1.1), a positive value means a warming influence. This measure is widely used to compare the climate effects of different substances, although calculation of the net forcing of a group of gases, where there may be chemical interaction among them or saturation of the infrared spectrum, requires specialized models of atmospheric chemistry and radiation.

26 27 28

29

30

31

32

33

34

35

36

37

38

39

43 44

45

46

47

--- BOX 1.1: RADIATIVE FORCING ---

Most of the Sun's energy that reaches the Earth is absorbed by the oceans and land masses and radiated back into the atmosphere in the form of heat or infrared radiation. Some of this infrared energy is absorbed and re-radiated back to the Earth by atmospheric gases, including water vapor, CO₂, and other substances. As concentrations of GHGs increase, the warming effect is augmented. The National Research Council (NRC 2005) defines direct radiative forcing as an effect on the climate system that directly affects the radiative budget of the Earth's climate, which may result from a change in concentration of radiatively active gases, a change in solar radiation reaching the Earth, or changes in surface albedo. The increase is called radiative forcing and is typically measured in Wm⁻ ². Increases in radiative forcing influence global temperature by indirect effects and by feedback from a variety of processes, most of which are subject to considerable uncertainty. Together, they affect, for example, the level of water vapor, the most

40 41 important of the GHGs.

42 --- END BOX 1.1 ---

> Figure 1.1 shows estimates of how increases in GHGs, aerosols, and other changes have influenced radiative forcing since 1850. The GHGs considered in these scenarios are collected in the left-most bar and together they have had the biggest effect, with CO₂ being the largest of this group. Increased tropospheric ozone has also had a substantial

warming effect. The reduction in stratospheric ozone has had a slight cooling effect. Changes in aerosols have had both warming and cooling effects. Aerosol effects are highly uncertain because they depend on the nature of the particles; how the particles are distributed in the atmosphere; and the concentrations of the particles, which are not as well understood as the GHGs. Land-use change and its effect on the reflectivity of the Earth's surface, jet contrails and changes in high-level (cirrus) clouds, and the natural change in intensity of the sun have also had effects.

Figure 1.1: Estimated Influences of Atmospheric Gases on Radiative Forcing, 1850-present

Another important aspect of the climate effects of these substances, not captured in the Wm⁻² measure, is the persistence of their influence on the radiative balance—a characteristic discussed in Box 1.2. The Wm⁻² measure of radiative forcing accounts for only the effect of a concentration in the atmosphere at a particular instant. The GHGs considered here have influences that may last from a decade or two (e.g., the influence of CH₄) to millennia, as noted earlier.

--- BOX 1.2: ATMOSPHERIC LIFETIMES OF GREENHOUSE GASES ---

The atmospheric lifetime concept is more appropriate for CH₄, N₂O, HFCs, PFCs, and SF₆ than it is for CO₂. These non-CO₂ gases are destroyed via chemical processes after some time in the atmosphere. In contrast, CO₂ is constantly cycled between pools in the atmosphere, the surface layer of the ocean, and vegetation, so it is (for the most part) not destroyed. Very slow processes lead to some removal of carbon from oceans, vegetation, and the atmosphere as calcium carbonate. Also, over long geological periods, carbon from vegetation is stored as fossil fuels, which is a permanent removal process as long as the fossil fuels are not burned to produce energy.

Although the lifetime concept is not strictly appropriate for CO_2 (see Box 2.2 in Chapter 2), the molecules in a kilogram of emissions can be thought of as residing in the atmosphere, exercising their radiative effect, for around 100 years. This approximation allows a rough comparison with the other gases: CH_4 at 12 years, N_2O at 114 years, and SF_6 at 3200 years. HFCs are a family of gases with varying lifetimes from less than a year to over 200 years; those predominantly in use now have lifetimes mostly in the range of 10 to 50 years. Similarly, the PFCs have various lifetimes, ranging from 2,600 to 50,000 years.

The lifetimes are not constant, as they depend to some degree on other Earth system processes. The lifetime of CH_4 is the most affected by the levels of other pollutants in the atmosphere.

--- END BOX 1.2 ---

An important difference between GHGs and most of the other substances in Figure 1.1 is their long lifetime. In contrast to GHGs, aerosols remain in the atmosphere only for a few days to a couple of weeks. Once an aerosol emission source is eliminated, its effect on radiative forcing disappears very quickly. Tropospheric ozone lasts for a few months. Moreover, relatively short-lived substances are not well mixed in the atmosphere. Levels

are very high near emissions sources and much lower in other parts of the world, so their climate effect has a different spatial pattern than that of long-lived substances. The regional differences and much shorter lifetimes of non-GHG substances make comparisons among them more difficult than among GHGs. The radiative effects of these substances also subject to more uncertainty, as shown in Figure 1.1.

5 6 7

1

2

3

4

1.3. Research Design

8 9

10

11

The broad elements of the research design for these scenarios are set forth in the Prospectus, including (1) selection of models, (2) guidance to the modeling groups for development of a reference scenario, and (3) guidance for the development of stabilization scenarios.

12 13 14

1.3.1. **Model Selection**

15 16

The Prospectus sets forth the model capabilities required to carry out the desired stabilization analyses. As stated in the Prospectus, participating models must:

17 18 19

20

21

22 23

26

27

28

29

30

31

32

- 1. Be global in scale
- 2. Be capable of producing global emissions totals for, at a minimum, CO₂, N₂O, CH₄, HFCs, PFCs, and SF₆ that may serve as inputs to global GCMs, such as the National Center for Atmospheric Research (NCAR) Community Climate System Model and the Geophysical Fluid Dynamics Laboratory climate model
- 24 3. Be capable of simulating the radiative forcing from CO₂, N₂O, CH₄, HFCs, PFCs, and 25 SF_6
 - 4. Represent multiple regions
 - 5. Have technological resolution capable of distinguishing among major sources of primary energy (e.g., renewable energy, nuclear energy, biomass, oil, coal, and natural gas) as well as between fossil fuel technologies with and without CO₂ capture and storage (CCS) systems
 - 6. Be economics based and capable of simulating macroeconomic cost implications of stabilization
 - 7. Look forward to the end of the century or beyond.

33 34 35

36

In addition, the Prospectus required that the modeling groups have a track record of publications in professional, refereed journals, specifically in the use of their models for the analysis of long-term GHG emission scenarios.

37 38 39

- Selection by these criteria led to the three models used in this research: (1) The Integrated
- 40 Global Systems Model (IGSM) of the Massachusetts Institute of Technology's Joint
- 41 Program on the Science and Policy of Global Change; (2) the MiniCAM Model of the
- 42 Joint Global Change Research Institute, which is a partnership between the Pacific
- 43 Northwest National Laboratory and the University of Maryland; and (3) the Model for
- 44 Evaluating the Regional and Global Effects [of greenhouse gas reduction policies]
- 45 (MERGE), developed jointly at Stanford University and the Electric Power Research Institute.

46

Each of these models has been used extensively for climate change analysis. The roots of each extend back more than a decade, during which time features and details have been added. Analyses using each have appeared widely in peer-reviewed publications. The features of the models are described in Chapter 2 with references to the publications and reports that provide complete documentation.

These models fall into a class that has come to be known as Integrated Assessment Models (IAMs). There are many ways to define IAMs and to characterize the motivations for developing them (IPCC 1996). A particularly appropriate definition of their primary purposes, provided by Parson and Fisher-Vanden (1997), is "evaluating potential responses to climate change, structuring knowledge and characterizing uncertainty, contributing to broad comparative risk assessments, and contributing to scientific research."

1.3.2. Development of Reference Scenarios

As required by the Prospectus, each participating modeling group first produced a reference scenario that assumes no policies specifically intended to address climate change beyond the implementation of any existing policies to their end of their commitment periods, including the Kyoto Protocol and the policy of the U.S. to reduce greenhouse gas emissions intensity by 18% by 2012. For purposes of the reference scenario (and for each of the stabilization scenarios), it was assumed that these policies are successfully implemented through 2012 and their goals are achieved. (This assumption could only be approximated within the models because their time steps did not coincide exactly with the period from 2002 to 2012. However, such approximation is a minor consideration as slight differences in emissions for a few years will have little impact on long term concentrations.) As directed by the Prospectus, after 2012, these existing climate policies expire and are not renewed or replaced. This is not a prediction or a best-judgment forecast but a scenario designed to provide a clearly defined point of departure for illuminating the implications of alternative stabilization goals. The paths toward stabilization are implemented to start after 2012 as discussed further in the following section. The reference scenarios and assumptions underlying them are detailed in Chapter 3.

The reference scenarios serve two main purposes. First, they provide insight into how the world might evolve without additional efforts to constrain GHG emissions, given various assumptions about principal drivers of the economy, energy use, and emissions. These assumptions include those concerning population increase, land and labor productivity growth, technological options, and resource endowments. These forces govern the supply and demand for energy, industrial goods, and agricultural products—the production and consumption activities that lead to GHG emissions. The reference scenarios are a thought experiment in that they assume that even as emissions increase and climate changes nothing is done to reduce emissions. The specific levels of GHG emissions and concentrations are not predetermined but result from the combination of assumptions made.

1 Second, the reference scenarios serve as points of departure for analysis of the changes 2 by stabilization, and the underlying assumptions have a large bearing on the 3 characteristics of the stabilization scenarios. For example, all other things being equal, 4 the lower the economic growth and the higher the availability and competitiveness of 5 low-carbon energy technologies in the reference scenario, the lower will be the GHG 6 emissions and the easier it will be to reach stabilization. On the other hand, if a reference 7 scenario assumes that fossil fuels are abundant, and fossil fuel technologies will become 8 cheaper over time while low- or zero-carbon alternatives remain expensive, the scenario 9 will show consumers having little reason to conserve, adopt more efficient energy 10 equipment, or switch to non-fossil sources. Under such a reference scenario, emissions 11 will grow rapidly, and stronger economic incentives will be required to achieve 12 stabilization.

13 14

15 16

17 18 Finally, the Prospectus specified that the modeling groups develop their reference scenarios independently⁴, applying "plausible" and "meaningful" assumptions for key drivers. Similarities and differences among the reference scenarios are useful in illustrating the uncertainty inherent in long-run treatment of the climate challenge. At the same time, with only three participating models, the range of scenario assumptions produced does not span the full range of possibilities.

2021

19

1.3.3. Development of the Stabilization Scenarios

22 23

24

25

26

27

28 29

30

31

32

33

34

35

36

37

38 39

40

41

42

43

Although the model groups were required to independently develop their modeling assumptions, the Prospectus required that a common set of four stabilization targets be used across the participating models. Also, whereas much of the literature on atmospheric stabilization focuses on concentrations of CO₂ only, an important objective of this research was to expand the range of coverage to include other GHGs. Thus, the Prospectus required that the stabilization levels be defined in terms of the combined effects of CO₂, N₂O, CH₄, HFCs, PFCs, and SF₆. This suite of GHGs forms the basis for the U.S. GHG-intensity-reduction policy, announced by the President on February 14, 2002; it is the same set subject to control under the Kyoto Protocol. These gases are included in the left-most bar of Figure 1.1. The stabilization targets specified in the Prospectus explicitly omit the aerosol, ozone, land surface, and other effects shown in Figure 1.1, which may be influenced by the measures taken to achieve the stabilization goal. Table 1.1 shows the change in concentration levels for these gases from 1750 to 2000. The left-most bar in Figure 1.1 shows radiative forcing of roughly 2.4 Wm⁻² compared with a sum of 2.1 Wm⁻² in Table 1.1. The difference exists because Figure 1.1 includes roughly 0.3 Wm⁻² of forcing from chlorofluorocarbons (CFCs) not in Table 1.1. CFCs, important in the historical data, are already being phased out under the Montreal Protocol because of their stratospheric ozone-depleting properties, so they are not expected to be a significant source of additional increased forcing in the future. The HFCs, which do not contribute to stratospheric ozone depletion, were developed as substitutes for the CFCs, but are of concern because of their radiative properties. Table 1.2 shows the specific radiative forcing targets chosen.

⁴ See footnote 2.

Table 1.1. Greenhouse Gas Concentrations and Forcing 2

Radiative Forcing Stabilization Levels (Wm⁻²) and Corresponding Table 1.2. CO₂ Concentrations (ppmv)

4 5 6

7

8

9

10

11

12

13

14

15

16

17

1

3

As noted earlier, the Prospectus instructed that the stabilization levels be constructed so that the CO₂ concentrations resulting from stabilization of total radiative forcing, after accounting for radiative forcing from the non-CO₂ GHGs, would be roughly 450 ppmv, 550 ppmy, 650 ppmy, and 750 ppmy. This correspondence was achieved by (1) calculating the increased radiative forcing from CO₂ at each of these concentrations, (2) adding to that amount the radiative forcing from the non-CO₂ gases from 1750 to present, and (3) adding an initial estimate of the change in radiative forcing from the non-CO₂ GHGs under each of the stabilization levels. Each of the models represents the emissions and abatement opportunities of the non-CO₂ gases somewhat differently and takes a different approach to representation of the tradeoffs among them, so an exact correspondence between overall radiative forcing and CO₂ levels that would fit all three models was not possible. The approximated radiative forcing levels correspond closely to CO₂ targets set out in the Prospectus for all three models.

18 19 20

21

22

23

24

25

26

27

28

29

30

31

32

33

The Prospectus also specified that, beyond the implementation of any existing policies, the stabilization scenarios should be based on universal participation by the world's nations. This guidance was implemented by assuming a climate regime with simultaneous global participation in emissions mitigation where the marginal costs of emission controls are equalized across countries and regions. Under this assumption, known as where flexibility, emissions will be reduced where it is cheapest to do so regardless of their geographical location. One important implication of this assumption is that the stabilization scenarios produce estimates of stabilization costs that are systematically lower than what might be expected in a world in which some major countries remain out of an emissions mitigation regime for an extended period of time, some economies use more costly regulatory mechanisms, or emissions mitigation regimes within nations are incomplete either in terms of GHG or sectoral coverage. On the other hand, possible ancillary benefits, tax interaction effects, or effects of carbon policies on technical change were not assessed, which in some cases can lower costs. These issues are discussed in more detail in Chapter 4.

34 35 36

37

38

39

40

41

42

43

In addition, the Prospectus required that stabilization be defined as long term. Because of the inertia in the Earth system, largely attributable to the ocean, perturbations to the climate and atmosphere have effects for thousands of years. Economic models have little credibility over such timeframes. The Prospectus, therefore, instructed that the participating modeling groups report scenario information only up through 2100. Each group then had to address how to relate the level in 2100 to the long-term goal. The chosen approaches were generally similar, but with some differences in implementation. This and other details of the stabilization scenario design are addressed more completely in Chapter 4.

44 45 46

1.4. **Interpreting Scenarios: Uses, Limits, and Uncertainty**

Emissions scenarios have proven to be useful aids to understanding climate change, and there is a long history of their use (see Box 1.3). Scenarios are descriptions of future conditions, often constructed by asking *what if* questions, such as what if events were to unfold in a particular way? Informal scenario analysis is part of almost all decision making. For example, families making decisions about big purchases, such as a car or a house, might plausibly construct a scenario in which changes in employment forces them to move. Scenarios addressing major public-policy questions perform the same purpose, helping decision makers and the public to understand the consequences of actions today in the light of plausible future developments.

--- BOX 1.3: EMISSIONS SCENARIOS AND CLIMATE CHANGE ---

Emissions scenarios that describe future economic growth and energy use have been important tools for understanding the long-term consequences of climate change. They were used in assessments by the U.S. National Academy of Sciences in 1983 and by the Department of Energy in 1985 (NAS 1983, US DOE 1985). Previous emissions scenarios have evolved from simple projections that extrapolated a 1% per year increase in CO₂ emissions to scenarios that incorporate assumptions about population, economic growth, energy supply, and controls on GHG emissions and CFCs (Leggett et al. 1992, Pepper et al. 1992). They played an important role in the reports of the Intergovernmental Panel on Climate Change (IPCC 1991, IPCC 1992, IPCC 1996). The IPCC Special Report on Emissions Scenarios (SRES) (Nakicenovic et al. 2000) was the most recent major effort undertaken by the IPCC to expand and update earlier scenarios. This set of scenarios was based on storylines of alternative futures, updated with regard to the variables used in previous scenarios and with additional detail on technological change and land use.

The Energy Modeling Forum (EMF) has been an important venue for intercomparison of emissions and IAMs. The EMF, managed at Stanford University, includes participants from academic, government, and other modeling groups from around the world. It has served this role for the energy-modeling community since the 1970s. Individual EMF studies run over a course of about two years, with scenarios designed by the participants to provide insight into the behavior of the participating models. Scenarios are often published in the peer-reviewed literature. A recent study, EMF 21, focused on multi-gas stabilization scenarios (Weyant and de la Chesnaye 2006).

--- END BOX 1.3 ---

Models assist in creating scenarios by showing how assumptions about key drivers, such as economic and population growth or policy options, lead to particular levels of GHG emissions. Model-based scenario analysis is designed to provide quantitative estimates of multiple outcomes and to assure consistency among them that is difficult to achieve without a formal structure. Thus, a main benefit of such model simulation of scenarios is that they ensure basic accounting identities: the quantity demanded of fuel is equal to the quantity supplied, imports in one region are balanced by exports from other regions, cumulative fuel used does not exceed estimates of the resource available, and expenditures for goods and services do not exceed income. The approach complements other ways of thinking about the future, ranging from formal uncertainty analysis to narratives. Also, such model analyses offer a set of macro-scenarios that users can build on, adding more detailed assumptions about variables and decisions of interest to them.

The possible users of these scenarios are many and diverse, and a single scenario research product cannot hope to provide the details needed by all potential users or to address their specific questions. Thus, these scenarios are an initial set offered to potential user communities. If successful, they will generate further questions and the demand for more detailed analysis, some of which might be satisfied by further scenario development from models like those used here, but more often demanding detail that can only be provided with other modeling and analysis techniques. As such, this effort is one step in an ongoing and iterative process of producing and refining climate-related scenarios and scenario tools.

Although the required long-term perspective demands scenarios that stretch into the distant future, any such scenarios carry with them considerable uncertainty. Inevitably, the future will hold surprises. Scientific advances will be made, new technologies will be developed, and the direction of the economy will change, making it necessary to reassess the issues examined here. The Prospectus called for development of a limited number of scenarios, without a formal treatment of likelihood or uncertainty, requiring as noted earlier only that the modeling groups use assumptions that they believe to be "plausible" and "meaningful". Formal uncertainty analysis has much to offer and could be a useful additional follow-on or complementary research. Here, however, the range of outcomes from the different modeling groups help to illustrate, if incompletely, the range of possibilities.

The scenarios developed here take the best information available now and assess what that may mean for the future. Any such research, however, will necessarily be incomplete and will not foresee all possible future developments. The best planning must prepare for changes in course later as new information becomes available.

1.5. Report Outline

Chapter 2 of this report provides an overview of the three models used in development of the scenarios. Chapter 3 describes the assumptions about key drivers in each of the models and reports the reference scenarios. Chapter 4 provides greater detail on the design of the stabilization scenarios and then presents these scenarios. Chapter 5 provides concluding observations, including possible avenues for additional research.

The chapters seek to show how the models and the assumptions used by the modeling groups to develop the scenarios differ and, to the degree possible, relate where these differences matter and how they shape the scenarios. The models have their own respective areas of focus, and each offers its own reasonable representation of the world. The authors have distilled general conclusions common to the scenarios generated by the three modeling groups, while recognizing that other plausible representations could well lead to quite different scenarios. The scenarios are presented primarily in the figures. Associated with the report is a database with quantitative information available for those

1-12

- 1 who wish to further analyze and use these scenarios. A description of the database,
- 2 directions for use, and its location can be found in the appendix.⁵

1.6. References

- 5 CCSP Climate Change Science Program. 2003. Strategic Plan for the U.S. Climate
- 6 Change Science Program. Accessed at
- 7 http://www.climatescience.gov/Library/stratplan2003/final/default.htm (last updated July
- 8 2004).
- 9 CCSP Climate Change Science Program. 2005. Final Prospectus for Synthesis and
- 10 Assessment Product 2.1. Accessed at http://www.climatescience.gov/Library/sap/sap2-
- 11 1/sap2-1Prospectus-final.htm
- 12 IPCC Intergovernmental Panel on Climate Change. 1991. Climate Change: The IPCC
- 13 Response Strategies. Island Press, Washington, D.C.
- 14 IPCC Intergovernmental Panel on Climate Change. 1992. Climate Change 1992: The
- 15 Supplementary Report to the IPCC Scientific Assessment. eds JT Houghton, BA
- 16 Callander, and SK Varney, Cambridge University Press, Cambridge, U.K.
- 17 IPCC Intergovernmental Panel on Climate Change. 1996. Climate Change 1995:
- 18 Economic and Social Dimensions of Climate Change. eds JP Bruce, H Lee, and EF
- 19 Haites, Cambridge University Press, Cambridge, U.K.
- 20 IPCC Intergovernmental Panel on Climate Change. 2001. Climate Change 2001: The
- 21 Scientific Basis. eds JT Houghton, Y Ding, DJ Griggs, N Noguer, PJ van der Linden, X
- 22 Dai, K Maskell and CA Johnson, Cambridge University Press, Cambridge, U.K.
- 23 Leggett J, WJ Pepper, and RJ Swart. 1992. Emission scenarios for the IPCC: An Update.
- 24 In Climate Change 1992: The Supplemental Report to the IPCC Scientific Assessment.
- eds JT Houghton, BA Callander, and SK Varney, Cambridge, UK: Cambridge University
- 26 Press.
- 27 Nakicenovic N et al. 2000. Special Report on Emissions Scenarios. Cambridge
- 28 University Press, Cambridge, U.K.
- 29 NAS National Academy of Sciences. 1983. Changing Climate: Report of the Carbon
- 30 Dioxide Assessment Committee. National Academy Press, Washington, D.C.
- 31 NRC National Research Council. 2005. Radiative Forcing of Climate Change:
- 32 Expanding the Concept and Addressing Uncertainties. National Academy Press,
- 33 Washington, D.C.
- Parson EA and K Fisher-Vanden. 1997. Integrated assessment models of global climate
- 35 change. *Annual Review of Energy and the Environment* 22:589-628.
- 36 Pepper WJ, J Leggett, RJ Swart, J Wasson, J Edmonds, and I Mintzer. 1992. Emissions
- 37 Scenarios for the IPCC: An Update Assumptions, Methodology, and Results.
- 38 Intergovernmental Panel on Climate Change, Geneva, Switzerland.

.

⁵ This data archive and associated appendix will be made available upon completion of the final draft of this report.

- 1 US DOE United States Department of Energy. 1985. Atmospheric Carbon Dioxide and
- 2 the Global Carbon Cycle, ed JR Trabalka, DOE/ER-0239. Office of Energy Research,
- 3 Washington, D.C..
- 4 Weyant, J. and F. de la Chesnaye (eds.). (2006) in press. Multigas Mitigation and Climate
- 5 Change. Special Issue of the *Energy Journal*

Table 1.1. Greenhouse Gas Concentrations and Forcing


	Preindustrial Concentration (1750)	Current Concentration (1998)	Increased Forcing Wm ⁻² (1750-1998)
CO ₂	278 ppmv	365 ppmv	1.46
CH ₄	700 ppbv	1745 ppbv	0.48
N ₂ O	270 ppbv	314 ppbv	0.15
HFCs, PFCs, SF ₆	0	various	≈ 0.02
Total			2.11

Source: IPCC, 2001

Table 1.2. Radiative Forcing Stabilization Levels (Wm⁻²) and Approximate CO₂ Concentrations (ppmv). The stabilization levels were constructed so that the CO₂ concentrations resulting from stabilization of total radiative forcing, after accounting for radiative forcing from the non-CO₂ GHGs included in this research, would be roughly 450 ppmv, 550 ppmv, 650 ppmv, and 750 ppmv.

	Total Radiative Forcing from GHGs (Wm ⁻²)	Approximate Contribution to Radiative Forcing from non-CO ₂ GHGs (Wm ⁻²)	Approximate Contribution to Radiative Forcing from CO ₂ (Wm ⁻²)	Corresponding CO ₂ Concentration (ppmv)
Level 1	3.4	0.8	2.6	450
Level 2	4.7	1.0	3.7	550
Level 3	5.8	1.3	4.5	650
Level 4	6.7	1.4	5.3	750
Year 1998	2.11	0.65	1.46	365
Preindustrial	0	0	0	275

Figure 1.1. Estimated Influences of Atmospheric Gases on Radiative Forcing, 1850-present.

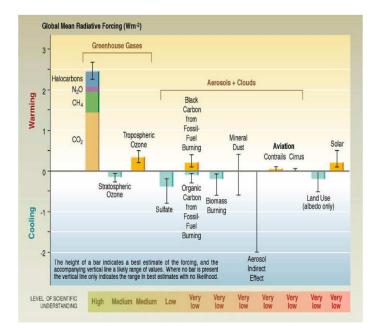

4

2. MODELS USED IN THIS RESEARCH

3	2. M	ODELS USED IN THIS RESEARCH	1
4	2.1. Ov	verview of the Models	1
5	2.2. So	cioeconomic and Technology Components	3
6	2.2.1.	Equilibrium, Expectations, and Trade	
7	2.2.2.	-	
8	2.2.3.	Energy Demand	
9	2.2.4.	Energy Resources	6
10	2.2.5.	Technology and Technological Change	7
11	2.2.6.	Land Use and Land-Use Change	10
12	2.2.7.	Emissions of CO ₂ and Non-CO ₂ Greenhouse Gases	11
13	2.3. Ea	rth Systems Component	12
14		eferences	

2.1. Overview of the Models

The computer models used in this research are referred to as integrated assessment models (IAMs) in that they combine, in an integrated framework, the socioeconomic and physical processes and systems that define the human influence on, and interactions with, the global climate. They integrate computer models of socioeconomic and technological determinants of the emissions of GHGs and other substances influencing the Earth's radiation balance with models of the natural science of Earth system response, including those of the atmosphere, oceans, and terrestrial biosphere. Although they differ in their specific design objectives and details of their mathematical structures, each of these IAMs was developed for the purpose of gaining insight into economic and policy issues associated with global climate change.

To create scenarios of sufficient depth, scope, and detail, a number of model characteristics were deemed critical for development of these scenarios. The criteria set forth in Chapter 1 led to the selection of three IAMs: IGSM, MERGE, and MiniCAM. These three are among the most detailed models of this type of IAM, and each has long history of development and application.

• IGSM of the Massachusetts Institute of Technology's Joint Program on the Science and Policy of Global Change is an Earth system model that comprises a multi-sector, multi-region economic component and a science component, including a two-dimensional atmosphere, a three-dimensional ocean, and a detailed biogeochemical model of the terrestrial biosphere (Sokolov et al. 2005). Because this scenario focuses on new emissions scenarios, elements of the scenarios emerging from the economic model component of IGSM, the Emissions Prediction and Policy Analysis (EPPA) model (Paltsev et al. 2005), are featured in the discussion below. EPPA is a recursive-dynamic computable general equilibrium (CGE) model of the world economy and greenhouse-relevant emissions, solved on a five-year time step. Previous applications

of IGSM and its EPPA component system can be found at http://web.mit.edu/globalchange.

MERGE was developed jointly at Stanford University and the Electric Power Research Institute (Manne and Richels 2005). It is an inter-temporal general equilibrium model of the global economy in which the world is divided into nine geopolitical regions. It is solved on a ten-year time step. MERGE is a hybrid model, combining a bottom-up representation of the energy supply sector with a top-down perspective on the remainder of the economy. Savings and investment decisions are modeled as if each region maximizes the discounted utility of its consumption, subject to an inter-temporal wealth constraint. Embedded within this structure is a reduced-form representation of the physical Earth system. MERGE has been used to explore a range of climate-related issues, including multi-gas strategies, the value of low-carbon-emitting energy technologies, the choice of near-term hedging strategies under uncertainty, the impacts of learning-by-doing, and the potential importance of when and where flexibility. To support this analysis of stabilization scenarios, the multi-gas version has been revised by adjustments in technology and other assumptions. The MERGE code and publications describing its structure and applications can be found at http://www.stanford.edu/group/MERGE/.

• MiniCAM is an integrated assessment model (Brenkert et al. 2003) that combines a technologically detailed global energy-economy-agricultural-land-use model with a suite of coupled gas-cycle, climate, and ice-melt models, integrated in the Model for the Assessment of Greenhouse-Gas Induced Climate Change (MAGICC). MiniCAM was developed and is maintained at the Joint Global Change Research Institute, a partnership between the Pacific Northwest National Laboratory and the University of Maryland, while MAGICC was developed and is maintained at NCAR. MiniCAM is solved on a 15-year time step. MiniCAM has been used extensively for energy, climate, and other environmental analyses conducted for organizations that include the U.S. Department of Energy (DOE), the U.S. Environmental Protection Agency, the IPCC, and several major private sector energy companies. Its energy sector is based on a model developed by Edmonds and Reilly (1985). The model is designed to examine long-term, large-scale changes in global and regional energy systems, focusing on the impact of energy technologies. Documentation for MiniCAM can be found at http://www.globalchange.umd.edu/models/MiniCAM.pdf/.

Because these models were designed to address an overlapping set of climate change issues, they are similar in many respects. All three have social science-based components that capture the socioeconomic and technology interactions underlying the emissions of GHGs, and each incorporates models of physical cycles for GHGs and other radiatively important substances and other aspects of the natural science of global climate. The differences among them lie in the detail and construction of these components and in the ways they are modeled to interact. Each was designed with somewhat different aspects of the climate issue as a main focus. IGSM includes the most detailed representation of the

¹ It differs from the pure bottom-up approach described in Box 2.1 in that demands for energy are price responsive.

chemistry, physics, and biology of the atmosphere, oceans, and terrestrial biosphere; thus, its EPPA component is designed to provide the emissions detail that these natural science components require. MERGE has its origins in an energy-sector model that was initially designed for energy technology assessment. It was subsequently modified to explore the influence of expectations (and uncertainty regarding expectations) about future climate policy on the economics of current investment and the cost-minimizing allocation of emissions mitigation over time. Its focus requires a forward-looking structure, which in turn employs simplified non-energy components of the economy. MiniCAM is a technology-rich IAM. It features detailed representations of energy technologies, energy systems, and energy markets and their interactions with demographics, the economy, agricultural technologies and markets land use, and the terrestrial carbon cycle.

Each of these IAMs has unique strengths and areas of special insight. In this scenario, the simultaneous application of different model structures is useful in revealing different aspects of the task of atmospheric stabilization. The differences among the scenarios prepared by the three modeling groups, presented in Chapters 3 and 4, are an indication of the limits of the knowledge about future GHG emissions and the challenges in stabilizing atmospheric conditions. Indeed, differences among the reference scenarios and in the implications of various stabilization targets are likely within the range that would be realized from an uncertainty analysis applied to any one of the three, as indicated by the analysis of the EPPA model by Webster et al. (2003).

Table 2.1 provides a cross-model overview of some of the key characteristics to be compared in the following sections of this chapter. Section 2.2 focuses on social science components, describing similarities and differences and highlighting the assumptions that have the greatest influences on the scenarios. Section 2.3 does the same for the natural science sub-models of each IAM, which in this research make the connection between the emissions of GHGs and other radiatively important substances and the resulting atmospheric conditions.

Table 2.1. Characteristics of the Models

Equilibrium, Expectations, and Trade

2.2.1.

2.2. Socioeconomic and Technology Components

As can be seen in Table 2.1, the models represent economic activity and associated emissions in a similar way; each divides the world economy into several regions, and further divides each region into economic sectors. In all three, the greatest degree of disaggregation is applied to the various components of energy supply and demand.

The models differ, however, in their representations of the equilibrium structure, the role of future expectations, and in the goods and services traded. MERGE and the EPPA component of IGSM are CGE models, which solve for a consistent set of supply-demand and price equilibria for each good and factor of production that is distinguished in the analysis. In the process, CGE models ensure a balance in each period of income and

expenditure and of savings and investment for the economy, and they maintain a balance in international trade in goods and emissions permits. MiniCAM is a partial-equilibrium model, solving for supply-demand and price equilibria within linked energy and agricultural markets. Other economic sectors that influence the demand for energy and agricultural products and the costs of factors of production in these sectors are represented through exogenous assumptions.

The models also differ in how expectations about the future affect current decisions. The EPPA component of IGSM and MiniCAM are recursive-dynamic, meaning they are solved one period at a time with economic agents modeled as responding to conditions in that period. This behavior is also referred to as myopic because these agents do not consider expected future market conditions in their decisions. The underlying behavioral assumption is that consumers and producers maximize their individual utilities or profits. In MiniCAM, this process is captured through the use of demand and supply functions that evolve over time as a function of evolving economic activity and regional economic development. In IGSM, explicit representative-agent utility and sector production functions ensure that consumer and producer decisions are consistent with welfare and profit maximization. In both of these models, the patterns of emissions mitigation over time in the scenarios that stabilize radiative forcing are imposed through assumptions intended to capture the features of a strategy that, as explained in Section 2.4, would be cost efficient. MERGE, on the other hand, is an inter-temporal optimization model, meaning that all periods are solved simultaneously such that resources and mitigation effort are allocated optimally over time as well as among sectors. Inter-temporal models of this type are often referred to as forward-looking or perfect foresight models because actors in the economy base current decisions not only on current conditions but on future ones, which are assumed to be known with certainty. Simultaneous solution of all periods ensures that agents' expectations about the future are realized in the model solution. MERGE's forward-looking structure allows it to explicitly solve for cost-minimizing emissions pathways, in contrast to MiniCAM and IGSM which exogenously prescribe emissions mitigation policies over time.

Although all three models also represent international trade in goods and services and include exchange in emissions permits, they differ in the combinations of goods and services traded. In IGSM, all goods and services represented in the model are traded, with electricity trade limited to geographically contiguous regions to the extent that it occurs in the base data. MiniCAM models international trade in oil, coal, natural gas, agricultural goods, and emission permits. MERGE models trade in oil and natural gas, emissions permits, energy-intensive industrial goods, and a single non-energy good representing all other tradable goods and services.

2.2.2. Population and Economic Growth

An increase in the overall scale of economic activity is among the most important drivers of GHG emissions. However, economic growth depends, in part, on growth in population, which in all three models is an exogenously determined input. Although economic activity is an output of the models, its level is largely determined by

assumptions about labor productivity and labor force growth, which are also model inputs. Policies to reduce emissions below those in the reference scenarios also affect economic activity, which may be measured as changes in Gross Domestic Product (GDP) or in national consumption. (See Chapter 4, which provides a discussion of the interpretation and limitations of GDP and other welfare measures.)

In MiniCAM, labor productivity and growth in the labor force are the main drivers of GDP growth. GDP is calculated as the product of labor force and average labor productivity modified by an energy-service cost feedback elasticity. The labor force and labor productivity are both exogenous inputs to MiniCAM, but were developed for these scenarios from detailed demographic analysis. Starting with the underlying population scenario, the labor force was estimated from age- and gender-specific labor force participation rates applied to the relevant cohorts, then summed and adjusted by a fixed unemployment rate. Trends were explicitly considered, such as the increasing rate of labor force participation by females in the U.S. economy, the aging of the baby boomers, and evolving labor participation rates in older cohorts, reflecting the consequences of changing health and survival rates. Labor force productivity growth rates vary over time and across region to represent these evolving demographics.

In MERGE and the EPPA component of IGSM, the labor force and its productivity, while extremely important, are not the only factors determining GDP. Savings and investment and productivity growth in other factors (e.g., materials, land, labor, and energy) variously contribute as well. IGSM and MERGE use population directly as a measure of the labor force and apply assumptions about labor productivity change that are appropriate for that definition.

2.2.3. Energy Demand

In all three models, energy demands are represented regionally and driven by regional economic activity. As a region's economic activity increases, its corresponding demand for energy services rises. Energy demand is also affected by assumptions about changes in technology, in the structure of the economy, and in other economic conditions (see Section 2.2.5). Similarly, all the models represent the way demand will respond to changes in price. The formulation of price response is particularly important in the construction of stabilization scenarios because the imposition of a constraint on carbon emissions will require the use of more expensive energy sources with lower emissions and will, therefore, raise the consumer price of all forms of energy.

The demand for energy is derived from demands for other goods and services in all three IAMs. However, the models differ in the way they derive their energy demands. In IGSM each good- or service-producing sector demands energy. The production sector is an input-output structure in which every industry (including the energy sector) supplies its outputs as inputs to intermediate production in other industries and for final consumption. Households have separate demands for automobile fuel and for all other energy services. Each final demand sector can use electricity, liquid fuels (petroleum products or biomass liquids), gas, and coal; fuel for automobiles is limited to liquids. MiniCAM is similar in

that each MiniCAM sector demands energy. Energy is demanded by both final consumers and transforming sectors. In MiniCAM, there are three final energy consumption sectors—buildings; industry; and transport—which consume electricity and energy products such as coal, biomass, refined liquid fuels, methane, and hydrogen. In addition, energy is demanded by energy-producing and refining sectors, power generators, and hydrogen producers, whose demands in turn are derived from the demands arising in the final energy consumption sectors. MERGE is similar to IGSM except that its inter-industry transactions are aggregated into a single, non-energy-production sector for each region from which demands for fuels (oil, gas, coal, and bioenergy) and electricity are derived. The power generation sector's demands for energy are derived from the economy's demand for electricity.

2.2.4. Energy Resources

The future availability of energy resources, particularly of exhaustible fossil fuels, is an important determinant of energy use and emissions, so the models provide explicit treatments of the underlying resource base. All three include empirically based estimates of in-ground resources of oil, coal, and natural gas that might ultimately be available, along with a model of the costs of extraction. The levels of detail in the different models are shown in Table 2.1. Each of the models includes both conventional and unconventional sources in its resource base and represents the process of exhaustion of resources by an increasing cost of exploitation. That is, lower-cost resources are utilized first so that the costs of extraction rise as the resources are depleted. The models differ, however, in the way they represent the increasing costs of extraction. MiniCAM divides the resource base for each fossil fuel into discrete grades with increasing costs of extraction, along with an exogenous technical change that lowers resource extraction costs over time. MERGE has similar differential grades for oil and gas, but assumes that the coal base is more than sufficient to meet potential demand and that exogenous technological improvements in extraction will be minimal. For these reasons, MERGE represents coal as having a constant cost over time irrespective of utilization. IGSM models resource grades with a continuous function, separately identifying conventional oil, shale oil, natural gas, and coal. Fuel-producing sectors are subject to economy-wide technical progress (e.g., increased labor productivity growth), which partly offsets the rise in extraction costs. The models all incorporate tar sands and unconventional gas (e.g., tight gas and coal-seam gas) in the grade structure for oil and natural gas, and each also includes the potential development of shale oil.

 The models seek to represent all resources that could be available as technology and economic conditions vary over time and across simulations. Thus, they reflect judgments that technology will advance to the point where currently unused resources can be economically exploited. Generally, then, they define a resource base that is more expansive than, for example, that of the U.S. Geological Survey, which estimates technological and economic feasibility only at current technology and prices. However, differences exist in the treatments of potentially available resources. MiniCAM includes a detailed representation of the nuclear power sector, including uranium and thorium resources; nuclear fuel fabrication; reactor technology options; and associated fuel-cycle

cycles, including waste, storage, and fuel reprocessing. IGSM and MERGE assume that the uranium resources used for nuclear power generation are sufficient to meet likely use and, therefore, do not explicitly model their depletion.

The treatment of wind and solar resources also differs among the models. IGSM represents the penalty for intermittent supply by modeling wind and solar as imperfect substitutes for central station generation, where the elasticity of substitution implies a rising cost as these resources supply a larger share of electricity supply. Land is also an input, and the regional cost of wind and solar energy is based on estimates of regional resource availability and quality. MERGE represents these resources as having a fixed cost that improves over time, but it applies upper limits on the proportion of these resources, representing limits on the integration of these resources into the grid. MiniCAM represents wind and solar technologies as extracting power from graded, regional, renewable resource bases. Variation in resource availability across diurnal and annual cycles affects market penetration of these technologies. As wind and solar technologies achieve larger fractions of the total power generation system, storage and ancillary power production capacity are required in MiniCAM, which in turn affects the cost of power generation and technology choice.

IGSM and MiniCAM model biomass production as competing for agricultural land. Increasing production leads to increasing land rent, representing the scarcity of agricultural land, and thus, to increasing cost of biomass as production expands. MiniCAM also has a separate set of regional supply functions for biomass supplied from waste and residue sources. MERGE places an upper limit on the amount of biomass energy that might supply the electric and non-electric energy sectors, but otherwise assumes a fixed cost for biomass energy and allows biomass to compete unhindered in the market.

2.2.5. Technology and Technological Change

Technology is the broad set of processes covering know-how, experience, and equipment used by humans to produce services and transform resources. In the three models participating in this scenario, the relationship between things that are produced and things that are used in the production process are represented mathematically. In the jargon of the models, the relationship between things that are produced and things that are used in the production process is referred to as a production function.

The three modeling groups differed substantially in their representation of technology depending on their overall design objectives. Differences also resulted from data limitations and computational feasibility, which force tradeoffs between the inclusion of engineering detail and the representation of the interaction among the segments of a modern economy that determines supply, demand, and prices (see Box 2.1).

All three of the models applied here follow a hybrid approach to the representation of energy technology, involving substantial detail in some areas and more aggregate representations in others, and some of the choices that flow from the distinct design of

each can be seen in Table 2.1. They represent energy demand, as described in Section 2.2.3, with the application of an autonomous energy efficiency improvement (AEEI) factor to represent non-price-induced trends in energy use. However, AEEI parameter values are not directly comparable across the models because each has a unique representation of the processes that together explain the multiple forces that have contributed historically to changes in the energy intensity of economic activity. In IGSM and MERGE, the AEEI captures non-price changes (including structural change not accounted for in the models) that can be energy using rather than energy saving. MERGE represents the AEEI as a function of GDP growth in each region. MiniCAM captures shifts among fuels through differing income elasticities, which change over time, and separately represents AEEI efficiency gains.

--- BOX 2.1: TOP-DOWN, BOTTOM-UP, AND HYBRID MODELING ---

The models used in energy and environmental assessments are sometimes classified as either top-down or bottom-up in structure, a distinction that refers to the way they represent technological options. A top-down model uses an aggregate representation of how producers and consumers can substitute non-energy inputs for energy inputs or relatively energy-intensive goods for less energy-intensive goods. Often, these tradeoffs are represented by aggregate production functions or by utility functions that describe consumers' willingness and technical ability to substitute among goods.

The bottom-up approach begins with explicit technological options, and fuel substitution or changes in efficiency occur as a result of a discrete change from one specific technology to another. The bottom-up approach has the advantage of being able to represent explicitly the combination of outputs, inputs, and emissions of types of capital equipment used to provide consumer services (e.g., a vehicle model or building design) or to perform a particular step in energy supply (e.g., a coal-fired powerplant or wind turbine). However, a limited number of technologies are typically included, which may not well represent the full set of possible options that exist in practice. Also, in a pure bottom-up approach, the demands for particular energy services are often characterized as fixed (unresponsive to price), and the prices of inputs such as capital, labor, energy, and materials are exogenous.

On the other hand, the top-down approach explicitly models demand responsiveness and input prices, which usually require the use of continuous functions to model at least some parts of the available technology set. The disadvantage of the latter approach is that production functions of this form will poorly represent switch points from one technology to another—as from one form of electric generation to another or from gasoline to biomass blends as vehicle fuel. In practice, the vast majority of models in use today, including those applied in this scenario, are hybrids in that they include substantial technological detail in some sectors and more aggregate representations in others.

--- END BOX ---

Other areas shown in Table 2.1 where there are significant differences among the models are in energy conversion—from fossil fuels or renewable sources to electricity and from solid fossil fuels or biomass to liquid fuels or gas. In IGSM, discrete energy technologies

are represented as energy supply sectors contained within the input-output structure of the economy. Those sources of fuels and electricity that now dominate supply are represented as production functions with the same basic structure as the other sectors of the economy. Technologies that may play a large role in the future (e.g., power plants with CCS or oil from shale) are introduced as discrete technologies using a production function structure similar to that for existing production sectors and technologies. They are subject to economy-wide productivity improvements (e.g., labor, land, and energy productivity), the effect on cost of which depends on the share of each factor in the technology production function. MERGE and MiniCAM characterize energy-supply technologies in terms of discrete technologies. In MERGE, technological improvements are captured by allowing for the introduction of more advanced technologies in future periods; in MiniCAM, the cost and performance of technologies are assumed to improve over time, and new technologies become available in the future. Similar differences among the models hold for other conversion technologies, such as coal gasification, coal liquefaction, or liquids from biomass.

The entry into the market of new sources and their levels of production by region are determined endogenously in all three models and depend on the relative costs of supply. It should be emphasized that the models do not explicitly represent the research and development (R&D) process and how it leads to technical change through, for example, public and private R&D, spillovers from innovation in other economic sectors, and learning-by-doing. A number of recent efforts have been made to incorporate such processes and their effects as an endogenous component of modeling exercises. However, these studies have generally not been applied to models of the complexity needed to meet the requirements of this scenario product.

Because of the differences in structure among these models, there is no simple technology-by-technology comparison of performance and cost across particular sources of supply or technical options. This situation exists for a variety of reasons. First, cost is an output of the three models and not an input. In the three models here technologies are defined not in terms of some exogenously specified cost, but rather in terms of a set of parameters associated with a production function. The three models differ in many regards. Each model defines the scope of a technology differently. Sectoral definitions, technology definitions, and data sources all vary across the three models. For example, one model has a service sector while another has a buildings sector. There is then, no common definition for technologies, technology descriptors and hence for a set of comparable costs. The detailed scenario documentation for each of the three modeling groups provides more information about the technology assumptions employed by three modeling groups (Insert references at publication).

The influence of differing technology specifications and assumptions is evident in the scenarios discussed in Chapters 3 and 4, with several of these features being particularly notable. In the absence of any GHG policy, motor fuel is drawn ever more heavily from high-emitting sources—for example, oil from shale comes in under IGSM's resource and technology assumptions, but liquids from coal enter in MERGE and MiniCAM. Furthermore, because each model assumes market mechanisms operate efficiently, the

marginal cost of reducing GHG emissions—that is the cost of reducing the last tonne of GHG—is equal to the price of carbon in every technology employed in every sector and in every country of the world. When stabilization conditions are imposed, all models show CCS taking a key role over the time period considered in this research. Nuclear power contributes heavily in MERGE and in MiniCAM, whereas the potential role of this technology is overridden in the IGSM scenarios by an assumption of political restraints on expansion. Finally, although differences in emissions in the reference scenario contribute to variation in the difficulty of achieving stabilization, alternative assumptions technological improvements also play a prominent role.

2.2.6. Land Use and Land-Use Change

The models used in this scenario were developed originally with a focus on energy and fossil carbon emissions. The integration of the terrestrial biosphere, including human activity, into the climate system is less highly developed. Each model represents the global carbon cycle, including exchanges among the atmosphere, natural vegetation, and soils; the effects of human land use and responses to carbon policy; and feedbacks to the global climate. No model represents all of these possible responses and interactions, and the level of detail varies substantially among the models. For example, they differ in the handling of natural vegetation and soils and in their responses to CO₂ concentration and changed climate. Furthermore, land-use practices (e.g., low- or no-till agriculture and biomass production) and changes in land use (e.g., afforestation, reforestation, or deforestation) that influence GHG emissions and the sequestration of carbon in terrestrial systems are handled at different levels of detail. Indeed, improved two-way linking of global economic and climate analysis with models of physical land use (land use responding to climate and economic pressures and to climate response changes in the terrestrial biosphere) is the subject of ongoing research in these modeling groups.

In IGSM, land is an input to agriculture, biomass production, and wind and/or solar energy production. Agriculture is a single sector that aggregates crops, livestock, and forestry. Biomass energy production is modeled as a separate sector, which competes with agriculture for land. Markets for agricultural goods and biomass energy are international, and demand for these products determines the price of land in each region and its allocation among uses. In other sectors, returns to capital include returns to land, but the land component is not explicitly identified. Anthropogenic emissions of GHGs (importantly, CH₄ and N₂O) are estimated within IGSM as functions of agricultural activity and assumed levels of deforestation. The response of terrestrial vegetation and soils to climate change and CO₂ increase is captured in the Earth system component of the model, which provides a detailed treatment of biogeochemical and land-surface properties of terrestrial systems. However, the biogeography of natural ecosystems and human uses remains unchanged over the simulation period, with the area of cropland fixed to the pattern of the early 1990s. Balance in the carbon cycle between ocean uptake, land-use and land-use change, and anthropogenic emissions is achieved in IGSM with an adjustment factor to ensure that the recent trend in atmospheric CO₂ increase is replicated. This adjustment factor is best interpreted as what carbon uptake due to forest regrowth must have been, given the representation of terrestrial and ocean systems in

IGSM. The need for such an adjustment factor reflects the continuing scientific uncertainty in the carbon cycle. In other words, with fossil emissions and concentrations relatively well known, the total uptake is known but the partitioning of the uptake between terrestrial and ocean systems is uncertain (Sabine et al., 2004). IGSM does not simulate carbon price-induced changes in carbon sequestration (e.g., reforestation and tillage), and change among land-use types in EPPA is not fed to the terrestrial biosphere component of IGSM.

8

10

11

The MERGE modeling group assumed a neutral terrestrial biosphere across all scenarios. That is, it is assumed that the net CO₂ exchange with the atmosphere by natural ecosystems and managed systems—the latter including agriculture, deforestation, afforestation, reforestation, and other land-use change—sums to zero.

12 13 14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

MiniCAM includes a model that allocates the land area in a region among various components of human use and unmanaged land—with changes in allocation over time in relation to income, technology, and prices—and estimates the CO₂ emissions (or sinks) that result. Land conditions and associated emissions are parameterized for a set of regional sub-aggregates. The supply of primary agricultural production (four food crop types, pasture, wood, and commercial biomass) is simulated regionally with competition for a finite land resource based on the average profit rate for each good potentially produced in a region. In stabilization scenarios, the value of carbon stored in the land is added to this profit, based on the average carbon content of different land uses in each region. This allows carbon mitigation policies to explicitly extend into land and agricultural markets. The model is solved by clearing a global market for primary agricultural goods and regional markets for pasture. The biomass market is cleared with demand for biomass from the energy component of the model. Exogenous assumptions are made for the rate of intrinsic increase in agricultural productivity, although net productivity can decrease in the case of expansion of agricultural lands into less productive areas (Sands and Leimbach 2003). Unmanaged land can be converted to agroforestry, which in general leads to net CO₂ emissions from tropical regions in the early decades. Emissions of non-CO₂ GHGs are tied to relevant drivers, for example, with CH₄ from ruminant animals related to beef production. MiniCAM thus treats the effects on carbon emissions of gross changes in land use (e.g., from forests to biomass production) using an average emission factor for such conversion. The pricing of carbon stocks in the model provides a counterbalance to increasing demand for biomass crops in stabilization scenarios.

36 37 38

2.2.7. Emissions of CO₂ and Non-CO₂ Greenhouse Gases

39 40 41

42

43

44

In all three models, the main source of CO_2 emissions is fossil fuel combustion, which is computed on the basis of the carbon content of each of the underlying resources: oil, natural gas, and coal. Special adjustments are made to account for emissions associated with the additional processing required to convert coal, tar sands, and shale sources into products equivalent to those from conventional oil. Other industrial CO_2 emissions also are included, primarily from cement production.

As required for this scenario, all three models also include representations of emissions and abatement of CH₄, N₂O, HFCs, PFCs, and SF₆ (plus aerosols and other substances not considered in this scenario). The models use somewhat different approaches to represent abatement of non-CO₂ GHGs. IGSM includes the emissions and abatement possibilities directly in the production functions of the sectors that are responsible for emissions of the different gases. Abatement possibilities are represented by substitution elasticities in a nested structure that encompasses gas emissions and other inputs, benchmarked to reflect bottom-up studies of abatement potential. This construction is parallel to the representation of fossil fuels in production functions, where abatement potential is similarly represented by the substitution elasticity between fossil fuels and other inputs, with the specific set of substitutions governed by the nest structure. Abatement opportunities vary by sector and region.

In MERGE, CH₄ emissions from natural gas use are tied directly to the level of natural gas consumption, with the emissions rate decreasing over time to represent reduced leakage during the transportation process. Non-energy sources of CH₄, N₂O, HFCs, PFCs, and SF₆ are based largely on the guidelines provided by the EMF Study No. 21 on Multi-Gas Mitigation and Climate Change (Weyant and de la Chesnaye 2005). The EMF developed baseline projections from 2000 through 2020. For all gases but N₂O and CO₂, the baseline for beyond 2020 was derived by extrapolation of these estimates. Abatement cost functions for these two gases are also based on EMF 21, which provided estimates of the abatement potential for each gas in each of 11 cost categories in 2010. These abatement cost curves are directly incorporated in the model and extrapolated after 2010 following the baseline. There is also an allowance for technical advances in abatement over time.

MiniCAM calculates emissions of CH₄; N₂O; and seven categories of industrial sources for HFCs, PFCs, and SF₆. Emissions are determined for over 30 sectors, including fossil fuel production, transformation, and combustion; industrial processes; land use and landuse change; and urban emissions. For details, see Smith (2005) and Smith and Wigley (In Press). Emissions are proportional to driving factors appropriate for each sector, with emissions factors in many sectors decreasing over time according to an income-driven logistic formulation. Marginal abatement cost (MAC) curves from the EMF-21 study are applied, including shifts in the curves for CH₄ due to changes in natural gas prices. Any below-zero reductions in MAC curves are assumed to apply in the reference scenario.

2.3. Earth Systems Component

The Earth system components of the models represent the response of the atmosphere, ocean, and terrestrial biosphere to emissions and increasing concentrations of GHGs and other substances. Representation of these processes, including the carbon cycle (Box 2.2), is necessary to determine emissions paths consistent with stabilization because these systems determine how long each of these substances remains in the atmosphere and how they interact in the modification of the Earth's radiation balance. Each model includes such physical-chemical-biological components, but incorporates different levels of detail. The most elaborated Earth system components are found in IGSM (Sokolov et al. 2005),

which falls in a class of models referred to as Earth System Models of Intermediate
Complexity (Claussen et al. 2002). These are models that fall between the full threedimensional atmosphere-ocean general circulation models (AOGCMs) and energy
balance models with a box model of the carbon cycle. The Earth system components of
MERGE and MiniCAM fall in the class of energy balance-carbon cycle box models.
Table 2.1 shows how each of the models treat different components of the Earth systems.

7 8

9

10

11 12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

--- BOX 2.2: THE CARBON CYCLE ---

Although an approximate atmospheric lifetime is sometimes calculated for CO₂, the term is potentially misleading because it implies that CO₂ put into the atmosphere by human activity always declines over time by some stable removal process. In fact, the calculated concentration of CO₂ is not related to any mechanism of destruction, or even to the length of time an individual molecule spends in the atmosphere, because CO₂ is constantly exchanged between the atmosphere and the surface layer of the ocean and with vegetation. Instead, it is more appropriate to think about how the quantity of carbon that the Earth contains is partitioned between stocks of in-ground fossil resources, the atmosphere (mainly as CO₂), surface vegetation and soils, and the surface and deep layers of the ocean. When stored CO₂ is released into the atmosphere, either from fossil or terrestrial sources, atmospheric concentrations increase, leading to disequilibrium with the ocean, and more carbon is taken up than is cycled back. For land processes, vegetation growth may be enhanced by increases in atmospheric CO₂, and this change could augment the stock of carbon in vegetation and soils. As a result of the ocean and terrestrial uptake, only about half of the carbon currently emitted remains in the atmosphere. Over millennial time scales oceans would continue to remove carbon until a large fraction, presently about 80%, would ultimately be removed to the oceans, leaving about 20% as a permanent increase in atmospheric CO₂ concentration. But this large removal only occurs because current levels of emissions lead to substantial disequilibrium between atmosphere and ocean. Lower emissions would lead to less uptake, as atmospheric concentrations come into balance with the ocean and interact with the terrestrial system. Rising temperatures themselves will reduce uptake by the ocean, and will affect terrestrial vegetation uptake, processes that the models in this scenario variously represent.

32 33 34

35

36

37

38

39

40

An important policy implication of these carbon-cycle processes as they affect stabilization scenarios is that stabilization of emissions near the present level will not lead to stabilization of atmospheric concentrations. CO_2 concentrations were increasing in the 1990s at just over 3 ppmv per year, an annual increase of 0.8%. Thus, even if societies were able to stabilize emissions at current levels, atmospheric concentrations of CO_2 would continue to rise. As long as emissions exceed the rate of uptake, even very stringent abatement will only slow the rate of increase.

41 42 --- END BOX ---

43 44

45

46

IGSM has explicit spatial detail, resolving the atmosphere into multiple layers and by latitude, and it includes a terrestrial vegetation model with multiple vegetation types that are also spatially resolved. A version of IGSM with a full three-dimensional ocean model was used for this scenario, and it includes temperature-dependent uptake of carbon.

IGSM models atmospheric chemistry, resolved separately for urban (i.e., heavily polluted) and background conditions. Processes that move carbon into or out of the ocean and vegetation are modeled explicitly. IGSM also models natural emissions of CH₄ and N₂O, which are weather and/or climate-dependent. The model includes a radiation code that computes the net effect of atmospheric concentrations of the GHGs studied in this research. Also included in the global forcing is the effect of changing ozone and aerosol levels, which result from emissions of CH₄ and non-GHGs, such as NO_x and volatile organic hydrocarbons; SO_X; black carbon; and organic carbon from energy, industrial, agricultural, and natural sources.

MERGE's physical Earth system component is embedded in the inter-temporal optimization framework, thus allowing solution of an optimal allocation of resources through time, accounting for damages related to climate change, or optimizing the allocation of resources with regard to other constraints such as concentrations, temperature, or radiative forcing. In this scenario, the second of these capabilities is applied, with a constraint on radiative forcing (see Chapter 4). In contrast, IGSM and MiniCAM Earth system models are driven by emissions as simulated by the economic components. In that regard, they are simulations rather than optimization models.

The carbon cycle in MERGE relates emissions to concentrations using a convolution ocean carbon-cycle model and assuming a neutral biosphere (i.e., no net CO₂ exchange). It is a reduced-form carbon cycle model developed by Maier-Reimer and Hasselmann (1987). Carbon emissions are divided into five classes, each with different atmospheric lifetimes. The behavior of the model compares favorably with atmospheric concentrations provided in the IPCC's Third Assessment Report (TAR) (IPCC 2001) when the same Special Report on Emissions Scenarios (SRES) scenarios of emissions are simulated in the model (Nakicenovic et al. 2000). MERGE models the radiative effects of GHGs using relationships consistent with summaries by the IPCC, and applies the median aerosol forcing from Wigley and Raper (2001). The aggregate effect is obtained by summing the radiative forcing effect of each gas.

MiniCAM uses the MAGICC model (Wigley and Raper 2001, Wigley and Raper 2002) as its biophysical component. MAGICC is an energy-balance climate model that simulates the energy inputs and outputs of key components of the climate system (sun, atmosphere, land surface, and ocean) with parameterizations of dynamic processes such as ocean circulations. It operates by taking anthropogenic emissions from the other MiniCAM components, converting these to global average concentrations (for gaseous emissions), then determining anthropogenic radiative forcing relative to preindustrial conditions, and finally computing global mean temperature changes. The carbon cycle is modeled with both terrestrial and ocean components. The terrestrial component includes CO₂ fertilization and temperature feedbacks; the ocean component is a modified version of the Maier-Reimer and Hasselmann (1987) model that also includes temperature effects on CO₂ uptake. Net land-use change emissions from the MiniCAM's land-use change component are fed into MAGICC so that the global carbon cycle is consistent with the amount of natural vegetation. Reactive gases and their interactions are modeled on a

global-mean basis using equations derived from results of global atmospheric chemistry models (Wigley and Raper 2002).

In MiniCAM, global mean radiative forcing for CO₂, CH₄, and N₂O are determined from GHG concentrations using analytic approximations. Radiative forcing for other GHGs are taken to be proportional to concentrations. Radiative forcing for aerosols (for sulfur dioxide and for black and organic carbon) are taken to be proportional to emissions. Indirect forcing effects, such as the effect of CH₄ on stratospheric water vapor, are also included. Given radiative forcing, global mean temperature changes are determined by a multiple box model with an upwelling-diffusion ocean component. The climate sensitivity is specified as an exogenous parameter. MAGICC's ability to reproduce the global mean temperature change results of AOGCMs has been demonstrated (Cubasch et al. 2001, Raper and Gregory 2001).

Although aerosols and ozone are not included in the computation of the radiative forcing targets that are the focus of these scenarios, they are nonetheless included in the simulations as noted above. That is, the target radiative forcing levels identified in Table 1.2 and the radiative forcing levels reported in subsequent chapters, account for only that part of radiative forcing due to those GHGs covered by the target. The models can simulate total radiative forcing including additional positive forcing from ozone and dark aerosols and negative forcing from sulfate aerosols. As shown by Prinn et al. (In Press), even for very large changes in emissions related to these substances, the temperature effect is small, in large part because aerosols and ozone have offsetting cooling and warming effects. To the extent temperature is affected by these substances, however, they have a small, indirect influence on the scenarios because trace gas cycles are climatedependent. For example, climate affects vegetation and ocean temperature and, thus, carbon uptake, and natural emissions of CH₄ and N₂O and the lifetime of CH₄ also depend on climate. Because the net effect of these substances on temperature is small, the feedback effect on trace gas cycles also is very small. However, to the extent these feedbacks are represented in the models as discussed above, they are included in the calculation of required emissions reduction because the temperature paths, while not reported here, are simulated in the models and affect the reported carbon and other gas concentrations. By the same token, the Montreal gases, which are being phased out, are nonetheless included in these models and exert some influence on temperature.

Note that although the models used in this research have capabilities to evaluate various climate change effects, with few exceptions, they do not include the consequences of such feedback effects as: temperature on home heating and cooling requirements; local climate change on agricultural productivity; CO_2 fertilization on agricultural productivity (though a CO_2 fertilization effect is included in the terrestrial carbon cycle models employed by IGSM and MiniCAM); climate on water availability for applications ranging from crop growing to power plant cooling. Such improvements are left to future research.

2.4. References

- 1 Brenkert A, S Smith, S Kim, and H Pitcher. 2003. *Model Documentation for the*
- 2 *MiniCAM.* PNNL-14337, Pacific Northwest National Laboratory, Richland, Washington.
- 3 Claussen M, LA Mysak, AJ Weaver, M Crucifix, T Fichefet, MF Loutre, SL Weber, J
- 4 Alcamo, VA Alexeev, A Berger, R Calov, A Ganopolski, H Goosse, G Lohman, F
- 5 Lunkeit, II Mokhov, V Petoukhov, P Stone, and Z Wang. 2002. Earth System Models of
- 6 Intermediate Complexity: Closing the Gap in the Spectrum of Climate System Models.
- 7 *Climate Dynamics* 15:579-586.
- 8 Cubasch U, GA Meehl, GJ Boer, RJ Stouffer, M Dix, A Noda, CA Senior, S Raper, KS
- 9 Yap. 2001. 2001: Projections of Future Climate Change. In *IPCC*, 2001: Climate Change
- 10 2001: The Scientific Basis, 525-582. Cambridge, U.K.
- Edmonds J and J Reilly. 1985. *Global Energy: Assessing the Future*. Oxford University
- 12 Press, New York.
- 13 IPCC Intergovernmental Panel on Climate Change. 2001. Climate Change 2001: The
- 14 Scientific Basis Contribution of Working Group 1 to the Third Assessment Report of the
- 15 *IPCC*. Cambridge, U.K.
- 16 Maier-Reimer E and K Hasselmann. 1987. Transport and Storage of CO₂ in the Ocean —
- 17 An Inorganic Ocean-Circulation Carbon Cycle Model. *Climate Dynamics* 2:63–90.
- Manne A and R Richels. 2005. MERGE-A Model for Global Climate Change. In *Energy*
- 19 and Environment, eds R Loulou, J Waaub, and G Zaccour, Springer, New York.
- 20 Nakicenovic N, J Alcamo, G Davis, B de Vries, J Fenhann, S Gan, K Gregory, A
- 21 Grubler, TY Jung, T Kram, ELL Rovere, L Michaelis, S Mori, T Morita, W Pepper, H
- 22 Pitcher, L Price, K Riahi, A Roehrl, HH Rogner, A Sankovski, M Schlesinger, P Shukla,
- 23 S Smith, R Swart, S van Rooijen, N Victor, and Z Dadi. 2000. Special Report on
- 24 Emissions Scenarios. Cambridge University Press, Cambridge, U.K.
- 25 Paltsev S, JM Reilly, HD Jacoby, RS Eckaus, J McFarland, M Sarofim, M Asadoorian,
- and M Babiker. 2005. The MIT Emissions Prediction and Policy Analysis (EPPA) Model:
- 27 Version 4. Report 125, MIT Joint Program on the Science and Policy of Global Change,
- 28 Cambridge, Massachusetts.
- 29 Prinn R, J Reilly, M Sarofim, C Wang and B Felzer. In Press. Effects of air pollution
- 30 control on climate. In Integrated Assessment of Human-induced Climate Change, ed M
- 31 Schlesinger, Cambridge University Press, Cambridge, U.K.
- Raper and Gregory. 2001. {NEED TO COMPLETE THIS CITATION}
- 33 Sabine CL, M Heiman, P Artaxo, DC Bakker, CT Chen, CB Field, N Gruber, C LeOuéré,
- 34 RG Prinn, JE Richey, P Romero-Lankao, J Sathaye, and R Valentini. 2004. Current
- 35 Status and Past Trends of the Carbon Cycle. Pages 17-44 in *The Global Carbon Cycle*,
- 36 SCOPE Project 62, eds CB Field and MR Raupach, Island Press, Washington D.C.
- 37 Sands RD and M Leimbach. 2003. Modeling Agriculture and Land Use in an Integrated
- 38 Assessment Framework. *Climatic Change* 56:185–210.
- 39 Smith SJ and TML Wigley. In Press. Multi-Gas Forcing Stabilization with the
- 40 MiniCAM. Energy Journal.

- 1 Smith SJ. 2005. Income and Pollutant Emissions in the OBJECTS MiniCAM Model.
- 2 *Journal of Environment and Development* 14(1):175–196.
- 3 Sokolov AP, CA Schlosser, S Dutkiewicz, S Paltsev, DW Kicklighter, HD Jacoby, RG
- 4 Prinn, CE Forest, J Reilly, C Wang, B Felzer, MC Sarofim, J Scott, PH Stone, JM
- 5 Melillo, and J Cohen. 2005. The MIT Integrated Global System Model (IGSM) Version 2:
- 6 Model Description and Baseline Evaluation. Report 124, MIT Joint Program on the
- 7 Science and Policy of Global Change, Cambridge, Massachusetts.
- 8 Webster MD, M Babiker, M Mayer, JM Reilly, J Harnisch, R Hyman, MC Sarofim, and
- 9 C Wang. 2003. Uncertainty in Emissions Projections for Climate Models. *Atmospheric*
- 10 Environment 36(22):3659-3670.
- Weyant JP and F de la Chesnaye. 2005. Multi-Gas Scenarios to Stabilize Radiative
- 12 Forcing. *Energy Journal*, Special Edition on Multi-Gas Scenarios and Climate Change.
- 13 Wigley TLM and S Raper. 2001. Interpretation of High Projections for Global-mean
- 14 Warming. *Science* 293:451-454.
- 15 Wigley TLM and S Raper. 2002. Reasons for Larger Warming Projections in the IPCC
- 16 Third Assessment Report. *Nature* 357:293-300.

Table 2.1 Characteristics of the Integrated Assessment Models.

Feature	IGSM with an EPPA economics component	MERGE	MiniCAM	
Regions	16	9	14	
Time Horizon, Time Steps	2100, 5-year steps	2200, 10-year steps	2095, 15-year steps	
Model Structure	General equilibrium	General equilibrium	Partial equilibrium	
Solution	Recursive dynamic	Inter-temporal optimization	Recursive dynamic	
Final Energy Demand Sectors in Each Region	Households, private transportation, commercial transportation, service sector, agriculture, energy intensive industries, and other industry	A single, non-energy production sector	Buildings, transportation, and industry (including agriculture)	
Capital Turnover	Five vintages of capital with a depreciation rate	A putty clay approach wherein the input- output coefficients for each cohort are optimally adjusted to the future trajectory of prices at the time of investment	Vintages with constant deprecation rate for all electricity-sector capital; capital structure not explicitly modeled in other sectors	
Goods in International Trade	All energy and non- energy goods as well as emissions permits	Energy, energy intensive industry goods, emissions permits, and representative tradable goods	Oil, coal, natural gas, biomass, agricultural goods, and emissions permits	
Emissions	CO ₂ , CH ₄ , N ₂ O, HFCs, PFCs, SF ₆ , CO, NOx, SOx, NMVOCs, BC, OC, NH ₃	CO ₂ , CH ₄ , N ₂ O, long- lived F-gases, short- lived F-gases, and SOx	CO_2 , CH_4 , N_2O , CO , NOx , SO_2 , $NMVOCs$, BC , OC , $HFC245fa$, $HFC134a$, $HFC125$, $HFC143a$, SF_6 , C_2F_6 , and CF_4	
Land Use	Agriculture (crops, livestock, and forests), biomass land use, and land use for wind and/or solar energy	Reduced-form emissions from land- use; no explicit land use sector; assume no net terrestrial emissions of CO ₂	Agriculture (crops, pasture, and forests) as well as biomass land use and unmanaged land; the agriculture-land-use module directly determines land-use change emissions and terrestrial carbon stocks.	
Population	Exogenous	Exogenous	Exogenous	

000 0	F	F	[
GDP Growth Energy Efficiency	Exogenous productivity growth assumptions for labor, energy, and land; exogenous labor force growth determined from population growth; endogenous capital growth through savings and investment Exogenous	Exogenous productivity growth assumptions for labor and energy; exogenous labor force growth determined from population growth; endogenous capital growth through savings and investment Proportional the rate	Exogenous productivity growth assumptions for labor; exogenous labor force growth based on population demographics Exogenous
Change	J	of GDP growth in each region	J
Energy Resources	Oil (including tar sands), shale oil, gas, coal, wind and/or solar, land (biomass), hydro, and nuclear fuel	Conventional oil, unconventional oil (coal-based synthetics, tar sands, and shale oil), gas, coal, wind, solar, biomass, hydro, and nuclear fuel	Conventional oil, unconventional oil (including tar sands and shale oil), gas, coal, wind, solar, biomass (waste and/or residues and crops), hydro, and nuclear fuel (uranium and thorium); includes a full representation of the nuclear fuel cycle
Electricity Technologies	Conventional fossil (coal, gas, and oil), nuclear, hydro, natural gas combined cycle (NGCC) with and without capture, integrated coal gasification with capture, and wind and/or solar, biomass	Conventional fossil (coal, gas, and oil), nuclear, hydro, NGCC integrated coal gasification with capture, wind, solar, biomass, and fuel cells	Conventional fossil (coal, gas, and oil) with and without capture; IGCCs with and without capture; NGCC with and without capture; Gen II, III, and IV reactors and associated fuel cycles; hydro, wind, solar, and biomass (traditional and modern commercial)
Conversion Technologies	Oil refining, coal gasification, and bio- liquids	Oil refining, coal gasification and liquefaction, bio- liquids, and electrolysis	Oil refining, natural gas processing, natural gas to liquids conversion, coal, and biomass conversion to synthetic liquids and gases; hydrogen production using liquids, natural gas, coal, biomass; and electrolysis, including direct production from wind and solar, and nuclear thermal conversion

Atmosphere- Ocean	2-dimensional atmosphere with a 3- dimensional ocean general circulation model, resolved at 20 minute time steps, 4° latitude, 4 surface types, and 12 vertical layers in the atmosphere	Global multi-box energy balance model with upwelling- diffusion ocean heat transport
Carbon Cycle	Biogeochemical models of terrestrial and ocean processes; depends on climate and/or atmospheric conditions with 35 terrestrial ecosystem types	Globally balanced carbon cycle with separate ocean and terrestrial components as well as with terrestrial response to land-use changes
Natural Emissions	CH ₄ , N ₂ O,and weather and/or climate dependent as part of biogeochemical process models	Fixed natural emissions over time
Atmospheric fate of GHGs, pollutants	Process models of atmospheric chemistry resolved for urban and background conditions	Reduced form models for reactive gases and their interactions
Radiation Code	Radiation code accounting for all significant GHGs and aerosols	Reduced form and top-of-the-atmosphere forcing; including indirect forcing effects

3. REFERENCE SCENARIOS

_			
3	3. RI	EFERENCE SCENARIOS	1
4	3.1. Int	roduction	1
5	3.2. So	cioeconomic Assumptions	3
6	3.3. En	ergy Use, Prices, and Technology	7
7	3.3.1.	The Evolving Structure of Energy Use	7
8	3.3.2.	Trends in Fuel Prices	10
9	3.3.3.	Electricity Production and Technology	11
10	3.3.4.	Non-Electric Energy Use	12
11	3.4. La	nd Use and Land-Use Change	13
12	3.5. En	nissions, Concentrations, and Radiative Forcing	14
13	3.5.1.	Greenhouse Gas Emissions	15
14	3.5.2.	The Carbon Cycle: Net Ocean and Terrestrial CO ₂ Uptake	19
15	3.5.3.	Greenhouse Gas Concentrations	19
16	3.5.4.	Radiative Forcing from Greenhouse Gases	20
17	3.6. Re	ferences	

In the reference scenarios, energy consumption grows significantly and the energy system continues to rely on fossil fuels, leading to an increase in CO_2 emissions of roughly 3 to $3\frac{1}{2}$ times the present level by 2100. Combined with increases in the non- CO_2 GHGs and net uptake by the ocean and terrestrial biosphere, radiative forcing from the GHGs considered in this research reaches 6.4 to 8.6 Wm⁻² above the preindustrial level by 2100.

3.1. Introduction

This chapter introduces the reference scenarios developed by the three modeling groups. These scenarios are plausible future paths, not predictions, for by the very nature of their construction, they lack the features of predictions best-judgment forecasts. For example, they assume that in the post-2012 period existing measures to address climate change expire and are never renewed or replaced, which is an unlikely occurrence. Rather, they have been developed as points of departure to highlight the implications for energy use and other human activities of the stabilization of radiative forcing. Each of the modeling groups could have created a range of other plausible reference scenarios by varying assumptions about rates of economic growth, the cost and availability of alternative energy options, assumptions about non-climate environmental regulations, and so forth.

Other than to standardize reporting conventions and GHG emissions mitigation policies (or lack thereof), the three modeling groups developed their reference scenarios independently as each judged appropriate. As noted in Chapter 2, the three models were developed with somewhat different original design objectives. They differ in (a) their inclusiveness, (b) their specifications of key aspects of economic structure, and (c) their choice of values for key parameters. These choices then lead to different

characterizations of the underlying economic and physical systems that these models represent.

Moreover, even if the models were identical in structure, the independent choice of key assumptions should lead to differences among scenarios. For example, as will be discussed, the reference scenarios differ in their specification of the technical details of virtually every aspect of the future global energy system, ranging from the cost and availability of oil and natural gas to the prospects for nuclear power. These differences affect future reference emissions and the nature and cost of stabilization regimes.

Finally, the modeling groups did not attempt to harmonize assumptions about non-climate-related policies. Such differences matter both in the reference and stabilization scenarios. For example, the MiniCAM reference scenario assumes a larger effect of CH₄ emission-control technologies deployed for economic reasons, which leads to lower reference scenario CH₄ emissions than in the reference scenarios from the other modeling groups. Similarly, the IGSM modeling group assumed that non-climate concerns would limit the deployment of nuclear power, while the MERGE and MiniCAM modeling groups assumed that nuclear power would be allowed to participate in energy markets on the basis of energy cost alone.

This variation in modeling approaches and assumptions is one of the strengths of this research, for the resulting differences across scenarios can help shed light on the implications of differing assumptions about the way key forces may evolve over time. It also provides three independent starting points for consideration of stabilization goals.

Although there are many reasons to expect that the three reference scenarios would be different, it is worth noting that the modeling groups met periodically during the research process to review progress and to exchange information. Thus, while not adhering to any formal protocol of standardization, the three reference scenarios are not entirely independent either.

Development of a reference scenario involves the elaboration of one path from among a range of uncertain outcomes. Thus, it should be further emphasized that the three reference scenarios were not designed in an attempt to span the full range of potential future conditions or to shed light on the probability of the occurrence of future events. That is a much more ambitious undertaking than the one reported here.

The remainder of this chapter describes the reference scenarios developed by the three modeling groups working forward from underlying drivers to implications for radiative forcing. (Chapter 4, on the other hand, proceeds in the other direction, imposing the stabilization levels on radiative forcing and exploring the implications.) Section 3.2 begins with a summary of the underlying socioeconomic assumptions, most notably for population and economic growth. Section 3.3 discusses the evolution of the global energy system over the twenty-first century in the absence of additional GHG controls and discusses the associated prices of fuels. The energy sector is the largest but not the only source of anthropogenic GHG emissions. Also important is the net uptake or release of

CO₂ by the oceans and the terrestrial biosphere. Section 3.4 shows how the three reference scenarios handle this aspect of the interaction of human activity with natural Earth systems. Section 3.5 then presents anthropogenic emissions, taking into account both the energy sector and other sources, such as agriculture and various industrial activities. The section draws together all these various components to present reference scenarios of the consequences of anthropogenic emissions and the processes of CO₂ uptake and non-CO₂ gas destruction for the ultimate focus of the research: atmospheric concentrations and global radiative forcing.

3.2. Socioeconomic Assumptions

GHGs are a product of modern life. Population increase and economic activity are major determinants of the scale of human activities and ultimately of anthropogenic GHG emissions. In the reference scenarios, the global population rises from 6 billion in the year 2000 to between 8.6 and 9.9 billion in 2100. Economic activity grows through 2100 across the globe. Developed nations continue to expand their economies at historical rates, and developing nations make significant progress toward improved standards of living.

Reference scenarios are grounded in a larger demographic and economic story. Each uses population as the basis for developing scenarios of the scale and composition of economic activity for each region. For population assumptions, the IGSM modeling group adopted a regionally detailed United Nations (U.N.) projection for the period 2000-2050 (UN 2001) and extended this scenario to 2100 using information from a longer-term UN study (UN 2000). The MiniCAM assumptions are based on a median scenario by the U.N. (UN 2005) and a Millennium Assessment Techno-Garden Scenario from the International Institute for Applied Systems Analysis (O'Neal 2005). Near-term population assumptions for the MERGE scenarios come from the Energy Information Administration's *International Energy Outlook*.

Table 3.1. Population by Region across Reference Scenarios, 2000-2100

Regional populations are given in Table 3.1. Population increases substantially across the reference scenarios by the end of the century, but all of the scenarios portray the population growth rate as slowing to near zero, if not turning negative, by the end of the century. As a result, by 2050 more than 75% of all the change between the year 2000 and 2100 has occurred. A demographic transition from high birth and death rates to low death rates and eventually to low birth rates is a feature of most demographic scenarios, reflecting assumptions that birth rates will decline to replacement levels or below. For some countries, birth rates are already below replacement levels, and just maintaining these levels would result in population decline for these countries. A key uncertainty in all demographic scenarios is whether a transition to less-than-replacement levels is a more or less permanent feature of those countries where it has occurred and whether such a pattern will be repeated in other countries.

The differences among the scenarios lie in nuances of this pattern. The MiniCAM scenarios exhibit a peak in global population around the year 2070 at slightly more than 9 billion people, after which the population declines to 8.6 billion. The MERGE and IGSM scenarios, on the other hand, both employ demographic assumptions by which the global population stabilizes but does not decline during this century. By 2100, populations range from 8.6 to 9.9 billion across the scenarios, which is an increase of roughly 40% to 65% from the 6 billion on Earth in 2000. In total, the difference between the demographic scenarios is relatively small: they differ by only 3% in 2030 and by less than 10% until after 2080.

Figure 3.1. World and U.S. Population across Reference Scenarios

The variation in population among the scenarios is greater for the U.S. than for the globe. The U.S. population, in the right panel of Figure 3.1, increases from about 280 million in the year 2000 to between 335 million and 425 million by 2100. Although the MiniCAM global population is the lowest of the three scenarios in 2100, it is the highest for the U.S. The higher U.S. population in MiniCAM reference scenarios compared to the scenarios from the other two modeling groups can be traced to different assumptions about net migration.

As discussed in Chapter 2, GDP, while ostensibly an output of all three models, is in fact largely determined by assumptions about labor productivity and labor force growth, which are model inputs. None of the three modeling groups began with a GDP goal and derived sets of input factors that would generate that level of activity. Rather, each began with assessments about potential growth rates in labor productivity and labor force and used these, through differing mechanisms, to compute GDP. In MiniCAM, labor productivity and labor force growth are the main drivers of GDP growth. In MERGE and IGSM, savings and investment and productivity growth in other factors (e.g., materials, land, and energy) contribute as well. All three models derive labor force growth from the underlying assumptions about population.

The alternative scenarios of population and productivity growth lead to differences among the three reference scenarios in U.S. GDP growth, as shown in Figure 3.2. There is relatively little difference among the three trajectories through the year 2020. After 2020, however, the scenarios diverge with the lowest scenario (MERGE) having a U.S. GDP roughly half of that of the highest scenario (IGSM) by the end of the century. The labor productivity growth assumptions for the U.S. in the IGSM scenario are the highest of the three, and the U.S. population assumptions are also relatively high in the IGSM scenarios, as seen in Figure 3.1. The relatively lower labor productivity growth assumptions used in the MERGE and MiniCAM scenarios lead to lower levels of GDP. The lower population growth assumptions employed in the MERGE scenarios give the MERGE reference scenario the lowest GDP in 2100.

Figure 3.2. U.S. Economic Growth across Reference Scenarios

Table 3.2 shows GDP across regions in the three reference scenarios. Differences in the absolute levels of GDP increase result from relatively small differences in rates of per capita growth. Although difficulties arise in comparisons of GDP across countries (see Box 3.1), the growth rates underlying these scenarios are usefully compared with historical experience. Table 3.3 presents long-term growth rates from reconstructed data showing that consistent rapid growth is a phenomenon of industrialization, starting in the 1800s in North America and Europe and gradually spreading to other areas of the world. By the end of the period 1950 to 1973, it appeared that the phenomenon of rapid growth had taken hold in all major regions of the world. Since 1973, it has been less clear to what degree that conclusion holds. Growth slowed in the 1970s in most regions, the important exceptions being China, India, and several South and East Asian economies. In Africa, Latin America, Eastern Europe, and the former Soviet Union, growth slowed in this period to rates more associated with preindustrial times.

1 2

Table 3.2. Reference GDP for Key Regions

Table 3.3. Historical Annual Average Per Capita GDP Growth

--- BOX 3.1: Exchange Rates and Comparisons of Real Income Among Countries --- Models used in this type of research typically represent the economy in real terms, following the common assumption that inflation is a purely monetary phenomenon that does not have real effects, but issues occur in comparing income across regions in terms of what currency exchange rates are most appropriate. The models do not represent the factors that govern exchange-rate determination and, therefore, cannot represent changes. However, modeling international trade in goods requires either an exchange rate or a common currency. Rather than separately model economies in native currencies and use a fixed exchange to convert currencies for trade, the equivalent and simpler approach is to convert all regions to a common currency at average market exchange rates (MER) for the base year of the model.

At the same time, it is widely recognized that using market exchange rates to compare countries can have peculiar implications. Country A might start with a larger GDP than country B when converted to a common currency using that year's exchange rates, and grow faster in real terms than B, yet could later have a lower GDP than B using exchange rates in that year. This paradoxical situation can occur if A's currency depreciates relative to B's. Depreciation and appreciation of currencies by 20% to 50% over just a few years is common, so the example is not extreme. Interest in making cross-country comparisons that are not subject to such peculiarities has led to development of indices of international purchasing power. A widely used index is purchasing power parity (PPP), whose development was sponsored by the World Bank. PPP-type indices have the advantage of being more stable over time and are thought to better reflect relative living standards among countries than MER. Thus, analysts drawing comparisons among countries have found it preferable to use PPP-type indices rather than MER. Although the empirical foundation for the indices has been improving, the theory for them remains incomplete, and thus there is a limited basis on which scenarios of future changes in PPP can be

developed. Some hypothesize that differences close as real income gaps narrow, but the evidence for this outcome is weak, in part due to data limitations.

Controversy regarding the use of MER arose around the SRES produced by the IPCC (Nakicenovic and Swart, 2001) because they were reported to model economic convergence among countries, yet reported economic attributes of the scenarios in MER. Assessing convergence implies a cross-country comparison, but that would only be strictly meaningful if MER measures were corrected for a country's real international purchasing power. In developing the scenarios for this research, no assumptions were made regarding convergence. Growth prospects and other parameters for the world's economies were assessed relative to their own historical performance. The models are parameterized and simulated in MER, as this is consistent with modeling of trade in goods. To the extent GDP results are provided, international comparisons are to made with great caution; for example, even global GDP for an historical period will differ if exchange rates of different years are used.

-- END BOX --

With this historical experience as background, the differences in GDP growth among the reference scenarios can be explained. Demographic trends, slowing population, and labor force growth are responsible for a gradual slowing of overall GDP growth in all three reference scenarios, and generally for slower growth rates than in the last half of the twentieth century. With respect to the developed countries, the per capita income growth rate for the U.S. in the IGSM reference scenario is about the average for North America for the period 1950-2000. The lower growth for the MiniCAM reference scenario reflects an assumption that an aging population will lead to lower labor force participation, and the result of this demographic maturation is a lower future rate of per capita GDP growth compared to history. U.S. growth rates in the MERGE reference scenario are similar to those of MiniCAM reference scenario.

GDP growth patterns for Western Europe and Japan are similar to one another within reference scenarios but vary across models. The IGSM reference scenario follows the post World War II trend in per capita GDP growth, but the MiniCAM and MERGE scenarios anticipate a break from the trend with lower per capita growth in GDP as a consequence of changes in underlying demographic trends. As for the U.S., the MiniCAM reference scenario exhibits a decline in average labor force participation in other developed regions as populations age, resulting in lower growth in per capita GDP compared to the IGSM reference scenario. The GDP growth pattern in the MERGE reference scenario is similar to that of MiniCAM reference scenario.

GDP growth patters for developing regions show greater differences from historical experience. Notably, all three modeling groups chose assumptions leading to consistent growth in many non- Organization for Economic Cooperation and Development (OECD) regions at rates experienced by industrializing countries. However, growth rates are not homogeneous. Growth in China and India is generally higher than for regions such as Latin America and Africa, as it has been in recent decades. The IGSM reference scenario shows show somewhat less growth for the non-OECD regions compared to the

3-6

MiniCAM and MERGE reference scenarios. These are just one set of possible growth prospects from each modeling group and are not intended to be expressions of what the groups view as desirable performance. Clearly, more rapid growth in developing countries, if gains spread to lower income groups within these regions, could be the basis for improving the outlook for people in these areas.

6 7

3.3. **Energy Use, Prices, and Technology**

8 9

10

11 12

13

14

15

In the reference scenarios, global primary energy consumption expands dramatically over the century, growing to between 3 and 4 times its 2000 level of roughly 400 EJ. This growth results from a combination of forces, including rising economic activity, increasing efficiency of energy use, and changes in energy consumption patterns. Growth in per capita energy consumption occurs despite a continuous decline in the energy intensity of economic activity. The improvement in energy intensity reflects, in part, assumptions of substantial technological change in all three reference scenarios.

16 17 18

19

20

21

22

23

24

25

Fossil fuels provided almost 90% of the energy supply in the year 2000 and remain the dominant energy source in all three reference scenarios throughout the twenty-first century despite a phasing out of conventional petroleum resources. In all three reference scenarios a range of fossil resources is available to supply the bulk of the world's increasing demand for energy. Differing among the scenarios, however, is the mix of fossil fuels. The IGSM reference scenario has relatively more oil, derived from shale; the MERGE scenario has relatively more coal with a substantial amount of the increase used to produce liquid fuels; and the MiniCAM scenario has relatively more natural gas.

26 27 28

29

30

31

In all three reference scenarios, non-fossil fuel energy use grows substantially, reaching levels in 2100 that are roughly ½ times to a little over total global energy consumption in 2000. The reference scenarios differ in terms of the mix of non-fossil resources. The substantial growth in non-fossil fuel energy use does not forestall substantial growth in fossil fuel consumption.

32 33 34

3.3.1. The Evolving Structure of Energy Use

35 36

37

38

39

40

41

42

43

44

45

46

Energy production is closely associated with emissions of GHGs, particularly CO₂, because of the dominant role of fossil fuels. Figure 3.3 shows global primary energy use over the century and its composition by fuel type in the three reference scenarios. Not surprisingly, given the assumptions about economic growth, all of the reference scenarios show substantial growth in primary energy use: from approximately 400 EJ/yr in the year 2000 to roughly between 1275 EJ/yr and 1500 EJ/yr by the end of this century. Combined with population growth, all three reference scenarios include a growing per capita use of energy for the world (Figure 3.4). The per capita growth for the world is very similar for MiniCAM and IGSM reference scenarios, with trends diverging somewhat late in the century. The MERGE reference scenario has relatively slower growth in per capita use early in the century, with accelerated growth later. On the other hand, per capita energy

use in the U.S. differs substantially among the reference scenarios. U.S. per capita energy use in MERGE and IGSM reference scenarios increases substantially, while it declines gradually over the century in the MiniCAM reference scenario.

1 2

Figure 3.3. Global and U.S. Primary Energy Consumption by Fuel across Reference Scenarios

Figure 3.4. Global and U.S. Primary Energy Consumption Per Capita across Reference Scenarios

The growth in total and per capita primary energy consumption arises despite substantial improvements in energy technology assumed in all three scenarios. Figure 3.5 displays the ratio of U.S. energy to GDP (energy intensity) computed for each of the three reference scenarios. The ratio declines throughout the century in all three. These patterns represent a continuation of changes in energy intensity that have occurred in recent decades in the U.S. In 2100, each dollar of real GDP can be produced with only 40% of the energy used in 2000 in the MERGE reference scenario, only 30% of the energy in the IGSM scenario, and only 25% in the MiniCAM scenario.

Figure 3.5. U.S. Primary Energy Intensity: Consumption per Dollar of GDP across Reference Scenarios

Globally and in the U.S., energy consumption over the century remains dominated by fossil fuels. In this sense, the three reference scenarios tell a consistent story about future global energy, and all three run counter to the view that the world is running out of fossil fuels. Although reserves and resources of conventional oil and gas are limited in all three reference scenarios, the same cannot be said of coal and unconventional liquids and gases. In all three reference scenarios, the world economy moves from current conventional fossil resources to increased exploitation of the extensive (if more costly) global resources of heavy oils, tar sands, and shale oil, and to synfuels derived from coal. The three scenarios exhibit a different mix of these sources. The IGSM reference scenario exhibits a relatively higher share of oil production (including unconventional oil); the MERGE reference scenario exhibits a relatively higher coal share; and the MiniCAM reference scenario exhibits a higher share for natural gas.

The relative contribution of oil to primary energy supply differs across the reference scenarios, but all three include a decline in the share of conventional oil. Thus, these scenarios represent three variations on a theme of energy transition precipitated by limited availability of conventional oil and continued expansion of final demands for liquid fuels, mainly for passenger and freight transport.

In the IGSM reference scenario, limits on the availability of conventional oil resources lead to the development of technologies to exploit unconventional oil, i.e., oil sands, heavy oils, and shale oil. These resources are large and impose no meaningful constraint on production during the twenty-first century. Thus, despite the fact that production costs are higher than for conventional oil, total oil production (conventional plus shale)

expands throughout the century, although oil as a primary energy source declines as a share of total energy with the passage of time.

The transition plays out differently in the MERGE reference scenario. Although it begins the same way (that is, the transition is initiated by limits on conventional oil resources), declining production of conventional oil leads to higher oil prices and makes alternative fuels, especially those derived from coal liquefaction, economically competitive. Thus, there is a transition away from conventional oil (and gas) and a corresponding expansion of coal production. The large difference between the MERGE and IGSM scenarios regarding primary oil thus reflects the role of coal liquefaction rather than a fundamentally different scenario of the need for liquid fuels.

The MiniCAM reference scenario depicts yet a third possible transition. Again, it begins with limited conventional oil resources leading to higher oil prices. Higher oil prices then lead to the development and deployment of technologies that access unconventional oil, such as oil sands, heavy oils, and shale oils. However, it also leads to expanded production of natural gas and to expanded production of coal to produce synthetic liquids (as in the MERGE scenario).

Figure 3.3 also reflects assumptions about the availability of low-cost alternatives to conventional fossil fuels. In all three scenarios, non-fossil supplies increase both their absolute and relative roles in providing energy to the global economy, with their share growing to roughly 20% to 30% of total supply by 2100. In the IGSM scenario, which shows the lowest consumption of non-fossil resources, the magnitude of total consumption of these resources in 2100 is 65% the size of the total global primary energy production in 2000, which is more than a 500% increase in the level of production of non-fossil energy. In the MERGE reference scenario, which has the highest contribution from non-fossil resources, total consumption from these sources in 2100 exceeds total primary energy consumption in 2000. Despite this growth, the continued availability of relatively low-cost fossil energy supplies, combined with continued improvements in the efficiency with which they are used, allows fossil energy forms to remain competitive throughout the century.

The three reference scenarios tell different stories about non-fossil energy (much of which is covered below in the discussion of electricity generation). The IGSM reference scenario assumes political limits on the expansion of nuclear power, so it grows only to about 50% above of the 2000 level by 2100. However, growing demands for energy and for liquid fuels in particular lead to the development and expansion of bioenergy, both absolutely and as percentage of total primary energy.

In contrast, the MERGE reference scenario assumes that a new generation of nuclear technology becomes available and that societies do not limit its market penetration, so the share of nuclear power in the economy grows with time. In addition, renewable energy forms, both commercial biomass and other forms such as wind and solar, expand production during the century.

The MiniCAM reference scenario also assumes the availability of a new generation of nuclear energy technology that is both cost competitive and unrestrained by public policy. Nuclear power, therefore, increases market share although not to the extent found in the MERGE reference scenario. Non-biomass renewable energy supplies become increasingly competitive as well. In the MiniCAM reference scenario, bioenergy production is predominantly recycled wastes, with a modest contribution from commercial biomass farming toward the end of the century.

The three reference scenarios for the U.S. are similar in character to the global ones, as also shown in Figure 3.3. The transition from inexpensive and abundant conventional oil to alternative sources of liquid fuels and electricity affects energy markets and patterns in the U.S. However, energy demands grow somewhat more slowly in the U.S. than in the world in general. As with the world total, the U.S. energy system remains dominated by fossil fuels in all three reference scenarios. The MERGE and IGSM reference scenarios have similar contributions from non-fossil energy, but the sources in the MERGE reference scenario are predominantly nuclear and other renewables, whereas it is biomass in the IGSM reference scenario. The MiniCAM reference scenario has the smallest overall contribution from non-fossil sources split relatively evenly between nuclear, biomass, and other renewables.

3.3.2. Trends in Fuel Prices

Historically, oil prices have been highly variable, with the volatility apparently often related to political events. Figure 3.6 plots oil prices from 1947 forward. Prices were in the \$15 to \$20 range (in the constant 2006 dollars shown in the figure) until the increases in the 1970s and early 1980s that resulted from disruptions in the Middle East. In inflation-adjusted terms, prices declined from peaks in the late 1970s to vary around the \$20 level in the latter half of the 1980s and 1990s. The period 2000 to 2005 has again seen rising prices of oil and other fossil energy sources, which suggests the possibility of a long-term trend toward rising prices. Depletion alone would suggest rising prices because of a combination of rents associated with a limited resource and the exhaustion of easily recoverable grades of oil. Global demand continues to grow, putting increasing pressure on supply. Improving technology that reduces the cost of recovering known deposits, facilitates discovery of new deposits, and makes recovery of previously unrecoverable deposits economical is opposing these forces toward higher prices.

Figure 3.6. Long-Term Historical Crude Oil Prices

The three models used for these scenarios employ time steps of 5 to 15 years (see Chapter 2) and, thus, are not set up to analyze short-term variability in prices. Their long-term trends are best interpreted as multi-year averages.

The three scenarios paint similar, but by no means identical, pictures of future energy prices. The price paths in the three reference scenarios reflect assumptions regarding both energy resources and energy technologies, and they shed light on these assumptions. For

example, the price of oil determines the marginal cost of bioenergy, which in turn is a reflection of the technology options assumed available for its production.

Figure 3.7 shows mine-mouth coal prices, electricity producer prices, natural gas producer prices for the U.S., and the world oil price. All four energy markets – oil, natural gas, coal, and electricity – are shaped by the supply of and demand for these commodities. These fuels also are interconnected because users can substitute one fuel for another, thus higher prices in one fuel market will tend to increase demand for and the price of other fuels. Oil markets are driven by the rising cost of conventional oil and the transition to more expensive unconventional sources to supply a growing demand for liquid fuels, mainly for transportation. Thus, the oil prices in the scenarios result from the interplay between increasing the demands for liquid fuels, the available technology, and the availability of liquids derived from these other sources.

Figure 3.7. Indices of Energy Prices across Reference Scenarios

Natural gas prices tell a similar story. Assumptions regarding the ultimately recoverable natural gas resource vary, as does the cost structure of the resource, leading to differences among the models. Like the demand for oil, the demand for natural gas grows, driven by increasing population and per capita incomes. As is the case for oil, the price of gas tends to be driven higher in the transition from inexpensive conventional resources to less easily accessible grades of the resource and to substitutes, such as gas derived from coal or biological sources. The different degrees and rates of price escalation reflect different technology assumptions in the three reference scenarios.

Coal prices do not rise as fast as oil and natural gas prices in any of the three reference scenarios. The reason is the abundance of the coal resource base. The different patterns of coal price movement with time in the three scenarios reflect differences in assumptions about the rate of resource depletion, its grade structure, and improvements in extraction technology.

The stability of electricity prices compared with oil and natural gas prices is a reflection of the variety of technologies and of fuels available to produce electricity, their improvement over time, and the fact that fuel is just one component of the cost of electricity. The details underlying this electric sector development are reported next.

3.3.3. Electricity Production and Technology

Electricity production steadily increases in both the U.S. and the world, although the scale and generation mix differ among the three scenarios (Figure 3.8). Here, production is reported in units of electrical output—not units of energy input—by generation type in the U.S. and the world. All the scenarios depict a continued role for coal. The IGSM reference scenario is dominated by coal, which accounts for more than half of all power production by the end of the twenty-first century. This characteristic of the IGSM reference scenario is consistent with its limited growth in nuclear power. In contrast, nuclear energy penetrates the market based on economic performance, and non-biomass

renewable energy gains market share in the MERGE reference scenario. Limited natural gas resources lead to a peak and decline in gas use in the first half of the century. In the MiniCAM reference scenario, coal supplies the largest share of power, but natural gas is relatively abundant and provides a significant portion as well, as do nuclear and non-biomass renewable energy forms.

Figure 3.8. Global and U. S. Electricity Production by Source across Reference Scenarios

3.3.4. Non-Electric Energy Use

An important consideration in scenarios of the future energy system is conversion losses as relatively lower-grade resources are converted to higher-grade fuels for use in final applications such as space conditioning, lighting, and to provide mechanical power. Figure 3.9 identifies the energy content of primary fuels for the U.S. in the year 2000 and where conversion losses occur. It shows the energy loss in the conversion from fuel to electricity to be 28.1 Quads (1 Quad is equal to 1.055 EJ) while the energy content of the electricity is 12.3 Quads. Other losses occur when fuels are used to create the mechanical power to, for example, propel vehicles or when efficiency of conversion to heat, light, or mechanical energy is less that 100%. The potential for reducing such losses is one reason why energy intensity of the economy can continue to improve.

Figure 3.9. U.S. Energy Flow Diagram and Non-Electrical Energy Use for the Year 2000

However, in the future other fuel transformation activities may become important and fundamentally change energy-flow patterns, as higher-grade resources are exhausted and lower-grade resources that require more conversion are used. As already discussed, the potential exists for coal and commercial biomass to be converted to liquids and gases—a technology thus far implemented only at a small scale. Furthermore, fuels and electricity may be transformed into hydrogen, creating fundamentally new branches of the system. Like electricity, these new branches will have conversion losses, and those losses can be important.

Figure 3.10 shows non-electric energy use in the reference scenario, and it is important to realize that these patterns of non-electric use also can imply significant conversion losses. This prospect plays a strong role in the MERGE reference scenario, in which coal and biomass goes into liquefaction and gasification plants. To a lesser extent, these conversions are also present in the MiniCAM and IGSM scenarios. In addition, in the MiniCAM reference scenario some nuclear and renewable energy appears in non-electricity uses to produce hydrogen; and the MERGE reference scenario also includes some generation of hydrogen from renewables sources. In the IGSM and MiniCAM reference scenarios, oil use is the largest single non-electric energy use, reflecting a continuing growth in demand for liquids by the transportation sectors. In the MERGE reference scenario, increasingly expensive conventional oil is supplanted by coal-based

liquids. This phenomenon also has implications for energy intensity in that improvements in end-use energy intensity can be offset, in part, by losses in converting primary fuels to end-use liquids or gases.

Figure 3.10 Global and U.S. Primary Energy Consumed In Non-Electric Applications across Reference Scenarios

3.4. Land Use and Land-Use Change

The three reference scenarios take different approaches to emissions from land use and land-use change. The MERGE reference scenario assumes that the biosphere makes no net contribution to the carbon cycle. In the IGSM and MiniCAM reference scenarios, the net contribution of the terrestrial biosphere is to remove carbon from the atmosphere, which results from the countervailing forces of land-use change emissions from deforestation and other human activities and the net uptake from unmanaged systems.

An important aspect of land use and land-use change in the scenarios from all three modeling groups is the production of bio-fuels for energy. Both IGSM and MiniCAM take account of the competition for scarce land resources. MERGE takes the availability of bio-fuels as an exogenous input based on extra-model analysis. Production of crops grown for bio-fuel use is displayed in Figure 3.11. The IGSM and MiniCAM scenarios use somewhat different definitions, which account for the difference in 2000. The numbers presented for the IGSM scenarios represent only the production of biomass energy beyond that now used and does not explicitly model traditional use of biomass or, for example, the own-use of wood wastes for energy in the forest products industry. The numbers from the MiniCAM scenarios explicitly account for some current uses of biomass energy, such as that used in the pulp and paper industry, and separately considers the future potential for bio-fuels derived from wastes and residue along with energy crops grown explicitly for their energy content.

Figure 3.11 Global and U.S. Production of Biomass Energy across Reference Scenarios

Apparent differences among the models need to be considered in light of this differential accounting. The MiniCAM reference scenario biomass production tends to be higher, especially in early years, because it is accounting waste and residue-derived bio-fuels explicitly. These waste and residue-derived bio-fuels account for all of the biomass production in the MiniCAM reference scenario in the early part of the century and the majority of all biomass production at the end of the century. The IGSM reference scenario exhibits a strongly growing production of bio-fuels beginning after the year 2020. Deployment in the IGSM reference scenario is driven primarily by a world oil price that in the year 2100 is over 4.5 times the price in the year 2000. In contrast, the MiniCAM reference scenario, with its lower long-term world oil price, includes insufficient incentive to create a substantial market for biomass crops in the reference

scenario. However, the MiniCAM reference scenario does include an increasing share of the potentially recoverable bio-waste as a source of energy.

Land use has implications for the carbon cycle as well. IGSM applies its component Terrestrial Ecosystem Model with a prescribed scenario of land use, and this land-use pattern is employed in all scenarios. Thus, in the IGSM scenarios commercial biomass production must compete with other agricultural activities for cultivated land, but the extent of cultivated land does not change from scenario to scenario. Because the land-use pattern is fixed in IGSM, changes in the net flux of carbon to the atmosphere reflect the behavior of the terrestrial ecosystem in response to changes in CO₂ and climatic effects that are considered within the IGSM's Earth system component. Taken together, these effects lead to the negative net emissions from the terrestrial ecosystem shown in Figure 3.12, which contrasts with the neutral biosphere assumed in the MERGE reference scenario.

Figure 3.12. Global Net Emissions of CO₂ from Terrestrial Systems Including Net Deforestation across Reference Scenarios

MiniCAM uses the terrestrial carbon cycle model of MAGICC (Wigley 1993) to determine the aggregate net carbon flux to the atmosphere. However, unlike either IGSM or MERGE, MiniCAM determines the level of terrestrial emissions as an output from an integrated agriculture-land-use module rather than as the product of a terrestrial model with fixed land use. Thus, the MiniCAM scenarios exhibits the same types of CO₂ fertilization effects as the IGSM scenarios, but it also represents interactions between the agriculture sector and the distribution of natural terrestrial carbon stocks.

3.5. Emissions, Concentrations, and Radiative Forcing

The growth in the global economy that is assumed in the reference scenarios and the changes in the composition of the global energy system lead to growing emissions of GHGs over the century. Emissions from fossil fuel burning and cement production more than triple from 2000 to 2100 in the reference scenarios. With growing emissions, GHG concentrations rise substantially over the twenty-first century, with CO₂ concentrations increasing to 2 ½ to over 3 times the preindustrial concentration. Increases in the concentrations of the non-CO₂ GHGs vary more widely across the reference scenarios. The increase in radiative forcing ranges from 6.4 Wm⁻² to 8.6 Wm⁻² from the year 2000 level with the non-CO₂ GHGs accounting for 20% to 25% of the instantaneous forcing in 2100.

Moderating the effect on the atmosphere of anthropogenic CO_2 emissions is the net uptake by the ocean and the terrestrial biosphere. As atmospheric CO_2 grows in the reference scenarios, the rate of net uptake by the ocean increases as well. Also, mainly through the effects of CO_2 fertilization, increasing atmospheric levels of CO_2 spur plant growth and net carbon uptake by the terrestrial biosphere. Differences among scenarios of these effects are, in part, a reflection of variation in their sub-models of the carbon cycle.

1 2

3.5.1. Greenhouse Gas Emissions

3.5.1.1. Calculating Greenhouse Gas Emissions

Emissions of CO₂ from fossil fuels are the sum of emissions from each of the different fuel types, and for each type, emissions are the product of a fuel-specific emissions coefficient and the total combustion of that fuel. Exceptions to this treatment occur if a fossil fuel is used in a non-energy application (e.g., as a feedstock for plastic) or if the carbon is captured and stored in isolation from the atmosphere. All three of the modeling groups assumed the availability of CCS technologies and treated the leakage from such storage as zero over the time period considered in this research, although they assumed that technologies for capturing carbon do not capture 100 percent of the CO₂. CCS incurs costs additional to the generation process with no attendant benefits absent actions to constrain carbon emissions, so they are not undertaken in the reference scenarios.

Although bioenergy such as wood, organic waste, and straw are hydrocarbons like the fossil fuels (only much younger), they are treated as if their use had no net carbon release to the atmosphere. Any fossil fuels used in their cultivation, processing, transport, and refining are accounted for. Nuclear and non-biomass renewables, such as wind, solar, and hydroelectric power, have no direct CO₂ emissions and are given a zero coefficient. Like bioenergy, emissions associated with the construction and operation of conversion facilities are accounted with the associated emitting source.

The calculation of net emissions from terrestrial ecosystems, including land-use change, is more complicated, and each model employs its own technique. IGSM employs the Terrestrial Ecosystem Model, which is a state-of-the-art terrestrial carbon-cycle model with a detailed, geographically disaggregated representation of terrestrial ecosystems and associated stocks and flows of carbon on the land. The IGSM scenarios, therefore, incorporates fluxes to the atmosphere as a dynamic response of managed and unmanaged terrestrial systems to the changes in the climate and atmospheric composition.

MiniCAM builds its net terrestrial carbon flux by summing both emissions from changes in the stocks of carbon from human-induced land-use change and the natural system response, represented in the reduced-form terrestrial carbon module of MAGICC. As noted above, MiniCAM employs a simpler reduced-form representation of terrestrial carbon reservoirs and fluxes; however, its scenario is fully integrated with its agriculture and land-use module, which in turn is directly linked to energy and economic activity in the energy portion of the model. As noted above, the MERGE modeling group assumed no net emissions from the terrestrial biosphere.

Differing approaches among the modeling groups are used to account for the non-CO₂ GHGs. They begin with a current inventory of these gases and link growth in emissions to relevant activity levels. Because emissions are associated with very narrow activities, in some cases below the sectoral resolution of the models, emissions growth may be

benchmarked to more detailed forecasts of activities. Details of these methods are included in the referenced papers that document these models.

3.5.1.2. Reference Scenarios of Fossil Fuel CO₂ Emissions

All three reference scenarios foresee a transition from conventional oil production to some other source of liquid fuels based primarily on other fossil sources, either unconventional liquids or coal. As a consequence, carbon-to-energy ratios cease their historic pattern of decline, as can be seen in Figure 3.13. While the particulars of the scenarios differ, no scenario shows a dramatic reduction in carbon intensity over this century.

Figure 3.13. Global and U.S. CO₂ Emissions from Fossil Fuel Consumption and Industrial Sources Relative to Primary Energy Consumption

Substantial increases in total energy use with no or little decline in carbon intensity lead to the substantial increases in CO₂ emissions per capita (Figure 3.14) and in global totals (Figure 3.15). Emissions of CO₂ from fossil fuel use and industrial processes increase from less than 7 GtC/yr in 2000 to between 22.5 and 24.0 GtC/yr by 2100. These emissions are higher than in earlier studies such as IS92a, where emissions were 20 GtC/yr (Leggett et al. 1992). Emissions from these reference scenarios are closer to those from the higher scenarios in the IPCC SRES (Nakicenovic and Swart 2000); particularly those included under the headings A1f and A2. U.S. emissions trajectories are more varied than the global trajectories. By 2100, U.S. emissions are between 2 GtC/yr and 5 GtC/yr.

Figure 3.14 World and U.S. CO₂ Emissions per Capita across Reference Scenarios

Figure 3.15 Global and U.S. Emissions of CO₂ from Fossil Fuels and Industrial Sources across Reference Scenarios

The three scenarios display a larger share of emissions growth outside of the Annex I nations (the developed nations of the OECD as well as Eastern Europe and the former Soviet Union¹) as shown in Figure 3.16. Annex I emissions are highest and non-Annex I emissions lowest in the IGSM reference. At least in part, this is because of two factors underlying the IGSM scenarios. First, the demand for liquids is satisfied by expanding production of unconventional oil, which has relatively high carbon emissions at the point of production. The U.S., with major resources of shale oil, switches from being an oil importer to an exporter but is responsible for CO₂ emissions associated with shale oil

_

¹ Annex I is defined in the U.N. Framework Convention on Climate Change (FCCC). However, since the FCCC entered into force, the Soviet Union has broken up. As a consequence, some of the republics of the former Soviet Union are now considered developing nations and do not have the same obligations as the Russian Federation under the FCCC. Thus, strictly speaking, the aggregations employed by the three modeling groups may not precisely align with the present partition of the world's nations. However, the quantitative implications of these differences are small.

production. Second, assumed rates of productivity growth in non-Annex I nations are lower in the IGSM scenario than in those of the other two models.

Figure 3.16. Global Emissions of Fossil Fuel and Industrial CO₂ by Annex I and Non-Annex I Countries across Reference Scenarios

In contrast, the MERGE reference scenario assumes that liquids come primarily from coal, a fuel that is more broadly distributed around the world than unconventional oils. The MERGE scenario also exhibits higher rates of labor productivity in the non-Annex I nations than the IGSM scenario. Finally, the MERGE scenario has a greater deployment of nuclear generation, leading to generally lower carbon-to-energy ratios. These three features combine to produce lower Annex I emissions and higher non-Annex I emissions than in the IGSM reference scenario. The MiniCAM reference scenario has Annex I emissions similar to those of the MERGE reference scenario, but higher non-Annex I fossil fuel and industrial CO₂ emissions.

The range of global fossil fuel and industrial CO₂ emissions across the three reference scenarios is relatively narrow compared with the uncertainty inherent in these developments over a century. While it is beyond the scope of this research to conduct a formal uncertainty or error analysis, both higher and lower emissions trajectories could be constructed.

There are at least two approaches to developing a sensible context in which to view these scenarios. One is to compare them with others produced by analysts who have taken on the same or a largely similar task. The literature on emissions scenarios is populated by hundreds of scenarios of future fossil fuel and industrial CO₂ emissions. Figure 3.17 gives some sense of what earlier efforts have produced, although they should be used with care. Many were developed at earlier times and may be significantly at variance with events as they have already unfolded. Also, no effort was undertaken in constructing the collection in the figure to weight scenarios for the quality of underlying analysis. Scenarios for which no underlying trajectories of population or GDP are available are mixed in with efforts that incorporate the combined wisdom of a large team of interdisciplinary researchers working over the course of years. Moreover, it is not clear that the observations are independent. The clustering of year 2100 fossil fuel and industrial CO₂ emissions around 20 PgC/yr (20 GtC/yr) in both the pre- and post-IPCC TAR time frames coincides closely with the IPCC IS92a scenario (Leggett et al. 1992). Many later scenarios were simply tuned to it, so are not independent assessments. For these reasons and others, looking to the open literature can provide some information, but caution in interpreting literature compilations is warranted.

Figure 3.17. Global Fossil Fuel and Industrial Carbon Emissions: Historical Development and Scenarios

Another approach to provide a context is systematic uncertainty analysis. There have now been several such analyses, including efforts by Nordhaus and Yohe (1983), Reilly et al. (1987), Manne and Richels (1994), Scott et al. (2000), and Webster et al. (2002). These

studies contain many valuable lessons and insights. For the purposes of this research, one useful product of these uncertainty studies is an impression of the position of any one scenario within the window of futures that might pass a test of plausibility. Also useful is the way that the distribution of outcomes is skewed upward—an expected outcome when one considers that many model inputs, and indeed emissions themselves, are constrained to be greater than zero. Naturally, these uncertainty calculations present their own problems as well (Webster 2003).

3.5.1.3. Future Scenarios of Anthropogenic CH₄ and N₂O Emissions

The range of emissions for CH₄ and N₂O is wider than for CO₂, as can be see in Figure 3.18. Base-year emissions in the MERGE and MiniCAM reference scenarios are similar for N₂O but diverge for CH₄. In the IGSM reference scenario, CH₄ emissions are higher in the year 2000 than in the other scenarios, reflecting an independent assessment of historical emissions and uncertainty in the scientific literature regarding even historic emissions. Note that the IGSM reference scenario has a correspondingly lower natural CH₄ source (from wetlands and termites) that is not shown in Figure 3.18, balancing the observed concentration change, rate of oxidation, and natural and anthropogenic sources.

Figure 3.18. Global CH₄ and N₂O Emissions across Reference Scenarios

Both the IGSM and MERGE reference scenarios exhibit steadily growing CH_4 emissions throughout the twenty-first century as a consequence of the growth of CH_4 -producing activities such as ruminant livestock herds, natural gas use, and landfills. Unlike CO_2 , for which the combustion of fossil fuels leads inevitably to emissions without capture and storage, slight changes in activities can substantially reduce emissions of the non- CO_2 gases (Reilly et al. 2003). The MiniCAM reference scenario assumes that despite the expansion of human activities traditionally associated with CH_4 production, emissions control technologies will be deployed in the reference scenario in response to local environmental controls. This leads the MiniCAM reference scenario to exhibit a peak and decline in CH_4 emissions in the reference scenario.

3.5.1.4. Future Scenarios of Anthropogenic F-Gas Emissions

A set of industrial products that act as GHGs are combined under the term, F-gases, which refers to a compound that is common to them, fluorine. Several are replacements for the CFCs that have been phased out under the Montreal Protocol. They are usefully divided into two groups: (1) a group of HFCs, most of which are short-lived, and (2) the long-lived PFCs and SF $_6$. Figure 3.19 presents the reference scenarios for these gases. The IGSM and MERGE reference scenarios exhibit strong growth in the short-lived species, while MiniCAM reference scenario exhibits about half as much growth over the century. Emissions of the long-lived gases are very similar among the reference scenarios. PFCs are used in semiconductor production and are emitted as a byproduct of aluminum smelting; they can be avoided relatively cheaply. Emissions from the main use of SF $_6$ in electric switchgear can easily be abated by recycling to minimize

venting to the atmosphere. Many of the abatement activities have already been undertaken, and the modeling groups assumed they will continue to be used.

Figure 3.19 Global Emissions of Short-Lived and Long-Lived F-Gases across Reference Scenarios

3.5.2. The Carbon Cycle: Net Ocean and Terrestrial CO₂ Uptake

 The stock of carbon in the atmosphere at any time is determined from an initial concentration of CO_2 to which is added anthropogenic emissions from fossil fuel and industrial sources and from which is subtracted net CO_2 transfer from the atmosphere to the ocean and terrestrial systems. Each of the three participating models represents these processes differently.

The three reference scenarios display strong increases in ocean uptake of CO₂, shown in Figure 3.20, reflecting model mechanisms that become increasingly active as CO₂ accumulates in the atmosphere. The IGSM reference scenario has the least active ocean, which results from its three-dimensional ocean representation that shows less uptake, in part, as a result of rising water temperatures and CO₂ levels in the surface layer and, in part, as a result of a slowing of mixing into the deep ocean. The MERGE reference scenario has the most active ocean, and uptake rates continue to increase over the century. As will be discussed in Chapter 4, the three ocean models produce more similar behavior in the stabilization scenarios; for example, the MERGE and MiniCAM Level 1 and Level 2 scenarios have almost identical ocean uptake.

Figure 3.20. CO₂ Uptake from Oceans across Reference Scenarios

As discussed above, the net transfer of CO₂ from the atmosphere to terrestrial systems includes many processes, such as deforestation (which transfers carbon from the land to the atmosphere), uptake from forest regrowth, and the net effects of atmospheric CO₂ and climate conditions on vegetation. As noted earlier, MERGE employs a neutral biosphere: by assumption, its net uptake is zero with processes that store carbon assumed to just offset those that release it. Taken together with its more active ocean system in the reference scenario, the behavior of the carbon cycle in total is similar to the other two models, especially MiniCAM. IGSM and MiniCAM employ active terrestrial biospheres, which on balance remove carbon from the atmosphere, as shown in Figure 3.12. Both the MiniCAM and the IGSM reference scenarios display the net effects of deforestation, which declines in the second half of the century, combined with terrestrial processes that accumulate carbon in existing terrestrial reservoirs. The IGSM reference scenario also includes feedback effects of changing climate.

3.5.3. Greenhouse Gas Concentrations

Radiative forcing is related to the concentrations of GHGs in the atmosphere. The relationship between emissions and concentrations of GHGs is discussed in Box 3.2. The concentration of gases that reside in the atmosphere for long periods of time – decades to

millennia – is more closely related to cumulative emissions than to annual emissions. In particular, this is true for CO₂, the gas responsible for the largest contribution to radiative forcing. This relationship can be seen for CO₂ in Figure 3.21, where cumulative emissions over the period 2000 to 2100, from the three reference scenarios and the twelve stabilization scenarios, are plotted against the CO₂ concentration in the year 2100. The plots for all three models lie on essentially the same line, indicating that despite considerable differences in representation of the processes that govern CO₂ uptake, the aggregate response to increased emissions is very similar. This basic linear relationship also holds for other long-lived gases, such as N₂O, SF₆, and the long-lived F-gases.

Figure 3.21. Relationship between Cumulative CO₂ Emissions from Fossil Fuel Combustion and Industrial Sources, 2000-2100, and Atmospheric Concentrations across All Scenarios

GHG concentrations rise in all three reference scenarios. As shown in Figure 3.22, CO₂ concentrations increase from 370 ppmv in year 2000 to somewhere in the range of 700 to 875 ppmv in 2100. The preindustrial concentration of CO₂ was approximately 280 ppmv. While all three reference scenarios display the same increasing pattern, by the year 2100 there is a difference of approximately 175 ppmv among the three scenarios. This difference has implications for radiative forcing and emissions mitigation (discussed in Chapter 4).

Figure 3.22. Atmospheric Concentrations of CO₂, CH₄, N₂O, and F-gases across the Reference Scenarios

 Increases in the concentrations of the non-CO₂ GHGs vary across the reference scenarios. The concentrations of CH₄ and N₂O in the MiniCAM reference scenario are on the low end of the range, reflecting assumptions discussed above about use of CH₄ for energy. The IGSM reference scenario has the highest concentration levels for all of the substances. The differences mainly reflect differences in anthropogenic emissions, but they also are influenced by the way each model treats natural emissions and sinks for the gases. The IGSM scenarios includes climate and atmospheric feedbacks to natural systems, which tend to result in an increase in natural emissions of CH₄ and N₂O. Also, increases in other pollutants generally lengthen the lifetime of CH₄ in the IGSM scenarios because the other pollutants deplete the atmosphere of the hydroxyl radical (OH), which is the removal mechanism for CH₄. These feedbacks tend to amplify the difference in anthropogenic emissions among the reference scenarios. The concentrations of the short-lived and long-lived F-gases are also presented in Figure 3.22.

3.5.4. Radiative Forcing from Greenhouse Gases

Contributions to radiative forcing are a combination of the abundance of the gas in the atmosphere and its heat-trapping potential (radiative efficiency). Of the directly released anthropogenic gases, CO_2 is the most abundant, measured in parts per million; the others are measured in parts per billion. However, the other GHGs are about 24 times (CH₄), to 200 times (N₂O), to thousands of times (SF₆ and PFCs) more radiatively efficient than

CO₂. Thus, what they lack in abundance they make up for, in part, with radiative efficiency. However, among these substances, CO₂ is still the main contributor to increased radiative forcing from preindustrial times and all three reference scenarios exhibit an increasing relative contribution from CO₂.

The three models display essentially the same relationship between GHG concentrations and radiative forcing, so the three reference scenarios also all exhibit higher radiative forcing, growing from roughly 2.2 Wm⁻² above preindustrial in 2000 to between 6.4 Wm⁻² and 8.6 Wm⁻² in 2100. The differences among radiative forcing in 2100 imply differences in the amount of emissions reductions required to stabilize as the four radiative forcing levels in this research. The emissions reductions required for stabilization in the IGSM stabilization scenarios are substantially larger than those required in the MiniCAM stabilization scenarios, because the radiative forcing reaches 8.6 Wm⁻² in 2100 in the IGSM reference scenario and 6.4 Wm⁻² in the MiniCAM reference scenario.

All three reference scenarios show that the relative contribution of CO₂ will increase in the future, as shown in Figure 3.23. From preindustrial times to the present, the non-CO₂ gases examined in this research contribute slightly above 30% of the estimated forcing. In the IGSM reference scenario, the contribution of the non-CO₂ gases falls slightly to about 26% by 2100. The MiniCAM reference scenario includes little additional increase in forcing for non-CO₂ gases, largely as a result of assumptions regarding the control of CH₄ emissions for non-climate reasons, and thus has their share falling to about 18% by 2100. The MERGE reference scenario is intermediate, with the non-CO₂ contribution falling to about 24%.

Figure 3.23. Radiative Forcing by Gas across Reference Scenarios

 From the discussion above, it can be seen that the three reference scenarios contain many large-scale similarities. All have expanding global energy systems, all remain dominated by fossil fuel use throughout the twenty-first century, all generate increasing concentrations of GHGs, and all produce substantial increases in radiative forcing. Yet the reference scenarios differ in many details, ranging from demographics to labor productivity growth rates to the composition of energy supply to treatment of the carbon cycle. These scenario differences shed light on important points of uncertainty that arise for the future. In Chapter 4, they will also be seen to have important implications for the technological response to limits on radiative forcing.

3.6. References

- 42 CEA Council of Economic Advisors. 2005. *Economic Report of the President*, U.S. Government Printing Office, Washington, D.C.
- Leggett J, WJ Pepper, RJ Swart, J Edmonds, LG Meira Filho, I Mintzer, MX Wang, and
- J Wasson. 1992. Emissions Scenarios for the IPCC: An Update. In *Climate Change 1992*:

- 1 The Supplementary Report to the IPCC Scientific Assessment, University Press,
- 2 Cambridge, U.K.
- 3 Maddison A. 2001. The World Economy: A Millennial Perspective, Organization for
- 4 Economic Cooperation and Development, Paris, France.
- 5 Manne AS and R Richels. 1994. The Costs of Stabilizing Global CO₂ Emissions: A
- 6 Probabilistic Analysis Based on Expert Judgements. *The Energy Journal*. 15(1):31-56.

7

- 8 Morita T and H-C Lee. 1998. IPCC SRES Database, Version 0.1, Emission Scenario
- 9 Database Prepared for IPCC Special Report on Emission Scenarios. Accessed at
- 10 http://www.cger.nies.go.jp/cger.e/db/ipcc.html.
- Nakicenovic N, P Kolp, R Keywan, M Kainuma, and T Hanaoka. In Press. Assessment of
- 12 Emissions Scenarios Revisited. Journal of Environmental Economics and Policy Studies
- Nakicenovic N, N Victor, and T Morita. 1998. Emissions Scenarios Database and Review
- of Scenarios. *Mitigation and Adaptation Strategies for Global Change* 3(2–4):95–120.
- 15 Nakicenovic N and R Swart (eds.) 2000. Special Report on Emissions Scenarios.
- 16 Cambridge University Press, Cambridge, U.K.

17

- Nordhaus WD and GW Yohe. 1983. Future Carbon Dioxide Emissions from Fossil Fuels.
- 19 In Changing Climate, 87-153. National Academy Press, Washington, D.C.

20

- 21 O'Neill BC. 2005. Population Scenarios Based on Probabilistic Projections: An
- 22 Application for the Millennium Ecosystem Assessment. Population and Environment
- 23 26(3):229-254.

- 25 Parson EA, et al. 2006. Global Change Scenarios: Their Development and Use. Climate
- 26 Change Science Program Product 2.1B.
- 27 Reilly JM, JA Edmonds, RH Gardner, and AL Brenkert. 1987. Uncertainty Analysis of
- the AEA/ORAU CO₂ Emissions Model. *The Energy Journal* 8(3):1-29.
- 29 Reilly JM, HD Jacoby, and RG Prinn. 2003. Multi-Gas Contributors to Global Climate
- 30 Change: Climate Impacts and Mitigation Costs of Non-CO₂ Gases. Pew Center on
- 31 Global Climate Change, Washington, D.C.
- 32 Scott MJ, RD Sands, JA Edmonds, AM Liebetrau, and DW Engel. 2000. Uncertainty in
- 33 Integrated Assessment Models: Modeling with MiniCAM 1.0. Energy Policy 27(14):855-
- 34 879.
- 35 UN United Nations. 2000. Long-Run World Population Projections: Based on the 1998
- 36 Revision. United Nations, New York.
- 37 UN United Nations. 2001. World Population Prospects: The 2000 Revision, Data in
- 38 digital form. Population Division, Department of Economic and Social Affairs.
- 39 UN United Nations. 2005. World Population Prospects: The 2004 Revision, Data in
- 40 digital form. Population Division, Department of Economic and Social Affairs.

- 1 Webster MD, M Babiker, M Mayer, JM Reilly, J Harnisch, R Hyman, MC Sarofim, and
- 2 C Wang. 2002. Uncertainty in Emissions Projections For Climate Models. Atmospheric
- 3 Environment 36(22):3659-3670.
- 4 Webster M. 2003. Communicating Climate Change Uncertainty to Policy-Makers and the
- 5 Public. Climatic Change 61:1-8.
- 6 Wigley TML. 1993. Balancing the Carbon Budget Implications for Projections of
- 7 Future Carbon-Dioxide Concentration Changes. Tellus Series B-Chemical and Physical
- 8 *Meteorology* 45(5):409-425.

Table 3.1. Population (million) by Region across Models, 2000-2100. Regional aggregations are different in the three models. For example, MiniCAM includes Turkey in Western Europe, but IGSM and MERGE do not.

IGSM Population by Region (million)

Region	2000	2020	2040	2060	2080	2100
U.S.	283	334	379	396	395	393
Western Europe	390	388	368	331	302	289
Japan	127	126	116	113	118	119
Former Soviet Union	291	278	260	243	234	230
Eastern Europe	97	91	83	74	67	64
China	1282	1454	1500	1429	1365	1334
India	1009	1291	1503	1610	1635	1643
Africa	793	1230	1749	2163	2390	2500
Latin America	419	538	627	678	701	713
Rest of the World	1366	1848	2269	2521	2614	2652

MERGE Population by Region (millions)

Region	2000	2020	2040	2060	2080	2100
U.S.	276	335	335	335	335	335
Western Europe	390	397	397	397	397	397
Japan	127	126	126	126	126	126
Eastern Europe	411	393	393	393	393	393
Former Soviet Union	411	393	393	393	393	393
China	1275	1429	1478	1493	1498	1499
India	1017	1312	1427	1472	1489	1496
Africa						
Latin America	2566	3538	4209	4677	5003	5228
Rest of World						

MiniCAM Population by Region (millions)

Region	2000	2020	2040	2060	2080	2100
U.S.	283	334	371	396	412	426
Western Europe	457	486	481	456	421	399
Japan	127	127	121	113	103	95
Eastern Europe	124	119	111	100	87	80
Former Soviet Union	283	284	283	275	261	253
China	1385	1578	1591	1506	1407	1293
India	1010	1312	1472	1513	1443	1300
Africa	802	1197	1521	1763	1893	1881
Latin America	525	670	786	869	929	952
Rest of World	1055	1454	1779	1976	2012	1918

3-24

Table 3.2. Reference GDP for Key Regions, 2000-2100. This table reports GDP for all regions of the globe, but accounts for inconsistency in regional aggregations across models. Note that while regions are generally comparable, slight differences exist in regional coverage, particularly in aggregate regions. Differences for the base year, 2000, arise from these differences as do differences in regional deflators and regional exchange rates. (Note: IGSM is in \$1997 and 1997 exchange rates; MERGE uses \$1997 and 1997 exchange rates restated to \$2000 by the ratio of U.S. GDP for 2000 in \$1997 and \$2000; MiniCAM is in \$2000 and 2000 exchange rates.)

IGSM GDP by Region (trillions of \$1997, MER)

	2000	2020	2040	2060	2080	2100
U.S.	9.1	16.9	29.3	44.4	59.8	76.4
Western Europe	9.2	15.8	27.0	41.5	57.2	74.2
Japan	4.4	7.5	13.8	21.8	30.0	38.6
Former Soviet Union	0.6	1.4	2.9	4.8	7.2	10.2
Eastern Europe	0.3	0.6	1.2	2.1	3.3	4.9
China	1.2	3.3	6.9	12.8	19.9	28.9
India	0.5	1.1	2.0	3.3	5.2	8.0
Africa	0.6	1.3	2.0	3.3	5.0	7.4
Latin America	1.6	3.0	6.3	11.5	18.0	25.9
Rest of the World	4.4	8.6	14.9	23.9	35.3	49.9

MERGE GDP by Region (trillions of \$2000, MER)

Region	2000	2020	2040	2060	2080	2100
U.S.	9.8	16.1	20.9	26.8	33.1	39.6
Western Europe	9.8	14.4	19.9	26.9	35.0	43.6
Japan	4.6	6.0	7.7	9.6	11.7	13.9
Eastern Europe	1.0	1.9	3.6	6.6	11.9	20.4
Former Soviet Union	1.0	1.9	5.0	0.0	11.9	20.4
China	1.2	3.1	7.4	17.3	38.5	78.6
India	0.5	1.5	3.6	8.3	18.5	39.2
Africa						
Latin America	6.5	14.6	27.5	49.3	85.1	141.9
Rest of World						

MiniCAM GDP by Region (trillions of \$2000, MER)


	2000	2020	2040	2060	2080	2100
U.S.	9.8	15.1	21.1	28.8	38.9	52.6
Western Europe	8.6	11.1	13.3	16.1	19.4	23.7
Japan	4.7	5.9	7.1	8.6	10.2	12.0
Former Soviet Union	0.4	0.8	1.4	2.3	3.6	5.7
Eastern Europe	0.4	0.7	1.4	2.4	4.0	6.6
China	1.2	4.8	11.6	20.8	34.1	49.3
India	0.5	1.6	4.8	10.7	19.5	32.0
Africa	0.6	1.2	2.1	3.9	7.7	13.8
Latin America	2.0	3.3	5.0	8.8	16.1	26.9
Rest of the World	3.2	6.3	12.5	22.6	37.4	56.6

3-25

Table 3.3. Historical Annual Average per Capita GDP Growth Rates.

	1500-	1820-	1870-	1913-	1950-	1973-		
	1820	1870	1913	1950	1973	2001		
Niamila Amazziaa								
North America	0.34	1.41	1.81	1.56	2.45	1.84		
Western Europe	0.14	0.98	1.33	0.76	4.05	1.88		
Japan	0.09	0.19	1.48	0.88	8.06	2.14		
Eastern Europe	0.10	0.63	1.39	0.60	3.81	0.68		
Former U.S.SR	0.10	0.63	1.06	1.76	3.35	-0.96		
Africa	0.00	0.35	0.57	0.92	2.00	0.19		
Latin America	0.16	-0.03	1.82	1.43	2.58	0.91		
China	0.00	-0.25	0.10	-0.62	2.86	5.32		
India	-0.01	0.00	0.54	-0.22	1.40	3.01		
Other Asia	0.01	0.19	0.74	0.13	3.51	2.42		
World	0.05	0.54	1.30	0.88	2.92	1.41		
Source: Maddison 2001								

Figure 3.1. World and U.S. Population Across Reference Scenarios. Assumed growth in global and U.S. population is similar among the three models. Global population in 2100 spans a range from about 8.5 to 10 billion. U.S. population in 2100 spans a range from about 350 to 425 million.






Figure 3.2. U.S. Economic Growth Across Reference Scenarios. U.S. economic growth is driven, in part, by labor force growth and, in part, by assumptions about productivity growth of labor and other factors such as by savings and investment. Annual average growth rates are 1.4% for the MERGE reference scenario, 1.7% for the MiniCAM reference scenario, and 2.2% for the IGSM reference scenario. By comparison, U.S. real GDP grew at an annual average rate of 3.4% from 1959-2004 (CEA 2005).




Figure 3.3. Global and U.S. Primary Energy Consumption by Fuel Across Reference Scenarios (EJ/yr). Global total primary energy use grows between 3 and 4 times over the century in the reference scenarios, while U.S. primary energy use grows over 1 to 2 times. Fossil fuels remain a major energy source, despite substantial increases in the consumption of nonfossil energy sources. Note that oil includes that derived from tar sands and shale, and coal use includes that used to produce synthetic liquid and gaseous fuels.

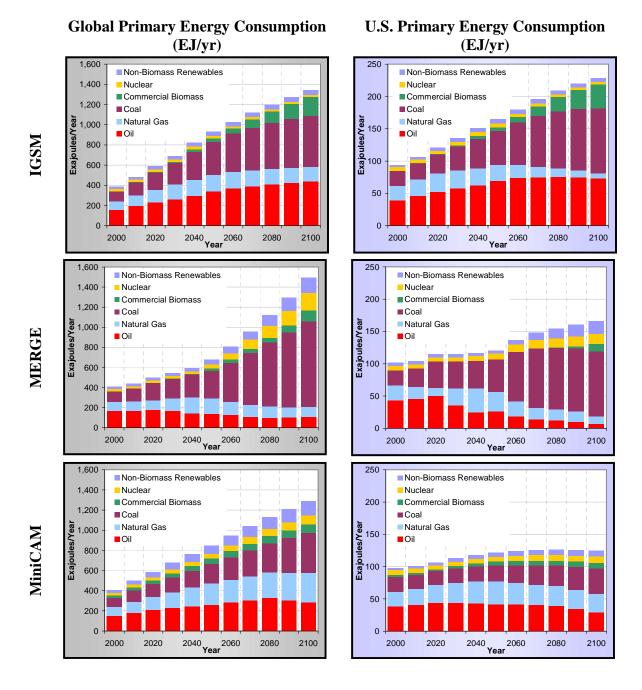



Figure 3.4. Global and U.S. Primary Energy Consumption per Capita Across Reference Scenarios (GJ per capita). All three reference scenarios include growing per capita use of energy worldwide. However, even after 100 years of growth, global per capita energy use is about ½ of the current U.S. level.






Figure 3.5. U.S. Primary Energy Intensity: Consumption per Dollar of GDP Across Reference Scenarios (Index, yr 2000 Ratio = 1.0). U.S. total primary energy intensity—energy consumption per dollar of GDP—continues to decline in the reference scenarios. In recent decades, the rate of decline has been about 14% per decade. U.S. primary energy intensity declines about 12% per decade in the IGSM reference scenario, about 13% per decade in the MiniCAM reference scenario, and about 9% per decade in the MERGE reference scenario.




Figure 3.6. Long-Term Historical Crude Oil Prices. Crude oil prices have historically been highly variable, but over the period 1947-2004 there appeared to be a slight upward trend. (Figure courtesy of James Williams, WTRG Economics)


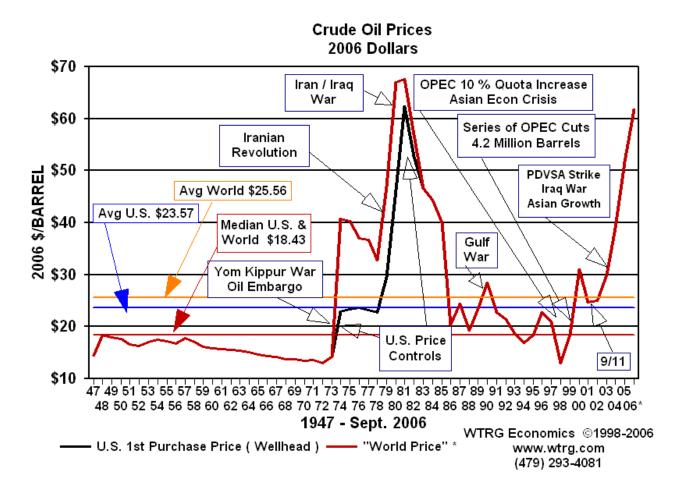


Figure 3.7. Indices of Energy Prices Across Reference Scenarios (Indexed to 2000 = 1). Energy prices through 2100, indexed so that 2000=1.0, cover a wide range among the models, but generally show a rising trend relative to recent decadal averages. Prices in the MERGE reference scenario are intermediate; by 2100 the crude oil price is about that observed in 2005 (3 times the 2000 level). The MiniCAM reference scenario has the lowest prices, with crude oil price about twice 2000 levels in 2100, somewhat below the level reached in 2005. The IGSM reference scenario has the highest prices, which for crude oil would be about 50% to 60% higher in 2100 than the price level of 2005.

IGSM



MERGE

Energy Prices: Reference Scenario 5.0 ▲ Minemouth Coal Price Electricity Producer Price 40 Natural Gas Producer Price -World Oil Price Index 2000=1 2.0 0.0 2000 2020 2040 2060 2080 2100 Year

MiniCAM




Figure 3.8. Global and U.S. Electricity Production by Source Across Reference Scenarios (**EJ/yr of electricity**). Global and U.S. electricity production show continued reliance on coal, especially in the IGSM scenario, which assumes that nuclear expansion is limited by safety, waste, and proliferation concerns. The MERGE and MiniCAM reference scenarios are based on the assumption that nuclear energy is unconstrained by non-climate concerns, so these scenarios exhibit greater expansion. They also include greater contributions from renewable energy sources and somewhat greater use of electricity overall compared with IGSM reference scenario. Differences in the contributions of different fuels at the global level among models are similar for the U.S. Total U.S. electricity use is similar in MERGE and IGSM reference scenarios, and somewhat lower in MiniCAM reference scenario.

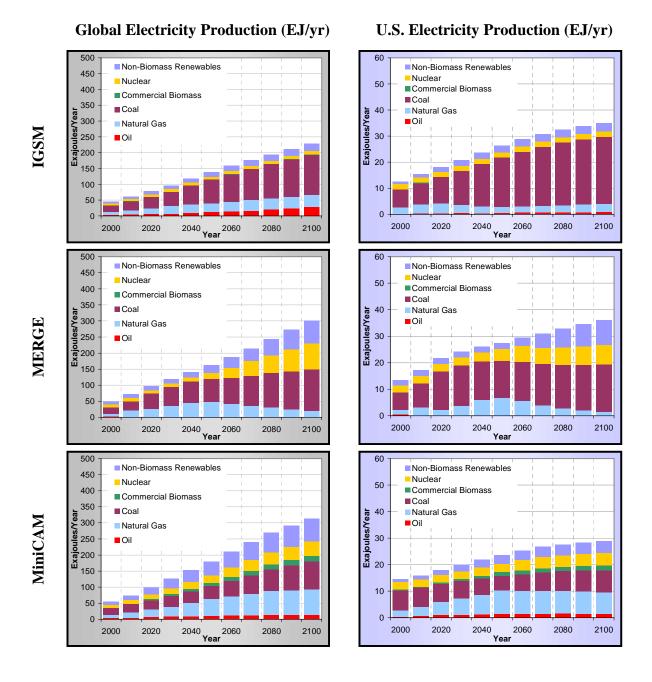


Figure 3.9. U.S. Energy Flow Diagram and Non-Electrical Energy Use for the Year 2000.

Primary energy is transformed into different energy carriers that can easily be used for specific applications (e.g., space conditioning, light, and mechanical energy), but in the process losses occur. Of the 98.5 quads of primary energy used in the U.S. in the year 2000, only an estimated 34.3 quads were actually useful. Each of the models used in this research represents such conversion processes. Assumptions about efficiency improvements in conversion and end use are one of the reasons why energy intensity per dollar of GDP falls in the reference scenarios.

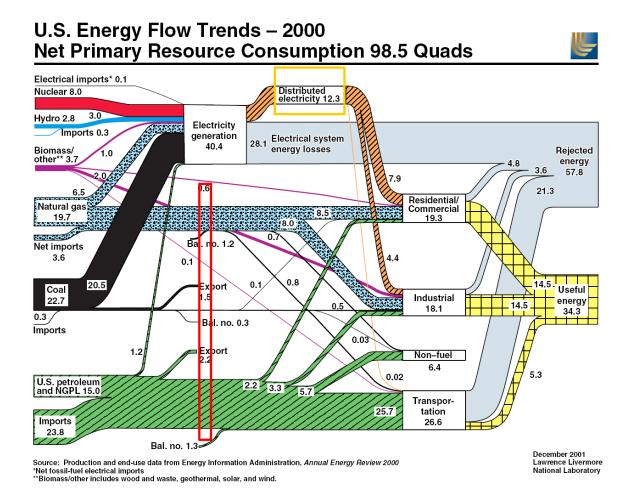


Figure 3.10. Global and U.S. Primary Energy Consumed in Non-Electric Applications Across Reference Scenarios (EJ/yr). Non-electric energy use also remains heavily dependent on fossil fuels with some penetration of biomass energy. Primary energy is reported here, and the resurgence of coal in the reference scenarios is due to its use to produce synthetic liquids or gas.


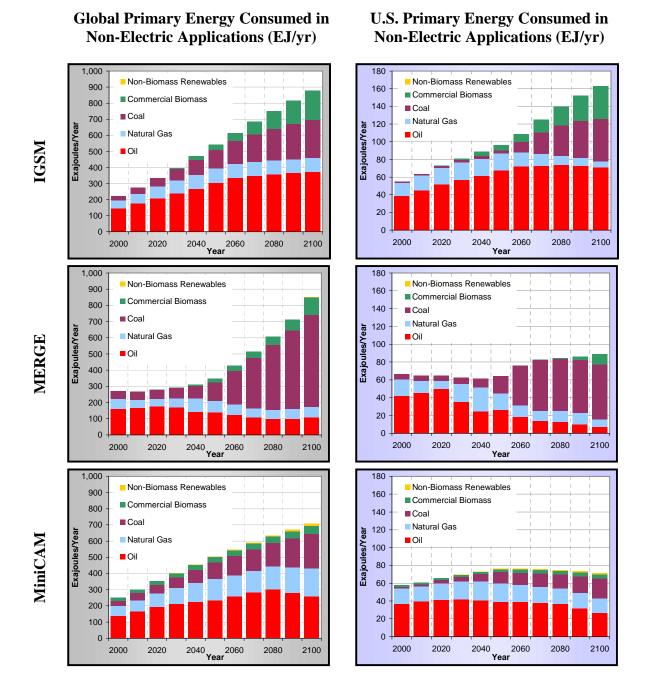


Figure 3.11. Global and U.S. Production of Biomass Energy Across Reference Scenarios (EJ/yr). The MiniCAM scenarios include waste-derived biomass fuels as well as commercial biomass and, thus, show significant use in 2000. The IGSM and MERGE scenarios include only commercial biomass energy beyond that already used. Globally, the IGSM and MERGE reference scenarios include biomass production than does the MiniCAM reference scenario toward the end of the century.





U.S. Biomass Production




Figure 3.12. Global Net Emissions of CO₂ from Terrestrial Systems Including Net Deforestation Across Reference Scenarios (GtC/yr). Global net emissions of CO₂ from terrestrial systems, including net deforestation, show that MiniCAM and IGSM have a slight net sink in 2000 that grows over time mainly because of reduced deforestation and CO₂ fertilization of plants. MERGE assumes a neutral terrestrial system.





Figure 3.13. Global and U.S CO₂ Emissions from Fossil Fuel Combustion and Industrial Sources Relative to Primary Energy Consumption (GtC/EJ). CO₂ intensity of energy use shows relatively little change in all three reference scenarios, reflecting the fact that fossil fuels remain important sources of energy. Potential reductions in the CO₂ intensity of energy from more carbon-free or low-carbon energy sources is offset by a move to more carbon-intensive shale oil or synthetics from coal.

Global CO₂ Emissions per Primary Energy



U.S. CO₂ Emissions per Primary Energy





Figure 3.14. World and U.S. CO_2 Emissions per Capita Across Reference Scenarios (metric tonnes per capita). Per capita fossil fuel and industrial CO_2 emissions for the world grow in all three reference scenarios. However even after 100 years of growth, global per capita CO_2 emissions are slightly less than ½ of the 2000 U.S. level in the three scenarios.










Figure 3.15. Global Emissions of CO₂ from Fossil Fuels and Industrial Sources (CO₂ from land-use change excluded) Across Reference Scenarios (GtC/yr). Global emissions of CO₂ from fossil fuel combustion and other industrial sources, mainly cement production, grow throughout the century in all three reference scenarios. By 2100, global emissions are between 22.5 GtC/yr and 24.0 GtC/yr. U.S. emissions are more varied across the Reference Scenarios. By 2100, U.S. emissions are between 2 GtC/yr and 5 GtC/yr. Note that CO₂ from land-use change is excluded from this figure.






Figure 3.16. Global Emissions of Fossil Fuel and Industrial CO₂ by Annex I and Non-Annex I Countries Across Reference Scenarios (GtC/yr). Emissions of fossil fuel and industrial CO₂ in the reference scenarios show non-Annex I emissions exceeding Annex I emissions for all three reference scenarios by 2030 or earlier. The MERGE and MiniCAM reference scenarios exhibit continued relative rapid growth in emissions in non-Annex I regions after that, so that emissions are on the order of twice the level of Annex I by 2100. The IGSM reference scenario does not show continued divergence, due in part to assumptions of relatively slower economic growth in non-Annex I regions and faster growth in Annex I than the scenarios from the other modeling groups. The IGSM reference scenario also shows increased emissions in Annex I as those nations become producers and exporters of shale oil, tar sands, and synthetic fuels from coal.









Figure 3.17. Global Fossil Fuel and Industrial Carbon Emissions: Historical Development and Scenarios (GtC/yr). The 284 non-intervention scenarios published before 2001 are included in the figure as the gray-shaded range. The thin lines are an additional 55 non-intervention scenarios published since 2001. Two vertical bars on the right-hand side indicate the ranges for scenarios since 2001 (post-TAR non-intervention) and for those published up to 2001 (TAR plus pre-TAR non-intervention). Sources: Nakicenovic et al. 1998, Morita and Lee 1998, http://www-cger.nies.go.jp/cger-e/db/enterprise/scenario/scenario_index_e.html, and http://iiasa.ac.at/Research/TNT/WEB/scenario_database.html.

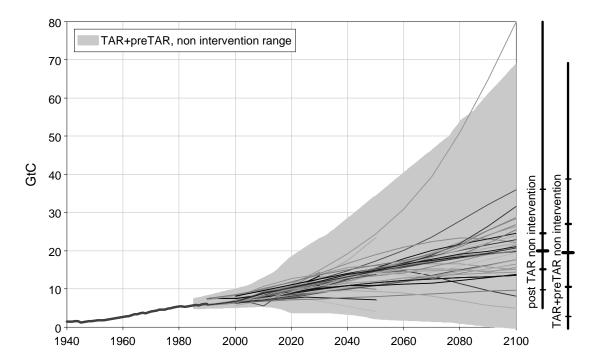

Source: Nakicenovic et al. (2006).

Figure 3.18. Global CH₄ and N₂O Emissions Across Reference Scenarios (Mtonnes/yr).

Global anthropogenic emissions of CH_4 and N_2O vary widely among the reference scenarios. There is uncertainty in year 2000 CH_4 emissions, with the IGSM reference scenario ascribing more of the emissions to human activity and less to natural sources. Differences in the scenarios reflect, to a large extent, different assumptions used by the modeling groups about whether current emissions rates will be reduced significantly for other reasons, for example, whether higher natural gas prices will stimulate capture of CH_4 for use as a fuel.

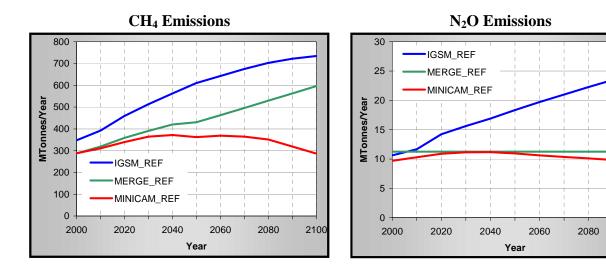



Figure 3.19. Global Emissions of Short-Lived and Long-Lived F-Gases (ktonnes/yr). Global Emissions of high HFCs and others (PFCs and SF₆ aggregated).






Figure 3.20. CO₂ Uptake from Oceans Across Reference Scenarios (GtC/yr, expressed in terms of net emissions). The IGSM reference scenario, which is based on the IGSM's three-dimensional ocean model, exhibits less CO₂ uptake than the other two reference scenarios and, after some point, little additional increase in uptake even though concentrations are rising. The MiniCAM reference scenario exhibits some slowing of ocean uptake, although not as pronounced as in the MERGE reference scenario. There is no slowing of uptake in the MERGE reference scenario. Although the MERGE reference scenario has higher ocean uptake in the latter half of the century, the effects of this increase are offset by the assumption of a neutral biosphere. Hence the aggregate behavior of its carbon cycle tends to be more similar to that in the other two reference scenarios, especially the MiniCAM reference scenario (Figure 3.22). The three ocean models produce more similar behavior in the stabilization scenarios.




Figure 3.21. Relationship Between Cumulative CO₂ Emissions from Fossil Fuel Combustion and Industrial Sources, 2000-2100, and Atmospheric Concentration of CO₂ Across All Scenarios. Despite differences in how the carbon cycle is handled in each of the three models, the scenarios exhibit a very similar response in terms of concentration level for a given level of cumulative emissions. (Note that the cumulative emissions do not include emissions from land use and land-use change.)




Figure 3.22. Atmospheric Concentrations of CO₂, CH₄, N₂O, and F-gases Across the **Reference Scenarios** (units vary). Differences in concentrations for CO₂, CH₄, and N₂O across the reference scenarios reflect differences in emissions and treatment of removal processes. By 2100, CO₂ concentrations range from about 700 ppmv to 900 ppmv, CH₄ concentrations range from 2000 ppbv to 4000 ppbv, and N₂O concentrations range from about 380 ppbv to 500 ppbv.


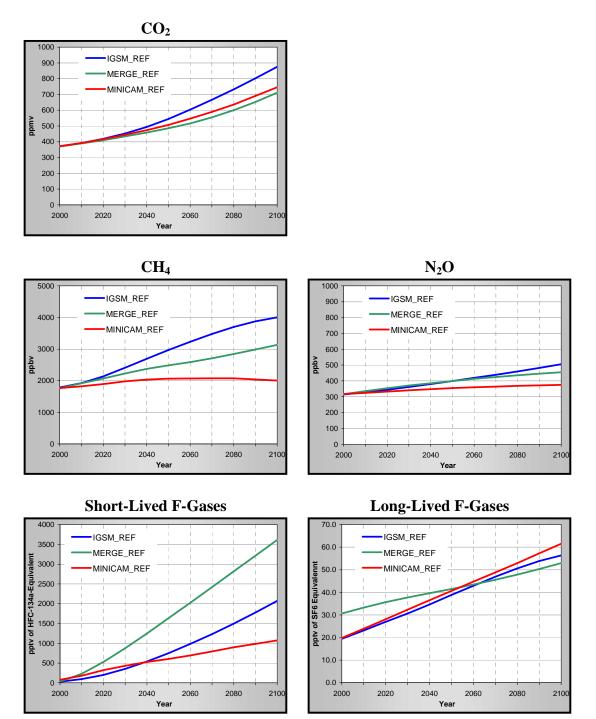


Figure 3.23. Radiative Forcing by Gas Across Reference Scenarios (Wm⁻²). The contributions of different GHGs to increased radiative forcing through 2100 show CO₂ accounting for more than 80% of the increased forcing from preindustrial for all three reference scenarios. The total increase ranges from about 6.4 Wm⁻² to 8.6 Wm⁻² above preindustrial levels.







10

9

8

7

6

5

4 3

2

0

2000

CO2

N2O

CH4

Short-Lived F-gases

Long-Lived F-gases

2020

2040


Year

2060

2080

2100

MiniCAM



Page Left Blank

_			
3	4. ST.	ABILIZATION SCENARIOS	1
4	4.1. Inti	roduction	1
5	4.2. Sta	bilizing Radiative Forcing: Model Implementations	2
6	4.2.1.	Climate Policies in the Stabilization Scenarios	2
7	4.2.2.	Participation in Stabilization Scenarios	2
8	4.2.3.	Policy Instrument Assumptions in Stabilization Scenarios	3
9	4.2.4.	Timing of CO ₂ Emissions Mitigation	
10	4.2.5.	Timing of Non-CO ₂ Emissions Mitigation	5
11	4.3. Sta	bilization Implications for Radiative Forcing, Greenhouse Gas	
12	Co	ncentrations, and Emissions	6
13	4.3.1.	Implications for Radiative Forcing	6
14	4.3.2.	Implications for Greenhouse Gas Concentrations	
15	4.3.3.	Implications for Greenhouse Gas Emissions	8
16	4.4. Im _j	plications for Energy Use, Industry, and Technology	9
17	4.4.1.	Changes in Global Energy Use	10
18	4.4.2.	Changes in Global Electric Power Generation	12
19	4.4.3.	Changes in Energy Patterns in the United States	14
20	4.5. Sta	bilization Implications for Agriculture, Land-Use, and Terrestrial Carb	on 15
21	4.6. Ecc	onomic Implications of Stabilization	17
22	4.6.1.	Stabilization and Carbon Prices	18
23	4.6.2.	Stabilization and Non-CO ₂ Greenhouse Gas Prices	22
24	4.6.3.	Stabilization and Energy Prices	24
25	4.6.4.	The Total Cost of Stabilization	
26	4.7 Ref	ferences	28

In these scenarios, stabilizing radiative forcing at levels ranging from 3.4 Wm⁻² to 6.7 Wm⁻² above preindustrial levels (Level 1 to Level 4) implies significant changes to the world's energy and agriculture systems and leads to lower global economic output. Although all the stabilization scenarios require changes in the world's energy and agricultural systems, the three modeling teams produced scenarios with differing conceptions of how these changes might occur. The economic implications vary considerably among the scenarios, depending on the amount that emissions must be reduced and the evolution of technology.

4.1. Introduction

In Chapter 3, each modeling group developed scenarios of long-term GHG emissions associated with changes in key economic characteristics, such as demographics and technology. This chapter describes how such developments might change in response to limits on radiative forcing. It illustrates that society's response to a stabilization goal can take many paths, reflecting factors shaping the reference scenario and the availability and performance of emissions-reducing technologies. It should be emphasized that the four

levels analyzed below and detailed in Table 4.1 were chosen for illustrative purposes only. They reflect neither a preference nor a recommendation.

Table 4.1. Long-Term Radiative Forcing Limits by Stabilization Level and Corresponding Approximate CO₂ Concentration Levels

Control of GHG emissions requires changes in the global energy, economic, agriculture, and land-use systems. In all the stabilization scenarios, it was assumed that forcing levels would not be allowed to overshoot the targets along the path to long-term stabilization. Given this assumption, each modeling group had to make further decisions regarding the means of limitation. Section 4.2 compares the approaches of the three modeling groups. Section 4.3 shows the effect of the three strategies on GHG emissions, concentrations, and radiative forcing. The implications for global and U.S. energy and industrial systems are explored in Section 4.4 and for agriculture and land-use change in Section 4.5. Section 4.6 discusses economic consequences of measures to achieve the various stabilization levels.

4.2. Stabilizing Radiative Forcing: Model Implementations

Some features of scenario construction were coordinated among the three modeling groups, and others were left to their discretion. In three areas, a common set of approaches was adopted:

- Climate policies in the stabilization scenarios (Section 4.2.1)
 - The timing of participation in stabilization scenarios (Section 4.2.2)
 - Policy instrument assumptions in stabilization scenarios (Section 4.2.3).

26 In two areas, the groups employed different approaches:

- The timing of CO₂ emissions mitigation (Section 4.2.4)
- Non-CO₂ emissions mitigation (Section 4.2.5).

4.2.1. Climate Policies in the Stabilization Scenarios

Each group assumed that, as in the reference scenarios, the U.S. will achieve its goal of reducing GHG emissions intensity (the ratio of GHG emissions to GDP) by 18% by 2012, although implementation of this goal was left to the judgment of each group. Also, the Kyoto Protocol participants were assumed to achieve their commitments through the first commitment period, 2008 to 2012. In the reference scenarios, these policies were modeled as not continuing after 2012. In the stabilization scenarios, these initial period policies were superseded by the long-term control strategies imposed by each group.

4.2.2. Participation in Stabilization Scenarios

For the stabilization scenarios, it was assumed that policies to limit the change in radiative forcing would be applied globally after 2012, as directed by the Prospectus. Although it seems unlikely that all countries would simultaneously join such a global

agreement, and the economic implications of stabilization would be greater with less-than-universal participation, the assumption that all countries participate does provide a useful benchmark.

4.2.3. Policy Instrument Assumptions in Stabilization Scenarios

Note that the issue of economic efficiency applies across both space and time. All of the scenarios assume an economically efficient allocation of reductions among nations in each time period, that is, across space. Thus, in these scenarios, GHG emissions in all regions and across all sectors of the economy were controlled by imposing a single price for each GHG at any point in time. As will be discussed in detail in Section 4.5, the prices of emissions for individual GHGs differ across the models. The implied ability to access emissions reduction opportunities wherever they are cheapest is sometimes referred to as *where* flexibility (Richels et al. 1996).

4.2.4. Timing of CO₂ Emissions Mitigation

The cost of limiting radiative forcing to any given level depends on the timing of the associated emissions mitigation. There is a strong economic argument that mitigation costs will be lower if emissions reductions start slowly and then progressively ramp up, particularly for CO₂. Distributing emissions mitigation over time, such that larger efforts are undertaken later, reduces the current cost as a consequence of such effects as discounting, the preservation of energy-using capital stock over its natural lifetime, and the potential for the development of increasingly cost-effective technologies.

What constitutes such a cost-effective slow start depends on the concentration target and the ability of economies to make strong reductions later. Although 100 years is a very long time horizon for economic scenarios, it is not long enough to fully evaluate stabilization goals. For several of the stabilization levels, the scenarios are only approaching stabilization in 2100; concentrations are below the targets and still rising, but the rate of increase is slowing. Stabilization of atmospheric concentrations requires that any emissions be completely offset by uptake or destruction of the gas. Because ocean and terrestrial uptake of CO₂ is subject to saturation and system inertia, at least for the CO₂ concentration limits considered in this analysis, emissions need to peak and subsequently decline during the twenty-first century or soon thereafter. In the very long term (many hundreds to thousands of years), emissions must decline to virtually zero for any CO₂ concentration to be maintained. Thus, while there is some flexibility in the intertemporal allocation of emissions, it is inherently constrained by the carbon cycle. Given that anthropogenic CO₂ emissions rise with time in all three of the unconstrained reference scenarios, the stringency of CO₂ emissions mitigation also increases steadily with time.

Different approaches were used by the modeling groups to determine the profile of emissions reduction and how the different GHGs contribute to meeting radiative forcing targets. A major reason for the difference is the structure of the models. MERGE is an inter-temporal optimization model and is able to set a radiative forcing target and solve

for the cost-minimizing allocation of emissions reductions across gases and over time. It thus offers insights regarding the optimal path of emissions reductions. A positive discount rate will lead to a gradual phase-in of reductions, and the tradeoff among gases is endogenously calculated based on the contribution each makes toward the long-term goal (Manne and Richels 2001). Given a stabilization target, the changing relative prices of gases over time can be interpreted as an optimal trading index for the gases that combines economic considerations with modeled physical considerations (lifetime and radiative forcing). The resulting relative weights are different from those derived using Global Warming Potential (GWP) indices, which are based purely on physical considerations (IPCC 2001). Furthermore, economically efficient indices for the relative importance of GHG emissions mitigation will vary over time and across policy regimes.

IGSM and MiniCAM are simulation models and do not endogenously solve for optimal allocations over time and by type of gas. However, the choice of price path over time used in these scenarios takes account of insights from economic principles that lead to a pattern similar to that computed by MERGE. The pattern was anticipated by Peck and Wan (1996) using a simple optimizing model with a carbon cycle and by Hotelling (1931) in a simpler context.

In the MiniCAM scenarios, the rate of increase in the carbon price was set equal to the rate of interest plus the average rate of carbon removal from the atmosphere by natural systems. This approach follows Peck and Wan (1996) and yields a resulting carbon price path similar in structure to that obtained in the MERGE scenarios. This carbon price path ensures that the present discounted marginal cost of having one tonne of carbon less in the atmosphere during one period in the future is exactly the same regardless of whether the removal takes place today or one period later. When marginal costs are equal over time, there is no way that total costs can be reduced by making emissions mitigation either earlier or later.

As is the case in the MERGE scenarios, the exponential increase in the price of CO_2 continues until such time as radiative forcing is stabilized. Thereafter, the price is set by the carbon cycle. That is, once radiative forcing has risen to its stabilization level, additional CO_2 can only enter the atmosphere to the extent that natural processes remove it, otherwise CO_2 radiative forcing would be increasing. This is relevant in the Level 1 stabilization scenario and, to a lesser extent, in the Level 2 stabilization scenario. However, it is not present in the Level 3 or Level 4 scenarios because stabilization is not reached until after the end of the twenty-first century.

The IGSM scenarios are based on a carbon price path that rises 4% per year. The initial carbon price is set to achieve the required concentrations and forcing. Thus, the rate of increase in the CO_2 price paths is identical for all stabilization scenarios, but the initial value of the carbon price is different. The lower the concentration of CO_2 allowed, the higher the initial price. The insight behind this approach is that an entity faced with a carbon constraint and a decision to reduce emissions now or later would compare the expected return on that emissions reduction investment with the rate of return elsewhere in the economy. The 4% rate is taken to be this economy-wide rate of return. If the

carbon price were rising more rapidly than the rate of return, investments in emissions reductions would yield a higher return than investments elsewhere in the economy, so that the entity would invest more in emissions reductions now (and possibly bank emissions permits to use them later). By the same logic, an increase in the carbon price lower than the rate of return would lead to a decision to postpone emissions reductions. It would lead to a tighter carbon constraint and a higher carbon price in the future. Thus, this approach is intended to be consistent with a market solution that would allocate reductions through time.

4.2.5. Timing of Non-CO₂ Emissions Mitigation

Like CO₂, the contribution of non-CO₂ GHGs to radiative forcing depends on their concentrations. However, these gases are dissociated in the atmosphere over time so that the relationship between emissions and concentrations is different from that for CO₂, as are the sources of emissions and opportunities for emissions reductions. Each of the three modeling groups used its own approach to model their control. As noted above, MERGE employed an inter-temporal optimization approach. The price of each GHG was determined so as to minimize the social cost of limiting radiative forcing to each level. Thus, the price of each gas was constant across regions at any point in time, but varied over time so as to minimize the social cost of achieving each level.

In the MiniCAM scenarios, non-CO₂ GHG prices were tied to the price of CO₂ using the GWPs of the gases. This procedure has been adopted by parties to the Kyoto Protocol and applied in the definition of the U.S. emissions intensity goal. The IGSM scenarios are based on the same approach as MiniCAM scenarios for determining the prices for HFCs, PFCs, and SF₆, pegging the prices to that of CO₂ using GWP coefficients. For CH₄ and N₂O, however, independent emission stabilization levels were set for each gas in the IGSM scenarios because GWPs poorly represent the full effects of CH₄, and emissions trading at GWP rates leads to problems in defining what stabilization means when CH₄ and N₂O are involved (Sarofim et al. 2005). The relatively near-term stabilization for CH_4 in the IGSM scenarios implies that near-term emissions reductions result in economic benefit, an approach consistent with a view that there are risks associated with levels of radiative forcing below the specified atmospheric maximum. This approach is different than that followed in the MERGE scenarios, where any value of CH₄ emissions reductions is derived only from the extent to which it contributes to avoiding the longterm stabilization level. In the MERGE scenarios, reductions of emissions of short-lived species like CH₄ has very little consequence for a target that will not be reached for many decades, so the optimized result places little value on reducing emissions of short-lived species until the target is approached. A full analysis of the resulting climate change and its effects would be required to select between the approaches used in the MERGE and IGSM scenarios. The different stabilization paths in the scenarios from these two models do provide a range of plausible scenarios for non-CO₂ GHG stabilization, however. The MiniCAM scenarios yield an intermediate result.

1 2 3

4

5

6

7

8

9

10

11 12

13

4.3. Stabilization Implications for Radiative Forcing, Greenhouse Gas **Concentrations, and Emissions**

18 19 20

21

22

30 31 32

28

29

34 35 36

37

38

39

33

40 41

42

43 44 Although their totals are similar, the GHG composition of radiative forcing differs among the models. Figure 4.2 plots the breakdown among gases in 2100 for the reference

¹ The IGSM exceeds the Level 1 target by 0.1 Wm⁻², which is a negligible difference that results from the iterative process required to achieve a radiative forcing target.

Despite significantly different levels of radiative forcing in the reference scenarios, radiative forcing relative to preindustrial levels in 2100 is similar across models in all four stabilization scenarios. CO₂ concentrations are also similar in 2100 across the models. Scenarios with higher CO₂ concentrations for a given stabilization level generally have lower concentrations and emissions of non-CO₂ GHGs, trading off reductions in these substances to make up for higher forcing from CO_2 .

All three modeling groups produced scenarios in which emissions reductions below levels in the reference scenarios were much smaller between 2000 and 2050 than between 2050 and 2100. With one exception at the least stringent stabilization level, the stabilization scenarios were characterized by a peak and decline in global CO₂ emissions in the twenty-first century. In the most stringent scenarios, CO_2 emissions begin to decline immediately or within a matter of decades.

4.3.1. **Implications for Radiative Forcing**

difference in concentrations and radiative forcing.

Given that all the models were constrained to the same radiative forcing levels, radiative forcing relative to preindustrial levels for the year 2100 are similar across the models, although the time scale for stabilization exceeds the 2100 horizon of the analysis. Table 4.2 shows the long-term stabilization level and the radiative forcing in 2100 across the scenarios. The differences across the models between the long-term stabilization levels and the modeled radiative forcing levels are smaller for Levels 1 and 2 than for Levels 3 and 4 because the latter allow a greater accumulation of GHGs in the atmosphere. For Levels 3 and 4, each modeling group required radiative forcing to be below the long-term limits in 2100 to allow for subsequent emissions to fall gradually toward levels required for stabilization.

Table 4.2. Radiative Forcing in the Year 2100 across Scenarios

The radiative forcing stabilization paths are shown in Figure 4.1. Even though they

Thus, even fairly different time profiles of CO₂ emissions can yield relatively little

reflect different criteria used to allocate emissions reductions over time, the paths are

very similar across models. The radiative forcing path is dominated by forcing associated

with CO₂ concentrations, which in turn are driven by cumulative, not annual, emissions.

Figure 4.1. Total Radiative Forcing by Year across Scenarios scenario along with all four stabilization levels. Forcing is dominated by CO₂ in all scenarios at all stabilization levels, but there are variations among models. For example, the MiniCAM stabilization scenarios have larger contributions from CO₂ and lower contributions from the non-CO₂ gases than the scenarios from the other two models. Conversely, the MERGE scenarios have higher contributions from the non-CO₂ gases and lower contributions from CO₂ relative to the IGSM and MiniCAM scenarios.

Figure 4.2. Total Radiative Forcing by Gas in 2100 across Scenarios

4.3.2. Implications for Greenhouse Gas Concentrations

The relative GHG composition of radiative forcing across models in any scenario reflects differences in concentrations of the GHGs. The CO_2 concentration paths are presented in Figure 4.3, and the year 2100 atmospheric levels are detailed in Table 4.3. Because the actual policy targets were specified in terms of total radiative forcing from the multiple GHGs, it is possible to meet those targets while varying from the CO_2 concentration levels set for them. In some of the scenarios, that means CO_2 concentrations in 2100 differ across models for any stabilization level. For example, the CO_2 concentrations in the MiniCAM stabilization scenarios are generally higher than in IGSM and MERGE stabilization scenarios. Consequently, CH_4 and N_2O concentrations are systematically lower as can be seen in Figure 4.4 (see also Figure 4.25).

Figure 4.3. CO₂ Concentrations across Scenarios

Table 4.3. CO₂ Concentrations in the Year 2100 across Scenarios

Differences in the gas concentrations among the scenarios from the three models reflect differences in the way that tradeoffs were made among gases and differences in assumed mitigation opportunities for non-CO₂ GHGs compared to CO₂.

Figure 4.4. CH₄ Concentrations across Scenarios

Approximate stabilization of CO₂ concentrations occurs by 2100 in all the Level 1 and Level 2 scenarios, but concentrations are still increasing in 2100 for the Level 3 and Level 4 scenarios, although at a slowing rate. An important implication of the less stringent stabilization levels is that substantial emissions reductions would be required after 2100. Sometime within the next century, all the stabilization paths would require emissions levels nearly as low as that for Level 1. Higher stabilization targets do not change the nature of long-term changes in emissions required in the global economy; they only delay when the emissions reductions must be achieved.

In all the scenarios, as the rise in atmospheric concentrations slows, the ocean uptake slows and even begins to decline. These natural removal processes are uncertain, and to some extent this uncertainty is reflected in differences in the scenarios from the three modeling groups, as shown in Figure 4.5. Ocean uptake is smallest in the IGSM scenarios. The MERGE scenarios have the highest uptake for the least stringent levels,

and the MiniCAM and MERGE scenarios are almost identical for the most stringent stabilization levels.

Figure 4.5. Ocean CO₂ Uptake across Scenarios

4.3.3. Implications for Greenhouse Gas Emissions

4.3.3.1. Implications for Global CO₂ Emissions

For the Level 1 target, global CO₂ emissions begin declining after 2010 in all three models (Figure 4.6). The constraint is so tight that there is relatively little room for variation.

Figure 4.6. Fossil Fuel and Industrial CO₂ Emissions across Scenarios

 All three modeling groups show continued emissions growth throughout the first half of the twenty-first century for Level 4, the loosest constraint, and the MiniCAM scenario exhibits increasing emissions throughout the century, although they are approaching a peak by 2100. Near-term variation in emissions largely reflects differences in the reference scenarios.

The scenarios of all three groups exhibit more emissions reduction in the second half of the twenty-first century than in the first half, as noted earlier, so the mitigation challenge grows with time. The precise timing and degree of departure from the reference scenario depend on many aspects of the scenarios and on each model's representation of Earth system properties, including the radiative forcing limit, the carbon cycle, atmospheric chemistry, the character of technology options over time, the reference scenario CO₂ emissions path, the non-climate policy environment, the rate of discount, and the climate policy environment. For Level 4, 85% or more of emissions mitigation occurs in the second half of the twenty-first century in the scenarios developed here. Even for Level 1, where the limit is the tightest and near-term mitigation most urgent, 75% or more of the emissions reduction below reference occurs in the second half of the century. While this is partly a result of the *when* flexibility assumption, continuing emissions growth means that the percentage reduction is much larger over time.

All three of the modeling groups constructed reference scenarios in which Non-Annex 1 emissions were a larger fraction of the global total in the future than at present (Figure 3.16). Because the stabilization scenarios are based on the assumption that all regions of the world face the same price of GHG emissions and have access to the same general set of technologies for mitigation, the resulting distribution of emissions mitigation between Annex I and Non-Annex I regions generally reflects the distribution of reference scenario emissions among them. So, when radiative forcing is restricted to Level 1, all three models find that more than half of the emissions mitigation occurs in Non-Annex I regions by 2050 because more than half of reference scenario emissions occur in Non-Annex I regions. Note that with the global policy specified so that a common carbon price occurs in all regions at any one time, emissions reductions occur separately from and mostly independent of the distribution of the economic burdens of reduction.

1 2

4.3.3.2. Implications for Non-CO₂ Greenhouse Gas Emissions

The stabilization properties of the non-CO₂ GHGs differ due to their lifetimes (as determined by chemical reactions in the atmosphere), technologies for reducing emissions, and natural sources. CH₄ has a relatively short lifetime, and anthropogenic sources are a big part of CH₄ emissions. If anthropogenic emissions are kept constant, an approximate equilibrium between oxidation net emissions will be established relatively quickly and concentrations will stabilize. The same is true for the relatively short-lived HFCs.

Emissions under stabilization are systematically lower the more stringent the target, as can be seen in Figure 4.7. The MiniCAM reference scenario has the lowest CH₄ emissions among the models in the reference scenario and the stabilization scenarios. The assumed policy environment for CH₄ control is also important. Despite the fact that the IGSM reference scenario has higher reference CH₄ emissions than the MERGE reference scenarios, the MERGE scenarios have the higher emissions under stabilization in several instances. The reason is that the MERGE inter-temporal optimization approach leads to a low relative price for CH₄ emissions in the near term, which grows rapidly relative to CO₂, favoring strong reductions of CH₄ emissions only toward the end of the century, whereas CH₄ emissions were controlled based on quantitative limits in the IGSM scenarios, and these limits lead to substantial reduction early in the century. Thus, emissions in the MERGE scenarios sometimes exceed those in the IGSM scenarios until the relative CH₄ price rises sufficiently to induce substantial emissions reductions.

Figure 4.7. CH₄ Emissions across Scenarios

The very long-lived gases are nearly indestructible, thus for stabilization their emissions must be very near zero. Based on the assumptions used by all three modeling groups, it is possible, at reasonable cost, for this to be achieved, as shown in Figure 4.2. While these substances are useful, their emissions are not as difficult to reduce as those from fossil energy.

 N_2O is more problematic. A major anthropogenic source is from use of fertilizer for agricultural crops—an essential use. Moreover, its natural sources are important, and they are augmented by terrestrial changes associated with climate change. It is fortunate that N_2O is not a major contributor to radiative forcing because the technologies and strategies needed to achieve its stabilization are not obvious at this time. Nevertheless, differences in the control of N_2O are observed across models, as revealed in Figure 4.8, although these differences are smaller than those for CH_4 .

Figure 4.8. N₂O Emissions across Scenarios

4.4. Implications for Energy Use, Industry, and Technology

In these scenarios, GHG emissions reductions require a transformation of the global energy system, including reductions in the demand for energy and changes in the mix of energy technologies and fuels. This transformation is more substantial and takes place more quickly at the more stringent stabilization levels. Fossil fuel use and energy consumption are reduced in all the stabilization scenarios due to increased consumer prices for fossil fuels. CO₂ emissions from electric power generation are reduced at relatively lower prices than CO₂ emissions from other sectors, such as transport, industry, and buildings. Emissions are reduced from electric power by increased use of technologies such as CO₂ capture and storage (CCS), nuclear energy, and renewable energy. Other sectors respond to rising greenhouse gas prices by reducing demands for fossil fuels; substituting low- or non-emitting energy sources such as bioenergy, electricity, and hydrogen; and applying CCS where possible.

4.4.1. Changes in Global Energy Use

The degree and timing of change in the global energy system depends on the level at which radiative forcing is stabilized. Although differences in the reference scenarios developed by each of the three modeling groups led to different patterns of response, some important similarities emerged. The lower the radiative forcing limit, the larger the change in the global energy system relative to the reference scenario; moreover, the scale of this change is increasing over time. Also, significant fossil fuel use continues in all four stabilization scenarios. This pattern can be seen in Figure 4.9, which shows the global primary energy across the scenarios, and Figure 4.10, which shows the reference scenario from Chapter 3 with an additional plot of the net changes in the various primary energy sources for each stabilization level.

Figure 4.9. Global Primary Energy by Fuel across Scenarios

Figure 4.10. Change in Global Primary Energy by Fuel across Scenarios, Stabilization Scenarios Relative to Reference Scenarios

Although atmospheric stabilization would take away much of the growth potential of coal over the century, its usage expands above today's levels by the end of the century in all the stabilization scenarios. In several of the Level 1 and Level 2 scenarios, the global coal industry declines in the first half of the century before recovering by 2100 to levels of production somewhat larger than today. Oil and natural gas also continue as contributors to total energy over the century although, as with coal, they are increasingly pushed from the energy mix as the stabilization level is tightened.

One reason that fossil fuels continue to be utilized despite constraints on GHG emissions is that CCS technologies are available. Figure 4.9 shows that as the carbon values rise, CCS technology takes on an increasing market share. Section 4.4.2 addresses this pattern as well as the contribution of non-biomass renewable energy forms in greater detail.

Changes in the global energy system in response to constraints on radiative forcing reflect an interplay between technology options and the assumptions that shaped the reference scenarios. For example, the MERGE reference scenario assumes relatively limited ability to access unconventional oil and gas resources and the evolution of a system that increasingly employs coal as a feedstock for the production of liquids, gases, and electricity. Against this background, a constraint on radiative forcing leads to reductions in coal use and end-use energy consumption. As the carbon price rises, nuclear and non-biomass renewable energy forms and CCS augment the response.

The IGSM scenarios assume greater availability of unconventional oil and gas than the MERGE scenarios. Thus, the IGSM stabilization scenarios, in general, involve less reduction in coal use by the end of the century, but a larger decline in oil and gas than in the MERGE scenarios. To produce liquid fuels for the transportation sector, the IGSM scenarios respond to a constraint on radiative forcing by growing biomass energy crops both earlier and more extensively than in the reference scenario. Also, reductions in energy demand are larger in the IGSM scenarios than in the scenarios from the other two models.

The MiniCAM scenarios include the smallest reductions in energy consumption among the models. The imposition of constraints on radiative forcing leads to reductions in oil, gas, and coal, as is the case with the IGSM and MERGE scenarios, but also involves considerable expansion of nuclear and renewable supplies. The largest supply response is in commercial bio-derived fuels. These fuels are largely limited to bio-waste recycling in the MiniCAM reference scenario. As the price on CO₂ rises, commercial bioenergy becomes increasingly attractive. As will be discussed in Section 4.5, the expansion of the commercial biomass industry to produce hundreds of EJ/yr of energy has implications for crop prices, land use, land-use emissions, and unmanaged ecosystems.

 The relative role of nuclear energy differs in each of the three analyses. The MERGE reference scenario deploys the largest amount of nuclear power, contributing 170 EJ/yr of primary energy in the year 2100. In the Level 1 stabilization scenario, deployment expands to 240 EJ/yr of primary energy in 2100. Nuclear power in the MiniCAM reference scenario produces 90 EJ/yr in the year 2100, which in the Level 1 stabilization scenario expands to more than 180 EJ/yr of primary energy in the year 2100. The IGSM scenarios show little change in nuclear power generation among the stabilization scenarios or compared with the reference, reflecting the assumption that nuclear levels are limited by policy decisions regarding safety, waste, and proliferation that are unaffected by climate policy.

Reductions in total energy demand play an important role in all of the stabilization scenarios. In the IGSM stabilization scenarios, this is the largest single change in the global energy system. While not as dramatic as the IGSM stabilization scenarios, the MERGE and MiniCAM stabilization scenarios also exhibit reductions in energy demand. As will be discussed in Section 4.6, the difference in the change in energy use among the models reflects differences in the carbon prices required for stabilization, which are substantially higher in the IGSM scenarios. In all the stabilization scenarios, carbon price

differences are reflected in the user prices of energy. Carbon prices, in turn, reflect technological assumptions that influence both the supply of alternative energy and the responsiveness of users to changing prices. The fuel and GHG prices discussed later in this chapter, therefore, can be instructive in understanding the character of technology assumptions employed in the models. As noted throughout the preceding and following discussions, the economic equilibrium nature of these three models implies that technology deployments are a reflection of prices. Technologies are deployed up to the point where marginal cost is equal to price. For example, the prices of oil and carbon determine the marginal cost of bioenergy and its deployment in the three models, and that insight can be used to infer useful information about the technology assumptions that each of the models employed.

It is worth reemphasizing that reductions in energy consumption are an important component of response at all stabilization levels in all scenarios. These reductions reflect a mix of three factors:

- Substitution of technologies that produce the same energy service with lower direct-plus-indirect carbon emissions
- Changes in the composition of final goods and services, shifting toward consumption of goods and services with lower direct-plus-indirect carbon emissions
- Reductions in the consumption of energy services.

This report does not attempt to quantify the relative contribution of each of these responses. Each of the models has a different set of technology options, different technology performance assumptions, and different model structures. Furthermore, no well defined protocol exists that can provide a unique attribution among these three general processes.

4.4.2. Changes in Global Electric Power Generation

Across the scenarios, stabilization leads to substantial changes in electricity-generation technologies, although the MERGE and MiniCAM scenarios exhibit relatively little change in electricity demand. Indeed, across the models, the relative reductions in electricity consumption under stabilization are lower than relative reductions in total primary energy. One reason for this result is that electricity price increases are smaller relative to those for direct fuel use because the fuel input, while important, is only part of the cost of electricity supply to the consumer. Also, the long-term cost of the transition to low and non-carbon-emitting sources is relatively smaller in electricity production than in the remaining sectors taken as an average.

There are substantial differences in the scale of global power generation across the three reference scenarios, as shown in Chapter 3 and repeated at the top of Figure 4.11. Power generation increases from about 50 EJ/yr in the year 2000 to between 230 EJ/yr (IGSM) to 310 EJ/yr (MiniCAM) by 2100. In all three reference scenarios, electricity becomes an increasingly important component of the global energy system, fueled by growing

quantities of fossil fuels. Despite differences in the relative contribution of different fuel sources across the three reference scenarios, total production of electricity from fossil fuel rises from about 30 EJ/yr in 2000 to between 150 EJ/yr and 190 EJ/yr in 2100. Thus, the difference in total reference scenario power generation among the models reflects differences in the deployment of non-fossil energy forms: bio-fuels; nuclear power; fuel cells; and other renewables such as wind, geothermal, and solar power.

6 7 8

1

2

3

4

5

Figure 4.11. Global Electricity Generation by Fuel across Scenarios

9 10

Figure 4.12. Changes in Global Electricity by Fuel across Stabilization Scenarios, Relative to Reference Scenarios

11 12 13

14

15

16

17

18

19

20

21

22

23

24

25

26

2728

29

30

31

32

The imposition of radiative forcing limits dramatically changes the electricity sector. Common characteristics across models are that CCS (with coal, gas, and, where present, oil-generated power) is deployed at a large scale by the end of the century and that use of coal without CCS declines and eventually is not viable. The IGSM scenarios, as has been noted, restrict nuclear expansion, and other renewables are either resource limited (hydro power and electricity from bio-fuels) or become more costly to integrate into the grid as their share of electricity rises because they are intermittent (wind and/or solar). Partly as a result, natural gas use is increased in electric generation in the stabilization scenarios, especially in the nearer term before CCS becomes economically viable. In the MERGE scenarios, carbon-free technologies, including non-biomass renewables and nuclear, are viable and, thus, are favored over natural gas, the use of which falls relative to the reference scenario. In the MiniCAM scenarios, nuclear and non-biomass renewable energy technologies capture a larger share of the market. At the less stringent levels of stabilization, Level 3 and Level 4, additional bio-fuels are deployed in power generation, and total power generation declines. Under the most stringent stabilization level, commercial bio-fuels used in electricity generation in the MiniCAM scenarios are diverted to the transportation sector, and use actually declines relative to the reference toward the end of the century. In all of the IGSM scenarios, bio-fuels are used preferentially for transportation rather than for electricity generation. The difference between MiniCAM and IGSM scenarios in this regard is in part a reflection of the higher fuel prices in the IGSM scenarios discussed in Section 4.6.3.

333435

36

37

38

39

40

41

42

43

All modeling groups assumed that CO₂ could be captured and stored in secure repositories, and as noted, in all scenarios CCS becomes a large-scale activity. Annual capture quantities are shown in Table 4.4. CCS is always one of the largest single changes in the power-generation system in response to stabilization in radiative forcing, as can be seen in Figure 4.12. As with mitigation in general, CCS starts relatively modestly in all the scenarios, but grows to large levels. The total storage over the century is recorded in Table 4.5, spanning a range from 20 GtC to 90 GtC for Level 4 and 230 GtC to 270 GtC for Level 1. The modeling groups made no attempt to report either location of storage sites for CO₂ or the nature of the storage reservoirs, but these scenarios are within the range of the estimates of global geologic reservoir capacity.

Table 4.4. Global Annual CO₂ Capture and Storage in 2030, 2050, and 2100 for Four Stabilization Levels

Table 4.5. Global Cumulative CO₂ Capture and Storage in 2050 and 2100 for Four Stabilization Levels

6 7

8

9

10

11

12

Deployment rates in the models depend on a variety of circumstances, including capture cost, new plant construction versus retrofitting for existing plants, the scale of power generation, the price of fuel inputs, the cost of competing technologies, and the level of the CO_2 price. It is clear that the constraints on radiative forcing considered in these scenarios are sufficiently stringent that, if CCS is available at a cost and performance similar to that considered in these scenarios, it would be a crucial component of future power generation.

13 14 15

16

17

18

19 20

21

22

23

24

25

2627

28

29

30

Yet capture technology is hardly ordinary today. Geologic storage is largely confined to experimental sites or enhanced oil and gas recovery. There are as yet no clearly defined institutions or accounting systems to reward such technology in emissions control agreements, and long-term liability for stored CO₂ has not been determined. All of these issues and more must be resolved before CCS could deploy on the scale envisioned in these stabilization scenarios. If CCS were unavailable, the effect would be to increase the cost of achieving any of these stabilization scenarios. These scenarios tend to favor CCS, but that tendency could easily change with different assumptions about nuclear power that are well within the range of uncertainty about future costs and the policy environment. Nuclear power carries with it issues of safety, waste, and proliferation. Thus, the viability of both CCS and nuclear energy depends on regulatory and public acceptance issues. Absent CCS and nuclear fission, these models would need to deploy other emissions reduction options that could potentially be more costly, or would need to envision large breakthroughs in the cost, performance, and reliability of other technologies. This study has not attempted to quantify the increase in costs or the reorganization of the energy system that would be required to achieve stabilization without CCS. This sensitivity is an important item in the agenda of future research.

31 32 33

34

35

For example, global nuclear generation in the reference scenarios ranges from about 1½ times current levels (if non-climate concerns such as safety, waste, and proliferation constrain its growth as is the case in one reference scenario), to an expansion of almost an order of magnitude assuming relative economics as the only constraint.

363738

4.4.3. Changes in Energy Patterns in the United States

39 40

41

42

Changes for the U.S. are similar to those observed for the world in general. This pattern reflects the facts that the mitigation policy is implemented globally, there are international markets in fuels, each model makes most technologies globally available over time, and the U.S. is roughly a quarter of the world total.

43 44 45

46

Energy system changes are modest for stabilization Level 4, but even with this loose constraint, significant changes begin upon implementation of the stabilization policy (the

first period shown is 2020) in the IGSM Level 4 scenario (Figure 4.13 and Figure 4.14). At more stringent stabilization levels, the changes are more substantial in all three models. With Level 1 stabilization, the reduction is in U.S. primary energy consumption ranges from 8 EJ/yr to over 25 EJ/yr in 2020.

Figure 4.13. U.S. Primary Energy by Fuel across Scenarios

Figure 4.14. Change in U.S. Primary Energy by Fuel across Stabilization Scenarios, Relative to Reference Scenarios

Near-term changes in the U.S. energy system show more differences among models than the long-term adjustments. While oil consumption always declines at higher carbon prices for all the models and all stabilization regimes, near-term changes in oil consumption do not follow a consistent pattern. However, there is no ambiguity regarding the effect on coal consumption, which declines relative to the reference scenario in all stabilization scenarios for all models in all time periods. Similarly, total energy consumption declines along all scenarios. Nuclear power, commercial biomass, and other renewable energy forms are advantaged with at least one of them always deployed to a greater extent in stabilization scenarios than in the reference scenario. The particular form and timing of expanded development varies from model to model.

The three models exhibit different responses reflecting differences in underlying reference scenarios and technology assumptions (Figure 4.15 and Figure 4.16). The largest change in the U.S. energy system in the IGSM scenarios is always the reduction in total energy consumption augmented by an expansion in the use of commercial biomass fuels and deployment of CCS at higher carbon tax rates. Similarly, the largest change in the MERGE scenarios is the reduction in total energy consumption augmented by deployment of CCS and bioenergy, augmented in some scenarios with increased use of nuclear power. The MiniCAM scenarios also exhibit reductions in total energy consumption and increases in nuclear power, along with smaller additions of commercial biomass and other renewable energy forms. The adjustment of the U.S. electric sector to the various stabilization levels is similar to that for the world electricity sector.

Figure 4.15. U.S. Electricity by Fuel across Scenarios

Figure 4.16. Change in U.S. Electricity by Fuel across Stabilization Scenarios, Relative to Reference Scenarios

4.5. Stabilization Implications for Agriculture, Land-Use, and Terrestrial Carbon

In the stabilization scenarios, increased use is made of biomass energy crops, the contribution of which is ultimately limited by competition with agriculture and forestry. Two of the modeling groups employed explicit agriculture-land-use models to represent this competition and represent land constraints on the use of bio-energy. In the scenarios from one modeling group, increased used of bio-

energy at more stringent stabilization levels leads to substantial land use change emissions as previously unmanaged lands are shifted to biomass production.

The three modeling groups employed different approaches to the treatment of the terrestrial carbon cycle, ranging from a simple neutral biosphere model to a state-of-the-art terrestrial carbon-cycle model. In two of the models, a CO_2 fertilization effect plays a significant role. As stabilization levels become more stringent, CO_2 concentrations decline and terrestrial carbon uptake declines, with implications for emissions mitigation in the energy sector. Despite the differences across the modeling groups' treatments of the terrestrial carbon cycle, the aggregate behavior of the carbon cycles across models is similar,

In stabilization regimes, the cost of using fossil fuels and emitting CO_2 rises, providing an increasing motivation for the production and transformation of bioenergy, as shown in Figure 4.17. In all of the scenarios, production begins earlier and produces a larger share of global energy as the stabilization limit becomes more stringent. In the presence of less stringent stabilization limits, production of bio-crops is lower in the second half of the century in the MERGE and MiniCAM scenarios than in the IGSM scenarios. Differences between the models with respect to biomass deployment are not simply due to different treatments of agriculture and land use but also result from the full suite of competing technologies and behavior assumptions.

Although total land areas allocated to bioenergy crops are not reported in these scenarios, the extent of land areas engaged in the production of energy becomes substantial. This is possible only if appropriate land is available, which hinges on future productivity increases for other crops and the potential of bioenergy crops to be grown on lands that are less suited for food, pasture, and forests. In both the MiniCAM and IGSM scenarios—MiniCAM and IGSM are the two models with agriculture and land-use submodels—demands on land for bio-fuels cause land prices to increase substantially as compared with the reference because of competition with other agricultural demands.

Figure 4.17. Global and U.S. Commercial Biomass Production across Scenarios

Stabilization scenarios limit the rise in CO₂ concentrations and reduce the CO₂ fertilization effect below that in the reference scenario, which in turn leads to smaller CO₂ uptake by the terrestrial biosphere. The effect is larger and begins earlier the more stringent the stabilization level. For example, Figure 4.18 shows that in the IGSM Level 4 scenario, the effect becomes substantial after 2070 and amounts to about 0.8 GtC/yr in 2100. The IGSM Level 1 scenario begins to depart markedly from the reference before 2050, and the departure from reference grows to approximately 2.0 GtC/yr by 2100. The effect of the diminished CO₂ fertilization effect is to require emissions mitigation in the energy-economy system to be larger by the amount of the difference between the reference aggregate net terrestrial CO₂ uptake and the uptake in the stabilization scenario. The MiniCAM scenarios exhibit similar carbon cycle behavior.

Figure 4.18. Net Terrestrial Carbon Flux to the Atmosphere across Scenarios

1 2

3

4

5 6

7

8

9

10

11 12

13

14

15

16

The MiniCAM scenarios also include a second effect that results from the interaction between the energy system and emissions from changes in land use, such as converting previously unmanaged lands to agricultural production. As in the IGSM scenarios, economic competition among alternative human activities, crops, pasture, managed forests, bioenergy crops, and unmanaged ecosystems determine land use. In the MiniCAM scenarios, this competition also determines land-use change emissions. One implication is increasing pressure to deforest under stabilization in order to clear space for biomass crops (Sands & Leimbach, 2003). This effect is best exhibited in the Level 1 scenarios, in which the terrestrial biosphere becomes a net source of carbon rather than a sink from 2050 to past 2080. The effect subsides after 2080 because commercial biomass production ceases to expand beyond 2080, reducing any further pressure to deforest for biomass crops. Thus, terrestrial uptake in the MiniCAM scenarios is reduced because of the lower CO₂ fertilization effects as in the IGSM scenarios, and it is also reduced by any land use change emissions that derive from the increasing demand for bioenergy crops. The MERGE stabilization scenarios maintain the assumption of a neutral terrestrial biosphere as in the MERGE reference scenario.

17 18 19

20

21

22

23

24

25

26 27

28

29

30

31

32

33

34

The terrestrial emissions reported in Figure 4.18 for the MiniCAM scenarios assume that both fossil fuel and terrestrial carbon are priced. Thus, there is an economic incentive to maintain and/or expand stocks of terrestrial carbon as well as an incentive to bring more land under cultivation to grow bioenergy crops. Pricing terrestrial carbon exerts an important counter-pressure to deforestation and other land-use changes that generate increased emissions. To illustrate this effect, sensitivity cases were run by the MiniCAM modeling group in which no price was applied to terrestrial carbon emissions. These sensitivity analyses showed increased levels of land-use change emissions when terrestrial carbon was not valued, particularly at the more stringent stabilization levels, and the potential for a vicious cycle to emerge. Efforts to reduce emissions in the energy sector created an incentive to expand bioenergy production without a counter incentive to maintain carbon in terrestrial stocks. The resultant deforestation increased terrestrial CO₂ emissions, requiring even greater reductions in fossil fuel CO₂ emissions, even higher prices on fossil fuel carbon, and further increases in the demand for bioenergy, leading, in turn, to additional deforestation. The net terrestrial emissions for the MiniCAM scenarios reported here avoid this vicious cycle because they include a policy architecture that places a value on terrestrial carbon.

35 36 37

38

Despite the significant differences in the treatment of terrestrial systems in the three models, it is interesting to recall from Figure 3.20 that the overall behavior of the three carbon-cycle models is similar.

39 40 41

4.6. Economic Implications of Stabilization

42 43 44

45

46

The economic implications of stabilization include, in most cases, increases in the price of fossil fuels and electricity, along with reductions in economic output. Substantial differences in GHG emissions prices and associated economic costs arise among the modeling groups for each stabilization levels. Among the most important

factors influencing the variation in economic costs are: (1) differences in assumptions – such as those regarding economic growth over the century, the behavior of the oceans and terrestrial biosphere in taking up CO_2 , and opportunities for reduction in non-CO2 GHG emissions – that determine the amount that CO_2 emissions that must be reduced to meet the radiative forcing stabilization levels; and (2) differences in assumptions about technologies, particularly in the second half of the century, to shift final demand to low-CO2 sources such as biofuels, low-carbon electricity, or hydrogen in transportation, industrial, and buildings end uses. Although differences in technology do not strongly emerge until the second half of the century, they cast a shadow over the full century because of the manner in which all three the modeling teams allocated carbon emissions reductions over time.

In most scenarios, carbon prices depress demand for fossil fuels and therefore their producer prices. Electricity producer prices generally increase because of increasing demand for electricity along with substitution to higher cost, lower emitting electricity production technologies. Consumer prices for all fuels (fuel price plus the carbon price for emitted carbon plus any added cost of capturing and storing carbon) are generally higher under the stabilization scenarios due to carbon price. The approaches to Non-CO₂ GHG prices differs among the modeling groups, reflecting differing approaches to the tradeoffs between reductions in the emissions of these GHGs and reductions in CO₂ emissions.

4.6.1. Stabilization and Carbon Prices

As discussed in Section 4.2, all of the modeling teams implemented prices or constraints that provide economic incentives to reduce emissions. The instruments used in the models can be interpreted as the carbon price that would be consistent with either a universal cap-and-trade system or a harmonized carbon tax.

Across models, the more stringent stabilization levels require higher carbon prices because they require larger emissions reductions, as shown in Figure 4.19 and Table 4.6. Stabilization becomes increasingly difficult at the more stringent stabilization levels as can be seen in the difference in carbon prices between Level 2 and Level 1 as compared to that between Level 3 and Level 4.

Figure 4.19. Carbon Prices across Stabilization Scenarios

Table 4.6. Carbon Prices in 2020, 2030, 2050, and 2100, Stabilization Scenarios

Across models, the carbon prices rise roughly exponentially throughout the century (in the IGSM scenarios) or until stabilization is reached (in the MERGE and MiniCAM scenarios). This similarity in the qualitative structure of the carbon price paths reflects the similarity in the approach that the modeling groups took to allocate emissions reductions over time, or *when* flexibility, as discussed in Section 4.2. This approach to *when* flexibility, with a carbon price that rises over time, tends to minimize the present

discounted cost of emissions mitigation over the whole century. It also has the effect of linking future carbon prices to near-term carbon prices in a predictable way. Thus, when there are differences in technology assumptions that mostly appear in the second half of the century or in reference emissions that occur mostly in the middle of the century, the assumption imposed on the price path means that the burden of emissions reduction is spread over the entire century. In this way, forces that do not emerge until mid-century or beyond cast a shadow onto the present.

1 2

At every stabilization level, there is variation in the carbon prices among the models. For example, in the Level 2 scenario the 2100 carbon price in 2100 exceeds \$1700/tonne C in the IGSM scenarios while the carbon prices in the MERGE and MiniCAM scenarios are \$620 to \$460/tonne C. The ratio among the models of carbon prices for other stabilization levels follows the same pattern. The range of emissions prices shown in these scenarios is consistent with other studies in the open literature (IPCC, 2001).

The carbon prices in the scenarios in this study are the result of a complex interplay of differing structural characteristics of the participating models and variation in key parameter values. Nonetheless major differences among carbon prices can be attributed to two influences: (1) the amount that emissions must be reduced to achieve an emissions path to stabilization, and (2) the technologies that are available to facilitate these changes in the economy.

On the first point, Table 4.7 shows the cumulative CO₂ emissions reductions required over the century as simulated by the three models. Differences in total reduction come principally from three aspects of model behavior and assumptions: differences in forces, such as economic growth, that determine emissions in the reference scenario (Tables 3.2 and 3.3, and Figure 3.3); the behavior of the ocean and terrestrial systems in taking up carbon (Figures 4.5 and 4.16); and the technological options available for constraining the emissions of non-CO₂ GHGs (Figures 4.7 and 4.8). For all stabilization levels, the IGSM scenarios require greater CO₂ emissions reductions than the MERGE or MiniCAM scenarios. Indeed, the emissions reductions in the IGSM Level 2 are commensurate with those of the MERGE and MiniCAM Level 1 scenarios. All other things being equal, the greater the required emissions reductions the higher will be the emissions prices required to meet each target.

Table 4.7. Cumulative Emissions Reductions Across Scenarios (GtC through 2100)

The second factor, the modeling of technology, also contributes to the differences among costs. The aggregate effect of differing technological assumptions is illustrated in Figure 4.20, which shows the relationship between the carbon price and percentage emissions reductions in 2050 and 2100. Roughly speaking, these figures represent the marginal abatement cost functions for these periods. Note that the technological opportunities chosen by the three modeling groups are similar in 2050. The implication of this similarity is that if in 2050 the three modeling groups were to determine the carbon price for, say, a 50% reduction in emissions, the results would be similar.

1 2

Figure 4.20. Relationship between Carbon Price and Percentage Abatement in 2050 and 2100

3 4 5

6

7

8

9

10 11

12

13

14

15

16

17

18

19

20

It is in the second half of the century that substantial differences in the marginal abatement cost functions emerge, particularly when the required abatement pushes towards and beyond 60% below the reference level as is the case in the Level 1 and Level 2 scenarios. There is no small set of technology assumptions used by the modeling groups that determines these differences. Among the modeling groups, assumptions about technology vary along a range of dimensions such as the rate of growth in labor productivity, the cost and performance of particular energy supply technologies, the productivity of agriculture and the associated costs of bioenergy, and the ability to substitute among various fuels and electricity in key demand sectors such as transportation. These assumptions are embodied not just in model parameters, but also, as discussed in Chapter 2, in the underlying mathematical structures of the models. As can be seen in Table 2.1, end-use technologies, are, in general, not represented explicitly. None of the participating models, for example, identify multiple steel production technologies or a wide range of vehicle options each with different energy using characteristics. Instead, energy demand responses are represented in relatively aggregate economic sectors (e.g., energy intensive industry or transportation). Other technologies, particularly in energy supply (e.g., CCS) are more likely to be identified specifically.

21 22 23

24

25

26

Three general characteristics of technology bear note with respect to the variation in carbon prices: (1) the availability of low- or zero-carbon electricity production technologies, (2) the supply of non-electric energy substitutes such as biofuels and hydrogen, and (3) the availability of technologies to facilitate substitution toward the use of electricity.

272829

30

31

32

33

34

35

36

All three modeling groups assumed a variety of cost-effective technology options would be available to limit CO₂ emissions from electric power generation. For example, the electric sector is almost fully de-carbonized by the end of the century in all three Level 1 scenarios (Figure 4.21). Electricity is produced with non-fossil technologies (nuclear or renewables) or fossil-fired power plants with carbon capture technology. Thus, although low carbon technologies in the electric power sector do influence the carbon prices, it is forces outside of electric power production that drive costs at higher levels of abatement because options available to the electric power sector can support its almost complete decarbonization.

373839

Figure 4.21. Percentage of World Electricity from Low- or Zero-Emissions Technologies

40 41 42

43

44

45

46

The second technology factor is the set of options available to substitute alternative, nonelectric fuels for fossil energy in end-use sectors, most importantly in transportation. All three modeling groups assumed biofuels as a substitute for fossil fuels in non-electric applications. As discussed in Section 2 and Section 3, production of bioenergy crops must compete with other uses of agricultural lands in IGSM and MiniCAM, which constrains total production of these substitutes. MERGE uses an aggregate parameterization to represent these same constraints. Even with these differing approaches, bioenergy production is similar across the stabilization scenarios. However, because if higher oil prices (Figure 3.7), the IGSM reference scenario includes substantial biofuels (Figure 4.10) so that expansion of biofuels is more limited in the IGSM stabilization scenarios.

In addition to biofuels, the MiniCAM and MERGE scenarios include other non-electric alternatives, and these become important for more stringent emissions reductions. The MERGE scenarios include a generic alternative fuel generated from renewable sources; which could be, for example, hydrogen from solar or wind power. In the MERGE Level 1 scenario, this alternative fuel provides roughly 80% as much non-electric energy as biofuels by 2100. The MiniCAM scenarios include hydrogen production using electricity, nuclear thermal dissociation, and fossil fuels with and without CCS. Though smaller than biofuels, the contribution of hydrogen rises to a little over 15% of global non-electric energy consumption in the Level 1 MiniCAM scenario. Without these additional options included in the MERGE and MiniCAM scenarios, the marginal cost of emissions reductions is higher in the IGSM scenarios, and more of the abatement is met through reductions in energy use (Figure 4.22).

Figure 4.22. Percentage Reduction in Primary Energy Across Scenarios

Another factor influencing carbon prices at higher levels of emissions reduction is the ability to substitute to electricity in end-use sectors, through technologies such as heat pumps, electrically-generated process heat, or electric cars. Were all end uses to easily switch to electricity, then the availability of nearly carbon-free power generation options would allow complete CO₂ emissions reduction at no more than the cost of these generation options. However, assumptions about technologies for electrification differ substantially among the modeling groups. The MERGE and MiniCAM modeling groups assumed greater opportunities for substitution to electricity than did the IGSM modeling group in the second half of the 21st century. As a result the electricity fraction of energy consumption is higher in the MERGE and MiniCAM scenarios, both the reference scenario and the stabilization scenarios, as shown in Figure 4.23. This means that low- or zero-carbon electricity supply technologies can serve more effectively as a low-cost option for emissions reduction, reducing its costs. In the IGSM scenarios, fuel demand for transportation, where electricity is not an option and for which biofuels supply is insufficient, continues to be a substantial source of emissions.

Figure 4.23. Ratio of Global Electricity Production to Primary Energy Consumption

Although the main technological influences discussed above do not emerge for many decades, they influence carbon prices and economic costs from the outset because of the approach the modeling teams took to *when* flexibility, as discussed above. This dynamic view of the stabilization challenge reinforces the fact that actions taken today both

influence and are influenced by the possible ways that the world might evolve in the future.

Finally, there are other structural differences among the approaches taken by the modeling groups that likely play a role in the variation in carbon prices. For example, MERGE and IGSM explicitly track investment, which directly affects gross world product, reducing savings for the next period, with the effect on gross world product accumulating over time, whereas MiniCAM does not include the impacts of emissions reductions on capital accumulation. This difference would tend to lead to higher economic costs in MERGE and IGSM scenarios relative to the MiniCAM scenarios. Similarly, MERGE is a forward-looking model and that behavior allows it to more fully optimize investment over time, whereas in the MiniCAM and IGSM investments may be made in one period that would be regretted in later periods (see Chapter 2). This difference would tend to lead to lower costs in the MERGE scenarios relative to the scenarios from the other two models. Finally, the MiniCAM scenarios include CCS in cement production which allows for cement emissions to be reduced almost to zero at higher stabilization levels. The IGSM and MERGE scenarios include cement production within an aggregate sector so that mitigation options that may be specific to this industry are not explicitly modeled. This omission puts more pressure on emissions reductions elsewhere and raises carbon prices.

4.6.2. Stabilization and Non-CO₂ Greenhouse Gas Prices

Each of the three models employs a different approach to the non-CO₂ GHGs. After CO₂, CH₄ is the next largest component of reference scenario radiative forcing. Emissions of CH₄ vary among the reference scenarios (Figure 3.18). The IGSM reference scenario starts in the year 2000 at about 350 Mt/yr and rises to more than 700 Mt/yr (Figure 4.7), while the MERGE and MiniCAM scenarios begin in the year 2000 with 300 Mt/yr in the year 2000. These are anthropogenic CH₄ emissions, and the differences reflect existing uncertainties in how much of total CH₄ emissions are from anthropogenic and natural sources. CH₄ emissions grow to almost 600 Mt/yr in the MERGE reference scenario. The MiniCAM reference scenario is characterized by a peak in CH₄ emission at less than 400 Mt/yr, followed by a decline to about 300 Mt/yr.

Each of the groups took a different approach to setting a stabilization constraint on CH_4 . The MiniCAM scenarios are based on GWP coefficients, so the price of CH_4 is simply the price of CO_2 multiplied by the GWP – a constant as seen in Figure 4.24.

Figure 4.24. Relative Prices of CH₄ and N₂O to Carbon across Stabilization Scenarios

In contrast, MERGE determines the relative price of CH₄ to carbon in the inter-temporal optimization. The ratio of CH₄ to carbon prices begins very low, although it is higher the more stringent the stabilization goal. The relative price then rises at a constant exponential rate of 9% per year in the Level 2, 3, and 4 stabilization scenarios. The Level 1 stabilization regime begins from a higher initial price of CH₄ and grows at 8% per year

until it approaches a ratio of between 9 and 10 to 1, where it remains relatively constant.

These characteristics of the CH₄ price are the product of an inter-temporal optimization for which a constraint in the terminal value of radiative forcing is the only goal. Manne and Richels (2001) have shown that different patterns are possible if other formulations of the policy goal, such as limiting the rate of change of radiative forcing, are taken into account.

The IGSM scenarios are based on a third approach. CH₄ emissions are limited to a maximum value in each stabilization scenario: Level 4 at 425 Mt/yr, Level 3 at 385 Mt/yr, Level 2 at 350 Mt/yr, and Level 1 at 305 Mt/yr. As a consequence, the ratio of the price of CH₄ to carbon initially grows from one-tenth to a maximum of between 3 and 14 between the years 2050 and 2080 and then declines thereafter. As previously discussed, this reflects an implicit assumption that a long-run requirement of stabilization means that eventually each substance must be (approximately) independently stabilized, and absent an explicit evaluation of damages of climate change, any relative time path of relative GHG prices cannot be determined.

As with CH_4 , reference emissions of N_2O vary across the three modeling groups (Figure 3.17). The IGSM reference trajectory roughly doubles from approximately 11 Mt/yr to approximately 25 Mt/yr. In contrast, the MERGE and MiniCAM reference scenarios are roughly constant over time.

MERGE also sets the price of N_2O as part of the inter-temporal optimization process, as shown in Figure 4.24. Note that the relative price trajectory has a value that begins at roughly the level of the GWP-based relative price used in the MiniCAM scenarios and then rises, roughly linearly with time. The relative price approximately doubles in the Level 4 stabilization scenario, but is almost constant in the Level 1 stabilization scenario. Thus, in the Level 1 scenarios, the relative price path of the MERGE and MiniCAM scenarios is virtually the same.

In contrast, in the IGSM scenarios, stabilization sets a path to a predetermined N_2O concentration for each stabilization level, and the complexity of the price paths in Figure 4.24 shows the difficulty of stabilizing the atmospheric level of this gas. Natural emissions of N_2O are calculated, which vary with the climate consequences of stabilization. The main anthropogenic source, agriculture, has a complicated relationship with the rest of the economy through the competition for land use.

The approaches employed here do not necessarily lead to the stabilization of the concentrations of these gases before the end of the twenty-first century, as concentrations are still rising slowly in some cases but below the stabilization target (Figure 4.3 and Figure 4.25). How the longer term stabilization target was approached was independently developed by each modeling group.

Figure 4.25. N₂O Concentrations across Scenarios

4.6.3. Stabilization and Energy Prices

The carbon price drives a wedge between the producer prices of fuels and the costs to users. Table 4.8 provides an approximation of that of the relationship. A given carbon price has the largest impact on user cost of coal in percentage terms because the fuel price per unit of energy is low, and carbon emissions are relatively high per unit of energy. In comparison, natural gas prices were at historic highs in recent years and CO₂ emissions per unit of energy are low. This means that the carbon price has a relatively smaller effect in comparison to the fuel price.

Table 4.8. Relationship Between a \$100/ton Carbon Tax and Energy Prices

Figure 4.26. World Oil Price, Reference and Stabilization Scenarios

Figure 4.27. United States Mine-Mouth Coal Price, Reference and Stabilization Scenarios

Figure 4.28. United States Natural Gas Producers' Price, Reference and

19 Stabilization Scenarios

Figure 4.29. United States Electricity Price, Reference and Stabilization Scenarios

Stabilization scenarios tend to result in a lower producer price for oil (Figure 4.26). Stabilization at Level 4 has a relatively modest effect on the oil price, particularly prior to 2040, but this effect is stronger the more stringent the level of stabilization. Oil price reductions vary across the three models, ranging from the IGSM scenarios, which show the most pronounced effects, to the MERGE scenarios, which show a substantial effect only in the Level 1 scenario. The effect on world oil prices, in turn, depends on many factors, including how the supply of oil is characterized; the carbon price; and the availability of substitute technologies for providing transportation liquids, such as biofuels or hydrogen.

Coal prices are similarly depressed in stabilization scenarios (Figure 4.27). The effect is mitigated by two features: (1) the assumed availability of CCS technology, which allows the continued large-scale use of coal in power generation in the presence of a positive carbon price and (2) a coal supply schedule that is highly elastic. That is, demand for coal can exhibit large increases or decreases without much change in price. The high elasticity of supply in the MERGE scenarios leaves coal prices largely unchanged across the scenarios, whereas the MiniCAM and IGSM scenarios show lower supply price elasticities and, hence, greater price responses.

 The impact on the natural gas producer price is more complex (Figure 4.28). Natural gas has roughly one-half the carbon-to-energy ratio of coal. Thus, emissions can be reduced without loss of available energy simply by substituting natural gas for coal or oil. As a consequence, two effects on the natural gas producer price work in opposite directions.

First, as the carbon price rises, natural gas tends to be substituted for other fuels, increasing its demand. But natural gas substitutes, such as electricity, bioenergy, or energy-efficiency technologies, will tend to displace it from markets, as happens for the more carbon-intensive fuels. Thus, depending on the strength of these two effects, the producer price of gas can either rise or fall.

1 2

The natural gas price is most affected in the IGSM stabilization scenarios, reflecting the greater substitution of natural gas for coal in IGSM stabilization Levels 2, 3, and 4. At Level 1 stabilization, natural gas use is reduced over the entire period. On balance, the natural gas price is less affected by stabilization in the MERGE and MiniCAM scenarios in which the substitution and conservation effects are roughly offsetting.

While the price that oil and coal producers receive tends to be either stable or depressed, that is not the full cost of using the fuel. Buyers pay the market price plus the value of the carbon emissions associated with the fuel, which is the carbon price times the fuel's carbon-to-energy ratio. If they employ CCS, the carbon emissions are lower, but they face the added cost of CCS. Any additional carbon cost will be reflected in the fuel buyer's fuel price if the carbon taxes, or required permits in a cap-and-trade system, are placed upstream with fuel producers. On the other hand, the actual fuel price impact they see may be similar to the producer price impact if carbon is regulated downstream where the fuel is used. In this case, fuel users would be able to buy fuel relatively inexpensively, but would pay a separate large price for necessary carbon charges associated with emissions.

The effect on the price of electricity is another unambiguous result (Figure 4.29). Because power generators are fossil fuel consumers, the price of electricity contains the implicit carbon price in the fuels used for generation. All of the scenarios exhibit upward pressure on electricity prices, and the more stringent the stabilization level, the greater the upward pressure. The pressure is limited by the fact that there are many options available to electricity producers to lower emissions. These options include, for example, the substitution of natural gas for coal; the use of CCS; the expanded use of nuclear power; the use of bioenergy; and the expanded use of wind, hydro, and other renewable energy sources.

4.6.4. The Total Cost of Stabilization

Assessing the macroeconomic cost of stabilization is not a simple task either conceptually or computationally. From an economic perspective, cost is the value of the loss in welfare associated with undertaking the prescribed policy measures or equivalently, the value of activities that society will not be able to undertake as a consequence of pursuing stabilization. Although the concept is easy enough to articulate, defining an unambiguous measure is problematic.

Stabilization is further complicated by the need to aggregate the welfare of individuals who have not yet been born and who may or may not share present preferences. Even if these problems were not difficult enough, economies can hardly be thought to currently

be at a maximum of potential welfare. Preexisting market distortions impose costs on the economy, and mitigation actions may interact with them so as to reduce or exacerbate their effects. Any measure of global cost also runs into the problem of international purchasing power comparisons discussed in Chapter 3. Finally, climate change is only one of many public goods, and measures to address other public goods (like urban air quality) can either increase or decrease cost. To create a metric to report that is consistent and comparable across the three modeling platforms used in this study, all of these issues would have to be addressed in some way.

Beyond conceptual measurement issues, any measure including gross domestic product, depends on features of the scenario such as the assumed participation by countries of the world, the terms of the emissions limitation regime, assumed efficiencies of markets, and technology availability—the latter including energy technologies, non-CO₂ GHG technologies, and related activities in non-energy sectors (e.g., crop productivity that strongly influences the availability and cost of producing commercial biomass energy). In almost every instance, scenarios of the type explored here employ more or less idealized representations of economic structure, political decision, and policy implementation (i.e., conditions that likely do not accurately reflect the real world, and these simplifications tend to lead to lower mitigation costs).

Finally, assessing welfare effects would require explicit consideration of how the burden of emissions reduction is shared among countries and the welfare consequences of income effects on poorer versus wealthier societies. Of course, if the world were to discover and deploy lower cost technology options than those assumed here, these costs could be lower. On the other hand, if society does not deliver the cost and performance for the technologies assumed in these scenarios, costs could be higher.

While all of the above considerations have not been extensively investigated in the literature, the implications of less-than-ideal implementation have been investigated, and these analyses show that it could increase the costs substantially. Richels et al. (1996) showed that for a simple policy regime, eliminating international *where* and *when* flexibility, while assuming perfect *where* flexibility within countries, could potentially raise costs by an order of magnitude compared to a policy that employed *where* and *when* flexibility in all mitigation activities. Richels and Edmonds (1995) showed that stabilizing CO₂ emissions could be twice as expensive as stabilizing CO₂ concentrations and leave society with higher CO₂ concentrations. Babiker et al. (2000) similarly showed that limits on *where* flexibility within countries can substantially increase costs – although employing *where* flexibility also can increase costs in the context of tax distortions (Babiker et al. 2003a, Babiker et al. 2003b, Babiker et al. 2004, Paltsev et al. 2005).

Figure 4.30 reports the change of gross world product during the twenty-first century in the year in which it occurs measured as by market exchange rates. This information is also displayed in Table 4.9. The use of market exchange rates is a convenient choice given the formulations of the models employed here, but as discussed above and in Chapter 3 the approach has limits (see the Box 3.1 in Chapter 3). Though change in gross

world product is not the most intellectually satisfying measure, it serves as a common reference point.

Figure 4.30. Impacts of Stabilization on Gross World Product across Stabilization Levels

Table 4.9. Percentage Change in Gross World Product in Stabilization Scenarios

The effects on gross world product are tightly linked to the carbon prices. Therefore effects on gross world product in the scenarios follow the same patterns and logic as the carbon prices, which are discussed in substantially greater detail in Section 4.6.1. As with the carbon price, costs rise with increasing stringency of the stabilization level. And, as with the carbon price, there is variation in costs of stabilization among the modeling groups. For example, gross world product in 2100 is reduced by 6.8% in the IGSM Level 2 scenario, while the reduction is less than 1% in the MERGE and MiniCAM Level 2 scenarios. The ratio of stabilization costs among the models at other radiative forcing stabilization levels follows the same pattern.

The cost differences among the models can largely be attributed the same influences discussed in Section 4.6.1: (1) the amount that emissions must be reduced to achieve an emissions path to stabilization, and (2) the technologies that are available to facilitate these changes in the economy. A number of additional, structural differences, such as treatment of capital investment, intertemporal model structure, and emissions reductions opportunities in cement production also lead to differences in prices and costs. As with emissions prices, although technology differences emerge primarily in the second half of the century, their influence felt throughout the century because of the common implementation of *when* flexibility in the policy design.

The aggregate effect of differences in technology assumptions among the modeling groups is small in the first half of the century; the effect of differences in these assumptions is most pronounced in the second half of the century when the deepest reductions in emissions are required, particularly in the Level 1 and Level 2 scenarios. All the modeling groups assumed sufficient opportunities for decarbonizing the electricity sector. However, the MERGE and MiniCAM modeling teams assumed futures that included greater opportunities to develop non-biomass substitutes for fossil fuels and technologies to allow for substitution of electricity for direct fossil applications, such as transportation. Although these differences emerge primarily in the second half of the century, the implications are felt throughout the century because of the manner in which the modeling groups treated *when* flexibility. The rising carbon price links emissions reductions in the long-term to future to emissions reductions in the near-term. A range of additional, structural differences, such as treatment of capital investment, intertemporal model structure, and emissions reductions opportunities in cement production lead to differences in costs.

- 1 Expressed throughout the report is the view that the development of independent sets of
- 2 scenarios using three different models helps to inform common understanding of the
- 3 forces that shape opportunities to stabilize greenhouse gas concentrations. The
- 4 differences discussed here demonstrate the fundamental importance of technology in
- 5 facilitating stabilization—particularly the importance of future technology, even
- 6 developments more than half a century in the future. The scenarios also suggest the
- 7 particular importance of options that facilitate the production of alternative non-electric
- 8 fuels and demand-side technologies that will allow the substitution of electricity for
- 9 current applications of fossil fuels.

10 11

4.7. References

12

- Babiker M, ME Bautista, HD Jacoby, and JM Reilly. 2000. Effects of Differentiating
- 14 Climate Policy by Sector: A U.S. Example. Report No. 73, MIT Joint Program on the
- 15 Science and Policy of Global Change.

16

- 17 Babiker M, G Metcalf, and J Reilly. 2003a. Tax Distortions and Global Climate Policy.
- 18 Journal of Economic and Environmental Management 46:269-287.

19

- Babiker M, L Viguier, J Reilly, AD Ellerman, and P Criqui. 2003b. The Welfare Costs of
- 21 Hybrid Carbon Policies in the European Union. *Environmental Modeling and Assessment*
- 22 8:187-197.

23

- 24 Babiker M, J Reilly, and L Viguier. 2004. Is Emissions Trading Always Beneficial.
- 25 Energy Journal 25(2):33-56.

26

- 27 IPCC Intergovernmental Panel on Climate Change. 2001. Climate Change 2001: The
- 28 Scientific Basis. The Contribution of Working Group I to the Third Assessment Report of
- 29 the Intergovernmental Panel on Climate Change, 944. eds JT Houghton, Y Ding, DJ
- 30 Griggs, M Noguer, PJ van der Linden and D Xiaosu, Cambridge University Press,
- 31 Cambridge, U.K.

32

- 33 Hotelling H. 1931. The Economics of Exhaustible Resources. *Journal of Political*
- 34 *Economy* 39:137-175.

35

- 36 Manne AS and R Richels. 2001. An alternative Approach to Establishing Tradeoffs
- 37 Among Gases. *Nature* 419:675-676.

38

- 39 Paltsev S, H. Jacoby, J Reilly, L Viguier and M Babiker. 2005. Modeling the Transport
- 40 Sector: The Role of Existing Fuel Taxes. Pages 211-238 in *Energy and Environment*, eds
- 41 R Loulou, J-P Waaub, and G Zaccour, Springer, New York.

42

- 43 Peck SC and YH Wan. 1996. Analytic Solutions of Simple Greenhouse Gas Emission
- 44 Models. Chapter 6 in *Economics of Atmospheric Pollution*, eds EC Van Ierland and K
- 45 Gorka, Springer Verlag, New York.

46

1 Reilly J and M Asadoorian. In Press. Mitigation of Greenhouse Gas Emissions From 2 Land Use: Creating Incentives Within Greenhouse Gas Emissions Trading Systems. 3 Climatic Change. 4 5 Richels R and J Edmonds. 1995. The Economics of Stabilizing Atmospheric CO₂ 6 Concentrations. *Energy Policy* 23(4/5):373-78. 7 8 Richels R, J Edmonds, H Gruenspecht, and T Wigley. 1996. The Berlin Mandate: The 9 Design of Cost-Effective Mitigation Strategies. Climate Change: Integrating Science, 10 Economics and Policy CP-96-1:29-48. 11 12 Nakicenovic N, WD Nordhaus, R Richels, and FL Toth (eds.), International Institute for 13 Applied Systems Analysis, Laxenburg, Austria. 14 15 Sarofim MC, CE Forest, DM Reiner, and JM Reilly. 2005. Stabilization and Global 16 Climate Policy, Global and Planetary Change 47:266-272. Accessed as MIT Joint Program on the Science and Policy of Global Change Reprint No. 2005-5 at 17 18 http://mit.edu/globalchange/www/. 19 20 Sands, R., and M. Leimbach, 2003, Modeling Agriculture and Land Use in an Integrated 21 Assessment Framework, *Climatic Change* 56(1):185-210. 22 23 Wigley TML, R Richels, and JA Edmonds. 1996. Economic and Environmental Choices 24 in the Stabilization of Atmospheric CO₂ Concentrations. *Nature*. 379(6562):240-243. 25 26 UN - United Nations. 1992. Framework Convention on Climate Change. United Nations, Table 4.1. Long-Term Radiative Forcing Stabilization Levels, Approximate Distribution among GHGs, and Corresponding Approximate CO_2 Concentration Levels. Note that the approximate distribution of radiative forcing among CO_2 and non- CO_2 gases, and the associated CO_2 concentrations, were used as a guide to develop the radiative forcing stabilization levels. The actual distribution among gases and resulting CO_2 concentrations do not exactly match these approximate levels in any of the scenarios. Only the total radiative forcing level is binding.

	Total Radiative Forcing from GHGs (Wm ⁻²)	Approximate Contribution to Radiative Forcing from non-CO ₂ GHGs (Wm ⁻²)	Approximate Contribution to Radiative Forcing from CO ₂ (Wm ⁻²)	Corresponding CO ₂ Concentration (ppmv)
Level 1	3.4	0.8	2.6	450
Level 2	4.7	1.0	3.7	550
Level 3	5.8	1.3	4.5	650
Level 4	6.7	1.4	5.3	750
Year 1998	2.11	0.65	1.46	365
Preindustrial	0	0	0	275

Table 4.2. Radiative Forcing in the Year 2100 Across Scenarios.

		Radiative Forcing in 2100 (Wm ⁻² relative to preindustrial)		
Stabilization Level	Long-Term Radiative Forcing Limit (Wm ⁻² relative to preindustrial)	IGSM	MERGE	MiniCAM
Reference	No Constraint	8.6	6.6	6.4
Level 4	6.7	6.1	6.2	6.1
Level 3	5.8	5.4	5.7	5.5
Level 2	4.7	4.4	4.7	4.5
Level 1	3.4	3.5	3.4	3.4

Table 4.3. CO_2 Concentrations in the Year 2100 Across Scenarios (ppmv). Note that the approximate distribution CO_2 concentrations were used as a guide to develop the radiative forcing stabilization levels. The models were required to meet the total radiative forcing limits.

		CO ₂ Concentration in 2100 (ppmv)			
Level	Approximate Long- Term CO ₂ Concentration Limit (ppmv)	IGSM	MERGE	MiniCAM	
Reference	-	875	711	746	
Level 4	750	677	670	716	
Level 3	650	614	619	656	
Level 2	550	526	535	562	
Level 1	450	451	426	456	

Table 4.4. Global Annual CO_2 Capture and Storage in 2030, 2050, and 2100 for Four Stabilization Levels.

		Annual Global CCS (GtC/yr)					
Stabilizatio							
n Level	Year	IGSM	MERGE	MiniCAM			
	2030	0.01	0.00	0.09			
Level 4	2050	0.44	0.00	0.15			
	2100	4.12	2.31	0.72			
	2030	0.05	0.00	0.10			
Level 3	2050	0.83	0.00	0.19			
	2100	4.52	4.79	2.75			
	2030	0.12	0.00	0.13			
Level 2	2050	1.96	0.44	0.38			
	2100	4.97	6.63	5.56			
	2030	0.37	0.66	0.82			
Level 1	2050	2.76	2.24	2.95			
	2100	4.44	7.17	6.23			

Table 4.5. Global Cumulative CO_2 Capture and Storage in 2050 and 2100 for Four Stabilization Levels

		Cumulative Global Carbon Capture and Storage (GtC)				
Stabilization Level	Year	IGSM	MERGE	MiniCAM		
	2030	0.0	0.0	1.1		
Level 4	2050	3.6	0.0	3.4		
	2100	91.7	21.1	20.7		
	2030	0.2	0.00	1.2		
Level 3	2050	8.5	0.0	4.0		
	2100	152.8	64.2	51.8		
	2030	0.5	0.0	1.5		
Level 2	2050	19.5	3.2	6.4		
	2100	208.0	187.7	144.2		
	2030	1.8	7.4	6.9		
Level 1	2050	36.7	32.4	43.0		
	2100	230.6	272.5	278.0		

Table 4.6. Carbon Prices in 2020, 2030, 2050, and 2100 for Each Stabilization Scenario and Model.

	2020 (\$/tonne C)			2030 (\$/tonne C)		
Stabilization						
Level	IGSM	MERGE	MiniCAM	IGSM	MERGE	MiniCAM
Level 4	\$18	\$1	\$1	\$26	\$2	\$2
Level 3	\$30	\$2	\$4	\$44	\$4	\$7
Level 2	\$75	\$8	\$15	\$112	\$13	\$26
Level 1	\$259	\$110	\$93	\$384	\$191	\$170

	2050 (\$/tonne C)			2100 (\$/tonne C)		
Stabilization						
Level	IGSM	MERGE	MiniCAM	IGSM	MERGE	MiniCAM
Level 4	\$58	\$6	\$5	\$415	\$67	\$54
Level 3	\$97	\$11	\$19	\$686	\$127	\$221
Level 2	\$245	\$36	\$69	\$1,743	\$466	\$420
Level 1	\$842	\$574	\$466	\$6,053	\$609	\$635

Table 4.7: Cumulative Emissions Reductions from the Reference Scenarios across Models in the Stabilization Scenarios (GtC through 2100)

	IGSM	MERGE	MiniCAM
Level 4	472	112	97
Level 3	674	258	267
Level 2	932	520	541
Level 1	1172	899	934

Table 4.8. Relationship Between a \$100/tonne Carbon Tax and Energy Prices.

Fuel	Base Cost (\$2005)	Added Cost (\$)	Added Cost (%)
Crude Oil (\$/bbl)	\$60.0	\$12.2	20%
Regular Gasoline (\$/gal)	\$2.39	\$0.26	11%
Heating Oil (\$/gal)	\$2.34	\$0.29	12%
Wellhead Natural Gas (\$/tcf)	\$10.17	\$1.49	15%
Residential Natural Gas (\$/tcf)	\$15.30	\$1.50	10%
Utility Coal (\$/short ton)	\$32.6	\$55.3	170%
Electricity (c/kWh)	9.6	1.76	18%

Source: Bradley et al. 1991, updated with U.S. average prices for the 4th quarter of 2005 as reported by DOE, EIA, Short-Term Energy and Winter Fuels Outlook October 10th, 2006 Release

Table 4.9. Percentage Change in Gross World Product in Stabilization Scenarios.

Level 1

	2020	2040	2060	2080	2100
IGSM	2.1%	4.1%	6.7%	10.1%	16.1%
MERGE	0.7%	1.4%	1.9%	1.8%	1.5%
MiniCAM	0.2%	0.7%	1.3%	1.3%	1.2%

Level 2

	2020	2040	2060	2080	2100
IGSM	0.5%	1.2%	2.3%	3.9%	6.8%
MERGE	0.0%	0.1%	0.4%	0.6%	0.8%
MiniCAM	0.0%	0.1%	0.3%	0.5%	0.6%

Level 3


	2020	2040	2060	2080	2100
IGSM	0.2%	0.4%	0.9%	1.8%	3.1%
MERGE	0.0%	0.0%	0.1%	0.2%	0.3%
MiniCAM	0.0%	0.0%	0.0%	0.1%	0.3%

Level 4


	2020	2040	2060	2080	2100
IGSM	0.1%	0.2%	0.4%	0.9%	1.7%
MERGE	0.0%	0.0%	0.0%	0.1%	0.2%
MiniCAM	0.0%	0.0%	0.0%	0.0%	0.0%

Figure 4.1. Total Radiative Forcing by Year Across Scenarios (Wm⁻²). Radiative forcing trajectories (Wm⁻² increase from preindustrial) differ among the stabilization scenarios but are similar among models in the stabilization scenarios. The similarity across models is reflects the design of the scenarios. Radiative forcing is stabilized or close to being stabilized this century in the Level 1 and Level 2 scenarios. Radiative forcing remains below the Level 3 and Level 4 targets in 2100, allowing for a gradual approach to radiative forcing stabilization levels in the following century.







Level 4 Scenarios



Level 2 Scenarios



Level 3 Scenarios



Level 1 Scenarios





Figure 4.2. Total Radiative Forcing by Gas in 2100 Across Scenarios (Wm⁻² relative to preindustrial). CO₂ is the main contributor to radiative forcing by the end of the century. The IGSM reference scenario has the highest contribution from non-CO₂ GHGs among the three models. The MERGE stabilization scenarios have the highest contribution from non-CO₂ GHGs among the three models, implying greater non-CO₂ control efforts in the IGSM scenarios than in the MERGE scenarios. Contributions from non-CO₂ GHGs are lowest in the MiniCAM scenarios, reflecting, in part, assumptions about control of these substances for non-climate reasons.







Level 4 Scenarios



Level 2 Scenarios



Level 3 Scenarios



Level 1 Scenarios





Figure 4.3. CO₂ Concentrations Across Scenarios (ppmv). In the reference scenarios, atmospheric concentrations of CO₂ range from about 700 ppmv to 875 ppmv in 2100 across the models, with no sign of slowing. In the stabilization scenarios, differences among models occur because of the relative contribution of other GHGs to meeting the radiative forcing targets, and because for Levels 3 and 4, the scenarios are based on a gradual approach to the stabilization level that will not be reached until the following century.


Reference Scenarios




Level 4 Scenarios

1000 IGSM_Level4 900 MERGE_Level4 800 MINICAM Level4 700 600 500 400 300 200 100 2000 2020 2060 2080 2100 2040 Year

Level 3 Scenarios



Level 2 Scenarios



Level 1 Scenarios




Figure 4.4. CH₄ Concentrations Across Scenarios (ppbv). Differences among the scenarios in CH₄ concentrations are larger than differences in CO₂ concentrations. These differences stem from differences in reference scenarios, assumptions about options for emissions reductions, and the methods used in the scenarios for determining the relative emissions reductions among different GHGs. The MiniCAM scenarios are based on 100-year GWPs. The MERGE scenarios are based on intertemporal optimization, leading to relatively little value for controlling CH₄ until the stabilization level is approached due to the relatively short lifetime of CH₄. The IGSM scenarios are based on independent stabilization of CH₄.


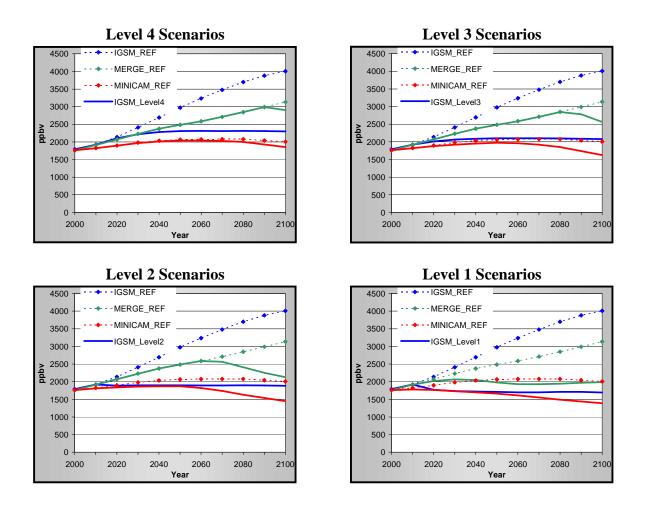


Figure 4.5. Ocean CO₂ Uptake Across Scenarios (GtC/yr). Oceans have taken up approximately one half of anthropogenic emissions of CO₂ since preindustrial times, and future ocean behavior is an important determinant of atmospheric concentrations. The three-dimensional ocean used for the IGSM scenarios shows the least ocean carbon uptake and considerable slowing of carbon uptake even in the reference when carbon concentrations continue to rise. The MERGE reference scenario shows the largest uptake among the three models and greatest reduction from reference in the stabilization scenarios. The MiniCAM scenarios are intermediate at most stabilization levels. At the more stringent stabilization levels, the MERGE and MiniCAM scenarios are similar.

IGSM Scenarios



MERGE Scenarios

Year 2000 2020 2040 2060 2080 2100 0.0 -2.0 GTC/Year -6.0 MERGE_Level1 MERGE Level2 -8.0 MERGE_Level3 -MERGE_Level4 MERGE_REF -10.0 -12.0

MiniCAM Scenarios






Figure 4.6. Fossil Fuel and Industrial CO₂ Emissions Across Scenarios (GtC/yr). Fossil fuel CO₂ emissions vary among the reference scenarios, but the three differing emissions trajectories lead to emissions in 2100 in the range of 22.5 GtC to 24.0 GtC. Level 1 stabilization would require large global emissions reductions as soon as the stabilization policy was put in place (as the scenarios were designed, after 2012). Across the scenarios, emissions are below current levels by 2100 in the Level 1 and Level 2 scenarios. Emissions peak sometime around the mid-century to early in the next century in the Level 3 and Level 4 scenarios and then begin a decline that would continue beyond 2100.







Level 4 Scenarios



Level 2 Scenarios



Level 3 Scenarios



Level 1 Scenarios




Figure 4.7. CH₄ Emissions Across Scenarios (Mt CH₄/yr). Emissions of anthropogenic CH₄ vary widely among the scenarios, including differences in year 2000 emissions that reflect uncertainty about these emissions. With current concentrations and destruction rates relatively well known, the difference in current levels means that IGSM scenarios ascribe relatively more to anthropogenic sources and relatively less to natural sources than do the MERGE and MiniCAM scenarios. Wide differences in scenarios for the future reflect differing modeling approaches, outlooks for activity levels that lead to emission reductions, and assessments of whether emissions will be reduced in the absence of climate policy.



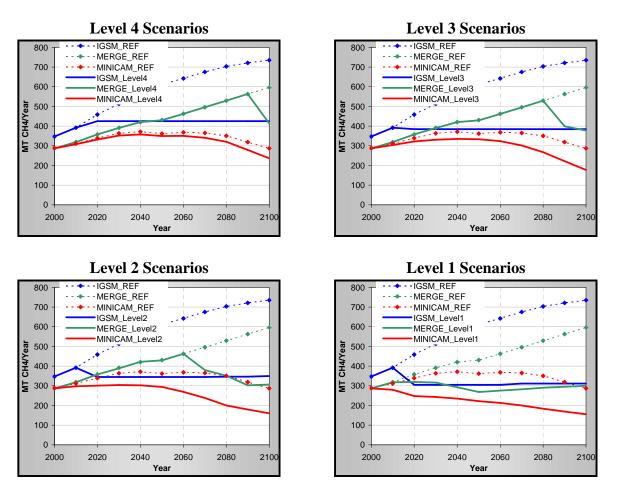


Figure 4.8. N_2O Emissions Across Scenarios (Mt N_2O /yr). Anthropogenic emissions of N_2O are similar across models in the stabilization scenarios despite large differences in the reference scenarios.

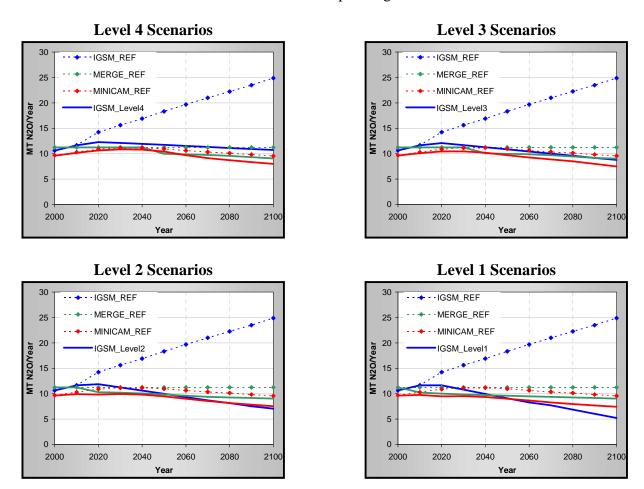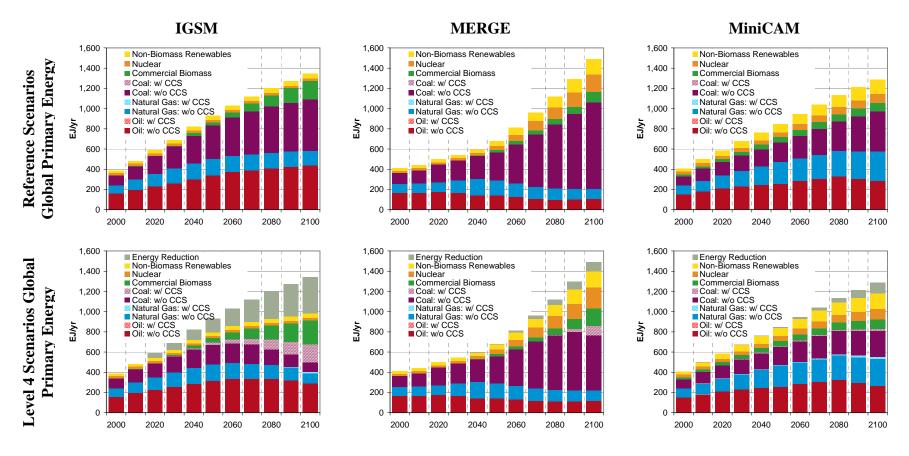

THIS PAGE INTENTIONALLY LEFT BLANK

Figure 4.9. Global Primary Energy by Fuel Across Scenarios (EJ/yr). The transition to stabilization, reflected most fully in the Level 1 scenario, means nearly complete phase-out of fossil fuel use unless carbon capture and sequestration is employed. Under the most stringent stabilization level, the scenarios include a 7-fold to 14-fold increase in non-fossil energy sources from present levels. In the IGSM scenarios, more of the carbon reduction is met through demand reductions than in the scenarios from the other two models, with 2100 energy use cut by up to one-half relative to the reference scenario in 2100. In the MiniCAM Level 1, in contrast, total energy is reduced by less than 20%. Levels 2, 3, and 4 require progressively less transformation compared with the reference scenario in the coming century, delaying these changes until beyond 2100.



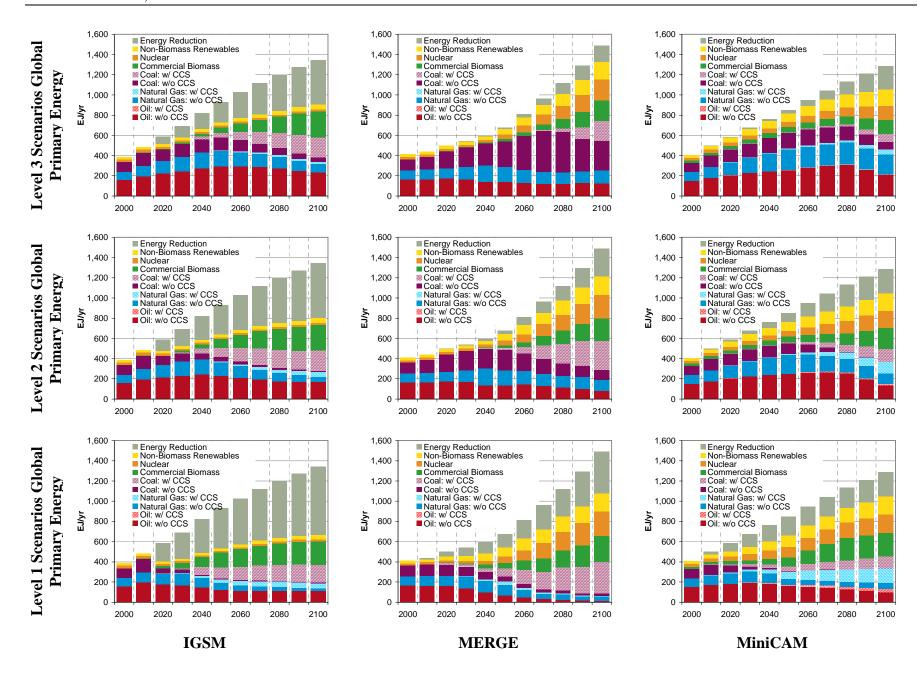
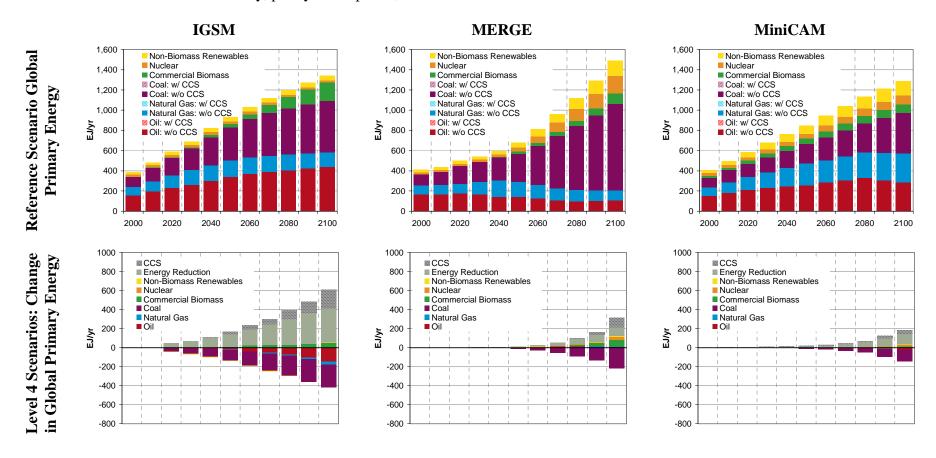


Figure 4.10. Change in Global Primary Energy by Fuel Across Stabilization Scenarios, Relative to Reference Scenarios (EJ/yr): Fuel-source changes from the reference to the stabilization scenarios show significant transformation of the energy system for all three models. The transformation can begin later under the Levels 3 and 4 targets, but would need to continue into the following century. The transformation includes reductions in energy consumption, increased use of carbon-free sources of energy (biomass, other renewables, and nuclear), and addition of carbon capture and sequestration. The contribution of each varies among the models, reflecting different assessments of the economic viability, policy assumptions, and resource limits.



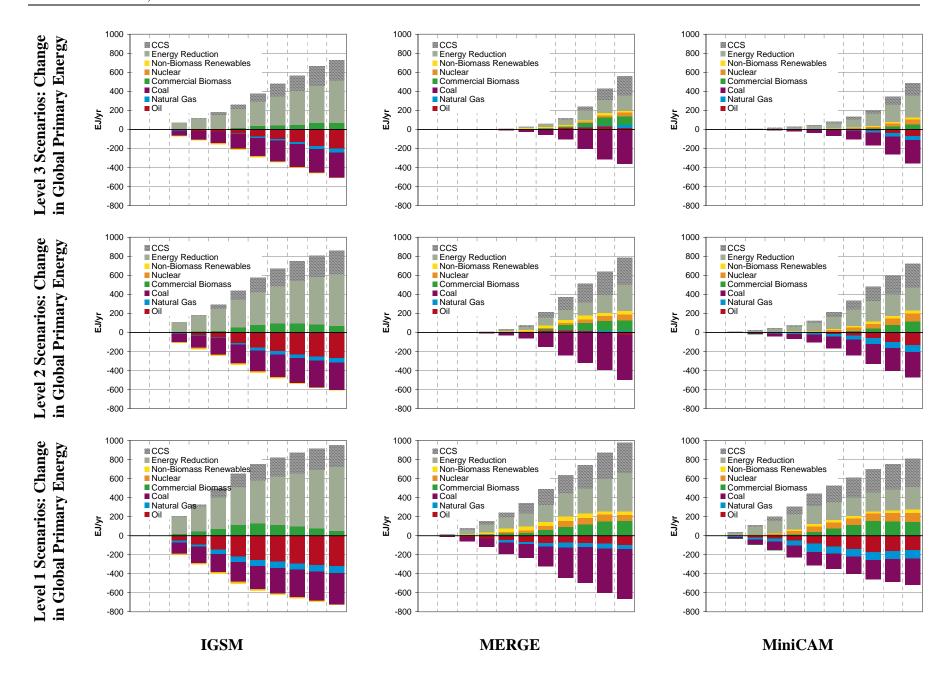
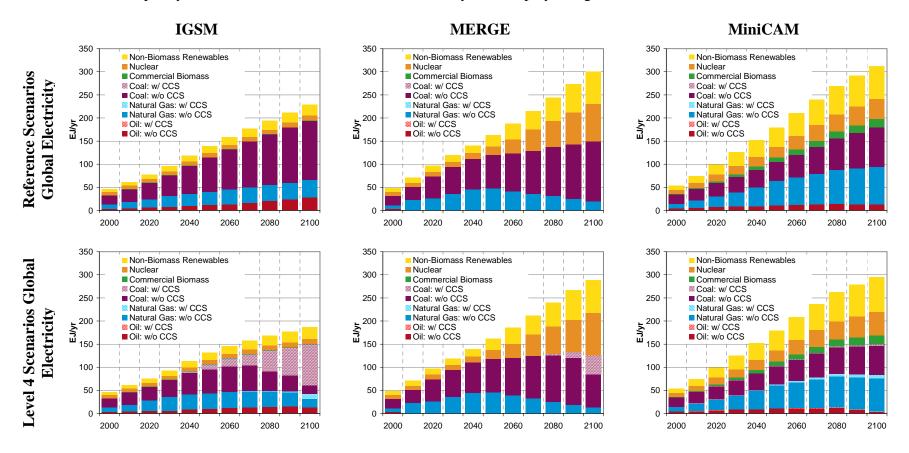


Figure 4.11. Global Electricity by Fuel Across Scenarios (EJ/yr). Global electricity sources would need to be transformed to meet stabilization goals. CCS is important in the scenarios from all three models; thus, while coal use is reduced, it remains an important electricity fuel. Use of CCS is the main supply response in the IGSM scenarios, in part because nuclear power is limited by assumption to reflect non-climate policy concerns. Nuclear and renewable electricity sources play a larger role in the MERGE and MiniCAM scenarios.



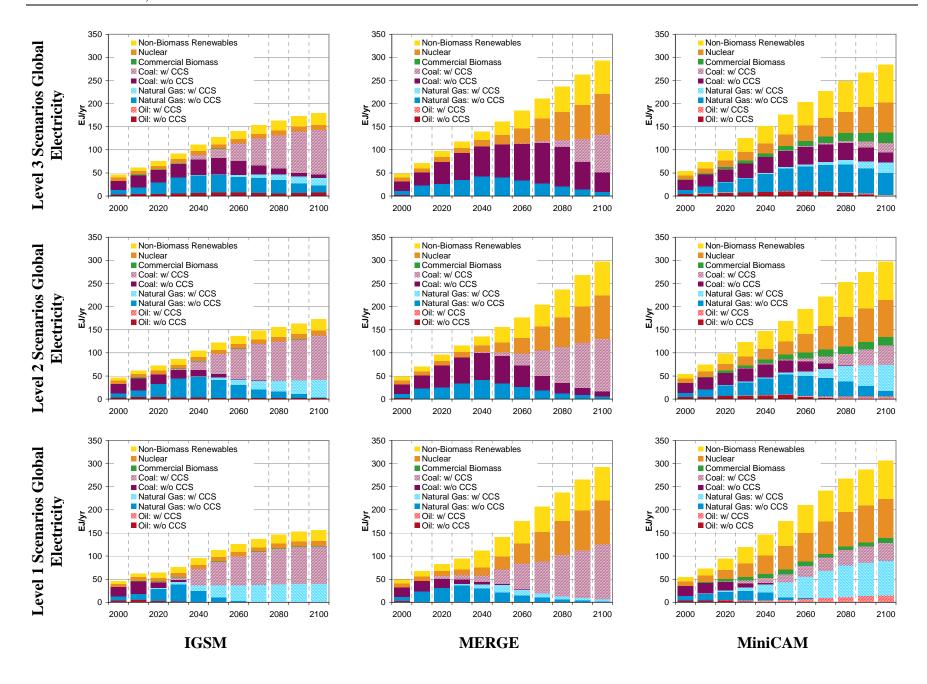
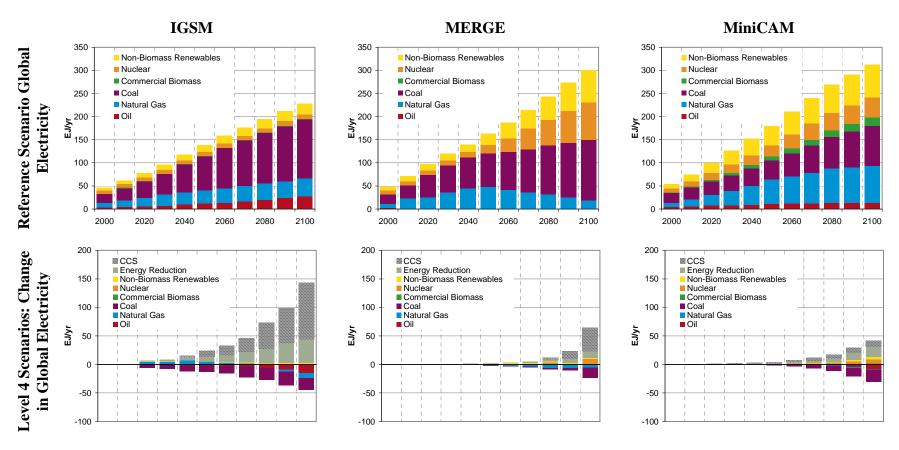


Figure 4.12. Changes in Global Electricity by Fuel Across Stabilization Scenarios, Relative to Reference Scenarios (EJ/yr). There are multiple electricity technology options that could be competitive in the future, and different assessments of their relative economic viability, reliability, and resource availability lead to different scenarios for the global electricity sector in reference and stabilization scenarios across the models. In the IGSM scenarios, there is relatively little change in the electricity sector in the reference, with continued reliance on coal. In the MERGE and MiniCAM scenarios, there are large transformations from the present in the reference. In the scenarios from all three models, large changes relative to the reference scenario would be required to meet the stabilization targets. In the less stringent scenarios, many of these changes would be pushed into the next century. In all of the stabilization scenarios, the relative proportion of electricity in energy consumption increases, so the reductions in electricity production are not as large as for primary energy.



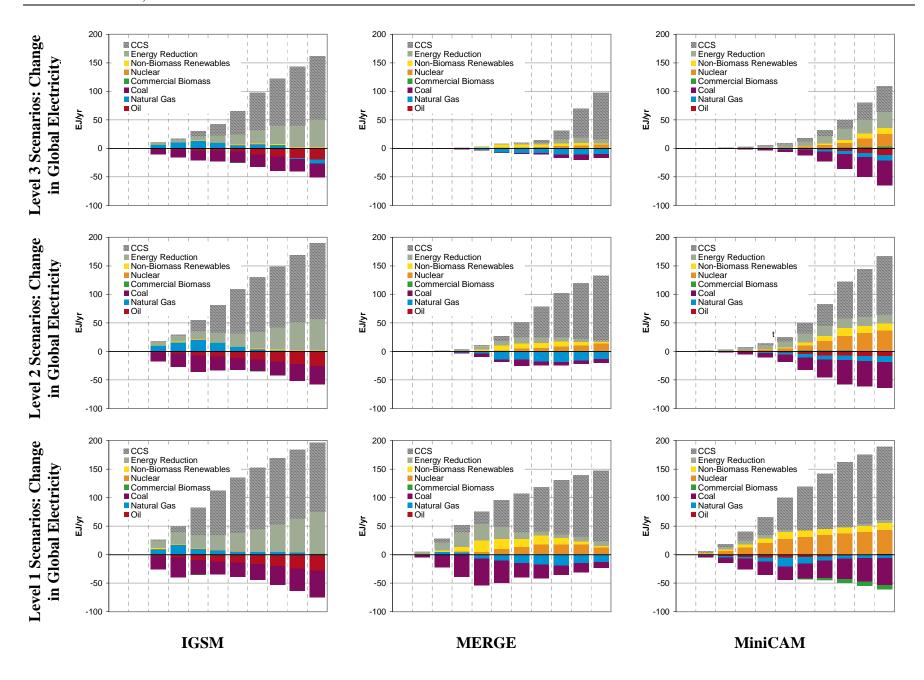
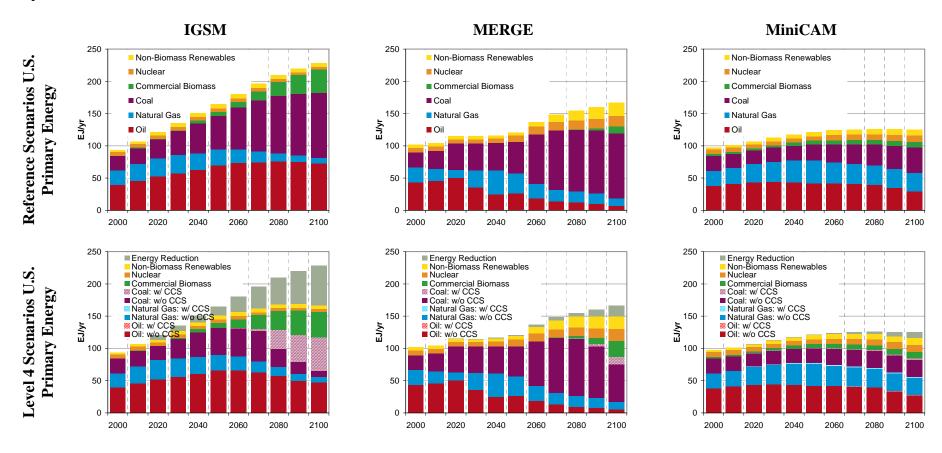


Figure 4.13. U.S. Primary Energy by Fuel Across Scenarios (EJ/yr). U.S. primary energy use under the four stabilization levels differs considerably among the three models. All the scenarios exhibit a diverse energy mix throughout the century, although the IGSM scenarios include relatively less nuclear power and non-biomass renewables than the other models. The relative contributions of different technologies over the course of the century depend on the specific cost and performance characteristics of the competing technologies represented in the scenarios.



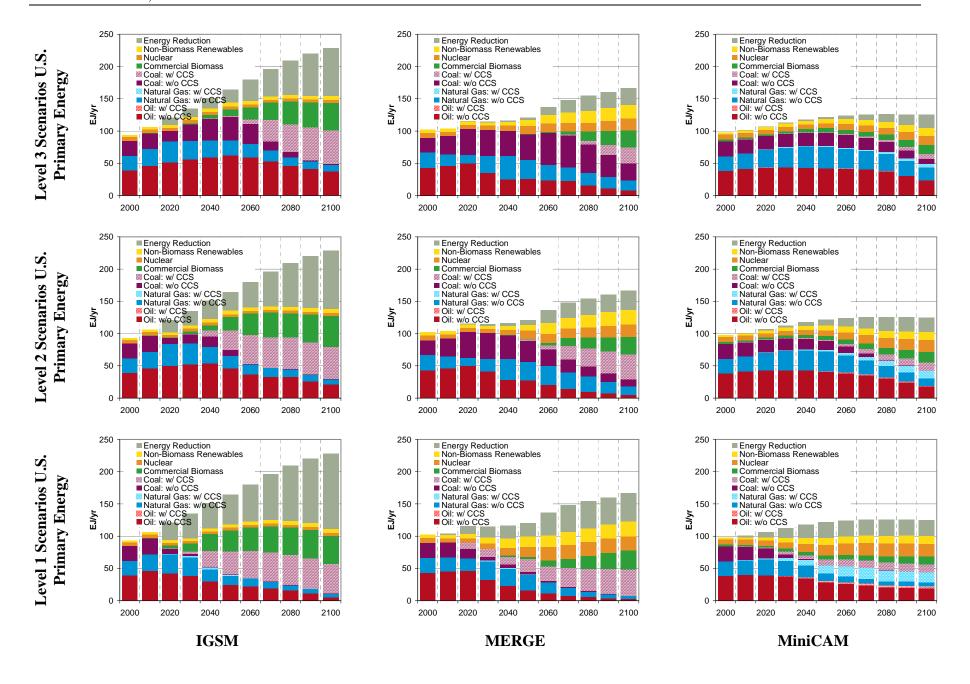
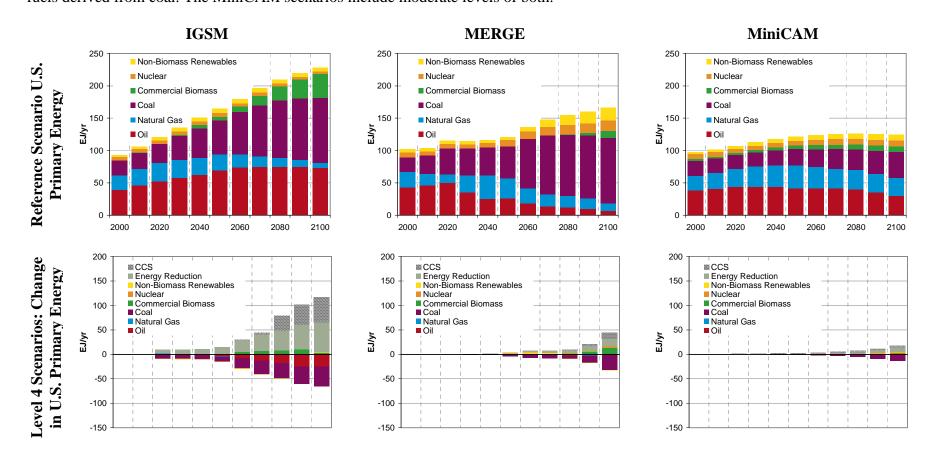


Figure 4.14. Changes in U.S. Primary Energy by Fuel Across Stabilization Scenarios, Relative to Reference Scenarios (EJ/yr). Scenarios for the U.S. energy system under reference and the changes needed under the stabilization scenarios involve transformations similar to those reported for the global system. Although it is not illustrated in this figure, one difference is the transformation from conventional oil and gas to synthetic fuel production derived from shale oil or coal. The IGSM scenarios include heavy use of shale oil in the reference scenario with some coal gasification, whereas the MERGE scenarios are based more heavily on synthetic liquid and gaseous fuels derived from coal. The MiniCAM scenarios include moderate levels of both.



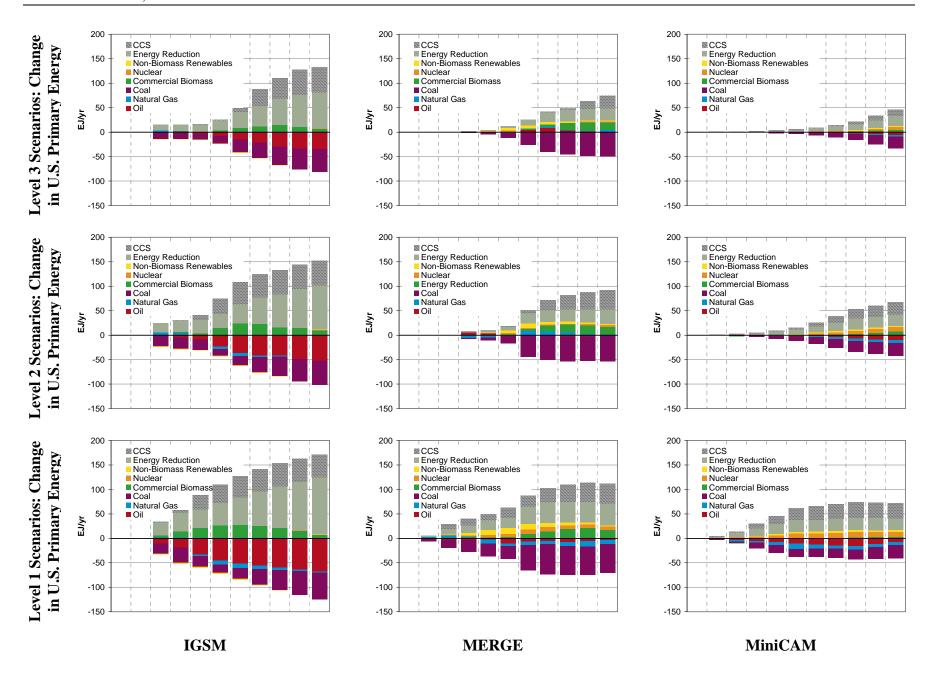
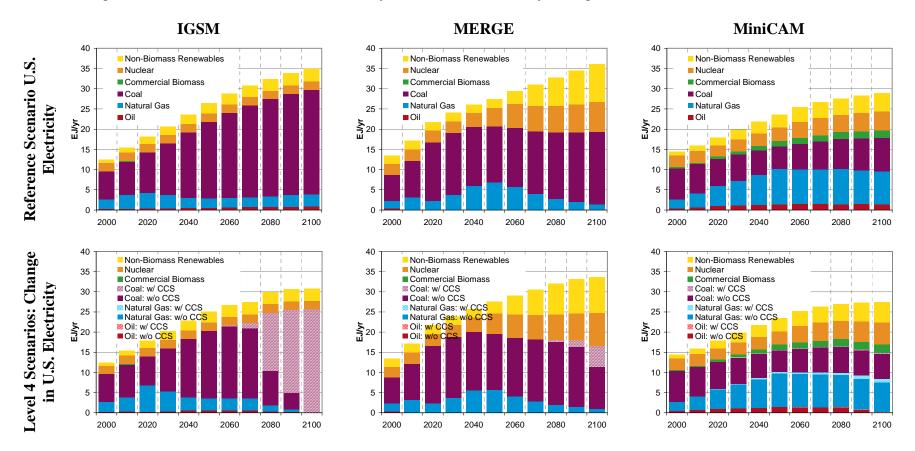


Figure 4.15. U.S. Electricity by Fuel Across Scenarios (EJ/yr). In these scenarios, U.S. electricity-generation sources and technologies are substantially transformed to meet stabilization targets. CCS figures in all the stabilization scenarios, but the contribution of other sources and technologies as well as the total amount of electricity used differ substantially among the three models.



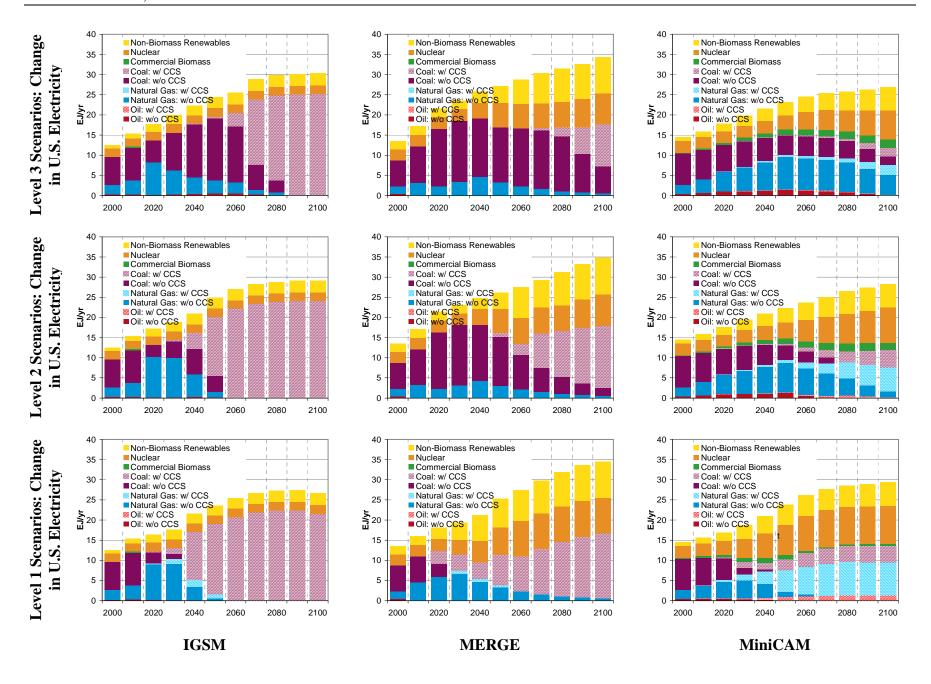
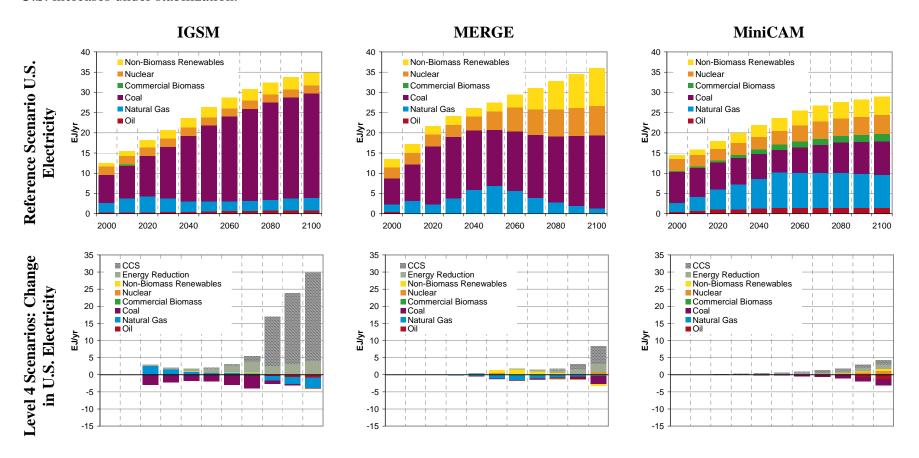


Figure 4.16. Change in U.S. Electricity by Fuel Across Stabilization Scenarios, Relative to Reference Scenarios (EJ/yr).

Transformation of the U.S. electricity-generation sector in these scenarios implies increasing use of low- or zero-carbon technologies, such as renewable electricity sources, nuclear power, and fossil generation with CCS, and decreasing use of fossil fuel technologies that freely emit CO_2 to the atmosphere. Natural gas use increases in the early part of the century in several scenarios as a lower carbon substitute for coal-fired generation. In all of the stabilization scenarios, the relative proportion of electricity in energy consumption increases, so the reductions in electricity production are not as large as for primary energy. In one scenario (MiniCAM Level 1), electricity production in the U.S. increases under stabilization.



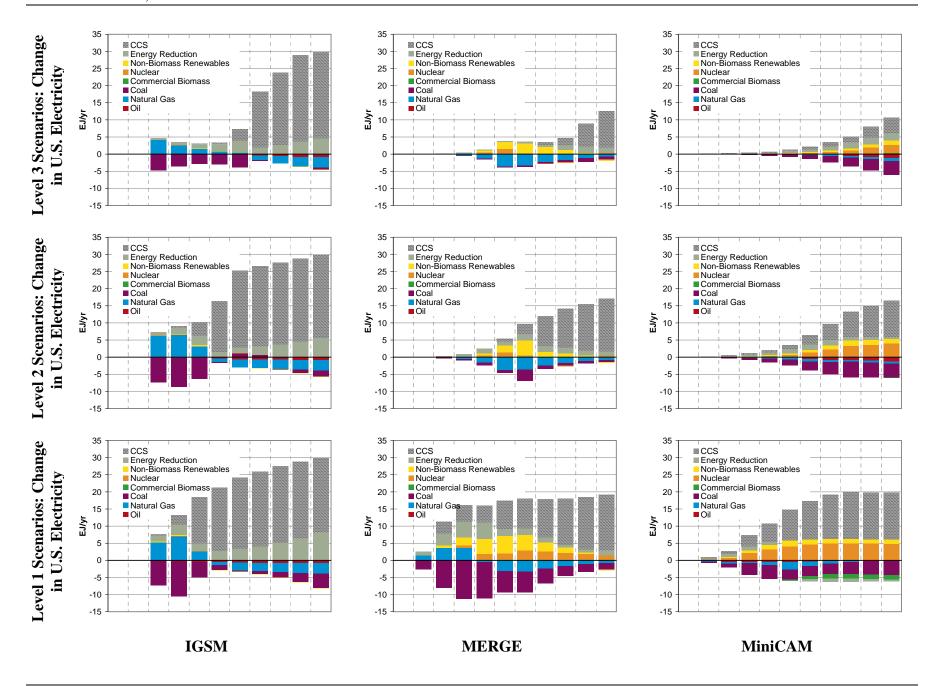


Figure 4.17. Global and U.S. Commercial Biomass Production Across Scenarios. Scenarios of the potential for commercial biomass production for the world and the U.S. are similar in magnitude and behavior among the models. Commercial biomass production increases over time in the reference scenarios due in large part to technological improvements in bioenergy crop production and increasing demand for liquid fuels. Stabilization increases the demand for bioenergy crops, causing production to increase more rapidly and to reach higher levels than in the reference scenario. Dramatic growth in bioenergy crop production raises important issues about the attendant increases in the land that is devoted to these crops, including competition with other agricultural crops, encroachment into unmanaged lands, and water and other resource and environmental impacts.



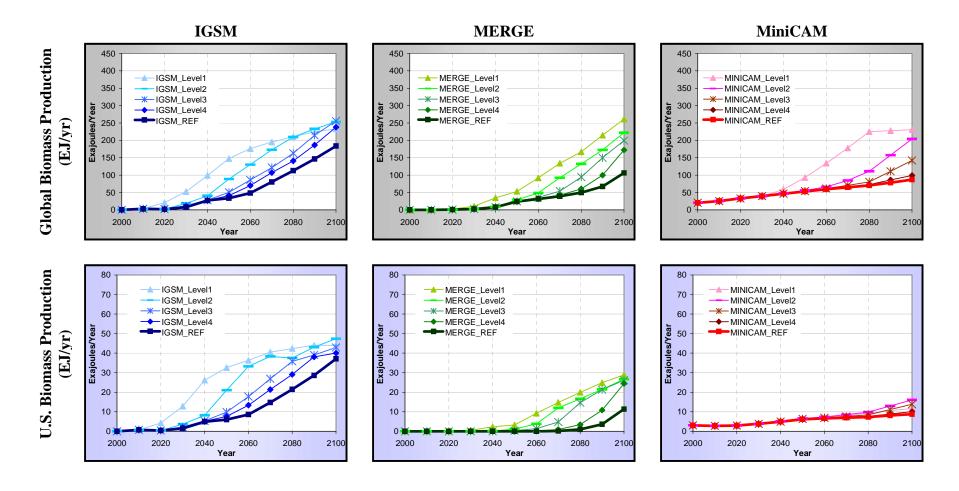


Figure 4.18. Net Terrestrial Carbon Flux to the Atmosphere Across Scenarios (GtC/yr). The net terrestrial carbon flux to the atmosphere, under reference and stabilization levels, reflects differences in the model structures for processes that remain highly uncertain. The MERGE scenarios are based on the assumption of a neutral biosphere. The IGSM and MiniCAM scenarios generally represent the land as a growing carbon sink, with the exception of the Level 1 MiniCAM scenario, in which increased demand for land for biomass production leads to conversion and carbon loss. This effect is particularly strong prior to 2080 in the Level 1 MiniCAM scenario.

IGSM Scenarios



MERGE Scenarios



MiniCAM Scenarios




Figure 4.19. Carbon Prices Across Stabilization Scenarios (\$/tonne C). Stabilization implies a cost for emitting carbon. In all the scenarios, this price rises, by design, over time until stabilization is achieved (or the end-year 2100 is reached), and the prices are higher the more stringent is the stabilization level. There are substantial differences in carbon prices between MERGE and MiniCAM scenarios, on the one hand, and the IGSM scenarios on the other. Differences between the models reflect differences the necessary emissions reductions for stabilization and differences in the technologies that might facilitate carbon emissions reductions, particularly in the second half of the century.

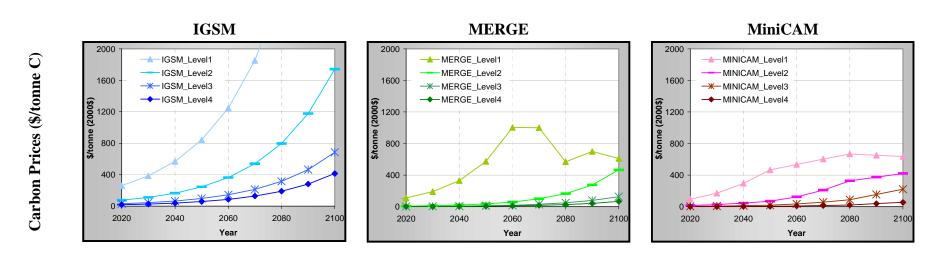


Figure 4.20. Ratio of Relationship Between Carbon Price and Percentage Reductions in Emissions in 2050 and 2100. The relationship between carbon price and percentage reductions in emissions is very similar among the models in 2050. In 2100, a given percentage emissions reduction is generally more expensive in the IGSM scenarios than in the MERGE and MiniCAM scenarios. The difference in 2100 is due, in large part, to different assumptions regarding the technologies available to facilitate emissions reductions in the second half of the century, with IGSM scenarios assuming relatively fewer or more costly options than the other two models. (Note that CO₂ emissions vary across the reference scenarios from the three modeling groups, so that similar percentage reductions, as shown in this figure, imply differing levels of total emissions reduction.)






Figure 4.21. Percentage of World Electricity from Low-or Zero-Emissions Technologies. All three modeling groups assumed sufficient technological options to allow for substantially reduced carbon emissions from electric power productions. Options include fossil power plants with CCS, nuclear power, and renewable energy such as hydroelectric power, wind power, and solar power. In the Level 1 Scenarios, the electricity sector is almost fully decarbonized by the end of the century in all of the models.

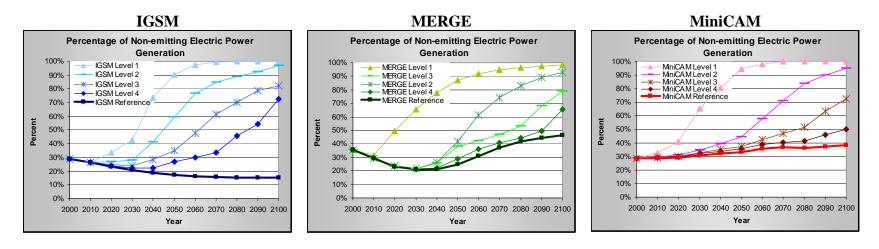




Figure 4.22. Percentage Reduction in World Primary Energy Consumption. Differences in technological opportunities result in different aggregate approaches to emissions reductions. The IGSM scenarios include greater reductions in primary energy consumption than the MERGE and MiniCAM scenarios because fewer technological opportunities, on both the demand and supply side, are available for emissions reductions through substitution to low or zero-carbon energy sources.








Figure 4.23. Ratio of Global Electricity Production to Primary Energy Consumption. Efforts to constrain CO₂ emissions result in increased use of electricity as a fraction of total primary energy in all three of the models. This is because all three modeling teams assumed lower cost technology options for reductions in emissions from electricity production than for substitution of fossil fuels in direct uses such as transportation. The MERGE and MiniCAM scenarios generally include greater electrification than the IGSM scenarios, with MiniCAM having the highest proportion of electricity to primary energy. Greater opportunities to electrify reduce the economic impacts of stabilization.

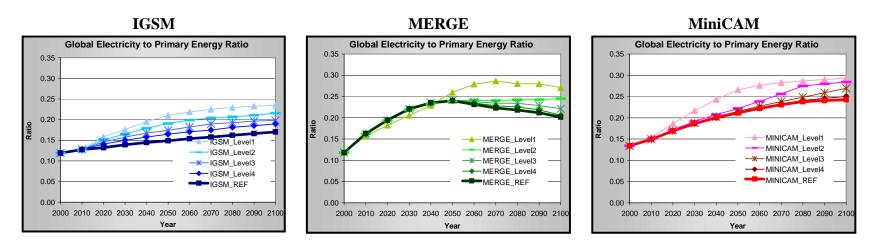


Figure 4.24. Relative Prices of CH₄ and N₂O to Carbon Across Scenarios (CH₄ in log scale). Differences in the relative prices of CH₄ and N₂O to carbon reflect different treatments of this tradeoff, often referred to as *what* flexibility. In the MiniCAM scenarios, the tradeoff is based on the GWP of the non-CO₂ GHGs, which are constants, leading to constant ratios of the non-GHG prices to the carbon price. In the MERGE scenarios, relative prices are optimized with respect to the long-run stabilization target. In the IGSM scenarios, stabilization was forced for each gas independently. Emissions were set so that concentrations of CH₄ would stabilize and allowed the CH₄ price path to be determined by changing opportunities for reducing emissions. Given N₂O emissions from agriculture, the relative price of N₂O is very high, in part because reference emissions were high. Lower reference scenario emissions of N₂O for the MERGE and MiniCAM scenarios allowed them to achieve relatively low emissions at lower N₂O prices.



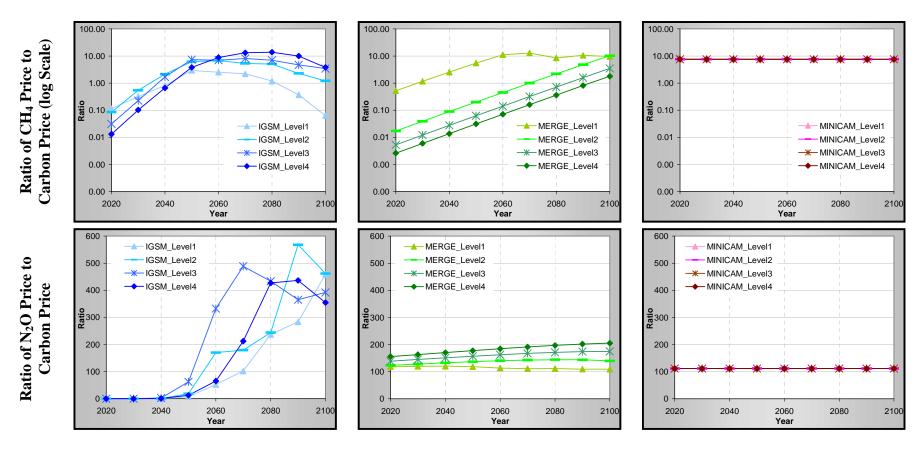


Figure 4.25. N₂O Concentrations Across Scenarios (ppbv). Atmospheric concentrations of N₂O range from about 375 ppbv to 500 ppbv in 2100 across the scenarios, with concentrations continuing to rise in the reference scenarios. Different approaches were used across the models to develop emissions reductions, leading to differences in concentrations between the reference and stabilization scenarios.


Level 4 Scenarios



Level 2 Scenarios



Level 3 Scenarios



Level 1 Scenarios




Figure 4.26. World Oil Price, Reference and Stabilization Scenarios. World oil prices (producer prices) vary considerably across the reference scenarios. In all three models, stabilization tends to depress producer prices relative to the reference. (Note that producer prices as defined here do not include additional costs associated with carbon emissions to the atmosphere through the combustion of fossil fuels.)

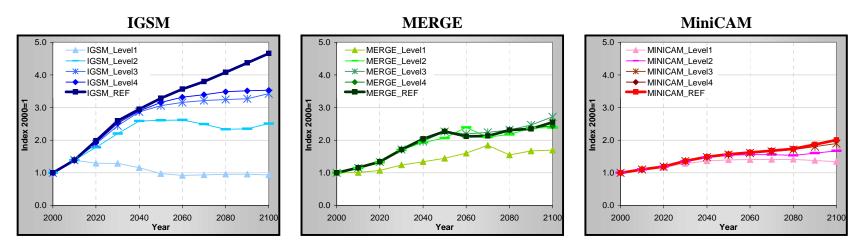


Figure 4.27. U.S. Mine-Mouth Coal Price, Reference and Stabilization Scenarios. U.S. mine-mouth coal price varies among the reference scenarios and stabilization scenarios. In the IGSM and MiniCAM stabilization scenarios, stabilization depresses coal prices, whereas stabilization has no impact on coal prices in the MERGE scenarios reflecting characterization of coal supply as an inexhaustible single grade such that there is no rent associated with the resource. Prices thus reflect the cost capital, labor, and other inputs that are little affected by the stabilization policy. (Note that producer prices as defined here do not include additional costs associated with carbon emissions to the atmosphere through the combustion of fossil fuels.)

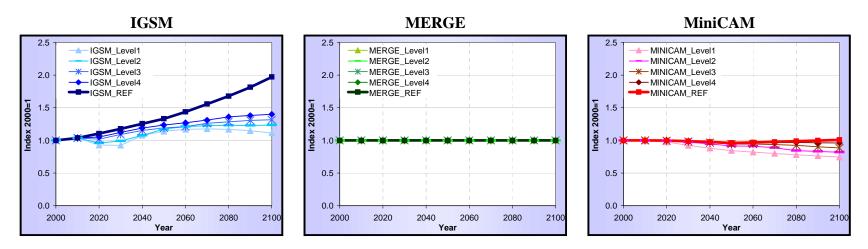


Figure 4.28. U.S. Natural Gas Producers' Price, Reference and Stabilization Scenarios. U.S. natural gas producers' prices vary among the reference scenarios. In the MiniCAM and MERGE scenarios, stabilization has little effect on the gas price. Stabilization at Levels 2, 3, and 4 increases the price of gas in the IGSM scenarios because of substitution toward gas and away from coal and oil. Gas prices fall relative to reference scenario in the IGSM Level 1 stabilization scenario because gas demand is depressed from the tight carbon constraint. (Note that producer prices as defined here do not include additional costs associated with carbon emissions to the atmosphere through the combustion of fossil fuels.)

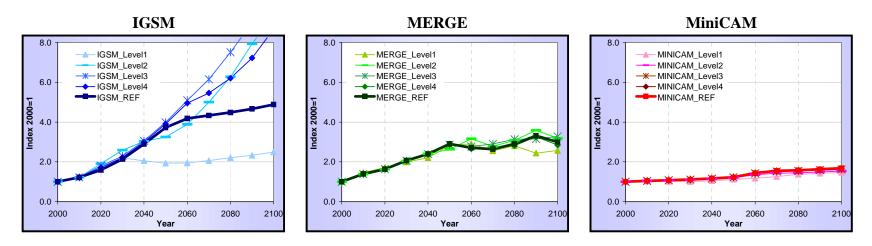


Figure 4.29. U.S. Electricity Price, Reference and Stabilization Scenarios. U.S. electricity prices in the reference scenarios range from little change to about a 50% increase from present levels in IGSM. Under stabilization, producer prices are affected by increasing use of more expensive low- or zero-emissions electricity technologies, including fossil electricity with CCS and non-biomass renewables such as solar and wind power. Across the scenarios, rising fossil fuel prices are partially offset by increasing efficiency of fossil electric-generation facilities. (Note that producer prices as defined here do not include additional costs associated with carbon emissions to the atmosphere through the combustion of fossil fuels.)



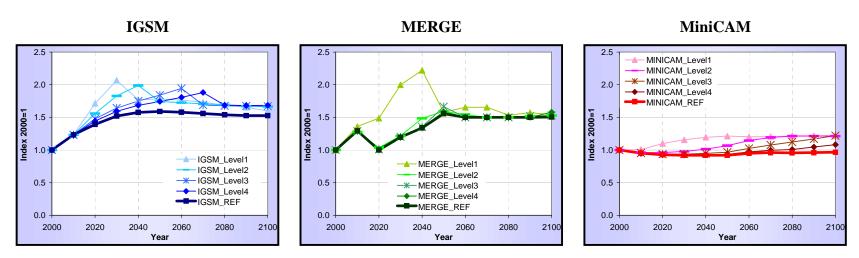


Figure 4.30. Gross World Product Impacts of Stabilization Across Stabilization Levels (percentage). Stabilization imposes costs on the economy, and stated in terms of gross world product, costs rise over time as ever more stringent emissions restrictions are required. The tighter the stabilization target, the higher the cost. Variation in costs among the models reflect differences in reference scenario emissions; differences in the approaches used to distribute carbon emissions reductions over time; and differences in the cost and availability of low-carbon technologies, particularly in the second half of the century.


Level 4 Scenarios




Level 3 Scenarios



Level 2 Scenarios



Level 1 Scenarios



Page intentionally left blank

5.	SUMMARY, APPLICATIONS, AND FUTURE DIRECTIONS

3	5. SUM	MARY, APPLICATIONS, AND FUTURE DIRECTIONS	1
4	5.1. Intro	duction	1
5	5.2. Over	view of the Scenarios	2
6	5.2.1.	Reference Scenarios	2
7	5.2.2.	Stabilization Scenarios	5
8	5.3. Appl	lication of the Scenarios in Further Analysis	9
9		ing Forward	
10	5.4.1.	Technology Sensitivity Analysis	10
11		Consideration of Less Optimistic Policy Regimes	
12		Expansion and/or Improvement of the Land-Use Components of	
13	Models	11	
14	5.4.4.	Inclusion of other Radiatively Important Substances	11
15		Decision Making under Uncertainty	

5.1. Introduction

Scenarios based on formal, computer-based models, such as those developed here, can help illustrate how key drivers such as economic and population growth or policy options lead to particular levels of GHG emissions. An important benefit of models such as these is that they ensure basic accounting identities and consistent application of behavioral assumptions. However, model-based scenarios are only one approach to scenario development, and models designed for one set of purposes may not be the most appropriate for other applications. Thus, the scenarios developed here should be viewed as complementary to other ways of thinking about the future, such as formal uncertainty analyses, verbal story lines, baselines for further model-based scenarios, and analyses using other types of models.

The users of emissions scenarios are many and diverse and include climate modelers and the science community, those involved in national public policy formulation, managers of Federal research programs, state and local government officials who face decisions that might be affected by climate change and mitigation measures, and individual firms, farms, and members of the public. Such a varied clientele implies an equally diverse set of possible needs, and no single scenario exercise can hope to satisfy all of these needs. Scenario analysis is most effective when its developers can work directly with users, and initial scenarios lead to further *what if* questions that can be answered with additional scenarios or by probing more deeply into particular issues. The Prospectus for this research did not, however, prescribe such an interactive approach with a focused set of users. Instead, it called for a set of scenarios that provide broad insights into the energy, economic, and emissions implications of GHG stabilization. For the issue of stabilization, these scenarios are an initial offering to potential user communities that, if successful, will generate further questions and more detailed analysis.

This research focuses on three sets of scenarios, each including a reference scenario and four scenarios in which the radiative forcing form a common suite of GHGs is stabilized at four alternative levels. The stabilization scenarios describe a range of possible long-term targets for global climate policy. The stabilization levels imply a range of policy efforts and levels of urgency, from relatively little deviation from reference scenarios over the course of the century to major deviations starting very soon. Although the Prospectus did not mandate a formal treatment of likelihood or uncertainty, such analysis could be a useful follow-on activity. Here, however, the range of outcomes from the different modeling groups helps to illustrate, if incompletely, the range of possibilities.

1 2

For this research, a scenario is an illustration of future developments based on a model of the economy and the Earth system, applying a plausible set of model parameters and providing a basis for future work. None of the reference scenarios is a prediction or best-judgment forecast of the future, and none can be said to have the highest probability of being right. Nor does any single stabilization scenario provide the most correct picture of the changes to energy and other systems that would be required for stabilization. Instead, each scenario in this report is a thought experiment that helps illuminate the implications of different long-term policy goals.

5.2. Overview of the Scenarios

The scenarios are presented in text and figures in Chapters 3 and 4, and here a summary is provided of some of their key characteristics, some of the magnitudes involved, and the assumptions that lie behind them.

5.2.1. Reference Scenarios

The difficulty in achieving any specified level of atmospheric stabilization depends heavily on the emissions that would occur absent actions to address GHG emissions. In other words, the reference scenario strongly influences the stabilization scenarios. If the reference scenario has cheap fossil fuels and high economic growth, then larger changes to the energy sector and other parts of the economy may be required to stabilize the atmosphere. On the other hand, if the reference scenario shows lower growth and emissions, and perhaps increased exploitation of non-fossil sources even in the absence of climate policy, then the effort required to stabilize radiative forcing will not be as great.

Energy production, transformation, and consumption are central features in all of these scenarios, although non-CO₂ gases and changes in land use also make a significant contribution to aggregate GHG emissions. Demand for energy over the coming century will be driven by economic growth and will also be strongly influenced by the way that energy systems respond to depletion of resources, changes in prices, and improvements in technology. Demand for energy in developed countries remains strong in all scenarios and is even stronger in developing countries, where millions of people seek greater access to commercial energy. These developments strongly influence the emissions of GHGs, their disposition, and the resulting change in radiative forcing under reference conditions.

The three reference scenarios show the implications of this increasing demand and the improved access to energy. The variation between the reference scenarios reflects the differing assumptions used by the modeling groups.

• Global primary energy production rises substantially in all three reference scenarios, from about 400 EJ/yr in 2000 to between roughly 1275 EJ/yr and 1500 EJ/yr in 2100 (Figure ES.1). U.S. primary energy production also grows substantially, about 1¼ to 2½ times present levels by 2100. Primary energy growth occurs despite continued improvements in the efficiency of energy use and energy production technologies. For example, the U.S. energy intensity—the ratio of energy consumption to economic output—declines 60% to 75% between 2000 and 2100 across the three reference scenarios.

• All three reference scenarios include a gradual reduction in the consumption of conventional oil resources. However, in all three reference scenarios, a range of alternative fossil-based resources, such as synthetic fuels from coal and unconventional oil resources (e.g., tar sands and oil shales), are available and become economically viable. Fossil fuels provide almost 90% of the global energy supply in the year 2000, and they remain the dominant energy source in the three reference scenarios throughout the twenty-first century, supplying 70% to 80% of total primary energy in 2100.

• Non-fossil fuel energy use also grows over the century in all three reference scenarios. Contributions in 2100 range from 250 EJ to 450 EJ—an amount equaling roughly ½ times to a little over total global energy consumption today. Despite this growth, these sources never supplant fossil fuels, although they provide an increasing share of the total, particularly in the second half of the century.

• Consistent with the characteristics of primary energy, global and U.S. electricity production continues to rely on coal, although this contribution varies among the reference scenarios). The contribution of renewable and nuclear energy varies considerably in the different reference scenarios, depending on resource availability, technology, and non-climate policy considerations. For example, global nuclear generation in the reference scenarios ranges from about 1½ times current levels (if non-climate concerns such as safety, waste, and proliferation constrain its growth as is the case in one reference scenario), to an expansion of almost an order of magnitude assuming relative economics as the only constraint.

• Oil and natural gas prices rise through the century relative to year 2000 levels, whereas coal and electricity prices remain relatively stable. It should be emphasized, however, that the models used in this research were not designed to simulate short-term, fuel-price spikes, such as those that occurred in the 1970s, early 1980s, and more recently in 2005. Thus, price trends in the scenarios should be interpreted as multi-year averages.

As a combined result of all these influences, emissions of CO₂ from fossil fuel combustion and industrial processes in the reference scenarios increase from approximately 7 GtC/yr in 2000 to between 22.5 GtC/yr and 24.0 GtC/yr in 2100; that is, from 3 to 3½ times current levels.

The non-CO₂ GHGs, CH₄, N₂O, SF₆, PFCs, and HFCs, are emitted from various sources including agriculture, waste management, biomass burning, fossil fuel production and consumption, and a number of industrial activities.

• Future global anthropogenic emissions of CH₄ and N₂O vary widely among the reference scenarios, ranging from flat or declining emissions to increases of 2 to 2½ times present levels. These differences reflect alternative views of technological opportunities and different assumptions about whether current emissions rates will be reduced significantly for non-climate reasons, such as air pollution control and/or higher natural gas prices that would further stimulate the capture of CH₄ emissions for its fuel value.

Increases in emissions from the global energy system and other human activities lead to higher atmospheric concentrations and radiative forcing. This increase is moderated by natural biogeochemical removal processes.

- The ocean is a major sink for CO_2 , and the rate at which the oceans take up CO_2 generally increases in the reference scenarios as concentrations rise early in the century. However, processes in the ocean can slow this rate of increase at high concentrations late in the century. The three reference scenarios have ocean uptake in the range of 2 GtC/yr in 2000, rising to about 5 GtC/yr to 11 GtC/yr by 2100. The three ocean models behave more similarly in the stabilization scenarios; for example, the difference between ocean uptake in the most stringent stabilization scenarios is less than 1 GtC/yr in 2100.
- Two of the three participating models include sub-models of the exchange of CO₂ with the terrestrial biosphere, including the net uptake by plants and soils and the emissions from deforestation. In the reference scenarios from these modeling groups, the terrestrial biosphere acts as a small annual net sink (less than 1 GtC/yr of carbon) in 2000, increasing to an annual net sink of roughly 2 GtC/yr to 3 GtC/yr by the end of the century. The third modeling group assumed a zero net exchange. Changes in emissions from terrestrial systems over time in the reference scenarios reflect assumptions about human activity (including a decline in deforestation) as well as increased CO₂ uptake by vegetation as a result of the positive effect of CO₂ on plant growth. There remains substantial uncertainty about this carbon fertilization effect and its evolution under a changing climate.
- As a result, GHG concentrations rise substantially over the century in the reference scenarios. By 2100, CO₂ concentrations range from about 700 ppmv to 900 ppmv, up from 365 ppmv in 1998. CH₄ concentrations in 2100 range from

2000 ppbv to 4000 ppbv, up from 1745 ppbv in 1998, and N_2O concentrations in 2100 range from about 375 ppbv to 500 ppbv, up from 314 ppbv in 1998.

• As a result, radiative forcing in 2100 ranges from 6.4 Wm⁻² to 8.6 Wm⁻² relative to preindustrial levels, up from a little over 2 Wm⁻² today. The non-CO₂ GHGs account for about 20% to 25% of the forcing at the end of the century.

5.2.2. Stabilization Scenarios

Important assumptions underlying the stabilization scenarios include the flexibility that exists in a policy design and, as represented by the modeling groups, seeking out least cost options for emissions control regardless of where they occur, what substances are controlled, or when they occur. This set of conditions is referred to as where, what, and when flexibility. Equal marginal costs of abatement among regions across time (taking into account discount rates and the lifetimes of substances), and among substances (taking into account their relative warming potential and different lifetimes) will, under specified conditions, lead to least cost abatement. Each modeling group applied an economic instrument that priced GHGs in a manner consistent with the group's interpretation of where, what, and when flexibility. The economic characteristics of the scenarios thus assume a policy designed with the intent of achieving the required reductions in GHG emissions in a least-cost way. Key implications of these assumptions are that: (1) all nations proceed together in restricting GHG emissions from 2012 and continue together throughout the century, and that the same marginal cost is applied across sectors (where flexibility); (2) the marginal cost of abatement rises over time in these three sets of scenarios based on each modeling group's interpretation of when flexibility, with the effect of linking emissions mitigation efforts over the time horizon of the scenarios; and (3) stabilization of radiative forcing is achieved by combining control of all GHGs – with differences in how modeling groups compared them and assessed the implications of what flexibility.

Although these assumptions are convenient for analytical purposes, to gain an impression of the implications of stabilization, they are idealized versions of possible outcomes. For the abatement costs in these scenarios to be representative of actual abatement costs would require, among other things, that a negotiated international agreement include these features. Failure in that regard would have a substantial effect on the difficulty of achieving any of the stabilization levels in considered in this research. For example, a delay of many years in the participation of some large countries would require greater effort by the others, and policies that impose differential burdens on different sectors without mechanisms to allow for equalizing marginal costs across sectors can result in a many-fold increase in the cost of any environmental gain. Therefore, *it is important to view these scenarios as representing possible futures under specified conditions, not as forecasts of the most likely outcome within the national and international political system.* Further, none of the scenarios considered the extent to which variation from these least-cost rules might be improved upon given interactions with existing taxes, technology spillovers, or other non-market externalities.

If the developments in these reference scenarios were to occur, concerted efforts to reduce GHG emissions would be required to stabilize radiative forcing at the levels considered in this research. Such limits would shape technology deployment throughout the century and have important economic consequences. The scenarios demonstrate that there is no single technology pathway consistent with a given level of radiative forcing. Furthermore, there are other possible pathways than those considered in this research.

• Stabilization efforts are made more challenging by the fact that in two of the modeling groups' formulations, both terrestrial and ocean CO₂ uptake decline as the stringency of emissions mitigation increases.

• Stabilization of radiative forcing at the levels examined in this research would require a substantially different energy system globally, and in the U.S., than what emerges in the reference scenarios. The degree and timing of change in the global energy system depends on the level at which radiative forcing is stabilized.

• Across the stabilization scenarios, the energy system relies more heavily on non-fossil energy sources, such as nuclear, solar, wind, biomass, and other renewable energy forms, than in the associated reference scenarios. The scenarios differ in the degree to which these technologies are deployed, depending on assumptions about: technological improvements; the ability to overcome obstacles, such as intermittency in the case of solar and wind power, or safety, waste, and proliferation issues in the case of nuclear power; and the policy environment surrounding these technologies. End-use energy consumption, while still higher than today's levels, is lower in the stabilization scenarios than in the reference scenarios.

• CCS is widely deployed because each modeling group assumed that the technology can be successfully developed and that concerns about storing large amounts of carbon do not impede its expansion. Removal of this assumption would make the stabilization levels more difficult to achieve and would lead to greater demand for low-carbon sources such as renewable energy and nuclear power, to the extent that growth of these other sources is not otherwise constrained.

• Significant fossil fuel use continues across the stabilization scenarios, both because stabilization allows for some level of carbon emissions in 2100 depending on the stabilization level and because of the presence in all the stabilization scenarios of CCS technology.

• Emissions of non-CO₂ GHGs, such as CH_4 , N_2O , HFCs, PFCs, and SF_6 , are all substantially reduced in the stabilization scenarios.

• Increased use is made of biomass energy crops, the contribution of which is ultimately limited by competition with agriculture and forestry, and in one

participating model, by the associated impacts of biomass expansion on carbon emissions from changes in land use.

The lower the radiative forcing stabilization level, the larger the scale of change

in the global energy system relative to the reference scenario required over the

coming century and the sooner those changes would need to occur.

• Across the stabilization scenarios, the scale of the emissions reductions required relative to the reference scenario increases over time, with the bulk of emissions reductions taking place in the second half of the century. But emissions reductions occur in the first half of the century in every stabilization scenario.

• The 2100 time horizon of this research limited examination of the ultimate stabilization requirements. Further reductions in CO₂ emissions after 2100 would be required in all of the stabilization scenarios, because atmospheric stabilization at any of the levels considered in this research requires human emissions of CO₂ in the long term to be essentially halted. Despite the fact that much of the carbon emissions will eventually make its way into oceans and terrestrial sinks, some will remain in the atmosphere for thousands of years. Only CCS can allow continued burning of fossil fuels. Higher radiative forcing limits can delay the point in time at which emissions must be reduced toward zero, but this requirement must ultimately be met.

Fuel sources and electricity generation technologies change substantially, both globally and in the U.S., under stabilization scenarios compared to the reference scenarios. There are a variety of technological options in the electricity sector that reduce carbon emissions in these scenarios.

• Nuclear energy, renewable energy, and CCS all play important roles in stabilization scenarios. The contribution of each varies, depending on assumptions about technological improvements, the ability to overcome obstacles such as intermittency of supply, and the policy environment surrounding them.

By the end of the century, electricity produced by conventional fossil technology that freely emits CO_2 is reduced in the stabilization scenarios relative to reference scenario scenarios. The level of electricity production from technologies that emit CO_2 varies substantially with the stabilization level; in the lowest stabilization level, electricity production from these technologies is reduced toward zero.

The economic effects of stabilization are substantial in many of the stabilization scenarios, although much of this cost is borne later in the century if the mitigation paths assumed in these scenarios are followed. As noted earlier, each of the modeling groups assumed that a global policy was implemented after 2012, with universal participation by the world's nations, and that the time path of reductions approximated a least-cost solution. These assumptions of *where*, *when*, and *what* flexibility lower the economic

consequences of stabilization relative to what they might be with other implementation approaches.

• The stabilization scenarios follow a pattern where, in most scenarios, the carbon price rises steadily over time, providing an opportunity for the energy system to adjust gradually.

• Although the general shape of the carbon price trajectory over time is similar across the models, the carbon prices vary substantially across the models. For example, two of the scenarios have prices of \$10 or below per tonne of carbon in 2020 for the less stringent scenarios, with their prices rising to roughly \$100 per tonne in 2020 for the most stringent stabilization level. A third scenario shows higher initial carbon prices in 2020, ranging from around \$20 for the least stringent stabilization level to over \$250 for the most stringent stabilization level.

• Although the general shape of the carbon price trajectory is similar across the models, they imply substantially different carbon price levels. Factors contributing to this difference include (1) differences in the total reduction in CO₂ emissions that is required for stabilization, and (2) differences in assumptions regarding technology options, particularly in the second half of the century, to shift final demand to electricity or other low-CO₂ sources, such as biofuels or hydrogen, in applications such as transportation or home heating. Differences among the scenarios reflect the uncertainty that attends the far future.

• Differences in non-CO₂ gases also contribute to differences in abatement costs. Scenarios that assume relatively better performance of non-CO₂ emissions mitigation require less CO₂ abatement and therefore less stringent changes in the energy system, to meet the same overall radiative forcing goal.

• These differences in carbon prices, along with other model features, lead to similar variation in the costs of stabilization. Under the most stringent stabilization level, for example, gross world product (aggregating country figures using market exchange rates) is reduced in 2050 vary from around 1% in two of the scenarios to approximately 5% in the third, and in 2100 from less than 2% in two of the scenarios to over 16% in the third.

• The assumption of when flexibility links elements of a scenario through time. This in turn means that in addition to near-term technology availability, differences in assumptions about technology post-2050 period also reflected in near-term emissions reductions and GHG prices.

• In all of the stabilization scenarios, emissions reductions in electric power sector come at relatively lower prices than in other sectors (e.g. buildings, industry, and transport) so that the electricity sector is essentially decarbonized in the most stringent scenarios. At somewhat higher cost other sectors can respond to rising carbon prices by reducing demands for fossil fuels, applying CCS technologies

where possible, and substituting non-emitting energy sources such as bioenergy, electricity, and hydrogen. All of the scenarios increase the amount of electricity used per unit of total primary energy, but those scenarios with the highest relative use of electricity tend to exhibit lower stabilization costs in part because of the larger role of decarbonized power generation. Assumptions regarding costs and performance of technologies to facilitate these adjustments, particularly in the post-2050 period, play an important role in determining stabilization costs

As noted earlier, the overall cost levels are strongly influenced by the idealized policy scenario that has all countries participating from the start, the assumption of where flexibility, an efficient pattern of emissions reductions over time, and integrated reductions in emissions of the different GHGs. Assumptions in which policies are implemented in a less efficient manner would lead to higher cost. Thus, these scenarios should not be interpreted as applying beyond the particular conditions assumed.

• GHG mitigation would also affect fuel prices. Generally, the producer price for fossil fuels falls as demand for them is depressed by the stabilization measures. Users of fossil fuels, on the other hand, pay for the fuel plus a carbon price if the CO2 emissions were freely released to the atmosphere. Therefore, consumer costs of energy rise with more stringent stabilization levels in these scenarios.

Achieving stabilization of atmospheric GHGs poses a substantial technological and policy challenge for the world. It would require important transformations of the global energy system. Assessments of the cost and feasibility of such a goal depends importantly on judgments about how technology will evolve to reduce cost and overcome existing barriers to adoption and on the efficiency and effectiveness of the policy instruments applied.

5.3. Application of the Scenarios in Further Analysis

These scenarios, supported by the accompanying database described in the Appendix, can be used as the basis of further analysis of these stabilization scenarios and the underlying reference scenarios. There are a variety of possible applications of atmospheric stabilization. For example, the scenarios could be used as the basis for analysis of the climate implications. Such studies might begin with the radiative forcing levels of each scenario, with the individual gas concentrations (applying separate radiation codes) or with the emissions (applying separate models of the carbon cycle and of the atmospheric chemistry of the non-CO₂ GHGs). Such applications could be made directly in climate models that do not incorporate a three-dimensional atmosphere and detailed biosphere model. For the larger models, some approximation would need to be imposed to allocate the short-lived gases by latitude or grid cell. Such an effort would need to include scenarios of the emissions (or concentrations) of the reflecting and absorbing aerosols. This could be achieved by the use of sub-models linked to scenario for energy use by fuel.

The scenarios could also be used as a point of departure for partial equilibrium analysis of technology development. Because these models compute energy prices, the scenarios can be used for analysis of the cost performance of new technologies and to serve as a basis for analysis of rates of market penetration. Differences in the scenarios from the three modeling groups give an impression of the types of market challenges that new options will face.

In addition, these studies could form the foundation of analysis of the non-climate environmental implications of implementing potential new energy sources at a large scale. Such analysis was beyond the scope of the present research, but information is provided that could form a basis for such analysis, for example, the potential effects on the U.S. and the globe of implied volumes of CCS and biomass production or of nuclear expansion in some of the scenarios.

The scenarios could also be used in comparative mode. Just as many lessons were learned by comparing the differences between the three modeling groups' scenarios, still more could be learned by extending the comparison to scenarios that predate these or come after, including scenarios developed using entirely different approaches. For example, some scenario exercises do not apply an economic model with detailed analysis of energy markets of the type used here. Such scenarios could be compared against those here to gain insight into the role of economic factors.

Finally, these scenarios might be used to explore the welfare effects of stabilization at different levels. Such work was beyond the scope of the analysis specified in the Prospectus. However, the scenarios do contain information that can be used to calculate indicators of consumer impact in the U.S., for example, by using the changes in prices and quantities of fuels in moving from one stabilization level to another. (The reader is reminded, however, that these welfare effects do not include the benefits that alternative stabilization levels might yield in reduced climate change risk or ancillary effects, such as effects on air pollution).

5.4. Moving Forward

As noted earlier, this work is neither the first nor is it likely to be the last of its kind. Throughout the report, a number of limitations to the approach and the participating models have been highlighted. Studies such as the one presented here would benefit from further research and model development and this section suggests several productive paths to pursue.

5.4.1. Technology Sensitivity Analysis

The importance of future technology development is clear in this report, and sensitivity testing of key assumptions would be of use. For example, what are the implications of various non-climate constraints on nuclear power deployment, or of regulatory limits on the large-scale expansion of CCS or biofuels production? If particular supply technologies—nuclear, wind, natural gas combined cycle generation, and biomass) were

assumed to be more or less expensive, how would that affect market penetration and policy cost? On the demand side, what are the effects of alternative views of the technical developments needed to facilitate substitution of electricity for liquid and gaseous fuels in various sectors, particularly in transport? Since technology deployment will be influenced by the policy environment, how would the consideration of less optimistic policy regimes affect the scenarios?

7 8

5.4.2. Consideration of Less Optimistic Policy Regimes

9 10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

The discussion in Chapter 4 emphasizes that the difficulty of the stabilization task emerging from any scenario exercise is crucially dependent on underlying institutional assumptions, and the insight to be gained from a single representation of control policy such as the one adopted here is limited. There is little reason to believe that the world is headed toward an international policy architecture that closely resembles that assumed in this research. The assumed international emissions mitigation regime is highly stylized. The scenarios assume a wide array of idealized institutions both in individual nations and in the international community. Both developed and developing economies are assumed to possess markets that efficiently pass price information to decision makers. Rules and regulations ranging from accounting and property rights to legal and enforcement systems are assumed to operate efficiently. While such assumptions provide a well defined reference scenario and lower-bound information on potential costs, the probability is low that the world will actually implement such an idealized architecture. In that light, a natural direction for future research is to supplement the analysis presented here with analyses of policy regimes that are under discussion by nations and international organizations and that have a greater potential for being implemented. Such research would broaden the understanding of the stabilization challenge in areas ranging from technology development to the economics of global mitigation.

272829

5.4.3. Expansion and/or Improvement of the Land-Use Components of the Models

30 31 32

33

34

35

36 37

38

39

A significant weakness in this analysis is the handling of the role of forest and agricultural sinks and sources. The major reason for this gap is that the models employed here were not well suited to analyze some of the complexities of this aspect of the carbon cycle. Yet, as this analysis has shown agriculture, land-use and terrestrial carbon cycle issues play an important role in shaping the long-term radiative character of the atmosphere. Research that would improve the characterization of land use and land cover as well as improve the linkages among energy and economic systems, land use, land cover, terrestrial carbon processes, and other bio-geochemical cycles has potentially high payoff.

40 41 42

5.4.4. Inclusion of other Radiatively Important Substances

43 44

45

The focus here is on the relatively long-lived GHGs, but shorter-lived substances, such as ozone and aerosols, have strong radiative effects as well. More complete analysis would

include these short-lived contributors, and their control possibilities, directly within the scenario analysis.

5.4.5. Decision Making under Uncertainty

Finally, the problem of how to respond to the threat of climate change is ultimately a problem of decision making under uncertainty that requires an assessment of the risks and of how a policy might reduce the odds of extremely bad outcomes. One would like to compare the expected benefits of a policy to reduce GHG emissions against the expected cost of achieving those reductions. By focusing only on emission paths that would lead to stabilization, it is possible to report the costs of achieving stabilization without an assessment of the benefits. Moreover, given the direction provided in the Prospectus, the focus is on scenarios and not on uncertainty analysis. It is not possible to attach probabilities to scenarios constructed in this way; formal probabilities can only be attached to a range, which requires exploration of the effects of many uncertain model parameters.