


2,279 METERS BOUYANT
POLYOLEFIN MOORING LINE

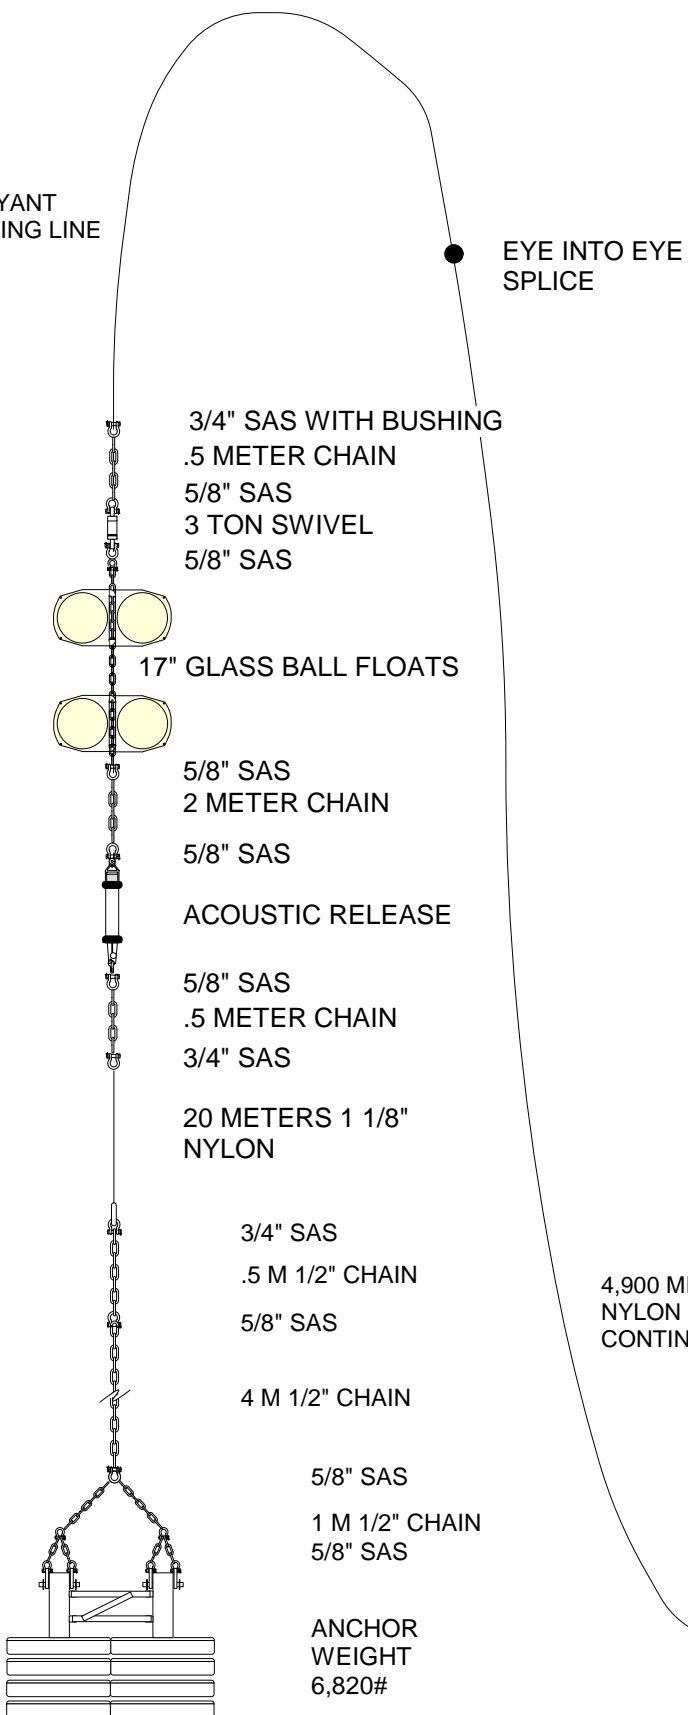

EYE INTO EYE
SPLICE

3/4" SAS WITH BUSHING
.5 METER CHAIN
5/8" SAS
3 TON SWIVEL
5/8" SAS

17" GLASS BALL FLOATS

5/8" SAS
2 METER CHAIN

5/8" SAS

ACOUSTIC RELEASE

5/8" SAS
.5 METER CHAIN
3/4" SAS

20 METERS 1 1/8"
NYLON


3/4" SAS
.5 M 1/2" CHAIN
5/8" SAS

4 M 1/2" CHAIN

5/8" SAS
1 M 1/2" CHAIN
5/8" SAS

ANCHOR
WEIGHT
6,820#

4,900 METERS
NYLON LINE,
CONTINUOUS

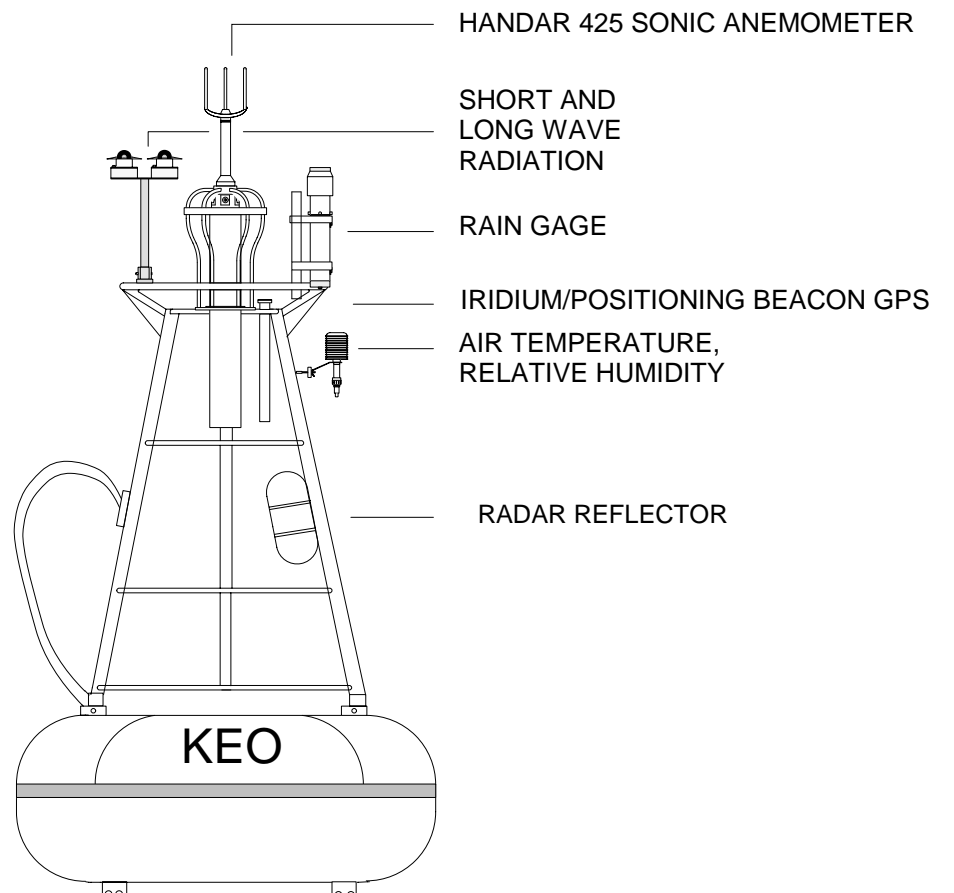

HANDAR 425 SONIC ANEMOMETER

SHORT AND
LONG WAVE
RADIATION

RAIN GAGE

IRIDIUM/POSITIONING BEACON GPS

AIR TEMPERATURE,
RELATIVE HUMIDITY

RADAR REFLECTOR

KEO

1 METER

SSC

CABLE BRACKET
LOAD CELL

1 1/8" SAS

1" SAS

2 LINKS 1" CHAIN

1" SAS

INDUCTIVE CABLE BREAKOUT

- 5 METERS TC
- 10 METERS TC
- 25 METERS TC
- 50 METERS TC
- 700 METERS WIRE ROPE
- 75 METERS TC
- 100 METERS TP
- 150 METERS TC
- 200 METERS TC
- 300 METERS TP
- 400 METERS TC
- 500 METERS TP
- FAIRING TO 500 METERS
- 5/8" SAS
- 5 TON SWIVEL
- 5/8" SAS
- .5 METER CHAIN
- 5/8" SAS WITH BUSHING

10 METERS
NYLON
STIFFENER

DEPTH: 5650 METERS



NOAA-PMEL-KE
7600 Sandpoint Way NE
Seattle, Wa. 98115
(206) 526-6149

MOORING: KEO

SCOPE: 1.4:1

DRAWN BY: Rick Miller

DATE: 1 MAY 2004

APPROVED BY:

DATE: