

JPL D-13963, Revision M

Earth Observing System



**Multi-angle  
Imaging  
Spectro-  
Radiometer**

## **Data Products Specifications**

— Incorporating the Science Data Processing Interface Control Document

Mike Bull  
Jason Matthews  
Catherine Moroney  
Mike Smyth

Jet Propulsion Laboratory, California Institute of Technology

**JPL**

**Jet Propulsion Laboratory**  
California Institute of Technology

May 13, 2005



JPL D-13963, Revision M

Multi-angle Imaging SpectroRadiometer (MISR)

# Data Products Specifications

— Incorporating the Science Data Processing Interface Control Document

APPROVALS:

David J. Diner

MISR Principal Investigator

Graham Bothwell

MISR Science Data System Manager

Approval signatures are on file with the MISR Project.  
To determine the latest released version of this document, consult the MISR web site  
(<http://www-misr.jpl.nasa.gov>).

The logo for the Jet Propulsion Laboratory, consisting of the letters 'JPL' in a bold, black, sans-serif font.

**Jet Propulsion Laboratory**  
California Institute of Technology





# Document Change Log

Revision	Date	Affected Portions and Description
Release A	21 July 1997	All, original release
Release B*	12 March 1998	Section 8: Aerosol/Surface completely redone
Release B	31 September 1998	All, complete update
Release C	14 December 1999	All, complete update for launch
Release D	05 February 2002	All, updates for V2.1.4 Software Delivery.  Section 8 change bars are not comprehensive.  Geolocation Appendix A. added.
Release E	7 January 2003	All, updates for V2.2 Software Delivery
Release F	14 February 2003	Sections 8, 9: updates for V2.2_i2 Software Delivery
Release G	3 April 2003	Sections 4, 5, 6, 7, 8, 9: updates for V2.2_i5 Software Delivery
Release H	7 April 2003	Sections 8: updates for V2.2_i6 Software Delivery
Release I	10 July 2003	Section 1, 2, 3, and 10: Initial version of Level 3 for V2.2_i10 Software Delivery Section 2: Update applicable product versions
Release J	3 October 2003	Section 6, 7, and 8: updates for V3.0 Software Delivery Section 2: Update applicable product versions
Release K	12 December 2003	Section 7, 8, 9 and 10: updates for V3.1 Software Delivery Section 2: Update applicable product versions
Release L	1 November 2004	Section 6, 7, 8, 9: updates for V3.2 Software Delivery Section 2: Update applicable product versions
Release M	13 May 2005	Section 6, 7, 8, 10: updates for V3.3 Software Delivery Section 2: Update applicable product versions

## TBD List

Location	Description
Sections 11	Level 3 Joint section is currently empty. It will be completed when L3 data becomes available.

## Which Product Versions Does this Document Cover?

Product Filename Prefix	Version Number in Filename	Brief Description	Section
MISR_AM1_CGGRP	F02_0007, F02_0009, F02_0011, F02_0013, F02_0015, F02_0017	L3 Component Global Georectified Product	Sec. [10.0]
MISR_AM1_CGAL	F06_0012,	L3 Component Global Albedo Product	
MISR_AM1_CGAS	F06_0016	L3 Component Global Aerosol Product	
MISR_AM1_CGLS	F04_0016	L3 Component Global Land/Surface Product	
MISR_AM1_AS_AEROSOL	F09_0017	L2 Aerosol Retrievals	Sec. [8.0]
MISR_AM1_AS_LAND	F06_0017	L2 Land Surface Retrievals	
MISR_AM1_TC_STEREO	F07_0011, F07_0012, F07_0013	L2 Stereo Heights/Winds	Sec. [7.0]
MISR_AM1_TC_CLASSIFIERS	F04_0005, F04_0006	L2 Cloud Classifiers	
MISR_AM1_TC_ALBEDO	F04_0007	L2 Cloud Albedos	

<b>Product Filename Prefix</b>	<b>Version Number in Filename</b>	<b>Brief Description</b>	<b>Section</b>
MISR_AM1_GRP_TERRAIN	F02_0020, F03_0022, F03_0023, F03_0024	L1B2 Georectified Radiances	Sec. [6.0]
MISR_AM1_GRP_ELLIPSOID	F02_0020, F03_0022, F03_0023, F03_0024	L1B2 Ellipsoid-Projected Radiances	
MISR_AM1_GRP_TERRAIN_LM	F02_0019, F02_0020, F03_0022, F03_0023, F03_0024	L1B2 Georectified Radiances, Local Mode	
MISR_AM1_GRP_ELLIPSOID_LM	F02_0019, F02_0020, F03_0022, F03_0023, F03_0024	L1B2 Ellipsoid-Projected Radiances, Local Mode	
MISR_AM1_GRP_RCCM	F04_0023, F04_0024	L1 Camera-by-Camera Cloud Mask	
MISR_AM1_GP_GMP	F03_0010, F03_0011, F03_0012, F03_0013	L1 Sun/Camera Angles	
MISR_AM1_ELLIPSOID_GM_BR	F02_0020, F03_0022, F03_0023, F03_0024	L1 JPEG Browse Image	
MISR_AM1_RP	F02_0016, F02_0017, F02_0018, F02_0019, F02_0020, F03_0022, F03_0023, F03_0024	L1B1 Radiances	Sec. [5.0]
MISR_AM1_FM_SCI	F02_0016, F02_0017, F02_0018, F02_0019, F02_0020, F03_0022, F03_0023, F03_0024	L1A Instrument Data Numbers	Sec. [4.0]

<b>Product Filename Prefix</b>	<b>Version Number in Filename</b>	<b>Brief Description</b>	<b>Section</b>
MISR_AM1_FM_MTR	F01_0005, F01_0006, F01_0007	L1A Motor Currents	Sec. [4.0]
MISR_AM1_FM_OBC	F01_0005, F01_0006, F01_0007	L1A On-Board Calibrator Data	
MISR_AM1_FM_ENG	F01_0006, F01_0007, F01_0008,	L1A Engineering Data	
MISR_AM1_FM_NAV	0006, 0007, 0008	L1A Raw Orbit Navigation Data	
MISR_AM1_FM_CAL	F01_0006, F01_0007, F01_0008	L1A Calibration Experiment Data	
<u>Various</u>		<u>Ancillary Products</u>	Sec. [9.0]
MISR_AM1_ARP_INFLTCAL	F02	Dynamic Rad./Calibration Coefficients	
MISR_AM1_ARP_PRFLTCHAR	F02_0002	Static Preflight Instrument Specs.	
MISR_AM1_ARP_PRFLTCAL	F02_0004, F02_0005	Static Preflight Rad./Calibration Specs.	
MISR_AM1_ARP_CONFIG	F03_0003	Static Calibration Algorithm Data	
MISR_AM1_AGP	F01_24	Geographic Data (DEM)	
MISR_AM1_CGM	F01_0007	Camera Geometric Model	
MISR_AM1_ACP_APOP	F05_0014	Aerosol Climatology (Particle Models)	
MISR_AM1_ACP_MIXTURE	F05_0019	Aerosol Climatology (Particle Mixtures)	

---

# Table of Contents

<b>1.0 MISR DATA PRODUCT SPECIFICATION DOCUMENT.....</b>	<b>19</b>
1.1 OVERVIEW .....	19
1.2 SCOPE OF MISR DPS DOCUMENT .....	19
1.3 CONTROLLING DOCUMENTS .....	21
1.4 APPLICABLE DOCUMENTS.....	22
<b>2.0 MISR SCIENCE DATA PROCESSING .....</b>	<b>23</b>
2.1 OVERVIEW .....	23
2.2 MISR SDP: ANCILLARY DATA SET GENERATION .....	23
2.2.1 MISR SDP Ancillary Data Set Dependencies.....	23
2.2.2 MISR SDP Ancillary Data Sets .....	24
2.3 MISR SDP: EXTERNAL DATA SET DEPENDENCIES .....	25
2.4 MISR SDP: STANDARD SCIENCE DATA PRODUCTS .....	27
<b>3.0 MISR PRODUCTS: FILE FORMAT OVERVIEW .....</b>	<b>33</b>
3.1 HDF AND HDF-EOS FILE STRUCTURES .....	33
3.2 MISR PRODUCTS: DATA FORMATS.....	33
3.3 MISR PRODUCTS: METADATA FORMATS.....	36
3.3.1 Structural Metadata .....	36
3.3.2 Core Metadata .....	36
3.3.3 Product Metadata.....	36
3.3.4 File Metadata.....	37
3.3.5 Per-grid/Per-swath Metadata.....	37
3.3.6 Per-block Metadata .....	37
3.4 MISR PRODUCTS: QUALITY ASSURANCE FORMATS .....	37
3.4.1 QA Fields .....	38
3.4.2 Standard QA Vdatas and VGroups .....	39
3.4.3 Special QA Vdatas and VGroups.....	40
<b>4.0 MISR LEVEL 1A REFORMATTED ANNOTATED PRODUCT .....</b>	<b>43</b>
4.1 MISR LEVEL 1A PRODUCT GRANULE NAMES.....	43
4.2 MISR LEVEL 1A PRODUCT GRANULE BRIEF DESCRIPTIONS .....	43
4.2.1 MISR LEVEL 1A MI1A CCD Science Instrument Data.....	43
4.2.2 MISR LEVEL 1A MI1AC CCD Calibration Data .....	44
4.2.3 MISR LEVEL 1A MI1AMOT Motor Data .....	44
4.2.4 MISR LEVEL 1A MI1ANAV Navigation Data.....	44
4.2.5 MISR LEVEL 1A MI1AENG Engineering Data .....	44

---

4.2.6	MISR LEVEL 1A MI1AOBC On-Board Calibration Data .....	44
4.3	MISR LEVEL 1A PRODUCT GRANULE DATA SETS .....	45
4.4	MISR LEVEL 1A PRODUCT SHARED SWATH DESCRIPTORS .....	47
4.5	MISR LEVEL 1A MI1A CCD SCIENCE INSTRUMENT DATA .....	48
4.5.1	File Metadata Description .....	48
4.5.2	Per-swath Metadata Description .....	48
4.5.3	Per-block Metadata Description .....	48
4.5.4	Per-line Metadata Description .....	48
4.5.5	Per-pixel Metadata Description .....	49
4.5.6	Swath Data Set Descriptions .....	49
4.5.7	CCD Science Product QA .....	53
4.6	MISR LEVEL 1A MI1AC CCD CALIBRATION DATA .....	54
4.6.1	File Metadata Description .....	54
4.6.2	Per-swath Metadata Description .....	54
4.6.3	Per-block Metadata Description .....	54
4.6.4	Per-line Metadata Description .....	54
4.6.5	Per-pixel Metadata Description .....	55
4.6.6	Swath Data Set Descriptions .....	55
4.6.7	Per-swath QA Metadata .....	59
4.7	MISR LEVEL 1A MI1AMOT MOTOR DATA .....	60
4.7.1	File Metadata Description .....	60
4.7.2	Per-swath Metadata Description .....	60
4.7.3	Per-block Metadata Description .....	60
4.7.4	Per-line Metadata Description .....	60
4.7.5	Per-pixel (or -sample) Metadata Description .....	60
4.7.6	Swath Data Set Descriptions .....	61
4.7.7	Per-swath QA Metadata .....	63
4.8	MISR LEVEL 1A MI1ANAV NAVIGATION DATA .....	64
4.8.1	File Metadata Description .....	64
4.8.2	Per-swath Metadata Description .....	64
4.8.3	Per-block Metadata Description .....	64
4.8.4	Per-line Metadata Description .....	64
4.8.5	Per-pixel (or -sample) Metadata Description .....	64
4.8.6	Swath Data Set Descriptions .....	65
4.8.7	Per-swath QA Metadata .....	67
4.9	MISR LEVEL 1A MI1AENG1 ENGINEERING DATA .....	68
4.9.1	File Metadata Description .....	68
4.9.2	Per-swath Metadata Description .....	68
4.9.3	Per-block Metadata Description .....	68
4.9.4	Per-line Metadata Description .....	68
4.9.5	Per-pixel (or -sample) Metadata Description .....	68
4.9.6	Swath Data Set Descriptions .....	71
4.9.7	Per-swath QA Metadata .....	78

---

4.10 MISR LEVEL 1A MI1AOBC ON-BOARD CALIBRATION DATA .....	79
4.10.1 File Metadata Description .....	79
4.10.2 Per-swath Metadata Description .....	79
4.10.3 Per-block Metadata Description.....	79
4.10.4 Per-line Metadata Description.....	79
4.10.5 Per-pixel (or -sample) Metadata Description .....	79
4.10.6 Swath Data Set Descriptions .....	80
4.10.7 Per-swath QA Metadata .....	84
<b>5.0 MISR LEVEL 1B1 RADIOMETRIC PRODUCT.....</b>	<b>85</b>
5.1 MISR LEVEL 1B1 PRODUCT GRANULE NAMES.....	85
5.2 MISR LEVEL 1B1 PRODUCT GRANULE BRIEF DESCRIPTIONS .....	85
5.3 MISR LEVEL 1B1 PRODUCT GRANULE DATA SETS .....	85
5.4 MISR LEVEL 1B1 MI1B1 RADIOMETRIC PRODUCT.....	87
5.4.1 File Metadata Description. ....	87
5.4.2 Per-swath Metadata Description .....	87
5.4.3 Per-line Metadata Description.....	88
5.4.4 Per-pixel Metadata Description.....	89
5.4.5 Swath Data Set Descriptions .....	89
5.4.6 Radiometric Product QA Metadata .....	91
<b>6.0 MISR LEVEL 1B2 GEORECTIFIED RADIANCE PRODUCT.....</b>	<b>93</b>
6.1 MISR LEVEL 1B2 PRODUCT GRANULE NAMES.....	93
6.2 MISR LEVEL 1B2 GEORECTIFIED RADIANCE PRODUCT GRANULE BRIEF DE- SCRIPTIONS.....	93
6.3 MISR LEVEL 1B2 GEORECTIFIED RADIANCE PRODUCT GRANULE DATA SETS 94	
6.4 MISR LEVEL 1B2 MI1B2E AND MB2LME ELLIPSOID-PROJECTED PRODUCTS96	
6.4.1 File Metadata Description .....	96
6.4.2 Per-grid Metadata Description .....	98
6.4.3 Per-block Metadata Description.....	99
6.4.4 Per-line Metadata Description.....	100
6.4.5 Per-pixel Metadata Description.....	100
6.4.6 Grid Data Set Descriptions.....	101
6.4.7 Per-grid QA Metadata .....	104
6.5 MISR LEVEL 1B2 MI1B2T AND MB2LMT TERRAIN-PROJECTED PRODUCTS105	
6.5.1 File Metadata Description .....	105
6.5.2 Per-grid Metadata Description .....	107
6.5.3 Per-block Metadata Description.....	108
6.5.4 Per-line Metadata Description.....	109
6.5.5 Per-pixel Metadata Description.....	109
6.5.6 Grid Data Set Descriptions.....	110
6.5.7 Per-grid QA Metadata .....	113

---

6.6 MISR LEVEL 1B2 MI1B2GEOP GEOMETRIC PARAMETERS PRODUCT .....	116
6.6.1 File Metadata Description .....	116
6.6.2 Per-grid Metadata Description .....	117
6.6.3 Per-block Metadata Description.....	118
6.6.4 Per-line Metadata Description.....	119
6.6.5 Per-pixel Metadata Description.....	119
6.6.6 Grid Data Set Descriptions.....	119
6.6.7 Per-grid QA Metadata .....	123
6.7 MISR LEVEL 1B2 MI1B2RCCM RCCM PRODUCT .....	123
6.7.1 File Metadata Description .....	123
6.7.2 Per-grid Metadata Description .....	125
6.7.3 Per-block Metadata Description.....	125
6.7.4 Per-line Metadata Description.....	126
6.7.5 Per-pixel Metadata Description.....	126
6.7.6 Grid Data Set Descriptions.....	126
6.7.7 Per-grid QA Metadata .....	128
6.8 MISR LEVEL 1B2 MISRBR ELLIPSOID PROJECTED BROWSE PRODUCT.....	130
6.9 MISR LEVEL 1B2 MIB2TRPE ELLIPSOID-PROJECTED TRANSFORM PARAME- TERS PRODUCT .....	131
6.9.1 File Metadata Description .....	131
6.9.2 Per-block Metadata Description.....	131
6.9.3 ICC Per-gridcell Metadata Description.....	132
6.9.4 SOM-to-New Per-gridcell and Per-band Metadata Description .....	133
6.10 MISR LEVEL 1B2 MIB2TRPT TERRAIN-PROJECTED TRANSFORM PARAME- TERS PRODUCT .....	135
6.10.1 File Metadata Description .....	135
6.10.2 Per-block Metadata Description.....	135
6.10.3 ICC Per-gridcell Metadata Description.....	136
6.10.4 Ref-to-New Per-subgridcell Metadata Description.....	137
6.10.5 Band-to-Band Per-gridcell and Per-band Metadata Description.....	138
6.11 MISR LEVEL 1B2 MIB2CORR REGISTRATION CORRECTIONS PRODUCT..	140
6.11.1 Data Set Description.....	140
<b>7.0 MISR LEVEL 2 TOA/CLOUD PRODUCT.....</b>	<b>143</b>
7.1 MISR LEVEL 2 TOA/CLOUD PRODUCT GRANULE NAMES .....	143
7.2 MISR LEVEL 2 TOA/CLOUD PRODUCT GRANULE BRIEF DESCRIPTIONS...	143
7.3 MISR LEVEL 2 TOA/CLOUD PRODUCT GRANULE DATA SETS .....	143
7.4 MISR LEVEL 2 MIL2TCST CLOUD STEREO PRODUCT.....	145
7.4.1 File Metadata Description .....	145
7.4.2 Per-grid Metadata Description .....	146
7.4.3 Per-block Metadata Description.....	147
7.4.4 Per-line Metadata Description.....	148
7.4.5 Per-pixel Metadata Description.....	148



---

7.4.6	Grid Data Set Descriptions.....	148
7.4.7	Per-grid QA Metadata .....	172
7.5	MISR LEVEL 2 MIL2TCCL CLOUD CLASSIFIER PRODUCT.....	174
7.5.1	File Metadata Description .....	174
7.5.2	Per-grid Metadata Description .....	175
7.5.3	Per-block Metadata Description.....	176
7.5.4	Per-line Metadata Description.....	177
7.5.5	Per-pixel Metadata Description.....	177
7.5.6	Grid Data Set Descriptions.....	177
7.5.7	Per-grid QA Metadata .....	184
7.6	MISR LEVEL 2 MIL2TCAL CLOUD ALBEDO PRODUCT.....	186
7.6.1	File Metadata Description .....	186
7.6.2	Per-grid Metadata Description .....	187
7.6.3	Per-block Metadata Description.....	188
7.6.4	Per-line Metadata Description.....	189
7.6.5	Per-pixel Metadata Description.....	189
7.6.6	Grid Data Set Descriptions.....	189
7.6.7	Per-grid QA Metadata .....	196
<b>8.0</b>	<b>MISR LEVEL 2 AEROSOL/SURFACE PRODUCT.....</b>	<b>215</b>
8.1	MISR LEVEL 2 A/S PRODUCT GRANULE NAMES .....	215
8.2	MISR LEVEL 2 A/S PRODUCT GRANULE BRIEF DESCRIPTIONS.....	215
8.3	MISR LEVEL 2 A/S PRODUCT GRANULE DATA SETS.....	217
8.4	MISR LEVEL 2 MIL2ASAE AEROSOL PRODUCT .....	218
8.4.1	File Metadata Description .....	218
8.4.2	Vdata Description.....	219
8.4.3	Per-grid Metadata Description .....	221
8.4.4	Per-block Metadata Description.....	221
8.4.5	Per-line Metadata Description.....	222
8.4.6	Per-pixel Metadata Description.....	222
8.4.7	Grid Data Set Descriptions.....	222
8.4.8	Per-grid QA Metadata .....	248
8.5	MISR LEVEL 2 MIL2ASLS LAND SURFACE PRODUCT .....	253
8.5.1	File Metadata Description .....	253
8.5.2	Vdata Description.....	254
8.5.3	Per-grid Metadata Description .....	255
8.5.4	Per-block Metadata Description.....	259
8.5.5	Per-line Metadata Description.....	260
8.5.6	Per-pixel Metadata Description.....	260
8.5.7	Grid Data Set Descriptions.....	260
8.5.8	Per-grid QA Metadata .....	269
8.6	MISR LEVEL 2 MIL2ASOS OCEAN SURFACE PRODUCT .....	271
8.6.1	File Metadata Description .....	271

---

8.6.2	Per-grid Metadata Description .....	273
8.6.3	Per-block Metadata Description.....	274
8.6.4	Per-line Metadata Description.....	275
8.6.5	Per-pixel Metadata Description.....	275
8.6.6	Grid Data Set Descriptions.....	275
8.6.7	Per-grid QA Metadata .....	277
<b>9.0</b>	<b>MISR ANCILLARY PRODUCTS .....</b>	<b>279</b>
9.1	MISR ANCILLARY PRODUCT GRANULE NAMES .....	279
9.2	MISR ANCILLARY PRODUCT GRANULE BRIEF DESCRIPTIONS .....	279
9.2.1	MISR Ancillary MIANCAGP Geographic Product.....	279
9.2.2	MISR Ancillary MIANCARP Pre-Flight Characterization Product.....	280
9.2.3	MISR Ancillary MIANCARP Pre-Flight Calibration Product .....	280
9.2.4	MISR Ancillary MIANCARP In-Flight Calibration Product .....	280
9.2.5	MISR Ancillary MIANCARP Configuration Product .....	280
9.2.6	MISR Ancillary MIANCACP APOP Product .....	281
9.2.7	MISR Ancillary MIANCACP Aerosol Mixture Product.....	281
9.2.8	MISR Ancillary MIANCACP Climatological Likelihood Product .....	281
9.3	MISR ANCILLARY PRODUCT GRANULE DATA SETS.....	281
9.3.1	MISR Ancillary MIANCAGP Geographic Product.....	281
9.3.2	MISR Ancillary MIANCARP Pre-Flight Characterization Product.....	281
9.3.3	MISR Ancillary MIANCARP Pre-Flight Calibration Product .....	281
9.3.4	MISR Ancillary MIANCARP In-Flight Calibration Product .....	282
9.3.5	MISR Ancillary MIANCARP Configuration Product .....	282
9.3.6	MISR Ancillary MIANCACP APOP Product .....	282
9.3.7	MISR Ancillary MIANCACP MIXTURE Product .....	282
9.3.8	MISR Ancillary MIANCACP CLIMLIKE Product .....	282
9.4	MISR ANCILLARY MIANCAGP GEOGRAPHIC PRODUCT .....	283
9.4.1	File Metadata Description .....	283
9.4.2	Per-grid Metadata Description .....	284
9.4.3	Per-block Metadata Description.....	284
9.4.4	Grid Data Set Descriptions.....	286
9.5	MISR ANCILLARY MIANCARP PRFLTCHAR PRODUCT .....	288
9.5.1	File Metadata Description .....	288
9.5.2	Per-SDS Metadata Description .....	288
9.5.3	Per-block Metadata Description.....	288
9.5.4	Scientific Data Set Descriptions.....	288
9.6	MISR ANCILLARY MIANCARP PRFLTCAL PRODUCT .....	292
9.6.1	File Metadata Description .....	292
9.6.2	Per-SDS Metadata Description .....	292
9.6.3	Per-block Metadata Description.....	292
9.6.4	Scientific Data Set Descriptions.....	292
9.7	MISR ANCILLARY MIANCARP INFLTCAL PRODUCT .....	295

---

9.7.1	File Metadata Description .....	295
9.7.2	Per-SDS Metadata Description .....	295
9.7.3	Per-block Metadata Description.....	295
9.7.4	Scientific Data Set Descriptions.....	295
9.8	MISR ANCILLARY MIANCARP CONFIG PRODUCT .....	298
9.8.1	File Metadata Description .....	298
9.8.2	Per-grid Metadata Description .....	298
9.8.3	Per-block Metadata Description.....	298
9.8.4	Scientific Data Set Descriptions.....	298
9.9	MISR ANCILLARY MIANCACP APOP PRODUCT .....	300
9.9.1	File Metadata Description .....	300
9.9.2	Per-grid Metadata Description .....	301
9.9.3	Per-block Metadata Description.....	301
9.9.4	Vdata Set Descriptions .....	301
9.9.5	Scientific Data Set Descriptions.....	303
9.10	MISR ANCILLARY MIANCACP MIXTURE PRODUCT .....	304
9.10.1	File Metadata Description .....	304
9.10.2	Per-grid Metadata Description .....	305
9.10.3	Per-block Metadata Description.....	305
9.10.4	Vdata Set Descriptions .....	305
9.10.5	Scientific Data Set Descriptions.....	308
9.11	MISR ANCILLARY MIANCACP CLIM-LIKELY PRODUCT .....	309
9.11.1	File Metadata Description .....	309
9.11.2	Per-grid Metadata Description .....	309
9.11.3	Per-block Metadata Description.....	309
9.11.4	Vdata Set Descriptions .....	309
9.11.5	Scientific Data Set Descriptions.....	309
<b>10.0</b>	<b>MISR LEVEL 3 COMPONENT PRODUCTS .....</b>	<b>311</b>
10.1	MISR LEVEL 3 PRODUCT GRANULE NAMES .....	311
10.2	MISR LEVEL 3 PRODUCT GRANULE BRIEF DESCRIPTIONS .....	311
10.3	MISR LEVEL 3 PRODUCT GRANULE DATA SETS .....	312
10.4	MISR LEVEL 3 MIL3DRD, MIL3MRD, MIL3QRD, MIL3YRD COMPONENT GLOBAL GEORECTIFIED PRODUCT .....	313
10.4.1	File Metadata Description .....	314
10.4.2	File Dimensions.....	315
10.4.3	Grid Dataset Description.....	315
10.5	MISR LEVEL 3 MIL3DAE, MIL3MAE, MIL3QAE, MIL3YAE COMPONENT GLOBAL AEROSOL PRODUCT .....	316
10.5.1	File Metadata Description .....	317
10.5.2	File Dimensions.....	319
10.5.3	Grid Dataset Description.....	319
10.6	MISR LEVEL 3 MIL3DLS, MIL3MLS, MIL3QLS, MIL3YLS COMPONENT GLOBAL	

---

LAND/SURFACE PRODUCT.....	320
10.6.1 File Metadata Description .....	321
10.6.2 File Dimensions.....	323
10.6.3 Grid Dataset Description.....	323
10.7 MISR LEVEL 3 MIL3DAL, MIL3MAL, MIL3QAL, MIL3YAL COMPONENT GLOBAL ALBEDO PRODUCT.....	324
10.7.1 File Metadata Description .....	325
10.7.2 File Dimensions.....	327
10.7.3 Grid Dataset Description.....	327
10.7.4 SDS Dataset Description.....	332
<b>11.0 MISR LEVEL 3 JOINT PRODUCTS.....</b>	<b>335</b>
<b>APPENDIX A: MISR GEOREGISTRATION INFO .....</b>	<b>337</b>
A.1 Introduction.....	337
A.2 Background: The Instrument.....	338
A.3 Background: The SOM Projection.....	340
A.4 Background: HDF-EOS .....	344
A.5 Coordinate Conversions .....	347
A.5.1 SOM <-> Lat/Lon .....	347
A.5.2 Inverse: MISR(block, line, sample) -> SOM(X,Y) .....	348
A.5.3 Forward: SOM(X,Y) -> MISR (block, line, sample) .....	349
A.6 Metadata Details.....	350
A.7 Example Function Calls .....	351
A.7.1 misrcoordex.c .....	353
A.7.2 misr_init.c .....	358
A.7.3 misrfor.c .....	359
A.7.4 misrinv.c .....	360
A.7.5 misrproj.h .....	361
A.7.6 errormacros.h .....	361
A.7.7 Makefile .....	362
A.8 Appendix A Bibliography .....	362

---

## List of Tables

Table 2-1	MISR SDP Ancillary Data Set Dependencies.....	23
Table 2-2	MISR SDP Ancillary Data Sets.....	24
Table 2-3	MISR SDP External Data Set Dependencies .....	25
Table 2-4	MISR SDP External Geophysical Parameter Dependencies .....	26
Table 2-5	MISR Project Standard Science Data Products.....	27
Table 4-1	MISR Level 1A File Granule Names.....	43
Table 4-2	MISR Level 1A Reformatted Annotated Product Files and Swath Datasets .....	45
Table 4-3	Spatial Resolution Distribution for Global mode.....	47
Table 4-4	Spatial Resolution Distribution for Local mode.....	47
Table 4-5	CCD Science Per-Swath Metadata.....	48
Table 4-6	CCD Science Per-Line Metadata.....	48
Table 4-7	CCD Science Swath Field Definitions .....	49
Table 4-8	CCD Calibration Per-swath Metadata.....	54
Table 4-9	CCD Calibration Per-Line Metadata.....	54
Table 4-10	CCD Calibration Swath Field Definitions.....	55
Table 4-11	Motor Per-swath Metadata.....	60
Table 4-12	Motor Data Per-Sample Metadata.....	61
Table 4-13	Motor Data Dimension Descriptions.....	61
Table 4-14	Motor Data Swath Field Definitions .....	61
Table 4-15	Swath Data fields for Motor Data .....	62
Table 4-16	NAVIGATION Per-swath Metadata.....	64
Table 4-17	Navigation Per-Sample Metadata.....	65
Table 4-18	Navigation Data Dimension Descriptions.....	65
Table 4-19	Navigation Data Swath Field Definitions.....	65
Table 4-20	Swath Data Fields for Navigation Data.....	66
Table 4-21	Swath Metadata for Engineering Data File .....	68
Table 4-22	Engineering Data Per-Sample Metadata .....	69

---

Table 4-23	Engineering Data Dimension Descriptions .....	71
Table 4-24	Engineering Data Swath Field Definitions.....	72
Table 4-25	Swath Data Fields for Engineering Data .....	74
Table 4-26	Swath Metadata for OBC Data File.....	79
Table 4-27	OBC Data Per-Sample Metadata.....	80
Table 4-28	OBC Data Dimension Descriptions.....	80
Table 4-29	OBC Data Swath Field Definitions .....	81
Table 4-30	Swath Data Fields for Level 1A OBC Data .....	81
Table 5-1	MISR Level 1B1 File Granule Names .....	85
Table 5-2	Level 1B1 Radiometric Product File and Swath Datasets.....	86
Table 5-3	Metadata for Radiometric Product Files.....	87
Table 5-4	Swath Metadata for Radiometric Product Files.....	88
Table 5-5	Per-line Scene Average for Background Correction .....	89
Table 5-6	Radiometric Product Field Dimension Descriptions.....	89
Table 5-7	Spatial Resolution Distribution for Global mode.....	89
Table 5-8	Spatial Resolution Distribution for Local mode.....	90
Table 5-9	Radiometric Product Parameter Fill Values .....	90
Table 5-10	Radiometric Product Parameters Swath Field Definitions.....	91
Table 6-1	MISR Level 1B2 File Granule Names .....	93
Table 6-2	Level 1B2 Georectified Radiance Product Files and Grid Datasets.....	94
Table 6-3	File Metadata for Ellipsoid-projected TOA Radiance Files.....	96
Table 6-4	Per-grid Metadata for Ellipsoid-projected TOA Radiance Grids.....	98
Table 6-5	Per-grid Metadata for Ellipsoid-projected TOA Radiance Grids.....	98
Table 6-6	Per-grid Metadata for Geometric Parameters and BRF Conversion Factors Grids.....	98
Table 6-7	PerBlock Metadata for Ellipsoid-projected TOA Radiance File.....	99
Table 6-8	Ellipsoid-projected Grid Data Set Descriptions.....	101
Table 6-9	Spatial Resolution Distribution for Global mode.....	101
Table 6-10	Ellipsoid-projected TOA Radiance Parameter Fill Values .....	102
Table 6-11	Ellipsoid-projected Parameters Grid Field Definitions .....	102

---

Table 6-12	Geometric Parameter Fill Values. ....	103
Table 6-13	Geometric Parameters Grid Field Definitions. ....	103
Table 6-14	BRF Conversion Factors Grid Field Defintions. ....	104
Table 6-15	Ellipsoid-projected Per-grid QA Metadata. ....	104
Table 6-16	File Metadata for Terrain-projected TOA Radiance Files. ....	105
Table 6-17	Per-grid Metadata for Terrain-projected TOA Radiance Grids. ....	107
Table 6-18	Per-grid Metadata for Terrain-projected TOA Radiance Grids. ....	107
Table 6-19	Per-grid Metadata for Geometric Parameters and BRF Conversion Factors Grids. 107	
Table 6-20	Per-block Metadata for Terrain-projected TOA Radiance File. ....	108
Table 6-21	Terrain-projected Grid Data Set Descriptions. ....	110
Table 6-22	Spatial Resolution Distribution for Global mode. ....	110
Table 6-23	Terrain-projected TOA Radiance Parameter Fill Values. ....	111
Table 6-24	Terrain-projected Parameters Grid Field Definitions. ....	111
Table 6-25	Geometric Parameter Fill Values. ....	112
Table 6-26	Geometric Parameters Grid Field Definitions. ....	112
Table 6-27	BRF Conversion Factors Grid Field Definitions. ....	113
Table 6-28	Terrain-projected Per-grid QA Metadata. ....	113
Table 6-29	File Metadata for Geometric Parameters Product Files. ....	116
Table 6-30	Per-grid Metadata for Geometric Parameters Product Files. ....	117
Table 6-31	Per-block Metadata for Geometric Parameters Product Files. ....	118
Table 6-32	Geometric Parameters Product Field Dimension Descriptions. ....	119
Table 6-33	Geometric Parameter Fill Values. ....	119
Table 6-34	Geometric Parameters Grid Field Definitions. ....	120
Table 6-35	File Metadata for RCCM Product Files. ....	123
Table 6-36	Per-grid Metadata for RCCM Product Files. ....	125
Table 6-37	Per-block Metadata for RCCM Product Files. ....	125
Table 6-38	Georectified Radiance Product Field Dimension Descriptions. ....	126
Table 6-39	Spatial Resolution Distribution for Global mode. ....	127

---

Table 6-40	RCCM Parameters Grid Field Definitions. ....	127
Table 6-41	RCCM Per-grid QA Metadata. ....	128
Table 6-42	Additional File Metadata for Ellipsoid-Projected Transform Parameter Files. .	131
Table 6-43	L1B1 Extent Per-block Metadata for Ellipsoid-Projected Transform Parameter Files.	131
Table 6-44	GDQI Per-Block Metadata for Ellipsoid-Projected Transform Parameter File .	132
Table 6-45	ICC Per-Block Metadata for Ellipsoid-Projected Transform Parameter File ....	132
Table 6-46	ICC Per-gridcell Metadata for Ellipsoid-Projected Transform Parameter Files.	133
Table 6-47	SOM-to-New Per-gridcell and Per-band Metadata for Ellipsoid-Projected Transform Parameter Files.....	133
Table 6-48	Additional File Metadata for Terrain-Projected Transform Parameter Files. ....	135
Table 6-49	L1B1 Extent Per-block Metadata for Terrain-Projected Transform Parameter Files.	135
Table 6-50	GDQI Per-Block Metadata for Terrain-Projected Transform Parameter File....	136
Table 6-51	ICC Per-Block Metadata for Terrain-Projected Transform Parameter File .....	136
Table 6-52	ICC Per-gridcell Metadata for Terrain-Projected Transform Parameter Files...	137
Table 6-53	Ref-to-New Per-subgridcell Metadata for Terrain-Projected Transform Parameter Files.....	137
Table 6-54	Band-to-Band Per-gridcell and Per-band Metadata for Terrain-Projected Transform Parameter Files.....	138
Table 6-55	Corrections File .....	140
Table 7-1	MISR Level 2 TOA/CLOUD File Granule Names. ....	143
Table 7-2	Level 2 TOA/CLOUD Product Files and Grid Datasets. ....	144
Table 7-3	File Metadata for Cloud Stereo Product Files. ....	145
Table 7-4	Per-grid Metadata for Cloud Stereo Product Files. ....	146
Table 7-5	Per-block Metadata for Cloud Stereo Product Files.....	147
Table 7-6	Cloud Stereo Product Field Dimension Descriptions.....	148
Table 7-7	Cloud Stereo Product Grid Dataset Descriptions. ....	149
Table 7-8	Per-grid QA Metadata for Cloud Stereo Products. ....	172
Table 7-9	File Metadata for Cloud Classifier Product Files.....	174
Table 7-10	Per-grid Metadata for Cloud Classifier Product Files.....	175



---

Table 7-11	Per-block Metadata for Cloud Classifier Product Files.....	176
Table 7-12	Cloud Classifier Product Field Dimension Descriptions.....	177
Table 7-13	Cloud Classifier Product Grid Dataset Descriptions.....	178
Table 7-14	Per-grid QA Metadata for Cloud Classifier Products.....	184
Table 7-15	File Metadata for Cloud Albedo Product Files.....	186
Table 7-16	Per-grid Metadata for Cloud Albedo Product Files.....	187
Table 7-17	Per-block Metadata for Cloud Albedo Product Files. ....	188
Table 7-18	Cloud Albedo Product Field Dimension Descriptions .....	189
Table 7-19	Cloud Albedo Product Grid Dataset Descriptions.....	190
Table 7-20	Per-grid QA Metadata for Cloud Albedo Products. ....	196
Table 8-1	MISR Level 2 Aerosol/Surface File Granule Names.....	215
Table 8-2	Surface-Atmosphere Radiation Interaction Terms.....	216
Table 8-3	Level 2 Aerosol/Surface Product Files and Grid Datasets. ....	217
Table 8-4	File Metadata for Aerosol Product Files. ....	218
Table 8-5	Aerosol Product File Vdata Summary.....	220
Table 8-6	Per-grid Metadata for Aerosol Product Files.....	221
Table 8-7	Per-block Metadata for Aerosol Product Files. ....	221
Table 8-8	Aerosol Product Field Dimension Descriptions.....	223
Table 8-9	Aerosol Product Grid Dataset Descriptions, part 1 .....	224
Table 8-10	Aerosol Product Grid Dataset Descriptions, part 2 .....	229
Table 8-11	Aerosol Product Grid Dataset Descriptions, part 3 .....	231
Table 8-12	Aerosol Product Grid Dataset Descriptions, part 4 .....	237
Table 8-13	Aerosol Product Grid Dataset Descriptions, part 5 .....	240
Table 8-14	Aerosol Product Grid Dataset Descriptions, part 6 .....	244
Table 8-15	Per-grid QA Metadata for Aerosol Products.....	248
Table 8-16	File Metadata for Land Surface Product Files.....	253
Table 8-17	Land Surface Product File Vdata Summary .....	255
Table 8-18	Per-grid Metadata for Land Surface Product Files.....	255
Table 8-19	Per-block Metadata for Land Surface Product Files. ....	259

---

Table 8-20	Land Surface Product Field Dimension Descriptions .....	260
Table 8-21	Land Surface Product Grid Dataset Descriptions.....	261
Table 8-22	Per-grid QA Metadata for Land Surface Products. ....	269
Table 8-23	File Metadata for Ocean Surface Product Files.....	271
Table 8-24	Per-grid Metadata for Ocean Surface Product Files.....	273
Table 8-25	Per-block Metadata for Ocean Surface Product Files. ....	274
Table 8-26	Ocean Surface Product Field Dimension Descriptions. ....	275
Table 8-27	Ocean Surface Product Grid Dataset Descriptions.....	276
Table 8-28	Per-grid QA Metadata for Ocean Surface Products. ....	277
Table 9-1	MISR Ancillary File Granule Names. ....	279
Table 9-2	Ancillary Product Files and Grid Datasets. ....	282
Table 9-3	File Metadata for Ancillary Geographic Product Files. ....	283
Table 9-4	Per-grid Metadata for Ancillary Geographic Product Files. ....	284
Table 9-5	Per-block Metadata for Ancillary Geographic Product Files.....	284
Table 9-6	Ancillary Geographic Product Field Dimension Descriptions.....	286
Table 9-7	Ancillary Geographic Product Grid Dataset Descriptions. ....	286
Table 9-8	File Metadata for Ancillary Radiometric Pre-Flight Char Product Files. ....	288
Table 9-9	ARP: Preflight characterization data. ....	289
Table 9-10	File Metadata for Ancillary Radiometric PRFLTCAL Product Files. ....	292
Table 9-11	File Metadata for Ancillary Radiometric INFLTCAL Product Files.....	295
Table 9-12	ARP: In-flight calibration data. ....	296
Table 9-13	File Metadata for Ancillary Radiometric CONFIG Product Files. ....	298
Table 9-14	Global Attributes .....	300
Table 9-15	APOP Vdata Summary.....	301
Table 9-16	Data Table Fields.....	302
Table 9-17	Bands Fields .....	303
Table 9-18	Particle Classification Indices Fields.....	303
Table 9-19	Scattering Angles Fields.....	303
Table 9-20	APOP SDS Summary .....	304

---

Table 9-21	Global Attributes .....	304
Table 9-22	APOP Vdata Summary .....	306
Table 9-23	Mixture Data Fields .....	307
Table 9-24	Component Model Legends Fields.....	307
Table 9-25	Bands Fields .....	307
Table 9-26	Mixture Classification Indices Fields.....	307
Table 9-27	Retrieval Path Indices Fields .....	308
Table 9-28	Retrieval Path Applicability Flag Legend Fields .....	308
Table 9-29	Mixture SDS Summary .....	309
Table 10-1	MISR Level 3 File Granule Names .....	311
Table 10-2	Level 3 Component Global Product Files and Grid Datasets.....	312
Table 10-3	CGGRP File metadata .....	314
Table 10-4	CGGRP File Dimensions .....	315
Table 10-5	CGGRP Grid Dataset Description.....	315
Table 10-6	CGAS File metadata.....	317
Table 10-7	CGAS File Dimensions .....	319
Table 10-8	CGAS Grid Dataset Description .....	319
Table 10-9	CGLS File metadata .....	321
Table 10-10	CGLS File Dimensions.....	323
Table 10-11	CGLS Grid Dataset Description .....	323
Table 10-12	CGAL File metadata.....	325
Table 10-13	CGAL File Dimensions.....	327
Table 10-14	CGAL Grid Dataset Description .....	328
Table 10-15	CGAL SDS Dataset Description .....	332

---

---

## Acronym List

ASDC.....	Atmospheric Sciences Data Center (see LaRC DAAC)
AU.....	Astronomical Unit
BHR .....	Bihemispherical Reflectance
BRF.....	Bidirectional Reflectance Factor
DAAC .....	Distributed Active Archive Center
DHR .....	Directional Hemispherical Reflectance
DHRPAR .....	DHR integrated over Photosynthetically Active Radiation band.
ECS .....	EOSDIS Core System (Data Production System at DAAC)
EOS.....	Earth Observing System
EOSDIS.....	Earth Observing System Data and Information System
ESDT.....	Earth Science Datatype
FPAR .....	Fraction of Photosynthetically-Active Radiation
GDQI.....	Geometric Data Quality Indicator
HDRF.....	Hemispherical-Directional Reflectance Factor
JPL .....	Jet Propulsion Laboratory
LAI.....	Leaf Area Index
LaRC DAAC.....	NASA Langley Research Center DAAC
NASA.....	National Aeronautics and Space Administration
NDVI.....	Normalized Difference Vegetation Index
SCF .....	Science Computing Facility
SDP .....	Science Data Processing
SMART.....	Simulated MISR Ancillary Radiative Transfer
SOM.....	Space-Oblique Mercator
TOA .....	Top-Of-Atmosphere
TOAC.....	Tropical Ocean Atmospheric Correction
WGS84.....	World Geodetic System 1984



## 1.0 MISR DATA PRODUCT SPECIFICATION DOCUMENT

### 1.1 OVERVIEW

The Multi-angle Imaging SpectroRadiometer (MISR) project is a component of the Earth Observing System (EOS) Terra Mission and the EOS Data Information System (EOSDIS), which in themselves are components of the National Aeronautics and Space Administration's (NASA) Earth Science Enterprise. An integral part of the MISR project is Scientific Data Processing (SDP) of the observations coming from the MISR instrument on-board the EOS-TERRA satellite.

MISR SDP exists to produce science and supporting data products from MISR instrument data. All functions of the MISR SDP system are directed toward this goal. MISR SDP does not operate as an independent entity, but rather is linked to the functionality of the EOSDIS at the Langley Research Center (LaRC) Distributed Active Archive Center (DAAC). The ECS ingest subsystem at the LaRC DAAC is the agent for receiving and organizing all of the input data needed by MISR SDP. These data are then made available to MISR SDP through the data server and staging facilities provided by ECS (EOSDIS Core System) at the LaRC DAAC. After MISR standard data processing is complete, the standard output products are archived through the EOSDIS data server and made available to users through ECS client services.

The MISR Science Computing Facility (SCF) at the Jet Propulsion Laboratory (JPL) supports the development of MISR science algorithms and software, instrument calibration and performance assessment, as well as providing quality assessment and data validation services with respect to MISR SDP. The MISR SCF produces software, supporting data, and coefficients that are required to operate MISR SDP software at the LaRC DAAC.

MISR SDP processing depends upon the availability of MISR instrument data, internal data sets produced by the MISR SCF, and external data sets that are products of other EOS data processing systems. The main purpose of this document is to describe MISR standard output products of the EOSDIS, as well as required internal and external data sets that are critical to MISR SDP. This document is not meant to be the definitive description of the external data sets that are products of other EOS data processing systems and utilized by MISR SDP. Rather, it only describes the external data sets that MISR requires for its processing. The full range of internal data sets produced at the MISR Science Computing Facility (SCF) are not described in this document either, except for the three internal data sets that are produced as ancillary products and included in the MISR standard output products. For details of the other internal data sets, see the MISR Software Interface Specification (SIS) document for internal interfaces and the Data Management Plan (DMP), which describes MISR SCF activities in regard to archiving data at the MISR SCF.

### 1.2 SCOPE OF MISR DPS DOCUMENT

The input data sets that are generated internally within the MISR project and the external data sets from outside the MISR project that are critical to MISR SDP are first described in section 2. This section clearly highlights MISR SDP dependencies on data sets generated externally to the MISR

project. The final outputs of MISR SDP are surface, aerosol, and cloud data products based on the MISR EOS-TERRA observations, together with three supporting ancillary data products that aid in the interpretation of the geophysical data sets.

In section 3 of the DPS document the general file structure of all MISR SDP geophysical and ancillary data products is described. In particular, MISR SDP dependence on both HDF-EOS swath and grid formats is discussed, together with the HDF and HDF-EOS structures that MISR SDP uses to store metadata. The file formats of each MISR geophysical and ancillary data product are then explained in detail, including the

- MISR LEVEL 1A REFORMATTED ANNOTATED PRODUCT (section 4),
- MISR LEVEL 1B1 RADIOMETRIC PRODUCT (section 5),
- MISR LEVEL 1B2 GEORECTIFIED RADIANCE PRODUCT (section 6) ,
- MISR LEVEL 2 TOA/CLOUD PRODUCT (section 7),
- MISR LEVEL 2 AEROSOL/SURFACE PRODUCT (section 8),
- MISR ANCILLARY GEOGRAPHIC PRODUCT (section 9),
- MISR ANCILLARY RADIOMETRIC PRODUCT (section 9),
- MISR ANCILLARY AEROSOL CLIMATOLOGY PRODUCT (section 9).
- MISR COMPONENT GLOBAL GEORECTIFIED PRODUCT (section 10).
- MISR COMPONENT GLOBAL AEROSOL PRODUCT (section 10).
- MISR COMPONENT GLOBAL LAND/SURFACE PRODUCT (section 10).

The three ancillary products described in section 9 are actually produced at the MISR SCF, but they are archived at the LaRC DAAC because these products are needed to fully understand and interpret the MISR SDP standard output products.

Appendix [A] contains a description of a method for obtaining the latitude and longitude of a MISR pixel. Since most MISR data products are registered to the SOM map projection, it is important to understand the conversions in the Appendix in order to compare MISR products to data from other sources.



### 1.3 CONTROLLING DOCUMENTS

- 1) MISR Science Data Processing Functional Requirements Document, (FRD) JPL D-12417, September 1996 (or latest version).
- 2) MISR Experiment Implementation Plan, Volume III, Science, Data Processing, and Instrument Operations, Technical and Management Plan (EIP), JPL D-11520, 24 January 1996 (or latest version).
- 3) MISR Science Data System Software Management Plan (SMP), JPL D-11641, February 1996 (or latest version).
- 4) SDPIO Implementation Handbook, JPL D-16392, January 1999 (or latest version).
- 5) MISR Data System Science Requirements, JPL D-11398, September 1996 (or latest version).
- 6) MISR Level 1 Radiance Scaling and Conditioning Algorithm Theoretical Basis, JPL D-11507, Revision D, January 1999 (or latest version).
- 7) MISR Level 1 Georectification and Registration Algorithm Theoretical Basis, JPL D-11532, Revision B, August 1996 (or latest version).
- 8) MISR Level 1 Cloud Detection Algorithm Theoretical Basis, JPL D-13397, Revision A, November 1997 (or latest version).
- 9) MISR Level 1 In-flight Radiometric Calibration and Characterization Algorithm Theoretical Basis, JPL D-13398, June 1996 (or latest version).
- 10) MISR Level 1 Ancillary Geographic Product Algorithm Theoretical Basis, JPL D-13400, Revision B, March 1999 (or latest version).
- 11) MISR Level 2 Top-of-Atmosphere Albedo Algorithm Theoretical Basis, JPL D-13401, Revision C, December 1997 (or latest version).
- 12) MISR Level 2 Aerosol Retrieval Algorithm Theoretical Basis, JPL D-11400, Revision C, December 1997 (or latest version).
- 13) MISR Level 2 Surface Retrieval Algorithm Theoretical Basis, JPL D-11401, Revision C, December 1997 (or latest version).
- 14) MISR Level 2 Ancillary Products and Datasets Algorithm Theoretical Basis, JPL D-13402., Revision A, December 1998 (or latest version).
- 15) MISR Level 3 Global Products Algorithm Theoretical Basis, JPL D-14190, June 2000 (or latest version).
- 16) MISR Science Data Quality Indicators, JPL D-13496, January 1997 (or latest version).
- 17) Data Production Software and Science Computing Facility (SCF) Standards and Guidelines, GSFC EOSDIS document 423-16-01

- 18) MISR Science Data Processing Quality Assessment Plan, JPL D-13965, 17 January 1997 (or latest version).

#### **1.4 APPLICABLE DOCUMENTS**

- 19) Science User's Guide and Operations Procedure Handbook for the ECS Project, HAIS 193-205-SE1-001 (or latest version).
- 20) Interface Requirements Document Between EOSDIS Core System (ECS) and Science Computing Facilities, HAIS 209-CD-005-005, March 1996 (or latest version).
- 21) EOSDIS Core System Science Information Architecture, HAIS working paper FB9401V2 (or latest version).
- 22) Software Implementation Guidelines, JPL D-10622 (or latest version).
- 23) MISR Science Data System Error Policy, JPL D-13137 (or latest version).
- 24) Statement of Work for the Multi-Angle Imaging SpectroRadiometer (MISR), GSFC 421-12-13-03 (or latest version).
- 25) MISR Mission Operations Concepts and Requirements, JPL D-11594 (or latest version).
- 26) SDP Toolkit Users Guide for the ECS Project, HAIS 194-809-SD4-001 (or latest version).

---

## 2.0 MISR SCIENCE DATA PROCESSING

### 2.1 OVERVIEW

Multi-angle Imaging SpectroRadiometer (MISR) science data processing (SDP) at the Langley Research Center (LaRC) Distributed Active Archive Center (DAAC) requires data sets generated internally by the MISR Science Computing Facility (SCF), as well as external data sets generated outside of the MISR project. The internal data sets generated by the MISR SCF are called ancillary data sets.

The data sets that are required by the MISR SCF in order to produce the internal data sets required by MISR SDP at the LaRC DAAC are discussed in section 2.2.1, while the internal data sets actually generated at the MISR SCF are listed in section 2.2.2. Both MISR SCF generated internal data sets and external data sets (section 2.3) are required in MISR SDP at the LaRC DAAC. MISR SDP at the LaRC DAAC operates on the internal and external data sets to produce the MISR project standard science data products (section 2.4).

### 2.2 MISR SDP: ANCILLARY DATA SET GENERATION

The required data sets to MISR SCF generation of the internal data sets are illustrated in Table 2-1. The internal data sets generated by MISR SCF processing (Table 2-2) are archived at the MISR SCF, sent to the LaRC DAAC to be archived, and then used as inputs to MISR SDP at the LaRC DAAC. Henceforth, we call these internal data sets generated by the MISR SCF Ancillary Data Sets and Products.

NOTE: Since the beginning of the MISR mission, MISR SDP at the LaRC DAAC has only used a subset of Ancillary Data Sets derived at the MISR SCF. External inputs may be incorporated at some future date.


#### 2.2.1 MISR SDP Ancillary Data Set Dependencies

**Table 2-1: MISR SDP Ancillary Data Set Dependencies**

<b>Input Data Sets Required for MISR SDP</b>
Spacecraft Ancillary Data
Predicted Spacecraft Orbit
Preflight DataBRDF Cloud Threshold Models
ISCCP Climatologies
Radiometric Calibration Reference Imagery

Geometric Calibration Reference Imagery
Coastline Reference Maps
Global Digital Elevation Model
SAGE Climatology Record
TOMS Climatology Record
Flight and Ground Cross Comparisons
Solar Irradiance Model
Earth-Sun Ephemeris
Aerosol Models
NSIDC Snow-Ice cover
DAO Atmospheric Data
AVIRIS Reference Imagery
Global Aerosol Climatologies

### 2.2.2 MISR SDP Ancillary Data Sets

 = Not yet implemented

**Table 2-2: MISR SDP Ancillary Data Sets**

<b>Product</b>	<b>ESDTs</b>	<b>File Description</b>
Ancillary Radiometric Product	MIANCARP	ARP
Radiometric Camera-by-camera Cloud Thresholds	MIANRCCT	RC Thres.
Cloud Screening Surface Classification Dataset	MIANCSSC	CSSC
Ancillary Geographic Product	MIANCAGP	AGP
Camera Geometric Model	MISANCGM	CGM
Projection Parameters	MIANPP	PP
Reference Orbit Imagery	MIRFOI	ROI
Angular Signature Cloud Mask Thresholds Dataset	MIL2TCCT	ASCM Thresholds

**Table 2-2: MISR SDP Ancillary Data Sets**

<b>Product</b>	<b>ESDTs</b>	<b>File Description</b>
Terrestrial Atmosphere and Surface Climatology Dataset	MIANTASC	TASC
Albedo Azimuth Modelling Dataset	MIANAZM	AZM
Ancillary Land Biome Dataset	MIANLDBM	Land Biome Dataset
SMART Dataset	MIANSMT	SMART
Aerosol Climatology Product	MIANACP	ACP
Tropical Ocean Atmosphere Correction Dataset	MIANTOAC	TOAC

### 2.3 MISR SDP: EXTERNAL DATA SET DEPENDENCIES

MISR SDP at the LaRC DAAC does not yet make use of the ancillary data sets listed in Table 2-3 below.

**Table 2-3: MISR SDP External Data Set Dependencies**

<b>External Data Sets Required for MISR SDP</b>
DAO Atmospheric Data
MODIS Column Water Vapor Amount
MODIS Snow and Ice Cover
NSIDC Near real-time Ice and Snow Extent
NSCAT Surface Wind Speed
MODIS Cloud Top Height
MODIS Cloud Phase
MODIS Cloud Mask
SAGE Stratosphere Aerosol Optical Depth
Earth-Sun Ephemeris
Spacecraft Ancillary Data

Since these external data sets are unavailable to MISR SDP at the LaRC DAAC, the ancillary data from the MISR TASC file is used instead. External inputs may be incorporated at some future date. The important geophysical parameters extracted from the data sets above are listed in Table


2-4 below.

**Table 2-4: MISR SDP External Geophysical Parameter Dependencies**

<b>Geophysical Parameter</b>	<b>Data Source</b>
Cloud Phase (Liquid/Ice)	MODIS Cloud Phase Properties
	DAO cloud phase or temperature profile or geopotential height
	MISR SCF TASC dataset
Cloud Top Height	MODIS Cloud Mask
High Cloud Top Altitude	MISR SCF TASC dataset
Stratosphere Aerosol Optical Depth	SAGE III
Surface Wind Speed	DAO surface wind speed
	MISR SCF TASC dataset
Surface Pressure	DAO surface pressure
	MISR SCF TASC dataset
Relative Humidity	MODIS temperature/moisture profiles or precipitable water
	DAO relative humidity vs. pressure or geopotential height
	MISR SCF TASC dataset (relative humidity in boundary layer)
Snow/Ice Cover	MODIS L2 daily snow/ice
	NSIDC weekly snow/ice
	MISR SCF TASC dataset
Ozone Optical Depth	MODIS total column ozone
	DAO ozone profile vs. pressure
	MISR SCF TASC dataset (ozone column abundance)
Tropopause Height	DAO tropopause pressure or geopotential height array
	MISR SCF TASC dataset

## 2.4 MISR SDP: STANDARD SCIENCE DATA PRODUCTS

The end result of MISR SDP at the LaRC DAAC are the MISR project standard science data products listed in Table [2-5] below. This document describes the product versions indicated in the final column.

 = Not yet implemented

**Table 2-5: MISR Project Standard Science Data Products**

<b>Product</b>	<b>ESDTs</b>	<b>File Description</b>	<b>File Type</b>	<b>Applicable Product Version</b>
Level 1A Reformatted Annotated Product	MIL1A	L1A CCD Science	HDF-EOS Swath	F02_0016, F02_0017, F02_0018, F02_0019, F02_0020, F03_0022, F03_0023, F03_0024
		L1A Browse Removed Sep, 2001		
	MI1AENG1	L1A Engineering	HDF-EOS Swath	F01_0006, F01_0007, F02_0008
	MI1ANAV	L1A Navigation	HDF-EOS Swath	0006, 0007, 0008
	MI1AMOT	L1A Motor	HDF-EOS Swath	F01_0005, F01_0006, F01_0007
	MI1AC	L1A CCD Calibration	HDF-EOS Swath	F01_0006, F01_0007, F01_0008
	MI1AOBC	L1A OBC data	HDF-EOS Swath	F01_0005, F01_0006, F01_0007

**Table 2-5: MISR Project Standard Science Data Products**

<b>Product</b>	<b>ESDTs</b>	<b>File Description</b>	<b>File Type</b>	<b>Applicable Product Version</b>
Level 1B1 Radiometric Product	MI1B1	L1B1 Global Mode	HDF-EOS Swath	F02_0020, F03_0022, F03_0023 F03_0024
	MI1B1LM	L1B1 Local Mode	HDF-EOS Swath	F02_0016, F02_0017, F02_0018, F02_0019, F02_0020, F03_0022, F03_0023 F03_0024



**Table 2-5: MISR Project Standard Science Data Products**

<b>Product</b>	<b>ESDTs</b>	<b>File Description</b>	<b>File Type</b>	<b>Applicable Product Version</b>
Level 1B2 Georectified Radiance Product	MI1B2T	L1B2 Terrain	HDF-EOS Stacked-Block Grid	F02_0020, F03_0022, F03_0023 F03_0024
	MI1B2E	L1B2 Ellipsoid	HDF-EOS Stacked-Block Grid	F02_0020, F03_0022, F03_0023 F03_0024
	MISBR	PGE 1 Ellipsoid Browse	JPEG	F02_0020, F03_0022, F03_0023 F03_0024
	MIRCCM	RCCM	HDF-EOS Stacked-Block Grid	F04_0023 F04_0024
	MIB2LMT	L1B2 Terr. Local Mode	HDF-EOS Stacked-Block Grid	F02_0019, F02_0020, F03_0022, F03_0023 F03_0024
	MIB2LME	L1B2 Ellip. Local Mode	HDF-EOS Stacked-Block Grid	F02_0019, F02_0020, F03_0022, F03_0023 F03_0024
	MIB2GEOP	Geometric Parameters	HDF-EOS Stacked-Block Grid	F03_0010-13
	MIANRCCH	RCCM histogram updates	HDF Vdatas	F03_0022, F03_0023 F03_0024
Level 2 TOA/Cloud Product	MIL2TCST	L2TC Stereo	HDF-EOS Stacked-Block Grid	F07_0011, F07_0012 F07_0013
	MIL2TCCL	L2TC Cloud Mask/ Cloud Classifiers	HDF-EOS Stacked-Block Grid	F04_0005 F04_0006

**Table 2-5: MISR Project Standard Science Data Products**

<b>Product</b>	<b>ESDTs</b>	<b>File Description</b>	<b>File Type</b>	<b>Applicable Product Version</b>
(Threshold values have not been tuned)	MIL2TCCH	ASCM Histogram Updates	HDF Vdatas	F04_0005 F04_0006
	MIL2TCAL	L2TC Albedo	HDF-EOS Stacked-Block Grid	F04_0007
	MISBR	L2TC Browse	JPEG	
Level 2 Aerosol/ Surface Product	MIL2ASOS	L2AS Ocean Surface	HDF-EOS Stacked-Block Grid	
	MIL2ASLS	L2AS Land Surface	HDF-EOS Stacked-Block Grid	F06_0017
	MIL2ASAE	L2AS Aerosol	HDF-EOS Stacked-Block Grid	F09_0017
	MISBR	L2AS Browse	JPEG	
Level 3 Component Global Georectified Product	MIL3DRD MIL3MRD MIL3QRD MIL3YRD	L3 Radiance	HDF-EOS Geographic Grid	F02_0007, F02_0009, F02_0011, F02_0013, F02_0015, F02_0017
Level 3 Component Global Albedo Product	MIL3DAL MIL3MAL MIL3QAL MIL3YAL	L3 Albedo	HDF-EOS Geographic Grid	F06_0012
Level 3 Component Global Aerosol Product	MIL3DAE MIL3MAE MIL3QAE MIL3YAE	L3 Aerosol	HDF-EOS Geographic Grid	F06_0016
Level 3 Component Global Land/Surface Product	MIL3DLS MIL3MLS MIL3QLS MIL3YLS	L3 Land/Surface	HDF-EOS Geographic Grid	F04_0015
Ancillary Products		Radiometric Product	NCSA-Supplied HDF Objects	N/A

---

**Table 2-5: MISR Project Standard Science Data Products**

<b>Product</b>	<b>ESDTs</b>	<b>File Description</b>	<b>File Type</b>	<b>Applicable Product Version</b>
		Climatology Product	NCSA-Supplied HDF Objects	N/A



## 3.0 MISR PRODUCTS: FILE FORMAT OVERVIEW

### 3.1 HDF AND HDF-EOS FILE STRUCTURES

This section describes the specifications for the MISR products that will be archived at the NASA LaRC DAAC. The MISR files (with one exception as noted below) are implemented in the Hierarchical Data Format (HDF). Most, but not all, of the MISR standard data products are in one of two file formats: HDF-EOS Swath or HDF-EOS Grid, which are extensions of the original HDF as developed by the National Center for Supercomputing Applications (NCSA). The HDF-EOS file interfaces were developed by the EOS Core System (ECS) developers. Standard NCSA HDF terminology, as well as the EOS developed interface terminology, are used in this document when describing these files.

The HDF-EOS data products used by MISR (Swath and Grid) have been defined within the HDF framework and are supported by special application programming interfaces (API) which aid the data producer and user in writing to and reading from these files. These APIs allow data products to be created and manipulated in ways appropriate to each datatype, without regard to the actual HDF objects and conventions underlying them. MISR Swath products are composed of the data acquired on the illuminated portion of the Earth along one given orbit pass. Most MISR Grid products contain data covering the same geographic range as the Swath products. In these cases, the Grid format allows the data to be represented in a map-projected fashion. The map-projected format is necessary because MISR data analysis schemes often involve the comparison of data acquired from different cameras. Such comparisons require data sets to be co-registered, and projecting the data is the most efficient way to represent co-registration. There are other cases, in which the HDF-EOS Grid format is used to display data on a global map grid instead of focusing on a narrow “swath area”. MISR Level 3 products are examples of the global use of the HDF-EOS Grid format.

The file specifications given here are in terms of the logical implementation of MISR standard data products in HDF and do not describe the actual physical layout of the files, although there is an attempt to show what the physical layout of a file looks like. The same data object may exist in different relative locations for two iterations of a product file. The locations are determined by HDF on a file-by-file basis and are not important to actually accessing the data using API calls.

### 3.2 MISR PRODUCTS: DATA FORMATS


Of all of the MISR standard science data products, only the MISR Ancillary Radiometric Product and Aerosol Climatology Product files use standard NCSA-supplied HDF file structures. The MISR Level 1A Reformatted Annotated Product and Level 1B1 Radiometric Product data use the HDF-EOS Swath file type. The HDF-EOS Swath interface is designed to support time-ordered data, such as satellite swaths with time-ordered series of scanlines or time-ordered series of profiles.

The MISR Level 3 products are HDF-EOS Grid files, using a geographic projection.

The remaining MISR products are HDF-EOS Grid files. The HDF-EOS Grid interface was originally intended for storing Level 3 and above products, that is, products which have been “gridded” to a single Earth-based map projection. The storage of map projection parameters are part of the format, and routines to access the data in Grid format by geolocation are supplied in the Grid API. MISR stores “swath-like” products at Level 1B2 and Level 2 in a space-based map projection. In particular, MISR SDP breaks up L1B2 and L2 swaths into equal-sized blocks. The term “block” refers to a pre-defined, static, fixed-size, rectangular SOM region on the Earth which a) is wide enough to contain the horizontal overlap of all 9 MISR camera views at low latitudes, b) is the geographic unit over which MISR SDP is attempted and c) is the standard unit of MISR data access. The block construct enables the co-registration of 9 different images with a minimal waste of space and processing effort. Changes were made to the HDF-EOS Grid implementation, specific to MISR SDP needs, to handle these blocks as an additional dimension to a Grid dataset. This implementation is referred to as the “Stacked-block” Grid implementation. The user is referred to Appendix [A] where complete details surrounding Stacked-block grid data access may be found.

In brief, the solution to meet MISR’s needs for its Level 1B2 and Level 2 data products is to “stack” all of the blocks of an orbit into a single dataset, where the “third” dimension for the dataset becomes the block number (Figure 3-1). Groups of parameters of a product can be stored in these “stacked-block” Grid data structures, but each parameter in the dataset must have the same x and y dimensions (i.e., same resolution). Within a Grid dataset, parameters can also be grouped into what HDF-EOS calls a “field”, but each parameter in the field must be of the same data type (e.g., 2-byte integer).

**Figure 3-1 MISR SOM Representation in HDF-EOS.**

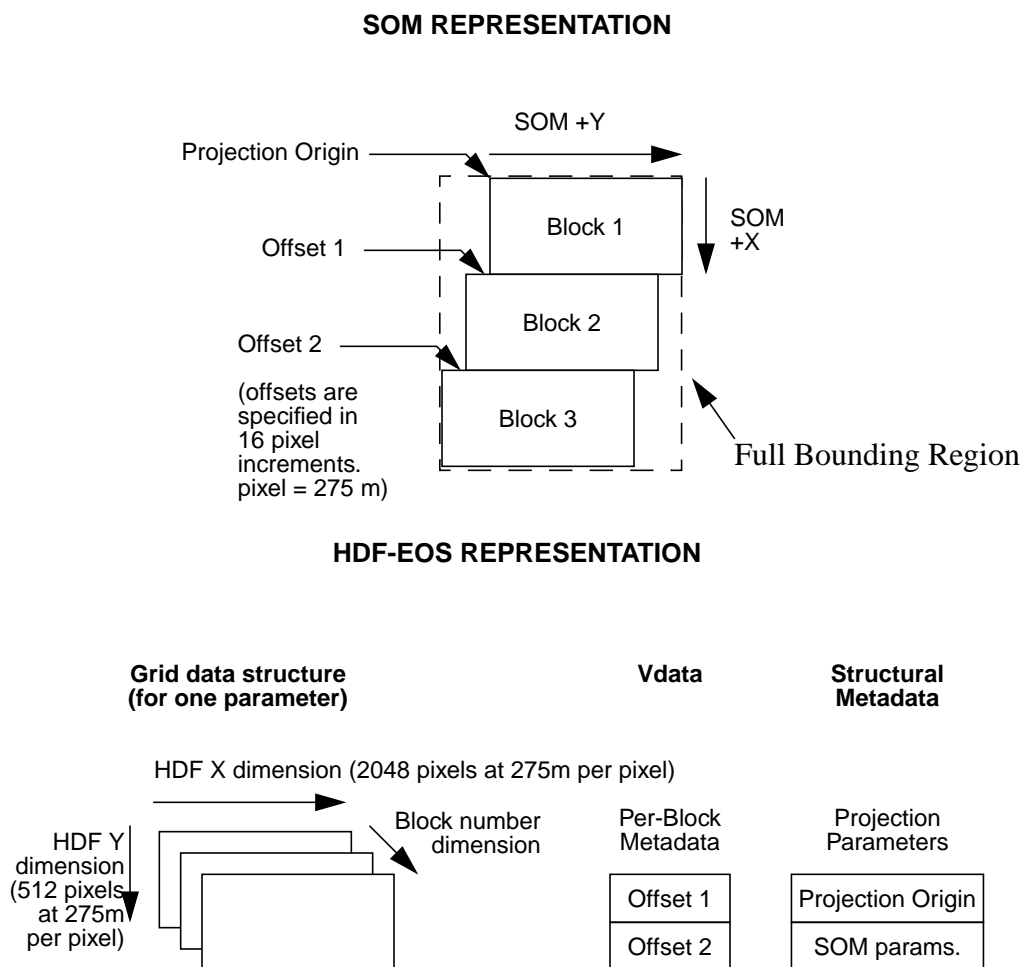

180 blocks are required to cover the seasonal sun-lit ground under a single path. Each of the 233 WRS Terra orbit paths has a separate set of 180 MISR blocks defined to span it. The MISR Ancillary Geographic Product is the reference dataset containing full lat/lon information about block locations. Refer to section [9.4] for further AGP information. Each block could have been its own grid in a separate file, but that model did not meet MISR SDP IO constraints. Attempting to make one rectangular grid spanning the entire swath range was size-prohibitive. At product design time, HDF tiling and compression mechanisms could not support that large a region. The compromise solution was to store only the projection origin for Block 1 and save in a separate dataset the horizontal offset of each block beneath Block 1. The user should be aware that data acquisition does not always begin in Block 1. However, even subsetted MISR Grid data files always contain HDF structures that begin at Block 1. Empty blocks contain fill data. This offset is specified in integer pixels from the upper left hand corner of Block 1. The storing of these offsets is taken care of by a Grid library routine (GDblkSOMoffset). Offsets may be retrieved with the

same routine. With the projection origin information, the projection information and the block offset information, transformations between (block/line/sample <-> SOM X/Y <-> lat/lon) are possible. HDF-EOS and the accompanying GCTP map projection library do most of the work automatically. The user is again referred to Appendix [A].

### **3.3 MISR PRODUCTS: METADATA FORMATS**

No matter what kind of product file is created, metadata must be attached to it for descriptive purposes within the ECS environment. All files have an accompanying simple ASCII file containing metadata which is produced at the same time that the file is produced. These attached ASCII files contain what is called the Core, or Inventory, Metadata, which is the second type of metadata described below. For MISR standard data product files that use only native HDF objects, Inventory Metadata is the only type of metadata that is produced for the product.

For MISR HDF-EOS Swath and Grid file types six classes of metadata may be used: 1) Structural Metadata, 2) Core Metadata, 3) Product Metadata, 4) File Metadata, 5) Grid/Swath Metadata and 6) Per-block Metadata (for Grid files only). The first three classes of metadata are recognized by ECS and can be searched in the ECS Data Server database. The last three classes were invented by MISR and contain values required by MISR processing. Attempts to provide convenient data access often clash with requirements to meet programmatic standards. Since metadata are usually small in size, the MISR team handled such clashes by including redundant information in places where it was warranted.

#### **3.3.1 Structural Metadata**

Structural Metadata are written into HDF files automatically by HDF-EOS software when writing out HDF-EOS files. These metadata describe the structure of the file in terms of its dimensions, Swath or Grid characteristics, projection (for Grid only), and data fields. These metadata are used by HDF-EOS software to recognize file structures when reading back the data.

#### **3.3.2 Core Metadata**

Core, or Inventory, Metadata provide granule level information used for ingesting, cataloging, and searching the data product. These metadata are written into HDF-EOS files by Toolkit metadata calls. A Metadata Configuration File (MCF), which describes Inventory Metadata attributes, is used when creating an HDF file using the Toolkit. An additional ASCII Inventory Metadata file is produced at file-time creation which provides granule level information. This ASCII file has the same name as the HDF or HDF-EOS output file with the extension of .met. These files are not described in this document.

#### **3.3.3 Product Metadata**

Product, or Archive, Metadata provide granule level information that is not used for search purposes, but which are important to be kept with the HDF-EOS file. These metadata are also



attached by Toolkit metadata calls during product generation and their attributes are also contained in the MCF file. MISR processing does not currently use Archive Metadata, preferring to create and use the next three types of metadata described below.

### 3.3.4 File Metadata

File Metadata, when used by MISR processing, contain MISR-specific information that is common to a whole file. These metadata are stored as global attributes that are attached to the standard NCSA-supplied HDF Scientific Dataset (SD) object. (We found it necessary to use SD object global attributes since the HDF-EOS Grid and Swath APIs do not provide a means of storing global data relevant to an entire file as opposed to a single Swath or Grid data set.) These metadata are used to process a file, but they are not intended to be used for search purposes. MISR is currently using this class of metadata to store such things as additional projection information and product statistics. If a file contains only one Grid or Swath dataset, and Grid/Swath-Metadata (section 3.3.5 below) are attached at that level, File Metadata may not be included in the file. The values for a particular attribute must all be of the same type.

### 3.3.5 Per-grid/Per-swath Metadata

Grid and Swath Metadata are internal to HDF-EOS files and are used to provide MISR-specific information unique to an individual Grid or Swath dataset in the file. An example of such metadata is the resolution of the data in a Grid or Swath dataset. In the case of Swath files, these metadata are the global attributes of a Swath dataset, while in the case of Grid files these are Grid attributes attached using HDF-EOS Grid application calls. The values for a particular attribute must all be the same type.

### 3.3.6 Per-block Metadata

The Per-block Metadata are internal to the file and are used to provide MISR-specific information unique to an individual block of a Grid dataset. This class of metadata is used only in Grid files. Since the HDF-EOS Grid API does not contain structures for dealing with MISR blocks, these metadata are stored using standard NCSA-supplied HDF Vdata tables within the file. A wrapper was written around the native HDF Vdata interface for reading and writing Per-block Metadata. Because native HDF expects a file id returned from Hopen, the file id returned from GDopen cannot be used when calling native HDF routines. Consequently, an HDF-EOS function, called EHidinfo, has been provided for translating grid file ids to native file ids. The native file id is then used in the Vdata calls. The attributes stored in Per-block Metadata include per-block coordinates, such as L1B2 transform information, and statistics.

## 3.4 MISR PRODUCTS: QUALITY ASSURANCE FORMATS

To characterize the quality of MISR standard science data products four types of Quality Assurance (QA) structures have been developed by MISR project scientists and they are related naturally to MISR instrument swaths, blocks, lines and pixels. Typical QA content consists of a

collection of statistics that may be indexed over some dimension (e.g., block within a swath). The most suitable HDF type for this purpose is a standard NCSA-supplied HDF Vdata. Vdata's are collections of one-dimensional fixed-length records, where each record is composed of one or more fixed-length array fields. Vdata records are identical in structure; however, the content, or data, may vary from one record to the next. The number of records in a Vdata is not fixed, as records can be appended to a Vdata. The limitation of the Vdata structure is its restriction to a single dimension, i.e., records cannot be indexed by two or more dimensions. MISR QA Vdatas are organized within standard NCSA-supplied HDF Vgroups, container classes that collect related objects together. Using VGroups to organize the Vdatas helps define a file logically and also makes viewing MISR QA easier.

### 3.4.1 QA Fields

As alluded to in the above paragraph, MISR QA is organized around MISR instrument swaths, blocks, lines, and pixels. The QA statistics are generally organized within the following four fields of a Vdata.

**Per-swath Field** - Single value statistic (integer or floating point) relevant to an entire MISR swath of a data product. There might be on the order of 100 Per-swath QA Fields defined in a given QA file.

**Per-block Field** - Single value statistic (integer or floating point) relevant to a particular MISR block. There might be on the order of 100 Per-block QA Fields defined in a given QA file. There are 180 blocks in a MISR swath for each of the 4 bands of each of the nine MISR cameras. All Per-block QA Fields relating to a particular block should be indexed by that block number, but should also be easily displayed as a single statistic down the length of the swath. The Per-block QA Field is primarily used with HDF-EOS Grid products.

**Per-line Field** - Single value statistic (integer or floating point) relevant to a particular line in a swath. There might be on the order of 100 per-line fields defined in a given QA file. There are up to 72,000 in a MISR swath for each band of each camera. All Per-line QA Fields relating to a particular line should be indexed by that line number, but should also be easily displayed as a single statistic down the length of the swath. The Per-line QA Field is primarily used with HDF-EOS Swath products.

**Per-pixel Field** - Single value statistic (integer or floating point) relevant to a particular pixel in a swath. There are 1520 pixels in a line. All Per-pixel QA Fields relating to a particular pixel should be indexed by that pixel number. The Per-pixel QA Field is primarily used with HDF-EOS Swath products.

MISR standard data products also incorporate a few unique QA structures in addition to the above four. These additional QA structures are special in that they have more than one dimension which are not predefined in size. An example is the Grid Cell structure needed by L1B2:

**Per-grid Cell Field** - Single value statistic (integer or floating point) relevant to a particular L1B2 grid cell in a particular block, where the number of grid cells per block ranges from 2 to 6. All Per-grid Cell Fields are indexed by block and then by grid cell.


### 3.4.2 Standard QA Vdatas and VGroups

All Vgroups and Vdatas are identified by a name and class. Since HDF identifies objects by unique reference and tag numbers, the class and name do not have to be unique. However, HDF functions that search for names/classes, as opposed to reference numbers and tags, return the first occurrence found. A typical convention, which MISR QA adheres to, is to have unique names and classes specific to a type of Vdata. All Vdatas that share a class name have identical record structures.

A black box set of routines for performing all MISR QA operations would be useful. However, this is not possible because every MISR data product has its own unique set of QA statistics. The best that we can achieve is to enforce a set of rules for QA file formats and provide a library of code that wraps low level HDF calls for accessing the QA Vdatas. The rules of QA file format are as follows:

- All QA types will have a Vgroup to which all related Vdatas and Vgroups will be attached.
- All QA data are stored in Vdatas, where Vdata attributes may be used where appropriate.
- All Vdatas will belong to a single Vgroup; lone Vdatas and membership to multiple Vgroups are not allowed.
- A naming convention will be established for Vdata/Vgroup names and classes.
- The Per-swath, Per-block, Per-line, and Per-pixel QA types will have predefined names located in a .h file.
- One exception to the rule: QA metadata for describing the origin of the data (time of collection, orbit number, etc.) don't really belong in any particular Vgroup or Vdata; therefore, they will be implemented as global SD attributes.

The basic organization of the four standard QA types is illustrated in Figure 3-2 below. The swath QA is stored in a Vdata for consistency. There will only be one record in the Vdata because MISR products are created on a per swath basis. The block, line, and pixel level QA use

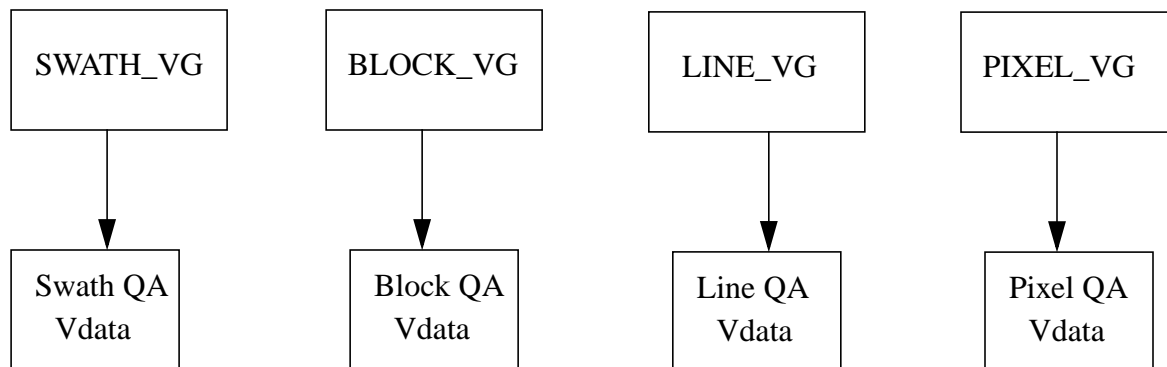**Figure 3-2 MISR QA standard Vdata and Vgroup structures.**

the block, line, and pixel dimension, respectively, as the record dimension. It is probably most common for these records to be contiguous; however, to allow a more sparse storage scheme (i.e., maybe only some blocks have QA) one of the fields in the Per-block record indicates the MISR block number and one of the fields in the Per-line record indicates the line number.

We have adopted the convention of using unique names for Vdatas and Vgroups and unique classes to describe the type of QA. For clarity these conventions, as well as some additional constraints from MISR SDP, are enumerated below:

- All type of names (Vgroup, Vdata, attribute, field, etc.) should contain no spaces. Underscores are acceptable. To conserve space MISR capitalizes the first letter of each word, e.g., “SwathQaRed1x1”.
- All Vgroup/Vdata names within a single MISR file are unique.
- All classes are prefixed by the name of the MISR product, guaranteeing uniqueness across product types. For example, the L1B2 terrain projected radiance QA file will prefix all classes with the “Terrain” string.
- Within a single file Vdata classes are common for identical record types, but unique for each type of record. For example, some level L1B1 QA are separated by band and average mode, but information for each is the same. All of the individual Vdatas (e.g., “LineQaRed1x1”, “LineQaGreen4x4”) share one class (e.g., “B1GlobalModeLineQaBandAvgMode”). However, a global line QA structure (e.g., “LineQaGlobal”) has a different class (“B1GlobalModeLineQaGlobal”).
- Vgroup classes can be conveniently named the same as the Vgroup name with the product type prepended. Unlike Vdatas, there aren’t multiple instances of Vgroups that share a common class.

### 3.4.3 Special QA Vdatas and VGroups

There are no hard rules for adding custom MISR QA structures; whatever is logical and fits within


the general QA rules is the best approach. As an example, the L1B2 Terrain processing operates on units called Grid Cells. A Grid Cell is a subregion of a block. The number of grid cells in a block is not fixed, nor known, until the block is actually processed. This prevents us from just adding grid cell fields to the block QA and making each field n-dimensional with n being the number of grid cells in that block. Remember that Vdata records are fixed in length. We could determine the maximum value of n and use it to fix a Vdata record length; however, this would waste a lot of space in the QA file. Therefore, Grid Cell QA must be stored in a separate Vdata. It is desirable to index a Grid Cell by the block to which it belongs, as well its grid cell index. If we create a single Vdata for the Grid Cell QA, then one of the fields would map each record to the appropriate block number. Another alternative is to create a Vdata for each block of Grid Cells. This latter approach proves to be a better solution because Grid Cells are usually examined in the context of a block.

An example of MISR QA that incorporates the standard and special Grid Cell QA types is illustrated in Figure 3-3. The L1B2 product tracks swath level QA statistics for each band, where each band has a particular averaging mode associated with it. In this instance we create a distinct Vdata for each band with the averaging mode in the name. So, if the Red band is in the 1x1 averaging mode, we have the Vdata "Red 1x1 QA." These Vdatas are attached to the swath Vgroup. The Grid Cell Vgroup is placed under the Block Vgroup to associate them logically as discussed above. This implies that someone wouldn't be interested in looking at Grid Cell QA without first examining block QA. Because there are multiple Grid Cell Vdatas, we append the block number to the base name (e.g, "Grid Cell QA 1").

The four standard metadata types - swath, block, pixel, and line, have the following rules for all products:

- Per-swath Vdata always consists of a single record;
- Per-block Vdata maps block number to record number; the convention used in the product data files is that record 0 corresponds to Block 1, record 1 corresponds to Block 2, etc., even though we only process ~140 of the 180 blocks per swath; required fields are "BlockNumber" and "ValidRecord;"
- Per-line Vdata maps line number to record number; the convention used in the product data files is that record 0 corresponds to Line 0, etc.; required fields are "LineNumber" and "ValidRecord;"
- Per-pixel Vdata maps pixel number to record number; the convention used in the product data files is that record 0 corresponds to Pixel 0, etc.; required fields are "PixelNumber" and "ValidRecord."

Figure 3-3 MISR QA special Grid Cell Vdata structures.

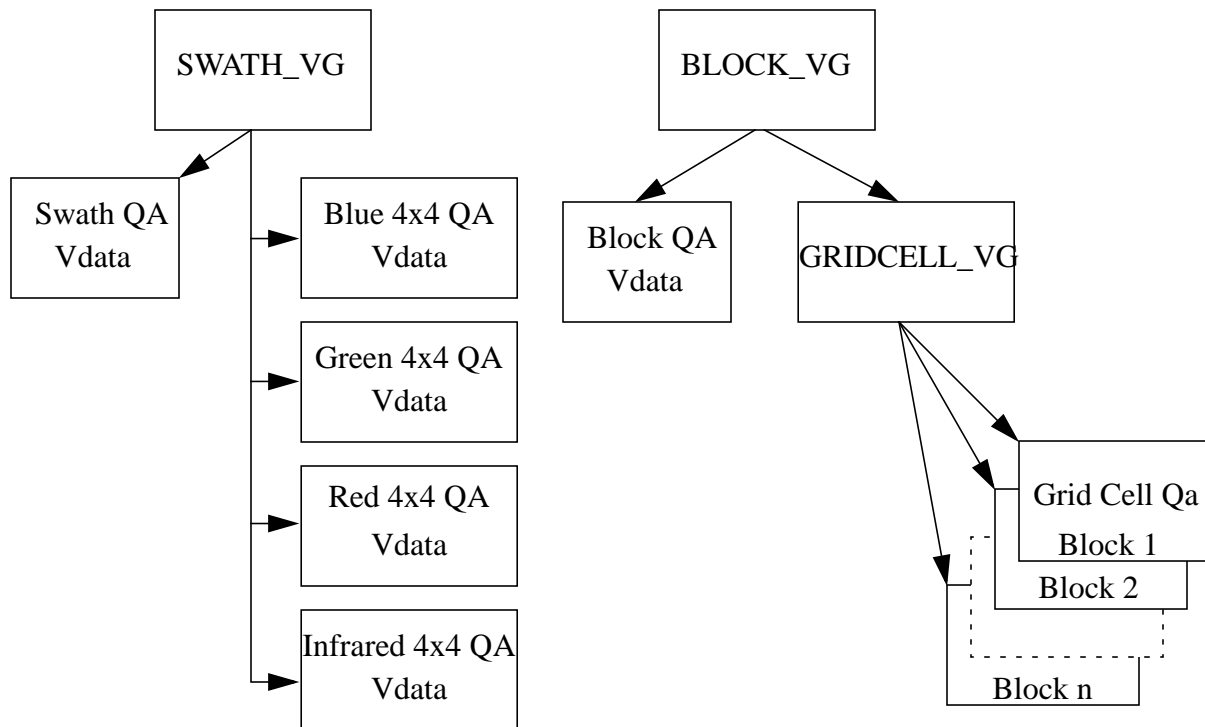

## 4.0 MISR LEVEL 1A REFORMATTED ANNOTATED PRODUCT

### 4.1 MISR LEVEL 1A PRODUCT GRANULE NAMES

**MISR Level 1A Reformatted Annotated Products** are composed of the six different file granules listed below:

**Table 4-1: MISR Level 1A File Granule Names.**

<b>MISR LEVEL 1A FILE GRANULE NAME</b>	<b>ESDT Name</b>	<b>Section</b>
MISR_AM1_FM_SCI_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MIL1A	4.5
MISR_AM1_FM_CAL_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MI1AC	4.6
MISR_AM1_FM_MTR_CL_Pmmm_Onnnnnn_Fff_vvvv.hdf	MI1AMOT	4.7
MISR_AM1_FM_NAV_GM_Pmmm_Onnnnnn_Fff_vvvv.hdf	MI1ANAV	4.8
MISR_AM1_FM_ENG_GM_Pmmm_Onnnnnn_Fff_vvvv.hdf	MI1AENG1	4.9
MISR_AM1_FM_OBC_CL_Pmmm_Onnnnnn_Fff_vvvv.hdf	MI1AOBC	4.10

### 4.2 MISR LEVEL 1A PRODUCT GRANULE BRIEF DESCRIPTIONS

#### 4.2.1 MISR LEVEL 1A MIL1A CCD Science Instrument Data

MISR Level 1A (MIL1A) CCD Science Instrument Data are the primary archive of the MISR instrument. The MISR CCD Science Instrument Data acquired from all nine of the MISR cameras for each of the four bands represent the raw MISR input data staged for MISR Science Instrument Data processing. There are nine file granules of this type, one corresponding to each of the nine MISR cameras. Each file granule contains four entire swaths of data, one swath for each of the four MISR bands associated with each MISR camera.

There are three functional processing steps to transform the raw Level 0 data into the Level 1A output: reversal of the square-root encoding performed on the instrument data, byte-alignment, and reformatting of CCD line array data. The reversal of the square-root encoding converts the 12-bit data fields extracted from the CCD Science Instrument Data packets into 14-bit CCD DN data values. The L1A CCD Science Instrument Data include both radiance data and Image Data Quality Indicator (IDQI) parameters. The IDQI values are packed in the least significant 2 bits of the DN data. Therefore, each CCD Science Instrument Datum at the pixel level is 16-bits: 14 bits for the radiance value and 2-bits for the IDQI value. Verifications of packet sequencing, formats and sizes are also executed and reported. The Level 1A output product is time-ordered, band-separated and error-checked.

ECS metadata are generated and incorporated into the product, as well as placed into an associ-

ated Core, or Product, Metadata file. A QA statistics file is no longer generated for this product.

Processing of the raw CCD Science Instrument Data no longer includes generation of the Level 1 browse product. The Level 1 browse product was output as a JPEG file in HDF RIS8 format. The browse product was based on the MISR red band with a 1x1 (275 m by 275 m) sampling that is pixel-averaged uniformly throughout the entire swath to a resolution of 4.4 km.

#### **4.2.2 MISR LEVEL 1A MI1AC CCD Calibration Data**

MISR Level 1A (MI1AC) CCD Calibration Data are acquired as part of an on-orbit calibration experiment. These data are distinct from CCD Science Instrument Data and are identified with nine different APID (packet identification number) codes. The MISR L1A CCD Calibration Data include both radiance data and Image Data Quality Indicator (IDQI) parameters. The IDQI values are packed in the least significant 2 bits of the DN data. Hence, the per-pixel format of these data are identical to the CCD Science Instrument Data.

#### **4.2.3 MISR LEVEL 1A MI1AMOT Motor Data**

MISR Level 1A (MI1AMOT) Motor Data are acquired as part of an on-orbit calibration experiment. These data consist of measurements of the MISR instrument calibration panel motor currents. These data also include packet data for motor ID, motor current sampling frequency, and motor temperature.

#### **4.2.4 MISR LEVEL 1A MI1ANAV Navigation Data**

MISR Level 1A (MI1ANAV) Navigation Data include all spacecraft position, velocity, attitude and attitude rate data incorporated into MISR Level 1A Engineering Data packets. These data are read from the Command and Telemetry Bus during the period of one EOS-TERRA orbit.

#### **4.2.5 MISR LEVEL 1A MI1AENG Engineering Data**

MISR Level 1A (MI1AENG1) Engineering Data provide all of the data needed to describe the state of the instrument for Level 1 processing and analysis at a later date. These data are composed primarily of temperatures, voltages and currents of each camera, the optical bench, calibration-diodes, and system electronics. Verification and reporting flags for latches and limit-switches on the cover/goniometer and the calibration diffuser panels are also incorporated into these data.

#### **4.2.6 MISR LEVEL 1A MI1AOBC On-Board Calibration Data**

MISR Level 1A (MI1AOBC) On-board Calibration Data provide the radiometry from PIN and HQE diodes and goniometer mechanism readings collected during calibration mode operations near the north and south poles and over the darkside of the Earth (or during science mode operations over the sunlit side of the Earth). The diode radiometry acquired during north and south pole



calibration sequences will be used to determine brightness and reflective characteristics of a MISR diffuser panel as observed by each of the nine MISR cameras.

### 4.3 MISR LEVEL 1A PRODUCT GRANULE DATA SETS

The MISR Level 1A Standard Science Data Product is composed of 6 separate ESDTs, each with one physical file format, as shown in Table 4-2. Each physical file is in the HDF-EOS Swath format and each contains one or more HDF-EOS Swath datasets (Table 4-2)..

**Table 4-2: MISR Level 1A Reformatted Annotated Product Files and Swath Datasets**

<b>ESDT Shortname</b>	<b>Local Granule ID<sup>a</sup></b>	<b>Swath Dataset Name</b>
MIL1A	MISR_AM1_FM_SCI_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	blue_band_1x1 blue_anc_1x1 green_band_1x1 green_anc_1x1 red_band_1x1 red_anc_1x1 nir_band_1x1 nir_anc_1x1 blue_band_1x4 blue_anc_1x4 green_band_1x4 green_anc_1x4 red_band_1x4 red_anc_1x4 nir_band_1x4 nir_anc_1x4 blue_band_2x2 blue_anc_2x2 green_band_2x2 green_anc_2x2 red_band_2x2 red_anc_2x2 nir_band_2x2 nir_anc_2x2 blue_band_4x4 blue_anc_4x4 green_band_4x4 green_anc_4x4 red_band_4x4 red_anc_4x4 nir_band_4x4 nir_anc_4x4 spurious_pkts

**Table 4-2: MISR Level 1A Reformatted Annotated Product Files and Swath Datasets**

<b>ESDT Shortname</b>	<b>Local Granule ID<sup>a</sup></b>	<b>Swath Dataset Name</b>
MI1AC	MISR_AM1_FM_CAL_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	blue_band_1x1 blue_anc_1x1 green_band_1x1 green_anc_1x1 red_band_1x1 red_anc_1x1 nir_band_1x1 nir_anc_1x1 blue_band_1x4 blue_anc_1x4 green_band_1x4 green_anc_1x4 red_band_1x4 red_anc_1x4 nir_band_1x4 nir_anc_1x4 blue_band_2x2 blue_anc_2x2 green_band_2x2 green_anc_2x2 red_band_2x2 red_anc_2x2 nir_band_2x2 nir_anc_2x2 blue_band_4x4 blue_anc_4x4 green_band_4x4 green_anc_4x4 red_band_4x4 red_anc_4x4 nir_band_4x4 nir_anc_4x4
MI1AMOT	MISR_AM1_FM_MTR_CL_Pmmm_Onnnnnn_Fff_vvvv.hdf	MTRSwath
MI1AENG1	MISR_AM1_FM_ENG_GM_Pmmm_Onnnnnn_Fff_vvvv.hdf	EngSwath
MI1ANAV	MISR_AM1_FM_NAV_GM_Pmmm_Onnnnnn_Fff_vvvv.hdf	NavSwath
MI1AOBC	MISR_AM1_FM_OBC_CL_Pmmm_Onnnnnn_Fff_vvvv.hdf	OBCSwath

a. Where Pmmm corresponds to the orbit path number, Onnnnnn is the absolute orbit number, cc is the camera identifier, and Fff is the file format version and vvvv is the file version number.

#### 4.4 MISR LEVEL 1A PRODUCT SHARED SWATH DESCRIPTORS

Dimension	Description	Valid Values
DownTrack	Unlimited, number of lines acquired during the collection of MISR CCD science data	0 -
CrossTrack	Number of CCD DN's acquired	380 for 4x4 averaging 760 for 2x2 averaging 1520 for 1x1, 1x4 averaging

For the nominal Global Mode called “Super Stereo”, the following table relates the spatial resolution to camera and band.

**Table 4-3: Spatial Resolution Distribution for Global mode**

Grid	DF	CF	BF	AF	AN	AA	BA	CA	DA
<b>BlueBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>GreenBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>RedBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>NIRBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km

For Local Mode, the following table relates the spatial resolution to camera and band.

**Table 4-4: Spatial Resolution Distribution for Local mode**

Grid	DF	CF	BF	AF	AN	AA	BA	CA	DA
<b>BlueBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>GreenBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>RedBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>NIRBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m

## 4.5 MISR LEVEL 1A MIL1A CCD SCIENCE INSTRUMENT DATA

### 4.5.1 File Metadata Description

None.

### 4.5.2 Per-swath Metadata Description

**Table 4-5: CCD Science Per-Swath Metadata.**

Swath Metadata	Definition	Data Type	Valid Values
NumLines	not used	uint32	0
NumSamples	not used	uint32	0
NumSatSamples	not used	uint32	0
NumSatLines	not used	uint32	0
NumLinesWithSatPixels	not used	uint32	0
NumLinesThreshFail	not used	uint32	0

### 4.5.3 Per-block Metadata Description

N/A

### 4.5.4 Per-line Metadata Description

The CCD Science Data file uses primarily Per-Line Metadata (Table 4-6). Per-Line Metadata are stored in the Time Tags SDS linked to the DNs SDS by sharing the same X-Dim. For instance, the red band DNs are in the swath red\_band\_1x1.DN. The corresponding Per-Line Metadata is in the swath red\_anc\_1x1.Time Tags. .

**Table 4-6: CCD Science Per-Line Metadata.**

PerLine Metadata	Definition	Data Type	Valid Range
time_days	Time tag(0) -first 16 bits of 64 bit time tag field representing days	FLOAT32	0 - 65535
time_msec1	Time tag(1) - second 16 bits of 64 bit time tag field representing milliseconds	FLOAT32	0 - 65535
time_msec2	Time tag(2) - third 16 bits of 64 bit time tag field representing milliseconds	FLOAT32	0 - 65535
time_micro	Time tag(3) - fourth 16 bits of 64 bit time tag field representing microseconds	FLOAT32	0 - 65535
Line_mean	Active pixel region line average	FLOAT32	0 - 16383

**Table 4-6: CCD Science Per-Line Metadata. (Continued)**

PerLine Metadata	Definition	Data Type	Valid Range
Std_dev_ac	Active pixel region standard deviation	FLOAT32	0 - 400
Min_ac_dn	Minimum DN value in active pixel region	FLOAT32	0 - 16383
Max_ac_dn	Maximum DN value in active pixel region	FLOAT32	0 - 16383
Overclock_mean	Overclock pixel region line average	FLOAT32	0 - 1000
Std_dev_oc	Overclock pixel region standard deviation	FLOAT32	0 - 400
Min_oc_dn	Minimum DN value in overclock pixel region	FLOAT32	0 - 16383
Max_oc_dn	Maximum DN value in overclock pixel region	FLOAT32	0 - 16383
rti_eosec	Number of 8 ms intervals, eosec -> MSYNC	FLOAT32	0 - 5
Ccd_int_time	CCD line integration time	FLOAT32	0 - 40.8 ms
Cam_mode_flag	Camera mode (global/local)	FLOAT32	0=Local, 1=Global

#### 4.5.5 Per-pixel Metadata Description

None.

#### 4.5.6 Swath Data Set Descriptions

**Table 4-7: CCD Science Swath Field Definitions**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Swath blue_band_1x1</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath_blue_anc_1x1</b>					
(Field definitions described Table [4-6])					
<b>Swath green_band_1x1</b>					

**Table 4-7: CCD Science Swath Field Definitions (Continued)**

<b>Field Name</b> Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath green_anc_1x1</b>					
(Field definitions described Table [4-6])					
<b>Swath red_band_1x1</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath red_anc_1x1</b>					
(Field definitions described Table [4-6])					
<b>Swath nir_band_1x1</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath nir_anc_1x1</b>					
(Field definitions described Table [4-6])					
<b>Swath blue_band_1x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath blue_anc_1x4</b>					
(Field definitions described Table [4-6])					
<b>Swath green_band_1x4</b>					

**Table 4-7: CCD Science Swath Field Definitions (Continued)**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath green_anc_1x4</b>					
(Field definitions described Table [4-6])					
<b>Swath red_band_1x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath red_anc_1x4</b>					
(Field definitions described Table [4-6])					
<b>Swath nir_band_1x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath nir_anc_1x4</b>					
(Field definitions described Table [4-6])					
<b>Swath blue_band_2x2</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath blue_anc_2x2</b>					
(Field definitions described Table [4-6])					
<b>Swath green_band_2x2</b>					

**Table 4-7: CCD Science Swath Field Definitions (Continued)**

<b>Field Name</b> Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specification 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath green_anc_2x2</b>					
(Field definitions described Table [4-6])					
<b>Swath red_band_2x2</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath red_anc_2x2</b>					
(Field definitions described Table [4-6])					
<b>Swath nir_band_2x2</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath red_anc_2x2</b>					
(Field definitions described Table [4-6])					
<b>Swath blue_band_4x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath blue_anc_4x4</b>					
(Field definitions described Table [4-6])					
<b>Swath green_band_4x4</b>					



**Table 4-7: CCD Science Swath Field Definitions (Continued)**

<b>Field Name</b> Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath green_anc_4x4</b>					
(Field definitions described Table [4-6])					
<b>Swath red_band_4x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath red_anc_4x4</b>					
(Field definitions described Table [4-6])					
<b>Swath nir_band_4x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = IDQI Bits 2-15 = dn	IDQI: 0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose
<b>Swath nir_anc_4x4</b>					
(Field definitions described Table [4-6])					
<b>Swath spurious_pkts</b>					
SpuriousPkts	PktDownTrack, PktCrossTrack	UCHAR8	n/a	n/a	n/a

**4.5.7 CCD Science Product QA**

Additional Quality Assessment Metadata is no longer reported in HDF-EOS vdata structures.

Separate QA Statistics files are no longer generated.

## 4.6 MISR LEVEL 1A MI1AC CCD CALIBRATION DATA

### 4.6.1 File Metadata Description

None.

### 4.6.2 Per-swath Metadata Description

**Table 4-8: CCD Calibration Per-swath Metadata.**

Swath Metadata	Definition	Data Type	Valid Values
PGE4_ORBIT_NO	Orbit counter	INT32	1-
PGE4_PATH_NO	Orbit path counter	INT32	1-233
PGE4_OUT_OF_ORDER_PKTS	Listing of out of order packets found	INT16	(Array of 50)
PGE4_DUPLICATE_PKTS	Listing of duplicate packets found	INT16	(Array of 50)
PGE4_PIXEL_REVERSAL	Pixel reversal determinant	INT32	0/1

### 4.6.3 Per-block Metadata Description

None.

### 4.6.4 Per-line Metadata Description

The CCD Calibration Data file uses primarily Per-Line Metadata (Table 4-9). Per-Line Metadata is stored in the TimeTags SDS linked to the DNs SDS by sharing the same X-Dim.

**Table 4-9: CCD Calibration Per-Line Metadata**

PerLine Metadata	Definition	Data Type	Valid Range
time_days	Time tag(0) -first 16 bits of 64 bit time tag field representing days	FLOAT32	0 - 65535
time_msec1	Time tag(1) - second 16 bits of 64 bit time tag field representing milliseconds	FLOAT32	0 - 65535
time_msec2	Time tag(2) - third 16 bits of 64 bit time tag field representing milliseconds	FLOAT32	0 - 65535
time_micro	Time tag(3) - fourth 16 bits of 64 bit time tag field representing microseconds	FLOAT32	0 - 65535
Line_mean	Active pixel region line average	FLOAT32	0 - 16383

**Table 4-9: CCD Calibration Per-Line Metadata (Continued)**

PerLine Metadata	Definition	Data Type	Valid Range
Std_dev_ac	Active pixel region standard deviation	FLOAT32	0 - 400
Min_ac_dn	Active pixel region standard deviation	FLOAT32	0
Max_ac_dn	Maximum DN value in active pixel region	FLOAT32	16383
Overclock_mean	Overclock pixel region line average	FLOAT32	0 - 1000
Std_dev_oc	Overclock pixel region standard deviation	FLOAT32	0 - 400
Min_oc_dn	Minimum DN value in overclock pixel region	FLOAT32	0
Max_oc_dn	Maximum DN value in overclock pixel region	FLOAT32	16383
Sun_angle_x	Sun angle - x coordinate	FLOAT32	
Sun_angle_y	Sun angle - y coordinate	FLOAT32	
Sun_angle_z	Sun angle - z coordinate	FLOAT32	
Ccd_int_time	CCD line integration time	FLOAT32	0 - 40.8

#### 4.6.5 Per-pixel Metadata Description

None.

#### 4.6.6 Swath Data Set Descriptions

For CCD calibration processing, the data collected during any of the types of calibration sequence modes (North pole, South pole, Dark, Diode) is stored in an appropriate SDS based on band and averaging mode. Since the cameras are taken through multiple averaging modes and integration times during any one calibration operation the data collected is stored in time order in the appropriate band/averaging mode defined SDSs. Ancillary metadata for each set of calibration DNs (including time tag) are defined in Table 4-10.

**Table 4-10: CCD Calibration Swath Field Definitions**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Swath blue_band_1x1</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors

**Table 4-10: CCD Calibration Swath Field Definitions (Continued)**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Swath_blue_anc_1x1</b>					
(Field definitions described Table 4-10)					
<b>Swath_green_band_1x1</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath_green_anc_1x1</b>					
(Field definitions described Table 4-10)					
<b>Swath_red_band_1x1</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath_red_anc_1x1</b>					
(Field definitions described Table 4-10)					
<b>Swath_nir_band_1x1</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath_nir_anc_1x1</b>					
(Field definitions described Table 4-10)					
<b>Swath_blue_band_1x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath_blue_anc_1x4</b>					
(Field definitions described Table 4-10)					
<b>Swath_green_band_1x4</b>					

**Table 4-10: CCD Calibration Swath Field Definitions (Continued)**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath green_anc_1x4</b>					
(Field definitions described Table 4-10)					
<b>Swath red_band_1x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath red_anc_1x4</b>					
(Field definitions described Table 4-10)					
<b>Swath nir_band_1x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath nir_anc_1x4</b>					
(Field definitions described Table 4-10)					
<b>Swath blue_band_2x2</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath blue_anc_2x2</b>					
(Field definitions described Table 4-10)					
<b>Swath green_band_2x2</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors

**Table 4-10: CCD Calibration Swath Field Definitions (Continued)**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Swath green_anc_2x2</b>					
(Field definitions described Table 4-10)					
<b>Swath red_band_2x2</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath red_anc_2x2</b>					
(Field definitions described Table 4-10)					
<b>Swath nir_band_2x2</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath red_anc_2x2</b>					
(Field definitions described Table 4-10)					
<b>Swath blue_band_4x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath blue_anc_4x4</b>					
(Field definitions described Table 4-10)					
<b>Swath green_band_4x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath green_anc_4x4</b>					
(Field definitions described Table 4-10)					
<b>Swath red_band_4x4</b>					

**Table 4-10: CCD Calibration Swath Field Definitions (Continued)**

<b>Field Name</b> Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath red_anc_4x4</b>					
(Field definitions described Table 4-10)					
<b>Swath nir_band_4x4</b>					
DNs	DownTrack, CrossTrack	UINT16	dn	Bit packed: Bits 0-1 = SDQI Bits 2-15 = dn	SDQI: 0 = No known anomalies 1 = Overclock out-of-range 2 = Saturated pixels 3 = Data transmission errors
<b>Swath nir_anc_4x4</b>					
(Field definitions described Table 4-10)					
<b>Swath spurious_pkts</b>	PktDownTrack, PktCrossTrack	UCHAR8	n/a	n/a	n/a

**4.6.7 Per-swath QA Metadata**

None.

## 4.7 MISR LEVEL 1A MI1AMOT MOTOR DATA

### 4.7.1 File Metadata Description

None.

### 4.7.2 Per-swath Metadata Description

**Table 4-11: Motor Per-swath Metadata.**

Swath Metadata	Definition	Data Type	Valid Values
PGE3_ORBIT_NO	Orbit counter	INT32	1-
PGE3_PATH_NO	Orbit path counter	INT32	1-233
PGE3_START_TIME	Calibration start time	FLOAT64	S/C time
PGE3_STOP_TIME	Calibration stop time	FLOAT64	S/C time
PGE3_NUM_MTR_SAMPLES	Number of motor samples	INT32	
PGE3_SWATH_FLAGS	Quality flag for calibration	INT8	1-128
PGE3_OUT_OF_ORDER_PKTS	Listing of out of order packets found	INT16	(Array of 50)
PGE3_DUPLICATE_PKTS	Listing of duplicate packets found	INT16	(Array of 50)

### 4.7.3 Per-block Metadata Description

None.

### 4.7.4 Per-line Metadata Description

None.

### 4.7.5 Per-pixel (or -sample) Metadata Description

Table 4-12 describes the Per-sample Metadata that are specific to each data sample in a packet during the calibration sequence. For each data value in the motor current SDS there is a corresponding metadata value in the corresponding metadata SDS.



**Table 4-12: Motor Data Per-Sample Metadata**

PerPacket Metadata	Definition	Data Type	Valid Range
Current sample quality indicators	<p>Quality values associated with each motor current sample. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	(Array of 283)

#### 4.7.6 Swath Data Set Descriptions

For MISR calibration processing the data collected during any of the types of calibration sequence modes (North pole, South pole, Dark, Diode) generates motor data which is stored in the MISR L1A Motor output product. Data quality checks are performed on all current samples and time tags in the packet.

**Table 4-13: Motor Data Dimension Descriptions**

Dimension	Description	Valid Values
PGE3_TIME_DIMENSION	Unlimited, time tag for each motor packet collected	0 -
PGE3_TIME_XTRACK_DIMENSION	Number of bytes in a motor packet time tag	8
PGE3_DOWN_TRACK_DIMENSION	Unlimited, number of lines acquired during the collection of MISR motor data	0 -
PGE3_CURR_DIMENSION	Number of current sampled acquired	283
PGE3_META_XTRACK_DIMENSION	Number of metadata values per packet	4

**Table 4-14: Motor Data Swath Field Definitions**

Field Name Parameter Description	Dimension List	Number Type
PGE3_CURR_SAMPLE_TIME_TABLE	PGE3_DOWN_TRACK_DIMENSION, PGE3_TIME_XTRACK_DIMENSION	UINT8
PGE3_PACKET_QUAL_TABLE	PGE3_DOWN_TRACK_DIMENSION	UINT32

**Table 4-14: Motor Data Swath Field Definitions (Continued)**

Field Name Parameter Description	Dimension List	Number Type
PGE3_PACKET_META_TABLE	PGE3_DOWN_TRACK_DIMENSION, PGE3_PACKET_META_XTRACK_DIMENSION	FLOAT32
PGE3_CURR_SAMPLE_TABLE	PGE3_DOWN_TRACK_DIMENSION, PGE3_CURR_DIMENSION	FLOAT32
PGE3_DATA_QUAL_TABLE	PGE3_DOWN_TRACK_DIMENSION, PGE3_CURR_DIMENSION	UINT8

Table 4-15 lists the data fields in the swath based on the location the data has been collected on the instrument. Each represents an SDS in the output MISR motor file.

**Table 4-15: Swath Data fields for Motor Data**

Field Name	Description	Data Type	Valid Range
<b>PGE3_curr_sample_time_table</b>			
time_days	Time tag -first 16 bits of 64 bit time tag field representing days (array of 2 bytes)	FLOAT32	0 - 65536
time_msec1	Time tag - second 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_msec2	Time tag - third 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_micro	Time tag - fourth 16 bits of 64 bit time tag field representing microseconds (array of 2 bytes)	FLOAT32	0 - 1000
<b>PGE3_packet_quality</b>			

**Table 4-15: Swath Data fields for Motor Data (Continued)**

Field Name	Description	Data Type	Valid Range
qual_indicator	Motor packet data quality indicator Quality values associated with each motor packet. Using bit-level triggers the quality flag is toggled as follows:  Bit 0: Packet header has an error Bit 1: Bad packet APID Bit 2: Invalid packet length Bit 3: Bad packet time stamp Bit 4: Packet time out of order Bit 7: Packet sequence number out of order	INT8	0 - 128
<b>PGE3_packet_meta_table</b>			
motor_id	Motor identifier 0 = North cal panel 1 = South cal panel 3 = cover	INT32	0 - 2
motor_temperature	Motor temperature	FLOAT32	-30 to 50
curr_samp_freq	Motor current sampling frequency	FLOAT32	40ms
tot_num_curr_samples	Number of currents samples	INT32	0 -
<b>PGE3_curr_sample_table</b>			
curr_sample	Motor current sample values (array of 283)	FLOAT32	0 - 2110ma
<b>PGE3_data_qual_table</b>			
(Field definitions described Table 4-14)			

**4.7.7 Per-swath QA Metadata**

None.

## 4.8 MISR LEVEL 1A MI1ANAV NAVIGATION DATA

### 4.8.1 File Metadata Description

None.

### 4.8.2 Per-swath Metadata Description

**Table 4-16: NAVIGATION Per-swath Metadata.**

Swath Metadata	Definition	Data Type	Valid Values
PGE2_ORBIT_NO	Orbit counter	INT32	1-
PGE2_PATH_NO	Orbit path counter	INT32	1-233
PGE2_START_TIME	Calibration start time	FLOAT64	S/C time
PGE2_STOP_TIME	Calibration stop time	FLOAT64	S/C time
PGE2_NUMBER_OF_PACKETS	Number of Navigation packets	INT32	0 -
PGE2_SWATH_FLAGS	Quality flag for engineering data collection	INT8	1-128
PGE2_OUT_OF_ORDER_PKTS	Listing of out of order packets found	INT16	(Array of 50)
PGE2_DUPLICATE_PKTS	Listing of duplicate packets found	INT16	(Array of 50)

### 4.8.3 Per-block Metadata Description

None.

### 4.8.4 Per-line Metadata Description

None.

### 4.8.5 Per-pixel (or -sample) Metadata Description

The Engineering Data file uses primarily Per-sample Metadata (Table 4-17). Each multiplexer (MUX), or Camera-specific data, retrieved from the instrument is stored in a separate SDS in the output file.

**Table 4-17: Navigation Per-Sample Metadata**

PerLine Metadata	Definition	Data Type	Valid Range
Navigation values quality indicators	<p>Quality values associated with each navigation data values. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	(Array of 13)

#### 4.8.6 Swath Data Set Descriptions

For MISR Engineering/navigation data collected during an EOS orbit the data generated is stored in an appropriate SDS in the output product. The navigation data and data quality indicators describing the values are stored in the swath and data dimensions are defined below.

**Table 4-18: Navigation Data Dimension Descriptions**

Dimension	Description	Valid Values
PGE2_DOWN_TRACK_DIMENSION	Unlimited, number of lines acquired during the collection of MISR engineering data	0 -
PGE2_NAVIGATION_DIMENSION	Navigation sample values	13
PGE2_TIME_DIMENSION	Unlimited, time tag for each engineering packet collected	0 -
PGE2_TIME_ARRAY_DIMENSION	Number of bytes in a engineering/navigation packet time tag	8

**Table 4-19: Navigation Data Swath Field Definitions**

Field Name Parameter Description	Dimension List	Number Type
<b>Swath NavSwath</b>		
PGE2_PACKET_QUAL	PGE2_DOWN_TRACK_DIMENSION	UINT32

**Table 4-19: Navigation Data Swath Field Definitions**

Field Name Parameter Description	Dimension List	Number Type
PGE2_NAVIGATION_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_NAVIGATION_DIMENSION	FLOAT32
PGE2_NAVIGATION_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_NAVIGATION_DIMENSION	UINT8
PGE2_TIME_TABLE	PGE2_TIME_DIMENSION, PGE2_TIME_ARRAY_DIMENSION	UINT8

Table 4-20 lists the data fields in the swath based on the location the data has been collected on the instrument. Each represents an SDS in the output MISR navigation file.

**Table 4-20: Swath Data Fields for Navigation Data**

Field Name	Description	Data Type	Valid Range
<b>PGE2_time_table</b>			
time_days	Time tag -first 16 bits of 64 bit time tag field representing days (array of 2 bytes)	FLOAT32	0 - 65536
time_msec1	Time tag - second 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_msec2	Time tag - third 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_micro	Time tag - fourth 16 bits of 64 bit time tag field representing microseconds (array of 2 bytes)	FLOAT32	0 - 1000
<b>PGE2_packet_qual</b>			
qual_indicator	Motor packet data quality indicator Quality values associated with each motor packet. Using bit-level triggers the quality flag is toggled as follows:  Bit 0: Virtual data file could not be opened Bit 1: Header file could not be read Bit 2: Header packet count wrong Bit 3: Header spacecraft id wrong Bit 4: Header time stamp wrong Bit 7: Swath OK flag	INT8	0 - 128

**Table 4-20: Swath Data Fields for Navigation Data (Continued)**

Field Name	Description	Data Type	Valid Range
<b>PGE2_navigation_table</b>			
x_axis_pos	X-axis position (m)	FLOAT32	$\pm 268 \times 10^6$
y_axis_pos	Y-axis position (m)	FLOAT32	$\pm 268 \times 10^6$
z_axis_pos	Z-axis position (m)	FLOAT32	$\pm 268 \times 10^6$
x_axis_vel	X-axis velocity (m/s)	FLOAT32	$\pm 524 \times 10^3$
y_axis_vel	Y-axis velocity (m/s)	FLOAT32	$\pm 524 \times 10^3$
z_axis_vel	Z-axis velocity (m/s)	FLOAT32	$\pm 524 \times 10^3$
roll_axis_angle	Roll-axis Euler angle (arcsec)	FLOAT32	$\pm 2048$
pitch_axis_angle	Pitch-axis Euler angle (arcsec)	FLOAT32	$\pm 2048$
yaw_axis_angle	Yaw-axis Euler angle (arcsec)	FLOAT32	$\pm 2048$
roll_axis_rate	Roll-axis rotation rate (arcsec/s)	FLOAT32	$\pm 1024$
pitch_axis_rate	Pitch-axis rotation rate (arcsec/s)	FLOAT32	$\pm 1024$
yaw_axis_rate	Yaw-axis rotation rate (arcsec/s)	FLOAT32	$\pm 1024$
<b>PGE2_packet_meta_table</b>			
(Field definitions described Table 4-19)			

**4.8.7 Per-swath QA Metadata**

None.

## 4.9 MISR LEVEL 1A MI1AENG1 ENGINEERING DATA

### 4.9.1 File Metadata Description

None.

### 4.9.2 Per-swath Metadata Description

**Table 4-21: Swath Metadata for Engineering Data File**

Swath Metadata	Definition	Data Type	Valid Values
PGE2_ORBIT_NO	Orbit counter	INT32	1-
PGE2_PATH_NO	Orbit path counter	INT32	1-233
PGE2_START_TIME	Calibration start time	FLOAT64	S/C time
PGE2_STOP_TIME	Calibration stop time	FLOAT64	S/C time
PGE2_NUMBER_OF_PACKETS	Number of Engineering packets	INT32	
PGE2_SWATH_FLAGS	Quality flag for engineering data collection	INT8	1-128
PGE2_OUT_OF_ORDER_PKTS	Listing of out of order packets found	INT16	(Array of 50)
PGE2_DUPLICATE_PKTS	Listing of duplicate packets found	INT16	(Array of 50)

### 4.9.3 Per-block Metadata Description

None.

### 4.9.4 Per-line Metadata Description

None.

### 4.9.5 Per-pixel (or -sample) Metadata Description

The Engineering Data file uses primarily Per-sample Metadata (Table 4-22). Each multiplexer (MUX), or Camera-specific data, retrieved from the instrument is stored in a separate SDS in the output file.



**Table 4-22: Engineering Data Per-Sample Metadata**

PerLine Metadata	Definition	Data Type	Valid Range
Mux A quality indicators	<p>Quality values associated with each engineering values collected in MUX A. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	Array of 16, each correlating to an engineering value collected, 0-128
Mux B quality indicators	<p>Quality values associated with each engineering values collected in MUX B. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	Array of 16, each correlating to an engineering value collected, 0-128
Mux C quality indicators	<p>Quality values associated with each engineering values collected in MUX C. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	Array of 16, each correlating to an engineering value collected, 0-128

**Table 4-22: Engineering Data Per-Sample Metadata (Continued)**

PerLine Metadata	Definition	Data Type	Valid Range
Mux D quality indicators	<p>Quality values associated with each engineering values collected in MUX D. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	Array of 16, each correlating to an engineering value collected, 0-128
Camera quality indicator	<p>Quality values associated with each Camera engineering data value collected. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	<p>Array of 16, each correlating to an camera engineering value collected, 0-128</p> <p>(Note: There are nine occurrences of this data set, one for each camera)</p>
Temperature quality indicator	<p>Quality values associated with each temperature value collected. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	Array of 15, each correlating to a temperature value collected, 0-128

**Table 4-22: Engineering Data Per-Sample Metadata (Continued)**

PerLine Metadata	Definition	Data Type	Valid Range
Auxiliary quality indicator	<p>Quality values associated with each auxiliary value collected. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: Data extraction error  bit 1: Data scaling error  bit 2: Data byte alignment error  bit 3: Data failed threshold check, high  bit 4: Data failed threshold check, low  bit 5: Unused  bit 6: Unused  bit 7: Data value is OK.</p>	INT8	Array of 13, each correlating to an engineering auxiliary value collected, 0-128

#### 4.9.6 Swath Data Set Descriptions

For MISR Engineering/Navigation data collected during an EOS orbit the data generated is separated by source (MUX,Camera,...) and stored in an appropriate SDS in the output product. Descriptions of the swath and data dimensions are defined below.

**Table 4-23: Engineering Data Dimension Descriptions**

Dimension	Description	Valid Values
PGE2_DOWN_TRACK_DIMENSION	Unlimited, number of lines acquired during the collection of MISR engineering data	0 -
PGE2_SWITCH_DIMENSION	Limit switch flags in the MISR engineering/navigation data	10
PGE2_MUX_DIMENSION	Data from the MISR multiplexer's system ESC ADC	16
PGE2_CAMERA_DIMENSION	Data from the MISR camera engineering data	16
PGE2_TEMPERATURE_DIMENSION	Data from the MISR instrument temperature readings	10
PGE2_AUXILARY_DIMENSION	Auxiliary quality flags from MISR eng/nav packet	13
PGE2_TIME_DIMENSION	Unlimited, time tag for each engineering packet collected	0 -
PGE2_TIME_ARRAY_DIMENSION	Number of bytes in a engineering/navigation packet time tag	8

**Table 4-24: Engineering Data Swath Field Definitions**

Field Name Parameter Description	Dimension List	Number Type
PGE2_PACKET_QUAL	PGE2_DOWN_TRACK_DIMENSION,	UINT8
PGE2_SWITCH_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_SWITCH_DIMENSION	UINT8
PGE2_MUX_1_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_MUX_DIMENSION	FLOAT32
PGE2_MUX_1_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_MUX_DIMENSION	UINT8
PGE2_MUX_B_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_MUX_DIMENSION	FLOAT32
PGE2_MUX_B_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_MUX_DIMENSION	UINT8
PGE2_MUX_C_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_MUX_DIMENSION	FLOAT32
PGE2_MUX_C_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_MUX_DIMENSION	UINT8
PGE2_MUX_D_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_MUX_DIMENSION	FLOAT32
PGE2_MUX_D_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_MUX_DIMENSION	UINT8
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8

**Table 4-24: Engineering Data Swath Field Definitions (Continued)**

Field Name Parameter Description	Dimension List	Number Type
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8
PGE2_CAMERA_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	FLOAT32
PGE2_CAMERA_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_CAMERA_DIMENSION	UINT8
PGE2_TEMP_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_TEMPERATURE_DIMENSION	FLOAT32
PGE2_TEMP_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_TEMPERATURE_DIMENSION	UINT8
PGE2_AUXILARY_TABLE	PGE2_DOWN_TRACK_DIMENSION, PGE2_AUXILARY_DIMENSION	INT32
PGE2_AUXILARY_QUAL	PGE2_DOWN_TRACK_DIMENSION, PGE2_AUXILARY_DIMENSION	UINT8
PGE2_TIME_TABLE	PGE2_TIME_DIMENSION, PGE2_TIME_ARRAY_DIMENSION	UINT8

Table 4-25 lists the data fields in the swath based on the location the data has been collected on the instrument. Each represents an SDS in the output MISR engineering file.

**Table 4-25: Swath Data Fields for Engineering Data**

Field Name	Description	Data Type	Valid Range
<b>PGE2_time_table</b>			
time_days	Time tag -first 16 bits of 64 bit time tag field representing days (array of 2 bytes)	FLOAT32	0 - 65536
time_msec1	Time tag - second 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_msec2	Time tag - third 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_micro	Time tag - fourth 16 bits of 64 bit time tag field representing microseconds (array of 2 bytes)	FLOAT32	0 - 1000
<b>Packet_qual</b>			
qual_indicator	Motor packet data quality indicator Quality values associated with each motor packet. Using bit-level triggers the quality flag is toggled as follows:  Bit 0: Virtual data file could not be opened Bit 1: Header file could not be read Bit 2: Header packet count wrong Bit 3: Header spacecraft id wrong Bit 4: Header time stamp wrong Bit 7: Swath OK flag	UINT8	0 - 128
<b>Swtich_values</b>		UINT8	
cover_latched	Instrument cover latched	UINT8	0/1
n_cal_pnl_latched	North calibration panel latched	UINT8	0/1
s_cal_pnl_latched	South calibration panel latched	UINT8	0/1
cover_open	Instrument cover open	UINT8	0/1
cover_closed	Instrument cover closed	UINT8	0/1
n_cal_pnl_deploy	North calibration panel deployed	UINT8	0/1
n_cal_pnl_stowed	North calibration panel stowed	UINT8	0/1
s_cal_pnl_deploy	South calibration panel deployed	UINT8	0/1
s_cal_pnl_stowed	South calibration panel stowed	UINT8	0/1
repl_htr1	Replacement heater (1) indicator	UINT8	0/1

**Table 4-25: Swath Data Fields for Engineering Data (Continued)**

Field Name	Description	Data Type	Valid Range
repl_htr2;	Replacement heater (1) indicator	UINT8	0/1
<b>MUX A data</b>			
v1_ref_voltage	One volt reference voltage (V)	FLOAT32	0 to 6 volts
v5_ref_voltage	Five volt reference voltage (V)	FLOAT32	0 to 6 volts
goni_diode_temp	Temperature of goniometer PIN (deg C)	FLOAT32	-30 to +50 deg C
pin1_diode_temp	Temperature of PIN1 (deg C)	FLOAT32	-30 to +50 deg C
pin2_diode_temp	Temperature of PIN2 (deg C)	FLOAT32	-30 to +50 deg C
pin3_diode_temp	Temperature of PIN3 (deg C)	FLOAT32	-30 to +50 deg C
pin4_diode_temp	Temperature of PIN4 (deg C)	FLOAT32	-30 to +50 deg C
hqe_blue_green_temp	Temperature of blue (green) HQE (deg C)	FLOAT32	-30 to +50 deg C
red_nir_temp	Temperature of red (NIR) HQE (deg C)	FLOAT32	-30 to +50 deg C
cover_motor_temp	Motor cover temperature (deg C)	FLOAT32	-30 to +50 deg C
cal_pnl_motor_temp	South Cal Panel motor temperature (deg C)	FLOAT32	-30 to +50 deg C
opt_bench_temp	Optical bench control temperature (deg C)	FLOAT32	-30 to +50 deg C
pin2_blue_data	PIN2 blue current (na)	FLOAT32	0.8 to 48 na
pin2_green_data	PIN2 green current (na)	FLOAT32	0.8 to 48 na
pin2_red_data	PIN2 red current (na)	FLOAT32	0.8 to 48 na
pin2_NIR_data	PIN2 NIR current (na)	FLOAT32	0.8 to 48 na
<b>MUX B data</b>			
v1_ref_voltage	One volt reference voltage (V)	FLOAT32	0 to 6 volts
v5_ref_voltage	Five volt reference voltage (V)	FLOAT32	0 to 6 volts
power_sply_current	System power supply current (A)	FLOAT32	-0.0184 to 1.61 amp
cover_motor_current	Cover motor current (ma)	FLOAT32	0 to 2110 ma
goni_pin_blue_data	Goniometer PIN blue current (na)	FLOAT32	0.8 to 48 na
goni_pin_green_data	Goniometer PIN green current (na)	FLOAT32	0.8 to 48 na
goni_pin_red_data	Goniometer PIN red current (na)	FLOAT32	0.8 to 48 na
goni pin_NIR data	Goniometer PIN NIR current (na)	FLOAT32	0.8 to 48 na

**Table 4-25: Swath Data Fields for Engineering Data (Continued)**

Field Name	Description	Data Type	Valid Range
pin1_blue_data	PIN1 blue current (na)	FLOAT32	0.8 to 48 na
pin1_green_data	PIN1 green current (na)	FLOAT32	0.8 to 48 na
pin1_red_data	PIN1 red current (na)	FLOAT32	0.8 to 48 na
pin1_NIR_data	PIN1 NIR current (na)	FLOAT32	0.8 to 48 na
opt_bench_temp	Optical bench temperature (deg C)	FLOAT32	-30 to +50 deg C
goni_cover_mtr_temp	Goniometer cover motor temperature (deg C)	FLOAT32	-30 to +50 deg C
cal_pnl_motor_temp	North Cal Panel motor temperature (deg C)	FLOAT32	-30 to +50 deg C
volt_ref_temp	Voltage reference temperature (deg C)	FLOAT32	-30 to +50 deg C
<b>MUX C data</b>			
v1_ref_voltage	One volt reference voltage (V)	FLOAT32	0 to 6 volts
v5_ref_voltage	Five volt reference voltage (V)	FLOAT32	0 to 6 volts
goni_motor_current	Goniometer current (ma)	FLOAT32	0 to 2110 ma
tec_pos_x_temp	TECRAD+X temperature (deg C)	FLOAT32	-30 to +50 deg C
pin3_blue_data	PIN3 blue current (na)	FLOAT32	0.8 to 48 na
pin3_green_data	PIN3 green current (na)	FLOAT32	0.8 to 48 na
pin3_red_data	PIN3 red current (na)	FLOAT32	0.8 to 48 na
pin3_NIR_data	PIN3 NIR current (na)	FLOAT32	0.8 to 48 na
pin4_blue_data	PIN4 blue current (na)	FLOAT32	0.8 to 48 na
pin4_green_data	PIN4 green current (na)	FLOAT32	0.8 to 48 na
pin4_red_data	PIN4 red current (na)	FLOAT32	0.8 to 48 na
pin4_NIR_data	PIN4 NIR current (na)	FLOAT32	0.8 to 48 na
el_rad_neg_x_temp	Elec Rad -X temperature (deg C)	FLOAT32	-30 to +50 deg C
n_cal_pnl_temp	n_cal_pnl_temp	FLOAT32	-30 to +50 deg C
n_cal_pnl_temp	North Cal Panel temperature (deg C)	FLOAT32	-30 to +50 deg C
s_cal_pnl_temp	South Cal Panel temperature (deg C)	FLOAT32	-30 to +50 deg C
<b>MUX D data</b>			
v1_ref_voltage	One volt reference voltage (V)	FLOAT32	0 to 6 volts
v5_ref_voltage	Five volt reference voltage (V)	FLOAT32	0 to 6 volts
s_cal_pnl_motor_curr	South Cal Panel motor current (ma)	FLOAT32	0 to 2110 ma



**Table 4-25: Swath Data Fields for Engineering Data (Continued)**

Field Name	Description	Data Type	Valid Range
v5_logic_monitor	+5V logic monitor voltage (V)	FLOAT32	0 to 6 volts
v28_bus_monitor	+28V bus monitor voltage (V)	FLOAT32	0 to 55.44 volts
v11_bus_monitor	+11V bus monitor voltage (V)	FLOAT32	0 to 22.04 volts
dc_dc_converter_current	DC/DC converter current (A)	FLOAT32	-0.00876 to 2.77 amp
tec_volt_monitor	TEC monitor voltage (V)	FLOAT32	0 to 55.44 volts
hqe_blue_data	Goniometer position (deg)	FLOAT32	0.8 to 48 na
hqe_blue_data	North Cal Panel motor current (ma)	FLOAT32	0.8 to 48 na
hqe_blue_data	HQE blue current (na)	FLOAT32	0.8 to 48 na
hqe_green_data	HQE green current (na)	FLOAT32	0.8 to 48 na
hqe_red_data	HQE red current (na)	FLOAT32	0.8 to 48 na
hqe_nir_data	HQE NIR current (ma)	FLOAT32	0.8 to 48 na
<b>Camera data (9 iterations)</b>			
v1_ref_curr	One volt reference voltage (V)	FLOAT32	0 to 6 volts
v5_ref_curr	Five volt reference voltage (V)	FLOAT32	0 to 6 volts
ccd_fp_temp	CCD focal plane temperature (deg C)	FLOAT32	-30 to +50 deg C
optics_temp1	Optics 1 temperature (deg C)	FLOAT32	-30 to +50 deg C
optics_temp2	Optics 2temperature (deg C)	FLOAT32	-30 to +50 deg C
optics_temp3	Optics 3temperature (deg C)	FLOAT32	-30 to +50 deg C
optics_temp4	Optics 4temperature (deg C)	FLOAT32	-30 to +50 deg C
tec_hot_voltage_temp	TEC hot junction temperature (deg C)	FLOAT32	-30 to +50 deg C
v28_input_current	Input V28 current (ma)	FLOAT32	0 to 587 ma
cam_head_temp	Camera head temperature (deg C)	FLOAT32	-30 to +50 deg C
tec_cold_junc_temp	TEC cold junction temperature (deg C)	FLOAT32	-30 to +50 deg C
pwr_trans_q1_temp	Q1 temperature (deg C)	FLOAT32	-30 to +50 deg C
fp_heater_vltg	Focal plane heater voltage (V)	FLOAT32	-30 to +50 deg C
esc_vref_temp	ESC reference temperature (deg C)	FLOAT32	-30 to +50 deg C
hybrid_temp	Hybrid temperature (deg C)	FLOAT32	-30 to +50 deg C
<b>Auxillary data</b>			
NHK flag		UINT8	

**Table 4-25: Swath Data Fields for Engineering Data (Continued)**

Field Name	Description	Data Type	Valid Range
CAM flag		UINT8	
CMD flag		UINT8	
<b>PGE2_packet_meta_table</b>			
(Field definitions described Table 4-24)			

**4.9.7 Per-swath QA Metadata**

None.

## 4.10 MISR LEVEL 1A MI1A OBC ON-BOARD CALIBRATION DATA

### 4.10.1 File Metadata Description

None.

### 4.10.2 Per-swath Metadata Description

**Table 4-26: Swath Metadata for OBC Data File**

Swath Metadata	Definition	Data Type	Valid Values
PGE5_ORBIT_NO	Orbit counter	INT32	1-
PGE5_PATH_NO	Orbit path counter	INT32	1-233
PGE5_START_TIME	Calibration start time	FLOAT64	S/C time
PGE5_STOP_TIME	Calibration stop time	FLOAT64	S/C time
PGE5_NUM_OBC_SAMPLES	Number of OBC samples	INT32	
PGE5_SWATH_FLAGS	Quality flag for calibration	INT8	1-128
PGE5_OUT_OF_ORDER_PKTS	Listing of out of order packets found	INT16	(Array of 50)
PGE5_DUPLICATE_PKTS	Listing of duplicate packets found	INT16	(Array of 50)

### 4.10.3 Per-block Metadata Description

None.

### 4.10.4 Per-line Metadata Description

None.

### 4.10.5 Per-pixel (or -sample) Metadata Description

Table 4-27 describes the Per-sample Metadata that are specific to each data sample in a packet during the calibration sequence. For each data value in the diode and temperature SDSs there is a corresponding metadata value in a corresponding SDS.

**Table 4-27: OBC Data Per-Sample Metadata**

PerPacket Metadata	Definition	Data Type	Valid Range
Diode quality indicators	Quality values associated with each diode/ goniometer value collected. Using bit-level triggers the quality flag is toggled as follows:  bit 0: Data extraction error bit 1: Data scaling error bit 2: Data byte alignment error bit 3: Data failed threshold check, high bit 4: Data failed threshold check, low bit 5: Unused bit 6: Unused bit 7: Data value is OK.	INT8	(Array of 26)
Temperate quality indicator	Quality values associated with each temperature value collected. Using bit-level triggers the quality flag is toggled as follows:  bit 0: Data extraction error bit 1: Data scaling error bit 2: Data byte alignment error bit 3: Data failed threshold check, high bit 4: Data failed threshold check, low bit 5: Unused bit 6: Unused bit 7: Data value is OK.	INT8	(Array of 10)

#### 4.10.6 Swath Data Set Descriptions

For MISR Calibration processing the data collected during any of the types of calibration sequence modes generates On-board calibration data which is stored in an output MISR OBC swath file. Data quality checks are performed on all radiometry, temperatures and time tags in the packets.

**Table 4-28: OBC Data Dimension Descriptions**

Dimension	Description	Valid Values
PGE5_TIME_DIMENSION	Unlimited, time tag for each engineering packet collected	0 -
PGE5_TIME_ARRAY_DIMENSION	Number of bytes in a engineering/navigation packet time tag	8
PGE5_DOWN_TRACK_DIMENSION	Unlimited, number of OBC samples retrieved during a calibration sequence	0 -
PGE5_RAD_DIMENSION	Radiometry values retrieved during a calibration sequence	26

**Table 4-28: OBC Data Dimension Descriptions (Continued)**

Dimension	Description	Valid Values
PGE5_TEMPERATURE_DIMENSION	Diode temperature readings retrieved during a calibration sequence	8

**Table 4-29: OBC Data Swath Field Definitions**

Field Name Parameter Description	Dimension List	Number Type
<b>Swath OBCSwath</b>		
PGE5_PACKET_QUAL	PGE5_DOWN_TRACK_DIMENSION	UINT32
PGE5_RAD_TABLE	PGE5_DOWN_TRACK_DIMENSION, PGE5_RAD_DIMENSION	FLOAT32
PGE5_RAD_QUAL	PGE5_DOWN_TRACK_DIMENSION, PGE3_RAD_DIMENSION	UINT8
PGE5_TEMP_TABLE	PGE5_DOWN_TRACK_DIMENSION, PGE5_TEMPERATURE_DIMENSION	FLOAT32
PGE5_TEMP_QUAL	PGE5_DOWN_TRACK_DIMENSION, PGE5_TEMPERATURE_DIMENSION	UINT8
PGE5_PKT_TIME_TABLE	PGE5_TIME_DIMENSION, PGE5_TIME_ARRY_DIMENSION	FLOAT32
PGE5_DIODE_TIME_TABLE	PGE5_TIME_DIMENSION, PGE5_TIME_ARRY_DIMENSION	FLOAT32

Table 4-30 lists the data fields in the swath based on the location the data has been collected on the instrument. Each represents an SDS in the output MISR on-board calibration file.

**Table 4-30: Swath Data Fields for Level 1A OBC Data**

Field Name	Description	Data Type	Valid Range
<b>Packet_time</b>			
time_days	Time tag -first 16 bits of 64 bit time tag field representing days (array of 2 bytes)	FLOAT32	0 - 65536
time_msec1	Time tag - second 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536

**Table 4-30: Swath Data Fields for Level 1A OBC Data (Continued)**

Field Name	Description	Data Type	Valid Range
time_msec2	Time tag - third 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_micro	Time tag - fourth 16 bits of 64 bit time tag field representing microseconds (array of 2 bytes)	FLOAT32	0 - 1000
<b>Temperatures</b>			
Goniometer PIN-diodes temperature	Temperature reading, goniometer PIN diode	FLOAT32	-30 to +50 deg C
#1 PIN-diodes temperature	Temperature reading, #1 PIN diode	FLOAT32	-30 to +50 deg C
#2 PIN-diodes temperature	Temperature reading, #2 PIN diode	FLOAT32	-30 to +50 deg C
#3 PIN-diodes temperature	Temperature reading, #3 PIN diode	FLOAT32	-30 to +50 deg C
#4 PIN-diodes temperature	Temperature reading, #4 PIN diode	FLOAT32	-30 to +50 deg C
Blue-Green HQE diode temperature	Temperature reading, Blue or Green HQE diode	FLOAT32	-30 to +50 deg C
Red-NIR HQE diode temperature	Temperature reading, Red or Near-IR HQE diode	FLOAT32	-30 to +50 deg C
Goniometer motor temperature	Temperature reading, goniometer motor	FLOAT32	-30 to +50 deg C
<b>Temperature_qual</b>			
qual_indicator	Quality values associated with each radiometry value. Using bit-level triggers the quality flag is toggled as follows:  bit 0: The data could not be extracted from the raw packet bit 1: The data could not be scaled properly bit 2: The data could not be byte aligned properly bit 3: The value failed the threshold check high bit 4: The value failed the threshold check low bit 7: The value is OK.	UINT8	0 - 128
<b>Diode_time (per diode sample)</b>			
time_days	Time tag -first 16 bits of 64 bit time tag field representing days (array of 2 bytes)	FLOAT32	0 - 65536

**Table 4-30: Swath Data Fields for Level 1A OBC Data (Continued)**

Field Name	Description	Data Type	Valid Range
time_msec1	Time tag - second 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_msec2	Time tag - third 16 bits of 64 bit time tag field representing milliseconds (array of 2 bytes)	FLOAT32	0 - 65536
time_micro	Time tag - fourth 16 bits of 64 bit time tag field representing microseconds (array of 2 bytes)	FLOAT32	0 - 1000
<b>Radiometry</b>			
#1 PIN diode (all four bands)	Diode data, #1 PIN diode	FLOAT32	0.8 to 48 na
#2 PIN diode (all four bands)	Diode data, #2 PIN diode	FLOAT32	0.8 to 48 na
#3 PIN diode (all four bands)	Diode data, #3 PIN diode	FLOAT32	0.8 to 48 na
#4 PIN diode (all four bands)	Diode data, #4 PIN diode	FLOAT32	0.8 to 48 na
HQE diode (all four bands)	HQE diode data	FLOAT32	0.8 to 48 na
Goniometer potentiometer voltage	Goniometer potentiometer voltage	FLOAT32	-64.9 to 64.9 deg
Goniometer motor current	Goniometer motor current	FLOAT32	0 to 2110 ma
<b>Radiometry_qual</b>			
qual_indicator	<p>Quality values associated with each radiometry value. Using bit-level triggers the quality flag is toggled as follows:</p> <p>bit 0: The data could not be extracted from the raw packet  bit 1: The data could not be scaled properly  bit 2: The data could not be byte aligned properly  bit 3: The value failed the threshold check high  bit 4: The value failed the threshold check low  bit 5: The value failed the root sum square check  bit 6: The value failed the standard deviation check  bit 7: The value is OK.</p>	UINT8	0 - 128

**4.10.7 Per-swath QA Metadata**

None.



## 5.0 MISR LEVEL 1B1 RADIOMETRIC PRODUCT

### 5.1 MISR LEVEL 1B1 PRODUCT GRANULE NAMES

**MISR Level 1B1 Radiometric Data Products** are composed of the file granules listed below (Table 5-1).

**Table 5-1: MISR Level 1B1 File Granule Names**

<b>MISR LEVEL 1B1 FILE GRANULE NAME</b>	<b>ESDT Name</b>	<b>Section</b>
MISR_AM1_RP_GM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	M1B1	5.4
MISR_AM1_RP_LM_Pmmm_Onnnnnn_cc_SITE_<string>_Fff_vvvv.hdf	M1B1LM	see above

### 5.2 MISR LEVEL 1B1 PRODUCT GRANULE BRIEF DESCRIPTIONS

MISR Level 1B1 (M1B1) Radiometric Product contains the global mode radiances for an entire swath. The Level 1B1 Local Mode (M1B1LM) Radiometric product is identical in format to the global mode product; however, it contains a small subset of the swath acquired when the instrument was in Local Mode. Local Mode products are not generated for all swaths.

During radiance scaling and conditioning the instrument DN values are converted to spectral radiances and reported in MKS (meter, kilogram, second) units referred to as SI (Système International). Use is made of the camera calibration data, where the response of the system to a known radiance field is quantized. These data represent our best estimate of instrument response, as determined through many different activities conducted both preflight and in-flight. For further details, please refer to section [9.2.4] of the Ancillary Products description.

It is noted that MISR does not provide a radiometric product scaled to the exo-atmospheric solar irradiance. As MISR does not view the Sun directly, such a data set could only be obtained by employing a solar model, and would be of no greater accuracy than the radiance product.

### 5.3 MISR LEVEL 1B1 PRODUCT GRANULE DATA SETS

The L1B1 products will be produced as two ESDTs, as shown in Table 5-2. Each physical file is in the HDF-EOS Swath format and each contains four Swath datasets corresponding to the four bands

of a MISR camera

**Table 5-2: Level 1B1 Radiometric Product File and Swath Datasets**

<b>ESDT Short-name</b>	<b>Local Granule ID<sup>a</sup></b>	<b>Swath Dataset Name</b>
MI1B1	MISR_AM1_RP_GM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	L1B1_Blue_Product
		L1B1_Green_Product
		L1B1_Red_Product
		L1B1_Nir_Product
M1B1LM	MISR_AM1_RP_LM_Pmmm_Onnnnnn_cc_SITE_<string>_Fff_vvvv.hdf	same 4 bands as above

a. Where Pmmm corresponds to the orbit path number, Onnnnnn is the absolute orbit number, cc is the camera identifier, ff is the format version number and vvvv is the file version number.

## 5.4 MISR LEVEL 1B1 MI1B1 RADIOMETRIC PRODUCT

### 5.4.1 File Metadata Description.

**Table 5-3: Metadata for Radiometric Product Files**

Swath Metadata	Definition	Data Type	Valid Values
PathNumber	Orbital path number	INT32	1-233
OrbitNumber	Orbit Number	INT32	1-99,999
Camera	Camera identifier	UINT8	1-9
CameraMode	Camera mode identifier	UINT8	0 = Local Mode 1 = Global Mode
NumLMEvents	Number of Local Mode Acquisitions which occurred during this orbit, regardless of Camera_mode.	INT8	0-6
LMSiteName	The geographical name of the local mode site, if this is a local mode file.	CHAR8	string up to 12 characters, including null.
StartTime	Start time reported in Detailed Activity Schedule	CHAR8	UTC string in CCSDS ASCII Time Code A
StopTime	Stop time reported in Detailed Activity Schedule	CHAR8	UTC string in CCSDS ASCII Time Code A
PGStartOffset	Time in seconds past DAS_start_time at which to begin PGE processing.	FLOAT64	0.0 - 98.88 min.
PGStopOffset	Time in seconds since DAS_start_time at which to end PGE processing. (Preempted if DAS_stop_time earlier.)	FLOAT64	0.0 - 98.88 min.
PGStartTAI	Actual time of first L1B1 line processed. TAI is PGS Toolkit internal time, which is the real number of continuous seconds since UTC 12 am 1-1-1993.	FLOAT64	

### 5.4.2 Per-swath Metadata Description

For the Radiometric Product, Swath attributes are attached using HDF-EOS calls of the Swath

application (Table 5-4).

**Table 5-4: Swath Metadata for Radiometric Product Files**

Swath Metadata	Definition	Data Type	Valid Values
Rad_scale_factor	Multiplicative Radiometric scale factor to convert stored integer data values to floating point values in SI units.	FLOAT64	
Line_average_mode	Line Average Mode	UINT8	1 = 275 m 4=1.1 km
Sample_average_mode	Sample Average Mode	UINT8	1 = 275 m 4=1.1 km
Number_Lines_in_Data_Array	Length of HDF-EOS swath array.	INT32	0-100,000
Last_Valid_Data_Line	Last line in this HDF-EOS swath array which actually contains MISR data.	INT32	0-100,000
GM_Line_Where_LM_Begins	In Local Mode products, this field indicates the equivalent line number in the global mode swath of the first local mode line.	INT32	0-100,000
GM_Line_Where_LM_Ends	In Local Mode products, this field indicates the equivalent line number in the global mode swath of the last local mode line.	INT32	0-100,000

### 5.4.3 Per-line Metadata Description

5.4.3.1 A scene background correction algorithm is under consideration for use in the MISR Level 1B1 software. This algorithm would remove image ghosts from the MISR radiances. Low-intensity ghosting is caused by stray light which can be scattered within the MISR optics. Normally, these artifacts are of negligible brightness. However, in scenes which exhibit very high contrast, this

ghosting can introduce a significant radiometric error in some portions of the scene. In order to allow users to reverse this correction, if desired, the Scene Average Radiance for each line is reported in the radiance product. **NOTE: At this time, the background correction algorithm is not being applied to MISR data.**

**Table 5-5: Per-line Scene Average for Background Correction**

Field Name	Definition	Data Type
L1B1_Line_Scene_Average_Blue	The average radiance value of the 2-D scene centered on the line in question. The scene is defined as a window of 101 lines, 50 above the current line and 50 below it. If the instrument is in 4x4 mode, then the scene is composed of 25 lines, instead. The full active swath width is used in both modes. Scenes are averaged separately by band.	FLOAT32
L1B1_Line_Scene_Average_Green		FLOAT32
L1B1_Line_Scene_Average_Red		FLOAT32
L1B1_Line_Scene_Average_Nir		FLOAT32

#### 5.4.4 Per-pixel Metadata Description

None.

#### 5.4.5 Swath Data Set Descriptions

##### 5.4.5.1 Field dimension and Spatial Resolution descriptions

**Table 5-6: Radiometric Product Field Dimension Descriptions**

Dimension	Description	Valid Values
Sample	<i>Sample</i> is the width of the swath in pixels.	1504 for 275 m parameters 376 for 1.1 km parameters
Line	<i>Line</i> is the length of the swath in pixels.	Depends on acquisition length

For the Radiometric Product files, the spatial resolution (and therefore the XDim and YDim) of the different Swaths within the file depend on the averaging mode that band is in for that particular camera. For the nominal Global Mode called “Super Stereo”, the following table relates the spatial resolution to camera and band.

**Table 5-7: Spatial Resolution Distribution for Global mode**

Grid	DF	CF	BF	AF	AN	AA	BA	CA	DA
<b>BlueBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km

**Table 5-7: Spatial Resolution Distribution for Global mode (Continued)**

Grid	DF	CF	BF	AF	AN	AA	BA	CA	DA
<b>GreenBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>RedBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>NIRBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km

In Local mode, all channels are reported at 275 meter resolution as described in table [5-8].

**Table 5-8: Spatial Resolution Distribution for Local mode**

Grid	DF	CF	BF	AF	AN	AA	BA	CA	DA
<b>BlueBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>GreenBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>RedBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>NIRBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m

The following are flag values used for each parameter. In addition to radiances, the Level 1B1 product files also contain Data Quality Indicator and Time structures as seen in table [5-10].:

**Table 5-9: Radiometric Product Parameter Fill Values**

L1B1_DQI_[Blue,Green,Red,Nir]	L1B1_Scaled_Rad_[Blue,Green,Red,Nir]	L1B1_Line_TAI_Time_[Blue,Green,Red,Nir]
0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose	16377 = Gap fill 16378 = Negative discriminant 16379 = Radiance out of range 16380 = Negative radiance	TAI is PGS Toolkit internal time, which is the real number of continuous seconds since UTC 12 am 1-1-1993.  -999 = Gap fill

Note: Radiance values are scaled integers in the product file. In order to convert to floating point radiances in the units specified below, multiply Rad\_scale\_factor (from the Swath Metadata, Table

5-4) by the scaled integer.

**Table 5-10: Radiometric Product Parameters Swath Field Definitions**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Swath L1B1_Blue_Product (Spatial Resolution: varies, see above)</b>					
L1B1_Scaled_Rad_Blue	Sample,Line	INT16	$W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled)	See note above.	see table [5-9]
L1B1_DQI_Blue	Sample,Line	UINT8			see table [5-9]
L1B1_Line_TAI_Time_Blue	Line	FLOAT64			see table [5-9]
<b>Swath L1B1_Green_Product (Spatial Resolution: 275 m x 275 m)</b>					
L1B1_Scaled_Rad_Green	Sample,Line	INT16	$W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled)	See note above.	see table [5-9]
L1B1_DQI_Green	Sample,Line	UINT8			see table [5-9]
L1B1_Line_TAI_Time_Green	Line	FLOAT64			see table [5-9]
<b>Swath L1B1_Red_Product (Spatial Resolution: varies, see above)</b>					
L1B1_Scaled_Rad_Red	Sample,Line	INT16	$W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled)	See note above.	see table [5-9]
L1B1_DQI_Red	Sample,Line	UINT8			see table [5-9]
L1B1_Line_TAI_Time_Red	Line	FLOAT64			see table [5-9]
<b>Swath L1B1_Nir_Product (Spatial Resolution: varies, see above)</b>					
L1B1_Scaled_Rad_Nir	Sample,Line	INT16	$W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled)	See note above.	see table [5-9]
L1B1_DQI_Nir	Sample,Line	UINT8			see table [5-9]
L1B1_Line_TAI_Time_Nir	Line	FLOAT64			see table [5-9]

#### 5.4.6 Radiometric Product QA Metadata

Additional Quality Assessment Metadata is no longer reported in HDF-EOS vdata structures nor in a separate QA statistics file.





## 6.0 MISR LEVEL 1B2 GEORECTIFIED RADIANCE PRODUCT

### 6.1 MISR LEVEL 1B2 PRODUCT GRANULE NAMES

**MISR Level1B2 Georectified Radiance Products** are composed of the six file granules listed below (Table 6-1), plus the browse product, which is a JPEG image of the Ellipsoid product. Three additional intermediate granules, the ellipsoid and terrain transform parameters products (TRP), and the registration corrections product (CORR) are described for the sake of completeness; but they may not be available for distribution.

**Table 6-1: MISR Level 1B2 File Granule Names**

MISR LEVEL 1B2 FILE GRANULE NAME	ESDT Name	Section
MISR_AM1_GRP_ELLIPSOID_GM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MI1B2E	§6.4
MISR_AM1_GRP_ELLIPSOID_LM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MB2LME	§6.4
MISR_AM1_GRP_TERRAIN_GM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MI1B2T	§6.5
MISR_AM1_GRP_TERRAIN_LM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MB2LMT	§6.5
MISR_AM1_GP_GMP_Pmmm_Onnnnnn_Fff_vvvv.hdf	MIB2GEOP	§6.6
MISR_AM1_GRP_RCCM_GM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MIRCCM	§6.7
MISR_AM1_GRP_ELLIPSOID_GM_BR_Pmmm_Onnnnnn_cc_Fff_vvvv.jpg	MISBR	§6.8
MISR_AM1_TRP_ELLIPSOID_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MIB2TRPE	§6.9
MISR_AM1_TRP_TERRAIN_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	MIB2TRPT	§6.10
MISR_AM1_CORR_GM_Pmmm_Onnnnnn_Fff_vvvv.ascii	MIB2CORR	§6.11

### 6.2 MISR LEVEL 1B2 GEORECTIFIED RADIANCE PRODUCT GRANULE BRIEF DESCRIPTIONS

The Level 1B2 Georectified Radiance Product (GRP) consists of six parameter sets with certain kinds of geometric corrections and have been projected to a Space-Oblique Mercator (SOM) map grid. First, the ellipsoid-projected TOA radiance global mode (GM) parameter uses supplied spacecraft position and pointing and is not corrected for topography, but is resampled to the reference ellipsoid. This global mode parameter is averaged onboard the spacecraft to 1.1 km x 1.1 km resolution in the off-nadir, non-red-band channels. Second, over specific targets, called local mode sites, the ellipsoid-projected local mode (LM) TOA radiance is reported at 275 m x 275 m resolution in all channels. Third, the terrain-projected TOA radiance global mode parameter has had a geometric correction applied which removes the errors of spacecraft position and pointing knowledge and errors due to topography. The parameter is then ortho-rectified on a reference ellipsoid at the surface. This global mode parameter is averaged to 1.1 km x 1.1 km resolution in the off-nadir, non-red-band channels. Fourth, over specific targets, called local mode sites, the terrain-projected

local mode (LM) TOA radiance is reported at 275 m x 275 m resolution in all channels. The parameters defined so far also carry a Radiometric Data Quality Indicator (RDQI) associated with each measurement. Fifth, there are the geometric parameters which measure the sun and view angles at the reference ellipsoid.

Retrieval of aerosol and surface properties within MISR Aerosol/Surface SDP processing requires the absence of clouds in order that the assumptions inherent in the retrievals are not invalidated. Thus, one more parameter is part of this product: the radiometric camera-by-camera cloud mask (RCCM). It is used for several purposes during MISR geophysical parameter retrievals within the TOA/Cloud Product processing. A data quality flag and a glitter mask are also carried for this parameter.

### 6.3 MISR LEVEL 1B2 GEORECTIFIED RADIANCE PRODUCT GRANULE DATA SETS

The Georectified Radiance Product will be produced as six separate ESDTs, each with one physical file (Table 6-2). Each physical file is in the HDF-EOS Grid “stacked-block” format and each contains one or more HDF-EOS Grid datasets, corresponding to parameters at certain spatial resolutions. The grid datasets will have the usual HDF x and y dimensions, as well as a third dimension corresponding to the SOM block number. The x and y dimensions will correspond to the number of samples in the along-track and cross-track directions, respectively. The blocks that make up the Georectified Radiance Product files are identical to the blocks that make up the Ancillary Geographic Product.

**Table 6-2: Level 1B2 Georectified Radiance Product Files and Grid Datasets**

<b>ESDT Shortname</b>	<b>Local Granule ID<sup>a</sup></b>	<b>Grid Dataset Name</b>
MI1B2E	MISR_AM1_GRP_ELLIPSOID_GM_Pmmm_Onnnnnn_cc_Fff_vv vv.hdf	NIRBand
		RedBand
		GreenBand
		BlueBand
MB2LME	MISR_AM1_GRP_ELLIPSOID_LM_Pmmm_Onnnnnn_cc_Fff_vv vv.hdf	NIRBand
		RedBand
		GreenBand
		BlueBand

**Table 6-2: Level 1B2 Georectified Radiance Product Files and Grid Datasets**

<b>ESDT Shortname</b>	<b>Local Granule ID<sup>a</sup></b>	<b>Grid Dataset Name</b>
MI1B2T	MISR_AM1_GRP_TERRAIN_GM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	NIRBand
		RedBand
		GreenBand
		BlueBand
MB2LMT	MISR_AM1_GRP_TERRAIN_LM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	NIRBand
		RedBand
		GreenBand
		BlueBand
MIB2GEOP	MISR_AM1_GP_GMP_Pmmm_Onnnnnn_Fff_vvvv.hdf	Geometric Parameters
MIRCCM	MISR_AM1_GRP_RCCM_GM_Pmmm_Onnnnnn_cc_Fff_vvvv.hdf	RCCM

a. Where Pmmm corresponds to the orbit path number, Onnnnnn is the absolute orbit number, cc is the camera identifier, ff is the file format version and vvvv is the version number (which relates to the reprocessing of a dataset with different software and/or ancillary inputs).

As of version F03\_0024 there is also a Preliminary Georectified Radiance Product (PGRP) it follows the same format as described below for GRP. The difference between the two is the PGRP does not include the additional improvements to georectification, co-registration, and the Geometric Data Quality Indicators (GDQI). These preliminary products are used as input to the software program which calculates the registration corrections described in section 6.11. After use the PGRP does not remain persistent in the archive, and therefore is not available for distribution.

## 6.4 MISR LEVEL 1B2 MI1B2E AND MB2LME ELLIPSOID-PROJECTED PRODUCTS

### 6.4.1 File Metadata Description

**Table 6-3: File Metadata for Ellipsoid-projected TOA Radiance Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version Identifier for Ancillary Geographic Product	INT32	N/A	2
DID_version_id	Version Identifier for DID (DTED [Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	Not Used
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	Not Used
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	Not Used
SOM_parameters.som_orbit.nrev	Number of revolutions	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7078040.8
SOM_parameters.som_orbit.i	Inclination of orbit	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	0.0068666667
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0	FLOAT64	radians	0 - 2Pi

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	+/- 12 million
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	+/- 12 million
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file were obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-1  0 if data is global mode
Local_mode_site_name	The geographical name of the local mode site contained in this file for local mode files; null string for global mode files.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal
Camera	Indicator of MISR camera	INT32	N/A	Df = 1 Cf = 2 Bf = 3 Af = 4 An = 5 Aa = 6 Ba = 7 Ca = 8 Da = 9

### 6.4.2 Per-grid Metadata Description

**Table 6-4: Per-grid Metadata for Ellipsoid-projected TOA Radiance Grids.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	275, 1100
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	275, 1100
Block_size.size_x	Block x dimension	INT32	512, 128
Block_size.size_y	Block y dimension	INT32	2048, 512

**Table 6-5: Per-grid Metadata for Ellipsoid-projected TOA Radiance Grids.**

Radiance Grid Metadata	Definition	Data Type	Valid Values
Scale factor (Radiometric)	Multiplicative scale factor for converting the stored 14-bit number to radiance in units $W m^{-2} sr^{-1} \mu m^{-1}$	FLOAT64	<1
std_solar_wgtd_height	$\mathcal{E}_0^{std}(b)$ [ $W m^{-2} \mu m^{-1}$ ], solar irradiances, standardized response weighted	FLOAT32	
SunDistanceAU	Approximate distance in astronomical units between the center of the earth and the center of the sun at the time MISR observes the first valid (non-fill) pixel in the swath. Replicated across bands for convenience; does not vary with band.	FLOAT64	

**Table 6-6: Per-grid Metadata for Geometric Parameters and BRF Conversion Factors Grids.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	17600
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	17600
Block_size.size_x	Block x dimension	INT32	8
Block_size.size_y	Block y dimension	INT32	32

6.4.3 Per-block Metadata Description

**Table 6-7: PerBlock Metadata for Ellipsoid-projected TOA Radiance File.**

PerBlockMetadataCommon	Definition	Data Type	Valid Range
Block_number	Block number with respect to the Ancillary Geographic Product	INT32	1 to 180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

PerBlockMetadataRad	Definition	Data Type	Valid Range
number_transform	Number of transforms required for the block. If this number is two, then the following records occur twice.	INT32	Terrain: always 0 Ellipsoid: 0, 1, or 2
transform.ref_time	The time at which line 0 was acquired by the camera, adjusted for instrument corrections to this block.	CHAR8 * 54	
transform.start_line	Defines the starting SOM boundary for which this transform applies relative to the first block in the entire swath.	INT32	

PerBlockMetadataRad	Definition	Data Type	Valid Range
transform.number_line	Defines the ending SOM boundary for which this transform applies.	INT32	
transform.coeff_line[ 6 ]	The vector describing the line transform coefficients.	FLOAT64 * 6	
transform.coeff_samp[ 6 ]	The vector describing the sample transform coefficients.	FLOAT64 * 6	
transform.som_ctr.x	The x SOM coordinate of the center of the transform area, used in applying the transform.	FLOAT64	
transform.som_ctr.y	The y SOM coordinate of the center of the transform area, used in applying the transform.	FLOAT64	
transform.ipi_adj_sum		FLOAT64	
GDQI	Geometric Data Quality Indicator	FLOAT64	Terrain: -1.0 to 1.0 Ellipsoid: always 0.0

PerBlockMetadataTime	Definition	Data Type	Valid Range
BlockCenterTime	TAI time of the lower right pixel of the center four pixels in the current block, converted to UTC time, and displayed in CCSDS ASCII time code A format. Note: BlockCenterTime may be incorrect for the first and last blocks processed in a swath.	CHAR8 * 28	

#### 6.4.4 Per-line Metadata Description

None.

#### 6.4.5 Per-pixel Metadata Description

None.



6.4.6 Grid Data Set Descriptions

**Table 6-8: Ellipsoid-projected Grid Data Set Descriptions.**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	180
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	512 for 275 m parameters 128 for 1.1 km parameters 8 for 17.6 km parameters
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	2048 for 275 m parameters 512 for 1.1 km parameters 32 for 17.6 km parameters

For the Terrain-projected TOA Radiance and the Ellipsoid-projected TOA Radiance files, the spatial resolution (and therefore the XDim and YDim) of the different Grids within the file depend on the averaging mode that band is in for that particular camera. For local mode the spatial resolution is 275 m x 275 m for all cameras and bands. For the nominal Global Mode , the following table relates the spatial resolution to camera and band.

**Table 6-9: Spatial Resolution Distribution for Global mode**

Grid	DF	CF	BF	AF	AN	AA	BA	CA	DA
<b>NIRBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>RedBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>BlueBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>GreenBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km

The following are flag values used for each parameter:

**Table 6-10: Ellipsoid-projected TOA Radiance Parameter Fill Values**

RDQI	Radiance
0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose	16378 = SOM location not seen by the camera, i.e., this will occur outside the swath edges and at the top and bottom of the swath 16380 = Radiance unusable due to high RDQI

The following are the parameters that make up the file:

**Table 6-11: Ellipsoid-projected Parameters Grid Field Definitions**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Grid NIRBand (Spatial Resolution: varies, see above)</b>					
NIR Radiance/RDQI	XDim, YDim	UINT16	Radiance: $W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled) RDQI: none	Bit packed: Bits 0-1 = RDQI Bits 2-15 = Radiance (Bit 0 is LSB)	See above
<b>Grid RedBand (Spatial Resolution: 275 m x 275 m, XDim = 512, YDim = 2048)</b>					
Red Radiance/RDQI	XDim, YDim	UINT16	Radiance: $W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled) RDQI: none	Bit packed: Bits 0-1 = RDQI Bits 2-15 = Radiance (Bit 0 is LSB)	See above
<b>Grid GreenBand (Spatial Resolution: varies, see above)</b>					
Green Radiance/RDQI	XDim, YDim	UINT16	Radiance: $W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled) RDQI: none	Bit packed: Bits 0-1 = RDQI Bits 2-15 = Radiance (Bit 0 is LSB)	See above
<b>Grid BlueBand (Spatial Resolution: varies, see above)</b>					
Blue Radiance/RDQI	XDim, YDim	UINT16	Radiance: $W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled) RDQI: none	Bit packed: Bits 0-1 = RDQI Bits 2-15 = Radiance (Bit 0 is LSB)	See above

The Radiance may be obtained from the Radiance/RDQI by right-shifting 2 bits, then multiplying the result by the Scale factor (radiometric) contained in the Radiance Grid Metadata.

The following are flag values used for the two Geometric Parameters included in the MISR Level 1B2 MI1B2E Ellipsoid-Projected Product.

**Table 6-12: Geometric Parameter Fill Values.**

All Parameters		
-111 = Fill above data	-222 = Fill below data	-333 = Fill IPI invalid
-444 = Fill to side of data	-555 = Fill not processed	-999 = Fill IPI error

The following two Geometric Parameters are included in the MISR Level 1B2 MI1B2E Ellipsoid-Projected Product. See the MISR Level 1B2 MI1B2GEOP Geometric Parameters Product description elsewhere in this section for descriptions of the full set of parameters. The angles reported in the MISR Geometric Parameters product are those conventionally used by the radiative transfer community. Formal definitions of these angles may be found in the Geometric Parameters section of the MISR Level 1 Georectification and Registration Algorithm Theoretical Basis, JPL D-11532. Informal descriptions are given in figures [6-1] and [6-2].

**Table 6-13: Geometric Parameters Grid Field Definitions.**

Field Name	Dimension List	Type	Units	Valid Range	Flag Values
<b>Grid GeometricParameters (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
SolarAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
SolarZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0 +	See above

The BRF conversion factor for each band is derived from the following equation:

$$(pi * SunDistanceAU^2) / (std\_solar\_wgted\_height * cos(SolarZenith))$$

This factor can be used to calculate the Bidirectional Reflectance Factor (BRF):

$$BRF = \text{BRF conversion factor} * \text{Radiance}$$

The Radiance may be obtained from the Radiance/RDQI by right-shifting 2 bits, then multiplying the result by the Scale factor (radiometric) contained in the Radiance Grid Metadata.

The BRF Conversion Factors use the same set of fill values as those described above in Table [6-12] “Geometric Parameters Fill Values”.

**Table 6-14: BRF Conversion Factors Grid Field Definitions.**

Field Name	Dimension List	Type	Units	Valid Range	Flag Values
<b>Grid BRF Conversion Factors (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
NIRConversionFactor	XDim, YDim	FLOAT32			
RedConversionFactor	XDim, YDim	FLOAT32			
GreenConversionFactor	XDim, YDim	FLOAT32			
BlueConversionFactor	XDim, YDim	FLOAT32			

#### 6.4.7 Per-grid QA Metadata

**Table 6-15: Ellipsoid-projected Per-grid QA Metadata.**

Indicator Description	Field Name	HDF Structure	Range	bite size	Mult
<i>Swath-level Indicators</i>		<i>Swath Vgrp</i>			
<b>Starting Block number of valid QA range</b>	StartBlock	Type: INT32 Vdata: Global	1 - 180	4	1
<b>Ending Block number of valid QA range</b>	EndBlock	Type: INT32 Vdata: Global	1 - 180	4	1
<b>Total number of samples generated</b>	SampTotal	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Total number of non-outside samples generated</b>	SampNoFill	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Number of non-outside samples generated with RDQI = 0</b>	SampNoFillDqi0	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Number of non-outside samples generated with RDQI = 1</b>	SampNoFillDqi1	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Number of non-outside samples generated with RDQI = 2</b>	SampNoFillDqi2	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Number of non-outside samples generated with RDQI = 3</b>	SampNoFillDqi3	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
* sample in: 1x1 = 275m x 275m    2x2 = 550m x 550m    1x4 = 275m x 1.1km    4x4 = 1.1km x 1.1km					

## 6.5 MISR LEVEL 1B2 MI1B2T AND MB2LMT TERRAIN-PROJECTED PRODUCTS

### 6.5.1 File Metadata Description

**Table 6-16: File Metadata for Terrain-projected TOA Radiance Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version Identifier for Ancillary Geographic Product	INT32	N/A	2
DID_version_id	Version Identifier for DID (DTED [Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	Not Used
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	Not Used
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	Not Used
SOM_parameters.som_orbit.nrev	Number of revolutions	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7078040.8
SOM_parameters.som_orbit.i	Inclination of orbit	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	0.0068666667
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0	FLOAT64	radians	0 - 2Pi

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	+/- 12 million
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	+/- 12 million
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file were obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-1  0 if data is global mode
Local_mode_site_name	The geographical name of the local mode site contained in this file for local mode files; null string for global mode files.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal
Camera	Indicator of MISR camera	INT32	N/A	Df = 1 Cf = 2 Bf = 3 Af = 4 An = 5 Aa = 6 Ba = 7 Ca = 8 Da = 9

## 6.5.2 Per-grid Metadata Description

**Table 6-17: Per-grid Metadata for Terrain-projected TOA Radiance Grids.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	275, 1100
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	275, 1100
Block_size.size_x	Block x dimension	INT32	512, 128
Block_size.size_y	Block y dimension	INT32	2048, 512

**Table 6-18: Per-grid Metadata for Terrain-projected TOA Radiance Grids.**

Radiance Grid Metadata	Definition	Data Type	Valid Values
Scale factor (Radiometric)	Multiplicative scale factor for converting the stored 14-bit number to radiance in units $W m^{-2} sr^{-1} \mu m^{-1}$	FLOAT64	<1
std_solar_wgted_height	$\bar{x}_0^{std(b)}$ [ $W m^{-2} \mu m^{-1}$ ], solar irradiances, standardized response weighted	FLOAT32	
SunDistanceAU	Approximate distance in astronomical units between the center of the earth and the center of the sun at the time MISR observes the first valid (non-fill) pixel in the swath. Replicated across bands for convenience; does not vary with band.	FLOAT64	

**Table 6-19: Per-grid Metadata for Geometric Parameters and BRF Conversion Factors Grids.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	17600
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	17600
Block_size.size_x	Block x dimension	INT32	8
Block_size.size_y	Block y dimension	INT32	32

### 6.5.3 Per-block Metadata Description

**Table 6-20: Per-block Metadata for Terrain-projected TOA Radiance File.**

PerBlockMetadataCommon	Definition	Data Type	Valid Range
Block_number	Block number with respect to the Ancillary Geographic Product	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

PerBlockMetadataRad	Definition	Data Type	Valid Range
number_transform	Number of transforms required for the block. If this number is two, then the following records occur twice.	INT32	Terrain: always 0 Ellipsoid: 0, 1, or 2
transform.ref_time	The time at which line 0 was acquired by the camera, adjusted for instrument corrections to this block.	CHAR8 * 54	
transform.start_line	Defines the starting SOM boundary for which this transform applies relative to the first block in the entire swath.	INT32	



PerBlockMetadataRad	Definition	Data Type	Valid Range
transform.number_line	Defines the ending SOM boundary for which this transform applies.	INT32	
transform.coeff_line[ 6 ]	The vector describing the line transform coefficients.	FLOAT64 * 6	
transform.coeff_samp[ 6 ]	The vector describing the sample transform coefficients.	FLOAT64 * 6	
transform.som_ctr.x	The x SOM coordinate of the center of the transform area, used in applying the transform.	FLOAT64	
transform.som_ctr.y	The y SOM coordinate of the center of the transform area, used in applying the transform.	FLOAT64	
transform.ipi_adj_sum		FLOAT64	
GDQI	Geometric Data Quality Indicator	FLOAT64	Terrain: -1.0 - 1.0 Ellipsoid: always 0.0

PerBlockMetadataTime	Definition	Data Type	Valid Range
BlockCenterTime	TAI time of the lower right pixel of the center four pixels in the current block, converted to UTC time, and displayed in CCSDS ASCII time code A format. Note: Uses a flag value of "0000-00-00T00:00:00.000000Z" to indicate blocks where data for the center of the block wasn't acquired (i.e., partial blocks at the start and end of the swath)	CHAR8 * 28	

**6.5.4 Per-line Metadata Description**

None.

**6.5.5 Per-pixel Metadata Description**

None.

### 6.5.6 Grid Data Set Descriptions

**Table 6-21: Terrain-projected Grid Data Set Descriptions**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	180
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	512 for 275 m parameters 128 for 1.1 km parameters 8 for 17.6 km parameters
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	2048 for 275 m parameters 512 for 1.1 km parameters 32 for 17.6 km parameters

For the Terrain-projected TOA Radiance and the Ellipsoid-projected TOA Radiance files, the spatial resolution (and therefore the XDim and YDim) of the different Grids within the file depend on the averaging mode that band is in for that particular camera. For local mode the spatial resolution is 275 m x 275 m for all cameras and bands. For the nominal Global Mode, the following table relates the spatial resolution to camera and band,.

**Table 6-22: Spatial Resolution Distribution for Global mode**

Grid	DF	CF	BF	AF	AN	AA	BA	CA	DA
<b>NIRBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>RedBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>BlueBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>GreenBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km

The following are flag values used for each parameter.:

**Table 6-23: Terrain-projected TOA Radiance Parameter Fill Values.**

RDQI	Radiance
0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose	16377 = SOM location obscured by topography. 16378 = SOM location not seen by the camera, i.e., this will occur outside the swath edges and at the top and bottom of the swath 16379 = SOM location is over ocean. Blocks which contain no land whatsoever are altered to contain only fill data. This is a measure taken to save space, and it is unique to Terrain files. Refer to the corresponding Ellipsoid-Projected Radiance file for ocean radiance in these cases. 16380 = Radiance unusable due to high RDQIs

The following are the parameters that make up the file:

**Table 6-24: Terrain-projected Parameters Grid Field Definitions**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Grid NIRBand (Spatial Resolution: varies, see above)</b>					
NIR Radiance/RDQI	XDim, YDim	UINT16	Radiance: $W\ m^{-2}\ sr^{-1}$ $\mu m^{-1}$ (scaled) RDQI: none	Bit packed: Bits 0-1 = RDQI Bits 2-15 = Radiance (Bit 0 is LSB)	See above
<b>Grid RedBand (Spatial Resolution: 275 m x 275 m, XDim = 512, YDim = 2048)</b>					
Red Radiance/RDQI	XDim, YDim	UINT16	Radiance: $W\ m^{-2}\ sr^{-1}$ $\mu m^{-1}$ (scaled) RDQI: none	Bit packed: Bits 0-1 = RDQI Bits 2-15 = Radiance (Bit 0 is LSB)	See above
<b>Grid GreenBand (Spatial Resolution: varies, see above)</b>					
Green Radiance/RDQI	XDim, YDim	UINT16	Radiance: $W\ m^{-2}\ sr^{-1}$ $\mu m^{-1}$ (scaled) RDQI: none	Bit packed: Bits 0-1 = RDQI Bits 2-15 = Radiance (Bit 0 is LSB)	See above
<b>Grid BlueBand (Spatial Resolution: varies, see above)</b>					

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
Blue Radiance/RDQI	XDim, YDim	UINT16	Radiance: $W m^{-2} sr^{-1}$ $\mu m^{-1}$ (scaled) RDQI: none	Bit packed: Bits 0-1 = RDQI Bits 2-15 = Radiance (Bit 0 is LSB)	See above

The Radiance may be obtained from the Radiance/RDQI by right-shifting 2 bits, then multiplying the result by the Scale factor (radiometric) contained in the Radiance Grid Metadata.

The following are flag values used for the two Geometric Parameters included in the MISR Level 1B2 MI1B2T Terrain-Projected Product.

**Table 6-25: Geometric Parameter Fill Values.**

All Parameters		
-111 = Fill above data	-222 = Fill below data	-333 = Fill IPI invalid
-444 = Fill to side of data	-555 = Fill not processed	-999 = Fill IPI error

The following two Geometric Parameters are included in the MISR Level 1B2 MI1B2T Terrain-Projected Product. See the MISR Level 1B2 MI1B2GEOP Geometric Parameters Product description elsewhere in this section for descriptions of the full set of parameters. The angles reported in the MISR Geometric Parameters product are those conventionally used by the radiative transfer community. Formal definitions of these angles may be found in the Geometric Parameters section of the MISR Level 1 Georectification and Registration Algorithm Theoretical Basis, JPL D-11532. Informal descriptions are given in figures [6-1] and [6-2].

**Table 6-26: Geometric Parameters Grid Field Definitions.**

Field Name	Dimension List	Type	Units	Valid Range	Flag Values
<b>Grid GeometricParameters (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
SolarAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
SolarZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0 +	See above

The BRF conversion factor for each band is derived from the following equation:

$$(\pi * \text{SunDistanceAU}^2) / (\text{std\_solar\_wgted\_height} * \cos(\text{SolarZenith}))$$

This factor can be used to calculate the Bidirectional Reflectance Factor (BRF):

BRF = BRF conversion factor \* Radiance

The Radiance may be obtained from the Radiance/RDQI by right-shifting 2 bits, then multiplying the result by the Scale factor (radiometric) contained in the Radiance Grid Metadata.

The BRF Conversion Factors use the same set of fill values as those described above in Table [6-25] “Geometric Parameters Fill Values”.

**Table 6-27: BRF Conversion Factors Grid Field Definitions.**

Field Name	Dimension List	Type	Units	Valid Range	Flag Values
<b>Grid BRF Conversion Factors (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
NIRConversionFactor	XDim, YDim	FLOAT32			
RedConversionFactor	XDim, YDim	FLOAT32			
GreenConversionFactor	XDim, YDim	FLOAT32			
BlueConversionFactor	XDim, YDim	FLOAT32			

**6.5.7 Per-grid QA Metadata**

**Table 6-28: Terrain-projected Per-grid QA Metadata.**

Indicator Description	Field Name	HDF Structure	Range	byte size	Mult
<i>Swath-level Indicators *</i>		<i>Swath Vgrp</i>			
<b>Total number of samples generated</b>	SampTotal	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Total number of non-outside samples generated</b>	SampNoFill	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Number of non-outside samples generated with RDQI = 0</b>	SampNoFillDqi0	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Number of non-outside samples generated with RDQI = 1</b>	SampNoFillDqi1	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Number of non-outside samples generated with RDQI = 2</b>	SampNoFillDqi2	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4
<b>Number of non-outside samples generated with RDQI = 3</b>	SampNoFillDqi3	Type: INT32 Vdata: Band/ Mode	0 - 148,897,792	4	4

Indicator Description	Field Name	HDF Structure	Range	byte size	Mult
<b>Starting Block number of valid QA range</b>	StartBlock	Type: INT32 Vdata: Global	1 - 180	4	1
<b>Ending Block number of valid QA range</b>	EndBlock	Type: INT32 Vdata: Global	1 - 180	4	1
<b>* sample in: 1x1 = 275m x 275m 2x2 = 550m x 550m 1x4 = 275m x 1.1km 4x4 = 1.1km x 1.1km</b>					
<i>Block-level Indicators</i>		<i>Block Vgrps</i>			
<b>Metadata identifying record by block number</b>	BlockNumber	Field: INT32 Vdata: Block	1 - 180	4	180
<b>Metadata distinguishing valid data records</b>	ValidRecord	Field: INT8 Vdata: Block	0=not valid 1=valid	1	180
<b>Number of Grid Cells in this block</b>	NumGridCells	Type: INT32 Vdata: Block	2 - 62	4	180
<b>Projection Parameter Quality Indicator read from the ancillary PP file</b>	PPQI	Type: FLOAT64 Vdata: Block	0 - 1	8	180
<b>Summary of the block's Geometric Data Quality</b>	GDQI	Type: FLOAT64 Vdata: Block	-1.0 to 1.0	8	180
<i>GridCell-level Indicators</i>		<i>GridCell Vgrp</i>			*
<b>The Geometric Data Quality Indicator (GDQI) consists of several fields used by GeoCal.</b>		The GC Vgrp contains a GC Vdata for each block which has an unlimited number of GC records of transform quality info for that grid cell.			
<b>Grid Cell Index (may not be implemented yet)</b>	GridCellID	Type: UINT8 Vdata: GridCellQa	0 - 255	1	5,000
<b>Flag representing accuracy of the transform for this grid cell</b>	AccuracyFlag	Type: UINT8 Vdata: GridCellQa	0 = pass 1 = fail 2 = unknown	1	5,000
<b>Flag indicating if this grid cell was subgridded</b>	SubgridFlag	Type: UINT8 Vdata: GridCellQa	0 = no 1 = yes	1	5,000
<b>Level of subgridding at which this grid cell resides</b>	SubgridLevel	Type: INT32 Vdata: GridCellQa	0 - 6	4	5,000
<b>Number of grid points investigated as possible matching candidates</b>	PotentialGpts	Type: INT32 Vdata: GridCellQa	0 - 50	4	5,000
<b>Number of potential grid points selected for matching attempts after meeting certain criteria</b>	CandidateGpts	Type: INT32 Vdata: GridCellQa	0 - 50	4	5,000
<b>Number of grid points detected as matching blunders</b>	BlunderGpts	Type: INT32 Vdata: GridCellQa	0 - 50	4	5,000

Indicator Description	Field Name	HDF Structure	Range	byte size	Mult
<b>Number of successfully matched grid points</b>	MatchedGpts	Type: INT32 Vdata: GridCellQa	0 - 50	4	5,000
<b>Average line correction for matched points</b>	AveCorLine	Type: FLOAT64 Vdata: GridCellQa	- 20 to 20	8	5,000
<b>Average sample correction for matched points</b>	AveCorSample	Type: FLOAT64 Vdata: GridCellQa	- 20 to 20	8	5,000
<b>Standard deviation of average line correction</b>	StddevCorLine	Type: FLOAT64 Vdata: GridCellQa	0 - maxflt	8	5,000
<b>Standard deviation of average sample correction</b>	StddevCorSamp	Type: FLOAT64 Vdata: GridCellQa	0 - maxflt	8	5,000
<b>Standard deviation of the image to image line transform</b>	StddevTrmLine	Type: FLOAT64 Vdata: GridCellQa	0 - maxflt	8	5,000
<b>Standard deviation of the image to image sample transform</b>	StddevTrmSamp	Type: FLOAT64 Vdata: GridCellQa	0 - maxflt	8	5,000
* size multiplier is approximate; each block may have between 2 and 62 grid cells					

## 6.6 MISR LEVEL 1B2 MI1B2GEOP GEOMETRIC PARAMETERS PRODUCT

### 6.6.1 File Metadata Description

**Table 6-29: File Metadata for Geometric Parameters Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version Identifier for Ancillary Geographic Product	INT32	N/A	2
DID_version_id	Version Identifier for DID (DTED [Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	Not Used
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	Not Used
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	Not Used
SOM_parameters.som_orbit.nrev	Number of revolutions	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7078040.8
SOM_parameters.som_orbit.i	Inclination of orbit	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	0.0068666667
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0	FLOAT64	radians	0 - 2Pi



File Metadata Field Name	Definition	Data Type	Units	Valid Range
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	+/- 12 million
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	+/- 12 million
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file was obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-1  0 if data is global mode
Local_mode_site_name	The geographical name of the local mode site contained in this file for local mode files; null string for global mode files.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal

**6.6.2 Per-grid Metadata Description**

**Table 6-30: Per-grid Metadata for Geometric Parameters Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	17600

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	17600
Block_size.size_x	Block x dimension	INT32	8
Block_size.size_y	Block y dimension	INT32	32

Grid Metadata	Definition	Data Type	Valid Values
SunDistanceAU	Approximate distance in astronomical units between the center of the earth and the center of the sun at the time MISR observes the first valid (non-fill) pixel in the swath.	FLOAT64	

### 6.6.3 Per-block Metadata Description

**Table 6-31: Per-block Metadata for Geometric Parameters Product Files.**

PerBlockMetadataCommon	Definition	Data Type	Valid Range
Block_number	Block number with respect to the Ancillary Geographic Product	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

PerBlockMetadataGeoparm	Definition	Data Type	Valid Range
SunDistance	Approximate distance in meters between the center of the earth and the center of the sun at the time MISR observes the first valid (non-fill) pixel in the swath. Repeated in all blocks subsequent to the block containing the first valid pixel for convenience; set to 0.0 in all blocks preceding the block containing the first valid pixel.	FLOAT64	

**6.6.4 Per-line Metadata Description**

None.

**6.6.5 Per-pixel Metadata Description**

None.

**6.6.6 Grid Data Set Descriptions**

**Table 6-32: Geometric Parameters Product Field Dimension Descriptions**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	180
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	8 for 17.6 km parameters
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	32 for 17.6 km parameters

The following are flag values used for each parameter.

**Table 6-33: Geometric Parameter Fill Values.**

All Parameters		
-111 = Fill above data	-222 = Fill below data	-333 = Fill IPI invalid
-444 = Fill to side of data	-555 = Fill not processed	-999 = Fill IPI error

The grid data set consists of the following parameters.

**Table 6-34: Geometric Parameters Grid Field Definitions.**

Field Name	Dimension List	Type	Units	Valid Range	Flag Values
<b>Grid GeometricParameters (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
SolarAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
SolarZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0 +	See above
DfAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
DfZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
CfAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
CfZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
BfAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
BfZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
AfAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
AfZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
AnAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
AnZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
AaAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
AaZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
BaAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
BaZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
CaAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
CaZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
DaAzimuth	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
DaZenith	XDim, YDim	FLOAT64	degrees	0.0 to 90.0	See above
DfScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
DfGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
CfScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
CfGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
BfScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
BfGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
AfScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above


Field Name	Dimension List	Type	Units	Valid Range	Flag Values
AfGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
AnScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
AnGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
AaScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
AaGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
BaScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
BaGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
CaScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
CaGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
DaScatter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above
DaGlitter	XDim, YDim	FLOAT64	degrees	0.0 to 360.0	See above

The solar view and camera angles reported in the MISR Geometric Parameters grid data set are those conventionally used by the radiative transfer community. Formal definitions of these angles may be found in the Geometric Parameters section of the MISR Level 1 Georectification and Registration Algorithm Theoretical Basis, JPL D-11532. Terse diagrammatic descriptions are given in figures [6-1] and [6-2] below.

**Scatter and Glitter angles** are new additions to the product. Scatter angle is the angle between a vector pointing from the Sun to the observed point and a vector from the observed point to the camera in question. Scatter angles between 0 and 90 degrees indicate forward scattering. Scatter angles between 90 and 180 degrees indicate backward scattering. Glitter angle is the angle between a vector from the observed point to the camera and a vector pointing in the specular reflection direction. Small glitter angles indicate the possibility of observing sun glint. It is a common practice to identify pixels with a glitter angle less than 30 to 40 degrees as sun glint contaminated.

**Figure 6-1 Sun Angles**

A Cartesian coordinate system is defined in which the +z axis points into the earth, in the direction opposite the ellipsoid normal. The x axis points toward local north. The y axis completes the right-handed coordinate system, pointing east.

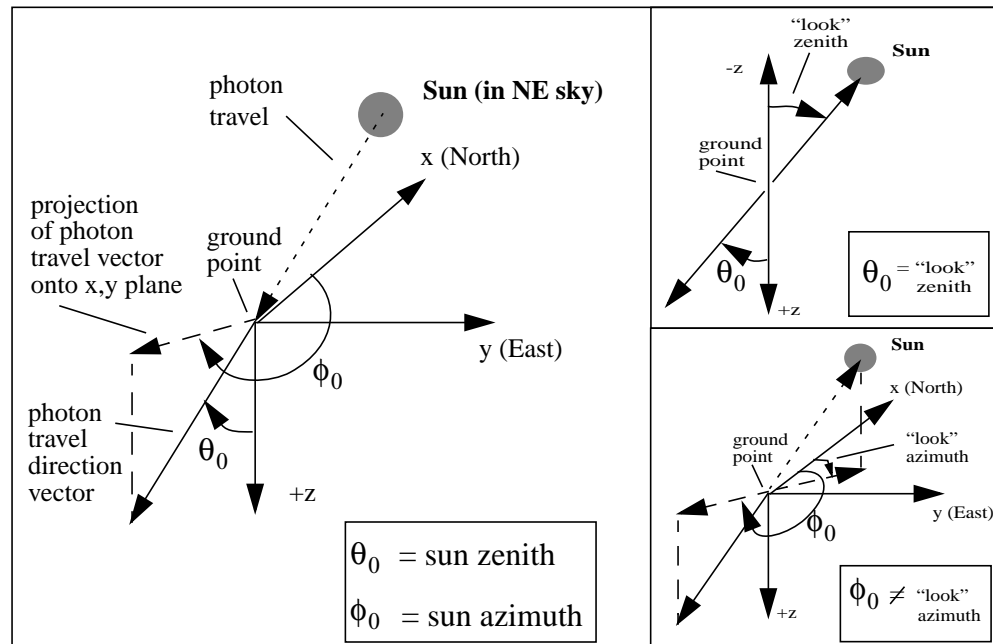


**Sun Zenith** is the angle between the +z axis and a vector anchored at the ground point extending into the earth in the direction of photon travel from the sun. Equivalently, it is the angle between the -z axis and a vector from the ground point to the sun. If the sun is directly overhead, the MISR sun zenith is zero. Values greater than 90 degrees may be reported when the sun is below the horizon for ground points at high latitudes.

**Sun Azimuth** is the angle measured clockwise from the local north vector to the projection onto the x,y plane of the photon travel direction vector. This “photon travel azimuth” convention differs from the familiar “look azimuth” by 180 degrees. Reported values range between 0 and 360 degrees. When the sun is due south of the ground point, MISR sun azimuth is 0 degrees.

**Figure 6-2 Camera Angles**

**Camera Zenith** is the angle between the -z axis and the “camera vector.” (The camera vector is anchored at the ground point and is directed toward the camera in the direction of photon travel.) Values range between 0 and 90 degrees.

**Camera Azimuth** is the angle measured clockwise from the local north vector to the projection onto the x,y plane of the camera vector. Values range between 0 and 360 degrees.

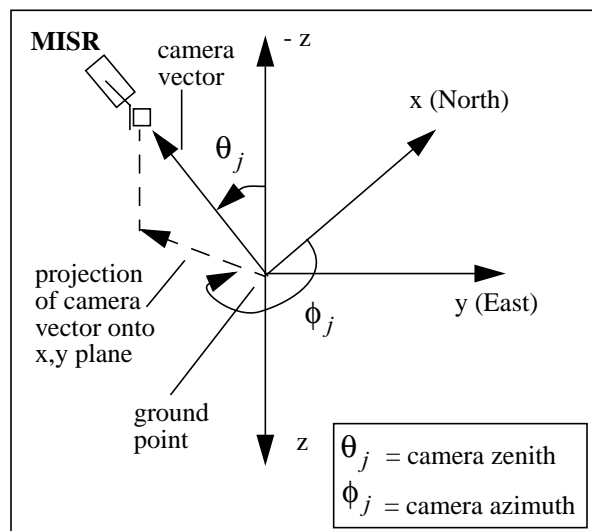

### 6.6.7 Per-grid QA Metadata

None.

## 6.7 MISR LEVEL 1B2 MI1B2RCCM RCCM PRODUCT

### 6.7.1 File Metadata Description

**Table 6-35: File Metadata for RCCM Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version Identifier for Ancillary Geographic Product	INT32	N/A	2
DID_version_id	Version Identifier for DID (DTED [Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	Not Used
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	Not Used
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	Not Used
SOM_parameters.som_orbit.nrev	Number of revolutions	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7078040.8

File Metadata Field Name	Definition	Data Type	Units	Valid Range
SOM_parameters.som_orbit.i	Inclination of orbit	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	0.0068666667
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0	FLOAT64	radians	0 - 2Pi
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	+/- 12 million
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	+/- 12 million
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file was obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-1  0 if data is global mode
Local_mode_site_name	The geographical name of the local mode site contained in this file for local mode files; null string for global mode files.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal



File Metadata Field Name	Definition	Data Type	Units	Valid Range
Camera	Indicator of MISR camera	INT32	N/A	Df = 1 Cf = 2 Bf = 3 Af = 4 An = 5 Aa = 6 Ba = 7 Ca = 8 Da = 9

**6.7.2 Per-grid Metadata Description**

**Table 6-36: Per-grid Metadata for RCCM Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	275, 1100, 17600
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	275, 1100, 17600
Block_size.size_x	Block x dimension	INT32	512, 128, 8
Block_size.size_y	Block y dimension	INT32	2048, 512, 32

**6.7.3 Per-block Metadata Description**

**Table 6-37: Per-block Metadata for RCCM Product Files.**

PerBlockMetadataCommon	Definition	Data Type	Valid Range
Block_number	Block number with respect to the Ancillary Geographic Product	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	

PerBlockMetadataCommon	Definition	Data Type	Valid Range
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

#### 6.7.4 Per-line Metadata Description

None.

#### 6.7.5 Per-pixel Metadata Description

None.

#### 6.7.6 Grid Data Set Descriptions

**Table 6-38: Georectified Radiance Product Field Dimension Descriptions.**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	180
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	512 for 275 m parameters 128 for 1.1 km parameters 8 for 17.6 km parameters
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	2048 for 275 m parameters 512 for 1.1 km parameters 32 for 17.6 km parameters

For the Terrain-projected TOA Radiance and the Ellipsoid-projected TOA Radiance files, the spatial resolution (and therefore the XDim and YDim) of the different Grids within the file depend on the averaging mode that band is in for that particular camera. For the nominal Global Mode called

“Super Stereo”, the following table relates the spatial resolution to camera and band.

**Table 6-39: Spatial Resolution Distribution for Global mode**

Grid	DF	CF	BF	AF	AN	AA	BA	CA	DA
<b>NIRBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>RedBand</b>	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m	275 m x 275 m
<b>BlueBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km
<b>GreenBand</b>	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	275 m x 275 m	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km	1.1 km x 1.1 km

The following are the parameters that make up the file.

**Table 6-40: RCCM Parameters Grid Field Definitions.**

Field Name Parameter Description	Dimension List	Number Type	Units	Transform ation	Flag Values
<b>Grid RCCM (Spatial Resolution: 1.1 km x 1.1 km, XDim = 128, YDim = 512)</b>					
<b>Cloud</b>  Cloud Mask for this pixel.	XDim, YDim	UINT8	none	n/a	0 = no retrieval 1 = Cloud with high confidence 2 = Cloud with low confidence 3 = Clear with low confidence 4 = Clear with high confidence 255 = Fill
<b>Glitter</b>  Glitter Mask.	XDim, YDim	UINT8	none	n/a	0 = Not glitter contaminated 1 = Glitter contaminated 255 = Fill
<b>Quality</b>  Quality of the cloud mask.	XDim, YDim	UINT8	none	n/a	0 = no retrieval 1 = Secondary test used only 2 = Primary test used only 3 = Both primary and secondary tests used 255 = Fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Dust_test</b> Dust mask (Only reported over ocean).	XDim, YDim	UINT8	none	n/a	0 = no retrieval 1 = Not Dust (lo test) 2 = Dust (Clear of Clouds) 3 = Not Dust (hi test) 255 = Fill
<b>First Observable</b> Value of the primary observable used in calculating the cloud mask.	XDim, YDim	FLOAT32	diagnostic	n/a	-9999.0 = Fill
<b>Second Observable</b> Value of the secondary observable used in calculating the cloud mask.	XDim, YDim	FLOAT32	diagnostic	n/a	-9999.0 = Fill
<b>Dust Observable</b> Value of the observable used in calculating the dust mask.	XDim, YDim	FLOAT32	diagnostic	n/a	-9999.0 = Fill

### 6.7.7 Per-grid QA Metadata

**Table 6-41: RCCM Per-grid QA Metadata.**

Indicator Description	Field Name	HDF Structure	Range	byte size	Mult
<i>Swath-level Indicators</i>		<i>Swath Vgrp</i>			
<b>Starting Block number of valid QA range</b>	Start_block	Type: INT32 Vdata: Global	1 - 180	4	1
<b>Ending Block number of valid QA range</b>	End_block	Type: INT32 Vdata: Global	1 - 180	4	1
<b>Total number of RCCM's generated</b>	RCCM_total	Type: INT32 Vdata: Global	0 - 9,306,112	4	4
<b>Total number of RCCM's classified Both Primary and Secondary Tests Used</b>	RCCM_both	Type: INT32 Vdata: Global	0 - 9,306,112	4	4
<b>Total number of RCCM's classified Primary Test Used Only</b>	RCCM_primary	Type: INT32 Vdata: Global	0 - 9,306,112	4	4
<b>Total number of RCCM's classified Secondary Test Used Only</b>	RCCM_secondary	Type: INT32 Vdata: Global	0 - 9,306,112	4	4

Indicator Description	Field Name	HDF Structure	Range	byte size	Mult
<b>Total number of RCCM's classified No Retrieval</b>	RCCM_noretrieve	Type: INT32 Vdata: Global	0 - 9,306,112	4	4
<b>Total number of RCCM's classified Not Glitter Contaminated</b>	RCCM_glitter	Type: INT32 Vdata: Global	0 - 9,306,112	4	4
<b>Total number of RCCM's classified Glitter Contaminated</b>	RCCM_noglitter	Type: INT32 Vdata: Global	0 - 9,306,112	4	4

## **6.8 MISR LEVEL 1B2 MISRBR ELLIPSOID PROJECTED BROWSE PRODUCT**

The MISR Ellipsoid Browse product is generated by making a JPEG color image out of the MI1B2E red, green and blue band data. A separate browse product is generated for each of the nine camera views. Each browse product is therefore an image of the entire MISR swath from a particular camera view. In order to limit the size of the browse file to something manageable, the image is sub-sampled and then compressed. Sub-sampling to 2.2km resolution is performed for all bands. Compression is accomplished with the JPEG algorithm at a 75% quality level. The image is also clipped and gamma stretched in order to make cloud, ocean and land features visible. Since the browse product is in the JPEG JFIF file format (.jpg), it contains none of the metadata typically associated with a MISR product. The image itself does contain graphical corner markers and block number labels to enable a user to locate individual MISR blocks within a browse image.

**6.9 MISR LEVEL 1B2 MIB2TRPE ELLIPSOID-PROJECTED TRANSFORM PARAMETERS PRODUCT**

The MISR Ellipsoid-projected Transform Parameters product is essentially an intermediate product that is exchanged between two software programs to help with the generation of the L1B2 Local Mode products. So, this product may not be available for distribution. The Ellipsoid TRP product is generated primarily by copying the file metadata, core metadata, annotations (version history metadata), and block metadata from the 1B2 ellipsoid-projected global mode file and by storing the SOM-to-New georectification transform parameters from the 1B2 ellipsoid global mode processing. In addition, equator-crossing information, level 1B1 extent information, and image coordinate correction (ICC) information are added to the file. The SOM-to-New transform parameters are applied in level 1B2 local mode processing to perform georectification on the level 1B1 radiometrically corrected product, so as to produce the level 1B2 ellipsoid-projected local mode product.

**6.9.1 File Metadata Description**

- See Table 6-3, “File Metadata for Ellipsoid-projected TOA Radiance Files.,” on page 96 for all fields other than those described in the following table.

**Table 6-42: Additional File Metadata for Ellipsoid-Projected Transform Parameter Files.**

File Metadata Field Name	Definition	Data Type	Valid Range
equator_crossing.time	Equator-crossing date and time	CHAR8 * 28	
equator_crossing.longitude	Equator-crossing longitude (radians)	FLOAT64	

**6.9.2 Per-block Metadata Description**

- See Table 6-7, “PerBlock Metadata for Ellipsoid-projected TOA Radiance File.,” on page 99 for all fields other than those described in the following table.

For each field in L1B1 Extent Per-block Metadata there is one record per block, with four values per record, one value for each band.

**Table 6-43: L1B1 Extent Per-block Metadata for Ellipsoid-Projected Transform Parameter Files.**

PerBlockL1b1Extent	Definition	Data Type	Valid Range
valid	Flag indicating if extent is valid for this band	INT8 * 4	0 - 1 0 = invalid 1 = valid

PerBlockL1b1Extent	Definition	Data Type	Valid Range
resolution	Resolution of min_line and max_line in units of 275-meter pixels	INT32 * 4	1, 4
min_line	Minimum L1B1 line number seen in this block	INT32 * 4	0 - 92159
max_line	Maximum L1B1 line number seen in this block	INT32 * 4	0 - 92159

**Table 6-44: GDQI Per-Block Metadata for Ellipsoid-Projected Transform Parameter File**

PerBlockMetadataPrelim	Definition	Data Type	Valid Range
GDQI_prelim	Preliminary Geometric Data Quality Indicator. This field pertains to one MISR block prior to the application of post-processing corrections.	FLOAT64	-1.0 to 1.0 continuous  -1.0 indicates worst quality.  1.0 indicates best quality.

**Table 6-45: ICC Per-Block Metadata for Ellipsoid-Projected Transform Parameter File**

PerBlockMetadataPreICC	Definition	Data Type	Valid Range
Prelim_coeff_line	The raw misregistration in along-track direction before smoothing to produce a constant value for the entire orbit.	FLOAT64 * 2	-21.0 to 21.0
Prelim_coeff_sample	The raw misregistration in across-track direction before smoothing to produce a constant value for the entire orbit.	FLOAT64 * 2	-21.0 to 21.0

### 6.9.3 ICC Per-gridcell Metadata Description

The following table describes the Image Coordinate Correction per-gridcell metadata. For each field for blocks with block numbers  $\geq$  the start block, there are two records, one for each of the grid cells.



**Table 6-46: ICC Per-gridcell Metadata for Ellipsoid-Projected Transform Parameter Files.**

PerGridCell ICC	Definition	Data Type	Valid Range
block_number	Block number	INT32	1 - 180
grid_cell_index	Grid cell index	INT32	0 - 1
effective_flag	Flag to indicate if ICC is used in georegistration for this grid cell	INT8	0 - 1 0 = not used 1 = used
coeff_line	ICC line transform coefficients	FLOAT64 * 2	
coeff_sample	ICC sample transform coefficients	FLOAT64 * 2	
coeff_line_covariance	Covariance matrix for line transform coefficients	FLOAT64 * 4	
coeff_sample_covariance	Covariance matrix for sample transform coefficients	FLOAT64 * 4	
attitude_model.sensitivity_line	Combined sensitivity in image line to 1 arcsecond of attitude change in yaw, pitch, and roll	FLOAT64	
attitude_model.sensitivity_sample	Combined sensitivity in image sample to 1 arcsecond of attitude change in yaw, pitch, and roll	FLOAT64	
attitude_model.white_noise_drift_bias	Bias of gyro white noise drift, 1 sigma	FLOAT64	
attitude_model.random_walk_drift_bias	Bias of gyro random walk drift, 1 sigma	FLOAT64	
delta_t	Time delta in seconds since the last update to the ICC transform, used to adjust covariance uncertainties	FLOAT64	
sigma_line	Sigma associated with the line correction transform	FLOAT64	
sigma_sample	Sigma associated with the sample correction transform	FLOAT64	

**6.9.4 SOM-to-New Per-gridcell and Per-band Metadata Description**

The following table describes the SOM-to-New per-gridcell and per-band metadata. For each field for blocks with block numbers >= the start block, there are eight records, one for each of the four bands within each of two grid cells.

**Table 6-47: SOM-to-New Per-gridcell and Per-band Metadata for Ellipsoid-Projected**

### Transform Parameter Files.

PerGridCellSomToNew	Definition	Data Type	Valid Range
block_number	Block number	INT32	1 - 180
grid_cell_index	Grid cell index	INT32	0 - 1
band_index	Band index	INT32	0 - 3
valid	Flag indicating if SOM-to-new transform is valid for this grid cell and band	INT8	0 - 1 0 = invalid 1 = valid
som_area.start_line	Start line of an SOM area, offset from the first line of block 1, in units of 275-meter pixels	INT32	0 - 92159
som_area.start_sample	Start sample of an SOM area, offset from the leftmost (minimum SOM Y) pixel of the block containing the given range of line coordinates, in units of 275-meter pixels	INT32	0 - 2047
som_area.number_line	Number of lines in an SOM area, in units of 275-meter pixels (range of line coordinates may not span more than one block)	INT32	0, 256
som_area.number_sample	Number of samples in an SOM area, in units of 275-meter pixels	INT32	0, 2048
transform.resolution.line	Line resolution of transform, in units of 275-meter pixels	INT32	1, 4
transform.resolution.sample	Sample resolution of transform, in units of 275-meter pixels	INT32	1, 4
transform.som_ctr.line	SOM center location (line) of the grid cell for which the transform applies, in units of 275-meter pixels	INT32	0 - 92159
transform.som_ctr.sample	SOM center location (sample) of the grid cell for which the transform applies, in units of 275-meter pixels	INT32	0 - 2047
transform.coeff_line	Transform coefficients	FLOAT64 * 6	
transform.coeff_sample	Transform coefficients	FLOAT64 * 6	

## 6.10 MISR LEVEL 1B2 MIB2TRPT TERRAIN-PROJECTED TRANSFORM PARAMETERS PRODUCT

The MISR Terrain-projected Transform Parameters product is essentially an intermediate product that is exchanged between two software programs to help with the generation of the L1B2 Local Mode products. So, this product may not be available for distribution. The Terrain TRP product is generated by copying the file metadata, core metadata, annotations (version history metadata), and block metadata from the 1B2 terrain-projected global mode file and by storing the Ref-to-New and Band-to-Band georectification transform parameters from the 1B2 terrain global mode processing. In addition, equator-crossing information, level 1B1 extent information, and image coordinate correction (ICC) information are added to the file. The Ref-to-New and Band-to-Band transform parameters are applied in level 1B2 local mode processing to perform georectification on the level 1B1 radiometrically corrected product, so as to produce the level 1B2 terrain-projected local mode product.

### 6.10.1 File Metadata Description

See Table 6-16, “File Metadata for Terrain-projected TOA Radiance Files.,” on page 105 for all fields other than those described in the following table.

**Table 6-48: Additional File Metadata for Terrain-Projected Transform Parameter Files.**

File Metadata Field Name	Definition	Data Type	Valid Range
equator_crossing.time	Equator-crossing date and time	CHAR8 * 28	
equator_crossing.longitude	Equator-crossing longitude (radians)	FLOAT64	

### 6.10.2 Per-block Metadata Description

See Table 6-20, “Per-block Metadata for Terrain-projected TOA Radiance File.,” on page 108 for all fields other than those described in the following table.

For each field in L1B1 Extent Per-block Metadata there is one record per block, with four values per record, one value for each band.

**Table 6-49: L1B1 Extent Per-block Metadata for Terrain-Projected Transform Parameter Files.**

PerBlockL1b1Extent	Definition	Data Type	Valid Range
valid	Flag indicating if extent is valid for this band	INT8 * 4	0 - 1 0 = invalid 1 = valid

PerBlockL1b1Extent	Definition	Data Type	Valid Range
resolution	Resolution of min_line and max_line in units of 275-meter pixels	INT32 * 4	1, 4
min_line	Minimum L1B1 line number seen in this block	INT32 * 4	0 - 92159
max_line	Maximum L1B1 line number seen in this block	INT32 * 4	0 - 92159

**Table 6-50: GDQI Per-Block Metadata for Terrain-Projected Transform Parameter File**

PerBlockMetadataPrelim	Definition	Data Type	Valid Range
GDQI_prelim	Preliminary Geometric Data Quality Indicator. This field pertains to one MISR block prior to the application of post-processing corrections.	FLOAT64	-1.0, -0.5, 0.0, 1.0  -1.0 indicates worst quality.  1.0 indicates best quality.

**Table 6-51: ICC Per-Block Metadata for Terrain-Projected Transform Parameter File**

PerBlockMetadataPreICC	Definition	Data Type	Valid Range
Prelim_coeff_line	The raw misregistration in along-track direction before smoothing to produce a constant value for the entire orbit.	FLOAT64 * 2	-21.0 to 21.0
Prelim_coeff_sample	The raw misregistration in across-track direction before smoothing to produce a constant value for the entire orbit.	FLOAT64 * 2	-21.0 to 21.0

### 6.10.3 ICC Per-gridcell Metadata Description

The following table describes the Image Coordinate Correction per-gridcell metadata. For each field for blocks with block numbers  $\geq$  the start block, there are two records, one for each of the grid cells.

**Table 6-52: ICC Per-gridcell Metadata for Terrain-Projected Transform Parameter Files.**

PerGridCell ICC	Definition	Data Type	Valid Range
block_number	Block number	INT32	1 - 180
grid_cell_index	Grid cell index	INT32	0 - 1
effective_flag	Flag to indicate if ICC is used in georegistration for this grid cell	INT8	0 - 1 0 = not used 1 = used
coeff_line	ICC line transform coefficients	FLOAT64 * 2	
coeff_sample	ICC sample transform coefficients	FLOAT64 * 2	
coeff_line_covariance	Covariance matrix for line transform coefficients	FLOAT64 * 4	
coeff_sample_covariance	Covariance matrix for sample transform coefficients	FLOAT64 * 4	
attitude_model.sensitivity_line	Combined sensitivity in image line to 1 arcsecond of attitude change in yaw, pitch, and roll	FLOAT64	
attitude_model.sensitivity_sample	Combined sensitivity in image sample to 1 arcsecond of attitude change in yaw, pitch, and roll	FLOAT64	
attitude_model.white_noise_drift_bias	Bias of gyro white noise drift, 1 sigma	FLOAT64	
attitude_model.random_walk_drift_bias	Bias of gyro random walk drift, 1 sigma	FLOAT64	
delta_t	Time delta in seconds since the last update to the ICC transform, used to adjust covariance uncertainties	FLOAT64	
sigma_line	Sigma associated with the line correction transform	FLOAT64	
sigma_sample	Sigma associated with the sample correction transform	FLOAT64	

#### 6.10.4 Ref-to-New Per-subgridcell Metadata Description

The following table describes the Ref-to-New per-subgridcell metadata. For each field for blocks containing data (non-ocean blocks which are  $\geq$  start block and  $\leq$  end block) there is a record for each of the subgridcells. A block which contains data contains one or two gridcells; each gridcell can contain a variable number of subgridcells.

**Table 6-53: Ref-to-New Per-subgridcell Metadata for Terrain-Projected Transform**

### Parameter Files.

PerGridCell ICC	Definition	Data Type	Valid Range
block_number	Block number	INT32	1 - 180
grid_cell_index	Grid cell index	INT32	0 - 1
subgrid_index	Subgridcell index	INT32	>= 0
som_area.start_line	Start line of an SOM area, offset from the first line of block 1, in units of 275-meter pixels	INT32	0 - 92159
som_area.start_sample	Start sample of an SOM area, offset from the leftmost (minimum SOM Y) pixel of the block containing the given range of line coordinates, in units of 275-meter pixels	INT32	0 - 2047
som_area.number_line	Number of lines in an SOM area, in units of 275-meter pixels (range of line coordinates may not span more than one block)	INT32	0 - 256
som_area.number_sample	Number of samples in an SOM area, in units of 275-meter pixels	INT32	0 - 2048
transform.coeff_line	Transform coefficients	FLOAT64 * 3	
transform.coeff_sample	Transform coefficients	FLOAT64 * 3	

#### 6.10.5 Band-to-Band Per-gridcell and Per-band Metadata Description

The following table describes the Band-to-Band per-gridcell and per-band metadata. For each field for blocks with block numbers  $\geq$  the start block, there are eight records, one for each of the four bands within each of two grid cells. The “valid” flag is always set to zero for band 2 (the red band) and for all bands of both grid cells of blocks which are entirely over ocean. For blocks partly over ocean, the “valid” flag is set to zero for all bands of a grid cell which is entirely over ocean.

**Table 6-54: Band-to-Band Per-gridcell and Per-band Metadata for Terrain-Projected Transform Parameter Files.**

PerGridCellBandToBand	Definition	Data Type	Valid Range
block_number	Block number	INT32	1 - 180
grid_cell_index	Grid cell index	INT32	0 - 1
band_index	Band index	INT32	0 - 3

PerGridCellBandToBand	Definition	Data Type	Valid Range
valid	Flag indicating if SOM-to-new transform is valid for this grid cell and band	INT8	0 - 1 0 = invalid 1 = valid
som_area.start_line	Start line of an SOM area, offset from the first line of block 1, in units of 275-meter pixels	INT32	0 - 92159
som_area.start_sample	Start sample of an SOM area, offset from the leftmost (minimum SOM Y) pixel of the block containing the given range of line coordinates, in units of 275-meter pixels	INT32	0 - 2047
som_area.number_line	Number of lines in an SOM area, in units of 275-meter pixels (range of line coordinates may not span more than one block)	INT32	0, 256
som_area.number_sample	Number of samples in an SOM area, in units of 275-meter pixels	INT32	0 - 2048
transform.coeff_line	Transform coefficients	FLOAT64 * 4	
transform.coeff_sample	Transform coefficients	FLOAT64 * 2	

## 6.11 MISR LEVEL 1B2 MIB2CORR REGISTRATION CORRECTIONS PRODUCT

The MISR registration corrections product (CORR) contains block-by-block geometric co-registration errors for each camera relative to the nadir camera in both the sample and line directions. The CORR product is used to improve the georectification and co-registration of the GRP product.

### 6.11.1 Data Set Description

The Block-Half Diff Flags are unused in Level 1 processing. They were intended to detect when the upper/lower and left/right halves of a block have misregistration values different enough that it probably indicates there is a problem of some kind, most likely that there was an ROI correction in the 2nd half of the block.

**Table 6-55: Corrections File**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Blk	Block number	INT32	N/A	1-180
T/E	Terrain/Ellipsoid	CHAR8	N/A	'T' or 'E'
Dir	Direction of offset (Line or Sample)	CHAR8	N/A	String up to 3 characters in length.
Num	Number of valid points	INT32	N/A	1-180
Df	Df Camera Offset Mean	FLOAT64	pixel	-21.0-21.0
Cf	Cf Camera Offset Meant	FLOAT64	pixel	-21.0-21.0
Bf	Bf Camera Offset Mean	FLOAT64	pixel	-21.0-21.0
Af	Af Camera Offset Mean	FLOAT64	pixel	-21.0-21.0
Aa	Aa Camera Offset Mean	FLOAT64	pixel	-21.0-21.0
Ba	Ba Camera Offset Mean	FLOAT64	pixel	-21.0-21.0
Ca	Ca Camera Offset Mean	FLOAT64	pixel	-21.0-21.0
Da	Da Camera Offset Mean	FLOAT64	pixel	-21.0-21.0
Df	Df Camera Offset Standard Deviation	FLOAT64	pixel	0.0-21.0
Cf	Cf Camera Offset Standard Deviation	FLOAT64	pixel	0.0-21.0
Bf	Bf Camera Offset Standard Deviation	FLOAT64	pixel	0.0-21.0
Af	Af Camera Offset Standard Deviation	FLOAT64	pixel	0.0-21.0
Aa	Aa Camera Offset Standard Deviation	FLOAT64	pixel	0.0-21.0
Ba	Ba Camera Offset Standard Deviation	FLOAT64	pixel	0.0-21.0



File Metadata Field Name	Definition	Data Type	Units	Valid Range
Ca	Ca Camera Offset Standard Deviation	FLOAT64	pixel	0.0-21.0
Da	Da Camera Offset Standard Deviation	FLOAT64	pixel	0.0-21.0
Df	Df Block-Half Diff Flag	INT8	N/A	0-1 1 = Ignore Blk 0 = Block OK
Cf	Cf Block-Half Diff Flag	INT8	N/A	0-1 1 = Ignore Blk 0 = Block OK
Bf	Bf Block-Half Diff Flag	INT8	N/A	0-1 1 = Ignore Blk 0 = Block OK
Af	Af Block-Half Diff Flag	INT8	N/A	0-1 1 = Ignore Blk 0 = Block OK
Aa	Aa Block-Half Diff Flag	INT8	N/A	0-1 1 = Ignore Blk 0 = Block OK
Ba	Ba Block-Half Diff Flag	INT8	N/A	0-1 1 = Ignore Blk 0 = Block OK
Ca	Ca Block-Half Diff Flag	INT8	N/A	0-1 1 = Ignore Blk 0 = Block OK
Da	Da Block-Half Diff Flag	INT8	N/A	0-1 1 = Ignore Blk 0 = Block OK



## 7.0 MISR LEVEL 2 TOA/CLOUD PRODUCT

### 7.1 MISR LEVEL 2 TOA/CLOUD PRODUCT GRANULE NAMES

MISR Level 2 TOA/CLOUD Products are composed of the three granules listed below (Table 7-1).

**Table 7-1: MISR Level 2 TOA/CLOUD File Granule Names.**

MISR LEVEL 2 TOA/CLOUD FILE GRANULE NAME	ESDT Name	Section
MISR_AM1_TC_STEREO_Pmmm_Onnnnnn_Fff_vvvv.hdf	MIL2TCST	7.4
MISR_AM1_TC_CLASSIFIERS_Pmmm_Onnnnnn_Fff_vvvv.hdf	MIL2TCCL	7.5
MISR_AM1_TC_ALBEDO_Pmmm_Onnnnnn_Fff_vvvv.hdf	MIL2TCAL	7.6

### 7.2 MISR LEVEL 2 TOA/CLOUD PRODUCT GRANULE BRIEF DESCRIPTIONS

The Top-of-Atmosphere/Cloud Product consists of top-of-atmosphere (TOA) radiation information and cloud information, including Reflecting Level Reference Altitude (RLRA), Stereoscopic and Angular Signature Cloud Masks, Cloud Motion Vectors (winds), Stereo-Matching results, parameters referenced to the RLRA, including bidirectional reflectance factors, view obscuration information, and texture indices, regional scene classifiers, cloud and topographic shadow masks, local (2.2-km resolution) albedos referenced to the RLRA, and coarse resolution (35.2-km) restrictive and expansive albedos.

Bidirectional reflectances of clear and cloudy regions obtained by MISR are used to develop anisotropic reflectance models classified by cloud type, determine the spatial and temporal variability of cloud albedo, and validate coarse spatial resolution angular reflectance models generated by other instruments. Automated stereo matching of multi-angle imagery is used to estimate cloud-top elevations and cloud motion vectors, which are then used in turn to establish the RLRA. Physically, the RLRA corresponds to the main reflecting layer, which is typically the tops of bright clouds, or under atmospheric conditions corresponding to clear skies or thin cloud, it is located at the surface. This information, together with morphological characteristics, is used to provide automated classifications of cloud type. In addition, MISR albedos help to obtain a better understanding of the nonlinear scaling between sub-grid and grid scale processes in general circulation models (GCM's).

### 7.3 MISR LEVEL 2 TOA/CLOUD PRODUCT GRANULE DATA SETS

The product is produced as 3 separate ESDTs, each with one physical file (Table 7-1). Each physical file is in the HDF-EOS Grid “stacked-block” format and contains HDF-EOS Grid datasets, corresponding to parameters at 1.1 km, 2.2 km, 17.6 km, 35.2 km, or 70.4 km spatial resolution. The grid datasets have the usual x and y dimensions, as well as a third dimension corresponding to the

SOM block number. The x and y dimensions correspond to the number of 1.1 km<sup>2</sup>, 2.2 km<sup>2</sup>, 17.6 km<sup>2</sup>, 35.2 km<sup>2</sup>, or 70.4 km<sup>2</sup> regions in the along-track and cross-track directions. For each of the files, the number of blocks in the grid dataset corresponds exactly to the number and location of blocks in the Level 1B2 and Level 2 Aerosol/Surface Product files for the same orbit. Also, the blocks that make up the TOA/Cloud Product files are a direct subset of the blocks that make up the Ancillary Geographic Product.

**Table 7-2: Level 2 TOA/CLOUD Product Files and Grid Datasets.**

<b>ESDT Shortname</b>	<b>Local Granule ID<sup>a</sup></b>	<b>Grid Dataset Name</b>
MIL2TCST	MISR_AM1_TC_STEREO_Pmmm_Onnnnnn_Fff_vvvv.hdf	SubregParams
		RLRAregParams
		DomainParams
MIL2TCCL	MISR_AM1_TC_CLASSIFIERS_Pmmm_Onnnnnn_Fff_vvvv.hdf	ASCMParams_1.1_km
		CloudClassifiers_2.2_km
		CloudFractions_17.6_km
		CloudClassifiers_35.2_km
MIL2TCAL	MISR_AM1_TC_ALBEDO_Pmmm_Onnnnnn_Fff_vvvv.hdf	AlbedoParameters_35.2_km
		GeometricParameters_17.6_km
		ReflectingLevelParameters_2.2_km

a. Where Pmmm corresponds to the orbit path number, Onnnnnn is the absolute orbit number, cc is the camera identifier, ff is the file format version and vvvv is the version number (relating to the reprocessing of a dataset with different software and/or ancillary inputs).

## 7.4 MISR LEVEL 2 MIL2TCST CLOUD STEREO PRODUCT

### 7.4.1 File Metadata Description

**Table 7-3: File Metadata for Cloud Stereo Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version identifier for AGP	INT32	N/A	2
DID_version_id	Version Identifier for DID ( <u>D</u> TED <u>D</u> igital <u>T</u> errain <u>E</u> levation <u>D</u> ataset] <u>I</u> ntermediate <u>D</u> ataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	180 x INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84 ellipsoid (6.3781370E+06)
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84 ellipsoid (6.6943480E-03)
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	1.0
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	1.0
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	1.0
SOM_parameters.som_orbit.nrev	Number of revolutions per ground track repeat cycle	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7.0780408E+06
SOM_parameters.som_orbit.i	Inclination of orbit (degrees)	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	6.8666667E-02

File Metadata Field Name	Definition	Data Type	Units	Valid Range
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0 (degrees)	FLOAT64	radians	-2pi: 2pi
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file was obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-6  0 if data is global mode
Local_mode_site_name	The geographical name of the first local mode site contained in this file.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal

#### 7.4.2 Per-grid Metadata Description

**Table 7-4: Per-grid Metadata for Cloud Stereo Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	1100, 2200, 70400

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	1100, 2200, 70400
Block_size.size_x	Block x dimension	INT32	128, 64, 2
Block_size.size_y	Block y dimension	INT32	512, 256, 8

**7.4.3 Per-block Metadata Description**

**Table 7-5: Per-block Metadata for Cloud Stereo Product Files.**

PerBlockMetadataCommon	Definition	Data Type	Valid Values
Block_number	Current block number	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

Common Per Block Metadata	Definition	Data Type	Valid Values
Geometric DQI	Geometric Data Quality Indicator copied from the L1B2 Terrain-projected parameter file.	INT32	-1 to 1

PerBlockMetadataTime	Definition	Data Type	Valid Values
BlockCenterTime	Imaging time for the block center (AN Camera) in UTC.	CHAR8	

#### 7.4.4 Per-line Metadata Description

None.

#### 7.4.5 Per-pixel Metadata Description

None.

#### 7.4.6 Grid Data Set Descriptions

In order to minimize storage for the TOA/Cloud Product, many logical parameters will be packed so that each bit represents a logical value, or some number of bits within a byte or word represent a flag value.

To facilitate the interpretation of scientific data, floating point values are not scaled. Floating point values, and some integer values, may take on a flag value indicating invalid data. Currently, there is only a single flag value of -9999.0, representing missing floating point data. Missing integer data may be represented either by a value of 0 (for flag data) or -9999 (for measured data) or -99 (for measured byte integer data). Note that we may later add more flag values to distinguish the reason that the data are missing (e.g., never computed, arithmetic error, overflow, etc.).

**Table 7-6: Cloud Stereo Product Field Dimension Descriptions.**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	this can vary, with a typical value being approximately 140
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	128 for 1.1 km parameters 64 for 2.2 km parameters 8 for 17.6 km parameters 4 for 35.2 km parameters 2 for 70.4 km parameters



**Table 7-6: Cloud Stereo Product Field Dimension Descriptions.**

Dimension	Description	Valid Values
YDim	YDim is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	512 for 1.1 km parameters 256 for 2.2 km parameters 32 for 17.6 km parameters 16 for 35.2 km parameters 8 for 70.4 km parameters
NCamDim	NCamDim distinguishes the individual nine cameras	1-9. DF=1, CF=2, BF=3, AF=4, AN=5, AA=6, BA=7, CA=8, DA=9
NBandDim	NBandDim distinguishes the individual four camera bands	1-4. Blue=1, Green=2, Red=3, NIR=4.
WindDim	Number of individual cloud-motion (wind) vectors being calculated.	1-2. LowCloudBin = 1, HighCloudBin = 2.
EWHistogramDim	Number of bins in East-West direction of wind histogram	1-37
NSHistogramDim	Number of bins in North-South direction of wind histogram	1-37
WindYDisparityDim	Number of bins in the across-track (sample) Stereo Disparity Histograms that are part of the Wind-QA.	1-303
WindXDisparityDim	Number of bins in the along-track (line) Stereo Disparity Histograms that are part of the Wind-QA.	1-303

**Table 7-7: Cloud Stereo Product Grid Dataset Descriptions.**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>SubregParams (Spatial Resolution: 1.1 km x 1.1 km, XDim = 128, YDim = 512)</b>					
<b>StereoHeight_BestWinds</b> Stereoscopic height determined using the Best Quality Winds only, containing fill when a suitable wind was not available. (Feature-referenced).	XDim,YDim	INT16	m	None	No data=-9999
<b>SDCM_BestWinds</b> Stereoscopically-Derived Cloud Mask derived using the StereoHeight_BestWinds. Contains fill when a suitable wind was not available. (Feature-referenced).	XDim,YDim	UINT8	None	None	No Retrieval=0; CloudHC=1; CloudLC=2; NearSurfaceLC=3; NearSurfaceHC=4
<b>StereoHeight_WithoutWinds</b> Stereoscopic height calculated without a wind correction. (Feature-referenced).	XDim,YDim	INT16	m	None	No data=-9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>SDCM_WithoutWinds</b> Stereoscopically-Derived Cloud Mask derived using the StereoHeight_WithoutWinds. (Feature-referenced).	XDim,YDim	UINT8	None	None	No Retrieval=0; CloudHC=1; CloudLC=2; NearSurfaceLC=3; NearSurfaceHC=4
<b>FRRCCM_BestWinds</b> Feature-referenced Radiometric Camera-by-camera Cloud Mask that used the StereoHeight_BestWinds for the projection. Contains fill when a suitable wind not available.	XDim,YDim	UINT8	None	None	No Retrieval=0; CloudHC=1; CloudLC=2; ClearLC=3; ClearHC=4
<b>FRRCCM_WithoutWinds</b> Feature-referenced Radiometric Camera-by-camera Cloud Mask that used the StereoHeight_WithoutWinds for the projection.	XDim,YDim	UINT8	None	None	No Retrieval=0; CloudHC=1; CloudLC=2; ClearLC=3; ClearHC=4
<b>StereoHeightSource_BestWinds</b> Stereoscopic height source flag for the BestWinds field. (Feature-referenced).	XDim,YDim	UINT8	None	None	No Retrieval=0; Preliminary Stereo=1; Surface=2; Default Cloud=3; MODIS=4
<b>StereoOverrideFlag_BestWinds</b> Stereoscopic override flag used in establishing reason for any stereo height overrides in the BestWinds field. (Feature-referenced).	XDim,YDim	UINT8	None	None	No Retrieval = 0 Keep Stereo=1; Above Max=2; Below Surface=3; RCCM Override=4
<b>HeightComparisonCameraUsed_BestWinds</b> Identifier of the camera used in retrieving the StereoHeight_BestWinds (ellipsoid referenced)	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>StereoHeightSource_WithoutWinds</b> Stereoscopic height source flag for the WithoutWinds field. (Feature-referenced).	XDim,YDim	UINT8	None	None	No Retrieval=0; Preliminary Stereo=1; Surface=2; Default Cloud=3; MODIS=4
<b>StereoOverrideFlag_WithoutWinds</b> Stereoscopic override flag used in establishing reason for any stereo height overrides in the WithoutWinds field. (Feature-referenced).	XDim,YDim	UINT8	None	None	No Retrieval=0; Keep Stereo=1; Above Max=2; Below Surface=3; RCCM Override=4

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>HeightComparisonCameraUsed_WithoutWinds</b> Identifier of the camera used in retrieving the StereoHeight_WithoutWinds (ellipsoid referenced)	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>PrelimFRStereoHeight_BestWinds</b> Preliminary stereoscopic height derived using the Best Quality Winds only. Contains fill when no suitable wind available. (feature-referenced). Stereoscopically derived heights only - no inputs from RCCM or AGP.	XDim,YDim	INT16	m	None	No data=-9999
<b>PrelimERStereoHeight_BestWinds</b> Preliminary stereoscopic height derived using the Best Quality Winds only. Contains fill when no suitable wind available. (ellipsoid-referenced). Stereoscopically derived heights only - no inputs from RCCM or AGP.	XDim,YDim	INT16	m	None	No data=-9999
<b>PrelimSDCM_BestWinds</b> Preliminary Stereoscopically-Derived Cloud Mask derived using the BestWinds heights. Contains fill when no suitable wind available. (stereoscopically derived inputs only - no inputs used from Radiometric Camera-by-camera Cloud Mask or AGP). feature-referenced.	XDim,YDim	UINT8	None	None	No Retrieval=0; CloudHC=1; CloudLC=2; NearSurfaceLC=3; NearSurfaceHC=4
<b>PrelimFRStereoHeight_WithoutWinds</b> Preliminary stereoscopic height derived without correcting for the cloud motion. (feature-referenced). Stereoscopically derived heights only - no inputs from RCCM or AGP.	XDim,YDim	INT16	m	None	No data=-9999
<b>PrelimERStereoHeight_WithoutWinds</b> Preliminary stereoscopic height derived without correcting for the cloud motion. (ellipsoid-referenced). Stereoscopically derived heights only - no inputs from RCCM or AGP.	XDim,YDim	INT16	m	None	No data=-9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>PrelimSDCM_WithoutWinds</b> Preliminary Stereoscopically-Derived Cloud Mask derived using the WithoutWinds heights. (stereoscopically derived inputs only - no inputs used from Radiometric Camera-by-camera Cloud Mask or AGP). feature-referenced.	XDim,YDim	UINT8	None	None	No Retrieval=0; CloudHC=1; CloudLC=2; NearSurfaceLC=3; NearSurfaceHC=4
<b>PrelimERStereoHeight_RawWinds</b> Preliminary stereoscopic height calculated using all available wind vectors (regardless of their quality) and defaulting back to a zero-wind vector otherwise. (ellipsoid-referenced). Stereoscopically derived heights only - no inputs from RCCM or AGP.	XDim,YDim	INT16	m	None	No data=-9999
<b>CloudMotionBin_RawWinds</b> Wind bin chosen (high, low, overlap) in the calculation of the RawWinds height field. (ellipsoid-referenced).	XDim,YDim	UINT8	None	None	No Retrieval=0; Low cloud bin=1; High cloud bin=2; Overlap=3
<b>MetricValue_RawWinds</b> M2 or M3 metric value corresponding to the PrelimERStereoHeight_RawWinds retrieval (ellipsoid-referenced)..	XDim,YDim	FLOAT32	None	None	No data=-9999.0
<b>XDisparity_RawWinds</b> Retrieved Along-track Disparity from Height Comparison Camera used in deriving the PrelimERStereoHeight_RawWinds. May jump between forward and aft comparison cameras within the same block (appearing discontinuous). (ellipsoid-referenced).	XDim,YDim	INT16	Pixels	None	No data=-9999
<b>YDisparity_RawWinds</b> Retrieved Cross-track Disparity from Height Comparison Camera used in deriving the PrelimERStereoHeight_RawWinds. May jump between forward and aft comparison cameras within the same block (appearing discontinuous). (ellipsoid-referenced)	XDim,YDim	INT16	Pixels	None	No data=-9999
<b>MatcherMethod_RawWinds</b> Stereoscopic matcher used in deriving the PrelimERStereoHeight_RawWinds. (ellipsoid-referenced).	XDim,YDim	UINT8	None	None	No Retrieval=0; M2=1; M3=2; RS=3; M2 & M3=4

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>MatchSubtype_RawWinds</b> Stereoscopic match subtype used in deriving the PrelimERStereoHeight_RawWinds. (ellipsoid-referenced)	XDim,YDim	UINT8	None	None	No Retrieval=0; Previous Match Method=1; Pyramid Method=2
<b>FRSnowIceMask_BestWinds</b> Feature-referenced snow/ice mask that used the BestWinds heights for projection. Contains no_snow_ice when no suitable wind available. (feature-referenced).	XDim,YDim	UINT8	None	None	0=not snow/ice covered 1=snow/ice covered
<b>FRSnowIceSource_BestWinds</b> The data source for the FRSnowIceMask_BestWinds.	XDim,YDim	UINT8	None	None	No Retrieval=0; TASC: other not available=1; TASC: other out-of-bounds=2, DAO:other not available=3; DAO:other out-of-bounds=4; NSIDC:other not available=5; NSIDC:other out-of-bounds=6; MODIS=7
<b>FRSnowIceMask_WithoutWinds</b> Feature-referenced snow/ice mask that used the WithoutWinds heights for projection. (feature-referenced).	XDim,YDim	UINT8	None	None	0=not snow/ice covered 1=snow/ice covered
<b>FRSnowIceSource_WithoutWinds</b> The data source for the FRSnowIceMask_WithoutWinds.	XDim,YDim	UINT8	None	None	No Retrieval=0; TASC: other not available=1; TASC: other out-of-bounds=2, DAO:other not available=3; DAO:other out-of-bounds=4; NSIDC:other not available=5; NSIDC:other out-of-bounds=6; MODIS=7
<b>TRSnowIceMask</b> Terrain-referenced snow/ice mask	XDim,YDim	UINT8	None	None	0=not snow/ice covered 1=snow/ice covered

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>TRSnowIceSource</b> Terrain-referenced snow/ice mask and external data source	XDim,YDim	UINT8	None	None	No Retrieval=0; TASC:other not available=1; TASC:other out-of- bounds=2, DAO:other not available=3; DAO:other out-of- bounds=4; NSIDC:other not available=5; NSIDC:other out- of-bounds=6; MODIS=7;
<b>RLRAregParams (Spatial Resolution: 2.2 km x 2.2 km, XDim = 64, YDim = 256)</b>					
<b>RLRA_WithoutWinds</b> Reflecting Level Reference Altitude derived from the StereoHeight_ WithoutWinds data.	XDim,YDim	INT16	m	None	No data=-9999
<b>MinStereoHt_WithoutWinds</b> Minimum value of the WithoutWinds stereo-scopically retrieved heights that contributed to this particular RLRA.	XDim,YDim	INT16	m	None	No data = -9999
<b>MaxStereoHt_WithoutWinds</b> Maximum value of the WithoutWinds stereoscopically retrieved heights that contributed to this particular RLRA.	XDim,YDim	INT16	m	None	No data = -9999
<b>RLRAStDev_WithoutWinds</b> RLRA standard deviation calculated from stereoscopically derived heights and surface over-rides.	XDim,YDim	INT16	m	None	No data=-9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>DomainParams (Spatial Resolution: 70.4 km x 70.4 km, XDim = 2, YDim = 8)</b>					
<b>CloudMotionSource</b> Motion vector source flag	XDim,YDim	UINT8	None	None	Default motion vector used (stereo matching not attempted)=0; Wind Retrieval failed due to poor registration = 1; Default motion vector used (stereo matching failed)=2; LowCloud Wind Retrieval (stereo matching successful)=3; HighCloudWind Retrieval (stereo matching successful) = 4; LowCloudWind and HighCloudWind retrievals (stereo matching successful) = 5; No data = 253
<b>NSCloudMotionSpeedLowCloud Bin</b> North-South motion vector speed from low-cloud bin	XDim,YDim	FLOAT32	m/s	None	No data=-9999.0
<b>EWCloudMotionSpeedLowCloud Bin</b> East-West motion vector speed from low-cloud bin	XDim,YDim	FLOAT32	m/s	None	No data=-9999.0
<b>NSCloudMotionSpeedHighCloud Bin</b> North-South motion vector speed from high-cloud bin	XDim,YDim	FLOAT32	m/s	None	No data=-9999.0
<b>EWCloudMotionSpeedHighCloud Bin</b> East-West motion vector speed from high-cloud bin	XDim,YDim	FLOAT32	m/s	None	No data=-9999.0
<b>MedianHeightLowCloudBin</b> Median height of all those triplets contributing to the low-cloud motion vector.	XDim,YDim	FLOAT32	m	None	No data = -9999.0

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>MedianHeightHighCloudBin</b> Median height of all those triplets contributing to the high-cloud motion vector.	XDim,YDim	FLOAT32	m	None	No data = -9999.0
<b>LoHiCloudBinHeightSeparator</b> Height separating High Cloud and Low Cloud motion vector bins	XDim,YDim	FLOAT32	m	None	No data=-9999.0
<b>WindQualityFlagLowCloudBin</b> The overall quality of the LowCloud Wind.	XDim,YDim	UINT8	None	None	0 = No Retrieval, 1 = Poor, 2= Unknown, 3= Good, 4 = VeryGood.
<b>WindQualityFlagHighCloudBin</b> The overall quality of the LowCloud Wind.	XDim,YDim	UINT8	None	None	0 = No Retrieval, 1 = Poor, 2= Unknown, 3= Good, 4 = VeryGood.
<b>WindDisparitySummaryFlag LowCloudBin</b> The quality of the LowCloud wind based on the disparities retrieved from the stereo-matcher.	XDim,YDim	UINT8	None	None	0 = No Retrieval, 1 = Poor, 2= Unknown, 3= Good, 4 = VeryGood.
<b>WindDisparitySummaryFlag HighCloudBin</b> The quality of the HighCloud wind based on the disparities retrieved from the stereo-matcher.	XDim,YDim	UINT8	None	None	0 = No Retrieval, 1 = Poor, 2= Unknown, 3= Good, 4 = VeryGood.
<b>AlongMisregistrationErrorDf</b> Misregistration error of the Df camera in the along-track direction. -N indicates camera is shifted N pixels in the upward direction, +N indicates camera shifted N pixels downward.	XDim,YDim	INT32	275-m pixels	None	No data = -9999
<b>CrossMisregistrationErrorDf</b> Misregistration error of the Df camera in the cross-track direction. -N indicates camera is shifted N pixels to the left, +N indicates camera shifted N pixels to the right.	XDim,YDim	INT32	275-m pixels	None	No data = -9999
<b>AlongMisregistrationErrorDa</b> Misregistration error of the Da camera in the cross-track direction.	XDim,YDim	INT32	275-m pixels	None	No data = -9999
<b>CrossMisregistrationErrorDa</b> Misregistration error of the Da camera in the cross-track direction.	XDim,YDim	INT32	275-m pixels	None	No data = -9999



Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>CloudMotionSpeedHistogram</b> motion vector speed histogram (37 X 37 bins)	XDim,YDim, EWHistogram Dim, NSHistogram Dim	37 X 37 X INT32	m/s	None	No data=0
<b>HistogramMedianHt</b> Median heights associated with motion vector histogram (37 X 37 bins)	XDim,YDim, EWHistogram Dim, NSHistogram Dim	37 X 37 X FLOAT32	m	None	No data=0
<b>HistogramHtStDev</b> Standard deviation of heights associated with motion vector histogram (37 X 37 bins)	XDim,YDim, EWHistogram Dim, NSHistogram Dim	37 X 37 X FLOAT32	m	None	No data=0
<b>LoBndCloudMotionSpeed</b> Lower bound of motion vector speed histogram	XDim,YDim	FLOAT32	m/s	None	No data=-9999.0
<b>HiBndCloudMotionSpeed</b> Upper bound of motion vector speed histogram	XDim,YDim	FLOAT32	m/s	None	No data=-9999.0
<b>NBinsCloudMotionSpeedNS</b> Number of bins in motion vector speed histogram, North-South direction	XDim,YDim	INT16	None	None	No data=-9999
<b>NBinsCloudMotionSpeedEW</b> Number of bins in motion vector speed histogram, East-West direction	XDim,YDim	INT16	None	None	No data=-9999
<b>HeightRefCam</b> Height retrieval reference camera	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>HeightCompCamMostFwdScatt</b> Height retrieval comparison camera that is the most-forward scattering of the two Height Retrieval Comparison Cameras.	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>HeightCompCamLeastFwdScatt</b> Height retrieval comparison camera that is the least-forward scattering.	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>AvgScatAngMostFwd</b> Average scattering angle for the most forward-scattering comparison camera	XDim,YDim	FLOAT32	deg	None	No data=-9999.0 or -8888 (block not processed)

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>AvgScatAngLeastFwd</b> Average scattering angle for the least forward-scattering comparison camera	XDim,YDim	FLOAT32	deg	None	No data=-9999.0 or -8888 (block not processed)
<b>CloudMotionRefCam</b> Wind retrieval reference camera	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>CloudMotionInterCamFwd</b> Forward wind retrieval intermediate camera	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>CloudMotionCompCamFwd</b> Forward wind retrieval comparison camera	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>CloudMotionInterCamAft</b> Aftward wind retrieval intermediate camera	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>CloudMotionCompCamAft</b> Aftward wind retrieval comparison camera	XDim,YDim	UINT8	None	None	No Retrieval=0; Df=1; Cf=2; Bf=3; Af=4; An=5; Aa=6; Ba=7; Ca=8; Da=9
<b>PeakWidthBfAnCrossDisparity</b> Width of the two largest peaks in the Bf-An cross-track disparity distribution (in 275m pixels) that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakWidthBfAnAlongDisparity</b> Width of the two largest peaks in the Bf-An along-track disparity distribution (in 275m pixels) that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakWidthBfDfCrossDisparity</b> Width of the two largest peaks in the Bf-Df cross-track disparity distribution (in 275m pixels) that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>PeakWidthBfDfAlongDisparity</b> Width of the two largest peaks in the Bf-Df along-track disparity distribution (in 275m pixels) that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakWidthBaAnCrossDisparity</b> Width of the two largest peaks in the Ba-An cross-track disparity distribution (in 275m pixels) that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakWidthBaAnAlongDisparity</b> Width of the two largest peaks in the Ba-An along-track disparity distribution (in 275m pixels) that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakWidthBaDaCrossDisparity</b> Width of the two largest peaks in the Ba-Da cross-track disparity distribution (in 275m pixels) that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakWidthBaDaAlongDisparity</b> Width of the two largest peaks in the Ba-Da along-track disparity distribution (in 275m pixels) that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakCountsBfAnCrossDisparity</b> Number of counts in the two largest peaks in the Bf-An cross-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakCountsBfAnAlongDisparity</b> Number of counts in the two largest peaks in the Bf-An along-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakCountsBfDfCrossDisparity</b> Number of counts in the two largest peaks in the Bf-Df cross-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>PeakCountsBfDfAlongDisparity</b> Number of counts in the two largest peaks in the Bf-Df along-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakCountsBaAnCrossDisparity</b> Number of counts in the two largest peaks in the Ba-An cross-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakCountsBaAnAlongDisparity</b> Number of counts in the two largest peaks in the Ba-An along-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakCountsBaDaCrossDisparity</b> Number of counts in the two largest peaks in the Ba-Da cross-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakCountsBaDaAlongDisparity</b> Number of counts in the two largest peaks in the Ba-Da along-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>NumSimilarPeaksBfAnCross_Disparity</b> Number of peaks present in the Bf-An cross-track wind-disparity histogram that have a similar number of counts to the most and next-most populated peaks. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>NumSimilarPeaksBfAnAlong_Disparity</b> Number of peaks present in the Bf-An along-track wind-disparity histogram that have a similar number of counts to the most and next-most populated peaks. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumSimilarPeaksBfDfCross_ Disparity</b> Number of peaks present in the Bf-Df cross-track wind-disparity histogram that have a similar number of counts to the most and next-most populated peaks. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>NumSimilarPeaksBfDfAlong_ Disparity</b> Number of peaks present in the Bf-Df along-track wind-disparity histogram that have a similar number of counts to the most and next-most populated peaks. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>NumSimilarPeaksBaAnCross_ Disparity</b> Number of peaks present in the Ba-An cross-track wind-disparity histogram that have a similar number of counts to the most and next-most populated peaks. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>NumSimilarPeaksBaAnAlong_ Disparity</b> Number of peaks present in the Ba-An along-track wind-disparity histogram that have a similar number of counts to the most and next-most populated peaks. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>NumSimilarPeaksBaDaCross_ Disparity</b> Number of peaks present in the Ba-Da cross-track wind-disparity histogram that have a similar number of counts to the most and next-most populated peaks. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>NumSimilarPeaksBaDaAlong_ Disparity</b> Number of peaks present in the Ba-Da along-track wind-disparity histogram that have a similar number of counts to the most and next-most populated peaks. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>PeakLocationBfAnCrossDisparity</b> Location of the two largest peaks in the Bf-An cross-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakLocationBfAnAlongDisparity</b> Location of the two largest peaks in the Bf-An along-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakLocationBfDfCrossDisparity</b> Location of the two largest peaks in the Bf-Df cross-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakLocationBfDfAlongDisparity</b> Location of the two largest peaks in the Bf-Df along-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakLocationBaAnCrossDisparity</b> Location of the two largest peaks in the Ba-An cross-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakLocationBaAnAlongDisparity</b> Location of the two largest peaks in the Ba-An along-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakLocationBaDaCrossDisparity</b> Location of the two largest peaks in the Ba-Da cross-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999
<b>PeakLocationBaDaAlongDisparity</b> Location of the two largest peaks in the Ba-Da along-track disparity distribution that correspond to the low and high cloud winds. Used in the wind-retrieval qa.	XDim,YDim, WindDim	INT32	None	None	No data = -9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>HistogramBfAnCrossDisparity</b> Histogram distribution of the Bf-An cross-track disparities. Used in the wind-retrieval qa.	XDim,YDim, WindYDispar- ityDim	INT16	None	None	No data = 0
<b>HistogramBfAnAlongDisparity</b> Histogram distribution of the Bf-An along-track disparities. Used in the wind-retrieval qa.	XDim,YDim, WindXDispar- ityDim	INT16	None	None	No data = 0
<b>HistogramBfDfCrossDisparity</b> Histogram distribution of the Bf-Df cross-track disparities. Used in the wind-retrieval qa.	XDim,YDim, WindYDispar- ityDim	INT16	None	None	No data = 0
<b>HistogramBfDfAlongDisparity</b> Histogram distribution of the Bf-Df along-track disparities. Used in the wind-retrieval qa.	XDim,YDim, WindXDispar- ityDim	INT16	None	None	No data = 0
<b>HistogramBaAnCrossDisparity</b> Histogram distribution of the Ba-An cross-track disparities. Used in the wind-retrieval qa.	XDim,YDim, WindYDispar- ityDim	INT16	None	None	No data = 0
<b>HistogramBaAnAlongDisparity</b> Histogram distribution of the Ba-An along-track disparities. Used in the wind-retrieval qa.	XDim,YDim, WindXDispar- ityDim	INT16	None	None	No data = 0
<b>HistogramBaDaCrossDisparity</b> Histogram distribution of the Ba-Da cross-track disparities. Used in the wind-retrieval qa.	XDim,YDim, WindYDispar- ityDim	INT16	None	None	No data = 0
<b>HistogramBaDaAlongDisparity</b> Histogram distribution of the Ba-Da along-track disparities. Used in the wind-retrieval qa.	XDim,YDim, WindXDispar- ityDim	INT16	None	None	No data = 0
<b>WindDisparityHistogramCross_ LowerBounds</b> Lower bound (in 275m pixels) of the cross-track disparity distributions.	XDim,YDim	INT16	None	None	No data = -9999
<b>WindDisparityHistogramCross_ UpperBounds</b> Upper bound (in 275m pixels) of the cross-track disparity distributions.	XDim,YDim	INT16	None	None	No data = -9999
<b>WindDisparityHistogramAlong_ LowerBounds</b> Lower bound (in 275m pixels) of the along-track disparity distributions.	XDim,YDim	INT16	None	None	No data = -9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>WindDisparityHistogramAlongUpperBounds</b> Upper bound (in 275m pixels) of the along-track disparity distributions.	XDim,YDim	INT16	None	None	No data = -9999
<b>NumCloudMotionTripletsMatcher</b> Total number of matches found by NM/M2 in the wind-retrieval process.	XDim,YDim	INT32	None	None	No data=-9999
<b>NumCloudMotionTripletsMatcherFwd</b> Total number of matches found by NM/M2 for the forward triplets of cameras in the wind-retrieval process	XDim,YDim	INT32	None	None	No data = -9999
<b>NumCloudMotionTripletsMatcherAft</b> Total number of matches found by NM/M2 for the Aft triplets of cameras in the wind-retrieval process	XDim,YDim	INT32	None	None	No data = -9999
<b>NumCloudMotionTripletsDomainCut</b> Number of triplets surviving the cut on the AN camera position.	XDim,YDim	INT32	None	None	No data = -9999
<b>NumCloudMotionTripletsIntoHist</b> Number of triplets that are actually put into the wind histogram for subsequent analysis after surviving both the domain and height cuts.	XDim,YDim	INT32	None	None	No data = -9999
<b>NumCloudMotionMatchesLow-Cloud</b> Number of counts in the low-cloud wind histogram bin.	XDim,YDim	INT32	None	None	No data = -9999
<b>NumCloudMotionMatchesHigh-Cloud</b> Number of counts in the high-cloud wind histogram bin.	XDim,YDim	INT32	None	None	No data = -9999
<b>SumCloudMotionMatchesLow-Cloud</b> Total number of counts in all bins contributing to the low-cloud motion vector.	XDim,YDim	INT32	None	None	No data = -9999
<b>SumCloudMotionMatchesHigh-Cloud</b> Total number of counts contributing to the high-cloud motion vector.	XDim,YDim	INT32	None	None	No data = -9999
<b>NumCloudMotionBinsLowCloud</b> Number of bins contributing to the low-cloud motion vector.	XDim,YDim	INT32	None	None	No data = -9999



Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumCloudMotionBinsHighCloud</b> Number of bins contributing to the high-cloud motion vector.	XDim,YDim	INT32	None	None	No data = -9999
<b>NumM23Prev</b> Number of disparities assigned using M2 and verified by M3 using previous match method	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2Prev</b> Number of disparities assigned using M2 and not verified by M3 using previous match method	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3Prev</b> Number of disparities assigned using M3 using previous match method	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23Pyr</b> Number of disparities assigned using M2 and verified by M3 using pyramid method	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2Pyr</b> Number of disparities assigned using M2 and not verified by M3 using pyramid method	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3Pyr</b> Number of disparities assigned using M3 using pyramid method	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumRS</b> Number of disparities assigned using RS	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumDisparitiesPrevMostFwd</b> Number of disparities assigned using previous match method and choosing most fwd-scattering camera pair	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumDisparitiesPrevLeastFwd</b> Number of disparities assigned using previous match method and choosing least fwd-scattering camera pair	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumDisparitiesPyrMostFwd</b> Number of disparities assigned using pyramid method and choosing most fwd-scattering camera pair	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumDisparitiesPyrLeastFwd</b> Number of disparities assigned using pyramid method and choosing least fwd-scattering camera pair	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumDisparitiesPrev</b> Number of disparities assigned using previous match method	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumDisparitiesPyr</b> Number of disparities assigned using pyramid method	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewHCPrevMostFwd</b> Number of disparities determined using M2 confirmed by M3, and having HC ray skewness (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewLCPrevMostFwd</b> Number of disparities determined using M2 confirmed by M3, and having LC ray skewness (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewBlunderPrevMostFwd</b> Number of disparities determined using M2 confirmed by M3, and having ray skewness blunder (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewHCPrevLeastFwd</b> Number of disparities determined using M2 confirmed by M3, and having HC ray skewness (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewLCPrevLeastFwd</b> Number of disparities determined using M2 confirmed by M3, and having LC ray skewness (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewBlunderPrevLeastFwd</b> Number of disparities determined using M2 confirmed by M3, and having ray skewness blunder (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumM23SkewHCPyrMostFwd</b> Number of disparities determined using M2 confirmed by M3, and having HC ray skewness (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewLCPyrMostFwd</b> Number of disparities determined using M2 confirmed by M3, and having LC ray skewness (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewBlunderPyrMostFwd</b> Number of disparities determined using M2 confirmed by M3, and having ray skewness blunder (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewHCPyrLeastFwd</b> Number of disparities determined using M2 confirmed by M3, and having HC ray skewness (pyramid method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewLCPyrLeastFwd</b> Number of disparities determined using M2 confirmed by M3, and having LC ray skewness (pyramid method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM23SkewBlunderPyrLeast_Fwd</b> Number of disparities determined using M2 confirmed by M3, and having ray skewness blunder (pyramid method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewHCPrevMostFwd</b> Number of disparities determined using M2 not confirmed by M3, and having HC ray skewness (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumM2SkewLCPrevMostFwd</b> Number of disparities determined using M2 not confirmed by M3, and having LC ray skewness (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewBlunderPrevMostFwd</b> Number of disparities determined using M2 not confirmed by M3, and having ray skewness blunder (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewHCPrevLeastFwd</b> Number of disparities determined using M2 and having HC ray skewness (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewLCPrevLeastFwd</b> Number of disparities determined using M2 and having LC ray skewness (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewBlunderPrevLeast Fwd</b> Number of disparities determined using M2 and having ray skewness blunder (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewHCPyrMostFwd</b> Number of disparities determined using M2 not confirmed by M3, and having HC ray skewness (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewLCPyrMostFwd</b> Number of disparities determined using M2 not confirmed by M3, and having LC ray skewness (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewBlunderPyrMostFwd</b> Number of disparities determined using M2 not confirmed by M3, and having ray skewness blunder (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumM2SkewHCPyrLeastFwd</b> Number of disparities determined using M2 and having HC ray skewness (pyramid method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewLCPyrLeastFwd</b> Number of disparities determined using M2 and having LC ray skewness (pyramid method, east fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM2SkewBlunderPyrLeastFwd</b> Number of disparities determined using M2 and having ray skewness blunder pyramid method, (least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewHCPrevMostFwd</b> Number of disparities determined using M3 and having HC ray skewness (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewLCPrevMostFwd</b> Number of disparities determined using M3 and having LC ray skewness (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewBlunderPrevMostFwd</b> Number of disparities determined using M3 and having ray skewness blunder (previous match method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewHCPrevLeastFwd</b> Number of disparities determined using M3 and having HC ray skewness (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewLCPrevLeastFwd</b> Number of disparities determined using M3 and having LC ray skewness (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewBlunderPrevLeast_Fwd</b> Number of disparities determined using M3 and having ray skewness blunder (previous match method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumM3SkewHCPyrMostFwd</b> Number of disparities determined using M3 and having HC ray skewness (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewLCPyrMostFwd</b> Number of disparities determined using M3 and having LC ray skewness (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewBlunderPyrMostFwd</b> Number of disparities determined using M3 and having ray skewness blunder (pyramid method, most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewHCPyrLeastFwd</b> Number of disparities determined using M3 and having HC ray skewness (pyramid method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewLCPyrLeastFwd</b> Number of disparities determined using M3 and having LC ray skewness (pyramid method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumM3SkewBlunderPyrLeastFwd</b> Number of disparities determined using M3 and having ray skewness blunder (pyramid method, least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumRSSkewHCMostFwd</b> Number of disparities determined using RS and having HC ray skewness (most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumRSSkewLCMostFwd</b> Number of disparities determined using RS and having LC ray skewness (most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumRSSkewBlunderMostFwd</b> Number of disparities determined using RS and having ray skewness blunder (most fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumRSSkewHCLeastFwd</b> Number of disparities determined using RS and having HC ray skewness (least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumRSSkewLCLeastFwd</b> Number of disparities determined using RS and having LC ray skewness (least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumRSSkewBlunderLeastFwd</b> Number of disparities determined using RS and having ray skewness blunder (least fwd-scattering camera pair)	XDim,YDim	INT32	None	None	No data=-9999 or -8888 (block not processed)

## 7.4.7 Per-grid QA Metadata

Table 7-8: Per-grid QA Metadata for Cloud Stereo Products.

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>SwathQaGlobal: Swath-level Constructs</b>			
NNonFillDomains	INT32	--	0 - 2272
NSuccMotionVectorDomains	INT32	--	0 - 2272
NDisparitiesMostFwdScat	INT32	--	0 - 9,306,112
NDisparitiesLeastFwdScat	INT32	--	0 - 9,306,112
NM23Disparities	INT32	--	0 - 9,306,112
NM2Disparities	INT32	--	0 - 9,306,112
NM3Disparities	INT32	--	0 - 9,306,112
NRSDisparities	INT32	--	0 - 9,306,112
NNoRetrievalDisparities	INT32	--	0 - 9,306,112
NNonFillSubregions	INT32	--	0 - 9,306,112
NMODISFRSnowIce	INT32	--	0 - 9,306,112
NNSIDCFRSnowIceMODISOutOfBds	INT32	--	0 - 9,306,112
NNSIDCFRSnowIceMODISNA	INT32	--	0 - 9,306,112
NDAOFRSnowIceNSIDCOutOfBds	INT32	--	0 - 9,306,112
NDAOFRSnowIceNSIDCNA	INT32	--	0 - 9,306,112
NTASCFRSnowIceDAOOutOfBds	INT32	--	0 - 9,306,112
NTASCFRSnowIceDAONA	INT32	--	0 - 9,306,112
NNonFillSubWGoodMODISCIIdMask	INT32	--	0 - 9,306,112
NNonFillSubWBadMODISCIIdMask	INT32	--	0 - 9,306,112
NNonFillSubWNA MODISCIIdMask	INT32	--	0 - 9,306,112
NNonFillSubWGoodMODISCIIdHt	INT32	--	0 - 9,306,112
NNonFillSubWBadMODISCIIdHt	INT32	--	0 - 9,306,112
NNonFillSubWNA MODISCIIdHt	INT32	--	0 - 9,306,112
NNonFillSubSolarOblique	INT32	--	0 - 9,306,112
<b>BlockQaGlobal: Block-level Constructs</b>			
BlockNumber	INT32	--	1 - 180
ValidRecord	UINT8	--	0, 1



Data Field Name	Data Type	Field Dimensions	Valid Range
TpGeomDataQualInd	FLOAT64	NCAM	-1 - 1
NSubLowMotionVectorBin	INT32	--	0 - 65,536
NSubHighMotionVectorBin	INT32	--	0 - 65,536
NSubOverlapMotionVectorBin	INT32	--	0 - 65,536
NSubNoRetrMotionVectorBin	INT32	--	0 - 65,536
NTRSubSnowIce	INT32	--	0 - 65,536
NFRSubSnowIce	INT32	--	0 - 65,536
NM23MostFwdScat	INT32	--	0 - 65,536
NM23LeastFwdScat	INT32	--	0 - 65,536
NM2MostFwdScat	INT32	--	0 - 65,536
NM2LeastFwdScat	INT32	--	0 - 65,536
NM3MostFwdScat	INT32	--	0 - 65,536
NM3LeastFwdScat	INT32	--	0 - 65,536
NRSMostFwdScat	INT32	--	0 - 65,536
NRSLeastFwdScat	INT32	--	0 - 65,536
NSubStereoHtOverridWSurf	INT32	--	0 - 65,536
NSubStereoHtOverridWDef	INT32	--	0 - 65,536
NSubStereoHtFromMODIS	INT32	--	0 - 65,536
NSubStereoHtNR	INT32	--	0 - 65,536
NDefaultRLRA	INT32	--	0 - 16,384
NNoRetrievalRLRA	INT32	--	0 - 16,384
MeanRLRA	FLOAT32	--	0.0 - 20,000 m

## 7.5 MISR LEVEL 2 MIL2TCCL CLOUD CLASSIFIER PRODUCT

### 7.5.1 File Metadata Description

**Table 7-9: File Metadata for Cloud Classifier Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version identifier for AGP	INT32	N/A	2
DID_version_id	Version Identifier for DID (DTED Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	180 x INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84 ellipsoid (6.3781370E+06)
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84 ellipsoid (6.6943480E-03)
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	1.0
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	1.0
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	1.0
SOM_parameters.som_orbit.nrev	Number of revolutions per ground track repeat cycle	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7.0780408E+06
SOM_parameters.som_orbit.i	Inclination of orbit (degrees)	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	6.8666667E-02

File Metadata Field Name	Definition	Data Type	Units	Valid Range
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0 (degrees)	FLOAT64	radians	-2pi : 2pi
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file was obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-6  0 if data is global mode
Local_mode_site_name	The geographical name of the first local mode site contained in this file.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal

### 7.5.2 Per-grid Metadata Description

**Table 7-10: Per-grid Metadata for Cloud Classifier Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	1100, 17600

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	1100, 17600
Block_size.size_x	Block x dimension	INT32	128, 8
Block_size.size_y	Block y dimension	INT32	512, 32

### 7.5.3 Per-block Metadata Description

**Table 7-11: Per-block Metadata for Cloud Classifier Product Files.**

PerBlockMetadataCommon	Definition	Data Type	Valid Values
Block_number	Current block number	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

Common Per Block Metadata	Definition	Data Type	Valid Values
Geometric DQI	Geometric Data Quality Indicator copied from the L1B2 Terrain-projected parameter file.	INT32	-1 to 1

PerBlockMetadataTime	Definition	Data Type	Valid Values
BlockCenterTime	Imaging time for the block center (AN Camera) in UTC.	CHAR8	

#### 7.5.4 Per-line Metadata Description

None.

#### 7.5.5 Per-pixel Metadata Description

None.

#### 7.5.6 Grid Data Set Descriptions

In order to minimize storage for the TOA/Cloud Product, many logical parameters will be packed so that each bit represents a logical value, or some number of bits within a byte or word represent a flag value.

To facilitate the interpretation of scientific data, floating point values are not scaled. Floating point values, and some integer values, may take on a flag value indicating invalid data. Currently, there is only a single flag value of -9999.0, representing missing floating point data. Missing integer data may be represented either by a value of 0 (for flag data) or -9999 (for measured data) or -99 (for measured byte integer data). Note that we may later add more flag values to distinguish the reason that the data are missing (e.g., never computed, arithmetic error, overflow, etc.).

**Table 7-12: Cloud Classifier Product Field Dimension Descriptions**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	this can vary, with a typical value being approximately 140
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	128 for 1.1 km parameters 64 for 2.2 km parameters 8 for 17.6 km parameters 4 for 35.2 km parameters 2 for 70.4 km parameters
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	512 for 1.1 km parameters 256 for 2.2 km parameters 32 for 17.6 km parameters 16 for 35.2 km parameters 8 for 70.4 km parameters

**Table 7-12: Cloud Classifier Product Field Dimension Descriptions (Continued)**

Dimension	Description	Valid Values
NCamDim	NCamDim distinguishes the individual nine cameras	1-9. DF=1, CF=2, BF=3, AF=4, AN=5, AA=6, BA=7, CA=8, DA=9
NBandDim	NBandDim distinguishes the individual four camera bands	1-4. Blue=1, Green=2, Red=3, NIR=4.
NAltitudeDim	NAltitudeDim is the number of altitude bins in the Regional Scene Classifiers	0-4. NoRetrieval=0, Surface=1, LowAltitude=2, MiddleAltitude=3, HighAltitude=4.

**Table 7-13: Cloud Classifier Product Grid Dataset Descriptions.**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>ASCMParams_1.1_km (Spatial Resolution: 1.1 km x 1.1 km, XDim = 128, YDim = 512)</b>					
<b>AngularSignatureCloudMask</b> Final terrain-referenced Angular Signature Cloud Mask formed from a combination of the Fwd and Aft individual masks.	XDim,YDim	UINT8	None	None	NoRetrieval=0; CloudHC=1; CloudLC=2; ClearLC=3; ClearHC=4
<b>ASCMObservable</b> The observable that is compared against the threshold to calculate the cloud-mask. (Terrain-referenced).	XDim,YDim	FLOAT32	None	None	No data = -9999.0
<b>ASCMRefCamScatteringAngle</b> The scattering angle (in degrees) of the reference camera. (Feature-referenced).	XDim,YDim	FLOAT32	None	None	No data = -9999.0
<b>ASCMReferenceCamera</b> ASCM Reference Camera (one of Df, Da, Cf or Ca). (Terrain-referenced).	XDim,YDim	UINT8	None	None	NoRetrieval=0; Df=1; Cf=2; Ca=8; Da=9
<b>ASCMComparisonCamera</b> ASCM Comparison Camera (one of Cf, Ca, Bf or Ba). (Terrain-referenced).	XDim,YDim	UINT8	None	None	NoRetrieval=0; Cf=2; Bf=3; Ba=7; Ca=8
<b>FeatureRefASCM</b> Feature-referenced ASCM mask formed from a combination of the individual Fwd and Aft masks and then reprojected. Used in calculation of 17.6km Cloud Fraction.	XDim,YDim	UINT8	None	None	NoRetrieval=0; CloudHC=1; CloudLC=2; ClearLC=3; ClearHC=4

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>FwdCamTerrainRefASCM</b> “preliminary” terrain-referenced ASCM as calculated using the forward cameras	XDim,YDim	UINT8	None	None	NoRetrieval=0; CloudHC=1; CloudLC=2; ClearLC=3; ClearHC=4
<b>AftCamTerrainRefASCM</b> “preliminary” terrain-referenced ASCM as calculated using the aft cameras	XDim,YDim	UINT8	None	None	NoRetrieval=0; CloudHC=1; CloudLC=2; ClearLC=3; ClearHC=4
<b>NumProjectionsASCM</b> The total number of terrain-referenced ASCM values projecting to this given feature-referenced pixel.	XDim,YDim	UINT8	None	None	No data=0; Not overridden=0; Overridden= >1
<b>CloudShadowMask</b> Cloud Shadow Mask (not implemented)	XDim,YDim	UINT8	None	None	No data=0; Cloud Shadow HC=1; Cloud Shadow LC=2; Cloud Free=3
<b>TopographicShadowMask</b> Topographic Shadow Mask (not implemented)	XDim,YDim	UINT8	None	None	No data=0 Not topo shadowed=1 Topo shadowed=2
<b>CloudClassifiers_2.2km (Spatial Resolution: 2.2km x 2.2km, XDim=64, YDim=256)</b>					
<b>ConsensusCloudMask FineResolution</b> ConsensusCloudClassifier calculated from SDCM,RCCM, ASCM	XDim,YDim	UINT8	None	None	NoRetrieval = 0; Overcast = 1; KnownCloud = 2; KnownClear = 3;
<b>ConsensusOvercastMask FineResolution_BestWind</b> OverCast Mask calculated using BestWinds versions of SDCM and FRRCCM (and ASCM).	XDim,YDim	UINT8	None	None	NotOvercast = 0; Overcast = 1;
<b>ConsensusOvercastMask FineResolution_WithoutWind</b> OverCast Mask calculated using WithoutWinds versions of SDCM and FRRCCM. (and ASCM)	XDim,YDim	UINT8	None	None	NotOvercast = 0; Overcast = 1;
<b>MaxRegionalHeightFine Resolution_BestWind</b> Maximum BestWinds Stereo Height in this 2.2km pixel. Only calculated when corresponding OverCast mask is true.	XDim,YDim	INT16	None	None	No data = -9999

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>MaxRegionalHeightFine Resolution_BestWind</b> Maximum BestWinds Stereo Height in this 2.2km pixel. Only calculated when corresponding OverCast mask is true.	XDim,YDim	INT16	None	None	No data = -9999
<b>CloudFractions_17.6_km (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
<b>CombinedFractionCloudHC</b> Fractional area classified as containing any type of cloud with high confidence	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>CombinedFractionClearHC</b> Fractional area classified as clear with high confidence	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionLandPixels</b> Fraction of 1.1 km subregions classified as land	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionRetrievedStereo-Height</b> The fraction of 1.1km pixels that have a stereoscopically-derived cloud-top height.	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionDefaultStereoHeight</b> The fraction of 1.1km pixels that have a "default" (surface override or default cloud) height.	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionNoRetrievalStereo-Height</b> The fraction of 1.1km pixels that do not have a retrieval for the final stereo heights..	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionNoRetrievalPrelim-StereoHeight</b> The fraction of 1.1km pixels that do not have a retrieval for the preliminary stereo heights..	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionRCCMCloudHC</b> Fraction of RCCM pixels that are CloudHC (calculated independently for all 9 angles) Derived from the terrain-referenced RCCM (output of L1B3).	XDim,YDim, NCamDim	9 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0



Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>FractionRCCMCloudLC</b> Fraction of RCCM pixels that are CloudLC (calculated independently for all 9 angles) Derived from the terrain-referenced RCCM (output of L1B3).	XDim,YDim, NCamDim	9 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionRCCMNoRetrieval</b> Fraction of RCCM pixels that do not have a retrieval (calculated independently for all 9 angles) Derived from the terrain-referenced RCCM (output of L1B3).	XDim,YDim, NCamDim	9 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionCloudHCExcluding-ASC</b> Fractional area classified as containing any type of cloud with high confidence, excluding clouds detected with the ASCM	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>FractionCloudLCExcluding-ASC</b> Fractional area classified as containing any type of cloud with low confidence, excluding clouds detected with the ASCM	XDim,YDim	FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>SDCMCloudHCByHeight</b> Fraction of 1.1km SDCM pixels that are CloudHC (binned into 5 height classes) Derived from the BestWinds SDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>SDCMCloudLCByHeight</b> Fraction of 1.1km SDCM pixels that are CloudLC (binned into 5 height classes). Derived from the BestWinds SDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>SDCMClearLCByHeight</b> Fraction of 1.1km SDCM pixels that are ClearLC (NearSurface) (binned into 5 height classes). Derived from the BestWinds SDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>SDCMClearHCByHeight</b> Fraction of 1.1km SDCM pixels that are ClearHC (binned into 5 height classes). Derived from the BestWinds SDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>SDCMNoRetrievalByHeight</b> Fraction of 1.1km SDCM pixels that are lacking a retrieval (binned into 5 height classes). Derived from the BestWinds SDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>RCCM_AnCloudHCBByHeight</b> Fraction of 1.1km RCCM_An pixels that are CloudHC (binned into 5 height classes). Derived from the (BestWinds) Feature-Referenced RCCM found in the stereo product.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>RCCM_AnCloudLCByHeight</b> Fraction of 1.1km RCCM_An pixels that are CloudLC (binned into 5 height classes). Derived from the (BestWinds) Feature-Referenced RCCM found in the stereo product	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>RCCM_AnClearLCByHeight</b> Fraction of 1.1km RCCM_An pixels that are ClearLC (NearSurface) (binned into 5 height classes). Derived from the (BestWinds) Feature-Referenced RCCM found in the stereo product	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>RCCM_AnClearHCBByHeight</b> Fraction of 1.1km RCCM_An pixels that are ClearHC (binned into 5 height classes). Derived from the (BestWinds) Feature-Referenced RCCM found in the stereo product	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>RCCM_AnNoRetrieval ByHeight</b> Fraction of 1.1km RCCM_An pixels that are lacking a retrieval (binned into 5 height classes). Derived from the (BestWinds) Feature-Referenced RCCM found in the stereo product	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>ASCMCloudHCByHeight</b> Fraction of 1.1km ASCM pixels that are CloudHC (binned into 5 height classes).	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>ASCMCloudLCByHeight</b> Fraction of 1.1km ASCM pixels that are CloudLC (binned into 5 height classes).	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>ASCMClearLCByHeight</b> Fraction of 1.1km ASCM pixels that are ClearLC (NearSurface) (binned into 5 height classes).	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>ASCMClearHCByHeight</b> Fraction of 1.1km ASCM pixels that are ClearHC (binned into 5 height classes).	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>ASCMNoRetrievalByHeight</b> Fraction of 1.1km ASCM pixels that are lacking a retrieval (binned into 5 height classes).	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>PrelimSDCMCloudHCBy- Height</b> Fraction of 1.1km Preliminary SDCM pixels that are CloudHC (binned into 5 height classes) Derived from the BestWinds PrelimSDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>PrelimSDCMCloudLCByHeight</b> Fraction of 1.1km Preliminary SDCM pixels that are CloudLC (binned into 5 height classes). Derived from the BestWinds PrelimSDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>PrelimSDCMClearLCByHeight</b> Fraction of 1.1km Preliminary SDCM pixels that are ClearLC (NearSurface) (binned into 5 height classes). Derived from the BestWinds PrelimSDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>PrelimSDCMClearHCByHeight</b> Fraction of 1.1km Preliminary SDCM pixels that are ClearHC (binned into 5 height classes). Derived from the BestWinds PrelimSDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>PrelimSDCMNoRetrievalBy-Height</b> Fraction of 1.1km Preliminary SDCM pixels that are lacking a retrieval (binned into 5 height classes). Derived from the BestWinds PrelimSDCM.	XDim,YDim, NAltitudeDim	5 X FLOAT32	None	None	No data=-9999.0 Valid data = 0.0 - 1.0
<b>CloudClassifiers_35.2km (Spatial Resolution: 35.2km x 35.2km, XDim=4, YDim=16)</b>					
<b>ConsensusCloudMask CoarseResolution</b> ConsensusCloudClassifier calculated from SDCM,RCCM, ASCM	XDim,YDim	UINT8	None	None	NoRetrieval = 0; Overcast = 1; KnownCloud = 2; KnownClear = 3;
<b>ConsensusOvercastMask CoarseResolution_BestWind</b> OverCast Mask calculated using BestWinds versions of SDCM and FRRCCM (and ASCM).	XDim,YDim	UINT8	None	None	NotOvercast = 0; Overcast = 1;
<b>ConsensusOvercastMask CoarseResolution_Without Wind</b> OverCast Mask calculated using WithoutWinds versions of SDCM and FRRCCM. (and ASCM)	XDim,YDim	UINT8	None	None	NotOvercast = 0; Overcast = 1;
<b>MaxRegionalHeightCoarse Resolution_BestWind</b> Maximum BestWinds Stereo Height in this 35.2km pixel. Only calculated when corresponding OverCast mask is true.	XDim,YDim	INT16	None	None	No data = -9999
<b>MaxRegionalHeightCoarse Resolution_ZeroWind</b> Maximum WithoutWinds Stereo Height in this 35.2km pixel. Only calculated when corresponding OverCast mask is true.	XDim,YDim	INT16	None	None	No data = -9999

### 7.5.7 Per-grid QA Metadata

**Table 7-14: Per-grid QA Metadata for Cloud Classifier Products.**

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>SwathQaGlobal: Swath-level Constructs</b>			

Data Field Name	Data Type	Field Dimensions	Valid Range
NNonFillSubregions	INT32	--	0 - 2272
NNonFillSolarOblique	INT32	--	0 - 2272
<b><i>Block-level Constructs</i></b>			
BlockNumber	INT32	--	1 - 180
ValidRecord	UINT8	--	0, 1
TPGeomDataQualInd	FLOAT64	NCAM	-1 - 1
NSubAscmNR	INT32	--	0 -65,536
NSubAscmOverride	INT32	--	0 - 65,536

## 7.6 MISR LEVEL 2 MIL2TCAL CLOUD ALBEDO PRODUCT

### 7.6.1 File Metadata Description

**Table 7-15: File Metadata for Cloud Albedo Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version identifier for AGP	INT32	N/A	2
DID_version_id	Version Identifier for DID (DTED Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	180 x INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84 ellipsoid (6.3781370E+06)
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84 ellipsoid (6.6943480E-03)
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	1.0
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	1.0
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	1.0
SOM_parameters.som_orbit.nrev	Number of revolutions per ground track repeat cycle	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7.0780408E+06
SOM_parameters.som_orbit.i	Inclination of orbit (degrees)	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	6.8666667E-02

File Metadata Field Name	Definition	Data Type	Units	Valid Range
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0 (degrees)	FLOAT64	radians	-2pi: 2pi
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file was obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-6  0 if data is global mode
Local_mode_site_name	The geographical name of the first local mode site contained in this file.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal

### 7.6.2 Per-grid Metadata Description

**Table 7-16: Per-grid Metadata for Cloud Albedo Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	2200, 17600, 35200

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	2200, 17600, 35200
Block_size.size_x	Block x dimension	INT32	64, 8, 4
Block_size.size_y	Block y dimension	INT32	256, 32, 16

### 7.6.3 Per-block Metadata Description

**Table 7-17: Per-block Metadata for Cloud Albedo Product Files.**

PerBlockMetadataCommon	Definition	Data Type	Valid Values
Block_number	Current block number	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

Common Per Block Metadata	Definition	Data Type	Valid Values
Geometric DQI	Geometric Data Quality Indicator copied from the L1B2 Terrain-projected parameter file.	INT32	-1 to 1



PerBlockMetadataTime	Definition	Data Type	Valid Values
BlockCenterTime	Imaging time for the block center (AN Camera) in UTC.	CHAR8	

#### 7.6.4 Per-line Metadata Description

None.

#### 7.6.5 Per-pixel Metadata Description

None.

#### 7.6.6 Grid Data Set Descriptions

In order to minimize storage for the TOA/Cloud Product, many logical parameters will be packed so that each bit represents a logical value, or some number of bits within a byte or word represent a flag value.

To facilitate the interpretation of scientific data, floating point values are not scaled. Floating point values, and some integer values, may take on a flag value indicating invalid data. Currently, there is only a single flag value of -9999.0, representing missing floating point data. Missing integer data may be represented either by a value of 0 (for flag data) or -9999 (for measured data) or -99 (for measured byte integer data). Note that we may later add more flag values to distinguish the reason that the data are missing (e.g. never computed, arithmetic error, overflow, etc.).

**Table 7-18: Cloud Albedo Product Field Dimension Descriptions**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	this can vary, with a typical value being approximately 140
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	128 for 1.1 km parameters 64 for 2.2 km parameters 8 for 17.6 km parameters 4 for 35.2 km parameters 2 for 70.4 km parameters

**Table 7-18: Cloud Albedo Product Field Dimension Descriptions (Continued)**

Dimension	Description	Valid Values
YDim	YDim is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	512 for 1.1 km parameters 256 for 2.2 km parameters 32 for 17.6 km parameters 16 for 35.2 km parameters 8 for 70.4 km parameters
NCamDim	NCamDim distinguishes the individual nine cameras	1-9. DF=1, CF=2, BF=3, AF=4, AN=5, AA=6, BA=7, CA=8, DA=9
NBandDim	NBandDim distinguishes the individual four camera bands	1-4. Blue=1, Green=2, Red=3, NIR=4.

**Table 7-19: Cloud Albedo Product Grid Dataset Descriptions.**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>ReflectingLevelParameters_2.2_km : (Spatial Resolution: 2.2 km x 2.2 km, XDim = 64, YDim = 256)</b>					
<b>AlbedoLocal</b> Local TOA albedo (4 bands)	XDim,YDim, NBandDim	4 X FLOAT32	None	None	No data=-9999.0
<b>NumUnobscuredTop</b> Number of unobscured top pixels (9 angles)	XDim,YDim, NCamDim	9 X INT8	None	None	No data=-99 or -98
<b>BRFTop_Mean</b> Top BRF referenced to RLRA. (4 bands X 9 angles)	XDim,YDim, NBandDim, NCamDim	4 X 9 X FLOAT32	None	None	No data=-9999.0 pr - 9998.0
<b>FlagCamFillTop</b> Source Flag for Top BRF's indicating whether or not BRF was filled-in or not. (4 bands x 9 angles)	XDim,YDim, NBandDim, NCamDim	4 X 9 X UINT8	None	None	0 = Not-Filled-In or no data, 1 = Filled-In
<b>NumUnobscuredSide</b> Number of unobscured side pixels (9 angles)	XDim,YDim, NCamDim	9 X INT16	None	None	No data=-9999 or -9998
<b>BRFSide_Mean</b> Side BRF referenced to RLRA (4 bands X 9 angles)	XDim,YDim, NCamDim, NBandDim	4 X 9 X FLOAT32	None	None	No data=-9999.0 or - 9998.0
<b>FlagCamFillSide</b> Source Flag for Side BRF's indicating whether or not BRF was filled-in or not. (4 bands x 9 angles)	XDim,YDim, NBandDim, NCamDim	4 X 9 X UINT8	None	None	0 = Not-Filled-In or no data, 1 = Filled-In

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>LocalAlbedoMethodandSAW Reason</b> Local albedo contribution methodology/Reasons for solid angle weighting (4 bands X 9 angles)	XDim,YDim, NBandDim, NcamDim	4 X 9 X UINT8	None	None	No Retrieval=0; Cloudy Deterministic=1; Cloudy Stochastic=2; Clear Deterministic=3; Solid Angle Weighting SAW - sun overhead=4; SAW (nadir camera)=5; SAW - Cloudy criteria not met=7; SAW - Clear, too few angles to try=8; SAW - Clear, too few angles to match=9; SAW - Clear angle doesn't match=10; SAW -AZM undetermined=11; No Df/Da camera data=12; No contri- bution found = 15;
<b>GLDVStdDevTotal</b> First top texture index computed from the standard deviation of all BRF's assigned to the top of a given RLRA column. (9 angles).	XDim,YDim, NcamDim	9 X FLOAT32	None	None	No data=-9999.0
<b>GLDVStdDevAlong</b> Second top texture index computed from the along-track standard deviation of BRF's assigned to the top of a given RLRA column. (9 angles)	XDim,YDim, NcamDim	9 X FLOAT32	None	None	No data=-9999.0
<b>GLDVStdDevAcross</b> Third top texture index computed from the cross-track standard deviation of BRF's assigned to the top of a given RLRA column. (9 angles)	XDim,YDim, NcamDim	9 X FLOAT32	None	None	No data=-9999.0
<b>RLRAInterpolated</b> The RLRA used in the reprojection of the BRF's up to the RLRA after interpolation to fill in all the missing values.	XDim,YDim	FLOAT32	metres	None	No data = -9999.0

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>CloudyClearDesignation</b> Cloudy/clear and cloud phase designation	XDim,YDim	UINT8	None	None	No Retrieval/ Undetermined=0; Clear=1; Cloudy: liquid cloud phase=2; Cloudy:ice cloud phase=3; Cloudy:unknown cloud phase=4.
<b>HighCloudIndicator</b> High cloud indicator	XDim,YDim	UINT8	None	None	No Retrieval=0; High Cloud Present=1; High Cloud Not Present=2; High Cloud Undeter- mined=3
<b>CloudyClearSource</b> cloud phase source	XDim,YDim	UINT8	None	None	No Retrieval=0; MODIS=1; TASC: other out-of- bounds=2; TASC; other not available=3
<b>CloudLiquidProbability</b> Probability that the cloud phase is liquid.	XDim,YDim	UINT8	None	None	0-100, No data = -99
<b>CloudTopTemperature</b> Cloud-top temperature	XDim,YDim	FLOAT32	Deg. Celcius	None	No data=-9999.0
<b>FlagCloudPhaseOverride</b> Cloud phase override flag (8 off- nadir angles, 4 bands)	XDim,YDim, NBandDim	4 X UINT8	None	Pack lowest bit of override flag for all 8 off- nadir cameras into bits 1-8	None
<b>CloudTexture</b> Texture of the cloud-top as determined by looking at the GLDVStDevTotal.	XDim,YDim	UINT8	None	None	No Retrieval=0; Homogeneous=1; Heterogeneous=2
<b>HomogeneityReferenceCam</b> Homogeneity reference camera used in determining the CloudTexture flag.	XDim,YDim	UINT8	None	None	No Retrieval=0; Bf=3; Af=4; An=5; Aa=6; Ba=7
<b>SurfaceType</b> Surface type	XDim,YDim	UINT8	None	None	No Retrieval=0; Water=1; Vegetated Land=2; Non- Vegetated Land=3; Snow/ice = 4
<b>CSSCSurfaceType</b> Corresponding Surface Type from the CloudScreeningSurface Classification Dataset.	XDim,YDim	INT16	None	None	No data = -9999, 0 = Water 1-1580 = Land

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>IndexSolarZenith</b> Solar zenith angle index	XDim,YDim	INT8	None	None	No Retrieval=-99, 1-15.
<b>IndexViewingZenith</b> View zenith angle index for each camera	XDim,YDim, NCamDim	9 x INT8	None	None	No Retrieval=-99, 1-2.
<b>IndexBlueAltitude</b> Blue band altitude bin index	XDim,YDim	INT8	None	None	No Retrieval=-99, 1-4.
<b>IndexGreenAltitude</b> Green band altitude bin index	XDim,YDim	INT8	None	None	No Retrieval=-99, 1-4.
<b>IndexBrightness</b> Brightness index, 9 cameras	XDim,YDim, NCamDim	9 X INT8	None	None	No Retrieval=-99, 1-13.
<b>IndexIgloo</b> Igloo index (off-nadir cameras)	XDim,YDim	UINT8	None	Pack lowest bit from each camera into 8 bits	No Retrieval = 0, Forward Scatter = 1, Backward Scatter = 2
<b>RelativeAzimuthBinInterpolator</b> Relative azimuth angle bin + interpolation fraction.	XDim,YDim, NCamDim	9 X FLOAT32	None	Integer portion = lower of 2 surrounding relative azimuth angle bins. Remainder = interpolation fraction between this bin and the higher one.	No Retrieval = -9999.0 0.0 - 7.0
<b>ClearSkyR0</b> Clear sky local albedo R0 parameter (4 bands)	XDim,YDim, NBandDim	4 X FLOAT32	None	None	No data=-9999.0
<b>ClearSkyKappa</b> Clear sky local albedo Kappa parameter (4 bands)	XDim,YDim, NBandDim	4 X FLOAT32	None	None	No data=-9999.0
<b>ClearSkyBeta</b> Clear sky local albedo Beta parameter (4 bands)	XDim,YDim, NBandDim	4 X FLOAT32	None	None	No data=-9999.0
<b>ClearSkyCameras</b> Channels used in clear-sky fits (4 bands X 9 angles)	XDim,YDim, NBandDim	4 X UINT16	None	Pack lowest bit from each camera into lowest 9 bits, for each band	None
<b>ClearSkyChiSquare</b> Camera-averaged chi-square for clear-sky fits (4 bands)	XDim,YDim, NBandDim	4 X FLOAT32	None	None	No data=-9999.0
<b>GeometricParameters_17.6_km: (Spatial Resolution: 17.6 km x 17.6 km, XDim =8, YDim = 32)</b>					

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>SolarZenithAngle</b> Solar zenith angle	XDim,YDim	FLOAT32	degs	None	No data=-9999.0
<b>ViewZenithAngle</b> View zenith angle (9 angles)	XDim,YDim, NCamDim	9 X FLOAT32	degs	None	No data=-9999.0
<b>RelativeAzimuthAngle</b> View-Sun relative azimuth angle (9 angles)	XDim,YDim, NCamDim	9 X FLOAT32	degs	None	No data=-9999.0
<b>AlbedoParameters_35.2_km: (Spatial Resolution: 35.2 km x 35.2 km, XDim = 4, YDim = 16)</b>					
<b>AlbedoExpansive</b> Expansive albedo (4 bands)	XDim,YDim, NBandDim	4 X FLOAT32	None	None	No data=-9999.0
<b>AlbedoRestrictive</b> Total restrictive albedo (4 bands)	XDim,YDim, NBandDim	4 X FLOAT32	None	None	No data=-9999.0
<b>AlbedoExpansiveBroadband</b> Broadband albedo calculated from a linear combination of all four spectral Expansive Albedo measurements.	XDim,YDim	FLOAT32	None	None	No data=-9999.0
<b>AlbedoRestrictiveBroadband</b> Broadband albedo calculated from a linear combination of all four spectral Restrictive Albedo measurements.	XDim,YDim	FLOAT32	None	None	No data=-9999.0
<b>SolarZenithCosineRegional</b> Regional mean solar zenith angle cosine	XDim,YDim	FLOAT32	None	None	No data=-9999.0
<b>NumLocalAlbedoGood</b> Number of pixels with successful calculation of local albedo.	XDim,YDim, NBandDim	4 x INT16	None	None	No data = -9999 Valid data = 0 - 256
<b>NumLocalAlbedoGood NoCamFill</b> Number of pixels that did not contain any filled-in BRF's with successful calculation of local albedo.	XDim,YDim, NBandDim	4 x INT16	None	None	No data = -9999 Valid data = 0 - 256
<b>LocalAlbedo_Mean</b> Average value of local albedo over this region.	XDim,YDim, NBandDim	4 x FLOAT32	None	None	No data = -9999.0
<b>LocalAlbedo_StdDev</b> Standard deviation of all local albedos in this region.	XDim,YDim, NBandDim	4 x FLOAT32	None	None	No data = -9999.0
<b>LocalAlbedoNoCamFill_Mean</b> Average value of all local albedo pixels which did not contain any filled-in BRF's.	XDim,YDim, NBandDim	4 x FLOAT32	None	None	No data = -9999.0

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>LocalAlbedoNoCamFill_StdDev</b> Standard deviation of all local albedos in this region that did not contain any filled-in BRF's.	XDim,YDim, NBandDim	4 x FLOAT32	None	None	No data = -9999.0
<b>NumDeterministicSucceeded</b> Number of pixels for which deterministic modelling of a local albedo component succeeded, tabulated separately for each band and camera.	XDim,YDim, NBandDim, NCamDim	4 x 9 x INT16	None	None	No data = -9999 Valid data = 0 - 256
<b>NumDeterministicFailed</b> Number of pixels for which deterministic modelling of a local albedo component failed, tabulated separately for each band and camera.	XDim,YDim, NBandDim, NCamDim	4 x 9 x INT16	None	None	No data = -9999 Valid data = 0 - 256
<b>NumStochasticSucceeded</b> Number of pixels for which stochastic modelling of a local albedo component succeeded, tabulated separately for each band and camera.	XDim,YDim, NBandDim, NCamDim	4 x 9 x INT16	None	None	No data = -9999 Valid data = 0 - 256
<b>NumStochasticFailed</b> Number of pixels for which stochastic modelling of a local albedo component failed, tabulated separately for each band and camera.	XDim,YDim, NBandDim, NCamDim	4 x 9 x INT16	None	None	No data = -9999] Valid data = 0 - 256
<b>RestrictiveAlbedoTop</b> Restrictive albedo top-leaving term (4 bands)	XDim,YDim, NBandDim	4 X FLOAT32	None	None	No data=-9999.0
<b>RestrictiveAlbedoSide</b> Side-leaving contribution at each angle (4 bands X 9 angles)	XDim,YDim, NBandDim, NCamDim	4 X 9 X FLOAT32	None	None	No data=-9999.0
<b>NumSubRestrictiveAlbedoTop</b> Number of subregions contributing to top-leaving term (4 bands)	XDim,YDim, NBandDim	4 X UINT16	None	None	No data=65533 Valid data = 0 - 256
<b>NumSubRestrictiveAlbedoSide</b> Number of subregions contributing to side-leaving term (4 bands X 9 angles)	XDim,YDim, NBandDim, NCamDim	4 X 9 X UINT16	None	None	No data=65533 Valid data = 0 - 256
<b>FlagRestrictiveAlbedoSide</b> Camera angles contributing to side-leaving term (4 bands X 9 angles)	XDim,YDim	4 X UINT16	None	Pack lowest bit from each camera into lowest 9 bits, for each band	None.

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>NumSubExpansiveConsidered</b> Number of subregions considered during summation	XDim,YDim	INT32	None	None	No data=-9999 Block not processed=-8888
<b>NumSubExpansiveUsed</b> Number of subregions actually included in summation (4 bands)	XDim,YDim, NBandDim	4 X INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumSubExpansiveMissBRFTop</b> Number of subregions eliminated due to missing top-leaving term (4 bands)	XDim,YDim, NBandDim	4 X INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumSubExpansiveMissBRFSide</b> Number of subregions eliminated due to missing side-leaving term (4 bands)	XDim,YDim, NBandDim	4 X INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumSubExpansiveBadObscTop</b> Number of subregions eliminated due to obscured top-leaving term (4 bands)	XDim,YDim, NBandDim	4 X INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumSubExpansiveBadObscSide</b> Number of subregions eliminated due to obscured side-leaving term (4 bands)	XDim,YDim, NBandDim	4 X INT32	None	None	No data=-9999 or -8888 (block not processed)
<b>NumSubExpansiveOblique</b> Number of subregions eliminated due to sun angle too oblique	XDim,YDim	INT32	None	None	No data=-9999 Block not processed=-8888
<b>FractionExpansive ClearHighConf</b> Fractional area contributing to the expansive albedo classified as Clear HC	XDim,YDim	FLOAT32	None	None	No data=-9999.0
<b>FractionExpansive ClearLowConf</b> Fractional area contributing to the expansive albedo classified as Clear LC	XDim,YDim	FLOAT32	None	None	No data=-9999.0

### 7.6.7 Per-grid QA Metadata

**Table 7-20: Per-grid QA Metadata for Cloud Albedo Products.**

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>SwathQaGlobal: Swath-level Constructs</b>			
NNonFillTopBRF	INT32	NBAND	0 - 2,326,528



Data Field Name	Data Type	Field Dimensions	Valid Range
NSuccLocalAlbedo	INT32	NBAND	0 - 2,326,528
NCldySkyContribLocalAlbedo	INT32	NBAND	0 - 2,326,528
NCIrskyContribLocalAlbedo	INT32	NBAND	0 - 2,326,528
NSAWOnlyLocalAlbedo	INT32	NBAND	0 - 2,326,528
NRLRASubWGoodMODISCIdPhase	INT32	--	0 - 2,326,528
NRLRASubWBadMODISCIdPhase	INT32	--	0 - 2,326,528
NRLRASubWNAMODISCIdPhase	INT32	--	0 - 2,326,528
NNonFill35kmReg	INT16	NBAND	0 - 9088
NSuccRestAlbedo	INT16	NBAND	0 - 9088
NSuccExpAlbedo	INT16	NBAND	0 - 9088
<b>BlockQaGlobal: Block-level Constructs</b>			
BlockNumber	INT32	--	1 - 180
ValidRecord	UINT8	--	0, 1
TpGeomDataQualInd	FLOAT64	NCAM	-1 - 1
UpLeftCornerLat	FLOAT64	--	-90 - 90
UpLeftCornerLong	FLOAT64	--	-180 - 180
UpRightCornerLat	FLOAT64	--	-90 - 90
UpRightCornerLong	FLOAT64	--	-180 - 180
LowLeftCornerLat	FLOAT64	--	-90 - 90
LowLeftCornerLong	FLOAT64	--	-180 - 180
LowRightCornerLat	FLOAT64	--	-90 - 90
LowRightCornerLong	FLOAT64	--	-180 - 180
NumRlraFilled	INT32	--	0 - 16,384
NumPixSucceedTop	INT32	NCAM	0 - 16,384
NumPixSucceedSider	INT32	NCAM	0 - 16,384
NumPixNoLookVector	INT32	NCAM	0 - 16,384
NumPixNoBrfBlue	INT32	NCAM	0 - 16,384
NumPixNoBrfGreen	INT32	NCAM	0 - 16,384
NumPixNoBrfRed	INT32	NCAM	0 - 16,384
NumPixNoBrfNIR	INT32	NCAM	0 - 16,384
NAZMCIdLiquidPhase	INT16	--	0 - 16,384

Data Field Name	Data Type	Field Dimensions	Valid Range
NAZMCIdIcePhase	INT16	--	0 - 16,384
NAZMCIdUnknownPhase	INT16	--	0 - 16,384
NAZMCIdr	INT16	--	0 - 16,384
NAZMUndetermined	INT16	--	0 - 16,384
NNoFillAZMCIdLiquidPhase	INT16	--	0 - 16,384
NNoFillAZMCIdIcePhase	INT16	--	0 - 16,384
NNoFillAZMCIdUnknownPhase	INT16	--	0 - 16,384
NNoFillAZMCIdr	INT16	--	0 - 16,384
NNoFillAZMUndetermined	INT16	--	0 - 16,384
NAZMCIdUnknownOverridWLiquid	INT16	--	0 - 16,384
NSnowIceSub	INT16	--	0 - 16,384
NWaterSub	INT16	--	0 - 16,384
NVegetated	INT16	--	0 - 16,384
NNonVegetatedLandSub	INT16	--	0 - 16,384
NAZMCIdSnowIceSub	INT16	--	0 - 16,384
NAZMCIdWaterSub	INT16	--	0 - 16,384
NAZMCIdVegetatedLandSub	INT16	--	0 - 16,384
NAZMCIdNonVegetatedLandSub	INT16	--	0 - 16,384
NNoFillAZMCIdSnowIceSub	INT16	--	0 - 16,384
NNoFillAZMCIdWaterSub	INT16	--	0 - 16,384
NNoFillAZMCIdVegetatedLandSub	INT16	--	0 - 16,384
NNoFillAZMCIdNonVegetatedLandSub	INT16	--	0 - 16,384
NHighCIdPresentSub	INT16	--	0 - 16,384
NHighCIdNotPresentSub	INT16	--	0 - 16,384
NHighCIdUndeterminedSub	INT16	--	0 - 16,384
NSubWHomogenRefCamAn	INT16	--	0 - 16,384
NSubWHomogenRefCamAf	INT16	--	0 - 16,384
NSubWHomogenRefCamAa	INT16	--	0 - 16,384
NSubWHomogenRefCamBf	INT16	--	0 - 16,384
NSubWHomogenRefCamBa	INT16	--	0 - 16,384
NSubWHomogenRefCamNA	INT16	--	0 - 16,384

Data Field Name	Data Type	Field Dimensions	Valid Range
NSubHomogeneousTexture	INT16	--	0 - 16,384
NSubHeterogeneousTexture	INT16	--	0 - 16,384
NSubTextureNA	INT16	--	0 - 16,384
NBlueSubNoLocalAttempted	INT16	NCAM	0 - 16,384
NBlueSubLocalUsingDetermCld	INT16	NCAM	0 - 16,384
NBlueSubLocalUsingStochastCld	INT16	NCAM	0 - 16,384
NBlueSubLocalUsingDetermClr	INT16	NCAM	0 - 16,384
NBlueSubLocalUsingSAW	INT16	NCAM	0 - 16,384
NBlueSubLocalNotSucc	INT16	NCAM	0 - 16,384
NGreenSubNoLocalAttempted	INT16	NCAM	0 - 16,384
NGreenSubLocalUsingDetermCld	INT16	NCAM	0 - 16,384
NGreenSubLocalUsingStochastCld	INT16	NCAM	0 - 16,384
NGreenSubLocalUsingDetermClr	INT16	NCAM	0 - 16,384
NGreenSubLocalUsingSAW	INT16	NCAM	0 - 16,384
NGreenSubLocalNotSucc	INT16	NCAM	0 - 16,384
NRedSubNoLocalAttempted	INT16	NCAM	0 - 16,384
NRedSubLocalUsingDetermCld	INT16	NCAM	0 - 16,384
NRedSubLocalUsingStochastCld	INT16	NCAM	0 - 16,384
NRedSubLocalUsingDetermClr	INT16	NCAM	0 - 16,384
NRedSubLocalUsingSAW	INT16	NCAM	0 - 16,384
NRedSubLocalNotSucc	INT16	NCAM	0 - 16,384
NNIRSubNoLocalAttempted	INT16	NCAM	0 - 16,384
NNIRSubLocalUsingDetermCld	INT16	NCAM	0 - 16,384
NNIRSubLocalUsingStochastCld	INT16	NCAM	0 - 16,384
NNIRSubLocalUsingDetermClr	INT16	NCAM	0 - 16,384
NNIRSubLocalUsingSAW	INT16	NCAM	0 - 16,384
NNIRSubLocalNotSucc	INT16	NCAM	0 - 16,384
NBlueSubSAWOblique	INT16	NCAM	0 - 16,384
NBlueSubSAWNadirView	INT16	NCAM	0 - 16,384
NBlueSubSAWMissingBRFs	INT16	NCAM	0 - 16,384
NBlueSubSAWCldyModelFailed	INT16	NCAM	0 - 16,384

Data Field Name	Data Type	Field Dimensions	Valid Range
NBlueSubSAWTooFewAngAttemptClr	INT16	NCAM	0 - 16,384
NBlueSubSAWTooFewAngMatchClr	INT16	NCAM	0 - 16,384
NBlueSubSAWNotThisAngleMatchClr	INT16	NCAM	0 - 16,384
NBlueSubSAWSceneUnclassifiable	INT16	NCAM	0 - 16,384
NBlueSubSAWNolglooCamAvail	INT16	NCAM	0 - 16,384
NGreenSubSAWOblique	INT16	NCAM	0 - 16,384
NGreenSubSAWNadirView	INT16	NCAM	0 - 16,384
NGreenSubSAWMissingBRFs	INT16	NCAM	0 - 16,384
NGreenSubSAWCldyModelFailed	INT16	NCAM	0 - 16,384
NGreenSubSAWTooFewAngAttemptClr	INT16	NCAM	0 - 16,384
NGreenSubSAWTooFewAngMatchClr	INT16	NCAM	0 - 16,384
NGreenSubSAWNotThisAngleMatchClr	INT16	NCAM	0 - 16,384
NGreenSubSAWSceneUnclassifiable	INT16	NCAM	0 - 16,384
NGreenSubSAWNolglooCamAvail	INT16	NCAM	0 - 16,384
NRedSubSAWOblique	INT16	NCAM	0 - 16,384
NRedSubSAWNadirView	INT16	NCAM	0 - 16,384
NRedSubSAWMissingBRFs	INT16	NCAM	0 - 16,384
NRedSubSAWCldyModelFailed	INT16	NCAM	0 - 16,384
NRedSubSAWTooFewAngAttemptClr	INT16	NCAM	0 - 16,384
NRedSubSAWTooFewAngMatchClr	INT16	NCAM	0 - 16,384
NRedSubSAWNotThisAngleMatchClr	INT16	NCAM	0 - 16,384
NRedSubSAWSceneUnclassifiable	INT16	NCAM	0 - 16,384
NRedSubSAWNolglooCamAvail	INT16	NCAM	0 - 16,384
NNIRSubSAWOblique	INT16	NCAM	0 - 16,384
NNIRSubSAWNadirView	INT16	NCAM	0 - 16,384
NNIRSubSAWMissingBRFs	INT16	NCAM	0 - 16,384
NNIRSubSAWCldyModelFailed	INT16	NCAM	0 - 16,384
NNIRSubSAWTooFewAngAttemptClr	INT16	NCAM	0 - 16,384
NNIRSubSAWTooFewAngMatchClr	INT16	NCAM	0 - 16,384
NNIRSubSAWNotThisAngleMatchClr	INT16	NCAM	0 - 16,384
NNIRSubSAWSceneUnclassifiable	INT16	NCAM	0 - 16,384

Data Field Name	Data Type	Field Dimensions	Valid Range
NNIRSubSAWNoIgllooCamAvail	INT16	NCAM	0 - 16,384
MeanSolarZenAngleCos	FLOAT32	--	0.0 - 1.0
<b><i>BlockQaGlobalHist: Block-level Histograms</i></b>			
LoBndLocAlbBlue	FLOAT32	--	
HiBndLocAlbBlue	FLOAT32	--	
NBinsLocAlbBlue	INT16	--	0 - 22
HistLocAlbBlue	INT16	22	0 - 16,384
LoBndLocAlbBlueNoFill	FLOAT32	--	
HiBndLocAlbBlueNoFill	FLOAT32	--	
NBinsLocAlbBlueNoFill	INT16	--	0 - 22
HistLocAlbBlueNoFill	INT16	22	0 - 16,384
LoBndLocAlbClearBlue	FLOAT32	--	
HiBndLocAlbClearBlue	FLOAT32	--	
NBinsLocAlbClearBlue	INT16	--	0 - 22
HistLocAlbClearBlue	INT16	22	0 - 16,384
LoBndLocAlbClearBlueNoFill	FLOAT32	--	
HiBndLocAlbClearBlueNoFill	FLOAT32	--	
NBinsLocAlbClearBlueNoFill	INT16	--	0 - 22
HistLocAlbClearBlueNoFill	INT16	22	0 - 16,384
LoBndLocAlbCloudBlue	FLOAT32	--	
HiBndLocAlbCloudBlue	FLOAT32	--	
NBinsLocAlbCloudBlue	INT16	--	0 - 22
HistLocAlbCloudBlue	INT16	22	0 - 16,384
LoBndLocAlbCloudBlueNoFill	FLOAT32	--	
HiBndLocAlbCloudBlueNoFill	FLOAT32	--	
NBinsLocAlbCloudBlueNoFill	INT16	--	0 - 22
HistLocAlbCloudBlueNoFill	INT16	22	0 - 16,384
LoBndResAlbBlue	FLOAT32	--	
HiBndResAlbBlue	FLOAT32	--	
NBinsResAlbBlue	INT16	--	0 - 22
HistResAlbBlue	INT16	22	0 - 16,384

Data Field Name	Data Type	Field Dimensions	Valid Range
LoBndResAlbBlueNoFill	FLOAT32	--	
HiBndResAlbBlueNoFill	FLOAT32	--	
NBinsResAlbBlueNoFill	INT16	--	0 - 22
HistResAlbBlueNoFill	INT16	22	0 - 16,384
LoBndExpAlbBlue	FLOAT32	--	
HiBndExpAlbBlue	FLOAT32	--	
NBinsExpAlbBlue	INT16	--	0 - 22
HistExpAlbBlue	INT16	22	0 - 16,384
LoBndLocAlbGreen	FLOAT32	--	
HiBndLocAlbGreen	FLOAT32	--	
NBinsLocAlbGreen	INT16	--	0 - 22
HistLocAlbGreen	INT16	22	0 - 16,384
LoBndLocAlbGreenNoFill	FLOAT32	--	
HiBndLocAlbGreenNoFill	FLOAT32	--	
NBinsLocAlbGreenNoFill	INT16	--	0 - 22
HistLocAlbGreenNoFill	INT16	22	0 - 16,384
LoBndLocAlbClearGreen	FLOAT32	--	
HiBndLocAlbClearGreen	FLOAT32	--	
NBinsLocAlbClearGreen	INT16	--	0 - 22
HistLocAlbClearGreen	INT16	22	0 - 16,384
LoBndLocAlbClearGreenNoFill	FLOAT32	--	
HiBndLocAlbClearGreenNoFill	FLOAT32	--	
NBinsLocAlbClearGreenNoFill	INT16	--	0 - 22
HistLocAlbClearGreenNoFill	INT16	22	0 - 16,384
LoBndLocAlbCloudGreen	FLOAT32	--	
HiBndLocAlbCloudGreen	FLOAT32	--	
NBinsLocAlbCloudGreen	INT16	--	0 - 22
HistLocAlbCloudGreen	INT16	22	0 - 16,384
LoBndLocAlbCloudGreenNoFill	FLOAT32	--	
HiBndLocAlbCloudGreenNoFill	FLOAT32	--	
NBinsLocAlbCloudGreenNoFill	INT16	--	0 - 22

Data Field Name	Data Type	Field Dimensions	Valid Range
HistLocAlbCloudGreenNoFill	INT16	22	0 - 16,384
LoBndResAlbGreen	FLOAT32	--	
HiBndResAlbGreen	FLOAT32	--	
NBinsResAlbGreen	INT16	--	0 - 22
HistResAlbGreen	INT16	22	0 - 16,384
LoBndResAlbGreenNoFill	FLOAT32	--	
HiBndResAlbGreenNoFill	FLOAT32	--	
NBinsResAlbGreenNoFill	INT16	--	0 - 22
HistResAlbGreenNoFill	INT16	22	0 - 16,384
LoBndExpAlbGreen	FLOAT32	--	
HiBndExpAlbGreen	FLOAT32	--	
NBinsExpAlbGreen	INT16	--	0 - 22
HistExpAlbGreen	INT16	22	0 - 16,384
LoBndLocAlbRed	FLOAT32	--	
HiBndLocAlbRed	FLOAT32	--	
NBinsLocAlbRed	INT16	--	0 - 22
HistLocAlbRed	INT16	22	0 - 16,384
LoBndLocAlbRedNoFill	FLOAT32	--	
HiBndLocAlbRedNoFill	FLOAT32	--	
NBinsLocAlbRedNoFill	INT16	--	0 - 22
HistLocAlbRedNoFill	INT16	22	0 - 16,384
LoBndLocAlbClearRed	FLOAT32	--	
HiBndLocAlbClearRed	FLOAT32	--	
NBinsLocAlbClearRed	INT16	--	0 - 22
HistLocAlbClearRed	INT16	22	0 - 16,384
LoBndLocAlbClearRedNoFill	FLOAT32	--	
HiBndLocAlbClearRedNoFill	FLOAT32	--	
NBinsLocAlbClearRedNoFill	INT16	--	0 - 22
HistLocAlbClearRedNoFill	INT16	22	0 - 16,384
LoBndLocAlbCloudRed	FLOAT32	--	
HiBndLocAlbCloudRed	FLOAT32	--	

Data Field Name	Data Type	Field Dimensions	Valid Range
NBinsLocAlbCloudRed	INT16	--	0 - 22
HistLocAlbCloudRed	INT16	22	0 - 16,384
LoBndLocAlbCloudRedNoFill	FLOAT32	--	
HiBndLocAlbCloudRedNoFill	FLOAT32	--	
NBinsLocAlbCloudRedNoFill	INT16	--	0 - 22
HistLocAlbCloudRedNoFill	INT16	22	0 - 16,384
LoBndResAlbRed	FLOAT32	--	
HiBndResAlbRed	FLOAT32	--	
NBinsResAlbRed	INT16	--	0 - 22
HistResAlbRed	INT16	22	0 - 16,384
LoBndResAlbRedNoFill	FLOAT32	--	
HiBndResAlbRedNoFill	FLOAT32	--	
NBinsResAlbRedNoFill	INT16	--	0 - 22
HistResAlbRedNoFill	INT16	22	0 - 16,384
LoBndExpAlbRed	FLOAT32	--	
HiBndExpAlbRed	FLOAT32	--	
NBinsExpAlbRed	INT16	--	0 - 22
HistExpAlbRed	INT16	22	0 - 16,384
LoBndLocAlbNIR	FLOAT32	--	
HiBndLocAlbNIR	FLOAT32	--	
NBinsLocAlbNIR	INT16	--	0 - 22
HistLocAlbNIR	INT16	22	0 - 16,384
LoBndLocAlbNIRNoFill	FLOAT32	--	
HiBndLocAlbNIRNoFill	FLOAT32	--	
NBinsLocAlbNIRNoFill	INT16	--	0 - 22
HistLocAlbNIRNoFill	INT16	22	0 - 16,384
LoBndLocAlbClearNIR	FLOAT32	--	
HiBndLocAlbClearNIR	FLOAT32	--	
NBinsLocAlbClearNIR	INT16	--	0 - 22
HistLocAlbClearNIR	INT16	22	0 - 16,384
LoBndLocAlbClearNIRNoFill	FLOAT32	--	



Data Field Name	Data Type	Field Dimensions	Valid Range
HiBndLocAlbClearNIRNoFill	FLOAT32	--	
NBinsLocAlbClearNIRNoFill	INT16	--	0 - 22
HistLocAlbClearNIRNoFill	INT16	22	0 - 16,384
LoBndLocAlbCloudNIR	FLOAT32	--	
HiBndLocAlbCloudNIR	FLOAT32	--	
NBinsLocAlbCloudNIR	INT16	--	0 - 22
HistLocAlbCloudNIR	INT16	22	0 - 16,384
LoBndLocAlbCloudNIRNoFill	FLOAT32	--	
HiBndLocAlbCloudNIRNoFill	FLOAT32	--	
NBinsLocAlbCloudNIRNoFill	INT16	--	0 - 22
HistLocAlbCloudNIRNoFill	INT16	22	0 - 16,384
LoBndResAlbNIR	FLOAT32	--	
HiBndResAlbNIR	FLOAT32	--	
NBinsResAlbNIR	INT16	--	0 - 22
HistResAlbNIR	INT16	22	0 - 16,384
LoBndResAlbNIRNoFill	FLOAT32	--	
HiBndResAlbNIRNoFill	FLOAT32	--	
NBinsResAlbNIRNoFill	INT16	--	0 - 22
HistResAlbNIRNoFill	INT16	22	0 - 16,384
LoBndExpAlbNIR	FLOAT32	--	
HiBndExpAlbNIR	FLOAT32	--	
NBinsExpAlbNIR	INT16	--	0 - 22
HistExpAlbNIR	INT16	22	0 - 16,384
<b>BlockQaGlobalHist2: Block-level Histograms</b>			
LoBndResAlbTopBlue	FLOAT32	--	
HiBndResAlbTopBlue	FLOAT32	--	
NBinsResAlbTopBlue	INT16	--	0 - 22
HistResAlbTopBlue	INT16	22	0 - 16,384
LoBndResAlbSideBlueDf	FLOAT32	--	
HiBndResAlbSideBlueDf	FLOAT32	--	
NBinsResAlbSideBlueDf	INT16	--	0 - 22

Data Field Name	Data Type	Field Dimensions	Valid Range
HistResAlbSideBlueDf	INT16	22	0 - 16,384
LoBndResAlbSideBlueCf	FLOAT32	--	
HiBndResAlbSideBlueCf	FLOAT32	--	
NBinsResAlbSideBlueCf	INT16	--	0 - 22
HistResAlbSideBlueCf	INT16	22	0 - 16,384
LoBndResAlbSideBlueBf	FLOAT32	--	
HiBndResAlbSideBlueBf	FLOAT32	--	
NBinsResAlbSideBlueBf	INT16	--	0 - 22
HistResAlbSideBlueBf	INT16	22	0 - 16,384
LoBndResAlbSideBlueAf	FLOAT32	--	
HiBndResAlbSideBlueAf	FLOAT32	--	
NBinsResAlbSideBlueAf	INT16	--	0 - 22
HistResAlbSideBlueAf	INT16	22	0 - 16,384
LoBndResAlbSideBlueAn	FLOAT32	--	
HiBndResAlbSideBlueAn	FLOAT32	--	
NBinsResAlbSideBlueAn	INT16	--	0 - 22
HistResAlbSideBlueAn	INT16	22	0 - 16,384
LoBndResAlbSideBlueAa	FLOAT32	--	
HiBndResAlbSideBlueAa	FLOAT32	--	
NBinsResAlbSideBlueAa	INT16	--	0 - 22
HistResAlbSideBlueAa	INT16	22	0 - 16,384
LoBndResAlbSideBlueBa	FLOAT32	--	
HiBndResAlbSideBlueBa	FLOAT32	--	
NBinsResAlbSideBlueBa	INT16	--	0 - 22
HistResAlbSideBlueBa	INT16	22	0 - 16,384
LoBndResAlbSideBlueCa	FLOAT32	--	
HiBndResAlbSideBlueCa	FLOAT32	--	
NBinsResAlbSideBlueCa	INT16	--	0 - 22
HistResAlbSideBlueCa	INT16	22	0 - 16,384
LoBndResAlbSideBlueDa	FLOAT32	--	
HiBndResAlbSideBlueDa	FLOAT32	--	

Data Field Name	Data Type	Field Dimensions	Valid Range
NBinsResAlbSideBlueDa	INT16	--	0 - 22
HistResAlbSideBlueDa	INT16	22	0 - 16,384
LoBndResAlbTopGreen	FLOAT32	--	
HiBndResAlbTopGreen	FLOAT32	--	
NBinsResAlbTopGreen	INT16	--	0 - 22
HistResAlbTopGreen	INT16	22	0 - 16,384
LoBndResAlbSideGreenDf	FLOAT32	--	
HiBndResAlbSideGreenDf	FLOAT32	--	
NBinsResAlbSideGreenDf	INT16	--	0 - 22
HistResAlbSideGreenDf	INT16	22	0 - 16,384
LoBndResAlbSideGreenCf	FLOAT32	--	
HiBndResAlbSideGreenCf	FLOAT32	--	
NBinsResAlbSideGreenCf	INT16	--	0 - 22
HistResAlbSideGreenCf	INT16	22	0 - 16,384
LoBndResAlbSideGreenBf	FLOAT32	--	
HiBndResAlbSideGreenBf	FLOAT32	--	
NBinsResAlbSideGreenBf	INT16	--	0 - 22
HistResAlbSideGreenBf	INT16	22	0 - 16,384
LoBndResAlbSideGreenAf	FLOAT32	--	
HiBndResAlbSideGreenAf	FLOAT32	--	
NBinsResAlbSideGreenAf	INT16	--	0 - 22
HistResAlbSideGreenAf	INT16	22	0 - 16,384
LoBndResAlbSideGreenAn	FLOAT32	--	
HiBndResAlbSideGreenAn	FLOAT32	--	
NBinsResAlbSideGreenAn	INT16	--	0 - 22
HistResAlbSideGreenAn	INT16	22	0 - 16,384
LoBndResAlbSideGreenAa	FLOAT32	--	
HiBndResAlbSideGreenAa	FLOAT32	--	
NBinsResAlbSideGreenAa	INT16	--	0 - 22
HistResAlbSideGreenAa	INT16	22	0 - 16,384
LoBndResAlbSideGreenBa	FLOAT32	--	

Data Field Name	Data Type	Field Dimensions	Valid Range
HiBndResAlbSideGreenBa	FLOAT32	--	
NBinsResAlbSideGreenBa	INT16	--	0 - 22
HistResAlbSideGreenBa	INT16	22	0 - 16,384
LoBndResAlbSideGreenCa	FLOAT32	--	
HiBndResAlbSideGreenCa	FLOAT32	--	
NBinsResAlbSideGreenCa	INT16	--	0 - 22
HistResAlbSideGreenCa	INT16	22	0 - 16,384
LoBndResAlbSideGreenDa	FLOAT32	--	
HiBndResAlbSideGreenDa	FLOAT32	--	
NBinsResAlbSideGreenDa	INT16	--	0 - 22
HistResAlbSideGreenDa	INT16	22	0 - 16,384
LoBndResAlbTopRed	FLOAT32	--	
HiBndResAlbTopRed	FLOAT32	--	
NBinsResAlbTopRed	INT16	--	0 - 22
HistResAlbTopRed	INT16	22	0 - 16,384
LoBndResAlbSideRedDf	FLOAT32	--	
HiBndResAlbSideRedDf	FLOAT32	--	
NBinsResAlbSideRedDf	INT16	--	0 - 22
HistResAlbSideRedDf	INT16	22	0 - 16,384
LoBndResAlbSideRedCf	FLOAT32	--	
HiBndResAlbSideRedCf	FLOAT32	--	
NBinsResAlbSideRedCf	INT16	--	0 - 22
HistResAlbSideRedCf	INT16	22	0 - 16,384
LoBndResAlbSideRedBf	FLOAT32	--	
HiBndResAlbSideRedBf	FLOAT32	--	
NBinsResAlbSideRedBf	INT16	--	0 - 22
HistResAlbSideRedBf	INT16	22	0 - 16,384
LoBndResAlbSideRedAf	FLOAT32	--	
HiBndResAlbSideRedAf	FLOAT32	--	
NBinsResAlbSideRedAf	INT16	--	0 - 22
HistResAlbSideRedAf	INT16	22	0 - 16,384

Data Field Name	Data Type	Field Dimensions	Valid Range
LoBndResAlbSideRedAn	FLOAT32	--	
HiBndResAlbSideRedAn	FLOAT32	--	
NBinsResAlbSideRedAn	INT16	--	0 - 22
HistResAlbSideRedAn	INT16	22	0 - 16,384
LoBndResAlbSideRedAa	FLOAT32	--	
HiBndResAlbSideRedAa	FLOAT32	--	
NBinsResAlbSideRedAa	INT16	--	0 - 22
HistResAlbSideRedAa	INT16	22	0 - 16,384
LoBndResAlbSideRedBa	FLOAT32	--	
HiBndResAlbSideRedBa	FLOAT32	--	
NBinsResAlbSideRedBa	INT16	--	0 - 22
HistResAlbSideRedBa	INT16	22	0 - 16,384
LoBndResAlbSideRedCa	FLOAT32	--	
HiBndResAlbSideRedCa	FLOAT32	--	
NBinsResAlbSideRedCa	INT16	--	0 - 22
HistResAlbSideRedCa	INT16	22	0 - 16,384
LoBndResAlbSideRedDa	FLOAT32	--	
HiBndResAlbSideRedDa	FLOAT32	--	
NBinsResAlbSideRedDa	INT16	--	0 - 22
HistResAlbSideRedDa	INT16	22	0 - 16,384
LoBndResAlbTopNIR	FLOAT32	--	
HiBndResAlbTopNIR	FLOAT32	--	
NBinsResAlbTopNIR	INT16	--	0 - 22
HistResAlbTopNIR	INT16	22	0 - 16,384
LoBndResAlbSideNIRDf	FLOAT32	--	
HiBndResAlbSideNIRDf	FLOAT32	--	
NBinsResAlbSideNIRDf	INT16	--	0 - 22
HistResAlbSideNIRDf	INT16	22	0 - 16,384
LoBndResAlbSideNIRCF	FLOAT32	--	
HiBndResAlbSideNIRCF	FLOAT32	--	
NBinsResAlbSideNIRCF	INT16	--	0 - 22

Data Field Name	Data Type	Field Dimensions	Valid Range
HistResAlbSideNIRcf	INT16	22	0 - 16,384
LoBndResAlbSideNIRBf	FLOAT32	--	
HiBndResAlbSideNIRBf	FLOAT32	--	
NBinsResAlbSideNIRBf	INT16	--	0 - 22
HistResAlbSideNIRBf	INT16	22	0 - 16,384
LoBndResAlbSideNIRAf	FLOAT32	--	
HiBndResAlbSideNIRAf	FLOAT32	--	
NBinsResAlbSideNIRAf	INT16	--	0 - 22
HistResAlbSideNIRAf	INT16	22	0 - 16,384
LoBndResAlbSideNIRAn	FLOAT32	--	
HiBndResAlbSideNIRAn	FLOAT32	--	
NBinsResAlbSideNIRAn	INT16	--	0 - 22
HistResAlbSideNIRAn	INT16	22	0 - 16,384
LoBndResAlbSideNIRAA	FLOAT32	--	
HiBndResAlbSideNIRAA	FLOAT32	--	
NBinsResAlbSideNIRAA	INT16	--	0 - 22
HistResAlbSideNIRAA	INT16	22	0 - 16,384
LoBndResAlbSideNIRBa	FLOAT32	--	
HiBndResAlbSideNIRBa	FLOAT32	--	
NBinsResAlbSideNIRBa	INT16	--	0 - 22
HistResAlbSideNIRBa	INT16	22	0 - 16,384
LoBndResAlbSideNIRCa	FLOAT32	--	
HiBndResAlbSideNIRCa	FLOAT32	--	
NBinsResAlbSideNIRCa	INT16	--	0 - 22
HistResAlbSideNIRCa	INT16	22	0 - 16,384
LoBndResAlbSideNIRDa	FLOAT32	--	
HiBndResAlbSideNIRDa	FLOAT32	--	
NBinsResAlbSideNIRDa	INT16	--	0 - 22
HistResAlbSideNIRDa	INT16	22	0 - 16,384
LoBndResAlbSideCamsBlue	FLOAT32	--	
HiBndResAlbSideCamsBlue	FLOAT32	--	

Data Field Name	Data Type	Field Dimensions	Valid Range
NBinsResAlbSideCamsBlue	INT16	--	0 - 22
HistResAlbSideCamsBlue	INT16	22	0 - 16,384
LoBndResAlbSideCamsGreen	FLOAT32	--	
HiBndResAlbSideCamsGreen	FLOAT32	--	
NBinsResAlbSideCamsGreen	INT16	--	0 - 22
HistResAlbSideCamsGreen	INT16	22	0 - 16,384
LoBndResAlbSideCamsRed	FLOAT32	--	
HiBndResAlbSideCamsRed	FLOAT32	--	
NBinsResAlbSideCamsRed	INT16	--	0 - 22
HistResAlbSideCamsRed	INT16	22	0 - 16,384
LoBndResAlbSideCamsNIR	FLOAT32	--	
HiBndResAlbSideCamsNIR	FLOAT32	--	
NBinsResAlbSideCamsNIR	INT16	--	0 - 22
HistResAlbSideCamsNIR	INT16	22	0 - 16,384
<b><i>BlockQaGlobalHist3: Block-level Histograms</i></b>			
LoBndRlraKm	FLOAT32	--	
HiBndRlraKm	FLOAT32	--	
NbinsRlraKm	INT16	--	0 - 22
HistRlraKm	INT16	22	0 - 16,384
LoBndRlraKmNoFill	FLOAT32	--	
HiBndRlraKmNoFill	FLOAT32	--	
NbinsRlraKmNoFill	INT16	--	0 - 22
HistRlraKmNoFill	INT16	22	0 - 16,384
LoBndLiqCloudPhaseProb	FLOAT32	--	
HiBndLiqCloudPhaseProb	FLOAT32	--	
NBinsLiqCloudPhaseProb	INT16	--	0 - 22
HistLiqCloudPhaseProb	INT16	22	0 - 16,384
LoBndSunZenithIndex	FLOAT32	--	
HiBndSunZenithIndex	FLOAT32	--	
NBinsSunZenithIndex	INT16	--	0 - 22
HistSunZenithIndex	INT16	22	0 - 16,384

Data Field Name	Data Type	Field Dimensions	Valid Range
LoBndRelAzimuthAngleDf	FLOAT32	--	
HiBndRelAzimuthAngleDf	FLOAT32	--	
NBinsRelAzimuthAngleDf	INT16	--	0 - 22
HistRelAzimuthAngleDf	INT16	22	0 - 16,384
LoBndRelAzimuthAngleCf	FLOAT32	--	
HiBndRelAzimuthAngleCf	FLOAT32	--	
NBinsRelAzimuthAngleCf	INT16	--	0 - 22
HistRelAzimuthAngleCf	INT16	22	0 - 16,384
LoBndRelAzimuthAngleBf	FLOAT32	--	
HiBndRelAzimuthAngleBf	FLOAT32	--	
NBinsRelAzimuthAngleBf	INT16	--	0 - 22
HistRelAzimuthAngleBf	INT16	22	0 - 16,384
LoBndRelAzimuthAngleAf	FLOAT32	--	
HiBndRelAzimuthAngleAf	FLOAT32	--	
NBinsRelAzimuthAngleAf	INT16	--	0 - 22
HistRelAzimuthAngleAf	INT16	22	0 - 16,384
LoBndRelAzimuthAngleAn	FLOAT32	--	
HiBndRelAzimuthAngleAn	FLOAT32	--	
NBinsRelAzimuthAngleAn	INT16	--	0 - 22
HistRelAzimuthAngleAn	INT16	22	0 - 16,384
LoBndRelAzimuthAngleAa	FLOAT32	--	
HiBndRelAzimuthAngleAa	FLOAT32	--	
NBinsRelAzimuthAngleAa	INT16	--	0 - 22
HistRelAzimuthAngleAa	INT16	22	0 - 16,384
LoBndRelAzimuthAngleBa	FLOAT32	--	
HiBndRelAzimuthAngleBa	FLOAT32	--	
NBinsRelAzimuthAngleBa	INT16	--	0 - 22
HistRelAzimuthAngleBa	INT16	22	0 - 16,384
LoBndRelAzimuthAngleCa	FLOAT32	--	
HiBndRelAzimuthAngleCa	FLOAT32	--	
NBinsRelAzimuthAngleCa	INT16	--	0 - 22



Data Field Name	Data Type	Field Dimensions	Valid Range
HistRelAzimuthAngleCa	INT16	22	0 - 16,384
LoBndRelAzimuthAngleDa	FLOAT32	--	
HiBndRelAzimuthAngleDa	FLOAT32	--	
NBinsRelAzimuthAngleDa	INT16	--	0 - 22
HistRelAzimuthAngleDa	INT16	22	0 - 16,384
LoBndBrightnessIndexDf	FLOAT32	--	
HiBndBrightnessIndexDf	FLOAT32	--	
NBinsBrightnessIndexDf	INT16	--	0 - 22
HistBrightnessIndexDf	INT16	22	0 - 16,384
LoBndBrightnessIndexCf	FLOAT32	--	
HiBndBrightnessIndexCf	FLOAT32	--	
NBinsBrightnessIndexCf	INT16	--	0 - 22
HistBrightnessIndexCf	INT16	22	0 - 16,384
LoBndBrightnessIndexBf	FLOAT32	--	
HiBndBrightnessIndexBf	FLOAT32	--	
NBinsBrightnessIndexBf	INT16	--	0 - 22
HistBrightnessIndexBf	INT16	22	0 - 16,384
LoBndBrightnessIndexAf	FLOAT32	--	
HiBndBrightnessIndexAf	FLOAT32	--	
NBinsBrightnessIndexAf	INT16	--	0 - 22
HistBrightnessIndexAf	INT16	22	0 - 16,384
LoBndBrightnessIndexAn	FLOAT32	--	
HiBndBrightnessIndexAn	FLOAT32	--	
NBinsBrightnessIndexAn	INT16	--	0 - 22
HistBrightnessIndexAn	INT16	22	0 - 16,384
LoBndBrightnessIndexAa	FLOAT32	--	
HiBndBrightnessIndexAa	FLOAT32	--	
NBinsBrightnessIndexAa	INT16	--	0 - 22
HistBrightnessIndexAa	INT16	22	0 - 16,384
LoBndBrightnessIndexBa	FLOAT32	--	
HiBndBrightnessIndexBa	FLOAT32	--	

Data Field Name	Data Type	Field Dimensions	Valid Range
NBinsBrightnessIndexBa	INT16	--	0 - 22
HistBrightnessIndexBa	INT16	22	0 - 16,384
LoBndBrightnessIndexCa	FLOAT32	--	
HiBndBrightnessIndexCa	FLOAT32	--	
NBinsBrightnessIndexCa	INT16	--	0 - 22
HistBrightnessIndexCa	INT16	22	0 - 16,384
LoBndBrightnessIndexDa	FLOAT32	--	
HiBndBrightnessIndexDa	FLOAT32	--	
NBinsBrightnessIndexDa	INT16	--	0 - 22
HistBrightnessIndexDa	INT16	22	0 - 16,384
LoBndClearSkyCamsBlue	FLOAT32	--	
HiBndClearSkyCamsBlue	FLOAT32	--	
NBinsClearSkyCamsBlue	INT16	--	0 - 22
HistClearSkyCamsBlue	INT16	22	0 - 16,384
LoBndClearSkyCamsGreen	FLOAT32	--	
HiBndClearSkyCamsGreen	FLOAT32	--	
NBinsClearSkyCamsGreen	INT16	--	0 - 22
HistClearSkyCamsGreen	INT16	22	0 - 16,384
LoBndClearSkyCamsRed	FLOAT32	--	
HiBndClearSkyCamsRed	FLOAT32	--	
NBinsClearSkyCamsRed	INT16	--	0 - 22
HistClearSkyCamsRed	INT16	22	0 - 16,384
LoBndClearSkyCamsNIR	FLOAT32	--	
HiBndClearSkyCamsNIR	FLOAT32	--	
NBinsClearSkyCamsNIR	INT16	--	0 - 22
HistClearSkyCamsNIR	INT16	22	0 - 16,384

## 8.0 MISR LEVEL 2 AEROSOL/SURFACE PRODUCT

### 8.1 MISR LEVEL 2 A/S PRODUCT GRANULE NAMES

**MISR Level 2 Aerosol/Surface Products** are composed of the three granules listed below (Table 8-1).

**Table 8-1: MISR Level 2 Aerosol/Surface File Granule Names.**

<b>MISR LEVEL 2 A/S FILE GRANULE NAME</b>	<b>ESDT Name</b>	<b>Section</b>
MISR_AM1_AS_AEROSOL_Pnnn_Onnnnnn_Fnn_nnnn.hdf	MIL2ASAE	8.4
MISR_AM1_AS_LAND_Pnnn_Onnnnnn_Fnn_nnnn.hdf	MIL2ASLS	8.5
MISR_AM1_AS_OCEAN_Pnnn_Onnnnnn_Fnn_nnnn.hdf	MIL2ASOS	8.6

### 8.2 MISR LEVEL 2 A/S PRODUCT GRANULE BRIEF DESCRIPTIONS

The Aerosol/Surface Subsystem Software provides for the end-to-end generation of the MISR Level 2 Aerosol/Surface Product. The product generation occurs in several stages.

Initially, the Level 1B2 high-resolution data samples are averaged to the resolutions required by the Aerosol and Surface retrieval algorithms. The averaged radiances are then normalized to an Earth-Sun distance of 1 AU, converted to equivalent reflectances, corrected for out-of-band radiance, and corrected for ozone absorption. The 1.1 km x 1.1 km subregions are then screened for contamination from sources such as clouds, cloud shadows, sun glitter over water, topographically complex terrain, and topographically shadowed regions.

Next, these corrected equivalent reflectances from selected subregions contained within the 17.6 x 17.6 km region are compared to model equivalent reflectances obtained from the SMART (Simulated MISR Ancillary Radiative Transfer) dataset to obtain the best estimate of the atmospheric aerosol properties. The model equivalent reflectances correspond to various aerosol types and amounts, sun and view geometries, surface types and meteorological conditions. A subset of appropriate SMART models is chosen based upon ambient meteorological conditions, sun and view angles, and surface type. Constraints on optical depth are also computed from the minimum corrected equivalent reflectances within a region. Over dark water regions, a set of 4  $\chi^2$  minimization tests are performed, comparing model equivalent reflectances, calculated assuming an ocean surface boundary, and the MISR regional equivalent reflectances. The aerosol models which result in the lowest residuals indicate the column aerosol parameters that best characterize the region. Over heterogeneous land regions, the minimization is performed in a slightly different manner, due to the variability of the surface reflectance. First, view angle-dependent empirical orthogonal functions (EOFs), computed from the corrected MISR subregional equivalent reflectances, are used in an expansion of the surface-reflected component of the equivalent reflectances at the top of the atmosphere. This expansion term plus the model atmospheric path equivalent reflectances (i.e., TOA

equivalent reflectances for a black surface) are then compared to the MISR regional TOA equivalent reflectances. The model which results in the lowest residuals (based on a least squares determination of the EOF coefficients in the expansion term) indicates the column aerosol parameters that best characterize the region. When the surface (ocean or land) is not directly observable because of an optically thick atmospheric condition due to an unusually large amount of atmospheric contamination (e.g. dust or volcanic plumes), then the model atmospheric path equivalent reflectances are compared directly to the MISR regional equivalent reflectances, using the 4  $\chi^2$  minimization tests.

A subregional surface retrieval is conducted on regions for which valid land aerosol retrievals exist. The retrieval is performed using the corrected equivalent reflectances, retrieved aerosol parameters, and auxiliary information from the SMART dataset. The spectral and PAR-integrated bihemispherical reflectance (BHR) and directional hemispherical reflectance (DHR) are retrieved, along with the spectral hemispherical-directional reflectance factors (HDRF) and bidirectional reflectance factors (BRF) and BRF model parameters, for all valid land and inland water subregions. Subregional surface classification and leaf area index (LAI) and subregional FPAR (fraction of photosynthetically-active radiation) are also determined. Subregional variability is also calculated for land regions. For tropical ocean regions near the equator with valid aerosol retrievals, the water-leaving equivalent reflectance at the B-camera viewing angle is also retrieved, after correcting the MISR equivalent reflectances for sun glitter and whitecaps. Two different methods of atmospheric correction are used, and both results are used to determine a corresponding phytoplankton pigment concentration.

**Table 8-2: Surface-Atmosphere Radiation Interaction Terms<sup>a</sup>**

Term	Name	Definition	Units
BRDF	Bidirectional Reflectance Distribution Function	surface-leaving radiance divided by incident irradiance from a single direction	ster <sup>-1</sup>
BRF	Bidirectional Reflectance Factor	surface-leaving radiance divided by radiance from a Lambert reflector illuminated from a single direction	n/a
HDRF	Hemispherical-Directional Reflectance Factor	surface-leaving radiance divided by radiance from a Lambert reflector with same illumination	n/a
DHR	Directional-Hemispherical Reflectance	radiant exitance divided by irradiance under illumination from a single direction	n/a
BHR	Bi-Hemispherical Reflectance	radiant exitance divided by irradiance under same illumination conditions	n/a
L	Radiance	radiant energy per time-area-solid angle	W/m <sup>2</sup> -ster
E	Irradiance	radiant energy flux	W/m <sup>2</sup>
M	Radiant Exitance	radiant energy flux leaving a surface	W/m <sup>2</sup>

a. Note: Quantities in this table are computed for the conditions prevailing at the time and place of the measurement. For example, there is crosstrack and alongtrack variation in the solar zenith and azimuth angles used to determine BRF. The angles used depend upon the precise time that the region was viewed by MISR.

### 8.3 MISR LEVEL 2 A/S PRODUCT GRANULE DATA SETS

The product will be produced as 3 separate ESDTs. The Aerosol, Land Surface, and Ocean Surface files each are stored as one physical file, as shown in Table 8-3. Each physical file is in the HDF-EOS Grid “stacked-block” format and each contains two or three HDF-EOS Grid datasets, corresponding to parameters at 1.1 km spatial resolution, at 17.6 km spatial resolution, and at 70.4 km spatial resolution. The grid datasets will have the usual x and y dimensions, as well as a third dimension corresponding to the SOM block number. The x and y dimensions will correspond to the the number of 1.1 km<sup>2</sup> subregions, 17.6 km<sup>2</sup> regions, or 70.4 km<sup>2</sup> domains in the along-track and cross-track directions. For the files containing aerosol parameters and land surface parameters, the number of blocks in the grid dataset will correspond exactly to the number and location of blocks in the Level 1B2 and Level 2 TOA/Cloud Product files for the same orbit. Also, the blocks that make up the Aerosol/Surface Product files are a direct subset of the blocks that make up the Ancillary Geographic Product. For the ocean surface parameters, there will only be 6 blocks present, because the parameters are only reported along a 600 km belt around the equator.

**Table 8-3: Level 2 Aerosol/Surface Product Files and Grid Datasets.**

<b>ESDT Shortname</b>	<b>Local Granule ID<sup>a</sup></b>	<b>Grid Dataset Name</b>
MIL2ASAE	MISR_AM1_AS_AEROSOL_P $nnn$ _O $nnnnnn$ _F $nn$ _n $nnn$ .hdf	SubregParamsAer
		RegParamsAer
		DomParamsAer
MIL2ASLS	MISR_AM1_AS_LAND_P $nnn$ _O $nnnnnn$ _F $nn$ _n $nnn$ .hdf	SubregParamsLnd
		RegParamsLnd
MIL2ASOS	MISR_AM1_AS_OCEAN_P $nnn$ _O $nnnnnn$ _F $nn$ _n $nnn$ .hdf	SubregParamsOcn
		RegParamsOcn

a.  $Pnnn$  corresponds to the orbit path,  $Onnnnnn$  corresponds to the absolute orbit number,  $Fnn$  is the file format version number, and  $n $nnn$$  is the file content version number.

## 8.4 MISR LEVEL 2 MIL2ASAE AEROSOL PRODUCT

### 8.4.1 File Metadata Description

**Table 8-4: File Metadata for Aerosol Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version identifier for AGP	INT32	N/A	2
DID_version_id	Version identifier for DID (DTED [Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid (m)	FLOAT64	meters	WGS84 ellipsoid (6.3781370E+06)
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84 ellipsoid (6.6943480E-03)
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	Not used.
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	Not used.
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	Not used.
SOM_parameters.som_orbit.nrev	Number of revolutions per ground track repeat cycle	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit (m)	FLOAT64	meters	7.0780408E+06

File Metadata Field Name	Definition	Data Type	Units	Valid Range
SOM_parameters.som_orbit.i	Inclination of orbit (radians)	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	6.8666667E-02
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0 (radians)	FLOAT64	radians	-2pi to 2pi
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	+/- 12 million
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	+/- 12 million
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file was obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-6  0 if data is global mode
Local_mode_site_name	The geographical name of the first local mode site contained in this file.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal

#### 8.4.2 Vdata Description

HDF vdatas are used in the aerosol product as “flag legends,” which map flag values to their defini-

tions. Flag legend vdatas consist of two fields called "Value" and "Description." The "Value" field is of type UINT8, and consists of one element. The "Description" field is of type CHAR8, and consists of 80 elements. There is one record per flag value. The flag legends are summarized below. To obtain the actual values of the flag values and descriptions, read the vdatas in the file, or refer to Tables 8-9 through 8-14 in this document.

**Table 8-5: Aerosol Product File Vdata Summary**

Vdata Name	Records	Description
RetrAppMask Flag Legend	One per flag value	Map flag values to descriptions
OptDepthUpBdCam Flag Legend	One per flag value	Map flag values to descriptions
OptDepthUpBdBand Flag Legend	One per flag value	Map flag values to descriptions
AlgTypeFlag Flag Legend	One per flag value	Map flag values to descriptions
RegClassInd Flag Legend	One per flag value	Map flag values to descriptions
CamRainbow Flag Legend	One per flag value	Map flag values to descriptions
AerRetrSuccFlag Flag Legend	One per flag value	Map flag values to descriptions
ColOzAbundSrc Flag Legend	One per flag value	Map flag values to descriptions
SfcWindspSrc Flag Legend	One per flag value	Map flag values to descriptions
SfcPresSrc Flag Legend	One per flag value	Map flag values to descriptions
RegAltPresSrc Flag Legend	One per flag value	Map flag values to descriptions
SfcAirTempSrc Flag Legend	One per flag value	Map flag values to descriptions
RegAltAirTempSrc Flag Legend	One per flag value	Map flag values to descriptions
ColPrecipWaterSrc Flag Legend	One per flag value	Map flag values to descriptions
RelHumidProfileSrc Flag Legend	One per flag value	Map flag values to descriptions
StratAerFlag Flag Legend	One per flag value	Map flag values to descriptions
StratAerOptDepthSrc Flag Legend	One per flag value	Map flag values to descriptions
CirrFlag Flag Legend	One per flag value	Map flag values to descriptions
CirrOptDepthSrc Flag Legend	One per flag value	Map flag values to descriptions



### 8.4.3 Per-grid Metadata Description

**Table 8-6: Per-grid Metadata for Aerosol Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	1100, 17600, 70400
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	1100, 17600, 70400
Block_size.size_x	Block x dimension	INT32	128, 8, 2
Block_size.size_y	Block y dimension	INT32	512, 32, 8

Aerosol Grid Metadata	Definition	Data Type	Valid Values
<i>Aerosol SubregParams (1.1 km x 1.1 km)</i>			

### 8.4.4 Per-block Metadata Description

**Table 8-7: Per-block Metadata for Aerosol Product Files.**

PerBlockMetadataCommon	Definition	Data Type	Valid Values
Block_number	Current block number	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	

PerBlockMetadataCommon	Definition	Data Type	Valid Values
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

Common Per Block Metadata	Definition	Data Type	Valid Values
Geometric DQI	Geometric Data Quality Indicator copied from the L1B2 Terrain-projected parameter file.	FLOAT64	-1 to 1

PerBlockMetadataTime	Definition	Data Type	Valid Values
BlockCenterTime	TAI time of the lower right pixel of the center four pixels in the current block, converted to UTC time, and displayed in CCSDS ASCII time code A format. Note: BlockCenterTime may be incorrect for the first and last blocks processed in a swath.	CHAR8 * 28	

#### 8.4.5 Per-line Metadata Description

None.

#### 8.4.6 Per-pixel Metadata Description

None.

#### 8.4.7 Grid Data Set Descriptions

This section lists the parameters which make up the aerosol grid data sets, including a brief description of each parameter and its format. If a parameter is described in the MISR Level 2 Aerosol Retrieval Algorithm Theoretical Basis (ATB) document [ref. 12 in section 1.3], a cross-reference to the corresponding ATB section or equation is provided.

In order to minimize storage for the Aerosol/Surface Product, some parameters will be packed so that each bit represents a logical value, or some number of bits within a byte or word represent a flag value. To facilitate the interpretation of scientific data, floating point values are not scaled.

Floating point values and integer values may take on a flag value indicating invalid data. Currently, there is a flag value of -9999.0, representing missing floating point data; a flag value of 253, representing missing data for unsigned 8-bit integers; a flag value of 65533, representing missing data for unsigned 16-bit integers; and a flag value of -32768, representing missing data for 16-bit signed integers. In addition, there are flag values representing underflow and overflow. There is a flag value of 254, representing underflow for unsigned 8-bit integers; a flag value of 255, representing overflow for unsigned 8-bit integers; a flag value of 65534, representing underflow for unsigned 16-bit integers; a flag value of 65535, representing overflow for unsigned 16-bit integers; a flag value of -32767, representing underflow for 16-bit signed integers; and a flag value of 32767, representing overflow for 16-bit signed integers. Note that we may later add more flag values to distinguish other reasons that the data are missing (e.g. never computed, arithmetic error, etc.).

**Table 8-8: Aerosol Product Field Dimension Descriptions.**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	- for the Aerosol and Land Surface files this can vary, with a typical value being approximately 140 - for the Ocean Surface file this will be 6
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	128 for 1.1 km parameters or 8 for 17.6 km parameters or 2 for 70.4 km parameters
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	512 for 1.1 km parameters or 32 for 17.6 km parameters or 8 for 70.4 km parameters
NCamDim	<i>NCamDim</i> is the number of MISR cameras.	9 where 1 = D forward 2 = C forward 3 = B forward 4 = A forward 5 = A nadir 6 = A aftward 7 = B aftward 8 = C aftward 9 = D aftward

**Table 8-8: Aerosol Product Field Dimension Descriptions. (Continued)**

Dimension	Description	Valid Values
NBandDim	<i>NBandDim</i> is the number of bands in a MISR camera.	4 where 1 = Blue 2 = Green 3 = Red 4 = NIR
NParticleTypeDim	<i>NParticleTypeDim</i> is the number of classifications of aerosol particles by size and shape.	5 where 1 = Small (radius < 0.35 micron) 2 = Medium (radius 0.35 to 0.7 micron) 3 = Large ( radius > 0.7 micron) 4 = Spherical shape 5 = Non-spherical shape
NAerMixtureDim <sup>a</sup>	<i>NAerMixtureDim</i> is the maximum number of successful aerosol mixtures to report.	1-100
NRelHumDim	<i>NRelHumDim</i> is the number of levels in the relative humidity profile.	36
NSSABinDim	<i>NSSABinDim</i> is the number of histogram bins used to group aerosol models by single-scatter albedo (SSA).	6 where 1 = SSA between 0.70 and 0.75 2 = SSA between 0.75 and 0.80 3 = SSA between 0.80 and 0.85 4 = SSA between 0.85 and 0.90 5 = SSA between 0.90 and 0.95 6 = SSA between 0.95 and 1.0
NNonSphericalFractionBinDim	<i>NNonSphericalFractionBinDim</i> is the number of histogram bins used to group aerosol models by non-spherical fractional amount.	6 where non-spherical fractional amount for each bin is as follows: 1 = amount between 0 and 10% 2 = amount between 10 and 30% 3 = amount between 30 and 50% 4 = amount between 50 and 70% 5 = amount between 70 and 90% 6 = amount between 90 and 100%

a. The aerosol mixtures referred to by this dimension are those in the Mixture Product, described in Section 9.0 of this document, "MISR Ancillary MIANACP Mixture Product." The names and properties of all aerosol mixtures are contained in the Mixture Product. Beginning with Aerosol Product version 16, the content of the Mixture Product is copied into the Aerosol Product, in a Vgroup named "Mixture Information".

**Table 8-9: Aerosol Product Grid Dataset Descriptions, part 1**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Grid SubregParamsAer (Spatial Resolution: 1.1 km x 1.1 km, XDim = 128, YDim = 512)</b>					

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RetrAppMask</b> Retrieval applicability mask (ATB sec. 3.3.8)	XDim, YDim, NBandDim, NCamDim	UINT8	n/a	n/a	0 = clear 1 = missing data 2 = poor quality 3 = glitter-con- taminated 4 = topo. obscured 5 = topo. shadowed 6 = topo. complex 7 = cloudy 8 = cloud shadow 9 = not smooth 10 = not correlated 11 = region not suitable 12 = optically thick 253 = fill
<b>Grid RegParamsAer (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
<b>RegBestEstimateSpectralOptDepth</b> Best estimate of spectral optical depth for the region (ATB sec. 3.5.8.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateSpectralOptDepthUnc</b> Uncertainty in best estimate of spectral optical depth for the region (ATB sec. 3.5.8.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateAngstromExponent</b> Best estimate of Angstrom exponent for the region (ATB sec. 3.5.10.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateAngstromExponentUnc</b> Uncertainty in best estimate of Angstrom exponent for the region (ATB sec. 3.5.10.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateSpectralISSA</b> Best estimate of spectral single scattering albedo for the region (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegBestEstimateSpectralSSA Unc</b> Uncertainty in best estimate of spectral single scattering albedo for the region (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateSpectralOptD epthFraction</b> Best estimate of aerosol spectral optical depth fraction binned by size (small, medium, large) and shape (spherical, non-spherical), for the region (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateSpectralOptD epthFractionUnc</b> Uncertainty in best estimate of aerosol spectral optical depth fraction binned by size (small, medium, large) and shape (spherical, non-spherical), for the region (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateNumberFract ion</b> Best estimate of aerosol particle fractional number binned by particle size (small, medium, large) and shape (spherical, non- spherical), for the region (ATB sec. 3.5.10.2)	XDim, YDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateNumberFract ionUnc</b> Uncertainty in best estimate of aerosol particle fractional number binned by particle size (small, medium, large) and shape (spherical, non-spherical), for the region (ATB sec. 3.5.10.2)	XDim, YDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill

<b>Field Name</b> Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegBestEstimateVolumeFraction</b> Best estimate of aerosol particle fractional volume binned by aerosol particle size (small, medium, large) and shape (spherical, non-spherical), for the region <i>(ATB sec. 3.5.10.2)</i>	XDim, YDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegBestEstimateVolumeFractionUnc</b> Uncertainty in best estimate of aerosol particle fractional volume binned by aerosol particle size (small, medium, large) and shape (spherical, non-spherical), for the region <i>(ATB sec. 3.5.10.2)</i>	XDim, YDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegBestEstimateQA</b> Criteria for establishing best estimates and uncertainty (ATB sec. 3.5.8.2)	XDim, YDim	UINT8	n/a	n/a	0 = there was 1 successful aerosol mixture; set RegBestEstimateX to value for the single successful mixture; set RegBestEstimateXUnc to fill, except RegBestEstimateSpectralOptDepthUnc, which is set to value of OptDepthUncPerMixture for the successful mixture 1 = there was >1 successful aerosol mixture; set RegBestEstimateX and RegBestEstimateXUnc to mean and standard deviation of X over all successful mixtures 2 = estimates and uncertainties are calculated by averaging successful mixtures in neighboring regions 3 = there were no successful mixtures; set all RegBestEstimateX and RegBestEstimateXUnc to fill 253 = fill



Table 8-10: Aerosol Product Grid Dataset Descriptions, part 2

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Grid RegParamsAer (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
<b>RegMeanSpectralOptDepth</b> Regional mean spectral optical depth, computed from optical depths of successful aerosol mixtures (ATB eq. 82)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegMedianSpectralOptDepth</b> Regional median spectral optical depth, computed from optical depths of successful aerosol mixtures (ATB eq. 82)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegStDevSpectralOptDepth</b> Standard deviation of spectral optical depths of successful aerosol mixtures (ATB eq. 82a)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegWgtMeanSpectralOptDepth</b> Mean of spectral optical depths retrieved for all aerosol mixtures, each weighted by the inverse of the chi-square fitting parameter for that mixture (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land) (ATB eq. 82)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegWgtStDevSpectralOptDepth</b> Standard deviation of spectral optical depths retrieved for all aerosol mixtures, each weighted by the inverse of the chi-square fitting parameter for that mixture (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land) (ATB eq. 82a)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegLowestResidSpectralOptDepth</b> Optical depth with smallest chi-square fitting parameter (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land), out of all aerosol mixtures (ATB eq. 82)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegMeanAngstromExponent</b> Regional mean Angstrom exponent, computed from Angstrom exponents of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegStDevAngstromExponent</b> Standard deviation of Angstrom exponents of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegLowestResidAngstromExponent</b> Angstrom exponent with smallest chi-square fitting parameter (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land), out of all aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegLowestResidChisq</b> Smallest value of chi-square fitting parameter (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land), out of all aerosol mixtures (ATB sec. 3.5.5.2.1, 3.5.5.2.2, 3.5.5.2.3)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegLowestResidCombinedResidual</b> Smallest value of combined residual fitting parameter (a function of retrieval chi-squares and optical depth uncertainty), out of all aerosol mixtures (ATB sec. 3.5.5.2.1, 3.5.5.2.2, 3.5.5.2.3)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegLowestResidMixture</b> Aerosol mixture with smallest chi-square fitting parameter (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land), out of all aerosol mixtures (ATB sec. 3.5.5.2.1, 3.5.5.2.2, 3.5.5.2.3)	XDim, YDim	UINT8	n/a	n/a	253 = fill
<b>RegLowestResidMixtureEqRef</b> Aerosol mixture equivalent reflectances for the mixture identified by RegLowestResidMixture at the optical depth corresponding to RegLowestResidSpectralOptDepth (ATB sec. 3.5.5.2.1, 3.5.5.2.2, 3.5.5.2.3)	XDim, YDim, NBandDim, NCamDim	UINT8	n/a	n/a	253 = fill

**Table 8-11: Aerosol Product Grid Dataset Descriptions, part 3**

Field Name Parameter Description	Dimension List <sup>a</sup>	Number Type	Units	Transformation	Flag Values
<b>Grid RegParamsAer (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					

Field Name Parameter Description	Dimension List <sup>a</sup>	Number Type	Units	Transformation	Flag Values
<b>AlgTypeFlag</b> Algorithm type flag (ATB sec. 3.4.2.2, 3.4.4.2, 3.4.6.2)	XDim, YDim	UINT8	n/a	n/a	0 = no retrieval 1 = dark water retrieval 2 = OTA (optically thick atmosphere) retrieval 3 = heterogeneous surface retrieval 8 = homogeneous surface retrieval 253 = fill
<b>RegClassInd</b> Regional classification indicator (ATB sec. 3.3.1)	XDim, YDim	UINT8	n/a	n/a	0 = clear region 1 = solar oblique region 2 = topo. complex region 3 = cloudy region 4 = no valid data in region 253 = fill

Field Name Parameter Description	Dimension List <sup>a</sup>	Number Type	Units	Transformation	Flag Values
<b>AerRetrSuccFlag</b> Aerosol retrieval success flag (ATB sec. 3.5.8.2)	XDim, YDim	UINT8	n/a	n/a	1 = no success matches with aerosol mixtures 2 = no success matches with aerosol mixtures (NO LONGER USED) 3 = aerosol retrieval algorithm failure 4 = aerosol retrieval not attempted 5 = insufficient data to perform aerosol retrieval (NO LONGER USED) 6 = inadequate scene contrast to perform aerosol retrieval (NO LONGER USED) 7 = successful aerosol retrieval 8 = unsuccessful aerosol retrieval over land; default optical depth value being reported 253 = fill
<b>NumSuccAerMixture</b> Number of successful mixtures (was previously <b>NumSuccAerModel</b> ) (ATB sec. 3.5.8)	XDim, YDim	UINT8	n/a	n/a	253 = fill
<b>NumCamUsed</b> Number of cameras in each band which meet the minimum number of subregions constraint specified in the aerosol science configuration file. (was previously <b>NumClearCam</b> ) (ATB sec. 3.4.3)	XDim, YDim, NBandDim	UINT8	n/a	n/a	253 = fill

Field Name Parameter Description	Dimension List <sup>a</sup>	Number Type	Units	Transformation	Flag Values
<b>CamRainbowFlag</b> Camera rainbow flag (ATB sec. 3.3.8.2.9)	XDim, YDim	UINT16	n/a	1 bit per camera stored. First bit is D_forward camera; ninth bit is D_aft camera. Remainder of bits are zero.  $D\_for = (\text{CamRainbowFlag} \& 1)^b$ $C\_for = (\text{CamRainbowFlag} \& 2) \gg 1$ $B\_for = (\text{CamRainbowFlag} \& 4) \gg 2$ $A\_for = (\text{CamRainbowFlag} \& 8) \gg 3$ $A\_nadir = (\text{CamRainbowFlag} \& 16) \gg 4$ $A\_aft = (\text{CamRainbowFlag} \& 32) \gg 5$ $B\_aft = (\text{CamRainbowFlag} \& 64) \gg 6$ $C\_aft = (\text{CamRainbowFlag} \& 128) \gg 7$ $D\_aft = (\text{CamRainbowFlag} \& 256) \gg 8$	0 = rainbow-free (one-bit flag) 1 = rainbow-influenced (one-bit flag)  0 = fill (16-bit flag)
<b>NumEofUsed</b> $N_{\max(l)}$ , or number of EOFs (empirical orthogonal functions) over a heterogeneous surface which meet the constraint in ATB Eq. 75 (ATB sec. 3.5.5.2.3)	XDim, YDim, NBandDim	UINT8	n/a	n/a	253 = fill
<b>NumAcceptHetOptDepth</b> Number of EOFs (empirical orthogonal functions) over a heterogeneous surface computed as the maximum value of NumEofUsed and also satisfying aerosol model-dependent constraints (ATB sec. 3.5.5.2.3)	XDim, YDim, NAerMixtureDim	UINT8	n/a	n/a	253 = fill
<b>HetContrast</b> Heterogeneous surface contrast measure (was previously <b>HetLandContrast</b> ) (ATB eq. 31)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List <sup>a</sup>	Number Type	Units	Transformation	Flag Values
<b>RegSfcRetrOptDepth</b> Aerosol optical depth to be used in the land surface retrieval (ATB sec. 3.5.7.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegSfcRetrOptDepthUnc</b> <i>Uncertainty in aerosol optical depth to be used in the land surface retrieval</i> (NOT YET IMPLEMENTED - CURRENTLY SET TO FILL VALUE OR ZERO) (ATB sec. 3.5.7.2)	<i>XDim, YDim</i>	<i>FLOAT32</i>	<i>n/a</i>	<i>n/a</i>	<i>-9999 = fill</i>
<b>RegSfcRetrMixture</b> Aerosol mixture to be used in the land surface retrieval (ATB sec. 3.5.7)	XDim, YDim	UINT8	n/a	n/a	253 = fill 252 = surface retrieval used an aggregate of all successful mixtures; see <b>AerRetrSuccFlag PerMixture</b> for the successful mixtures

Field Name Parameter Description	Dimension List <sup>a</sup>	Number Type	Units	Transformation	Flag Values
<b>RegSfcRetrAlgTypeFlag</b> Algorithm type used to compute aerosol mixture and optical depth (ATB sec. 3.5.7)	XDim, YDim	UINT8	n/a	n/a	0 = no retrieval 1 = dark water retrieval 2 = OTA (optically thick atmosphere) retrieval 3 = heterogeneous surface retrieval 4 = no successful retrieval; optical depth from "low optical depth" default 5 = no successful retrieval; optical depth from "optical depth in previous region" default 6 = no successful retrieval; optical depth from "Rayleigh scattering only" default (NO LONGER USED) 7 = no successful retrieval; optical depth from "optical depth upper bound algorithm" default 8 = homogeneous surface retrieval 253 = fill
<b>NumAcceptSubr</b> Number of subregions of acceptable quality for retrieval (ATB sec. 3.5.1.2)	XDim, YDim, NBandDim, NCamDim	UINT16	n/a	n/a	65533 = fill
<b>RegEqRefl</b> Observed regional equivalent reflectances which were used in the aerosol retrieval (ATB sec. 3.5.1.2)	XDim, YDim, NBandDim, NCamDim	FLOAT32	n/a	n/a	-9999 = fill



Field Name Parameter Description	Dimension List <sup>a</sup>	Number Type	Units	Transformation	Flag Values
<b>RegEqRefIStDev</b> Standard deviation of observed regional equivalent reflectances (ATB sec. 3.5.1.2)	XDim, YDim, NBandDim, NCamDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegEqRefIDarkest</b> Darkest weighted mean equivalent reflectances in a region (ATB sec. 3.4.4.2)	XDim, YDim, NBandDim, NCamDim	FLOAT32	n/a	n/a	-9999 = fill

a. Fields dimensioned by NAerMixtureDim correspond to the aerosol mixtures described in Section 9.10 of this document. The aerosol mixtures names and properties are contained in the Mixture Product, which must be ordered separately from the Aerosol Product.

b. '&' refers to the bitwise AND operator, and '>>' refers to the right shift operator

**Table 8-12: Aerosol Product Grid Dataset Descriptions, part 4**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Grid RegParamsAer (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
<b>SolZenAng</b> Solar zenith angle (ATB sec. 3.2.1.4)	XDim, YDim	FLOAT32	degrees	n/a	-9999 = fill
<b>ViewZenAng</b> View zenith angle (9 cameras) (ATB sec. 3.2.1.4)	XDim, YDim, NCamDim	FLOAT32	degrees	n/a	-9999 = fill
<b>RelViewCamAziAng</b> Relative view-Sun azimuth (9 cameras) (ATB sec. 3.2.1.4)	XDim, YDim, NCamDim	FLOAT32	degrees	n/a	-9999 = fill
<b>ScatterAng</b> Scattering angle (9 cameras) (ATB eq. 11)	XDim, YDim, NCamDim	FLOAT32	degrees	n/a	-9999 = fill
<b>GlitterAng</b> Glitter angle (9 cameras) (Level 2 Ancillary ATB eq. 37)	XDim, YDim, NCamDim	FLOAT32	degrees	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>AerRetrSuccFlagPerMixture</b> Aerosol retrieval success flag per mixture (was previously <b>AerCompModId</b> ) (ATB sec. 3.5.8.1)	XDim, YDim, NAerMixtureDim	UINT8	n/a	n/a	253 = fill; X <sup>2</sup> s not computed 252 = X <sup>2</sup> s computed, with no successful match 251 = X <sup>2</sup> s computed, with no successful match; this flag value applies when a default mixture is used 1-NMix = X <sup>2</sup> s computed with a successful match; value is equal to mixture number identifier
<b>OptDepthPerMixture</b> Column optical depth at 555 nm (was previously <b>CoIOptDepth</b> ) (ATB sec. 3.5.6.2)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>OptDepthUncPerMixture</b> Column optical depth uncertainty at 555 nm (was previously <b>CoIOptDepthUnc</b> ) (ATB sec. 3.5.6.2)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>OptDepthUpBd</b> Optical depth upper bound (ATB sec. 3.5.4)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>OptDepthUpBdCam</b> Camera used to establish optical depth upper bound (ATB sec. 3.5.4)	XDim, YDim, NAerMixtureDim	UINT8	n/a	n/a	253 = fill 1 = D forward 2 = C forward 3 = B forward 4 = A forward 5 = A nadir 6 = A aftward 7 = B aftward 8 = C aftward 9 = D aftward
<b>OptDepthUpBdBand</b> Band used to establish optical depth upper bound (ATB sec. 3.5.4)	XDim, YDim, NAerMixtureDim	UINT8	n/a	n/a	253 = fill 1 = Blue 2 = Green 3 = Red 4 = NIR
<b>ChisqAbs</b> Absolute chi-square (ATB eq. 61)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>ChisqGeom</b> Geometric chi-square (ATB eq. 62)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>ChisqSpec</b> Spectral chi-square (ATB eq. 64)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>ChisqMaxdev</b> Maximum deviation chi-square (ATB eq. 66)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>ChisqHet</b> Heterogeneous chi-square (ATB eq. 73)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>ChisqHomog</b> Homogeneous chi-square (ATB sec. 3.4.4.2)	XDim, YDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>OptDepthDWCalcPerBand</b> Green optical depth retrieved from dark water algorithm, calculated per spectral band (NOT YET IMPLEMENTED - CURRENTLY SET TO FILL VALUE OR ZERO) (ATB sec. 3.5.5.2.1)	XDim, YDim, NAerMixtureDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>OptDepthOTACalcPerBand</b> Green optical depth retrieved from OTA (optically thick atmosphere) algorithm, calculated per spectral band (NOT YET IMPLEMENTED - CURRENTLY SET TO FILL VALUE OR ZERO) (ATB sec. 3.5.5.2.2)	XDim, YDim, NAerMixtureDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>OptDepthHetCalcPerBand</b> Green optical depth retrieved from heterogeneous surface algorithm, calculated per spectral band (ATB sec. 3.5.5.2.3)	XDim, YDim, NAerMixtureDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>OptDepthHomogCalcPerBand</b> Green optical depth retrieved from homogeneous surface algorithm, calculated per spectral band (ATB sec. 3.4.4.2)	XDim, YDim, NAerMixtureDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>ChisqAbsCalcPerBand</b> Absolute chi-square, computed per-band (NOT YET IMPLEMENTED - CURRENTLY SET TO FILL VALUE OR ZERO) (ATB sec. 3.5.5.2.1, 3.5.5.2.2)	XDim, YDim, NBandDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>ChisqHetCalcPerBand</b> Heterogeneous chi-square, computed per-band (ATB sec. 3.5.5.2.3)	XDim, YDim, NBandDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill
<b>ChisqHomogCalcPerBand</b> Homogeneous chi-square, computed per-band (ATB sec. 3.4.4.2)	XDim, YDim, NBandDim, NAerMixtureDim	FLOAT32	n/a	n/a	-9999 = fill

Table 8-13: Aerosol Product Grid Dataset Descriptions, part 5

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Grid RegParamsAer (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegMeanSpectralSSA</b> Regional mean spectral single-scattering albedo (SSA), computed from SSA of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegStDevSpectralSSA</b> Standard deviation of spectral single-scattering albedo (SSA) of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegLowestResidSpectralSSA</b> Spectral single-scattering albedo (SSA) of mixture with smallest chi-square fitting parameter (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land), out of all aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegMeanSpectralOptDepthFraction</b> Regional mean of fractional spectral optical depth by size and shape of aerosol particles, computed from optical depth fractions of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegStDevSpectralOptDepthFraction</b> Standard deviation of spectral optical depth fraction of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegLowestResidSpectralOptDepthFraction</b> Spectral optical depth fraction of mixture with smallest chi-square fitting parameter (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land), out of all aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegMeanNumberFraction</b> Regional mean of fractional number of aerosol particles by size and shape, computed from number fractions of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegStDevNumberFraction</b> Standard deviation of number fraction of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegLowestResidNumberFraction</b> Number fraction of mixture with smallest chi-square fitting parameter (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land), out of all aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NParticleTypeDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegMeanVolumeFraction</b> Regional mean of fractional volume of aerosol particles by size and shape, computed from volume fractions of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegStDevVolumeFraction</b> Standard deviation of volume fraction of successful aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegLowestResidVolumeFraction</b> Volume fraction of mixture with smallest chi-square fitting parameter (chi-square absolute for aerosol mixtures over dark water; chi-square heterogeneous for aerosol mixtures over land), out of all aerosol mixtures (ATB sec. 3.5.10.2)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegSpectralSSAHistogramCounts</b> Number of successful models in each single-scatter albedo (SSA) histogram bin.	XDim, YDim, NBandDim, NSSABinDim	UINT8	n/a	n/a	253 = fill
<b>RegSpectralSSAHistogramMeans</b> Mean single-scattering albedo (SSA) of successful models in each SSA histogram bin.	XDim, YDim, NBandDim, NSSABinDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegSpectralNonsphericalOptDepthFractionHistogramCounts</b> Number of successful models in each non-spherical fraction histogram bin.	XDim, YDim, NBandDim, NNonSphericalFractionBinDim	UINT8	n/a	n/a	253 = fill
<b>RegSpectralNonsphericalOptDepthFractionHistogramMeans</b> Mean of fractional spectral optical depth of successful models in each non-spherical fraction histogram bin.	XDim, YDim, NBandDim, NNonSphericalFractionBinDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegNonsphericalNumberFractionHistogramCounts</b> Number of successful models in each non-spherical fraction histogram bin.	XDim, YDim, NNonSphericalFractionBinDim	UINT8	n/a	n/a	253 = fill
<b>RegNonsphericalNumberFractionHistogramMeans</b> Mean of fractional number of aerosol particles of successful models in each non-spherical fraction histogram bin.	XDim, YDim, NNonSphericalFractionBinDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegNonsphericalVolumeFractionHistogramCounts</b> Number of successful models in each non-spherical fraction histogram bin.	XDim, YDim, NNonSphericalFractionBinDim	UINT8	n/a	n/a	253 = fill
<b>RegNonsphericalVolumeFractionHistogramMeans</b> Mean of fractional volume of aerosol particles of successful models in each non-spherical fraction histogram bin.	XDim, YDim, NNonSphericalFractionBinDim	FLOAT32	n/a	n/a	-9999 = fill

**Table 8-14: Aerosol Product Grid Dataset Descriptions, part 6**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Grid RegParamsAer (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
<b>ColOzAbund</b> Column ozone abundance (ATB eq. 8d)	XDim, YDim	FLOAT32	Dobson	n/a	-9999 = fill
<b>ColOzAbundSrc</b> Ozone data source (ATB sec. 3.3.7.2)	XDim, YDim	UINT8	n/a	n/a	0 = no data available 1 = TASC -> DAO not available 2 = TASC -> DAO out of bounds 3 = DAO 253 = fill
<b>SfcWindsp</b> Near-surface wind speed (ATB eq. 7a)	XDim, YDim	FLOAT32	m/s	n/a	-9999 = fill
<b>SfcWindspSrc</b> Wind speed data source (ATB sec. 3.3.6.2)	XDim, YDim	UINT8	n/a	n/a	0 = no data available 1 = TASC -> DAO not available 2 = TASC -> DAO out of bounds 3 = DAO 253 = fill
<b>SfcPres</b> Surface pressure (ATB sec. 3.2.2.4.3)	XDim, YDim	FLOAT32	hPa	n/a	-9999 = fill
<b>SfcPresSrc</b> Surface pressure data source (ATB sec. 3.2.2.4)	XDim, YDim	UINT8	n/a	n/a	0 = no data available 1 = TASC -> DAO not available 2 = TASC -> DAO out of bounds 3 = DAO 253 = fill
<b>RegAltPres</b> Atmospheric pressure at regional terrain altitude (ATB eq. 6)	XDim, YDim	FLOAT32	hPa	n/a	-9999 = fill



Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RegAltPresSrc</b> Atmospheric pressure at regional terrain altitude data source (ATB sec. 3.3.6.2)	XDim, YDim	UINT8	n/a	n/a	0 = no data available 1 = TASC -> DAO not available 2 = TASC -> DAO out of bounds 3 = DAO 253 = fill
<b>SfcAirTemp</b> Surface air temperature (ATB sec. 3.2.2.4.4)	XDim, YDim	FLOAT32	K	n/a	-9999 = fill
<b>SfcAirTempSrc</b> Surface air temperature data source (ATB sec. 3.2.2.4.4)	XDim, YDim	UINT8	n/a	n/a	0 = no data available 1 = TASC -> DAO not available 2 = TASC -> DAO out of bounds 3 = DAO 253 = fill
<b>RegAltAirTemp</b> Air temperature at regional terrain altitude (ATB sec. 3.2.2.4.4)	XDim, YDim	FLOAT32	K	n/a	-9999 = fill
<b>RegAltAirTempSrc</b> Air temperature at regional terrain altitude data source (ATB sec. 3.2.2.4.4)	XDim, YDim	UINT8	n/a	n/a	0 = no data available 1 = TASC -> DAO not available 2 = TASC -> DAO out of bounds 3 = DAO 253 = fill
<b>ColPrecipWater</b> Column precipitable water (ATB sec. 3.3.6.1)	XDim, YDim	FLOAT32	mm	n/a	-9999 = fill
<b>ColPrecipWaterSrc</b> Column precipitable water data source (ATB sec. 3.3.6.1)	XDim, YDim	UINT8	n/a	n/a	0 = no data available 1 = TASC -> DAO not available 2 = TASC -> DAO out of bounds 3 = DAO -> MODIS not available 4 = DAO -> MODIS out of bounds 5 = MODIS 253 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>RelHumProfile</b> Relative humidity profile (36 pressure levels) (NOT YET IMPLEMENTED - CURRENTLY SET TO ZERO) (ATB sec. 3.2.2.4.2)	<i>XDim, YDim, NRelHumDim</i>	<i>FLOAT32</i>	<i>%</i>	<i>n/a</i>	<i>-9999 = fill</i>  <i>(CURRENTLY SET TO ZERO)</i>
<b>RelHumProfileSrc</b> Relative humidity profile data source (NOT YET IMPLEMENTED - CURRENTLY SET TO ZERO) (ATB sec. 3.2.2.4.2)	<i>XDim, YDim</i>	<i>UINT8</i>	<i>n/a</i>	<i>n/a</i>	<i>0 = No data available</i> <i>3 = DAO</i> <i>253 = fill</i>
<b>StratAerFlag</b> Stratospheric aerosol flag (NOT YET IMPLEMENTED - CURRENTLY SET TO ZERO) (ATB sec. 3.2.2.2)	<i>XDim, YDim</i>	<i>UINT8</i>	<i>n/a</i>	<i>n/a</i>	<i>0 = no retrieval</i> <i>1 = determined from retrieval</i> <i>2 = input from external source and used during retrieval</i> <i>3 = input from external source and reported only</i> <i>4 = determined from retrieval but also input from external source and reported</i> <i>253 = fill</i>
<b>StratAerOptDepth</b> Stratospheric aerosol optical depth (NOT YET IMPLEMENTED - CURRENTLY SET TO ZERO) (ATB sec. 3.2.2.2)	<i>XDim, YDim</i>	<i>FLOAT32</i>	<i>n/a</i>	<i>n/a</i>	<i>-9999 = fill</i>  <i>(CURRENTLY SET TO ZERO)</i>
<b>StratAerOptDepthSrc</b> Stratospheric aerosol data source (NOT YET IMPLEMENTED - CURRENTLY SET TO ZERO) (ATB sec. 3.2.2.2)	<i>XDim, YDim</i>	<i>UINT8</i>	<i>n/a</i>	<i>n/a</i>	<i>0 = no retrieval</i> <i>5 = MODIS -&gt; SAGE III not available</i> <i>6 = MODIS -&gt; SAGE III out of bounds</i> <i>7 = SAGE III</i> <i>253 = fill</i>

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>CirrFlag</b> Cirrus flag (NOT YET IMPLEMENTED - CURRENTLY SET TO ZERO) (ATB sec. 3.2.1.16)	XDim, YDim	UINT8	n/a	n/a	0 = no retrieval 1 = determined from retrieval 2 = input from external source and used during retrieval 3 = input from external source and reported only 4 = determined from retrieval but also input from external source and reported 253 = fill
<b>CirrOptDepth</b> Cirrus optical depth (NOT YET IMPLEMENTED - CURRENTLY SET TO ZERO) (ATB sec. 3.2.1.16)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill  (CURRENTLY SET TO ZERO)
<b>CirrOptDepthSrc</b> Cirrus data source (NOT YET IMPLEMENTED - CURRENTLY SET TO ZERO) (ATB sec. 3.2.1.16)	XDim, YDim	UINT8	n/a	n/a	0 = no retrieval 1 = MISR TOA/ Cloud Product 2 = MODIS 3 = none (MODIS not available) 4 = none (MODIS out of bounds) 253 = fill
<b>Grid DomParamsAer (Spatial Resolution: 70.4 km x 70.4 km, XDim = 2, YDim = 8)</b>					
<b>DomMeanOptDepth</b> Mean optical depth over a domain (ATB sec. 3.5.8.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>DomMedOptDepth</b> Median optical depth over a domain (ATB sec. 3.5.8.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>OptDepthHistogram</b> Histogram of optical depths, per mixture (ATB sec. 3.5.8.2)	XDim, YDim, NAer- MixtureDim, NTauBinDim	UINT8	n/a	n/a	253 = fill

## 8.4.8 Per-grid QA Metadata

Table 8-15: Per-grid QA Metadata for Aerosol Products.

Data Field Name	Data Type	Field Dimensions	Valid Range
<i>Swath-level Constructs</i>			
<b>NRegWAnyGoodDwSub</b> Number of regions containing at least one good (non-fill) dark water subregion.	INT32	--	0-36,352
<b>NRegWNoGoodDwSub</b> Number of regions containing no good (non-fill) dark water subregions, but containing at least one good (non-fill) other subregion.	INT32	--	0-36,352
<b>NSubWGoodData</b> Number of subregions containing good (non-fill) data.	INT32	--	0-36,352
<b>NPixEqRefNoCorrect</b> Number of 1.1 km x 1.1 km pixels to which a spectral out-of-band correction was not applied.	INT32	NCamDim	0-9,306,112
<b>NRegDwAlgProcSw</b> Number of regions processed with the aerosol retrieval algorithm for a dark water surface.	INT32	--	0-36,352
<b>NRegDwAlgSuccSw</b> Number of regions processed with the aerosol retrieval algorithm for a dark water surface, with a successful retrieval result.	INT32	--	0-36,352
<b>NRegOTAAAlgProcSw</b> Number of regions processed with the aerosol retrieval algorithm for an optically thick atmosphere.	INT32	--	0-36,352
<b>NRegOTAAAlgSuccSw</b> Number of regions processed with the aerosol retrieval algorithm for an optically thick atmosphere, with a successful retrieval result.	INT32	--	0-36,352
<b>NRegEofAlgProcSw</b> Number of regions processed with the aerosol retrieval algorithm for a heterogeneous land surface.	INT32	--	0-36,352
<b>NRegEofAlgSuccSw</b> Number of regions processed with the aerosol retrieval algorithm for a heterogeneous land surface, with a successful retrieval result.	INT32	--	0-36,352
<b>NTauEqZero</b> Number of regions for which the retrieved aerosol optical depth was zero.	INT32	NAerMixtureDim	0-36,352

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>NTauEqTauUpBd</b> Number of regions for which the retrieved aerosol optical depth was equal to the optical depth upper bound.	INT32	NAerMix- tureDim	0-36,352
<b>NTauGreaterThanTauUpBd</b> Number of regions for which the retrieved aerosol optical depth was greater than the optical depth upper bound.	INT32	NAerMix- tureDim	0-36,352
<b>Block-level Constructs</b>			
<b>BlockNumber</b> Block number.	INT32	--	1-180
<b>ValidRecord</b> Indicates if valid data are present for the block.	UINT8	--	0,1
<b>NRegWAnyGoodDWSub</b> Number of regions containing at least one good (non-fill) dark water subregion.	INT32	--	0-256
<b>NRegWNoGoodDWSub</b> Number of regions containing no good (non-fill) dark water subregions, but containing at least one good (non-fill) other subregion.	INT32	--	0-256
<b>NRegDwAlgProc</b> Number of regions processed with the aerosol retrieval algorithm for a dark water surface.	INT32	--	0-256
<b>NRegDwAlgSucc</b> Number of regions processed with the aerosol retrieval algorithm for a dark water surface, with a successful retrieval result.	INT32	--	0-256
<b>NRegOTAAAlgProc</b> Number of regions processed with the aerosol retrieval algorithm for an optically thick atmosphere	INT32	--	0-256
<b>NRegOTAAAlgSucc</b> Number of regions processed with the aerosol retrieval algorithm for an optically thick atmosphere, with a successful retrieval result.	INT32	--	0-256
<b>NRegEofAlgProc</b> Number of regions processed with the aerosol retrieval algorithm for a heterogeneous land surface.	INT32	--	0-256
<b>NRegEofAlgSucc</b> Number of regions processed with the aerosol retrieval algorithm for a heterogeneous land surface, with a successful retrieval result.	INT32	--	0-256
<b>NRegObliqueSunAng</b> Number of regions not processed due to oblique solar illumination angle.	INT32	--	0-256

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>NRegTopoComplex</b> Number of regions not processed due to regional topographic complexity.	INT32	--	0-256
<b>NRegReglCloudy</b> Number of regions not processed due to regional cloudiness.	INT32	--	0-256
<b>NRegNoGoodSubData</b> Number of regions not processed due to the absence of any good subregion data.	INT32	--	0-256
<b>NRegOzDAOAvailOOB</b> Number of regions for which DAO ozone data are available but out-of-bounds.	INT32	--	0-256
<b>NRegOzDAONotAvail</b> Number of regions for which DAO ozone data are not available.	INT32	--	0-256
<b>NRegWsDAOAvailOOB</b> Number of regions for which DAO wind speed data are available but out-of-bounds.	INT32	--	0-256
<b>NRegWsDAONotAvail</b> Number of regions for which DAO wind speed data are not available.	INT32	--	0-256
<b>NRegPsDAOAvailOOB</b> Number of regions for which DAO surface pressure data are available but out-of-bounds.	INT32	--	0-256
<b>NRegPsDAONotAvail</b> Number of regions for which DAO surface pressure data are not available.	INT32	--	0-256
<b>NRegTsDAOAvailOOB</b> Number of regions for which DAO surface temperature data are available but out-of-bounds.	INT32	--	0-256
<b>NRegTsDAONotAvail</b> Number of regions for which DAO surface temperature data are not available.	INT32	--	0-256
<b>NRegGeopHtNotAvail</b> Number of regions for which geopotential height data are not available.	INT32	--	0-256
<b>NRegPtDAOCalcOOB</b> Number of regions for which the pressure at terrain height calculated using DAO surface pressure data is out-of-bounds.	INT32	--	0-256

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>NRegTtDAOCalcOOB</b> Number of regions for which the air temperature at terrain height calculated using DAO surface temperature data is out-of-bounds.	INT32	--	0-256
<b>NRegCpwModAvailOOB</b> Number of regions for which the MODIS column precipitable water amount is available but out-of-bounds.	INT32	--	0-256
<b>NRegCpwModNotAvail</b> Number of regions for which the MODIS column precipitable water amount is not available.	INT32	--	0-256
<b>NRegCpwDAOAvailOOB</b> Number of regions for which the DAO column precipitable water amount is available but out-of-bounds.	INT32	--	0-256
<b>NRegCpwDAONotAvail</b> Number of regions for which the DAO column precipitable water amount is not available.	INT32	--	0-256
<b>NRegCirTCAvail</b> Number of regions for which L2TC cirrus data are available.	INT32	--	0-256
<b>NRegCirModAvailOOB</b> Number of regions for which L2TC cirrus data are available but out-of-bounds.	INT32	--	0-256
<b>NRegCirModNotAvail</b> Number of regions for which MODIS cirrus data are not available.	INT32	--	0-256
<b>NRegStrSagAvailOOB</b> Number of regions for which stratospheric aerosol data from SAGE are available but out-of-bounds.	INT32	--	0-256
<b>NRegStrSagNotAvail</b> Number of regions for which stratospheric aerosol data from SAGE are not available.	INT32	--	0-256
<b>NRegStrModAvailOOB</b> Number of regions for which stratospheric aerosol data from MODIS are available but out-of-bounds.	INT32	--	0-256
<b>NRegStrModNotAvail</b> Number of regions for which stratospheric aerosol data from MODIS are not available.	INT32	--	0-256
<b>NSubWGoodData</b> Number of subregions containing good (non-fill) data.	INT32	--	0-65,536
<b>NTauEqZero</b> Number of regions for which the retrieved aerosol optical depth was zero.	INT32	NAerMixtureDim	0-256

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>NTauEqTauUpBd</b> Number of regions for which the retrieved aerosol optical depth was equal to the optical depth upper bound.	INT32	NAerMix- tureDim	0-256
<b>NTauGreaterThanTauUpBd</b> Number of regions for which the retrieved aerosol optical depth was greater than the optical depth upper bound.	INT32	NAerMix- tureDim	0-256
<b>NPixEqReflNoCorrect</b> Number of 1.1 km x 1.1 km pixels to which a spectral out-of-band correction was not applied.	INT32	NCamDim	0-262,144
<b>NSubHighValEqReflBlue</b> Number of subregions with high-valued equivalent reflectances in the blue band.	INT32	NCamDim	0-65,536
<b>NSubHighValEqReflGreen</b> Number of subregions with high-valued equivalent reflectances in the green band.	INT32	NCamDim	0-65,536
<b>NSubHighValEqReflRed</b> Number of subregions with high-valued equivalent reflectances in the red band.	INT32	NCamDim	0-65,536
<b>NSubHighValEqReflNir</b> Number of subregions with high-valued equivalent reflectances in the near-infrared band.	INT32	NCamDim	0-65,536
<b>CloudMaskSrc</b> Data source for cloud mask.	INT32	--	SDCM values available from MISR TOA/Cloud product
			Defaulted to Georectified Radiance Product RCCM
<b>CloudShadowMaskSrc</b> Data source for cloud shadow mask.	INT32	--	Cloud shadow mask available from MISR TOA/Cloud Product
			Cloud shadow mask not available
<b>TopoShadowMaskSrc</b> Data source for topographic shadow mask.	INT32	--	Topographic shadow mask available from MISR TOA/Cloud Product
			Topographic shadow mask not available
<b>GeomDataQualInd</b> Geometric calibration data quality indicator.	FLOAT64	--	-1 to 1



## 8.5 MISR LEVEL 2 MIL2ASLS LAND SURFACE PRODUCT

### 8.5.1 File Metadata Description

**Table 8-16: File Metadata for Land Surface Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version identifier for AGP	INT32	N/A	2
DID_version_id	Version identifier for DID (DTED [Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84 ellipsoid
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84 ellipsoid
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	Not used.
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	Not used.
SOM_parameters.som_orbit.gamma	Longitude of perigee	FLOAT64	radians	Not used.
SOM_parameters.som_orbit.nrev	Number of revolutions per ground track repeat cycle	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7.0780408E+06
SOM_parameters.som_orbit.i	Inclination of orbit (degrees)	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	6.8666667E-02
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0 (degrees)	FLOAT64	radians	-2pi to 2pi
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	6 million to 33 million

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	+/- 12 million
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	+/- 12 million
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file was obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-6  0 if data is global mode
Local_mode_site_name	The geographical name of the first local mode site contained in this file.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal

### 8.5.2 Vdata Description

HDF vdatas are used in the land surface product as “flag legends,” which map flag values to their definitions. Flag legend vdatas consist of two fields called "Value" and "Description." The "Value" field is of type UINT8, and consists of one element. The "Description" field is of type CHAR8, and consists of 80 elements. There is one record per flag value. The flag legends are summarized below. To obtain the actual values of the flag values and descriptions, read the vdatas in the file, or refer to Table 8-21 in this document.

**Table 8-17: Land Surface Product File Vdata Summary**

Vdata Name	Records	Description
RDQI Flag Legend	One per flag value	Map flag values to descriptions
BiomeBestEstimate Flag Legend	One per flag value	Map flag values to descriptions
LAIBestEstimateQA Flag Legend	One per flag value	Map flag values to descriptions
LAIQA Flag Legend	One per flag value	Map flag values to descriptions

**8.5.3 Per-grid Metadata Description**

**Table 8-18: Per-grid Metadata for Land Surface Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	1100, 17600
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	1100, 17600
Block_size.size_x	Block x dimension	INT32	128, 8
Block_size.size_y	Block y dimension	INT32	512, 32

Land Surface Grid Metadata	Definition	Data Type	Valid Values
<b><i>Land Surface SubregParams (1.1 km x 1.1 km)</i></b>			
Min LandHDRF	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max LandHDRF	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale LandHDRF	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset LandHDRF	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill LandHDRF	Fill value for field	UINT16	Read from grid metadata in file.
Underflow LandHDRF	Underflow flag value	UINT16	Read from grid metadata in file.
Overflow LandHDRF	Overflow flag value	UINT16	Read from grid metadata in file.
Min LandHDRFUnc	Minimum value for field	FLOAT32	Read from grid metadata in file.

Land Surface Grid Metadata	Definition	Data Type	Valid Values
Max LandHDRFUnc	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale LandHDRFUnc	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset LandHDRFUnc	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill LandHDRFUnc	Fill value for field	UINT16	Read from grid metadata in file.
Underflow LandHDRFUnc	Underflow flag value	UINT16	Read from grid metadata in file.
Overflow LandHDRFUnc	Overflow flag value	UINT16	Read from grid metadata in file.
Min LandBHR	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max LandBHR	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale LandBHR	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset LandBHR	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill LandBHR	Fill value for field	UINT8	Read from grid metadata in file.
Underflow LandBHR	Underflow flag value	UINT8	Read from grid metadata in file.
Overflow LandBHR	Overflow flag value	UINT8	Read from grid metadata in file.
Min LandBHRRelUnc	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max LandBHRRelUnc	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale LandBHRRelUnc	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset LandBHRRelUnc	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill LandBHRRelUnc	Fill value for field	UINT8	Read from grid metadata in file.
Underflow LandBHRRelUnc	Underflow flag value	UINT8	Read from grid metadata in file.
Overflow LandBHRRelUnc	Overflow flag value	UINT8	Read from grid metadata in file.
Min LandBRF	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max LandBRF	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale LandBRF	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset LandBRF	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill LandBRF	Fill value for field	UINT16	Read from grid metadata in file.
Underflow LandBRF	Underflow flag value	UINT16	Read from grid metadata in file.
Overflow LandBRF	Overflow flag value	UINT16	Read from grid metadata in file.
Min LandDHR	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max LandDHR	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale LandDHR	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset LandDHR	Offset factor to apply	FLOAT32	Read from grid metadata in file.

Land Surface Grid Metadata	Definition	Data Type	Valid Values
Fill LandDHR	Fill value for field	UINT16	Read from grid metadata in file.
Underflow LandDHR	Underflow flag value	UINT16	Read from grid metadata in file.
Overflow LandDHR	Overflow flag value	UINT16	Read from grid metadata in file.
Min BRFFModParam1	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max BRFFModParam1	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale BRFFModParam1	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset BRFFModParam1	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill BRFFModParam1	Fill value for field	UINT16	Read from grid metadata in file.
Underflow BRFFModParam1	Underflow flag value	UINT16	Read from grid metadata in file.
Overflow BRFFModParam1	Overflow flag value	UINT16	Read from grid metadata in file.
Min BRFFModParam2	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max BRFFModParam2	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale BRFFModParam2	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset BRFFModParam2	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill BRFFModParam2	Fill value for field	UINT8	Read from grid metadata in file.
Underflow BRFFModParam2	Underflow flag value	UINT8	Read from grid metadata in file.
Overflow BRFFModParam2	Overflow flag value	UINT8	Read from grid metadata in file.
Min BRFFModParam3	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max BRFFModParam3	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale BRFFModParam3	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset BRFFModParam3	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill BRFFModParam3	Fill value for field	UINT8	Read from grid metadata in file.
Underflow BRFFModParam3	Underflow flag value	UINT8	Read from grid metadata in file.
Overflow BRFFModParam3	Overflow flag value	UINT8	Read from grid metadata in file.
Min BRFFModFitResid	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max BRFFModFitResid	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale BRFFModFitResid	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset BRFFModFitResid	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill BRFFModFitResid	Fill value for field	UINT16	Read from grid metadata in file.
Underflow BRFFModFitResid	Underflow flag value	UINT16	Read from grid metadata in file.
Overflow BRFFModFitResid	Overflow flag value	UINT16	Read from grid metadata in file.

Land Surface Grid Metadata	Definition	Data Type	Valid Values
Min NDVI	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max NDVI	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale NDVI	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset NDVI	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill NDVI	Fill value for field	UINT8	Read from grid metadata in file.
Underflow NDVI	Underflow flag value	UINT8	Read from grid metadata in file.
Overflow NDVI	Overflow flag value	UINT8	Read from grid metadata in file.
Min LAIMean1	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max LAIMean1	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale LAIMean1	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset LAIMean1	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill LAIMean1	Fill value for field	UINT8	Read from grid metadata in file.
Underflow LAIMean1	Underflow flag value	UINT8	Read from grid metadata in file.
Overflow LAIMean1	Overflow flag value	UINT8	Read from grid metadata in file.
Min LAIMean2	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max LAIMean2	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale LAIMean2	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset LAIMean2	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill LAIMean2	Fill value for field	UINT8	Read from grid metadata in file.
Underflow LAIMean2	Underflow flag value	UINT8	Read from grid metadata in file.
Overflow LAIMean2	Overflow flag value	UINT8	Read from grid metadata in file.
Min SubrVar	Minimum value for field	FLOAT32	Read from grid metadata in file.
Max SubrVar	Maximum value for field	FLOAT32	Read from grid metadata in file.
Scale SubrVar	Scale factor to apply	FLOAT32	Read from grid metadata in file.
Offset SubrVar	Offset factor to apply	FLOAT32	Read from grid metadata in file.
Fill SubrVar	Fill value for field	UINT8	Read from grid metadata in file.
Underflow SubrVar	Underflow flag value	UINT8	Read from grid metadata in file.
Overflow SubrVar	Overflow flag value	UINT8	Read from grid metadata in file.

### 8.5.4 Per-block Metadata Description

**Table 8-19: Per-block Metadata for Land Surface Product Files.**

PerBlockMetadataCommon	Definition	Data Type	Valid Values
Block_number	Current block number	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

Common Per Block Metadata	Definition	Data Type	Valid Values
Geometric DQI	Geometric Data Quality Indicator copied from the L1B2 Terrain-projected parameter file.	FLOAT64	-1 to 1

PerBlockMetadataTime	Definition	Data Type	Valid Values
BlockCenterTime	TAI time of the lower right pixel of the center four pixels in the current block, converted to UTC time, and displayed in CCSDS ASCII time code A format. Note: BlockCenterTime may be incorrect for the first and last blocks processed in a swath.	CHAR8 * 28	

### 8.5.5 Per-line Metadata Description

None.

### 8.5.6 Per-pixel Metadata Description

None.

### 8.5.7 Grid Data Set Descriptions

This section lists the parameters which make up the land surface grid data sets, including a brief description of each parameter and its format. If a parameter is described in the MISR Level 2 Surface Retrieval Algorithm Theoretical Basis (ATB) document [ref. 13 in section 1.3], a cross-reference to the corresponding ATB section or equation is provided.

In order to minimize storage for the Aerosol/Surface Product, some parameters will be packed so that each bit represents a logical value, or some number of bits within a byte or word represent a flag value. Floating point values and integer values may take on a flag value indicating invalid data. Currently, there is a flag value of -9999.0, representing missing floating point data; a flag value of 253, representing missing data for unsigned 8-bit integers; a flag value of 65533, representing missing data for unsigned 16-bit integers; and a flag value of -32768, representing missing data for 16-bit signed integers. In addition, there are flag values representing underflow and overflow. There is a flag value of 254, representing underflow for unsigned 8-bit integers; a flag value of 255, representing overflow for unsigned 8-bit integers; a flag value of 65534, representing underflow for unsigned 16-bit integers; a flag value of 65535, representing overflow for unsigned 16-bit integers; a flag value of -32767, representing underflow for 16-bit signed integers; and a flag value of 32767, representing overflow for 16-bit signed integers. Note that we may later add more flag values to distinguish other reasons that the data are missing (e.g. never computed, arithmetic error, etc.).

Some parameters are stored in scaled form. The equation for transforming them back to their unscaled form is described in the ‘Transformation’ column of Table 8-21. The scale and offset parameters referred to in the ‘Transformation’ column are stored in the grid metadata.

**Table 8-20: Land Surface Product Field Dimension Descriptions**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	- for the Aerosol and Land Surface files this can vary, with a typical value being approximately 140 - for the Ocean Surface file this will be 6
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	128 for 1.1 km parameters or 8 for 17.6 km parameters



**Table 8-20: Land Surface Product Field Dimension Descriptions (Continued)**

Dimension	Description	Valid Values
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	512 for 1.1 km parameters or 32 for 17.6 km parameters
NCamDim	<i>NCamDim</i> is the number of MISR cameras.	9 where 1 = D forward 2 = C forward 3 = B forward 4 = A forward 5 = A nadir 6 = A aftward 7 = B aftward 8 = C aftward 9 = D aftward
NBandDim	<i>NBandDim</i> is the number of bands in a MISR camera.	4 where 1 = Blue 2 = Green 3 = Red 4 = NIR
NFparSfcTypeVegDim	<i>NFparSfcTypeVegDim</i> is the number of vegetative FPAR surface types.	6 where 1 = Grasses and cereal crops 2 = Shrubland 3 = Broadleaf crops 4 = Savanna 5 = Broadleaf forest 6 = Needleleaf forest

**Table 8-21: Land Surface Product Grid Dataset Descriptions.**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>Grid SubregParamsLnd (Spatial Resolution: 1.1 km x 1.1 km, XDim = 128, YDim = 512)</b>					

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>LandHDRF</b> Hemispherical-directional reflectance factor for non-isotropic incident radiation (HDRF), which is the ratio of the radiance reflected from the surface to that from an ideal lambertian target reflected into the same beam geometry and illuminated under identical atmospheric conditions (ATB eq. 40)	XDim, YDim, NBandDim, NCamDim	UINT16	n/a	If the HDRF value is not fill, overflow or underflow, do the following:  Remove the least significant bit, which is a flag value:  $x = \text{floor}(\text{LandHDRF} / 2)$  Then unscale the value:  $y = (x * \text{Scale LandHDRF}) + \text{Offset LandHDRF}$	65533 = fill 65534 = underflow 65535 = overflow  least significant bit: '0' indicates that HDRF results were obtained using the original (non-interpolated) equivalent reflectances as input. '1' indicates that HDRF results were obtained using interpolated equivalent reflectances as input.
<b>LandHDRFUnc</b> HDRF uncertainty (ATB eq. 50)	XDim, YDim, NBandDim, NCamDim	UINT16	n/a	$y = (x * \text{Scale LandHDRFUnc}) + \text{Offset LandHDRFUnc}$	65533 = fill 65534 = underflow 65535 = overflow
<b>RDQI</b> Radiometric Data Quality Indicator (ATB sec. 3.2.1.3)	XDim, YDim, NBandDim, NCamDim	UINT8	n/a	n/a	0 = Within specifications 1 = Reduced accuracy 2 = Not usable for science 3 = Unusable for any purpose  253 = fill  <i>Note that for land surface processing, only radiance values <math>\leq \text{RDQI}_1</math> are considered acceptable for use in processing. <math>\text{RDQI}_1</math> is a threshold specified in the L2AS Config file, in the Land Surface section.</i>
<b>LandBHR</b> Bihemispherical reflectance for non-isotropic incident radiation (BHR), which is the ratio of the radiant exitance to the irradiance (ATB eq. 38)	XDim, YDim, NBandDim	UINT8	n/a	$y = (x * \text{Scale LandBHR}) + \text{Offset LandBHR}$	253 = fill 254 = underflow 255 = overflow
<b>LandBHRRelUnc</b> BHR relative uncertainty (ATB eq. 58)	XDim, YDim, NBandDim	UINT8	n/a	$y = (x * \text{Scale LandBHRRelUnc}) + \text{Offset LandBHRRelUnc}$	253 = fill 254 = underflow 255 = overflow

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>LandBRF</b> Bidirectional reflectance factor (BRF), which is the bidirectional reflectance distribution function of the target ratioed to the bidirectional reflectance distribution function from a non-absorbing lambertian surface (ATB eq. 89)	XDim, YDim, NBandDim, NCamDim	UINT16	n/a	If the BRF value is not fill, overflow or underflow, do the following:  Remove the least significant bit, which is a flag value:  $x = \text{floor}(\text{LandBRF}/2)$  Then unscale the value:  $y = (x * \text{Scale LandBRF}) + \text{Offset LandBRF}$	65533 = fill 65534 = underflow 65535 = overflow  least significant bit: ‘0’ indicates that BRF results were obtained using the original (non-interpolated) equivalent reflectances as input. ‘1’ indicates that BRF results were obtained using interpolated equivalent reflectances as input.
<b>LandDHR</b> Directional-hemispherical reflectance (DHR), which is the hemispherically integrated <b>LandBRF</b> (ATB eq. 87)	XDim, YDim, NBandDim	UINT8	n/a	$y = (x * \text{Scale LandDHR}) + \text{Offset LandDHR}$	253 = fill 254 = underflow 255 = overflow
<b>BRFModParam1</b> 1st BRF model parameter, (ATB eq. 78, free parameter $r_0$ )	XDim, YDim, NBandDim	UINT16	n/a	$y = (x * \text{Scale BRFModParam1}) + \text{Offset BRFModParam1}$	65533 = fill 65534 = underflow 65535 = overflow
<b>BRFModParam2</b> (ATB eq. 78, free parameter $k$ )	XDim, YDim, NBandDim	UINT8	n/a	$y = (x * \text{Scale BRFModParam2}) + \text{Offset BRFModParam2}$	253 = fill 254 = underflow 255 = overflow
<b>BRFModParam3</b> (ATB eq. 78, free parameter $b$ )	XDim, YDim, NBandDim	UINT8	n/a	$y = (x * \text{Scale BRFModParam3}) + \text{Offset BRFModParam3}$	253 = fill 254 = underflow 255 = overflow
<b>BRFModFitResid</b> BRF model fit residuals (ATB eq. 89a)	XDim, YDim, NBandDim	UINT16	n/a	$y = (x * \text{Scale BRFModFitResid}) + \text{Offset BRFModFitResid}$	65533 = fill 65534 = underflow 65535 = overflow
<b>NDVI</b> Normalized Difference Vegetation Index (ATB eq. 101)	XDim, YDim	UINT8	n/a	$y = (x * \text{Scale NDVI}) + \text{Offset NDVI}$	253 = fill 254 = underflow 255 = overflow

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>BiomeBestEstimate</b> Best estimate of biome type (ATB sec. 3.3.6.1)	XDim, YDim	UINT8	n/a	n/a	253 = fill 1 = Grasses and cereal crops 2 = Shrubland 3 = Broadleaf crops 4 = Savanna 5 = Broadleaf forest 6 = Needleleaf forest 7 = Unknown 8 = Ambiguous 9 = Not land 10 = Barren
<b>BiomeBestEstimateQA</b> QA indicator for best estimate of biome type (not yet computed; currently set to fill everywhere)	XDim, YDim	UINT8	n/a	n/a	253 = fill
<b>LAIBestEstimate</b> Best estimate of LAI, equal to <b>LAIMean2</b> for <b>BiomeBestEstimate</b> (ATB sec. 3.3.7.4)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>LAIBestEstimateQA</b> QA indicator for best estimate of LAI (ATB sec. 3.3.6.1)	XDim, YDim	UINT8	n/a	n/a	253 = fill 0 = LAI tests 1 and 2 passed 1 = LAI test 1 passed, LAI test 2 failed 2 = LAI test 1 failed, LAI test 2 passed (not used) 3 = LAI test 1 failed, LAI test 2 not attempted 4 = LAI tests not attempted due to poor solar, viewing geometry
<b>FPARBestEstimate</b> Best estimate of FPAR (ATB eq. 144)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>BHRPAR</b> BHR in the photosynthetically active radiation (PAR) regime, 400 - 700 nm (ATB eq. 98)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>DHRPAR</b> DHR in the photosynthetically active radiation (PAR) regime, 400 - 700 nm (ATB eq. 100)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>LAIMean1</b> Mean LAI, first test (6 biomes) (ATB eq. 119)	XDim, YDim, NFparSfcTypeVeg Dim	UINT8	n/a	$y=(x^* \text{Scale LAIMean1}) + \text{Offset LAIMean1}$	253 = fill 254 = underflow 255 = overflow
<b>LAIDelta1</b> Delta LAI, first test (6 biomes) (ATB eq. 120) (ATB sec. 3.3.6.2)	XDim, YDim, NFparSfcTypeVeg Dim	FLOAT32	n/a	Remove sign. $y=abs(x)$	-9999 = fill The sign is a flag indicating if a saturation condition is encountered. Negative values indicate saturation. Positive values indicate no saturation.
<b>LAINumGoodFit1</b> Number of good fits after first test (6 biomes) (ATB eq. 118)	XDim, YDim, NFparSfcTypeVeg Dim	UINT8	n/a	n/a	253 = fill
<b>LAIMean2</b> Mean LAI, second test (6 biomes) (ATB eq. 125)	XDim, YDim, NFparSfcTypeVeg Dim	UINT8	n/a	$y=(x^* \text{Scale LAIMean2}) + \text{Offset LAIMean2}$	253 = fill 254 = underflow 255 = overflow
<b>LAIDelta2</b> Delta LAI, second test (6 biomes) (ATB eq. 126) (ATB sec. 3.3.6.2)	XDim, YDim, NFparSfcTypeVeg Dim	FLOAT32	n/a	Remove sign. $y=abs(x)$	-9999 = fill The sign is a flag indicating if a saturation condition is encountered. Negative values indicate saturation. Positive values indicate no saturation.
<b>LAINumGoodFit2</b> Number of good fits after second test (6 biomes) (ATB eq. 124)	XDim, YDim, NFparSfcTypeVeg Dim	UINT8	n/a	n/a	253 = fill

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>LAIQA</b> QA indicator for LAI (ATB sec. 3.3.6.1)	XDim, YDim, NFparSfcTypeVeg Dim	UINT8	n/a	n/a	253 = fill 0 = LAI tests 1 and 2 passed 1 = LAI test 1 passed, LAI test 2 failed 2 = LAI test 1 failed, LAI test 2 passed ( <i>not used</i> ) 3 = LAI test 1 failed, LAI test 2 not attempted 4 = LAI tests not attempted due to poor solar, viewing geometry
<b>SubrVar</b> Subregion variability (ATB eq. 1)	XDim, YDim, NBandDim	UINT8	n/a	$y=(x^*$ <b>Scale SubrVar</b> )+ <b>Offset SubrVar</b>	253 = fill 254 = underflow 255 = overflow
<b>Grid RegParamsLnd (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
<b>NormBlkSfclrrad</b> Normalized black surface irradiance (ATB eq. 61)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>NormBlkSfclrradUnc</b> Normalized black surface irradiance uncertainty (ATB eq. 62)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>BOABihemAlb</b> Bottom of atmosphere (BOA) bihemispherical albedo for isotropic incident radiation ( $s_\lambda$ in ATB eq. 47)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>BOABihemAlbUnc</b> BOA bihemispherical albedo uncertainty (ATB eq. 62)	XDim, YDim, NBandDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegSfcRetroptDepth</b> Aerosol optical depth to be used in the land surface retrieval (aerosol ATB sec. 3.5.7.2)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill

<b>Field Name</b> Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>RegSfcRetrOptDepthUnc</b> Uncertainty in aerosol optical depth to be used in the land surface retrieval <i>(aerosol ATB sec. 3.5.7.2)</i>	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>RegSfcRetrMixture</b> Aerosol mixture to be used in the land surface retrieval <i>(aerosol ATB 3sec. 3.5.7.2)</i>	XDim, YDim	UINT8	n/a	n/a	253 = fill 252 = surface retrieval used an aggregate of all successful mixtures; see <b>AerRetrSuccFlagPerMixture</b> for the successful mixtures

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>RegSfcRetrAlgTypeFlag</b> Algorithm type used to compute aerosol mixture and optical depth ( <i>aerosol ATB 3.5.7.2</i> )	XDim, YDim	UINT8	n/a	n/a	0 = no retrieval 1 = dark water retrieval 2 = OTA (optically thick atmosphere) retrieval 3 = heterogeneous surface retrieval 4 = no successful retrieval; optical depth from "low optical depth" default 5 = no successful retrieval; optical depth from "optical depth in previous region" default 6 = no successful retrieval; optical depth from "Rayleigh scattering only" default (NO LONGER USED) 7 = no successful retrieval; optical depth from "optical depth upper bound algorithm" default 8 = homogeneous surface retrieval 253 = fill



Field Name Parameter Description	Dimension List	Number Type	Units	Transformation <sup>a</sup>	Flag Values
<b>SolZenAng</b> Solar zenith angle ( <i>aerosol ATB sec. 3.2.1.4</i> )	XDim, YDim	FLOAT32	degrees	n/a	-9999 = fill
<b>ViewZenAng</b> View zenith angle (9 cameras) ( <i>aerosol ATB sec. 3.2.1.4</i> )	XDim, YDim, NCamDim	FLOAT32	degrees	n/a	-9999 = fill
<b>RelViewCamAziAng</b> Relative view-Sun azimuth (9 cameras) ( <i>aerosol ATB sec. 3.2.1.4</i> )	XDim, YDim, NCamDim	FLOAT32	degrees	n/a	-9999 = fill
<b>ScatterAng</b> Scattering angle (9 cameras) ( <i>aerosol ATB eq. 11</i> )	XDim, YDim, NCamDim	FLOAT32	degrees	n/a	-9999 = fill
<b>GlitterAng</b> Glitter angle (9 cameras) ( <i>Level 2 Ancillary ATB eq. 37</i> )	XDim, YDim, NCamDim	FLOAT32	degrees	n/a	-9999 = fill

a. Scale and offset values can be read from the grid metadata, and are also listed in Table 8-18.

### 8.5.8 Per-grid QA Metadata

**Table 8-22: Per-grid QA Metadata for Land Surface Products.**

Data Field Name	Data Type	Field Dimensions	Valid Range
<i>Swath-level Constructs</i>			
<b>NSubLandAlgProcSw</b> Number of subregions processed with the land surface algorithms.	INT32	--	0-9,306,112
<b>NSubSuccHdrfBhrSw</b> Number of subregions with a successful HDRF/BHR retrieval.	INT32	NBandDim	0-9,306,112
<b>NSubSuccBrfDhrSw</b> Number of subregions with a successful BRF/DHR model parameter retrieval.	INT32	NBandDim	0-9,306,112
<b>NSubSuccBiomeLaiSw</b> Number of subregions with a successful LAI (leaf area index) retrieval.	INT32	--	0-9,306,112
<b>NRegWAnyGoodLndSub</b> Number of regions containing at least one good (non-fill) land subregion.	INT32	--	0-36,352

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>NRegLandAlgProcSw</b> Number of regions processed with the land surface algorithms.	INT32	--	0-36,352
<b>NSubSuccPARIntBhrSw</b> Number of subregions with a successful PAR-integrated BHR retrieval.	INT32	--	0-9,306,112
<b>NSubSuccPARIntDhrSw</b> Number of subregions with a successful PAR-integrated DHR retrieval.	INT32	--	0-9,306,112
<b>NSubSuccFPARSw</b> Number of subregions with a successful FPAR retrieval.	INT32	--	0-9,306,112
<i>Block-level Constructs</i>			
<b>BlockNumber</b> Block number.	INT32	--	1-180
<b>ValidRecord</b> Indicates if valid data are present for the block.	UINT8	--	0,1
<b>NRegWAnyGoodLndSub</b> Number of regions containing at least one good (non-fill) land subregion.	INT32	--	0-256
<b>NSubWGoodLndData</b> Number of subregions containing good (non-fill) land data.	INT32	--	0-65,536
<b>NSubLandAlgProc</b> Number of subregions processed with the land surface algorithms.	INT32	--	0-65,536
<b>NSubSuccHdrfBhr</b> Number of subregions with a successful HDRF/BHR retrieval.	INT32	NBandDim	0-65,536
<b>NSubSuccBrfDhr</b> Number of subregions with a successful BRF/DHR/BRF model parameter retrieval.	INT32	NBandDim	0-65,536
<b>NSubSuccBiomeLai</b> Number of subregions with a successful LAI (leaf area index) retrieval.	INT32	--	0-65,536
<b>NSubCIBarren</b> Number of subregions with a biome classification of Barren.	INT32	--	0-65,536
<b>NSubCIWater</b> Number of subregions with a biome classification of Water.	INT32	--	0-65,536
<b>NSubCIGrassCerCrop</b> Number of subregions with a biome classification of Grasses and Cereal Crops.	INT32	--	0-65,536
<b>NSubCISemiAridShrb</b> Number of subregions with a biome classification of Semi-arid Shrubland.	INT32	--	0-65,536

Data Field Name	Data Type	Field Dimensions	Valid Range
<b>NSubCIBroadlfCrop</b> Number of subregions with a biome classification of Broadleaf Crop.	INT32	--	0-65,536
<b>NSubCISavanna</b> Number of subregions with a biome classification of Savanna.	INT32	--	0-65,536
<b>NSubCIBroadlfFor</b> Number of subregions with a biome classification of Broadleaf Forest.	INT32	--	0-65,536
<b>NSubCINeedlelfFor</b> Number of subregions with a biome classification of Needleleaf Forest.	INT32	--	0-65,536
<b>NSubCIUnknown</b> Number of subregions with a biome classification of Unknown.	INT32	--	0-65,536
<b>NRegLandAlgProc</b> Number of regions processed with the land surface algorithms.	INT32	--	0-256
<b>NSubSuccPARIntBhr</b> Number of subregions with a successful PAR-integrated BHR retrieval.	INT32	--	0-65,536
<b>NSubSuccPARIntDhr</b> Number of subregions with a successful PAR-integrated DHR retrieval.	INT32	--	0-65,536
<b>NSubSuccFPAR</b> Number of subregions with a successful FPAR retrieval.	INT32	--	0-65,536
<b>GeomDataQualInd</b> Geometric calibration data quality indicator.	FLOAT64	--	-1 to 1

## 8.6 MISR LEVEL 2 MIL2ASOS OCEAN SURFACE PRODUCT

### 8.6.1 File Metadata Description

**Table 8-23: File Metadata for Ocean Surface Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version identifier for AGP	INT32	N/A	2

File Metadata Field Name	Definition	Data Type	Units	Valid Range
DID_version_id	Version identifier for DID ( <u>D</u> TED [Digital Terrain Elevation Dataset] <u>I</u> ntermediate <u>D</u> ataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84 ellipsoid (6.3781370E+06)
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84 ellipsoid (6.6943480E-03)
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	Not used.
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	Not used.
SOM_parameters.som_orbit.gamma	Longitude of perigee	FLOAT64	radians	Not used.
SOM_parameters.som_orbit.nrev	Number of revolutions per ground track repeat cycle	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7.0780408E+06
SOM_parameters.som_orbit.i	Inclination of orbit (degrees)	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	6.8666667E-02
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0 (degrees)	FLOAT64	radians	-2pi to 2pi
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	+/- 12 million
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	6 million to 33 million

File Metadata Field Name	Definition	Data Type	Units	Valid Range
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	+/- 12 million
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
Cam_mode	Indicates whether the data in this grid file was obtained in MISR global mode or local mode.	INT32	N/A	0-1 1 = global 0 = local
Num_local_modes	The number of MISR local mode acquisitions contained in this file.	INT32	N/A	0-6  0 if data is global mode
Local_mode_site_name	The geographical name of the first local mode site contained in this file.	CHAR8	N/A	string up to 12 characters in length, including null
Orbit_QA	Indication of the overall quality of the orbit data based on analysis of quality flags in the spacecraft attitude and ephemeris data. Geolocation accuracy may be impaired for orbits with poor quality orbit data.	FLOAT32	N/A	-9999.0 = NoRetrieval, -1.0 = Poor, 0.0 = Nominal

### 8.6.2 Per-grid Metadata Description

**Table 8-24: Per-grid Metadata for Ocean Surface Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	1100, 17600
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	1100, 17600
Block_size.size_x	Block x dimension	INT32	128, 8
Block_size.size_y	Block y dimension	INT32	512, 32

## 8.6.3 Per-block Metadata Description

Table 8-25: Per-block Metadata for Ocean Surface Product Files.

PerBlockMetadataCommon	Definition	Data Type	Valid Values
Block_number	Current block number	INT32	1-180
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	Flag signalling whether the block contains entirely fill data	INT8	0 = block contains entirely fill data 1 = block contains valid data

Common Per Block Metadata	Definition	Data Type	Valid Values
Geometric DQI	Geometric Data Quality Indicator copied from the L1B2 Terrain-projected parameter file.	FLOAT64	-1 to 1

PerBlockMetadataTime	Definition	Data Type	Valid Values
BlockCenterTime	TAI time of the lower right pixel of the center four pixels in the current block, converted to UTC time, and displayed in CCSDS ASCII time code A format. Note: BlockCenterTime may be incorrect for the first and last blocks processed in a swath.	CHAR8 * 28	

#### 8.6.4 Per-line Metadata Description

None.

#### 8.6.5 Per-pixel Metadata Description

None.

#### 8.6.6 Grid Data Set Descriptions

In order to minimize storage for the Aerosol/Surface Product, some parameters will be packed so that each bit represents a logical value, or some number of bits within a byte or word represent a flag value. To facilitate the interpretation of scientific data, floating point values are not scaled. Floating point values and integer values may take on a flag value indicating invalid data. Currently, there is a flag value of -9999.0, representing missing floating point data; a flag value of 253, representing missing data for unsigned 8-bit integers; a flag value of 65533, representing missing data for unsigned 16-bit integers; and a flag value of -32768, representing missing data for 16-bit signed integers. In addition, there are flag values representing underflow and overflow. There is a flag value of 254, representing underflow for unsigned 8-bit integers; a flag value of 255, representing overflow for unsigned 8-bit integers; a flag value of 65534, representing underflow for unsigned 16-bit integers; a flag value of 65535, representing overflow for unsigned 16-bit integers; a flag value of -32767, representing underflow for 16-bit signed integers; and a flag value of 32767, representing overflow for 16-bit signed integers. Note that we may later add more flag values to distinguish other reasons that the data are missing (e.g. never computed, arithmetic error, etc.).

**Table 8-26: Ocean Surface Product Field Dimension Descriptions.**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	- for the Aerosol and Land Surface files this can vary, with a typical value being approximately 140 - for the Ocean Surface file this will be 6
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	128 for 1.1 km parameters or 8 for 17.6 km parameters
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	512 for 1.1 km parameters or 32 for 17.6 km parameters
NTOACModelldim	<i>NTOACModelldim</i> is the number of TOAC model identifiers.	2

**Table 8-27: Ocean Surface Product Grid Dataset Descriptions.**

Field Name Parameter Description	Dimension List	Number Type	Units	Transformation	Flag Values
<b>Grid SubregParamsOcn (Spatial Resolution: 1.1 km x 1.1 km, XDim = 128, YDim = 512)</b>					
<b>WaterLeavEqReflConv</b> Water-leaving equivalent reflectance (conventional)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>WaterLeavEqReflExp</b> Water-leaving equivalent reflectance (experimental)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>WaterLeavEqReflUnc</b> Uncertainty in water-leaving equivalent reflectance (experimental)	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>TOACAerModelId</b> TOAC model identifiers (2)	XDim, YDim, NTOACModelIdDi m	UINT8	n/a	n/a	253 = fill
<b>TOACAerOptDepth</b> 865 nm aerosol optical depth	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>PhytoPigmConcConv</b> Phytoplankton pigment concentration (conventional)	XDim, YDim	FLOAT32	mg m <sup>-3</sup>	n/a	-9999 = fill
<b>PhytoPigmConcExp</b> Phytoplankton pigment concentration (experimental)	XDim, YDim	FLOAT32	mg m <sup>-3</sup>	n/a	-9999 = fill
<b>PhytoPigmConcUnc</b> Uncertainty in phytoplankton pigment concentration (experimental)	XDim, YDim	FLOAT32	mg m <sup>-3</sup>	n/a	-9999 = fill
<b>DkWaterFlag</b> Dark water flag	XDim, YDim	UINT8	n/a	n/a	0 = Is not a dark water region 1 = Is a dark water region 0 = fill
<b>Grid RegParamsOcn (Spatial Resolution: 17.6 km x 17.6 km, XDim = 8, YDim = 32)</b>					
<b>GlitterWhiteEqReflAvg</b> Average value of glitter + whitecap equivalent reflectance	XDim, YDim	FLOAT32	n/a	n/a	-9999 = fill
<b>OceanColorCam</b> Camera used in ocean color retrieval	XDim, YDim	UINT8	n/a	n/a	253 = fill



## 8.6.7 Per-grid QA Metadata

Table 8-28: Per-grid QA Metadata for Ocean Surface Products.

Data Field Name	Data Type	Field Dimension	Valid Range
<b>Swath-level Constructs</b>			
NRegWAnyGoodOcnSub	INT32	--	0-36,352
<b>Block-level Constructs</b>			
<b>BlockNumber</b> Block number.	INT32	--	1-180
<b>ValidRecord</b> Indicates if valid data are present for the block.	UINT8	--	0,1
<b>NRegWAnyGoodOcnSub</b> Number of regions containing at least one good (non-fill) ocean subregion.	INT32	--	0-256
<b>NSubWGoodOcnData</b> Number of subregions containing good (non-fill) ocean data.	INT32	--	0-65,536
<b>NSubOceanAlgProc</b> Number of subregions processed with the ocean surface algorithms.	INT32	--	0-65,536
<b>NSubSuccOcnAlgConv</b> Number of subregions with a successful ocean retrieval using the conventional algorithm.	INT32	--	0-65,536
<b>NSubSuccOcnAlgExp</b> Number of subregions with a successful ocean retrieval using the experimental algorithm.	INT32	--	0-65,536
<b>NRegOceanAlgProc</b> Number of regions processed with the ocean surface algorithms.	INT32	--	0-256
<b>GeomDataQualInd</b> Geometric calibration data quality indicator.	FLOAT64	--	-1 to 1



## 9.0 MISR ANCILLARY PRODUCTS

### 9.1 MISR ANCILLARY PRODUCT GRANULE NAMES

MISR Ancillary Products are composed of the eight granules listed below (Table 9-1).

**Table 9-1: MISR Ancillary File Granule Names.**

<b>MISR ANCILLARY FILE GRANULE NAME</b>	<b>ESDT Name</b>	<b>Section</b>
MISR_AM1_AGP_Pmmm_vv.hdf	MIANCAGP	9.4
MISR_AM1_ARP_PRFLTCHAR_Fmm_vvv.hdf	MIANCARP	9.5
MISR_AM1_ARP_PRFLTCAL_Fmm_vvv.hdf	MIANCARP	9.6
MISR_AM1_ARP_INFLTCAL_Tmmm_Fmm_vvv.hdf	MIANCARP	9.7
MISR_AM1_ARP_CONFIG_Fmm_vvv.hdf	MIANCARP	9.8
MISR_AM1_ACP_APOP_Fmm_vvvv.hdf	MIANCACP	9.9
MISR_AM1_ACP_MIXTURE_Fmm_vvvv.hdf	MIANCACP	9.10
MISR_AM1_ACP_CLIMLIKE_Fmm_vvvv.hdf	MIANCACP	9.11

### 9.2 MISR ANCILLARY PRODUCT GRANULE BRIEF DESCRIPTIONS

#### 9.2.1 MISR Ancillary MIANCAGP Geographic Product

The Ancillary Geographic Product (AGP) is essentially a global database of geographic properties, tailored to the needs of the MISR mission. The AGP is utilized in the creation of all MISR Level 1B2 and Level 2 products throughout the mission and is required for the interpretation of those products.

The parameters in this product are reported in a Space-Oblique Mercator (SOM) map projection. The map resolution of the projection is 1.1 km; this defines the horizontal sampling for most of the parameters. The horizontal datum, or surface-basis, for the projection is the WGS84 ellipsoid. This map projection and surface-basis is identical to what will be used for all the Level 1B2 and Level 2 parameters.

The AGP consists of 233 files, corresponding to the 233 repeat orbits of the EOS AM-1 spacecraft. The length and width covered by the AGP needs to be large enough to contain the maximum overlap width of the swath seen by all nine MISR camera views. This width varies per latitude to a minimum near the poles and a maximum of 378 km near the equator. The length of the AGP covers the maximal starting and ending points of the MISR instrument mapping of the surface. Since a mapping swath runs from terminator to terminator for every orbit, the AGP must run from the termina-

tor of the summer solstice at the north end of the orbit and the terminator of the winter solstice at the south end.

### **9.2.2 MISR Ancillary MIANCARP Pre-Flight Characterization Product**

The Ancillary Radiometric Product (ARP) contains coefficients and data variables which are used in the Level 1B1 and Level 2 processing. There are four files associated with this product: the pre-flight instrument characterization file, which is not expected to change much over time; the preflight calibration data file; the in-flight calibration data; and the configuration parameters.

The Characterization file contains preflight instrument characterization parameters, supplied for data user reference. Examples include the measured spectral response functions, and the instantaneous fields-of-view. These parameters are not used by the DAAC processes. It is unlikely that this file will be modified once delivered.

### **9.2.3 MISR Ancillary MIANCARP Pre-Flight Calibration Product**

The Pre-Flight Calibration file contains preflight calibration data. It is distinguished from the Pre-flight Instrument Characterization Data, in that these data are used as input to the DAAC processing. Parameters include spectral descriptors relevant to Level 1B1 and Level 2 standard products, and band weighted solar irradiances. Radiometric gain coefficients are not included in this file, as they are updated on-orbit. It is unlikely that this file will be modified once delivered.

### **9.2.4 MISR Ancillary MIANCARP In-Flight Calibration Product**

The In-Flight Calibration file contains the in-flight calibration data. It is also used as input to the DAAC standard processing. It is distinguished from the Pre-flight Calibration Data, in that these instrument parameters are monitored on-orbit. At-launch values are initialized by the Pre-flight Calibration Data. Bi-monthly updates to this file allow processing to continue with current performance metrics. Parameters include radiometric calibration coefficients, calibration uncertainties, signal-to-noise ratios, and detector data quality indicators. A version number tracks file format changes; a date range revision number indicates a revision has been made to the parameters.

### **9.2.5 MISR Ancillary MIANCARP Configuration Product**

The Configuration file contains threshold parameters and process control limits used in the DAAC processing. An example is the average digital number (DN) value of a line above which data integrity is reduced. These parameters will change only at the discretion of the Principal Investigator, Instrument Scientist, and Science Team. Such a change would reflect a relaxation or stricter tolerance of specific data anomalies. A version number will reflect any such changes.

### **9.2.6 MISR Ancillary MIANCACP APOP Product**

The Aerosol Physical and Optical Properties (APOP) file is part of the Aerosol Climatology Product (ACP). This file contains the microphysical and scattering characteristics of pure aerosol models upon which the routine retrievals are based. The physical properties (size distribution, index of refraction, and tendency to adsorb water) are based upon current knowledge. The effective optical properties are calculated using Mie theory for spherical particles, and ellipsoid approximations/geometric optics for non-spherical cases, for a range of relative humidities. Size statistics and indices of refraction are calculated, and optical properties are reported for all MISR bands.

### **9.2.7 MISR Ancillary MIANCACP Aerosol Mixture Product**

The Aerosol Mixture file is part of the Aerosol Climatology Product (ACP). This file defines the mixtures of pure aerosols that will be compared to MISR observations. The mixtures are defined for each of the retrieval pathways that may occur during aerosol retrievals for each region of the globe. These include dark water surface, optically thick atmosphere, and heterogeneous land surface.

### **9.2.8 MISR Ancillary MIANCACP Climatological Likelihood Product**

The Aerosol Clim-Likely file is part of the Aerosol Climatology Product (ACP). This file contains climatological likelihood values for each candidate aerosol model.<sup>1</sup>

## **9.3 MISR ANCILLARY PRODUCT GRANULE DATA SETS**

### **9.3.1 MISR Ancillary MIANCAGP Geographic Product**

The product will be produced as one ESDT, with 233 physical files, as described above. Each physical file is in the HDF-EOS Grid “stacked-block” format and each contains one or more HDF-EOS Grid datasets, corresponding to parameters at certain spatial resolutions. The grid datasets have the usual x and y dimensions, as well as a third dimension corresponding to the SOM block number. The x and y dimensions correspond to the the number of samples in the along-track and cross-track directions. The blocks that make up the Level 1B2 Georectified Radiance Product files and all of the Level 2 product files are a direct subset of the blocks that make up the Ancillary Geographic Product.

### **9.3.2 MISR Ancillary MIANCARP Pre-Flight Characterization Product**

One HDF file and data set.

### **9.3.3 MISR Ancillary MIANCARP Pre-Flight Calibration Product**

One HDF file and data set.

---

1. This file does not yet exist, and its format has not been defined.

**9.3.4 MISR Ancillary MIANCARP In-Flight Calibration Product**

One HDF file and data set.

**9.3.5 MISR Ancillary MIANCARP Configuration Product**

One HDF file and data set.

**9.3.6 MISR Ancillary MIANCACP APOP Product**

One HDF file and data set.

**9.3.7 MISR Ancillary MIANCACP MIXTURE Product**

One HDF file and data set.

**9.3.8 MISR Ancillary MIANCACP CLIMLIKE Product**

TBD.

**Table 9-2: Ancillary Product Files and Grid Datasets.**

<b>ESDT Shortname</b>	<b>Local Granule ID<sup>a</sup></b>	<b>Grid Dataset Name</b>
MIANCAGP	MISR_AM1_AGP_Pnnn_Fmm_vv.hdf	Standard
		Regional
MIANCARP	MISR_AM1_ARP_PRFLTCHAR_Fmm_vvv.hdf	N/A
MIANCARP	MISR_AM1_ARP_PRFLTCAL_Fmm_vvv.hdf	N/A
MIANCARP	MISR_AM1_ARP_INFLTCAL_Tmmm_Fmm_vvv.hdf	N/A
MIANCARP	MISR_AM1_ARP_CONFIG_Fmm_vvv.hdf	N/A
MIANCACP	MISR_AM1_ACP_APOP_Fmm_vvvv.hdf	N/A
MIANCACP	MISR_AM1_ACP_MIXTURE_Fmm_vvvv.hdf	N/A
MIANCACP	MISR_AM1_ACP_CLIMLIKE_Fmm_vvvv.hdf	N/A

a. Pnnn corresponds to the orbit path, Fmm corresponds to the file format version number, and vv[vv] is the file version number.

## 9.4 MISR ANCILLARY MIANCAGP GEOGRAPHIC PRODUCT

### 9.4.1 File Metadata Description

**Table 9-3: File Metadata for Ancillary Geographic Product Files.**

File Metadata Field Name	Definition	Data Type	Units	Valid Range/ Value
Path_number	Orbit path number	INT32	N/A	1-233
AGP_version_id	Version Identifier for Ancillary Geographic Product	INT32	N/A	2
DID_version_id	Version Identifier for DID (DTED [Digital Terrain Elevation Dataset] Intermediate Dataset)	INT32	N/A	4
Number_blocks	Total number of blocks	INT32	N/A	1-180
Ocean_blocks_size	Ocean_blocks.number dimension	INT32	N/A	1-180
Ocean_blocks.count	Total number of blocks containing entirely ocean radiances	INT32	N/A	1-180
Ocean_blocks.numbers	List of block numbers containing entirely ocean radiances	INT32	N/A	1-180
SOM_parameters.som_ellipsoid.a	Semimajor axis of ellipsoid	FLOAT64	meters	WGS84
SOM_parameters.som_ellipsoid.e2	Eccentricity of ellipsoid squared	FLOAT64	N/A	WGS84
SOM_parameters.som_orbit.aprime	Semimajor axis of orbit	FLOAT64	meters	Not Used
SOM_parameters.som_orbit.eprime	Eccentricity of orbit	FLOAT64	N/A	Not Used
SOM_parameters.som_orbit.gama	Longitude of perigee	FLOAT64	radians	Not Used
SOM_parameters.som_orbit.nrev	Number of revolutions	INT32	N/A	233
SOM_parameters.som_orbit.ro	Radius of circular orbit	FLOAT64	meters	7078040.8
SOM_parameters.som_orbit.i	Inclination of orbit	FLOAT64	radians	1.7157253
SOM_parameters.som_orbit.P2P1	Ratio of time of revolution over length of Earth rotation/orbit	FLOAT64	N/A	0.0068666667

File Metadata Field Name	Definition	Data Type	Units	Valid Range/ Value
SOM_parameters.som_orbit.lambda0	Geodetic longitude of ascending node at time 0	FLOAT64	radians	0 - 2Pi
Origin_block.ulc.x	SOM X coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.ulc.y	SOM Y coordinate (in meters) of the upper left corner of the first block	FLOAT64	meters	+/- 12 million
Origin_block.lrc.x	SOM X coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	6 million to 33 million
Origin_block.lrc.y	SOM Y coordinate (in meters) of the lower right corner of the first block	FLOAT64	meters	+/- 12 million
Start_block	The block number in the AGP which corresponds to the first block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block
End_block	The block number in the AGP which corresponds to the last block in this file containing data.	INT32	N/A	1 - 180 Start_block < End block

#### 9.4.2 Per-grid Metadata Description

**Table 9-4: Per-grid Metadata for Ancillary Geographic Product Files.**

Common Grid Metadata	Definition	Data Type	Valid Values
Block_size.resolution_x	Resolution of block x dimension in meters	INT32	1100
Block_size.resolution_y	Resolution of block y dimension in meters	INT32	1100
Block_size.size_x	Block x dimension	INT32	128
Block_size.size_y	Block y dimension	INT32	512

#### 9.4.3 Per-block Metadata Description

**Table 9-5: Per-block Metadata for Ancillary Geographic Product Files.**

PerBlockMetadataCommon	Definition	Data Type	Valid Range
Block_number	Block number	INT32	1-180



PerBlockMetadataCommon	Definition	Data Type	Valid Range
Ocean_flag	Flag signalling whether the block contains entirely ocean radiances	INT8	0 = block has no ocean or is a mix of ocean and land 1 = block is entirely ocean
Block_coor_ulc_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
Block_coor_ulc_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.x	Lower right corner SOM block x coordinate in meters	FLOAT64	
Block_coor_lrc_som_meter.y	Lower right corner SOM block y coordinate in meters	FLOAT64	
Data_flag	TBD	INT8	1 = Contains Data 0 = Not Valid

PerBlockMetadataAGP	Definition	Data Type	Valid Range
Point_elev_offset.x	X coordinate offset to point elevation location in meters	FLOAT64	
Point_elev_offset.y	Y coordinate offset to point elevation location in meters	FLOAT64	
ULC_latitude	Upper left corner latitude in degrees	FLOAT64	
ULC_longitude	Upper left corner longitude in degrees	FLOAT64	
ULC_som_meter.x	Upper left corner SOM block x coordinate in meters	FLOAT64	
ULC_som_meter.y	Upper left corner SOM block y coordinate in meters	FLOAT64	

PerBlockMetadataAGP	Definition	Data Type	Valid Range
ULC_som_pixel.x	Lower right corner SOM block x coordinate in meters	INT32	
ULC_som_pixel.y	Lower right corner SOM block y coordinate in meters	INT32	
Ave_block_elev	Average elevation for entire block	FLOAT64	

#### 9.4.4 Grid Data Set Descriptions

**Table 9-6: Ancillary Geographic Product Field Dimension Descriptions.**

Dimension	Description	Valid Values
SOMBlockDim	<i>SOMBlockDim</i> is the number of SOM blocks in the file. The slowest-varying dimension is implicitly the SOM block dimension. It is not shown in the tables below.	180
XDim	<i>XDim</i> is the number of lines in a block. The x dimension direction is identical to the standard SOM x dimension.	128 for 1.1 km parameters 8 for 17.6 km parameters
YDim	<i>YDim</i> is the number of samples in a block. The y dimension direction is identical to the standard SOM y dimension.	512 for 1.1 km parameters 32 for 17.6 km parameters

**Table 9-7: Ancillary Geographic Product Grid Dataset Descriptions.**

Field Name Parameter Description	Dimension List	Number Type	Units	Flag Values or Valid Range
<b>Grid Standard (Spatial Resolution: 1.1 km x 1.1 km, XDim = 128, YDim = 512)</b>				
<b>AveSceneElev</b> Average Scene Elevation	XDim, YDim	INT16	meters	
<b>StdDevSceneElev</b> Standard Deviation of Scene Elevation	XDim, YDim	INT16	meters	
<b>StdDevSceneElevRelSlp</b> Standard Deviation of Scene Elevation Relative to Mean Slope	XDim, YDim	UINT16	n/a	

<b>Field Name</b> Parameter Description	Dimension List	Number Type	Units	Flag Values or Valid Range
<b>PtElev</b> Point Elevation on the 275 m grid.	XDim, YDim	INT16	meters	This field was used during photogrammetric calibration. It is not recommend for use by the general public.
<b>GeoLatitude</b> Geographic Latitude	XDim, YDim	FLOAT32	degrees	
<b>GeoLongitude</b> Geographic Longitude	XDim, YDim	FLOAT32	degrees	
<b>SurfaceFeatureID</b> Surface Feature Identifiers	XDim, YDim	UINT8	n/a	0 = Ocean 1 = Land 2 = Coastline 3 = Inland Water 4 = Ephemeral Water 5 = Deep Inland Water 6 = Deep Ocean
<b>AveSurfNormAzAng</b> Average Surface-Normal Azimuth Angle	XDim, YDim	UINT8	degrees scaled to the range 0-255	To obtain degrees in the range 0-360, multiply by (360/256).  Convention: 0 degrees = North, 90 degrees = East, etc.
<b>AveSurfNormZenAng</b> Average Surface-Normal Zenith Angle	XDim, YDim	UINT8	degrees scaled to the range 0-255	To obtain degrees in the range 0-90, multiply by (90/256).  Convention: 0 degrees = level surface
<b>Grid Regional (Spatial Resolution: 17.6 km x 17.6 km, XDim = 6, YDim = 32)</b>				
<b>RegAveSceneElev</b> Regional Average Scene Elevation	XDim, YDim	INT16	meters	
<b>StdDevRegSceneElev</b> Standard Deviation of Regional Average Scene Elevation	XDim, YDim	UINT16	meters	

## 9.5 MISR ANCILLARY MIANCARP PRFLTCHAR PRODUCT

### 9.5.1 File Metadata Description

**Table 9-8: File Metadata for Ancillary Radiometric Pre-Flight Char Product Files.**

Name	Type	Description
TITLE	8-bit signed char	Name of the ARP file
DATE	8-bit signed char	Date the file was written

### 9.5.2 Per-SDS Metadata Description

None.

### 9.5.3 Per-block Metadata Description

None.

### 9.5.4 Scientific Data Set Descriptions

The ARP data for each file are all in one Science Data Set (SDS). The global attributes hold all of the metadata. Each element in the SDS follows.

The ARP coefficients are placed into the HDF file in an averaging mode (subscript am), radiometric level (l), camera (c), band (b), and pixel (p) order. The index order is:

- averaging mode: 1x1, 1x4, 2x2, and 4x4;
- radiometric levels: from low to high values (0.001 to 1.0);
- camera order is: Df, Cf, Bf, Af, An, Aa, Ba, Ca, and Da;
- band order: Blue, Green, Red, NIR;
- pixel order is to be from 1 to 1504 for the forward cameras, and from 1504 to 1 for the nadir and aftward-viewing cameras, where this pixel index refers to the original camera clocking output order.

Parameters marked in column R have pixel order reversed for the forward cameras, as compared to

the CCD read-out order. In all instances, the Column dimension equals 1.

**Table 9-9: ARP: Preflight characterization data.**

Parameter name [units]	Dimension List	No. of values	Field name
Version number	Version	1	version_no
Spectral response profiles:			
$R_{\lambda}(c,b,s,\lambda)$ [none], measured response profiles	Camera Band Pixel Wavelength	9x4x3x 1471	meas_resp
$Z_R(c,b,s)$ [none], measured response profile zones	Camera Band Pixel	9x4x3	meas_resp_zone
$S_{\lambda}(b,\lambda)$ [none], standardized response profiles	Band Wavelength	4x1471	std_total_resp
$S_{\lambda}^{\text{in-band}}(b,\lambda)$ [none], in-band standardized response profiles	Band Inband Wavelength	4x200	std_inband_resp
in-band wavelength limits: $\lambda_l^{\text{std}}(b)$ [nm], lower limit, and $\lambda_u^{\text{std}}(b)$ [nm], upper limit	Band Column Band Column	$\lambda_l^{\text{std}}$ : 4 $\lambda_u^{\text{std}}$ : 4	wave_low_limit wave_high_limit
Gaussian analysis parameters, unweighted:			
$S_g^{\text{in-band}}(b)$ [none], peak response, gaussian fit to the standardized profile	Band Column	4	gauss_inband_peak
$\lambda_g^{\text{std,in-band}}(b)$ [nm], center wavelength, gaussian fit to the standardized profile	Band Column	4	gauss_inband_center_wav
$\Delta\lambda_g^{\text{std,in-band}}(b)$ [nm], bandwidth, gaussian fit to the standardized profile	Band Column	4	gauss_inband_bandwidth
$R_g^{\text{in-band}}(c,b,p)$ [none], peak response, gaussian fit to the measured profile	Camera Band Active pixels	9x4x 1504	meas_inband_peak
$\lambda_g^{\text{meas,in-band}}(c,b,p)$ [nm], center wavelength, gaussian fit to the measured profile	Camera Band Active pixels	9x4x 1504	meas_inband_center_wav

**Table 9-9: ARP: Preflight characterization data.**

Parameter name [units]	Dimension List	No. of values	Field name
$\Delta\lambda_g^{\text{meas, in-band}}(c,b,p)$ [nm], bandwidth, gaussian fit to the measured profile	Camera Band Active pixels	9x4x 1504	meas_inband_bandwidth
Moments analysis parameters, unweighted:			
$S_m^{\text{std}}(b)$ [none], equivalent response, moments analysis of the standardized profile	Band Column	4	std_moments_height
$\lambda_m^{\text{std}}(b)$ [nm], center wavelength, moments analysis of the standardized profile	Band Column	4	std_moments_center_wav
$\Delta\lambda_m^{\text{std}}(b)$ [nm], bandwidth, moments analysis of the standardized profile	Band Column	4	std_moments_width
$R_m(c,b,p)$ [none], equivalent response, moments analysis of the measured profile	Camera Band Active pixels	9x4x 1504	meas_moments_height
$\lambda_m^{\text{meas}}(c,b,p)$ [nm], center wavelength, moments analysis of the measured profile	Camera Band Active pixels	9x4x 1504	meas_moments_center_wav
$\Delta\lambda_m^{\text{meas}}(c,b,p)$ [nm], bandwidth, moments analysis of the measured profile	Camera Band Active pixels	9x4x 1504	meas_moments_width
Exo-atmospheric solar irradiance:			
$E_{0\lambda}(\lambda)$ [ $\text{W m}^{-2} \mu\text{m}^{-1}$ ], exo-atmospheric solar irradiance	Wavelength Column	1471	exo_atm_irrad
Solar and measured response weighted parameters:			
$\mathcal{E}_0^{\text{meas}}(c,b,p)$ [ $\text{W m}^{-2} \mu\text{m}^{-1}$ ], solar irradiances, measured response weighted	Camera Band Active pixels	9x4x 1504	meas_solar_wgtd_height
$\lambda_{m,\text{solar}}^{\text{meas}}(c,b,p)$ [nm], center wavelength, solar and measured response weighted	Camera Band Active pixels	9x4x 1504	meas_solar_wgtd_center_wav

**Table 9-9: ARP: Preflight characterization data.**

Parameter name [units]	Dimension List	No. of values	Field name
$\Delta\lambda_{m,solar}^{meas}(c,b,p)$ [nm], bandwidth, solar and measured response weighted	Camera Band Active pixels	9x4x 1504	meas_solar_wgted_width
Instantaneous fields-of-view:			
$IFOV_x(c,b,s)$ [ $\mu$ rad], crosstrack instantaneous fields-of-view	Camera Band Zone Pixel	9x4x5	ifov_crosstrk
$IFOV_d(c,b,s)$ [ $\mu$ rad], downtrack fields-of-view	Camera Band Zone Pixel	9x4x5	ifov_downtrk
$Z_{ifov}(c,b,s)$ [none], measured IFOV zones	Camera Band Zone Pixel	9x4x5	ifov_zone
Effective focal length:			
EFL(c) [mm], effective focal length	Camera Column	9	efl

## 9.6 MISR ANCILLARY MIANCARP PRFLTICAL PRODUCT

### 9.6.1 File Metadata Description

**Table 9-10: File Metadata for Ancillary Radiometric PRFLTICAL Product Files.**

Name	Type	Description
TITLE	8-bit signed char	Name of the ARP file
DATE	8-bit signed char	Date the file was written

### 9.6.2 Per-SDS Metadata Description

None.

### 9.6.3 Per-block Metadata Description

None.

### 9.6.4 Scientific Data Set Descriptions

The ARP data for each file are all in one Science Data Set (SDS). The global attributes hold all of the metadata. Each element in the SDS follows.

The ARP coefficients are placed into the HDF file in an averaging mode (subscript am), radiometric level (l), camera (c), band (b), and pixel (p) order. The index order is:

- averaging mode: 1x1, 1x4, 2x2, and 4x4;
- radiometric levels: from low to high values (0.001 to 1.0);
- camera order is: Df, Cf, Bf, Af, An, Aa, Ba, Ca, and Da;
- band order: Blue, Green, Red, NIR;
- pixel order is to be from 1 to 1504 for the forward cameras, and from 1504 to 1 for the nadir and aftward-viewing cameras, where this pixel index refers to the original camera clocking output order.

Parameter [units]	Dimension List	No. of values	ARP software name
Version number	Version	1	pcd_version_no
Solar and in-band standardized response weighted parameters:			



Parameter [units]	Dimension List	No. of values	ARP software name
$E_0^{\text{std,in-band}(b)}$ [ $W m^{-2} \mu m^{-1}$ ], solar irradiances, in-band standardized response weighted	Band Column	4	std_inband_solar_wgted_height
$\lambda_{m,solar}^{\text{std,in-band}(b)}$ [nm], center wavelength, solar and in-band standardized response weighted	Band Column	4	std_inband_solar_wgted_center_wav
$\Delta\lambda_{m,solar}^{\text{std,in-band}(b)}$ [nm], bandwidth, solar and in-band standardized response weighted	Band Column	4	std_inband_solar_wgted_width
Solar and total-band standardized response weighted parameters:			
$E_0^{\text{std}(b)}$ [ $W m^{-2} \mu m^{-1}$ ], solar irradiances, standardized response weighted	Band Column	4	std_solar_wgted_height
$\lambda_{m,solar}^{\text{std}(b)}$ [nm], center wavelength, solar and standardized response weighted	Band Column	4	std_solar_wgted_center_wav
$\Delta\lambda_{m,solar}^{\text{std}(b)}$ [nm], bandwidth, solar and standardized response weighted	Band Column	4	std_solar_wgted_width
c(b,s) [none], Spectral out-of-band correction matrix	Band Index	4x4	spectral_corr_matrix

Parameter [units]	Dimension List	No. of values	ARP software name
PSF <sub>am(c,b,s)</sub> [none], PSF functions	Camera Band Sample  Camera Band 2x2 Sample  Camera Band 4x4 Sample	PSF <sub>1x1</sub> : 9x4x51 PSF <sub>2x2</sub> : 9x4x25 PSF <sub>4x4</sub> : 9x4x13	psf1x1 psf2x2 psf4x4
PAR(b) [none], PAR integration weights	PAR Band Column	3	par_int_wght

## 9.7 MISR ANCILLARY MIANCARP INFLTCAL PRODUCT

### 9.7.1 File Metadata Description

**Table 9-11: File Metadata for Ancillary Radiometric INFLTCAL Product Files.**

Name	Type	Description
TITLE	8-bit signed char	Name of the ARP file
DATE	8-bit signed char	Date the file was written

### 9.7.2 Per-SDS Metadata Description

None.

### 9.7.3 Per-block Metadata Description

None.

### 9.7.4 Scientific Data Set Descriptions

The ARP data for each file are all in one Science Data Set (SDS). The global attributes hold all of the metadata. Each element in the SDS follows.

The ARP coefficients are placed into the HDF file in an averaging mode (subscript am), radiometric level (l), camera (c), band (b), and pixel (p) order. The index order is:

- averaging mode: 1x1, 1x4, 2x2, and 4x4;
- radiometric levels: from low to high values (0.001 to 1.0);
- camera order is: Df, Cf, Bf, Af, An, Aa, Ba, Ca, and Da;
- band order: Blue, Green, Red, NIR;
- pixel order is to be from 1 to 1504 for the forward cameras, and from 1504 to 1 for the nadir and aftward-viewing cameras, where this pixel index refers to the original camera clocking output order.

Parameters marked in column R have pixel order reversed for the forward cameras, as compared to

the CCD read-out order.

**Table 9-12: ARP: In-flight calibration data.**

Parameter [units]	Dimension List	No. of values	ARP software name	R
Version number	Version	1	ifcd_version_no	
Radiometric calibration coefficients:				
Date range [none]	Date range Column	3	date_range	
Radiometric gain coefficients: $G_{0,am}(c,b)$ [DN] gain offset; $G_{1,am}(c,b)$ [DN/ (W m <sup>-2</sup> μm <sup>-1</sup> sr <sup>-1</sup> )] gain; $G_{2,am}(c,b)$ [DN/ (W m <sup>-2</sup> μm <sup>-1</sup> sr <sup>-1</sup> ) <sup>2</sup> ] gain second order coefficient	Camera Band Active pixel Coefficient  Camera Band 2x2 Summed pixel Coefficient  Camera Band 4x4 Summed pixel Coefficient	$G_{0,1x1}$ : 9x4x1504 $G_{1,1x1}$ : 9x4x1504 $G_{2,1x1}$ : 9x4x1504  $G_{0,2x2}$ : 9x4x752 $G_{1,2x2}$ : 9x4x752 $G_{2,2x2}$ : 9x4x752  $G_{0,4x4}$ : 9x4x376 $G_{1,4x4}$ : 9x4x376 $G_{2,4x4}$ : 9x4x376	rad_gain_coeff_1x1 rad_gain_coeff_2x2 rad_gain_coeff_4x4	
$t_{integ}(c,b)$ [msec], integration time	Camera Band	9x4	integration_time	
Calibration uncertainties:				
ER(l) [none], equivalent reflectances	Radiometric level Column	15	equiv_reflect	
$\epsilon_{abs\_sys}(l,c,b)$ [%], absolute radiometric uncertainty: systematic component	Camera Band Radiometric level	9x4x15	abs_rad_unc_sys	
$\epsilon_{abs}(l,c,b)$ [%], absolute radiometric uncertainty: total for 1x1	Camera Band Radiometric level	9x4x15	abs_rad_unc_total_1x1	

**Table 9-12: ARP: In-flight calibration data.**

Parameter [units]	Dimension List	No. of values	ARP software name	R
$\epsilon_{cam\_sys}(l,c,b)$ [%], camera-to-camera relative radiometric uncertainty: systematic component	Camera Band Radiometric level	9x4x15	cam_to_cam_rel_unc_sys	
$\epsilon_{cam}(l,c,b)$ [%], camera-to-camera relative radiometric uncertainty: total for 1x1	Camera Band Radiometric level	9x4x15	cam_to_cam_rel_unc_total_1x1	
$\epsilon_{band\_sys}(l,c,b)$ [%], band-to-band relative radiometric uncertainty: systematic component	Camera Band Radiometric level	9x4x15	band_to_band_rel_unc_sys	
$\epsilon_{band}(l,c,b)$ [%], band-to-band relative radiometric uncertainty: total for 1x1	Camera Band Radiometric level	9x4x15	band_to_band_rel_unc_total_1x1	
$\epsilon_{pix\_sys}(l,c,b)$ [%], pixel-to-pixel relative radiometric uncertainty: systematic component	Camera Band Radiometric level	9x4x15	pixel_to_pixel_rel_unc_sys	
$\epsilon_{pix}(l,c,b)$ [%], pixel-to-pixel relative radiometric uncertainty: total for 1x1	Camera Band Radiometric level	9x4x15	pixel_to_pixel_rel_unc_total_1x1	
SNR <sub>am</sub> (l,c,b) [none], signal-to-noise ratios	Camera Band Radiometric level	SNR <sub>1x1</sub> : 9x4x15 SNR <sub>1x4</sub> : 9x4x15 SNR <sub>2x2</sub> : 9x4x15 SNR <sub>4x4</sub> : 9x4x15	snr_1x1 snr_1x4 snr_2x2 snr_4x4	
DDQI <sub>am</sub> (c,b,s) [none], Detector Data Quality Indicators	Camera Band Active pixel	DDQI <sub>1x1</sub> 9x4x1504 DDQI <sub>2x2</sub> 9x4x752 DDQI <sub>4x4</sub> 9x4x376	ddqi_1x1 ddqi_2x2 ddqi_4x4	
F(c,b) [none], channel operability flag	Camera Band	9x4	chnl_op_flag	

## 9.8 MISR ANCILLARY MIANCARP CONFIG PRODUCT

### 9.8.1 File Metadata Description

**Table 9-13: File Metadata for Ancillary Radiometric CONFIG Product Files.**

Name	Type	Description
TITLE	8-bit signed char	Name of the ARP file
DATE	8-bit signed char	Date the file was written

### 9.8.2 Per-grid Metadata Description

None.

### 9.8.3 Per-block Metadata Description

None.

### 9.8.4 Scientific Data Set Descriptions

The ARP data for each file are all in one Science Data Set (SDS). The global attributes hold all of the metadata. Each element in the SDS follows.

The ARP coefficients are placed into the HDF file in an averaging mode (subscript am), radiometric level (l), camera (c), band (b), and pixel (p) order. The index order is:

- averaging mode: 1x1, 1x4, 2x2, and 4x4;
- radiometric levels: from low to high values (0.001 to 1.0);
- camera order is: Df, Cf, Bf, Af, An, Aa, Ba, Ca, and Da;
- band order: Blue, Green, Red, NIR;
- pixel order is to be from 1 to 1504 for the forward cameras, and from 1504 to 1 for the nadir and aftward-viewing cameras, where this pixel index refers to the original camera clocking output order.

Parameter [unit]	Dimension List	No. of values	ARP software name
$\mathcal{L}_{\max}(b)$ [ $W\ m^{-2}\ \mu m^{-1}\ sr^{-1}$ ], band weighted maximum radiance	Band Column	4	band_wgted_max_rad
$DN_{\text{pix\_sat}}(c,b)$ [DN], pixel saturation threshold	Camera Band	9x4	pix_sat_thresh
$n_{\text{pix\_sat}}$ [none], number of allowable saturated pixels	Number	1	num_sat_pix
Pixel saturation block limits: $n_{\text{am}}(s)$ [none], saturation block start and saturation block end.	Pixel block Pixel block Pixel block Pixel block Pixel block	$n_{1 \times 1}$ : 2 $n_{2 \times 2}$ : 2 $n_{4 \times 4}$ : 2	pix_satblk_1x1_str pix_satblk_1x1_end pix_satblk_2x2_str pix_satblk_2x2_end pix_satblk_4x4_str pix_satblk_4x4_end
$a_{\text{pix\_sat}}(s)$ [none], pixel saturation noise coefficients	Coefficient Column	2	pix_sat_noise_coeff
$\epsilon_{\text{pix\_sat}}(s)$ [%], pixel saturation error thresholds	Threshold Column	2	pix_sat_error_thresh
$DN_{\text{line\_sat}}(c,b)$ [DN], line average threshold	Camera Band	9x4	line_av_thresh
$\Delta DN_{\text{line\_sat}}(c,b)$ [DN], line average noise	Camera Band	9x4	line_av_noise
$\epsilon_{\text{line\_sat}}(s)$ [%], line average error thresholds	Threshold Column	2	line_av_error_thresh
Low DN threshold below which DN values would convert to negative radiances, and instead are set to zero	DN	1	DN_thresh
$f$ , proportion of energy to subtract due to background	Camera Band	9x4	ghost_scalar
$\Delta \text{lines}_{1 \times 1}$ , number of lines to average for background	Lines	1	downtrack_lines_1x1
$\Delta \text{lines}_{2 \times 2}$ , number of lines to average for background	Lines	1	downtrack_lines_2x2

Parameter [unit]	Dimension List	No. of values	ARP software name
$\Delta$ lines <sub>4x4</sub> , number of lines to average for background	Lines	1	downtrack_lines_4x4
$\Delta$ pixels <sub>1x1</sub> , number of pixels to average for background	Pixels	1	crosstrack_pixels_1x1
$\Delta$ pixels <sub>2x2</sub> , number of pixels to average for background	Pixels	1	crosstrack_pixels_2x2
$\Delta$ pixels <sub>4x4</sub> , number of pixels to average for background	Pixels	1	crosstrack_pixels_4x4

## 9.9 MISR ANCILLARY MIANCACP APOP PRODUCT

### 9.9.1 File Metadata Description

The APOP global attributes are small pieces of information which provide information on the data contained in the file. Some of the information is redundant, in that it can be extracted from the data itself using native HDF function calls. This information is provided as an aid to human viewers of the data.

**Table 9-14: Global Attributes**

Attribute Name	Type	Value
Number of models	INT32	11
Number of input model types	INT32	11
Number of bands	INT32	4
Number of scattering angles	INT32	205
Number of particle shape models	INT32	3
Number of particle classifications <sup>a</sup>	INT32	5
Component Particle Properties - Summary Table	CHAR8	Text format summary of particle properties.



a. “Number of particle classifications” refers to the number of classifications of pure aerosol particle models by physical properties such as size and shape. Examples of particle classifications include “small”, “medium”, “large”, “spherical”, and “non-spherical”.

### 9.9.2 Per-grid Metadata Description

None.

### 9.9.3 Per-block Metadata Description

None.

### 9.9.4 Vdata Set Descriptions

HDF Vdatas are mixed data type structures which are dimensioned by records. Each record contains one or more fields, which may be of varying types. Character types are 1 byte long; float and integer types are 4 bytes long. Each field contains one or more pieces of information, all of the same type.

#### 9.9.4.1 APOP Vdata fill values

Several Vdata fields are allowed to have fill values where there is no applicable valid value. These fields are the Log normal characteristic radius, Log normal characteristic width, and Power law exponent, in the Input Pure Particle Types Vdata and the Data Table Vdata. In all of these cases, the fill value is -999.0.

#### 9.9.4.2 APOP Vdata parameters

The APOP file contains six Vdatas. The vdatas are summarized in the table below. Details of each vdata structure follow immediately after the summary.

**Table 9-15: APOP Vdata Summary**

Vdata name	Vdata class	Records	Description
Data Table	Mixed data type	One per model	Contains the primary APOP data
Bands	Mixed data type	One per band	Contains a list specifying the wavelength and band number used for each band
Particle Classification Indices	Integer	1	Index for each particle classification.
Scattering Angles	Floating point	One per scattering angle	Contains a list of the scattering angles used

## 9.9.4.2.1 Data Table

**Table 9-16: Data Table Fields**

Name	Units	Elements	Type
Aerosol model name	None.	80	CHAR8
Model number	None.	1	INT32
Input model number	None.	1	INT32
Shape	None.	80	CHAR8
Size distribution	None.	80	CHAR8
Minimum radius	$\mu\text{m}$	1	FLOAT32
Maximum radius	$\mu\text{m}$	1	FLOAT32
Log normal characteristic radius	$\mu\text{m}$	1	FLOAT32
Log normal characteristic width	$\mu\text{m}$	1	FLOAT32
Power law exponent	None.	1	FLOAT32
Arithmetic mean radius	$\mu\text{m}$	1	FLOAT32
Weighted mean particle cross section	$\mu\text{m}^2$	1	FLOAT32
Weighted mean particle volume	$\mu\text{m}^3$	1	FLOAT32
Effective particle radius	$\mu\text{m}$	1	FLOAT32
Effective size variance	$\mu\text{m}$	1	FLOAT32
Volume weighted mean radius	$\mu\text{m}$	1	FLOAT32
Particle fractional number per classification	none	5	FLOAT32
Particle fractional volume per classification	none	5	FLOAT32
Layer base height	km	1	FLOAT32
Layer top height	km	1	FLOAT32
Layer scale height	km	1	FLOAT32
Spectral refractive index real	None.	4	FLOAT32
Spectral refractive index imaginary	None.	4	FLOAT32
Spectral scattering cross section	$\mu\text{m}^2$	4	FLOAT32
Spectral extinction cross section	$\mu\text{m}^2$	4	FLOAT32
Spectral single scattering albedo	None.	4	FLOAT32
Spectral anisotropy parameter	None.	4	FLOAT32

## 9.9.4.2.2 Bands.

**Table 9-17: Bands Fields**

Field Name	Units	Elements	Type
Band number	None.	1	INT32
std_inband_solar_wgted_center_wav	μm	1	FLOAT32

## 9.9.4.2.3 Particle Classification Indices.

**Table 9-18: Particle Classification Indices Fields**

Field Name	Units	Elements	Type
Small (< 0.35 micron radius) index	None.	1	INT32
Medium (0.35 - 0.7 micron radius) index	None.	1	INT32
Large (> 0.7 micron radius) index	None.	1	INT32
Spherical index	None.	1	INT32
Non-spherical index	None.	1	INT32

## 9.9.4.2.4 Scattering Angles.

**Table 9-19: Scattering Angles Fields**

Field Name	Units	Elements	Type
Scattering angle	degrees	1	FLOAT32

**9.9.5 Scientific Data Set Descriptions**

HDF Scientific Data Sets (SDSs) are multi-dimensional arrays which utilize a single data type. The APOP uses an SDS to provide information on the phase functions of all models. Dimension

scales for the phase function information are also provided.

**Table 9-20: APOP SDS Summary**

SDS Name	Units	Dimensions	Type	Description
Spectral Phase Functions	sr <sup>-1</sup>	11 x 205 x 4	FLOAT32	Effective scattering phase function on a fixed grid of scattering angles
Particle Fractional Spectral Optical Depth Per Classification	None.	11 x 5 x 4	FLOAT32	Fractional optical depth contribution of each aerosol model to particle size classifications (small, medium, large) and shape classifications (spherical, non-spherical).
Model number	None.	11	INT32	Model number for each pure particle model. Used as a dimension scale for the Spectral Phase Functions SDS
Classifier	None.	5	INT32	Index for each pure particle classification by size and shape. Used as a dimension scale for the SDS
Scattering angle	degrees	205	FLOAT32	Scattering angle grid. Used as a dimension scale for the Spectral Phase Functions SDS
Band	μm	4	FLOAT32	Wavelength for each band. Used as a dimension scale for the Spectral Phase Functions SDS

## 9.10 MISR ANCILLARY MIANCACP MIXTURE PRODUCT

### 9.10.1 File Metadata Description

The Mixture global attributes are small pieces of information which provide information on the data contained in the file. Some of the information is redundant, in that it can be extracted from the data itself using native HDF function calls. This information is provided as an aid to human viewers of the data.

**Table 9-21: Global Attributes**

Attribute Name	Type	Value
Number of mixtures	INT32	24
Maximum available number of components	INT32	3
Number of component models contained in APOP file	INT32	11

**Table 9-21: Global Attributes**

Attribute Name	Type	Value
Number of bands	INT32	4
Number of mixture classifications <sup>a</sup>	INT32	5
Number of algorithm types/retrieval paths	INT32	3
Reference band number	INT32	2
Reference band optical depth	FLOAT32	1.0
Mixture Properties - Summary Table	CHAR8	Text format summary of mixture properties.

a. “Number of mixture classifications” refers to the number of classification bins for particle mixtures, based on properties such as size and shape. Examples of classifications include “small”, “medium”, “large”, “spherical”, and “non-spherical”.

### 9.10.2 Per-grid Metadata Description

None.

### 9.10.3 Per-block Metadata Description

None.

### 9.10.4 Vdata Set Descriptions

HDF Vdatas are mixed data type structures which are dimensioned by records. Each record contains one or more fields, which may be of varying types. Character types are 1 byte long; float and integer types are 4 bytes long. Each field contains one or more pieces of information, all of the same type. The Mixture file contains five of these Vdatas, which are described below.

#### 9.10.4.1 Mixture Vdata fill values

None.

#### 9.10.4.2 Mixture Vdata parameters

The Mixture file contains five Vdatas. The vdatas are summarized in the table below. Details of each

vdata structure follow immediately after the summary.

**Table 9-22: APOP Vdata Summary**

Vdata name	Vdata class	Records	Description
Mixture Data	Mixed data type	One per mixture	Contains the mixture data
Component Model Legend	Mixed data type	One per component model	Contains a list specifying the model number and model name of each component contained in the APOP file
Bands	Mixed data type	One per band	Contains a list specifying the wavelength and band number used for each band
Mixture Classification Indices	Integer	1	Index for each mixture classification.
Retrieval Path Indices	Integer	One	Contains a list specifying the index into the retrieval path applicability flag array for each algorithm type
Retrieval Path Applicability Flag Legend	Mixed data type	Two	Contains the meaning of each retrieval path applicability flag value

## 9.10.4.2.1 Mixture Data.

**Table 9-23: Mixture Data Fields**

Field Name	Units	Elements	Type
Aerosol mixture number	None.	1	INT32
Mixture type	None.	80	CHAR8
Component model number	None.	3	INT32
Component fractional optical depth in reference band	None.	3	FLOAT32
Normalized mixture spectral optical depth	None.	4	FLOAT32
Mixture spectral single scattering albedo	None.	4	FLOAT32
Mixture fractional number per classification	None.	5	FLOAT32
Mixture fractional volume per classification	None.	5	FLOAT32
Retrieval path applicability flag	None.	3	INT32

## 9.10.4.2.2 Component Model Legend.

**Table 9-24: Component Model Legends Fields**

Field Name	Units	Elements	Type
Component model number	None.	1	INT32
Component model name	None.	80	CHAR8

## 9.10.4.2.3 Bands.

**Table 9-25: Bands Fields**

Field Name	Units	Elements	Type
Band number	None.	1	INT32
std_inband_solar_wgtd_center_wav	$\mu\text{m}$	1	FLOAT32

## 9.10.4.2.4 Mixture Classification Indices.

**Table 9-26: Mixture Classification Indices Fields**

Field Name	Units	Elements	Type
Small (< 0.35 micron radius) index	None.	1	INT32
Medium (0.35- 0.7 micron radius) index	None.	1	INT32

**Table 9-26: Mixture Classification Indices Fields**

Field Name	Units	Elements	Type
Large (> 0.7 micron radius) index	None.	1	INT32
Spherical index	None.	1	INT32
Non-spherical index	None.	1	INT32

## 9.10.4.2.5 Retrieval Path Indices.

**Table 9-27: Retrieval Path Indices Fields**

Field Name	Elements	Type
Dark water index	1	INT32
Optically thick atmosphere index	1	INT32
Heterogeneous land index	1	INT32

## 9.10.4.2.6 Retrieval Path Applicability Flag Legend.

**Table 9-28: Retrieval Path Applicability Flag Legend Fields**

Field Name	Elements	Type
Retrieval path applicability flag value	1	INT32
Meaning of flag value	80	CHAR8

**9.10.5 Scientific Data Set Descriptions**

HDF Scientific Data Sets (SDSs) are multi-dimensional arrays which utilize a single data type. The Mixture file uses an SDS to provide information on the spectral optical depth fractions for each



component. Dimension scale information is also provided.

**Table 9-29: Mixture SDS Summary**

SDS Name	Units	Dimensions	Type	Description
Component Fractional Spectral Optical Depth	None.	4 x 3 x 24	FLOAT32	Relative abundances (as fractions of total optical depth) of the 3 aerosol components, specified in each spectral band
Mixture Fractional Spectral Optical Depth Per Classification	None.	4 x 5 x 24	FLOAT32	Relative abundances (as fractions of total optical depth) of particles by size (small, medium, large), and by shape (spherical, non-spherical), specified in each spectral band
Band	μm	4	FLOAT32	Wavelength for each band. Used as a dimension scale for the Component Fractional Spectral Optical Depth SDS

## 9.11 MISR ANCILLARY MIANCACP CLIM-LIKELY PRODUCT<sup>1</sup>

### 9.11.1 File Metadata Description

TBD.

### 9.11.2 Per-grid Metadata Description

TBD.

### 9.11.3 Per-block Metadata Description

TBD.

### 9.11.4 Vdata Set Descriptions

TBD.

### 9.11.5 Scientific Data Set Descriptions

TBD.

---

1. This file does not yet exist, and its format has not been defined.



## 10.0 MISR LEVEL 3 COMPONENT PRODUCTS

### 10.1 MISR LEVEL 3 PRODUCT GRANULE NAMES

**MISR Level 3 Component Products** are composed of four different kinds of file granules reported at four different time scales; daily, monthly, seasonal, and yearly. The files have an identical format on each of the time scales. The file granules are listed below (Table 10-1).

**Table 10-1: MISR Level 3 File Granule Names**

MISR LEVEL 3 FILE GRANULE NAME <sup>a</sup>	ESDT Name	Section
MISR_AM1_CGGRP_mmm_dd_yyyy_Fff_vvvv.hdf	MIL3DRD	§10.4
MISR_AM1_CGGRP_mmm_yyyy_Fff_vvvv.hdf	MIL3MRD	§10.4
MISR_AM1_CGGRP_sss_yyyy_Fff_vvvv.hdf	MIL3QRD	§10.4
MISR_AM1_CGGRP_yyyy_Fff_vvvv.hdf	MIL3YRD	§10.4
MISR_AM1_CGAS_mmm_dd_yyyy_Fff_vvvv.hdf	MIL3DAE	§10.5
MISR_AM1_CGAS_mmm_yyyy_Fff_vvvv.hdf	MIL3MAE	§10.5
MISR_AM1_CGAS_sss_yyyy_Fff_vvvv.hdf	MIL3QAE	§10.5
MISR_AM1_CGAS_yyyy_Fff_vvvv.hdf	MIL3YAE	§10.5
MISR_AM1_CGLS_mmm_dd_yyyy_Fff_vvvv.hdf	MIL3DLS	§10.6
MISR_AM1_CGLS_mmm_yyyy_Fff_vvvv.hdf	MIL3MLS	§10.6
MISR_AM1_CGLS_sss_yyyy_Fff_vvvv.hdf	MIL3QLS	§10.6
MISR_AM1_CGLS_yyyy_Fff_vvvv.hdf	MIL3YLS	§10.6
MISR_AM1_CGAL_mmm_dd_yyyy_Fff_vvvv.hdf	MIL3DAL	§10.7
MISR_AM1_CGAL_mmm_yyyy_Fff_vvvv.hdf	MIL3MAL	§10.7
MISR_AM1_CGAL_sss_yyyy_Fff_vvvv.hdf	MIL3QAL	§10.7
MISR_AM1_CGAL_yyyy_Fff_vvvv.hdf	MIL3YAL	§10.7

a. “mmm” is the three character month (one of “JAN”, “FEB”, “MAR”, “APR”, “MAY”, “JUN”, “JUL”, “AUG”, “SEP”, “OCT”, “NOV”, “DEC”), “sss” is the season (one of “WIN”, “SPR”, “SUM”, “FALL”), “dd” is the two digit day (e.g., “03”), “yyyy” is the four digit year (e.g., “2002”), “ff” is the format version number (e.g. “01”), and “vvvv” is the data version number (e.g., “0001”).

### 10.2 MISR LEVEL 3 PRODUCT GRANULE BRIEF DESCRIPTIONS

Level 3 provides a global summary of Level 1 and Level 2 data. Level 1 and 2 parameters of interest are averaged over a day, month, season, or year and the results reported on a geographic grid, with

resolution 0.5 degree by 0.5 degrees, 1 degree by 1 degree, or 5 degree by 5 degree — depending on the product. In addition, for some parameters the variance of that parameter and covariance with other parameters are also reported. To reduce the size of the Level 3 files, the variance/covariance is reported at a coarser resolution of 1 degree by 1 degree.

### 10.3 MISR LEVEL 3 PRODUCT GRANULE DATA SETS

The product will be produced as 16 separate ESDTs, each with one physical file (Table 10-2). There are 4 different kinds of files, each reported on 4 different time scales.

Each file contains one or more HDF-EOS grids. Each grid is in a geographic projection, with a resolution of either 0.5 degree by 0.5 degree, 1 degree by 1 degree, or 5 degree by 5 degree.

**Table 10-2: Level 3 Component Global Product Files and Grid Datasets**

ESDT Short name	Local Granule ID <sup>a</sup>	Grid Dataset Name
MIL3DRD	MISR_AM1_CGGRP_mmm_dd_yyyy_Fff_vvvv.hdf	GeorectifiedRadianceAverage
MIL3MRD	MISR_AM1_CGGRP_mmm_yyyy_Fff_vvvv.hdf	GeorectifiedRadianceCovariance
MIL3QRD	MISR_AM1_CGGRP_sss_yyyy_Fff_vvvv.hdf	
MIL3YRD	MISR_AM1_CGGRP_yyyy_Fff_vvvv.hdf	
MIL3DAE	MISR_AM1_CGAS_mmm_dd_yyyy_Fff_vvvv.hdf	
MIL3MAE	MISR_AM1_CGAS_mmm_yyyy_Fff_vvvv.hdf	LandParameterAverage
MIL3QAE	MISR_AM1_CGAS_sss_yyyy_Fff_vvvv.hdf	
MIL3YAE	MISR_AM1_CGAS_yyyy_Fff_vvvv.hdf	
MIL3DLS	MISR_AM1_CGLS_mmm_dd_yyyy_Fff_vvvv.hdf	
MIL3MLS	MISR_AM1_CGLS_mmm_yyyy_Fff_vvvv.hdf	
MIL3QLS	MISR_AM1_CGLS_sss_yyyy_Fff_vvvv.hdf	
MIL3YLS	MISR_AM1_CGLS_yyyy_Fff_vvvv.hdf	
MIL3DAL	MISR_AM1_CGAL_mmm_dd_yyyy_Fff_vvvv.hdf	AlbedoAverage_5_degree
MIL3MAL	MISR_AM1_CGAL_mmm_yyyy_Fff_vvvv.hdf	
MIL3QAL	MISR_AM1_CGAL_sss_yyyy_Fff_vvvv.hdf	
MIL3YAL	MISR_AM1_CGAL_yyyy_Fff_vvvv.hdf	

a. mmm” is the three character month (one of “JAN”, “FEB”, “MAR”, “APR”, “MAY”, “JUN”, “JUL”, “AUG”, “SEP”, “OCT”, “NOV”, “DEC”), “sss” is the season (one of “WIN”, “SPR”, “SUM”, “FALL”), “dd” is the two digit day (e.g., “03”), “yyyy” is the four digit year (e.g., “2002”), “ff” is the format version number (e.g. “01”), and “vvvv” is the data version number (e.g., “0001”)

There is a standard set of HDF vdatas included in each of the files that contains metadata information. See for example Table 10-3. This includes:

1. There is a vdata “Source file” that contains a description of the swaths that are summarized in the Level 3 product. The vdata has four columns, “Orbit number”, “Path number”, “Local Granule Id”, and “Local version Id”. There is a row in the vdata for each swath that is summarized in

the Level 3 product.

2. For each HDF-EOS grid<sup>1</sup> there is a vdata “Time of Observations <Grid name>” which contains the date and times that a Level 3 grid cell was seen by the MISR instrument. This vdata has 9 columns “Latitude Index”, “Longitude Index”, “Orbit”, “Path”, “Year”, “Month”, “Day”, “Hour”, “Minute”. The vdata is sorted, first by latitude index, then longitude index, then by orbit. The latitude and longitude indices are the same as the indices used to look into a field in the HDF-EOS grid. There is one entry for each swath that sees a Level 3 grid cell.
3. For each HDF dimension that appears in a HDF-EOS grid there is a vdata “<Dimension name> Enumeration” that contains a description of each value of the enumeration. For example, several of the file types contains grid indexed by a the dimension “Band”. There is a vdata “Band Enumeration” that contains 4 values “Blue (443 nm)”, “Green (555 nm)”, “Red (670 nm)”, and “Infrared (865 nm)”. This indicates that a Band dimension value of 0 is the blue band, a value of 1 is the green band, and so on.
4. For each field in an HDF-EOS grid, there is a vdata that summarizes overall statistics about the field, named “<Field name> Statistic”. For example, MIL3MLS contains a grid with a field “NDVI average”, so there is a vdata “NDVI average Statistic”. The vdata has 5 columns “Minimum”, “Maximum”, “Mean”, “Standard Deviation”, and “Count”. These vdata can be used by display packages to scale the data for display, among other uses.

#### **10.4 MISR LEVEL 3 MIL3DRD, MIL3MRD, MIL3QRD, MIL3YRD COMPONENT GLOBAL GEORECTIFIED PRODUCT**

---

1. This has not yet been implemented in the component radiance product, although it is present in the other three Level 3 products. A future version of the software will add this for the component radiance product.

## 10.4.1 File Metadata Description

Table 10-3: CGGRP File metadata

Vdata Name	Vdata Field Name	Definition	Data Type	Units	Valid Range
Source File	Orbit Number	List of orbits that are summarized in this Level 3 file.	INT32	N/A	0-999999
	Path Number	List of paths that are summarized in this Level 3 file.	UINT8	N/A	1-233
	Local Granule Id	List of local granule IDs summarized in this Level 3 file. Only the DF terrain file is listed, since the other input files follow from this example file.	CHAR8 x 80	N/A	N/A
	Local Version Id	List of local version IDs summarized in this Level 3 file. Only DF terrain is listed.	CHAR8 x 100	N/A	N/A
<Dimension name> Enumeration <sup>a</sup>	Value	Meaning of each value in the dimension. For example, Band has 4 entries: "Blue (443 nm)", "Green (555 nm)", "Red (670 nm)", "Infrared (865 nm)".	CHAR8 x 60	N/A	N/A
<Grid field name> Statistic <sup>b</sup>	Minimum	Minimum found in grid. This is taken over XDim and YDim. Other dimensions are collapsed into a 1D array <sup>c</sup> .	FLOAT32	Same as for grid	Same as for grid
	Maximum	Maximum found in grid	FLOAT32	Same as for grid	Same as for grid
	Mean	Mean of grid	FLOAT32	Same as for grid	Same as for grid
	Standard Deviation	Standard deviation of grid	FLOAT32	N/A	>= 0
	Count	Count of grid	INT32	N/A	>= 0

a. <Dimension name> is a place holder for each dimension in file. For example, there is one Vdata named "Band Enumeration", and another named "Camera Enumeration". See Table 10-4 for list of Dimensions.

b. <Grid field name> is a place holder for each grid field name in file. For example, there is one Vdata named "Average Statistic", and another named "Average count Statistic". See Table 10-5 for list of grid fields.

c. For example, for a grid field that is XDim x YDim x Camera x Band the average is reported as a Camera x Band flattened into a 1 D list of  $9 \times 4 = 36$  values.

10.4.2 File Dimensions

Table 10-4: CGGRP File Dimensions

Dimension	Description	Number values	Values
Camera	MISR Camera	9	0 = Df, 1 = Cf, 2 = Bf, 3 = Af, 4 = An, 5 = Aa, 6 = Ba, 7 = Ca, 8 = Da
Band	MISR Camera Band	4	0 = Blue (443 nm), 1 = Green (555 nm), 2 = Red (670 nm), 3 = Infrared (865 nm)
CovarianceIndex	Index in covariance matrix	666	0 = Variance Df Blue (443 nm), 1 = Covariance Df Blue (443 nm), Df Green (555 nm) 2 = Variance Df Green (555 nm) ... This is all the lower triangle entries of the covariance matrix

10.4.3 Grid Dataset Description

Table 10-5: CGGRP Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>GeorectifiedRadianceAverage (0.5 degree x 0.5 degree, XDim = 720, YDim = 360)</b>				
<b>Average fill flag</b> This is an implementation detail, and not likely to be of interest to a user. <sup>a</sup>	YDim, XDim	INT8	N/A	0 = all other fields fill 1 = other fields might not be fill
<b>Average</b> Average of radiances	YDim, XDim, Camera, Band	FLOAT32	W m <sup>-2</sup> sr <sup>-1</sup> μm <sup>-1</sup>	-9999 = fill

Table 10-5: CGGRP Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>Average count</b> Count of radiances used in average	YDim, XDim, Camera, Band	INT32	N/A	N/A
<b>GeorectifiedRadianceCovariance (1 degree x 1 degree, XDim = 360, YDim = 180)</b>				
<b>Covariance fill flag</b> This is an implementation detail, and not likely to be of interest to a user. <sup>b</sup>	YDim, XDim	INT8	N/A	0 = all other fields fill 1 = other fields might not be fill
<b>Covariance</b> Variance and covariances between radiances. This contains only the lower triangle part of the symmetric covariance matrix.	YDim, XDim, CovarianceIndex	FLOAT32	$W^2 m^{-4} sr^{-2}$ $\mu m^{-2}$	0 = fill
<b>Covariance average 1</b> Average of the first radiance in the covariance. <sup>c</sup>	YDim, XDim, CovarianceIndex	FLOAT32	$W m^{-2} sr^{-1}$ $\mu m^{-1}$	-9999 = fill
<b>Covariance average 2</b> Average of the second radiance in the covariance. <sup>d</sup>	YDim, XDim, CovarianceIndex	FLOAT32	$W m^{-2} sr^{-1}$ $\mu m^{-1}$	-9999 = fill
<b>Covariance count</b> Count of radiance pairs that are used in covariance	YDim, XDim, CovarianceIndex	INT32	N/A	N/A

a. This is a flag field. If the value is 0, then all of the other fields in the GeorectifiedRadianceAverage grid will contain fill data for the grid cell location. However, even if the flag is 1 other fields might still contain fill data. This is used during processing to avoid looking at grid cells that are certain not to have data.

b. This is a flag field. If the value is 0, then all of the other fields in the GeorectifiedRadianceCovariance grid will contain fill data for the grid cell location. However, even if the flag is 1 other fields might still contain fill data. This is used during processing to avoid looking at grid cells that are certain not to have data.

c. This is almost the same as the information in the "Average" field except: 1) it is reported on 1 degree by 1 degree grid rather than 0.5 degree by 0.5 degree and 2) only radiances where both the first and second radiance in the covariance are available are include, e.g. if the this is for "Covariance Df Red, Cf Blue" only radiances where both the Df Red and Cf Blue are not fill are included.

d. Same comment here.

## 10.5 MISR LEVEL 3 MIL3DAE, MIL3MAE, MIL3QAE, MIL3YAE COMPONENT GLOBAL AEROSOL PRODUCT



## 10.5.1 File Metadata Description

Table 10-6: CGAS File metadata

Vdata Name	Vdata Field Name	Definition	Data Type	Units	Valid Range
Source File	Orbit Number	List of orbits that are summarized in this Level 3 file.	INT32	N/A	0-999999
	Path Number	List of paths that are summarized in this Level 3 file.	UINT8	N/A	1-233
	Local Granule Id	List of local granule IDs summarized in this Level 3 file.	CHAR8 x 80	N/A	N/A
	Local Version Id	List of local version IDs summarized in this Level 3 file.	CHAR8 x 100	N/A	N/A
Time of Observation AerosolParameterAverage <sup>a</sup>	Latitude Index	Latitude index, same as index used to read a field of the HDF-EOS grid.	INT16	N/A	Same as grid
	Longitude Index	Latitude index, same as index used to read a field of the HDF-EOS grid.	INT16	N/A	Same as grid
	Orbit	Orbit number of swath that saw Level 3 grid cell.	INT32	N/A	> 0
	Path	Path of swath that saw Level 3 grid cell.	UINT8	N/A	1 - 233
	Year	Year Level 3 grid cell was seen. This is in years since 2000 (e.g., 2002 is recorded as "2").	UINT8	N/A	0 - Present
	Month	Month Level 3 grid cell was seen.	UINT8	N/A	1-12
	Day	Day Level 3 grid cell was seen.	UINT8	N/A	1-31
	Hour	Hour Level 3 grid cell was seen.	UINT8	N/A	0-23
Minute	Minute Level 3 grid cell was seen.	UINT8	N/A	0-59	
<Dimension name> Enumeration <sup>b</sup>	Value	Meaning of each value in the dimension.	CHAR8 x 60	N/A	N/A

Table 10-6: CGAS File metadata

Vdata Name	Vdata Field Name	Definition	Data Type	Units	Valid Range
<Grid field name> Statistic <sup>c</sup>	Minimum	Minimum found in grid. This is taken over XDim and YDim. Other dimensions are collapsed into a 1D array <sup>d</sup> .	FLOAT32	Same as for grid	Same as for grid
	Maximum	Maximum found in grid	FLOAT32	Same as for grid	Same as for grid
	Mean	Mean of grid	FLOAT32	Same as for grid	Same as for grid
	Standard Deviation	Standard deviation of grid	FLOAT32	N/A	>= 0
	Count	Count of grid	INT32	N/A	>= 0

a. This vdata is sorted first by latitude index, then longitude index, and then orbit.

b. <Dimension name> is a place holder for each dimension in file. For example, there is one Vdata named "AlgorithmType Enumeration". See Table 10-7 for list of Dimensions.

c. <Grid field name> is a place holder for each grid field name in file. For example, there is one Vdata named "Optical depth average Statistic". See Table 10-8 for list of grid fields.

d. For example, for a grid field that is XDim x YDim x AlgorithmType the average is reported as a Algorithm-Type flattened into a 1 D list of 8 values.

## 10.5.2 File Dimensions

Table 10-7: CGAS File Dimensions

Dimension	Description	Number values	Values
AlgorithmType	Algorithm type flag used by Level 2 processing to generate the Aerosol optical depth.	8	0 = No retrieval, 1 = Dark water retrieval, 2 =Optically thick atmosphere (OTA) retrieval, 3 = Heterogeneous land retrieval, 4 = No retrieval, using low optical depth algorithm, 5 = No retrieval, using optical depth in previous domain, 6 = No retrieval, using Rayleigh scattering only algorithm, 7 = No retrieval, using optical depth upper bound algorithm

## 10.5.3 Grid Dataset Description

Table 10-8: CGAS Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>AerosolParameterAverage (0.5 degree x 0.5 degree, XDim = 720, YDim = 360)</b>				
<b>Algorithm type count</b> Number of Level 2 grid cells that were processed with a particular algorithm.	YDim, XDim, AlgorithmType	INT32	N/A	N/A
<b>Average fill flag</b> This is an implementation detail, and not likely to be of interest to a user. <sup>a</sup>	YDim, XDim	INT8	N/A	0 = all other fields fill 1 = other fields might not be fill
<b>Optical depth average</b> Average of optical depth. <sup>b</sup>	YDim, XDim	FLOAT32	N/A	-9999 = fill
<b>Optical depth average count</b> Count of optical depths used in average.	YDim, XDim	INT32	N/A	N/A

- a. This is a flag field. If the value is 0, then all of the other fields in the GeorectifiedRadianceAverage grid will contain fill data for the grid cell location. However, even if the flag is 1 other fields might still contain fill data. This is used during processing to avoid looking at grid cells that are certain not to have data.
- b. There are several optical depths reported in Level 2. Level 3 uses the RegMeanSpectralOptDepth (see Table 8-10 on page 229). The Level 2 data has a value for each of the 4 MISR spectral bands, but Level 3 uses only the green band.

## **| 10.6 MISR LEVEL 3 MIL3DLS, MIL3MLS, MIL3QLS, MIL3YLS COMPONENT GLOBAL LAND/SURFACE PRODUCT**

## 10.6.1 File Metadata Description

Table 10-9: CGLS File metadata

Vdata Name	Vdata Field Name	Definition	Data Type	Units	Valid Range
Source File	Orbit Number	List of orbits that are summarized in this Level 3 file	INT32	N/A	0-999999
	Path Number	List of paths that are summarized in this Level 3 file	UINT8	N/A	1-233
	Local Granule Id	List of local granule IDs summarized in this Level 3 file.	CHAR8 x 80	N/A	N/A
	Local Version Id	List of local version IDs summarized in this Level 3 file.	CHAR8 x 100	N/A	N/A
Time of Observation LandParameterAverage <sup>a</sup>	Latitude Index	Latitude index, same as index used to read a field of the HDF-EOS grid.	INT16	N/A	Same as grid
	Longitude Index	Longitude index, same as index used to read a field of the HDF-EOS grid.	INT16	N/A	Same as grid
	Orbit	Orbit number of swath that saw Level 3 grid cell.	INT32	N/A	> 0
	Path	Path of swath that saw Level 3 grid cell.	UINT8	N/A	1 - 233
	Year	Year Level 3 grid cell was seen. This is in years since 2000 (e.g., 2002 is recorded as "2").	UINT8	N/A	0 - Present
	Month	Month Level 3 grid cell was seen.	UINT8	N/A	1-12
	Day	Day Level 3 grid cell was seen.	UINT8	N/A	1-31
	Hour	Hour Level 3 grid cell was seen.	UINT8	N/A	0-23
	Minute	Minute Level 3 grid cell was seen.	UINT8	N/A	0-59
<Dimension name> Enumeration <sup>b</sup>	Value	Meaning of each value in the dimension. For example, Band has 4 entries: "Blue (443 nm)", "Green (555 nm)", "Red (670 nm)", "Infrared (865 nm)"	CHAR8 x 60	N/A	N/A

Table 10-9: CGLS File metadata

Vdata Name	Vdata Field Name	Definition	Data Type	Units	Valid Range
<Grid field name> Statistic <sup>c</sup>	Minimum	Minimum found in grid. This is taken over XDim and YDim. Other dimensions are collapsed into a 1D array <sup>d</sup> .	FLOAT32	Same as for grid	Same as for grid
	Maximum	Maximum found in grid	FLOAT32	Same as for grid	Same as for grid
	Mean	Mean of grid	FLOAT32	Same as for grid	Same as for grid
	Standard Deviation	Standard deviation of grid	FLOAT32	N/A	>= 0
	Count	Count of grid	INT32	N/A	>= 0

a. This vdata is sorted first by latitude index, then longitude index, and then orbit.

b. <Dimension name> is a place holder for each dimension in file. For example, there is one Vdata named “Band Enumeration”, and another named “Camera Enumeration”. See Table 10-10 for list of Dimensions.

c. <Grid field name> is a place holder for each grid field name in file. For example, there is one Vdata named “DHR average Statistic”, and another named “DHR average count Statistic”. See Table 10-11 for list of grid fields.

d. For example, for a grid field that is XDim x YDim x Camera x Band the average is reported as a Camera x Band flattened into a 1 D list of  $9 \times 4 = 36$  values.

## 10.6.2 File Dimensions

Table 10-10: CGLS File Dimensions

Dimension	Description	Number values	Values
Band	MISR Camera Band	4	0 = Blue (443 nm), 1 = Green (555 nm), 2 = Red (670 nm), 3 = Infrared (865 nm)

## 10.6.3 Grid Dataset Description

Table 10-11: CGLS Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>LandParameterAverage (0.5 degree x 0.5 degree, XDim = 720, YDim = 360)</b>				
<b>Average fill flag</b> This is an implementation detail, and not likely to be of interest to a user. <sup>a</sup>	YDim, XDim	INT8	N/A	0 = all other fields fill 1 = other fields might not be fill
<b>DHR average</b> Average of DHR (Directional-Hemispheric Reflectance). Defined as radiant exitance divided by irradiance under illumination from a single direction. Also known as the "black sky" albedo.	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>DHR average count</b> Count of DHR values used in average.	YDim, XDim, Band	INT32	N/A	N/A
<b>DHRPAR average</b> Average of DHR integrated over the Photosynthetically Active Radiation (PAR) band.	YDim, XDim	FLOAT32	N/A	-9999 = fill
<b>DHRPAR average count</b> Count of DHRPAR values used in average.	YDim, XDim	INT32	N/A	N/A

Table 10-11: CGLS Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>DHR Shortwave approximation average</b> Average of DHR for a broad shortwave band (400-2500 nm), approximated from visible bands <sup>b</sup> .	YDim, XDim	FLOAT32	N/A	-9999 = fill
<b>DHR Shortwave approximation average count</b> Count of DHRPAR values used in average	YDim, XDim	INT32	N/A	N/A
<b>FPAR average</b> Average of Fractional absorbed Photosynthetically Active Radiation (FPAR). Defined as PAR irradiance absorbed by live vegetation divided by incident PAR irradiance.	YDim, XDim	FLOAT32	N/A	-9999 = fill
<b>FPAR average count</b> Count of FPAR values used in average	YDim, XDim	INT32	N/A	N/A
<b>LAI average</b> Average of Leaf Area Index (LAI).	YDim, XDim	FLOAT32	N/A	-9999 = fill
<b>LAI average count</b> Count of LAI values used in average	YDim, XDim	INT32	N/A	N/A
<b>NDVI average</b> Average of Normalized Difference Vegetation Index (NDVI).	YDim, XDim	FLOAT32	N/A	-9999 = fill
<b>NDVI average count</b> Count of NDVI values used in average	YDim, XDim	INT32	N/A	N/A

a. This is a flag field. If the value is 0, then all of the other fields in the GeorectifiedRadianceAverage grid will contain fill data for the grid cell location. However, even if the flag is 1 other fields might still contain fill data. This is used during processing to avoid looking at grid cells that are certain not to have data.

b. See “Hemispherical reflectance and albedo estimates from the accumulation of across-track sun-synchronous satellite data”, Weiss M, Baret F, Leroy M, Begue A, Hautecoeur O, Santer R, Journal of Geophysical Research-Atmospheres 104: (D18) 22221-22232 September 27 1999.

## 10.7 MISR LEVEL 3 MIL3DAL, MIL3MAL, MIL3QAL, MIL3YAL COMPONENT GLOBAL ALBEDO PRODUCT



## 10.7.1 File Metadata Description

Table 10-12: CGAL File metadata

Vdata Name	Vdata Field Name	Definition	Data Type	Units	Valid Range
Source File	Orbit Number	List of orbits that are summarized in this Level 3 file	INT32	N/A	0-999999
	Path Number	List of paths that are summarized in this Level 3 file	UINT8	N/A	1-233
	Local Granule Id	List of local granule IDs summarized in this Level 3 file.	CHAR8 x 80	N/A	N/A
	Local Version Id	List of local version IDs summarized in this Level 3 file.	CHAR8 x 100	N/A	N/A
Time of Observation <Grid Name> <sup>a</sup>	Latitude Index	Latitude index, same as index used to read a field of the HDF-EOS grid.	INT16	N/A	Same as grid
	Longitude Index	Longitude index, same as index used to read a field of the HDF-EOS grid.	INT16	N/A	Same as grid
	Orbit	Orbit number of swath that saw Level 3 grid cell.	INT32	N/A	> 0
	Path	Path of swath that saw Level 3 grid cell.	UINT8	N/A	1 - 233
	Year	Year Level 3 grid cell was seen. This is in years since 2000 (e.g., 2002 is recorded as "2").	UINT8	N/A	0 - Present
	Month	Month Level 3 grid cell was seen.	UINT8	N/A	1-12
	Day	Day Level 3 grid cell was seen.	UINT8	N/A	1-31
	Hour	Hour Level 3 grid cell was seen.	UINT8	N/A	0-23
Minute	Minute Level 3 grid cell was seen.	UINT8	N/A	0-59	
<Dimension name> Enumeration <sup>b</sup>	Value	Meaning of each value in the dimension. For example, Band has 4 entries: "Blue (443 nm)", "Green (555 nm)", "Red (670 nm)", "Infrared (865 nm)"	CHAR8 x 60	N/A	N/A

Table 10-12: CGAL File metadata

Vdata Name	Vdata Field Name	Definition	Data Type	Units	Valid Range
<Grid field name> Statistic <sup>c</sup>	Minimum	Minimum found in grid. This is taken over XDim and YDim. Other dimensions are collapsed into a 1D array <sup>d</sup> .	FLOAT32	Same as for grid	Same as for grid
	Maximum	Maximum found in grid	FLOAT32	Same as for grid	Same as for grid
	Mean	Mean of grid	FLOAT32	Same as for grid	Same as for grid
	Standard Deviation	Standard deviation of grid	FLOAT32	N/A	>= 0
	Count	Count of grid	INT32	N/A	>= 0

a. This vdata is sorted first by latitude index, then longitude index, and then orbit.

b. <Dimension name> is a place holder for each dimension in file. For example, there is one Vdata named “Band Enumeration”, and another named “Camera Enumeration”. See Table 10-13 for list of Dimensions.

c. <Grid field name> is a place holder for each grid field name in file. For example, there is one Vdata named “Expansive albedo average - 1 deg Statistic”, and another named “Expansive albedo swath count - 1 deg Statistic”. See Table 10-14 for list of grid fields.

d. For example, for a grid field that is XDim x YDim x Camera x Band the average is reported as a Camera x Band flattened into a 1 D list of  $9 \times 4 = 36$  values.

## 10.7.2 File Dimensions

Table 10-13: CGAL File Dimensions

Dimension	Description	Number values	Values
Band	MISR Camera Band	5	0 = Blue (443 nm), 1 = Green (555 nm), 2 = Red (670 nm), 3 = Infrared (865 nm) 4 = Broadband
CosineSolarZenithAngle	Cosine of the solar zenith angle	10	0 = 0 - 0.1 1 = 0.1 - 0.2 ... 9 = 0.9 - 1.0
LandOcean	Land or Ocean	3	0 = All 1 = Land 2 = Ocean
Latitude	Latitude range	180	0 = 89 to 90 1 = 88 to 89 ... 179 = -90 to -89
SurfaceType	Surface type	3	0 = Land 1 = Ocean 2 = Snow/ice
TextureType	Texture type	3	0 = Smooth 1 = Medium 2 = Rough
HistogramBin	Histogram bin	220	0 = Underflow 1 = 0 to 0.005 2 = 0.005 - 0.010 ... 200 = 0.995 - 1.000 201 = 1 to 1.5 202 = 1.5 to 2 ... 218 = 9.5 to 10 219 = Overflow

## 10.7.3 Grid Dataset Description

Table 10-14: CGAL Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>AlbedoAverage_1_degree (1 degree x 1degree, XDim = 360, YDim = 180)</b>				
<b>Average fill flag - 1 deg</b> This is an implementation detail, and not likely to be of interest to a user. <sup>a</sup>	YDim, XDim	INT8	N/A	0 = all other fields fill 1 = other fields might not be fill
<b>Swath count - 1 deg</b> Number of swaths that see a Level 3 Grid Cell	YDim, XDim	INT32	N/A	N/A
<b>Expansive albedo average - 1 deg</b> Average of expansive albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Expansive albedo first moment - 1 deg</b> Average of expansive albedo. This is a direct average of the Level 2 Albedos.	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Expansive albedo standard deviation - 1 deg</b> Standard deviation of expansive albedo	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Expansive albedo solar insolation - 1 deg</b> Average solar insolation of pixels that contribute to Expansive albedo average	YDim, XDim, Band	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill
<b>Expansive albedo swath count - 1 deg</b> Number of swaths that contribute to average.	YDim, XDim, Band	INT32	N/A	N/A

Table 10-14: CGAL Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>Local albedo average - 1 deg</b> Average of local albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Local albedo first moment - 1 deg</b> Average of local albedo. This is a direct average of the Level 2 Albedos.	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Local albedo standard deviation - 1 deg</b> Standard deviation of local albedo	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Local albedo solar insolation - 1 deg</b> Average solar insolation of pixels that contribute to local albedo average	YDim, XDim, Band	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill
<b>Local albedo swath count - 1 deg</b> Number of swaths that contribute to average.	YDim, XDim, Band	INT32	N/A	N/A
<b>Restrictive albedo average - 1 deg</b> Average of restrictive albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Restrictive albedo first moment - 1 deg</b> Average of restrictive albedo. This is a direct average of the Level 2 Albedos.	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Restrictive albedo standard deviation - 1 deg</b> Standard deviation of restrictive albedo	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill

Table 10-14: CGAL Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>Restrictive albedo solar insolation - 1 deg</b> Average solar insolation of pixels that contribute to restrictive albedo average	YDim, XDim, Band	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill
<b>Restrictive albedo swath count - 1 deg</b> Number of swaths that contribute to average.	YDim, XDim, Band	INT32	N/A	N/A
<b>AlbedoAverage_5_degree (1 degree x 1degree, XDim = 72, YDim = 36)</b>				
<b>Average fill flag - 5 deg</b> This is an implementation detail, and not likely to be of interest to a user. <sup>b</sup>	YDim, XDim	INT8	N/A	0 = all other fields fill 1 = other fields might not be fill
<b>Swath count - 5 deg</b> Number of swaths that see a Level 3 Grid Cell	YDim, XDim	INT32	N/A	N/A
<b>Expansive albedo average - 5 deg</b> Average of expansive albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Expansive albedo first moment - 5 deg</b> Average of expansive albedo. This is a direct average of the Level 2 Albedos.	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Expansive albedo standard deviation - 5 deg</b> Standard deviation of expansive albedo	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Expansive albedo solar insolation - 5 deg</b> Average solar insolation of pixels that contribute to Expansive albedo average	YDim, XDim, Band	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill

Table 10-14: CGAL Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>Expansive albedo swath count - 5 deg</b> Number of swaths that contribute to average.	YDim, XDim, Band	INT32	N/A	N/A
<b>Local albedo average - 5 deg</b> Average of local albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Local albedo first moment - 5 deg</b> Average of local albedo. This is a direct average of the Level 2 Albedos.	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Local albedo standard deviation - 5 deg</b> Standard deviation of local albedo	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Local albedo solar insolation - 5 deg</b> Average solar insolation of pixels that contribute to local albedo average	YDim, XDim, Band	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill
<b>Local albedo swath count - 5 deg</b> Number of swaths that contribute to average.	YDim, XDim, Band	INT32	N/A	N/A
<b>Restrictive albedo average - 5 deg</b> Average of restrictive albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Restrictive albedo first moment - 5 deg</b> Average of restrictive albedo. This is a direct average of the Level 2 Albedos.	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill

Table 10-14: CGAL Grid Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>Restrictive albedo standard deviation - 5 deg</b> Standard deviation of restrictive albedo	YDim, XDim, Band	FLOAT32	N/A	-9999 = fill
<b>Restrictive albedo solar insolation - 5 deg</b> Average solar insolation of pixels that contribute to restrictive albedo average	YDim, XDim, Band	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill
<b>Restrictive albedo swath count - 5 deg</b> Number of swaths that contribute to average.	YDim, XDim, Band	INT32	N/A	N/A

a. This is a flag field. If the value is 0, then all of the other fields in the GeorectifiedRadianceAverage grid will contain fill data for the grid cell location. However, even if the flag is 1 other fields might still contain fill data. This is used during processing to avoid looking at grid cells that are certain not to have data.

b. This is a flag field. If the value is 0, then all of the other fields in the GeorectifiedRadianceAverage grid will contain fill data for the grid cell location. However, even if the flag is 1 other fields might still contain fill data. This is used during processing to avoid looking at grid cells that are certain not to have data.

#### 10.7.4 SDS Dataset Description

Table 10-15: CGAL SDS Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>Local albedo histogram</b> Histogram of local albedo values	CosineSolarZenithAngle x Band x SurfaceType x TextureType x HistogramBin	INT32	N/A	N/A
<b>Zonal expansive albedo average</b> Zonal summary of the average expansive albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill



Table 10-15: CGAL SDS Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>Zonal expansive albedo first moment</b> Zonal summary of the average expansive albedo. This is a direct average of the Level 2 Albedos.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill
<b>Zonal expansive albedo standard deviation</b> Zonal summary of the standard deviation of the expansive albedo.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill
<b>Zonal expansive albedo solar insolation</b> Zonal summary of the average solar insolation of pixels that contribute to expansive albedo average.	Latitude x Band x LandOcean	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill
<b>Zonal expansive albedo swath count</b> Zonal summary of the number of swaths that contribute to the average.	Latitude x Band x LandOcean	INT32	N/A	N/A
<b>Zonal local albedo average</b> Zonal summary of the average local albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill
<b>Zonal local albedo first moment</b> Zonal summary of the average local albedo. This is a direct average of the Level 2 Albedos.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill
<b>Zonal local albedo standard deviation</b> Zonal summary of the standard deviation of the local albedo.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill

Table 10-15: CGAL SDS Dataset Description

Field Name Parameter Description	Dimensions List	Number Type	Units	Flag Values
<b>Zonal local albedo solar insolation</b> Zonal summary of the average solar insolation of pixels that contribute to local albedo average.	Latitude x Band x LandOcean	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill
<b>Zonal local albedo swath count</b> Zonal summary of the number of swaths that contribute to the average.	Latitude x Band x LandOcean	INT32	N/A	N/A
<b>Zonal restrictive albedo average</b> Zonal summary of the average restrictive albedo. This is the average of the reflected flux divided by the average solar insolation - not a direct average of the Level 2 Albedos.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill
<b>Zonal restrictive albedo first moment</b> Zonal summary of the average restrictive albedo. This is a direct average of the Level 2 Albedos.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill
<b>Zonal restrictive albedo standard deviation</b> Zonal summary of the standard deviation of the restrictive albedo.	Latitude x Band x LandOcean	FLOAT32	N/A	-9999 = fill
<b>Zonal restrictive albedo solar insolation</b> Zonal summary of the average solar insolation of pixels that contribute to restrictive albedo average.	Latitude x Band x LandOcean	FLOAT32	$\frac{W}{m^2\mu m}$	-9999 = fill
<b>Zonal restrictive albedo swath count</b> Zonal summary of the number of swaths that contribute to the average.	Latitude x Band x LandOcean	INT32	N/A	N/A

## 11.0 MISR LEVEL 3 JOINT PRODUCTS

TBD.



## APPENDIX A: MISR GEOREGISTRATION INFO

### A.1 Introduction

The concept of multi-angle imaging, which is being pioneered by the MISR experiment, is distinct in several ways from traditional nadir-viewing, scene-based multi-spectral imaging. All remote sensing data products are contaminated by BRF effects in the cross-track direction. This fact is ignored by most in the remote sensing community. MISR is the only instrument to date that makes a genuine effort to deal with and benefit from BRF effects. It does so by acquiring imagery from multiple angles in the along-track direction in a short enough period of time to characterize the anisotropy of the surface-atmosphere system. The design of MISR data products was shaped largely by the stringent requirements of the experiment. Users of MISR data have requested clarification about product attributes such as the Space Oblique Mercator (SOM) map projection, the stacked-block HDF-EOS Grid format, and the large size and geographical extent of MISR files. This document provides background information on such topics. It also describes the most precise method for extracting georegistration information directly from MISR files.

There are two ways to determine the latitude and longitude of a pixel within a MISR file. The first method involves reading values directly from an ancillary file called the Ancillary Geographic Product (AGP). Because of data volume considerations, it was not practical to include this redundant information within MISR product files. AGP values are reported at a single resolution. Therefore, interpolation may be required to determine Lat/Lon for a particular desired resolution. The AGP is described in detail in section [9.4] of the parent document[1]. There is one AGP for each Terra orbital path. The MISR AGP is available for public distribution at the Langley DAAC.


The second method for determining lat/lon is much more flexible and requires no ancillary files. The crux of this operation involves coordinate conversions between MISR (block,line,sample), SOM(X,Y), and Lat/Lon. These conversions are supported by orbital parameters and projection information embedded within all MISR products. Such conversions are readily accomplished using HDF-EOS library access routines and the accompanying GCTP map projections library[3]. More complex operations, such as resampling an entire scene to another map projection, are not difficult once the fundamental conversions described herein are understood.

Individuals who are familiar with the MISR experiment, MISR data products, HDF-EOS, the SOM map projection and the GCTP software library may wish to proceed directly to the sections describing coordinate conversion [A.5]. However, most users will save time by perusing the Background sections first. Information about key Metadata values required for coordinate conversions has been condensed for quick-reference into the Metadata Details section[A.6]. Example C function calls can be found at the end of this document to clarify the function call interfaces that are used in the algorithm described in [A.5]

## A.2 Background: The Instrument

The Multi-angle Imaging SpectroRadiometer (MISR) is a new and unique type of satellite instrument. As the Terra satellite moves in its descending polar orbit, each of 9 MISR cameras images the same daylit ground swath, which is 1504 detector samples wide by roughly 70,000 lines long. MISR obtains images for any pixel in the swath from 9 different angles in four different wavelengths. Many remote sensing experiments make use of spectral information to measure physical properties of the Earth's surface, vegetation, atmosphere and clouds. The novel goal of the MISR design is to make use of angular information as well as spectral. The challenge is that this ambitious scientific task cannot be accomplished unless the 36 pixels MISR obtained for each location can be registered together accurately, 9 cameras x 4 bands = 36. An additional complication in the instrument configuration is that not all 4 bands are acquired at the same resolution in all cameras. In fact, in Global Science mode, the MISR nadir camera is the only one with all four bands at high resolution (275 meters). The other 8 cameras produce red band data at 275 m resolution, but the remaining channels are averaged to 1.1km resolution. MISR also has a Local Science Mode in which all 36 channels are temporarily acquired at 275 m resolution over a selected scene.

**Figure A-1 Artist's Rendition of MISR aboard Terra and sample MISR images.**

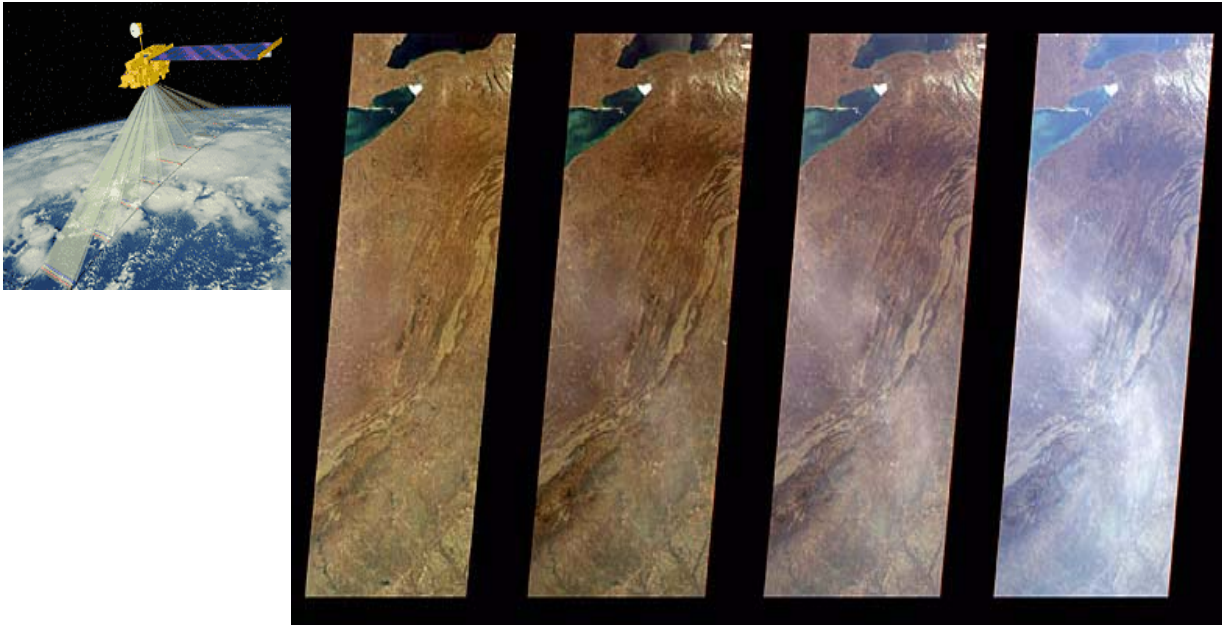


The leftmost panel of Figure [A-1] shows an artist's rendition of the MISR instrument on-board the Terra platform, acquiring data from its nine cameras simultaneously for nine different locations in the four spectral bands. The four panels on the right exhibit the true-color (red, green, blue) images acquired by the nadir and forward 45.6-degree, 60.0-degree, and 70.5-degree cameras, respectively. The sensitivity of the slanted cameras to aerosols (in particular haze) is clearly demonstrated in this sequence.

The diagrams on the next page illustrate the concept that each MISR camera eventually views one

ground point at a slightly different time from a different angle as the spacecraft passes over that point. One could imagine an extremely long virtual instrument which could view a scene from many different vantages at once. In essence, this is what MISR does. There is a time lag of several minutes between the most forward and most aftward observations. This lag is short enough so that scene changes are small, except for wind-driven cloud motion. The problem of co-registration of data from the different cameras is handled by resampling data from each channel onto a common map projection. This common map projection, called SOM, is described in the next section.

**Figure A-2 Diagrams depicting the Multi-Angle concept**

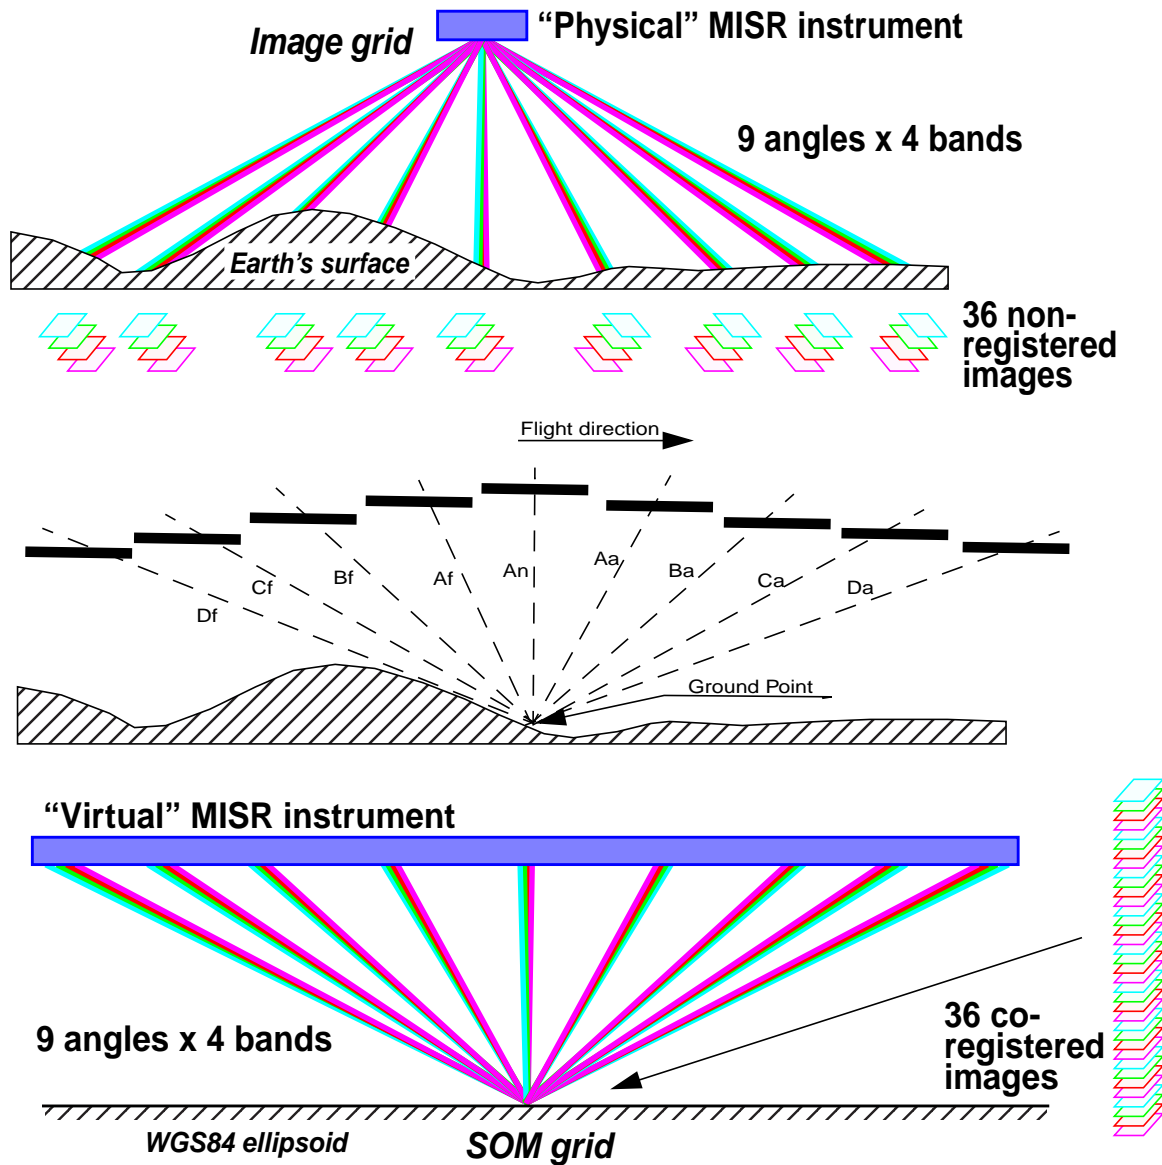

### **A.3 Background: The SOM Projection**

MISR acquires data continuously down the entire daylight side of its orbit. The resulting image is a long, narrow “shoestring” swath which covers a vast geographic range. The SOM map projection was designed for Landsat to support continuous images of this extent. SOM is an acronym for Space Oblique Mercator. In SOM, shape distortion and scale errors are negligible throughout the length of the MISR swath near the satellite ground track. By putting MISR products in the SOM map projection, the complications of projection distortion were removed from geophysical algorithm development and data processing strategy.



**Figure A-3 Sample Partial MISR Swath in SOM vs. Distorted Geographic Lat/Lon**



For the majority of MISR data products, SOM is used as the reference map projection. The downside to this scheme is that most users are not familiar with SOM. The following is a brief explanation of the qualitative differences between SOM coordinates and Lat/Lon coordinates. It is by no


means a comprehensive introduction to the projection, which is best left to the projection's designer Snyder[2].

**Paths:** Polar-orbiting satellites such as Landsat and Terra follow a pattern of orbits which repeats after 233 unique orbits in order to cover the entire globe. Each of the 233 possible orbits is called a path. SOM defines a separate projection for each of these 233 paths. For MISR, a path begins at a particular longitude as the satellite crosses the ascending nightside equator. This is referred to as the longitude of the ascending node. Whenever you are dealing with SOM coordinates, you must specify which path is of concern. This path implies a specific longitude of ascending node, which implies a specific SOM projection applicable to that path. All of this information is contained in the MISR product.

**(X,Y):** SOM coordinates, are called X and Y with units of meters. The X axis points more or less in the direction of satellite groundtrack motion, with the Y axis perpendicular to it. See figure below. The origin of the X axis is at the ascending node equator crossing. To give some feel for the scope of SOM coordinates, X=0 at the dark side equator, X=10 million meters near the North Pole, X=20 million meters at the descending dayside equator crossing, X=30 million meters near the South Pole, and X approaches 40 million meters near the next ascending node. Once the ascending node is reached, X values start over at 0 for the next path/projection.

**(Y):** SOM coordinate Y values may be negative or positive depending upon the side of the X axis on which the location falls. Do not confuse SOM coordinate Y values with internal MISR sample values, which are always positive. Relevant SOM Y values do not continually increase for the duration of the orbit as X values do. The ground track of the satellite actually follows a nearly sinusoidal curve along the X axis (Y=0); so, at some points on the earth, relevant Y values will be consistently larger than at others, and during a given portion of the orbit, they will be either dominantly positive or negative. The amplitude of the sine curve is about 1 million meters. It is good to note where your area of interest falls on the sine curve in order to determine whether or not you are getting appropriate X,Y values. In general, SOM Y values should be within the range +/- 1 or 2 million meters to stay within the MISR swath at the extremities of the sine curve.

Another SOM attribute to be wary of is that SOM Y is not analogous to longitude. Y indicates how far left or right you are from the SOM X axis, but near the poles this can be a north/south shift, whereas at the equator, changing Y is more east/west in orientation. At the equator, the angle between the SOM X axis and the equator is about 8 degrees.

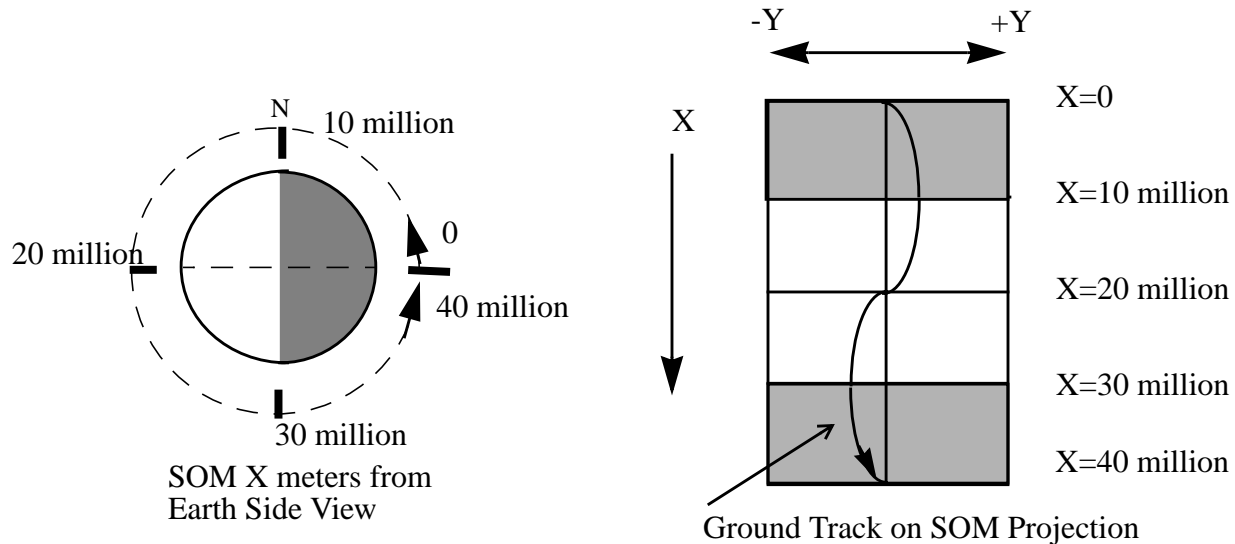

**Figure A-4 Attributes of SOM coordinates**

**Width:** It is also important to note that if you are “relatively near” the ground track, any lat/lon  $\leftrightarrow$  SOM coordinate conversion you perform will be “reversible” to a reasonable degree of accuracy. On the other hand, if you are very far from the ground track, conversions may not appear to be accurate when reversed. This is caused by a combination of the numerical limitations within the conversion software. (The terms “relatively near” and “very far” are not strictly defined. Suffice it to say that the MISR swath, which extends a few hundred kilometers on either side of the ground track, has been deemed safe by MISR photogrammetrists.) The general lesson to be learned is that you need to know which path you are on, and where the orbit ground track is, and then stay near it in order to get satisfactory performance with SOM coordinate conversions.

**Line/Sample:** Pixels in a MISR product are arranged in a regular 2-D array in SOM space. The indices to the array are called absolute line and sample, where line increases from top to bottom and sample increases from left to right. Therefore, if you know the SOM X,Y coordinates of any one point in the swath, you can deduce the SOM coordinates of any other point in the swath if you know the pixel resolution and absolute line/sample offset. Beware that the line and sample values in a MISR file are block-relative. They are not absolute.

**Blocks:** There is one added complication to SOM in MISR products. In order to simplify the job of processing and storing data over this immense geographical area, each MISR path was cut up into a series of pre-defined, uniformly-sized SOM boxes along the ground track. Each box-shaped region is called a Block. MISR blocks are similar to Landsat rows. Block-relative line and sample restart at 0,0 at the top left corner of each block. Therefore, a trivial conversion is required to determine the SOM coordinates of a given pixel in a MISR file, specified as (block, line, sample). Once SOM (X,Y) meters are known, GCTP coordinate conversion software[3] may be used convert between SOM coordinates and Lat/Lon.

#### A.4 Background: HDF-EOS

**HDF-EOS Grid:** All MISR products are in the HDF 4 format. However, it is easier to interpret the structures in MISR files if one realizes that they are actually HDF-EOS structures. The EOS project designed specialized data types and access routines on top of HDF 4. These datatypes and the software libraries that read and write them are referred to collectively as HDF-EOS. The earliest products in the MISR production chain (L1A and L1B1) are single-camera HDF-EOS Swath data types. In HDF terminology, a Swath is just a big long SDS or array. Swaths contain no geolocation information other than the time at which a line was acquired. Most users are not interested in this raw Swath format. Instead, they wish to access map-projected data so that they can compare different measurements at a particular geographic location. The HDF-EOS data type for map-projected data is called “Grid.” The HDF-EOS Grid model include metadata structures to store and software support to manipulate orbital parameters and map projection parameters along with the data. Most MISR data products consist of HDF-EOS Grid structures along with specific EOS-defined metadata entities. In theory, it should be very easy to retrieve location information for any MISR pixel in any map projection desired.


**“Stacked Block” Grid:** MISR data doesn’t fit into the HDF-EOS Grid model very well. The designers of HDF-EOS Grid envisioned small, rectangular maps. Each MISR data swath is a long, curving shoestring which cuts through a huge range of latitudes and longitudes. A single Grid (rectangle) encompassing a typical MISR orbit would have to span the entire globe to bound the shoestring. Grids this large were thought to be intractable in the early days of EOS. So, the EOS project defined a special extension to the Grid model for MISR called “stacked block.” A MISR block is an arbitrarily-sized SOM rectangle on the Earth. A MISR data swath could be contained in a series of adjacent blocks instead of one huge Grid. The blocks are stacked one on top of another. The lateral offset from block to block is not constant. (See the diagram below)

**Block Offsets:** A block may be placed directly beneath the one above it, or it may be shifted by an integral multiple of 17.6 km in the lateral (+/- SOM Y) direction. These shifts are all pre-defined so that the blocks comfortably span the Terra ground track to encompass a MISR data swath. Each block can be thought of as a separate HDF-EOS Grid, with the entire series comprises a single Grid structure in an HDF file. A MISR HDF-EOS Grid is therefore defined for a given path by the coordinates of the first (top) MISR block along with the standard projection metadata and a special array of offsets defining the locations of all subsequent blocks. Each subsequent block may be treated by the user as an independent Grid, provided that its position relative to the top block can be calculated. The HDF-EOS stacked block model involves automated storage and retrieval of offset metadata, but it does not perform offset calculations. The user must perform these calculations and assemble the desired set of blocks accordingly to obtain a mutli-block map.

**Use Patterns:** Two primary access paradigms have been noticed. Some users pull one block at a time out of a MISR product and use it in SOM space. Such users are often MISR-centric and manipulate data with their own software. Other users wish to pull out a geographically-defined subset of MISR data which may be smaller than one block or which may entail several blocks. The later type of user often prefers to work with the data in some map projection other than SOM with a commer-

cial Image Processing or GIS software tool. In either case, familiarity with the MISR internal data representation is helpful.

**Figure A-5 Depiction of MISR Stacked Block Grid**  
spacecraft ground track

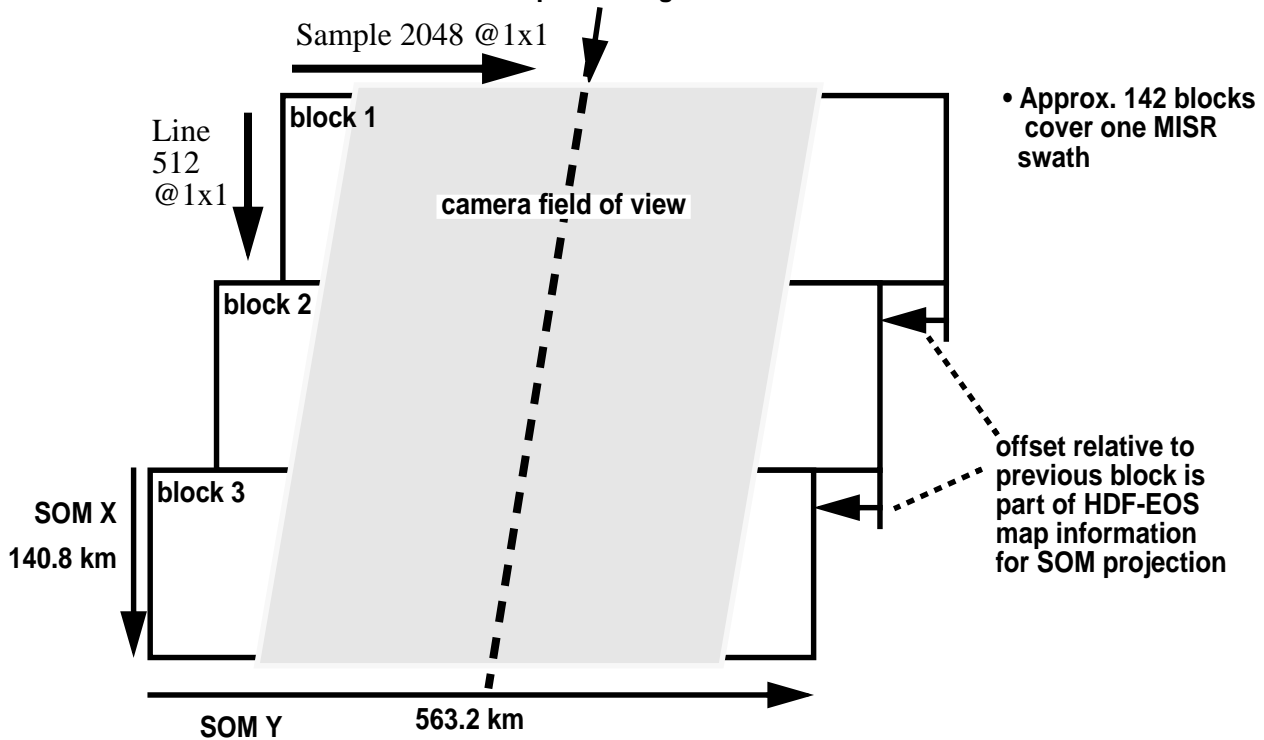

**Surprises:** There are several idiosyncrasies worth noting at this point. Notice that the MISR image does not fill the entire block. The unused edges of the block contain fill value. The extra room is needed for several reasons. First, the spacecraft ground track is actually inclined slightly with respect to the SOM X axis. Second, not all nine camera footprints overlap precisely. Third, the union of camera footprints gets wider within the blocks at higher latitudes as the overlap gets smaller. This is due to Earth rotation and fixed camera geometry. Finally, each block may be shifted left or right of those adjacent to it by some multiple of 17.6 km in order to follow the groundtrack.

**180 Blocks:** For each MISR orbit path, a set of 180 SOM blocks has been predefined. The 180 blocks cover a range larger than the daylit Earth in order to account for seasonal variations in the positions of day/night terminators. MISR only acquires data on the dayside of the terminator. For a single orbit, the terminator-to-terminator range in blocks is roughly 142. Therefore, MISR files contain data structures representing 180 blocks, but data is only found in 142 or fewer of these blocks. During winter months, for instance, the first 20 blocks of a MISR Grid may be vacant.

Figure A-6 MISR Blocks Follow the Curving Swath

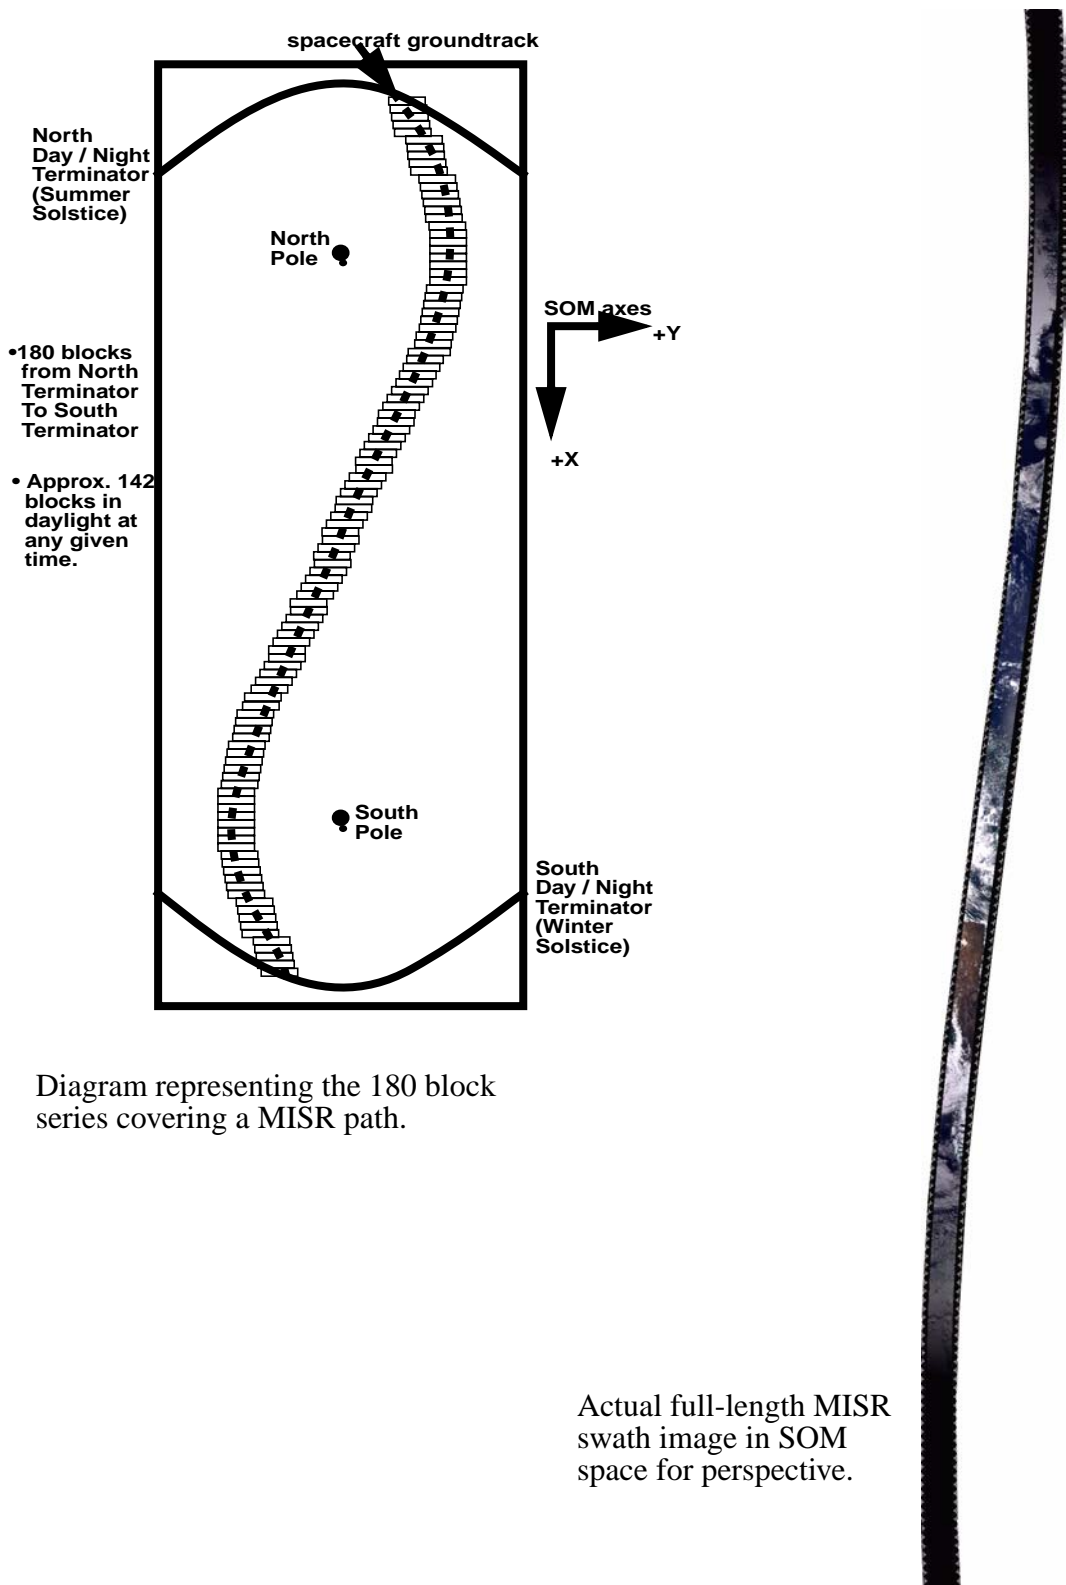


Diagram representing the 180 block series covering a MISR path.

Actual full-length MISR swath image in SOM space for perspective.

## A.5 Coordinate Conversions

The following three subsections [A.5.1], [A.5.2], and [A.5.3] describe the steps required to perform accurate coordinate conversions on pixel locations in a MISR file. The descriptions include the extraction of metadata necessary to perform the conversions. A complete description of MISR file metadata relevant to these conversions is provided in section [A.6]. Example function calls relevant to these conversions in the C language are printed in section [A.7]. An assumption is made that the user has access to the HDF-EOS libraries, including the GCTP map projection library[3].

**Forward Conversion:** Lat/Lon->(block, line, sample) = [Lat/Lon-> SOM ->(block, line, sample)]

Given a position specified by Lat/Lon, two steps are required to determine the MISR block, line and sample coordinates. 1) Convert Lat/Lon to SOM(X,Y) meters using the GCTP conversion software. 2) Then convert SOM(X,Y) to MISR (block, line, sample). Forward conversion is useful for resampling MISR data to another map projection. GCTP supports conversions from Lat/Lon to other projections using the same metadata required for the SOM->Lat/Lon conversion. Beware that the line and sample results for an arbitrary position may be fractional.

**Inverse Conversion:** (block, line, sample)->Lat/Lon = [(block, line, sample)->SOM->Lat/Lon]

Given a MISR pixel, as specified by block number, line number within block and sample number within block, two inverse steps are required to determine the Latitude and Longitude of the pixel center. 1) Convert (block, line, sample) to SOM(X,Y) meters. 2) Then convert SOM(X,Y) to Lat/Lon using the GCTP conversion software. The orbit path must be known a priori; metadata from the MISR product file in question is required; and the HDF-EOS software library along with GCTP must be utilized. Inverse conversion is useful for determining the location of features within native MISR data for comparison with other datasets.

**Precision:** Coordinate Conversions are reversible (Forward<->Inverse) with reasonable numerical precision for positions near the satellite groundtrack. Positions within the MISR data swath are thus reversible. Positions that are not near the satellite groundtrack are often better-described on another path and SOM projection. Coordinate conversions involving such positions are often not reversible. The causes of this limitation include map projection distortion as well as numerical approximation used in the algorithms in GCTP. The example function calls in section [A.7] provide a good use case to emulate.

### A.5.1 SOM <-> Lat/Lon

**Inverse: SOM -> Lat/Lon** Given a pixel's position in SOM (X,Y) meters, assuming a particular orbit path, the following steps should be used to determine the corresponding Latitude and Longitude.

- a) Choose a MISR product file with the appropriate orbit path and read from it the HDF-EOS projection params using the call GDprojinfo(). The projection params define the SOM projec-

tion used for this path. Users wishing to avoid HDF-EOS may refer to the Metadata Details section for choices for direct HDF reads of projection parameter info.

b) Convert the SOM coordinates to Lat/Lon with the GCTP library calls `inv_init()` and `sominv()`. `inv_init` takes the projection parameters from step a. as arguments.<sup>1</sup> Beware that the order of the arguments to `sominv(som_x, som_y, &lon, &lat)` is neither intuitive nor well-documented.<sup>2</sup> See section [A.7] for examples.

**Forward: Lat/Lon -> SOM** Given a pixel's position in Lat/Lon coordinates assuming a particular MISR orbit path, the following steps should be used to determine the corresponding coordinates in SOM (X,Y) meters.

a) Choose a MISR product file with the appropriate orbit path and read from it the HDF-EOS projection params using the call `GDprojinfo()`. The projection params define the SOM projection used for this path. Users wishing to avoid HDF-EOS may refer to the Metadata Details section for choices for direct HDF reads of projection parameter info.

b) Convert the Lat/Lon coordinates to SOM with the GCTP library calls `for_init()` and `somfor()`. `for_init` takes the projection parameters from step a. as arguments.<sup>3</sup> Beware that the order of the arguments to `somfor(lon, lat, &som_x, &som_y)` is neither intuitive nor well-documented.

### A.5.2 Inverse: MISR(block, line, sample) -> SOM(X,Y)

Given a MISR pixel specified by (block, line, sample), assuming a particular orbit path, the following steps should be used to determine the corresponding SOM(X,Y) coordinates in meters.

a) Pick a MISR file to read which corresponds to the orbit path in question.

b) Read origin block coords and block/pixel sizes for a band using `HDF-EOS GDgridinfo()`<sup>4 5</sup>

From the origin coords (`ulc[]`, `lrc[]`) and the sizes (`Xdim`, `Ydim`), compute the following values:

---

1. The GCTP coordinate conversion library provides routines for converting between lat/lon and many other map projections. MISR uses the GCTP SOM projection A by default based on the projection parameter values. SOM A specifies the inclination angle and longitude of the ascending node unlike SOM B, which uses path number and is specific to Landsat.

2. In HDF-EOS, Lat/Lon coordinates are specified in degrees. GCTP functions expect Lat/Lon in radians.

3. `GDprojinfo()` actually returns the HDF-EOS projection parameters array which corresponds directly to the one required for the GCTP SOM initializations; but in addition, it returns the projection code (22 for SOM), the zone code (unused for SOM) and the spheroid code (WGS84 ellipsoid 12), all of which are required to call the GCTP routines. See [4] for more info.



ULC.x = ulc[0]	!! JUST DO THIS. It is not a typo.
ULC.y = lrc[1]	!! Swapping ULC.y and LRC.y is a
LRC.y = ulc[1]	!! side-effect of an unusual definition of
LRC.x = lrc[0]	!! lrc vs. ulc in HDFEOS.[4]
Sx = (LRC.x - ULC.x) / Xdim	!! Size of pixel in line direction in meters
Sy = (LRC.y - ULC.y) / Ydim	!! Size of pixel in sample direction in meters

c) Adjust ULC coordinates from pixel corner to pixel center.

**ULC.xc** = ULC.x + (Sx / 2.0)

**ULC.yc** = ULC.y + (Sy / 2.0)

d) Read the block offsetArray using the HDF-EOS call GDblkSOMoffset(). It returns an array of offsets specified in pixels at Sx resolution. Each offset is relative to the block above. The HDF-EOS call actually reads from the vdata structure \_BLKSOM:<gridname>.

e) Calculate SOM.x and SOM.y for BlockNumber(**b**), pixel(**line**, **sample**) as:

SOM.x = ULC.xc + [(b - 1) \* Xdim \* Sx] + (line \* Sx)

**SOM.y** = ULC.yc + [**sample** + **offset**] \* Sy      where **offset** =  $\sum_{i=0}^{b-2} offsetArray[i]$

### A.5.3 Forward: SOM(X,Y) -> MISR (block, line, sample)

Given a position in SOM(X,Y) meters, assuming a particular orbit path, the following steps should be used to determine the corresponding MISR pixel in (block, line, sample) coordinates.

- a) Pick a MISR file to read which corresponds to the orbit path in question.
- b) Read origin block coords and block/pixel sizes for a band using HDF-EOS GDgridinfo().

From the origin coords (ulc[], lrc[]) and the sizes (Xdim, Ydim), compute the following values:

ULC.x = ulc[0]	!! JUST DO THIS. It is not a typo.
ULC.y = lrc[1]	!! Swapping ULC.y and LRC.y is a

4. Though it is recommended, the user does not have to use HDF-EOS routines to read relevant metadata values. If some other means of accessing MISR files is desired, see "Metadata Details" on page 350. Beware that the definitions of ULC.y and LRC.y are not the same for all metadata fields!

5. Each MISR band may be of a different resolution. So, you need to obtain the 1st block origin coordinates and the block and pixel size information using the HDF-EOS call GDgridinfo() which reads from the textual StructMetaData. StructMetaData is present in all MISR HDF files. The GDgridinfo() call returns: Xdim, Pixels per block in line direction; Ydim Pixels per block in sample direction; ulc[0..1] Origin Block Corner Coords SOM meters; lrc[0..1] Beware, names aren't intuitive! See "Metadata Details" on page 350

$LRC.y = ulc[1]$                                    !! side-effect of an unusual definition of  
 $LRC.x = lrc[0]$                                    !! lrc vs. ulc in HDFEOS.  
 $S_x = (LRC.x - ULC.x) / Xdim$                    !! Size of pixel in line direction in meters  
 $S_y = (LRC.y - ULC.y) / Ydim$                    !! Size of pixel in sample direction in meters

c) Adjust ULC coordinates from pixel corner to pixel center.

$ULC.xc = ULC.x + (S_x / 2.0)$

$ULC.yc = ULC.y + (S_y / 2.0)$

d) Convert SOM meters to local SOM representation in pixels relative to first block in this file.

$SOM.xpix = (SOM.x - ULC.xc) / S_x$

$SOM.ypix = (SOM.y - ULC.yc) / S_y$

e) Determine the block number.

$Block = floor((SOM.xpix + 0.5) / Xdim) + 1$       !! Coords are within this block.<sup>1</sup>

f) Determine line number within predetermined block.

$Line = SOM.xpix - ((Block - 1) * Xdim)$

g) Read the block offsetArray using the HDF-EOS call GDBlkSOMoffset(). It returns an array of offsets specified in pixels at  $S_x$  resolution. Each offset is relative to the block above.

h) Determine the sample coordinate within the predetermined block.

$Sample = SOM.ypix - offset$                                    where  $offset = \sum_{i=0}^{Block-2} offsetArray[i]$

## A.6 Metadata Details

There are a handful of characteristics of MISR Grid files which are critical for accurate and efficient data access. For instance, each MISR Grid is 180 blocks in length; however, roughly 142 sequential blocks actually contain valid data. File-Global metadata attributes Start\_block and End Block tell the user the range and location of valid blocks within the 180 defined in the hdf file. The externally-mandated definitions of HDF-EOS Grid ULC and LRC are inverted for SOM! Therefore some coordinates in the table must be swapped. They are noted. Other custom metadata fields are very handy to know about. The following table allows users without access to HDF-EOS libraries to obtain critical geo-related metadata from the most convenient sources.

Note: All metadata coordinates refer to outside corner locations, not to centers of corner-pixels. Metadata values base-1

1. Real code should check Block, Line and Sample coordinates against valid ranges. Also, do not be fooled by X/Y inversion from standard video definition. See section "Background: The SOM Projection" on page 340

by convention. Block number is the most common example. Software developers often expect base-0, so beware.

**Table A-1: MISR Metadata Sources**

<b>Metadata Location</b>	<b>Structural</b>	<b>Core</b>	<b>Gbl. File Attr.*</b>	<b>Grid Attr.*</b>	<b>Per Block Common Vdata*</b>
<b>Projection Parameters</b>	ProjParams		various SOM_...		
<b>OriginBlock Coordinates</b>	UperLeftPointMtrs LowerRightMtrs  - SOM meters  - Beware! Y coordinates swapped				Block_coor_ulc_som: _meter.x _meter.y  Block_coor_lrc_som: _meter.x _meter.y
<b>All Block Coordinates</b>		GRINGPOINTLONGITUDE GRINGPOINTLATITUDE - Lat/Lon - Order(ULC, LLC, LRC, URC)			see above
<b>Pixels per Block</b>	XDim YDim			Block_size.size_x Block_size.size_y	
<b>Pixel Size</b>	(Derivable)			Block_size.resolution_x Block_size.resolution_y	
<b>Block Offset Ary.</b>	Special HDF-EOS vdatas, one per grid named _BLKSOM:<gridname>				
<b>Valid Block Range</b>			Start_block End block		
<b>* indicates MISR-unique metadata structure vs. standard ECS-required metadata.</b>					

## A.7 Example Function Calls

The examples in this section illustrate the coordinate conversion scenarios described in this appendix. The GCTP software package is used to convert between SOM and Lat/Lon coordinates. C Programmers often understand C better than English. These examples are intended to address detailed questions about function interfaces, units and adjustments. Such issues are more easily addressed in this way than in prose. These examples are strictly intended for educational purposes.

In the following example scenario, map projection parameters are read from a real MISR HDF-EOS Grid file. Example coordinate conversions are made, and the function calls to HDF and GCTP library routines are shown in the proper sequence with proper arguments.

`misrcoordex.c` outlines a series calls to the example functions, HDF-EOS and the GCTP library to perform full MISR->Lat/Lon and Lat/Lon->MISR conversions.

`misr_init()` illustrates setup steps which simplify the remaining examples. It should be called done prior to calling `misrfor()` or `misrinv()`. These steps, mentioned in sections [A.5.2] and [A.5.3], include converting from relative to absolute coordinates and the swapping of `ulc/rlc` values.

`misrfor()` illustrates the forward conversion `SOM(X,Y) -> (block, line, sample)` described in Section A.5.3 on page 349.

`misrinv()` illustrates the inverse conversion `(block, line, sample) -> SOM(X,Y)` described in Section A.5.2 on page 348.

The files `misrproj.h` and `errormacros.h` are a headers included by the other examples to remove extraneous code so that the examples are more concise.

The Makefile shows how to include from and link to the necessary pieces of the GCTP, HDF and HDF-EOS libraries needed to complete the scenario.

The basic scenario outlined in `misrcoordex.c` is:

- a. Use HDF-EOS to read necessary info from a MISR product.
- b. Call `misr_init()` and `som_init()` once with the info read from the MISR product.
- c. use combinations of `(somfor()+misrfor())` or `(misrinv()+sominv())` to perform as many forward or inverse coordinate conversions as desired on this orbit path.

## A.7.1 misrcoordex.c

```

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <hdf.h>
#include <HdfEosDef.h>
#include <proj.h>
#include "misrproj.h"
#include "errormacros.h"

#define MAXNDIM 10

typedef struct {
    int block;
    float line;
    float sample;
} pts_t;

int npts = 40;
pts_t pts[] = { { 1, -0.5, -0.5 }, \
{ 1, -0.499999, -0.499999 }, \
{ 1, 0.0, 0.0 }, \
{ 1, 0.5, 0.5 }, \
{ 1, 127.0, 511.0 }, \
{ 1, 127.5, 511.5 }, \
{ 1, 511.0, 2047.0 }, \
{ 1, 511.5, 2047.5 }, \
{ 1, 101.97, 64.23 }, \
{ 1, 101.0, 64.0 }, \
{ 65, -0.5, -0.5 }, \
{ 65, -0.499999, -0.499999 }, \
{ 65, 0.0, 0.0 }, \
{ 65, 0.5, 0.5 }, \
{ 65, 127.0, 511.0 }, \
{ 65, 127.5, 511.5 }, \
{ 65, 511.0, 2047.0 }, \
{ 65, 511.5, 2047.5 }, \
{ 65, 101.97, 64.23 }, \
{ 65, 101.0, 64.0 }, \
{ 91, -0.5, -0.5 }, \
{ 91, -0.499999, -0.499999 }, \
{ 91, 0.0, 0.0 }, \
{ 91, 0.5, 0.5 }, \
{ 91, 127.0, 511.0 }, \
{ 91, 127.5, 511.5 }, \
{ 91, 511.0, 2047.0 }, \
{ 91, 511.5, 2047.5 }, \
{ 91, 101.97, 64.23 }, \
{ 91, 101.0, 64.0 }, \
{ 180, -0.5, -0.5 }, \
{ 180, -0.499999, -0.499999 }, \
{ 180, 0.0, 0.0 }, \
{ 180, 0.5, 0.5 }, \
{ 180, 127.0, 511.0 }, \
{ 180, 127.5, 511.5 }, \
{ 180, 511.0, 2047.0 }, \
{ 180, 511.5, 2047.5 }, \
{ 180, 101.97, 64.23 }, \
{ 180, 101.0, 64.0 }, \
};

int main(int argc, char *argv[]) {
    int32 fid = FAIL;
    int32 gid = FAIL;
    int igrid, i;
    int32 ngrid;
    int32 nline, nsample;
    double lat_r, lon_r;
    double savelon_r1, savelon_r2;
    double somx, somy;
    int b;
    float l, s;
    int32 strbufsize;

```

```

char      *filepath;
char      **gridname;
char      *gridlist;
float64   ulc[2], lrc[2];
int32     spherecode, zonecode, projcode;
float64   projparam[NPROJ];
float32   offset[NOFFSET];
long      iflg;
int       status;
char      diff_flg;
int32     dim[MAXNDIM];
char      dimlist[STRLEN];
intn     hdfEOS_status_code;
void      *mem_status_code;
long      (*for_trans[MAXPROJ+1])();
long      (*inv_trans[MAXPROJ+1])();

/* ----- */
/* Check arguments */
/* ----- */

if (argc != 2) {
    fprintf(stderr, "Usage: %s hdfEOS_grid_file\n", argv[0]);
    exit(1);
}
filepath = argv[1];

/* ----- */
/* Inquire and allocate memory for the hdfEOS gridnames */
/* This is only require if you need the gridnames */
/* ----- */

hdfEOS_status_code = GDinqgrid(filepath, NULL, &strbufsize);
HDFEOS_ERROR_CHECK("GDinqgrid");

mem_status_code = gridlist = (char *)malloc(strbufsize+1);
MEM_ERROR_CHECK("malloc");

hdfEOS_status_code = ngrid = GDinqgrid(filepath, gridlist, NULL);
HDFEOS_ERROR_CHECK("GDinqgrid");

mem_status_code = gridname = (char **)malloc(ngrid * sizeof(char *));
MEM_ERROR_CHECK("malloc");

gridname[0] = strtok(gridlist, ",");
for (igrid = 1; igrid < ngrid; igrid++) gridname[igrid] = strtok(NULL, ",");

/* ----- */
/* Open the hdfEOS grid file */
/* ----- */

hdfEOS_status_code = fid = GDopen(filepath, DFACC_READ);
HDFEOS_ERROR_CHECK("GDopen");

/* ----- */
/* Loop through all the grids because I can */
/* ----- */

for (igrid = 0; igrid < ngrid; igrid++) {

    /* ----- */
    /* Attach to the grid of choice */
    /* ----- */

    hdfEOS_status_code = gid = GDattach(fid, gridname[igrid]);
    HDFEOS_ERROR_CHECK("GDattach");

    /* ----- */
    /* Inquire grid dimensions to check number of blocks */
    /* Inquire grid info to get the number of lines/sample and ulc/lrc */
    /* Inquire SOM relative block offsets */
    /* Initialize misr block/line/sample projection routines */
    /* ----- */

    hdfEOS_status_code = GDinqdims(gid, dimlist, dim);
    HDFEOS_ERROR_CHECK("GDinqdims");
}

```

```

if (dim[0] != NBLOCK) ERROR("File does not have 180 blocks");

hdfeos_status_code = GDgridinfo(gid, &nline, &nsample, ulc, lrc);
HDFEOS_ERROR_CHECK("GDgridinfo");

hdfeos_status_code = GDbkSOMoffset(gid, offset, NOFFSET, "r");
HDFEOS_ERROR_CHECK("GDbkSOMoffset");

status = misr_init(NBLOCK, nline, nsample, offset, ulc, lrc);
if (status) ERROR("misr_init");

printf("\nFilename (path/orbit): %s\n", filepath);
printf("Gridname: %s\n", gridname[igrid]);
printf("Lines/Samples: (%d, %d)\n", nline, nsample);
printf("ULC (x,y) (m): (%f, %f)\n", ulc[0], ulc[1]);
printf("LRC (x,y) (m): (%f, %f)\n", lrc[0], lrc[1]);
printf("Block offsets: (%f", offset[0]);
for (i = 1; i < NOFFSET; i++) printf(", %f", offset[i]);
printf(")\n");

/* ----- */
/* Inquire grid projection info to get project codes/parameters */
/* Initialize gctp SOM forward and inverse projection routines */
/* ----- */

hdfeos_status_code = GDprojinfo(gid, &projcode, &zonecode,
                                &spherecode, projparam);
HDFEOS_ERROR_CHECK("GDprojinfo");

for_init((long)projcode, (long)zonecode, (double*)projparam,
         (long)spherecode, NULL, NULL, &iflg, for_trans);
if (iflg) ERROR("for_init");

inv_init((long)projcode, (long)zonecode, (double*)projparam,
         (long)spherecode, NULL, NULL, &iflg, inv_trans);
if (iflg) ERROR("inv_init");

printf("GCTP projection code: %d\n", projcode);
printf("GCTP zone code (not used for SOM): %d\n", zonecode);
printf("GCTP sphere code: %d\n", spherecode);
printf("GCTP projection parameters: (%f", projparam[0]);
for (i = 1; i < NPROJ; i++) printf(", %f", projparam[i]);
printf(")\n");

/* ----- */
/* Detach from the grid because we don't need it anymore in this example */
/* We would need it if we go on to access fields, so don't detach here */
/* ----- */

if (gid != FAIL) GDdetach(gid);

/* ----- */
/* Loop over some inverse transformations */
/* (b,l,l,s.s) -> (X,Y) -> (lat,lon) */
/* and over some forward transformations */
/* (lat,lon) -> (X,Y) -> (b,l,l,s.s) */
/* ----- */

printf("      (blk,      line ,      sample )      "
       "(      SOM X      ,      SOM Y      )      "
       "(      Lat      ,      Lon      )\n");

for (i = 0; i < npts; i++) {

    b = pts[i].block;
    l = pts[i].line;
    s = pts[i].sample;

    /* ----- */
    /* Inverse transformation (b,l,l,s.s) -> (X,Y) -> (lat,lon) */
    /* ----- */

    misrinv(b, l, s, &somx, &somy); /* (b,l,l,s.s) -> (X,Y) */
    sominv(somx, somy, &lon_r, &lat_r); /* (X,Y) -> (lat,lon) */

    printf("%2d: (%3d,%11.6f,%12.6f) -> (%17.6f,%17.6f) -> "

```

```

        "(%10.6f,%11.6f) --|\n",
        i, b, l, s, somx, somy, lat_r * R2D, lon_r * R2D);

/* ----- */
/* Forward transformation (lat,lon) -> (X,Y) -> (b,l,l,s,s) */
/* ----- */

somfor(lon_r, lat_r, &somx, &somy); /* (lat,lon) -> (X,Y) */
misrfor(somx, somy, &b, &l, &s); /* (X,Y) -> (b,l,l,s,s) */

if (b != pts[i].block) diff_flg = '*';
else diff_flg = ' ';

printf(" %c (%3d,%11.6f,%12.6f) <- (%17.6f,%17.6f) <- "
        "(%10.6f,%11.6f) <-|\n",
        diff_flg, b, l, s, somx, somy, lat_r * R2D, lon_r * R2D);

/* ----- */
/* Save the longitude of block 91 to find location of */
/* equator crossing */
/* ----- */

if (pts[i].block == 91 &&
    pts[i].line == 0.0 &&
    pts[i].sample == 0.0) {
savelon_r1 = lon_r;
}
if (pts[i].block == 91 &&
    pts[i].line == (float)(nline-1) &&
    pts[i].sample == (float)(nsample-1)) {
savelon_r2 = lon_r;
}
}

/* ----- */
/* Determine block/line/sample of the equator crossing */
/* approximately in the center of the block */
/* ----- */

lat_r = 0.0;
if (savelon_r1 < 0.0 && savelon_r2 > 0.0 ||
    savelon_r1 > 0.0 && savelon_r2 < 0.0) {
    lon_r = (savelon_r1 - savelon_r2) / 2.0;
} else {
    lon_r = (savelon_r1 + savelon_r2) / 2.0;
}

/* ----- */
/* Forward transformation (lat,lon) -> (X,Y) -> (b,l,l,s,s) */
/* ----- */

somfor(lon_r, lat_r, &somx, &somy); /* (lat,lon) -> (X,Y) */
misrfor(somx, somy, &b, &l, &s); /* (X,Y) -> (b,l,l,s,s) */

printf("%2d: (%3d,%11.6f,%12.6f) <- (%17.6f,%17.6f) <- "
        "(%10.6f,%11.6f) = equator crossing\n",
        npts, b, l, s, somx, somy, lat_r * R2D, lon_r * R2D);

/* ----- */
/* Extreme upper left corner (not center) */
/* ----- */

somx = ulc[0];
somy = lrc[1]; /* Notice the switch from ulc[1]. */

sominv(somx, somy, &lon_r, &lat_r);
misrfor(somx, somy, &b, &l, &s);

printf("%2d: (%3d,%11.6f,%12.6f) <- (%17.6f,%17.6f) -> "
        "(%10.6f,%11.6f) = ulc of block l\n",
        npts+1, b, l, s, somx, somy, lat_r * R2D, lon_r * R2D);

/* ----- */
/* Extreme lower right corner (not center) */
/* ----- */

```



```

somx = lrc[0];
somy = ulc[1]; /* Notice the switch from lrc[1]. */

sominv(somx, somy, &lon_r, &lat_r);
misrfor(somx, somy, &b, &l, &s);

printf("%2d: (%3d,%11.6f,%12.6f) <- (%17.6f,%17.6f) -> "
       "(%10.6f,%11.6f) = lrc of block 1\n",
       npts+2, b, l, s, somx, somy, lat_r * R2D, lon_r * R2D);

/* ----- */
/* Origin of SOM projection for this path */
/* ----- */

somx = 0.0;
somy = 0.0;

sominv(somx, somy, &lon_r, &lat_r);
misrfor(somx, somy, &b, &l, &s);

printf("%2d: (%3d,%11.6f,%12.6f) <- (%17.6f,%17.6f) -> "
       "(%10.6f,%11.6f) = SOM origin (long of asc node)\n",
       npts+3, b, l, s, somx, somy, lat_r * R2D, lon_r * R2D);

/* ----- */
/* Origin of SOM projection plus 180 degrees longitude */
/* ----- */

lat_r = 0.0;
lon_r = (lon_r > 0.0 ? lon_r - (180.0*D2R) : lon_r + (180.0*D2R));

somfor(lon_r, lat_r, &somx, &somy);
misrfor(somx, somy, &b, &l, &s);

printf("%2d: (%3d,%11.6f,%12.6f) <- (%17.6f,%17.6f) <- "
       "(%10.6f,%11.6f) = SOM origin plus 180 in long.\n",
       npts+4, b, l, s, somx, somy, lat_r * R2D, lon_r * R2D);

/* ----- */
/* Equator crossing using SOM X from above */
/* ----- */

somy = 0.0;

sominv(somx, somy, &lon_r, &lat_r);
misrfor(somx, somy, &b, &l, &s);

printf("%2d: (%3d,%11.6f,%12.6f) <- (%17.6f,%17.6f) -> "
       "(%10.6f,%11.6f) = equator crossing\n",
       npts+5, b, l, s, somx, somy, lat_r * R2D, lon_r * R2D);
}

if (fid != FAIL) GDclose(fid);
if (gridlist) free(gridlist);
if (gridname) free(gridname);

printf("\nNotes:\n\n"
"1) Given a block, fractional line and fraction sample triplet the\n"
"   following transformations performed:\n\n"
"   Inverse transformation: (b,l.l,s.s) -> (X,Y) -> (lat,lon) -|\n"
"   |-----|\n"
"   Forward transformation: |-> (lat,lon) -> (X,Y) -> (b,l.l,s.s)\n\n"
"2) The transforms marked with a * did not reproduce the same\n"
"   answer either because of rounding errors in the GCTP codes or because\n"
"   they are out of bounds of the particular grid. The misr transform\n"
"   routines (misr_init, misrfor and misrin) are designed to handle out\n"
"   of bounds conditions and return all -1's. This enables a resampling\n"
"   routine to determine whether resampling can be done or not, if these\n"
"   routines are used for reprojection.\n\n"
"3) Notice that the ULC Y/LRC Y values returned by gridinfo are incorrectly\n"
"   switched when compared to transform number 0, 5 or 7 (depending\n"
"   on resolution).\n\n"
"4) Also note that the ULC/LRC values returned by gridinfo are for block 1\n"
"   extreme pixel edges (not pixel centers).\n\n"
"5) Note that SOM X is always increasing as blocks increase (in fact,\n");

```

```

"  SOM X is zero meters at the longitude of the ascending node - the\n"
"  5th parameter of projection parameters).  SOM Y tends to be mostly\n"
"  positive in the Northern blocks and negative in the Southern blocks.\n"
"  Each SOM path is a separate projection with the origin at the\n"
"  night side equator and the longitude of the ascending node.\n\n"
"6) The block offsets are the number of 1.1km subregions from the\n"
"  previous block.  The first offset is relative first block.\n\n"
"7) The 4th and 5th projection parameter are in the format of packed\n"
"  dddmmss.ss as documented in the GCTP codes (see paksz.c).\n\n"
"8) MISR uses the GCTP SOM projection A which specifies the inclination\n"
"  angle and longitude of the ascending node instead of path number\n\n"
"9) The last six transformations compute various special case locations.\n"
"  Note the direction of the transform arrows.  Can you determine why the\n"
"  lrc of block 1 is actually in block 2?  Hint: it is not the pixel\n"
"  center, but rather the edge.\n\n"
"10) Last note.  Remember that the SOM projection is singular at the poles\n"
"  and thus undefined there.\n\n"
  );
  exit(0);
}

```

## A.7.2 misr\_init.c

```

#include "misproj.h" /* Prototype for this function */
#include "errormacros.h" /* Error macros */

int nb;
int nl;
int ns;
float absOffset[NBLOCK];
float relOffset[NBLOCK-1];
double ulc[2];
double lrc[2];
double sx;
double sy;
double xc;
double yc;

#define FUNC_NAMEm "misr_init"

int misr_init(
const int  nblock, /* Number of blocks */
const int  nline, /* Number of lines in a block */
const int  nsample, /* Number of samples in a block */
const float  relOff[NOFFSET], /* Block offsets */
const double  ulc_coord[], /* Upper left corner coord. in meters */
const double  lrc_coord[] /* Lower right corner coord. in meters */
)
{
  int  i; /* Offset index */
  char  msg[STRLEN]; /* Warning message */

  /* Argument checks */

  if (nblock < 1 || nblock > NBLOCK) {
    sprintf(msg, "nblock is out of range (1 < %d < %d)", nblock, NBLOCK);
    WRN_LOG_JUMP(msg);
  }

  /* Convert relative offsets to absolute offsets */

  absOffset[0] = 0.0;
  for (i = 1; i < NBLOCK; i++) {
    absOffset[i] = absOffset[i-1] + relOff[i-1];
    relOffset[i-1] = relOff[i-1];
  }

  /* Set ulc and lrc SOM coordinates */
  /* Note; ulc y and lrc y are reversed in the structural metadata. */

  ulc[0] = ulc_coord[0];
  ulc[1] = lrc_coord[1];

```

```

    lrc[0] = lrc_coord[0];
    lrc[1] = ulc_coord[1];

/* Set number of blocks, lines and samples */

    nb = nblock;
    nl = nline;
    ns = nsample;

/* Compute pixel size in ulc/lrc units (meters) */

    sx = (lrc[0] - ulc[0]) / nl;
    sy = (lrc[1] - ulc[1]) / ns;

/* Adjust ulc to be in the center of the pixel */

    xc = ulc[0] + sx / 2.0;
    yc = ulc[1] + sy / 2.0;

    return(0);

ERROR_HANDLE:
    return(1);
}

```

### A.7.3 misrfor.c

```

#include "misrproj.h" /* Prototype for this function */
#include "errormacros.h" /* Error macros */
#include <math.h> /* Prototype for floor */

extern int nb;
extern int nl;
extern int ns;
extern float absOffset[NBLOCK];
extern double ulc[2];
extern double lrc[2];
extern double sx;
extern double sy;
extern double xc;
extern double yc;

#define FUNC_NAMEm "misrfor"

int misrfor(
const double x, /* Output SOM X coordinate */
const double y, /* Output SOM Y coordinate */
int* block, /* Input block */
float* line, /* Input line */
float* sample /* Input sample */
)
{
    float i; /* Intermediate X coordinate */
    float j; /* Intermediate Y coordinate */
    int b; /* Intermediate block */
    float l; /* Intermediate line */
    float s; /* Intermediate sample */
    char msg[STRLEN]; /* Warning message */

/* Compute intermediate coordinates */

    i = (float)((x - xc) / sx);
    j = (float)((y - yc) / sy);

/* Check for very small numbers in i and j and assume they are zero */

    i = (fabs(i) < 1E-5 ? 0.0 : i);
    j = (fabs(j) < 1E-5 ? 0.0 : j);

/* Compute block and check range */

    b = (int)(floor((i + 0.5) / nl)) + 1;

```

```

    if (b < 1 || b > nb) {
        sprintf(msg, "block is out of range (1 < %d < %d)", b, nb);
        WRN_LOG_JUMP(msg);
    }

/* Compute line and check range */

    l = (float)(i - ((b - 1) * nl));
    if (l < -0.5 || l > nl - 0.5) {
        sprintf(msg, "line is out of range (0 < %e < %d)", l, nl);
        WRN_LOG_JUMP(msg);
    }

/* Compute sample and check range */

    s = (float)(j - absOffset[b-1]);
    if (s < -0.5 || s > ns - 0.5) {
        sprintf(msg, "sample is out of range (0 < %e < %d)", s, ns);
        WRN_LOG_JUMP(msg);
    }

/* Set return values */

    *block = b;
    *line = l;
    *sample = s;

    return(0);

ERROR_HANDLE:

    *block = -1;
    *line = -1.0;
    *sample = -1.0;
    return(1);
}

```

#### A.7.4 misrinv.c

```

#include "misrproj.h" /* Prototype for this function */
#include "errormacros.h" /* Error macros */

extern int nb;
extern int nl;
extern int ns;
extern float absOffset[NBLOCK];
extern double ulc[2];
extern double lrc[2];
extern double sx;
extern double sy;
extern double xc;
extern double yc;

#define FUNC_NAMEm "misrinv"

int misrinv(
const int    block, /* Input block */
const float  line, /* Input line */
const float  sample, /* Input sample */
double*      x, /* Output SOM X coordinate */
double*      y, /* Output SOM Y coordinate */
)
{
    int        n; /* Number of line to current block */
    char       msg[STRLEN]; /* Warning message */

/* Check Arguments */

    if (block < 1 || block > NBLOCK) {
        sprintf(msg, "block is out of range (0 < %d < %d)", block, nb);
        WRN_LOG_JUMP(msg);
    }

    if (line < -0.5 || line > nl - 0.5) {

```

```

    sprintf(msg, "line is out of range (0 < %e < %d)", line, nl);
    WRN_LOG_JUMP(msg);
}

if (sample < -0.5 || sample > ns - 0.5) {
    sprintf(msg, "sample is out of range (0 < %e < %d)", sample, ns);
    WRN_LOG_JUMP(msg);
}

/* Compute SOM x/y coordinates in ulc/lrc units (meters) */

n = (int)((block - 1) * nl * sx);
*x = (double)(xc + n + (line * sx));
*y = (double)(yc + ((sample + absOffset[block-1]) * sy));

return(0);

ERROR_HANDLE:

*x = -1e-9;
*y = -1e-9;
return(1);
}

```

## A.7.5 misrproj.h

```

#ifndef MISRPROJ_H
#define MISRPROJ_H

/* Defines */

#define STRLEN 200
#define NBLOCK 180
#define NOFFSET NBLOCK - 1
#define R2D 57.2957795131
#define D2R 1.745329251994328e-2
#define NPROJ 13

/* Prototypes */

int misr_init(
    const int nblock, /* Number of blocks */
    const int nline, /* Number of lines in a block */
    const int nsample, /* Number of samples in a block */
    const float relOff[NOFFSET], /* Block offsets */
    const double ulc_coord[], /* Upper left corner coord. in meters */
    const double lrc_coord[] /* Lower right corner coord. in meters */
);

int misrfor(
    const double x, /* Output SOM X coordinate */
    const double y, /* Output SOM Y coordinate */
    int* block, /* Input block */
    float* line, /* Input line */
    float* sample /* Input sample */
);

int misrinv(
    const int block, /* Input block */
    const float line, /* Input line */
    const float sample, /* Input sample */
    double* x, /* Output SOM X coordinate */
    double* y /* Output SOM Y coordinate */
);

#endif /* MISRPROJ_H */

```

## A.7.6 errormacros.h

```

#ifndef ERRORMACROS_H

```

```

#define ERRORMACROS_H

#include <stdio.h>

#define HDFEOS_ERROR_CHECK(msg) \
    if (hdfEOS_status_code == FAIL) { \
        fprintf(stderr, "Error: %s at line %d\n", msg, __LINE__); \
        exit(1); \
    }

#define MEM_ERROR_CHECK(msg) \
    if (mem_status_code == NULL) { \
        fprintf(stderr, "Error: %s at line %d\n", msg, __LINE__); \
        exit(1); \
    }

#define ERROR(msg) \
    { \
        fprintf(stderr, "Error: %s at line %d\n", msg, __LINE__); \
        exit(1); \
    }

#ifdef MISRWARN
#define WRN_LOG_JUMP(msg) \
    { \
        fprintf(stderr, "Warning: %s in %s <Line: %d>\n", \
            msg, FUNC_NAME, __LINE__); \
        goto ERROR_HANDLE; \
    }
#else
#define WRN_LOG_JUMP(msg) goto ERROR_HANDLE;
#endif

#endif /* ERRORMACROS_H */

```

### A.7.7 Makefile

```

CC= gcc
CFLAGS= -g -n32 -DMISRWARN -I$(HDFINC) -I$(HDFEOS_INC)
CFLFLAGS= -g -n32 -I$(HDFINC) -I$(HDFEOS_INC)
LDLFLAGS=-L$(HDFEOS_LIB) -L$(HDFLIB) \
        -lhdfEOS -lGctp -lmfhdf -ldf -ljpeg -lz -lm

OBJS=misr_init.o \
    misrinv.o \
    misrfor.o

all: misrcoordex

misrcoordex: misrcoordex.o $(OBJS)
    $(CC) $(CFLAGS) -o $@ $@.o $(OBJS) $(LDLFLAGS)

clean:
    /bin/rm -f misrcoordex misrcoordex.o $(OBJS)

misrcoordex.o $OBJS: misrproj.h errormacros.h

```

## A.8 Appendix A Bibliography

- [1] Lewicki, Scott, et. al., MISR Data Products Specifications -- Incorporating the Science Data Processing Interface Control Document, aka the MISR DPS, JPL D-13963, Revision D, February, 2002. ([http://eosweb.larc.nasa.gov/PRODOCS/misr/readme/dps\\_ne\\_icd.pdf](http://eosweb.larc.nasa.gov/PRODOCS/misr/readme/dps_ne_icd.pdf))
- [2] Snyder, John, Map Projections--A Working Manual, USGS Professional Paper 1395, 1987, Ch.

27, "Space Oblique Mercator Projection", pp. 214-229.

- [3] U.S. Geological Survey, National Mapping Division, GCTP General Cartographic Transformation Package Software Documentation, 1993.
- [4] Klein, Larry, HDF-EOS Library Users Guide for the ECS Project, Volume 2: Function Reference Guide, 170-TP-501-001, June, Raytheon Systems Company, upper Marlboro, MD, 1998, pages I-7 through I-12 and 2-152. ([http://ivanova.gsfc.nasa.gov/hdfeos/HDF-EOS\\_REF.pdf](http://ivanova.gsfc.nasa.gov/hdfeos/HDF-EOS_REF.pdf))

