AGS Cold Snake Status &

- Cold mass completed and tested in vertical dewar.
 - On cooldown: short to ground developed on inner coil. Completed test with floating supplies.
- Short repaired and cold mass being prepared for another dunk into LHe

 Magnet division on break next week.
- \circ Schedule
 - Cryostat parts in shop being machined.
 - $\circ\,$ Cold mass into horizontal cryostat: ${\sim}10$ Nov.
 - $\circ\,$ Cryostat to be completed: $\sim\!\!$ mid Dec.
 - $\circ\,$ Cooldown and test starts just before ${\sim} {\rm Xmas}$
 - $\circ\,$ Est. delivery to tunnel: 7 Feb., 2005

Slides of measurements from Animesh Jain:

http:://www.agsrhichome.bnl.gov/RHIC/Spin/spinfigs/hsd601sum.pdf




RHIC Spin Collaboration Waldo MacKay 2 Sept., 2004

🍆 1 🛹





RHIC Spin Collaboration Waldo MacKay 2 Sept., 2004




▲ Ramp and Quench, etc. Tests **▲**

- Used actual power supplies and quench protection circuits for use in AGS. (A lot of stuff has been debugged!)
- Magnet thermal cycled 4 times with no other problems than the one short to ground.
- Some training quenches plus quite a few quenches to check out protection scheme.
- All four coils achieved design current.
 - Helix and solenoid: 350 A, dipole correctors: 25 A
- In vertical dewar, it is possible to quench the solenoid without quenching the helix.



RHIC Spin Collaboration Waldo MacKay 2 Sept., 2004

& Two snakes 15% and 6.7% at injection &

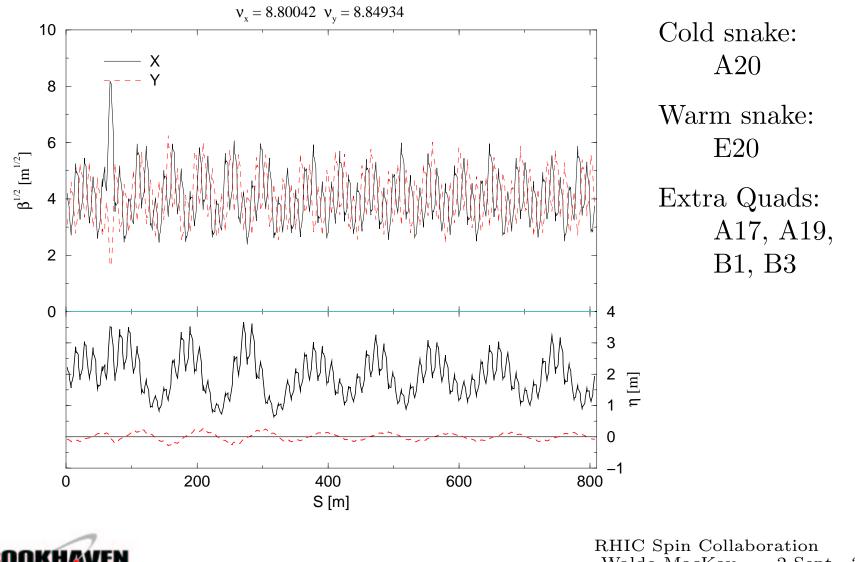

 ~ 4

NATIONAL LABORA

Waldo MacKay 2 Sept., 2004