DTIE

UCRL-11521

MASTER

CONF-550-85

UNIVERSITY OF CALIFORNIA

- 400 J

Lawrence Radiation Laboratory Berkeley, California

AEC Contract No. W-7405-eng-48

LEGAL NOTICE

is report was prepared as an account of Government sponsored w tes, nor the Commission, nor any person acting on behalf of the C A. Mi tes any warranty or representation, expressed or implied, y, completeness, or usefulness of the information contained is ful This report was prepared as an acc States, nor the Commission, nor any ork. d, with res is re d, or process disclos ed in this report may not y information, apparatus, m

i my information, apparatus, method, or process disclosed in this report may not infringe rivately owned rights; or B. Assumes any liabilities with respect to the use of, or for damages resulting from the se of any information, apparatus, method, or process disclosed in this report. As used is the above, "person acting on behalf of the Commission" includes any em-oryse or contractor of the Commission, or employee of such contractory, is the extent that and amployee or contractor of the Commission, or amployee of such contractory prepares, isominates, or provides access to, any information persuant to his employment or contract it the Corumission, or his employment with such contractor.

LRL 25-INCH BUBBLE CHAMBER

Luis W. Alvarez, J. D. Gow, Frank Barrera, Glenn Eckman, Jim Shand, R. Watt, Duane Norgren, and H. P. Hernandez

July 8, 1964

OCT 1 4 1964 This document is PUBLICLY RELEASABLE Authorizing Official Date: 08/16/2006

OCT 91964

÷

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency Thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

(To be presented at the 1964 Internation Conference on High Energy Physics, Dubna, U.S.S.R. August 5-15, 1964)

UCRL-11521

LRL 25-INCH BUBBLE CHAMBER*F

Luis W. Alvarez, J. D. Gow, Frank Barrera, Glenn Eckman, Jim Shand, R. Watt, Duane Norgren, and H. P. Hernandez

> Lawrence Radiation Laboratory University of California Berkeley, California

(Presented by Sulamith Goldhaber)

July 8, 1964

I. INTRODUCTION

The recently completed 25-inch hydrogen bubble chamber combines excellent picture quality with a fast operating cycle. The chamber has a unique optical system and is designed to take several pictures each Bevatron pulse, in conjunction with the Bevatron rapid beam ejection system. At present the chamber operates twice per Bevatron pulse. The general features of the chamber construction are shown in Figs. 1 and 2. The chamber is ten inches deep at the narrowest point. The magnet is of conventional water cooled design and in present operation produces a vertical field of 18.5 kgauss. With suitable generators it has produced a field of 22.8 kgauss. The most important new features are discussed below:

A. Expansion System

Unique to this chamber is a movable top window which serves as the piston for the liquid expansion system and as an optical condenser lens. The system operates through a pressure multiplier driven by helium gas. The pressure

This paper is based on Report No. UCRL-11384.

Work sponsored by the U. S. Atomic Energy Commission.

E Deceased.

multiplier incorporates a gas spring which serves the following purposes: 1. To absorb the impact on expansion.

UCRL-11521

To provide adjustment for control of the expansion pressure.

2.

3.

-2-

To store much of the expansion energy (~80%). This feature is of importance for rapid cycling of the chamber.

B. Optical System

The optical system is shown in Fig. 3. The principal features are axial placement of the light source, the aspheric condenser and a generous stereo base (one half of the object distance). The aspheric condenser lens system is believed to be several times more efficient than any installed in earlier bubble chambers of this size. A scattering angle of 12[°] gives good uniformity of illumination in depth so that individual light sources for each stereo view are unnecessary.

The design of the camera was largely determined by the requirements of rapid pulsing. The camera utilizes a system of differential film drive capstans and an internally sensed programmed electric clutch. High speed vacuum platens were developed to clamp the film during exposure. The camera provides reference marks for theFlying Spot Digitizer and takes three stereo views on one 46 mm unperforated film.

C. Performance

The chamber has been operated filled with both hydrogen and deuterium. The Bevatron at present can produce two rapid beam ejections per pulse, and of the 700,000 pictures taken to date in hydrogen, 265,000 have been taken in this double pulse mode. Limitations on double pulsing are imposed ative by present only by the requirement of compatibility when several experiments are simultaneously in operation at the Bevatron. At present the two pulses are separated by 275 msec. The picture quality is comparable on each of the two independently-controlled expansions.

-3-

FIGURE CAPTIONS


Fig. 1. The 25-inch bubble chamber and magnet.


Fig. 2. Detail of the 25-inch bubble chamber.


Fig. 3. Optical system of the 25-inch bubble chamber.

Fig. 4. First pulse 25-inch bubble chamber photograph.

Fig. 5. Second pulse 25-inch bubble chamber photograph.

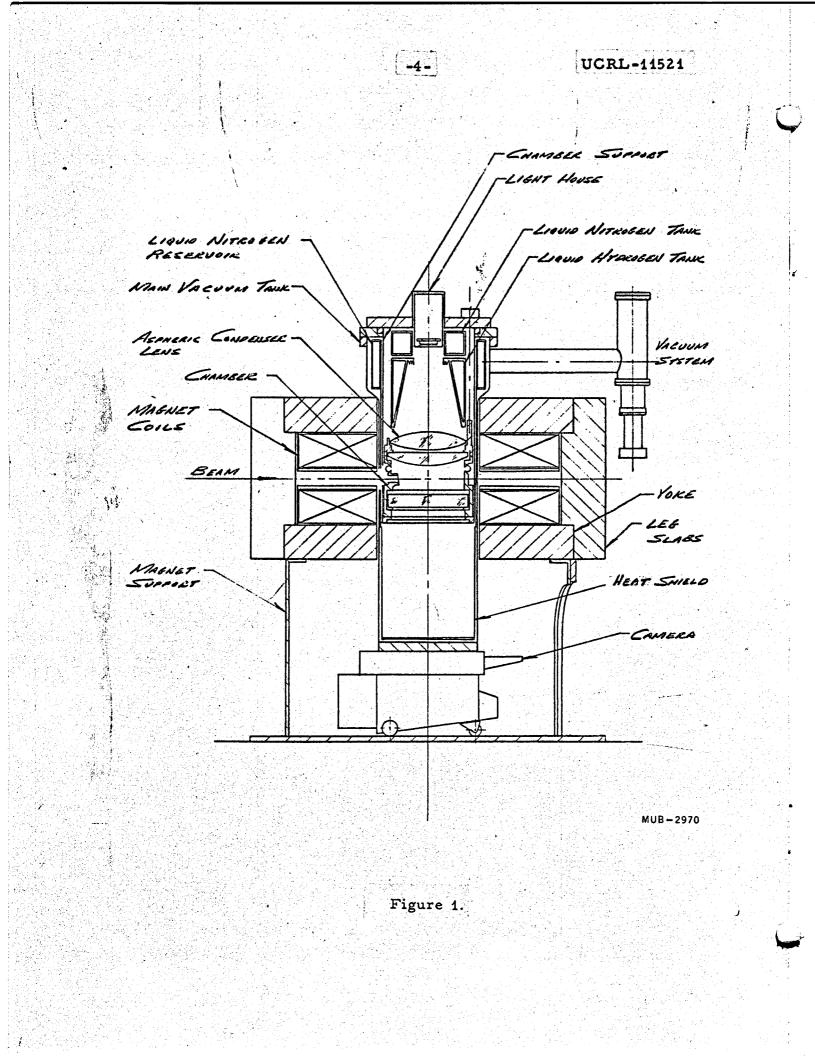

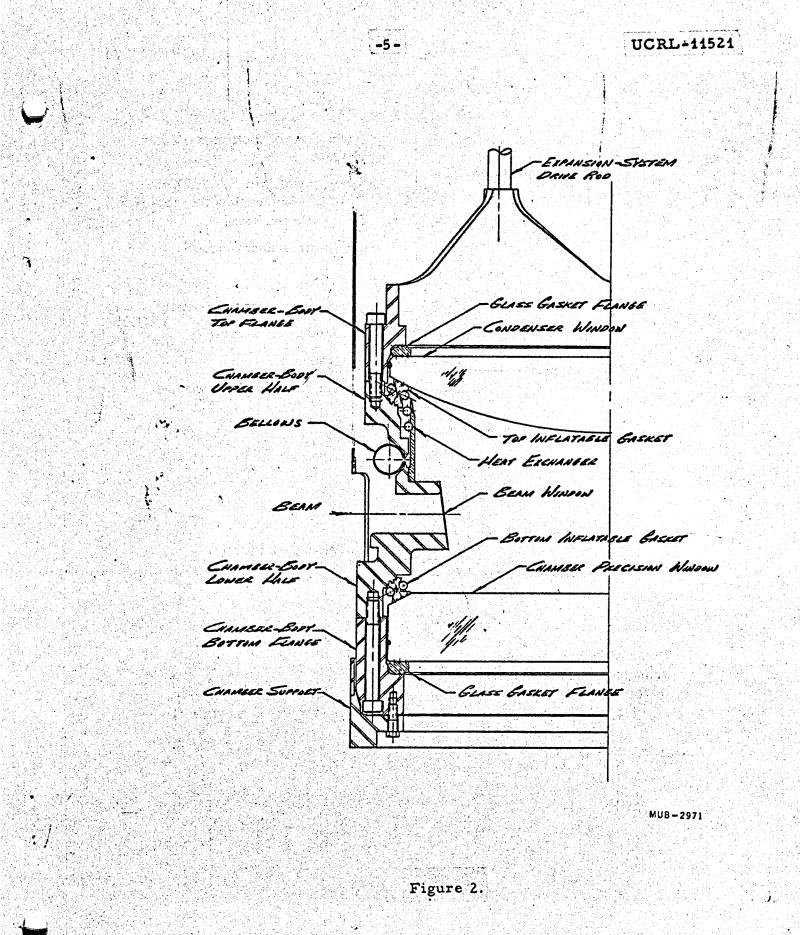

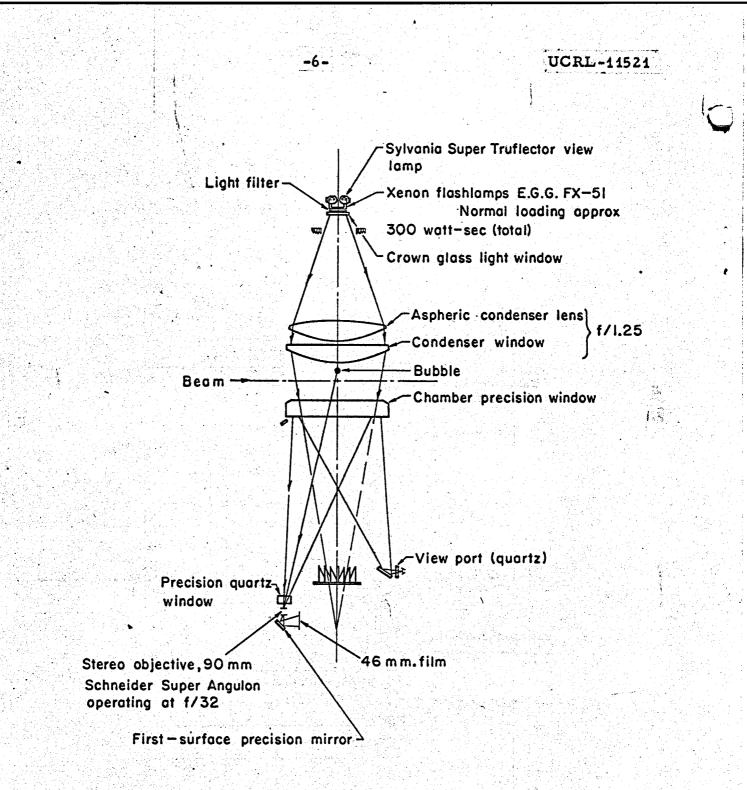

MUB-3380

Figure 3.

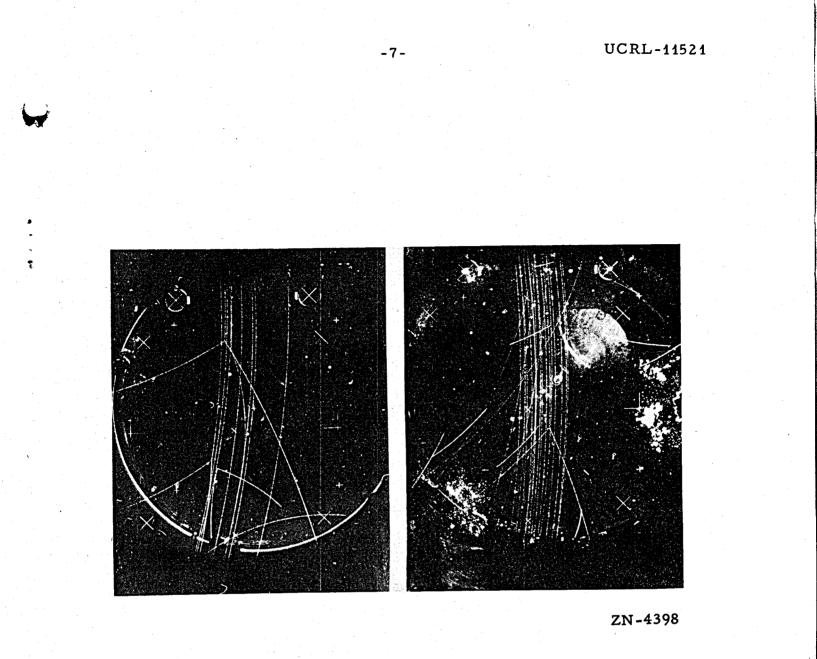


Figure 4.

Figure 5.

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

- A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or
- B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.