

# COMPUTER TESTING SUPPLEMENT FOR FLIGHT ENGINEER



**DO NOT MARK IN THIS BOOK**



U.S. Department of Transportation  
**Federal Aviation Administration**

**COMPUTER TESTING SUPPLEMENT  
FOR  
FLIGHT ENGINEER**

**1999**

**U.S. DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION  
Flight Standards Service**



## **PREFACE**

This computer testing supplement is designed by the Flight Standards Service of the Federal Aviation Administration (FAA) for use by computer testing designees (CTD's) in the administration of airman knowledge tests in the following knowledge areas:

**Original ratings:**

Flight Engineer—Turbojet and Basic (FEX)  
Flight Engineer—Turboprop and Basic (FET)  
Flight Engineer—Reciprocating and Basic (FEN)

**Added ratings:**

Turbojet (FEJ)  
Turboprop (FEP)  
Reciprocating (FER)

FAA-CT-8080-6A supercedes FAA-CT-8080-6, Computerized Testing Supplement for Flight Engineer, dated 1993.

Comments regarding this supplement should be sent to:

U.S. Department of Transportation  
Federal Aviation Administration  
Airman Testing Standards Branch, AFS-630  
P.O. Box 25082  
Oklahoma City, OK 73125-0082



# CONTENTS

Preface .....	iii
Contents .....	v
FIGURE 1.— Common Hand Signals .....	1
FIGURE 2.—Takeoff Speeds .....	2
FIGURE 3.—Cabin Oxygen Duration .....	3
FIGURE 4.—Dual Container Installation .....	4
FIGURE 5.—Fire Detection System and Fire Switches .....	4
FIGURE 6.—Table of U.S. Standard Atmosphere .....	5
FIGURE 7.—Internal Engine Pressures and Temperatures .....	6
FIGURE 8.—Dual-Spool Axial-Flow Compressor .....	6
FIGURE 9.—Major Subassemblies of an Axial-Flow Gas Turbine Engine .....	7
FIGURE 10.—Powerplant Instruments .....	8
FIGURE 11.—Hydromatic Propeller Installation .....	9
FIGURE 12.—Hydromatic Propeller Installation .....	10
FIGURE 13.—Go-Around EPR .....	11
FIGURE 14.—Maximum Takeoff $N_1$ .....	12
FIGURE 15.—Maximum Takeoff EPR .....	13
FIGURE 16.—Maximum Takeoff EPR .....	14
FIGURE 17.—Normal/Maximum Takeoff Thrust .....	15
FIGURE 18.—Torque Requirement Conditions .....	16
FIGURE 19.—Minimum Takeoff Torque .....	16
FIGURE 20.—Takeoff Power Conditions .....	17
FIGURE 21.—Takeoff Power Conditions .....	17
FIGURE 22.—Operating Conditions .....	18
FIGURE 23.—Power Schedule .....	19
FIGURE 24.—Conversion Factors .....	20
FIGURE 25.—Conversion Factors .....	21
FIGURE 26.—Fuel Dump Conditions .....	22
FIGURE 27.—Cruise Conditions .....	22
FIGURE 28.—Cruise Conditions .....	22
FIGURE 29.—Cruise Power Table .....	23
FIGURE 30.—Fuel Dump Conditions .....	24
FIGURE 31.—Loading Tables .....	25
FIGURE 32.—CG Shift .....	26
FIGURE 33.—CG in Percent of MAC .....	26
FIGURE 34.—CG Added Weight .....	26
FIGURE 35.—CG Position Change .....	27
FIGURE 36.—CG Position Change .....	27
FIGURE 37.—Loading Conditions .....	27
FIGURE 38.—CG Position Change .....	28
FIGURE 39.—Weight Shift Conditions .....	28
FIGURE 40.—CG Load Conditions .....	28
FIGURE 41.—CG Weight Conditions .....	29
FIGURE 42.—CG Weight Conditions .....	29
FIGURE 43.—Weight Removal Conditions .....	29
FIGURE 44.—Cargo Shift .....	30
FIGURE 45.—Maximum Payload .....	30
FIGURE 46.—Cruise Weight Change .....	30
FIGURE 47.—Gross Weight Table .....	31
FIGURE 48.—Cargo Shift Conditions .....	32
FIGURE 49.—Maximum Payload Conditions .....	32
FIGURE 50.—Landing Weight Conditions .....	32
FIGURE 51.—Cruise Chart .....	33
FIGURE 52.—Maximum Payload Conditions .....	34
FIGURE 53.—Cargo Shift Conditions .....	34



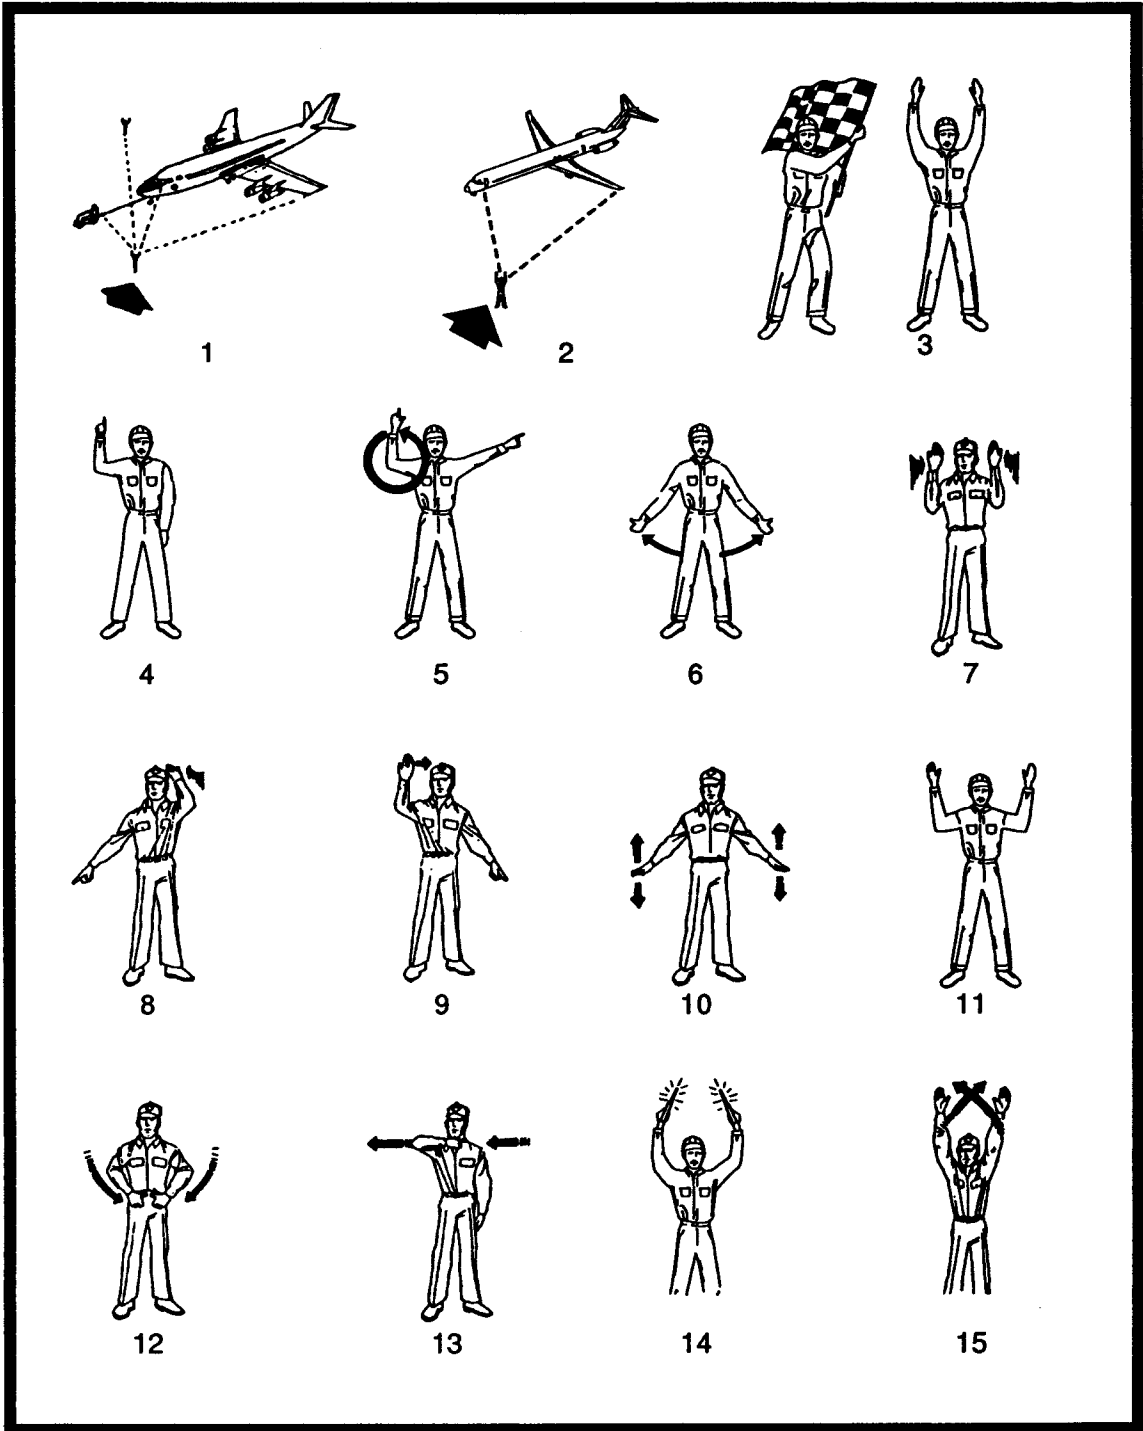


FIGURE 1.—Common Hand Signals.



## TAKEOFF SPEEDS

ALT. —1000 FT.	AMBIENT TEMPERATURE — ° F				
6 to 7	— — —	— — —	-20 to 5	5 to 25	25 to 85
5 to 6	— — —	-20 to 5	5 to 25	25 to 45	45 to 95
4 to 5	-20 to -5	-5 to 25	25 to 45	45 to 85	85 to 105
3 to 4	-20 to 15	15 to 35	35 to 55	55 to 95	95 to 105
2 to 3	-20 to 35	35 to 55	55 to 85	85 to 105	105 to 120
1 to 2	-20 to 55	55 to 85	85 to 95	95 to 120	— — —
0 to 1	-20 to 85	85 to 95	95 to 105	105 to 120	— — —

FLAP POS	WEIGHT — 1000 LB	V <sub>1</sub> V <sub>R</sub> V <sub>2</sub>			V <sub>1</sub> V <sub>R</sub> V <sub>2</sub>			V <sub>1</sub> V <sub>R</sub> V <sub>2</sub>			V <sub>1</sub> V <sub>R</sub> V <sub>2</sub>		
		V <sub>1</sub>	V <sub>R</sub>	V <sub>2</sub>	V <sub>1</sub>	V <sub>R</sub>	V <sub>2</sub>	V <sub>1</sub>	V <sub>R</sub>	V <sub>2</sub>	V <sub>1</sub>	V <sub>R</sub>	V <sub>2</sub>
<b>25</b>	325	140	154	162	141	154	161	142	154	161	144	155	161
	320	138	153	160	139	153	160	141	153	160	143	154	160
	300	132	147	156	133	147	155	134	147	155	136	148	155
	<b>V BASIC</b>												
	280	126	141	151	127	142	151	128	142	151	130	142	150
	260	119	135	147	120	136	146	121	136	146	123	137	145
	240	112	128	142	113	129	141	114	129	141	116	130	140
	220	106	122	135	107	123	136	108	124	136	109	124	135
	200	99	120	136	100	118	133	100	115	130	102	117	130
	180	108	120	138	104	118	134	102	114	130	98	110	126
V <sub>1</sub> Limit	108	—	—	104	—	—	102	—	—	99	—	—	—
<b>15</b>	325	143	159	169	144	160	169	145	161	169	144	160	169
	320	142	157	168	142	158	168	144	160	168	146	159	168
	300	135	151	163	136	152	163	137	153	163	139	152	163
	<b>V BASIC</b>												
	280	129	145	158	129	146	158	131	147	158	132	146	157
	260	122	139	153	123	140	153	124	141	153	125	140	153
	240	115	132	148	116	133	148	117	134	148	118	134	147
	220	109	125	143	109	126	143	110	127	143	111	127	142
	200	108	120	140	102	119	137	103	120	137	104	119	136
	180	108	120	143	104	118	139	95	116	134	96	113	131
V <sub>1</sub> Limit	108	—	—	104	—	—	102	—	—	99	—	—	—

Compare adjusted V<sub>1</sub> Basic speed with V<sub>1</sub> Limit speed and use the higher speed.

**ADJUSTMENTS:**

1. Headwind: For each 15 knots, Increase V<sub>1</sub> Basic 1 knot.
2. Tailwind: For each 5 knots, decrease V<sub>1</sub> Basic 1 knot.
3. Airports BOS R/W 17, TAS R/W 1 & 7, SEA R/W 16, decrease V<sub>1</sub> Basic 3 knots.
4. Airports BOS R/W 35, TAS R/W 19 & 25, SEA R/W 34, Increase V<sub>1</sub> Basic 3 knots.

FIGURE 2.—Takeoff Speeds.

The table below gives the approximate duration of the cabin oxygen system, based on a cylinder pressure of 1500 PSI.

CABIN ALTITUDE	NUMBER OF PASSENGERS	* APPROX. DURATION
15,000	50	62 min
	75	40 min
	100	28 min
	135	23 min
20,000	50	41 min
	75	26 min
	100	19 min
	135	16 min
25,000	50	27 min
	75	17 min
	100	12 min
	135	10 min

\*For cylinder pressures less than 1500 PSI, reduce duration by 8 percent for each 100 PSI.

FIGURE 3.—Cabin Oxygen Duration.

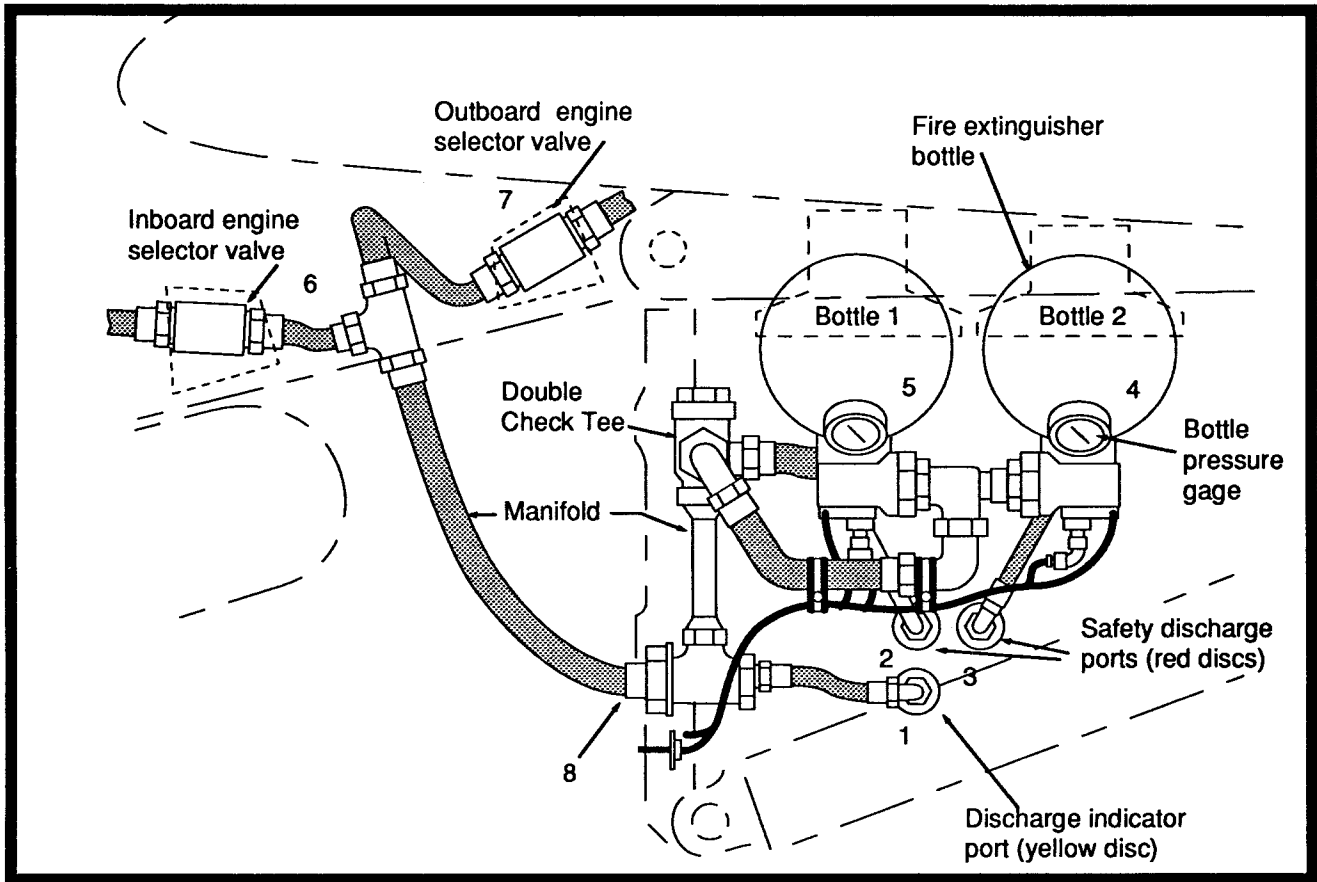


FIGURE 4.—Dual Container Installation.

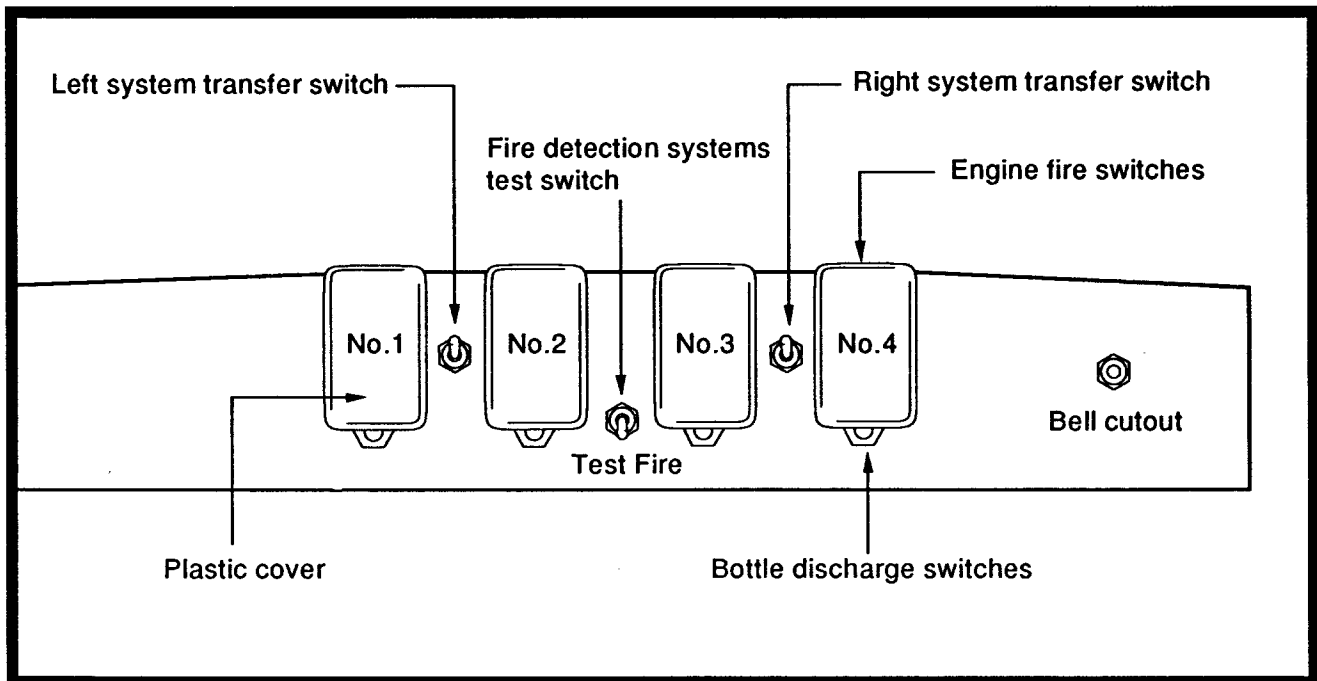


FIGURE 5.—Fire Detection System and Fire Switches.

## TABLE OF U.S. STANDARD ATMOSPHERE

Feet	inHg	mmHg	PSI	°C	°F
0	29.92	760.0	14.70	15.0	59.0
2,000	27.82	706.7	13.66	11.0	51.9
4,000	25.84	656.3	12.69	7.1	44.7
6,000	23.98	609.1	11.78	3.1	37.6
8,000	22.23	564.6	10.92	-0.8	30.5
10,000	20.58	522.7	10.11	-4.8	23.3
12,000	19.03	483.4	9.35	-8.8	16.2
14,000	17.58	446.5	8.63	-12.7	9.1
16,000	16.22	412.0	7.96	-16.7	1.9
18,000	14.95	379.7	7.34	-20.7	-5.2
20,000	13.76	349.5	6.75	-24.6	-12.3
22,000	12.65	321.3	6.21	-28.6	-19.5
24,000	11.61	294.9	5.70	-32.5	-26.6
26,000	10.64	270.3	5.22	-36.5	-33.7
28,000	9.74	237.4	4.78	-40.5	-40.9
30,000	8.90	226.1	4.37	-44.4	-48.0
32,000	8.12	206.3	3.98	-48.4	-55.1
34,000	7.40	188.0	3.63	-52.4	-62.3
36,000	6.73	171.0	3.30	-56.3	-69.4
38,000	6.12	155.5	2.99	-56.5	-69.7
40,000	5.56	141.2	2.72	-56.5	-69.7
42,000	5.05	128.3	2.47	-56.5	-69.7
44,000	4.59	116.6	2.24	-56.5	-69.7
46,000	4.17	105.9	2.04	-56.5	-69.7
48,000	3.79	96.3	1.85	-56.5	-69.7
50,000	3.44	87.4	1.68	-56.5	-69.7
55,000	2.71	68.6	1.32	<b>TEMPERATURE REMAINS CONSTANT</b>	
60,000	2.14	54.4	1.04		

inHg= Inches of Mercury

°C= Centigrade

mmHg= Millimeter of Mercury

°F= Fahrenheit

PSI= Pounds per square inch

FIGURE 6.—Table of U.S. Standard Atmosphere.

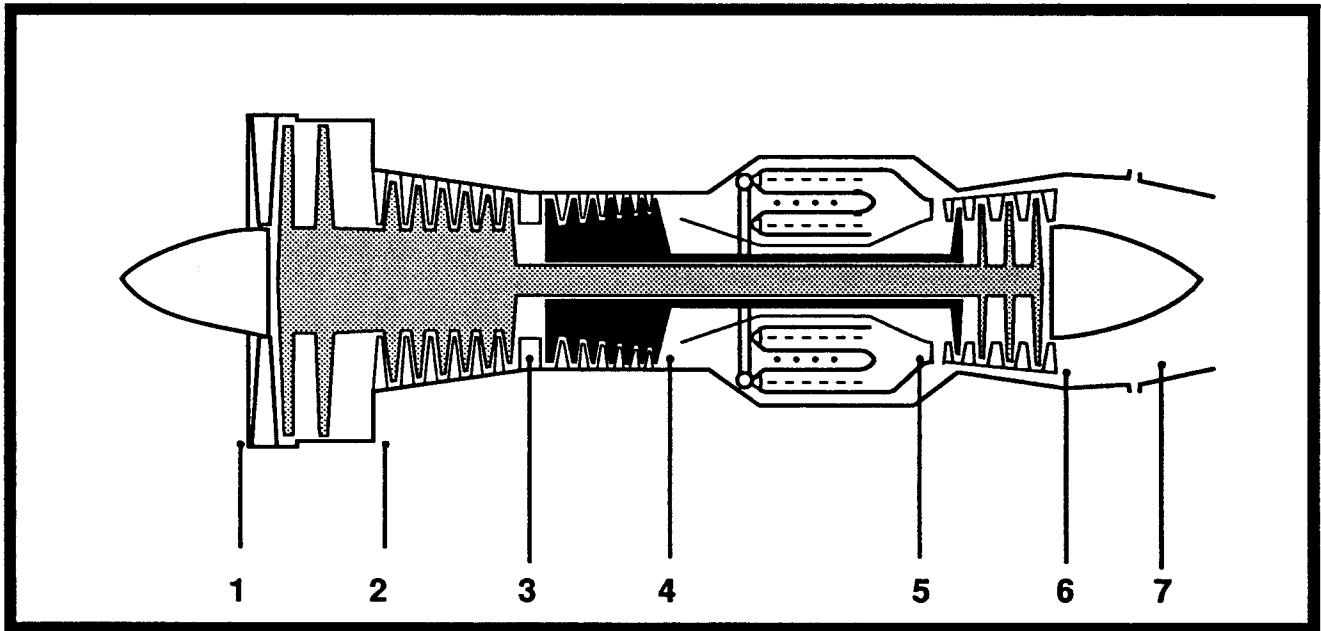


FIGURE 7.—Internal Engine Pressures and Temperatures.

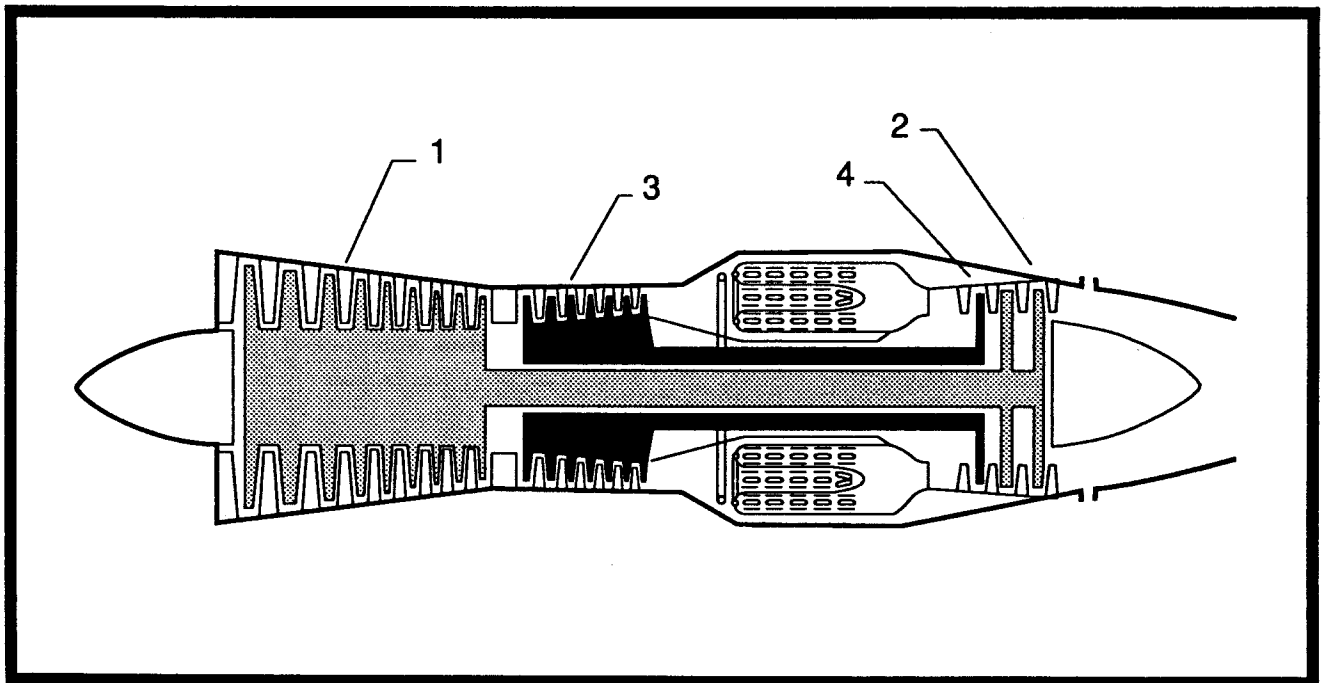


FIGURE 8.—Dual-Spool Axial-Flow Compressor.

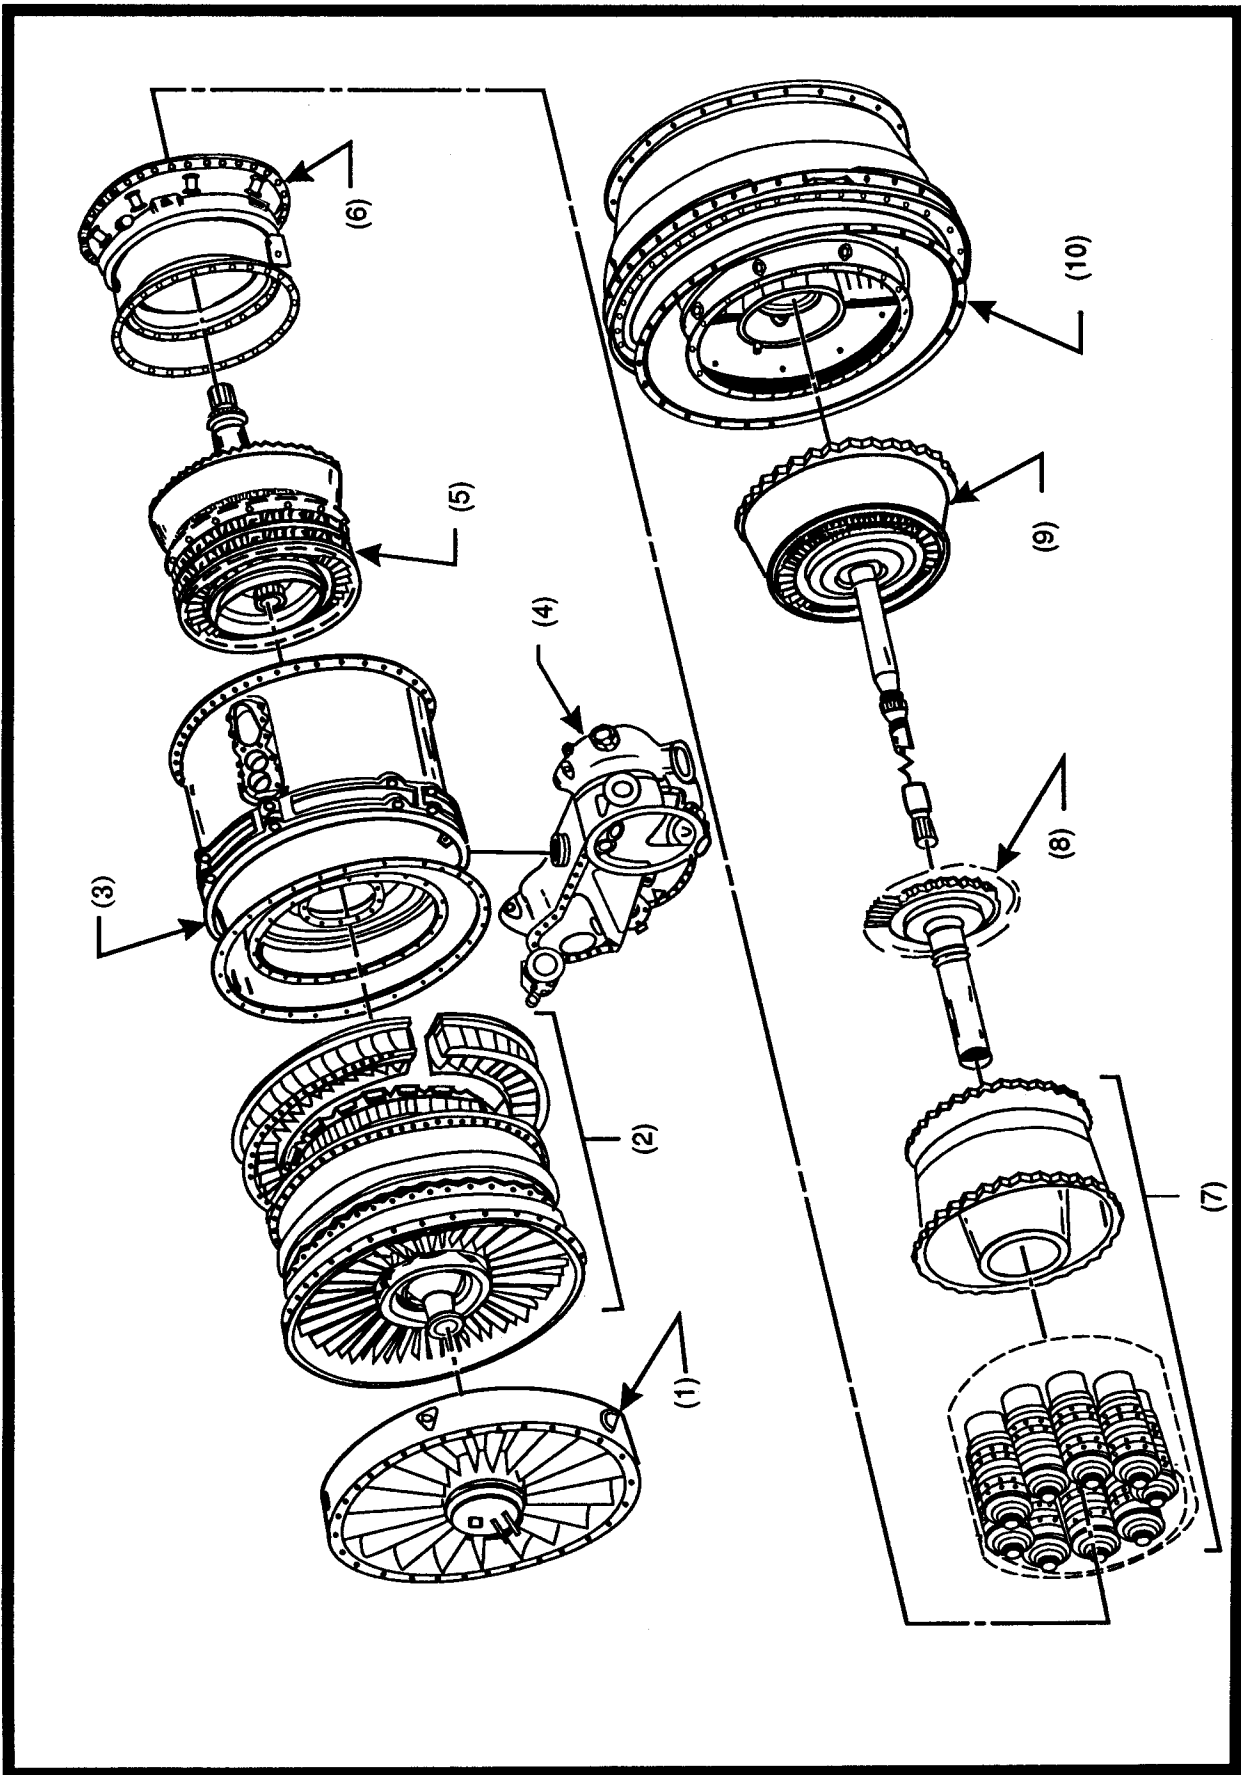


FIGURE 9.—Major Subassemblies of an Axial-Flow Gas Turbine Engine.

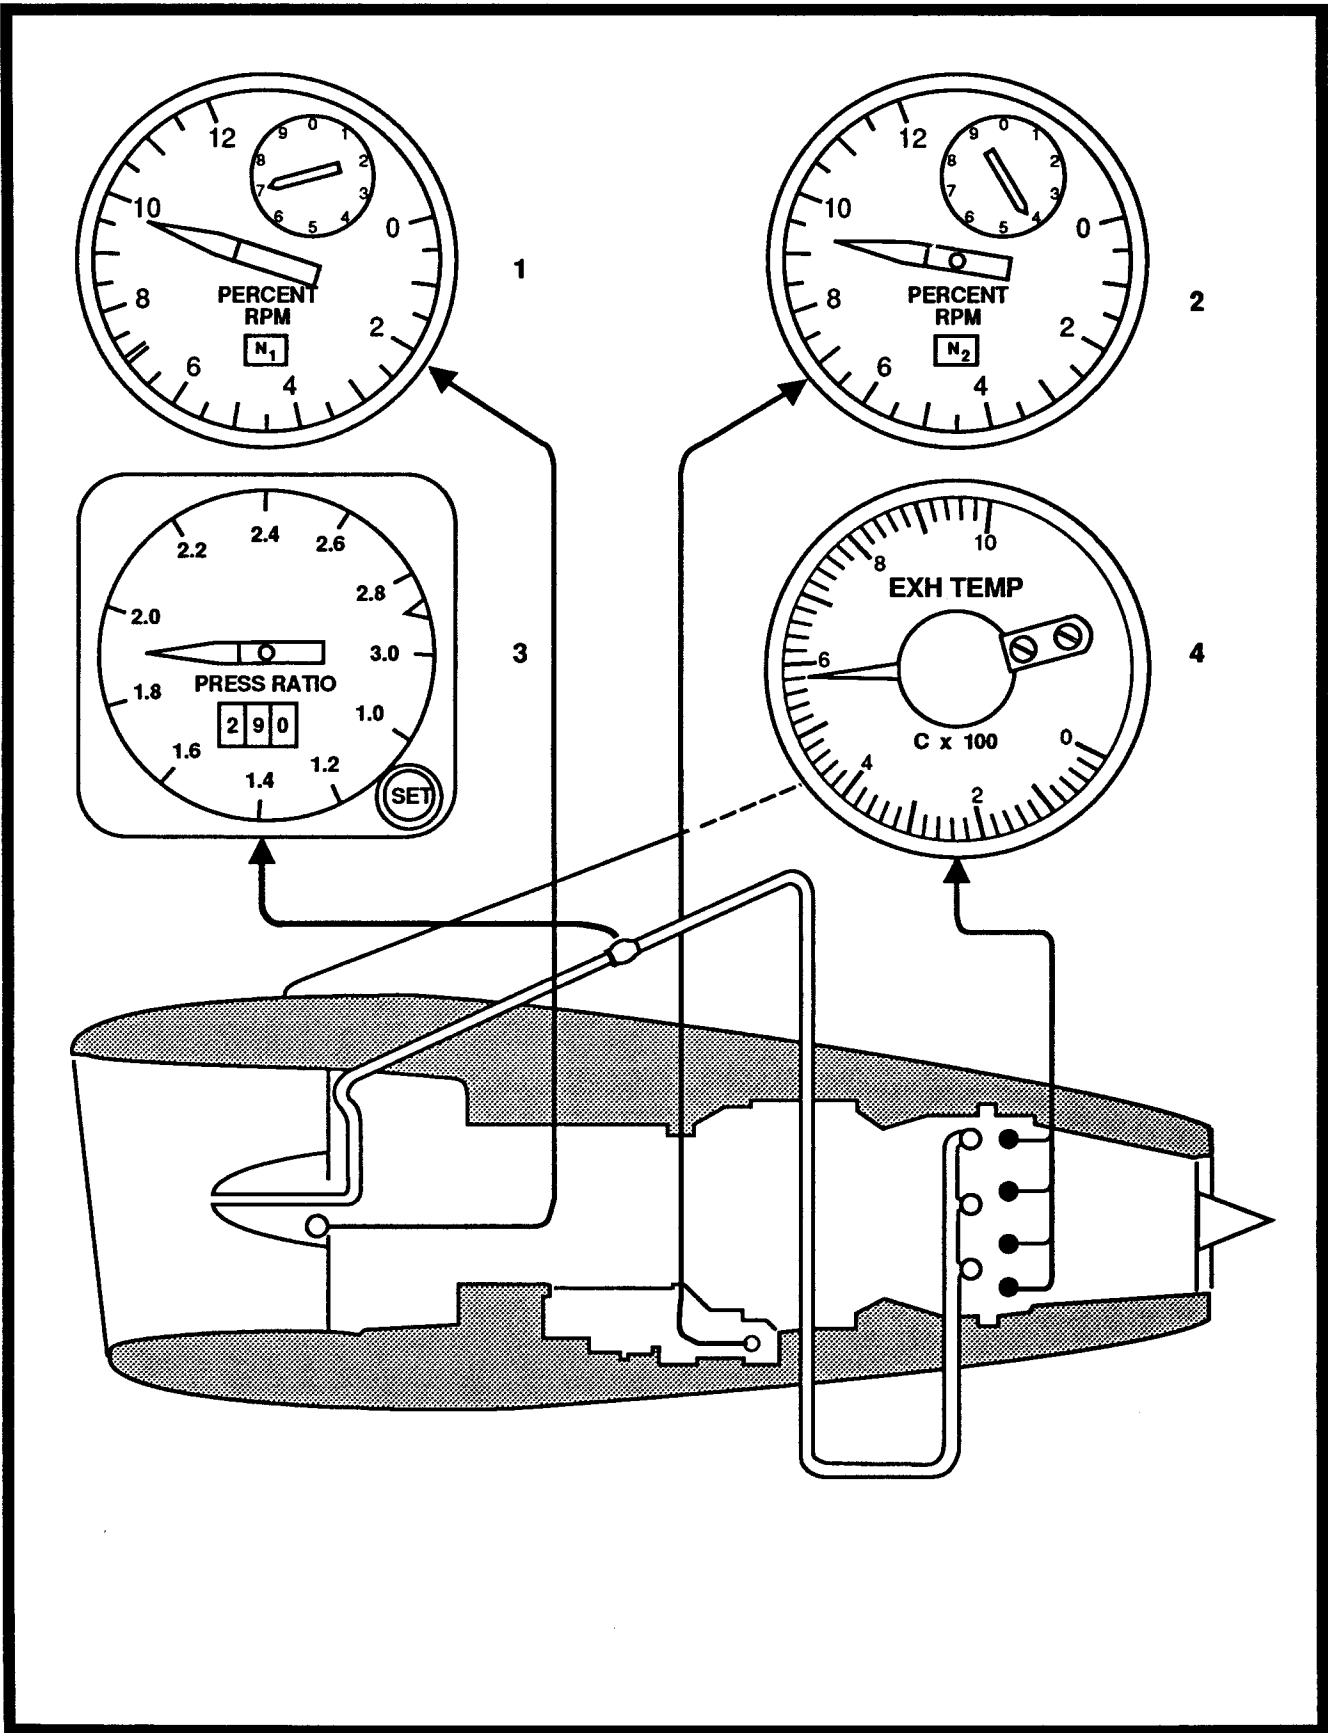


FIGURE 10.—Powerplant Instruments.

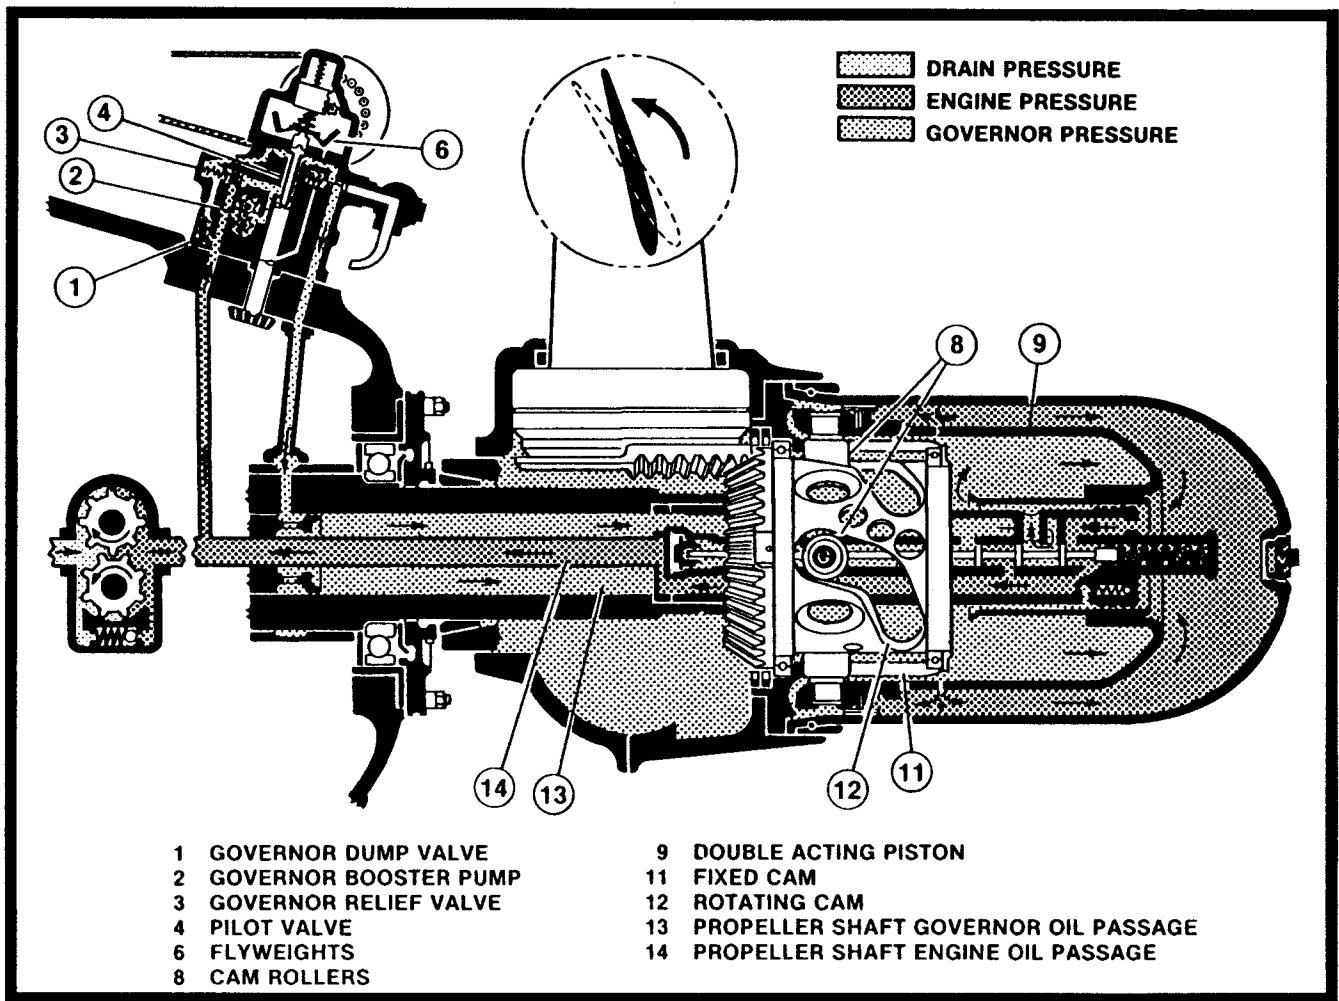


FIGURE 11.—Hydromatic Propeller Installation.



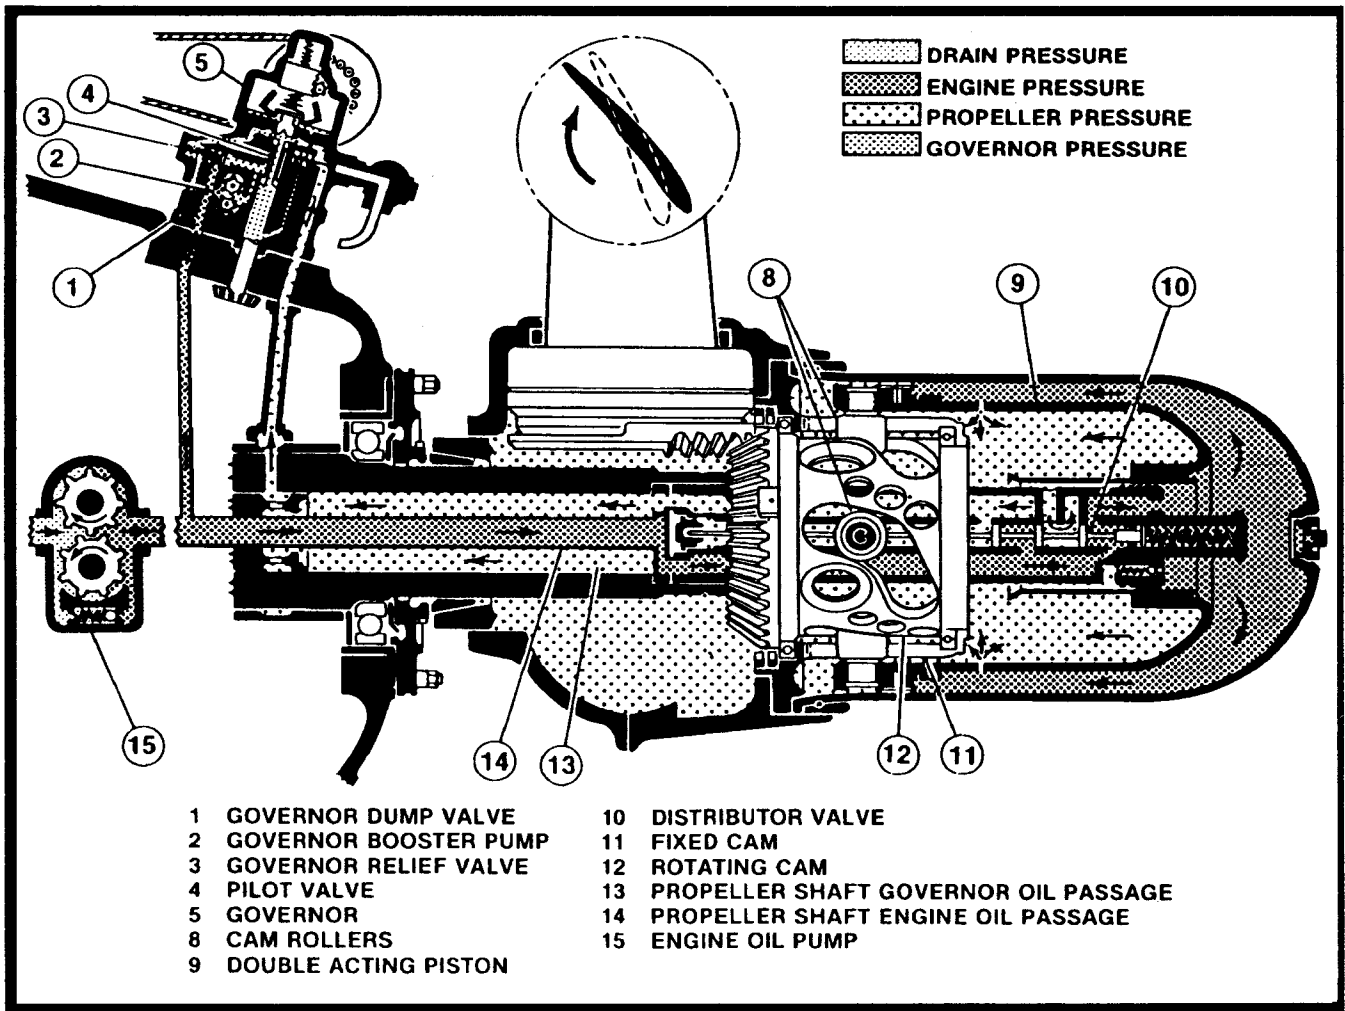


FIGURE 12.—Hydromatic Propeller Installation.

# GO AROUND EPR

ENG 1 & 3  
ENG 2

A/C ON  
NO BLEED

PRESSURE ALTITUDE-FT	OAT	A/C ON NO BLEED																		
		°F	-82	-10	0	10	18	27	38	47	55	69	73	83	91	100	110	119		
		°C	-63	-23	-18	-13	-8	-3	3	8	13	18	23	28	33	38	43	48		
	TAT	°C	-60	-20	-15	-10	-5	0	5	10	15	20	25	30	35	40	45	50		
-1000	E	1 & 3	2.02	2.02	2.02	2.02	2.02	2.02	2.02	2.02	2.02	2.02	2.02	2.02	2.02	2.02	2.02	1.99	1.94	1.89
		2	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.01	1.97	1.91
SEA LEVEL	N	1 & 3	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.04	1.99	1.94	1.89	
		2	2.09	2.09	2.09	2.09	2.09	2.09	2.09	2.09	2.09	2.09	2.09	2.09	2.09	2.06	2.01	1.97	1.91	
1000	G	1 & 3	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.09	2.09	2.09	2.08	2.04	1.99	1.94	1.89		
		2	2.15	2.15	2.15	2.15	2.15	2.15	2.15	2.15	2.12	2.12	2.12	2.12	2.10	2.06	2.01	1.97	1.91	
2000	I	1 & 3	2.18	2.18	2.18	2.18	2.18	2.18	2.17	2.13	2.12	2.12	2.10	2.08	2.04	1.99	1.91	1.89		
		2	2.20	2.20	2.20	2.20	2.20	2.20	2.19	2.16	2.15	2.15	2.13	2.10	2.06	2.01	1.97	1.91		
3000	N	1 & 3	2.24	2.24	2.24	2.24	2.23	2.20	2.17	2.13	2.12	2.12	2.10	2.08	2.04	1.99	1.94	1.89		
		2	2.27	2.27	2.27	2.27	2.25	2.22	2.19	2.16	2.15	2.15	2.13	2.10	2.06	2.01	1.97	1.91		
3900 AND ABOVE	E	1 & 3	2.30	2.30	2.28	2.26	2.23	2.20	2.17	2.13	2.12	2.12	2.10	2.08	2.04	1.99	1.94	1.89		
		2	2.32	2.32	2.30	2.28	2.25	2.22	2.19	2.16	2.15	2.15	2.13	2.10	2.06	2.01	1.97	1.91		

EPR BLEED CORRECTIONS		ENG 1&3	ENG 2
A/C BLEEDS		OFF +.04	ON -.04
ENGINE ANTI-ICE ON		--	-.03
ENGINE AND WING ANTI-ICE ON	TWO ENGINE BLEEDS	-.09	-.03
	ONE ENGINE BLEED	-.10	-.03

FIGURE 13.—Go-Around EPR.

<b>MAX TAKEOFF N<sub>1</sub></b>																										
<b>OAT</b>	<b>°F</b>		<b>°C</b>		<b>-65</b>	<b>-49</b>	<b>-40</b>	<b>-31</b>	<b>-22</b>	<b>-13</b>	<b>-4</b>	<b>5</b>	<b>14</b>	<b>23</b>	<b>32</b>	<b>41</b>	<b>50</b>	<b>59</b>	<b>68</b>	<b>77</b>	<b>86</b>	<b>95</b>	<b>104</b>	<b>113</b>	<b>120</b>	
	<b>°F</b>	<b>°C</b>	<b>-54</b>	<b>-40</b>	<b>-35</b>	<b>-30</b>	<b>-25</b>	<b>-20</b>	<b>-15</b>	<b>-10</b>	<b>-5</b>	<b>0</b>	<b>5</b>	<b>10</b>	<b>15</b>	<b>20</b>	<b>25</b>	<b>30</b>	<b>35</b>	<b>40</b>	<b>45</b>	<b>49</b>	<b>49</b>	<b>49</b>	<b>49</b>	<b>49</b>
<b>FT</b> <b>PRESS ALT</b>	<b>-1000</b>	83.2	84.8	85.7	86.5	87.4	88.3	89.2	90.1	91.0	91.9	92.7	93.6	94.4	95.3	96.1	96.9	97.8	98.5	99.2	99.9	100.6	101.3	102.0	102.7	103.4
	<b>S.L.</b>	84.7	86.3	87.2	88.1	89.1	90.0	90.9	91.8	92.7	93.6	94.4	95.3	96.1	96.9	97.8	98.5	99.2	99.9	100.6	101.3	102.0	102.7	103.4	104.1	104.8
	<b>1000</b>	86.4	88.0	88.9	89.9	90.8	91.7	92.7	93.6	94.5	95.4	96.3	97.1	97.4	97.8	98.6	99.2	99.9	100.6	101.3	102.0	102.7	103.4	104.1	104.8	105.5
<b>2000</b>	88.1	89.8	90.8	91.7	92.7	93.6	94.6	95.5	96.4	97.3	97.9	98.8	99.7	100.6	101.5	102.4	103.3	104.2	105.1	106.0	106.9	107.8	108.7	109.6	110.5	111.4
<b>3000</b>	89.8	91.6	92.6	93.5	94.5	95.5	96.5	97.4	98.0	98.0	98.0	97.9	97.8	97.7	97.5	97.2	96.9	96.5	96.0	95.5	95.0	94.5	94.0	93.5	93.0	92.5
<b>3856</b>	91.2	93.1	94.1	95.1	96.1	97.1	97.7	97.8	97.8	97.7	97.5	97.2	96.9	96.5	96.0	95.5	95.0	94.5	94.0	93.5	93.0	92.5	92.0	91.5	91.0	90.5
<b>&amp;</b>																										
<b>ABOVE</b>																										
<b>N<sub>1</sub> BLEED CORRECTIONS</b>																	<b>ENG 1 &amp; 3</b>							<b>AIRBLEED OFF + 1.3</b>		

FIGURE 14.—Maximum Takeoff N<sub>1</sub>.

MAX TAKEOFF EPR

ENG 1 & 3 AIRBLED ON  
0 - 60 KNOTS ENG 2 NO AIRBLEED

PRESS ALT FT	OAT ° F ° C	-67 TO -9	-4	5	14	23	32	41	50	59	68	77	86	95	104	113	120
		-55 TO -23	-20	-15	-10	-5	0	5	10	15	20	25	30	35	40	45	49
-1000	1 & 3	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.03	1.99	1.94	1.91
	2	2.06	2.06	2.06	2.06	2.06	2.06	2.06	2.06	2.06	2.06	2.06	2.06	2.05	2.00	1.96	1.92
S.L.	1 & 3	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.08	2.03	1.99	1.94	1.91
	2	2.11	2.11	2.11	2.11	2.11	2.11	2.11	2.11	2.11	2.11	2.11	2.10	2.05	2.00	1.96	1.92
1000	1 & 3	2.15	2.15	2.15	2.15	2.15	2.15	2.15	2.13	2.12	2.12	2.11	2.08	2.03	1.99	1.94	1.91
	2	2.16	2.16	2.16	2.16	2.16	2.16	2.16	2.15	2.13	2.13	2.12	2.10	2.05	2.00	1.96	1.92
2000	1 & 3	2.21	2.21	2.21	2.21	2.21	2.20	2.17	2.14	2.14	2.14	2.11	2.08	2.03	1.99	1.94	1.91
	2	2.22	2.22	2.22	2.22	2.22	2.21	2.18	2.16	2.16	2.15	2.12	2.10	2.05	2.00	1.96	1.92
3000	1 & 3	2.26	2.26	2.26	2.25	2.23	2.20	2.17	2.14	2.14	2.14	2.11	2.08	2.03	1.99	1.94	1.91
	2	2.28	2.28	2.28	2.27	2.24	2.21	2.18	2.16	2.16	2.15	2.12	2.10	2.05	2.00	1.96	1.92
3856 & ABOVE	1 & 3	2.31	2.31	2.27	2.25	2.23	2.20	2.17	2.14	2.14	2.14	2.11	2.08	2.03	1.99	1.94	1.91
	2	2.32	2.32	2.28	2.27	2.24	2.21	2.18	2.16	2.16	2.15	2.12	2.10	2.05	2.00	1.96	1.92
EPR BLEED CORRECTIONS		ENG 1 & 3	ENG 2														
AIR CONDITIONING		OFF + .04	-														
ENGINE ANTI-ICE ON		-	-.03														

FIGURE 15.—Maximum Takeoff EPR.

# MAX TAKEOFF EPR

DRY OAT	°F	-58	-40	-31	-22	-13	-4	5	14	23	32	41	50	59	68	77	86	95	104	122
OAT	°C	-50	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25	30	35	40	50
T/C ON		2.07	2.05	2.04	2.03	2.02	2.01	1.99	1.98	1.96	1.93	1.89	1.87	1.83	1.83	1.83	1.82	1.77	1.73	1.63
T/C OFF		2.12	2.10	2.09	2.08	2.06	2.05	2.03	2.01	1.99	1.96	1.92	1.89	1.85	1.85	1.85	1.84	1.79	1.75	1.65
T/C ON		2.06			2.02			1.98		1.93		1.88	1.83				1.78			
T/C OFF		2.11			2.06			2.01		1.96		1.91	1.85				1.80			

40 TO 80 KTS  
ENG A/I ON OR OFF

FIGURE 16.—Maximum Takeoff EPR.

### NORMAL TAKEOFF THRUST

1. Determine Max EPR from the Maximum Takeoff Thrust table.
2. Using Assumed Temperature and MAX EPR, determine Normal EPR.  
EPR is valid when set at 40 – 80 knots, two cabin compressors are on, blowaway jets are off.

ASSUM TEMP °F	MAX EPR											
	1.86	1.87	1.89	1.90	1.91	1.93	1.95	1.96	1.97	1.99	2.00	2.01
	NORMAL EPR											
120	1.75	1.76	1.78	1.79	1.80	1.82	1.84	1.85	1.86	1.88	1.89	1.90
115	1.75	1.76	1.78	1.79	1.80	1.82	1.84	1.85	1.86	1.88	1.89	1.90
110	1.75	1.76	1.78	1.79	1.80	1.82	1.84	1.85	1.86	1.88	1.89	1.90
105	1.75	1.76	1.78	1.79	1.80	1.82	1.84	1.85	1.86	1.88	1.89	1.90
100	1.77	1.77	1.78	1.79	1.80	1.82	1.84	1.85	1.86	1.88	1.89	1.90
95	1.80	1.80	1.80	1.80	1.80	1.82	1.84	1.85	1.86	1.88	1.89	1.90
90	1.82	1.82	1.82	1.82	1.82	1.82	1.84	1.85	1.86	1.88	1.89	1.90
85	1.85	1.85	1.85	1.85	1.85	1.85	1.85	1.85	1.86	1.88	1.89	1.90
80	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.88	1.89	1.90
75	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.88	1.89	1.90
70	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.88	1.89	1.90
65	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.88	1.89	1.90
60	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.86	1.88	1.89	1.90
55	1.86	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.88	1.89	1.90
50	1.86	1.87	1.89	1.89	1.89	1.89	1.89	1.89	1.89	1.89	1.89	1.90
45	1.86	1.87	1.89	1.90	1.91	1.91	1.91	1.91	1.91	1.91	1.91	1.91
40	1.86	1.87	1.89	1.90	1.91	1.93	1.93	1.93	1.93	1.93	1.93	1.93
35	1.86	1.87	1.89	1.90	1.91	1.93	1.95	1.95	1.95	1.95	1.95	1.95
30	1.86	1.87	1.89	1.90	1.91	1.93	1.95	1.96	1.96	1.96	1.96	1.96
25	1.86	1.87	1.89	1.90	1.91	1.93	1.95	1.96	1.97	1.97	1.97	1.97

#### ADJUSTMENTS:

1. All cabin compressors off, add .01.
2. Rain removal on, subtract .01.

### MAXIMUM TAKEOFF THRUST

OAT °F	PRESSURE ALTITUDE (1,000 feet)					
	SL	1	2	3	4	Above 4
75	1.86	1.86	1.86	1.86	1.86	1.86
70	1.86	1.86	1.86	1.86	1.86	1.86
65	1.86	1.86	1.86	1.86	1.86	1.86
60	1.86	1.86	1.86	1.86	1.86	1.86
55	1.86	1.87	1.87	1.87	1.87	1.87
50	1.86	1.89	1.89	1.89	1.89	1.89
47	1.86	1.90	1.90	1.90	1.90	1.90
45	1.86	1.90	1.91	1.91	1.91	1.91
40	1.86	1.90	1.93	1.93	1.93	1.93
35	1.86	1.90	1.95	1.95	1.95	1.95
33	1.86	1.90	1.95	1.95	1.95	1.95
30	1.86	1.90	1.95	1.96	1.96	1.96
25	1.86	1.90	1.95	1.97	1.97	1.97
20	1.86	1.90	1.95	1.99	1.99	1.99
16	1.86	1.90	1.95	2.00	2.00	2.00
15	1.86	1.90	1.95	2.00	2.01	2.01
10	1.86	1.90	1.95	2.00	2.02	2.02
5	1.86	1.90	1.95	2.00	2.03	2.03
0	1.86	1.90	1.95	2.00	2.04	2.04
-5	1.86	1.90	1.95	2.00	2.05	2.05

FIGURE 17.—Normal/Maximum Takeoff Thrust.

OPERATING CONDITIONS		1	2	3
PRESSURE ALTITUDE	FT	1,000	10,000	1,500
CAS	KT	100	140	120
AMBIENT TEMPERATURE	°C	0	-10	-30

FIGURE 18.—Torque Requirement Conditions.

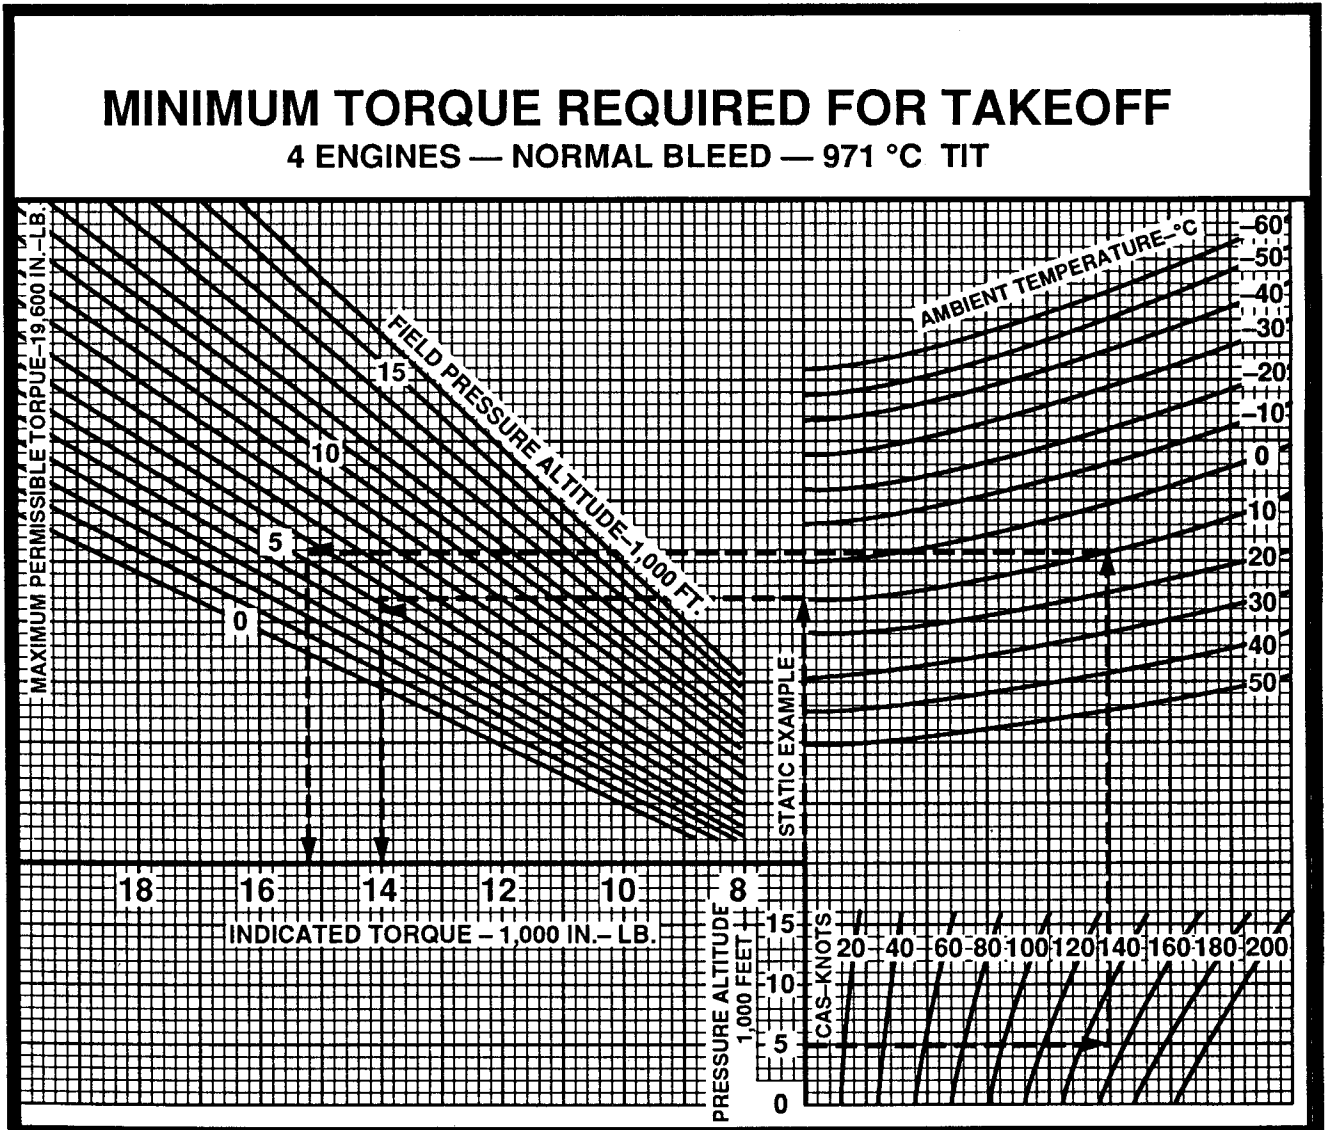


FIGURE 19.—Minimum Takeoff Torque.

OPERATING CONDITIONS		1	2	3
PRESSURE ALTITUDE	FT	1,000	10,000	2,500
CAS	KT	100	120	140
AMBIENT TEMPERATURE	°C	+10	-10	+10

FIGURE 20.—Takeoff Power Conditions.

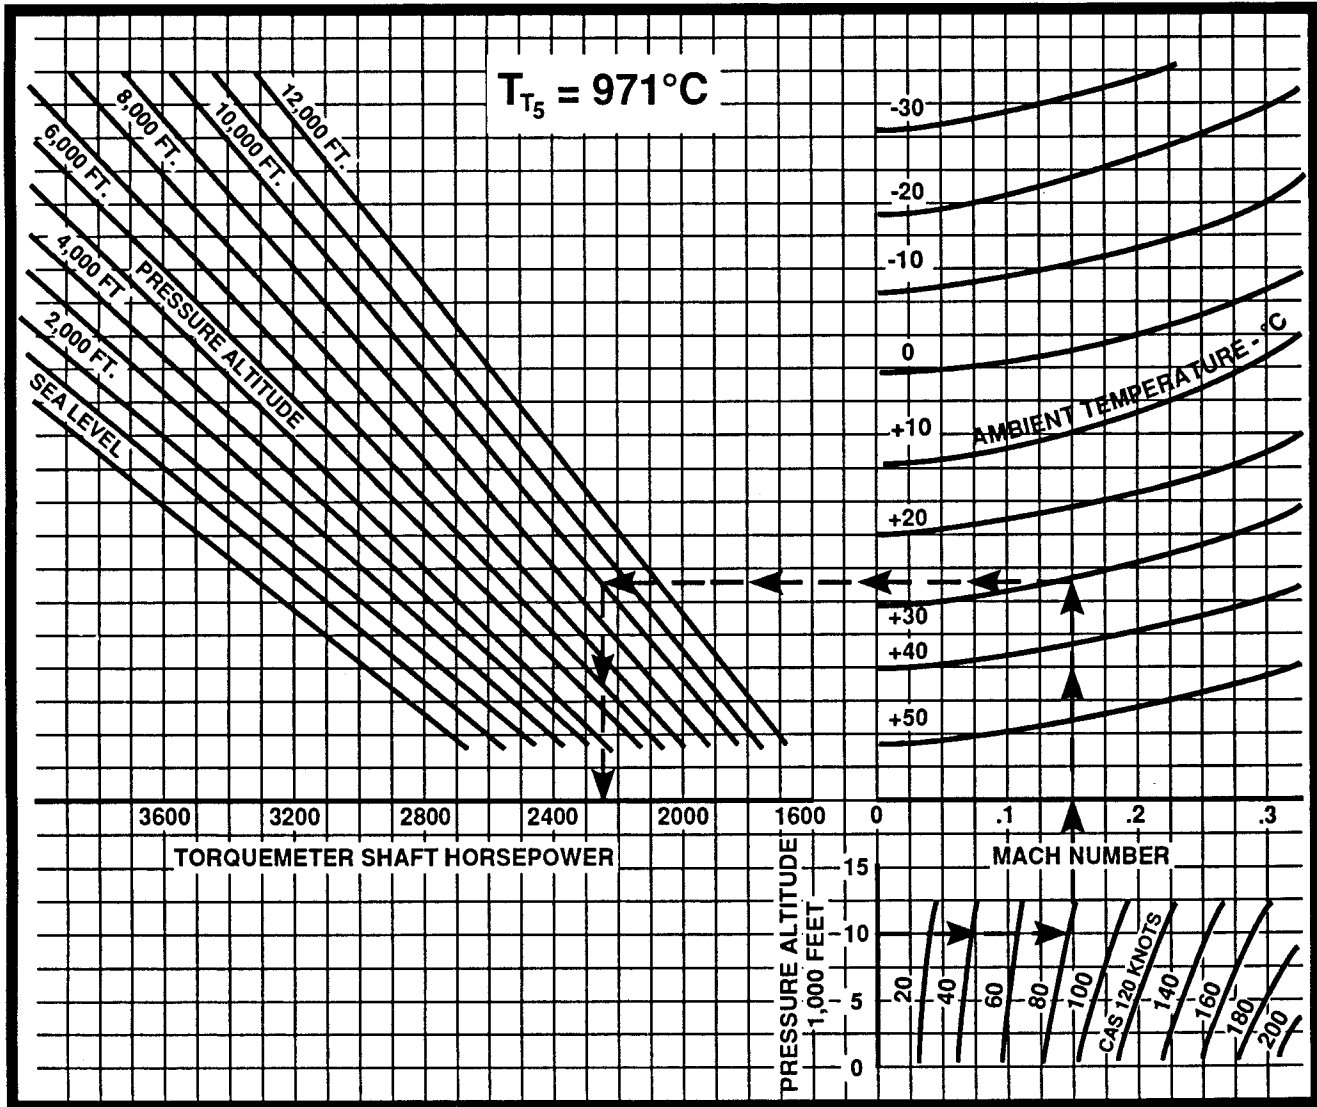


FIGURE 21.—Takeoff Power Conditions.



OPERATING CONDITIONS	1	2	3
CAT	86 °F	95 °F	20 °C
DEWPOINT	40 °F	90 °F	13 °C
ADI	ON	ON	OFF

FIGURE 22.—Operating Conditions.

**POWER SCHEDULE  
P&W R-2800 CB-16 WET TAKEOFF  
BMEP AT VARIOUS CONDITIONS OF TEMPERATURE & HUMIDITY  
2800 RPM, SEA LEVEL, ADI ON**

MANIFOLD PRESSURE *	DEWPOINT TEMPERATURE		CARBURETOR AIR TEMPERATURE						
	°C	°F	10°C 50°F	15°C 59°F	20°C 68°F	25°C 77°F	30°C 86°F	35°C 95°F	40°C 104°F
59.6	-4	25	244	242	240	238	235	233	231
59.7	-1	30	244	242	239	238	235	233	231
59.7	1	35	243	241	239	237	234	232	230
59.7	4	40	242	240	238	236	234	232	230
59.8	7	45	242	240	238	236	233	231	229
59.8	10	50	241	239	237	235	233	231	228
59.9	13	55		238	236	234	232	230	228
60.0	16	60		238	235	234	231	229	227
60.1	18	65			234	233	230	228	226
60.2	21	70			233	232	229	227	225
60.4	24	75				230	228	226	224
60.5	27	80				228	226	224	222
60.7	29	85					224	222	220
60.9	32	90						220	218

\* 59.5 INCHES OF MANIFOLD PRESSURE PLUS EXISTING VAPOR PRESSURE, UP TO 1.5 INCHES.

SPECIAL NOTE - FOR CB-16 DRY TAKEOFF POWER SCHEDULE APPLY THE FOLLOWING:

RPM = 2700

SUBTRACT APPROXIMATELY 30 BMEP FROM THE ABOVE SETTINGS.

SUBTRACT APPROXIMATELY 5 INCHES OF MANIFOLD PRESSURE FROM THE ABOVE SETTINGS.

FIGURE 23.—Power Schedule.

To Convert From	To	Multiply By	To Convert From	To	Multiply By
acres	sq ft	$4.356 \times 10^4$	ft-lb/min	hp	$3.030 \times 10^{-5}$
atmospheres	cm Hg at 0°C in. Hg at 0°C lb/sq in bars	76.00 29.92 14.696 1.013	ft-lb/sec	hp kilowatts	$1.818 \times 10^{-3}$ $1.356 \times 10^{-3}$
bars	lb/sq in	14.5	fluid oz	dram	8
Btu	ft-lb kilowatt-hr  joules	778.26 $2.931 \times 10^{-4}$  1055	gal. Imperial	cu in. U.S. gal liters	277.4 1.201 4.546
Btu/sec	watts	1055	gal, U.S. dry	U.S. gal, liquid	1.164
centimeters	in	0.3937	gal, U.S. liquid	cu in.	231.0
cm Hg	in. H <sub>2</sub> O at 4°C lb/sq in	5.354 $1.934 \times 10^{-1}$	grams	oz avdp lb avdp	$3.527 \times 10^{-2}$ $2.205 \times 10^{-3}$
cm/second	Ft/sec	$3.281 \times 10^{-2}$	grams/cm	lb/ft	$6.721 \times 10^{-2}$
circular mils	sq in	$7.854 \times 10^{-7}$	hectopieze	in. Hg	29.53
cu centimeters	cu in U.S. gal	$6.102 \times 10^{-2}$ $2.642 \times 10^{-4}$	horsepower	ft-lb/min ft-lb/sec m-kg/sec kilowatts Btu/sec	33,000 550 76.04 $7.457 \times 10^{-1}$ $7.068 \times 10^{-1}$
cu ft	cu cm U.S. gal liters	$2.832 \times 10^4$ 7.481 28.32	horsepower metric	hp	$9.863 \times 10^{-1}$
cu ft H <sub>2</sub> O	lb	62.428	in.	cm	2.540
cu in.	cu cm liters U.S. gal	16.39 $1.639 \times 10^{-2}$ $4.329 \times 10^{-3}$	in. water at 4°C	in. Hg at 0°C	$7.355 \times 10^{-2}$
cu meters	U.S. gal	264.2	kilograms	lb oz	2.205 35.27
deg (arc)	radians	$1.745 \times 10^{-2}$	kilometers	ft miles nautical miles	$3.281 \times 10^3$ $6.214 \times 10^{-1}$ $5.400 \times 10^{-1}$
feet	meters	$3.048 \times 10^{-1}$	km/hr	ft/sec knots mph	$9.113 \times 10^{-1}$ $5.396 \times 10^{-1}$ $6.214 \times 10^{-1}$
ft/min	mph km/hr	$1.136 \times 10^{-2}$ $1.829 \times 10^{-2}$	kilowatts	Btu/sec hp	$9.480 \times 10^{-1}$ 1.341
ft/sec	mph cm/sec knots	.6818 30.48 .5925			

FIGURE 24.—Conversion Factors.

To Convert From	To	Multiply By	To Convert From	To	Multiply By
knots	nautical mph	1.0	ounces, fluid	cu in	1.805
	ft/sec	1.688	lb/avdp	grams	453.6
	mph	1.151	ounces		16.0
liters	cu cm	10 <sup>3</sup>	lb/cu in	grams/cu cm	27.68
	cu in	61.03	lb/sq in	in Hg at 0 °C	2.036
	U.S. gal	2.642 x 10 <sup>-1</sup>	radians	deg (arc)	57.30
meters	in	39.37	radians/sec	deg/sec	57.30
	ft	3.281	rev/min		9.549
meter-kilogram	ft-lb	7.233	revolutions	radians	6.283 [2π]
meter/set	ft/sec	3.281	rev/min	radians/sec	1.047 x 10 <sup>-1</sup>
microns	in	3.937 x 10 <sup>-5</sup>	slug	lb	32.174
			sq cm	sq in	1,550 x 10 <sup>-1</sup>
statute miles (SM)	ft	5280	sq ft	sq cm	929.0
	km	1.609	sq in	sq cm	6.452
mph	ft/sec	1.467	sq meters	sq ft	10.76
	km/hr	1.609	sq miles	sq km	2.590
	knots	8.690 x 10 <sup>-1</sup>	watts	Btu/sec	9.481 x 10 <sup>-4</sup>
millibars	in Hg at 0°C	2.953 x 10 <sup>-2</sup>			
nautical miles (NM)	ft	6076.1			
	SM	1.151			
	m	1852			
ounces, avdp	grams	28.35			

FIGURE 25.—Conversion Factors.

OPERATING CONDITIONS	1	2
AIRCRAFT WEIGHT - START DUMP LB	113,000	111,500
ZERO FUEL WEIGHT LB	77,000	80,000
DUMP RATE LB/MIN	1,350	1,350
DUMP TIME MIN	22	15
FUEL FLOW LB/HR/ENG	1,200	1,500
ENGINES OPERATING DURING DUMP	4	3

FIGURE 26.—Fuel Dump Conditions.

OPERATING CONDITIONS	1	2	3	4
NM/1,000 LB	55.4	62.0	67.2	72.5
TAS KT	200	220	240	260
WIND COMPONENT KT	10 HW	10 TW	20 HW	20 TW
CRUISE TIME HR	4.0	4.5	5.0	--

FIGURE 27.—Cruise Conditions.

OPERATING CONDITIONS (4 ENG)	1	2	3
BEGINNING TOTAL WEIGHT LB	97,520	88,500	95,400
ZERO FULL WEIGHT LB	68,450	69,700	80,100
PRESSURE ALTITUDE	14,000	17,000	19,000
1200 BHP CRUISE TIME	1:25	:40	:55
1100 BHP CRUISE TIME	1:40	2:15	1:35
1000 BHP CRUISE TIME	2:10	—	1:20

FIGURE 28.—Cruise Conditions.

### STANDARD CRUISE POWER TABLE

**1,200 Brake Horsepower**

PRESSURE ALTITUDE FEET	BLOWER	RPM	BMEP	BMEP DROP	SPARK	FUEL FLOW lb/hr/eng
0 - 3,000	LOW	2200	154	12	Cruise	545
3,001 - 6,000	LOW	2200	154	12	Cruise	545
6,001 - 9,000	LOW	2200	154	12	Cruise	545
9,001 - 12,000	LOW	2200	154	12	Cruise	545
12,001 - 14,000	LOW	2200	154	12	Cruise	545
14,001 - 16,000	LOW	2300	148	12	Cruise	555
15,001 - 21,000	HIGH	2300	148	12	TO & CL	575

**1,100 Brake Horsepower**

PRESSURE ALTITUDE FEET	BLOWER	RPM	BMEP	BMEP DROP	SPARK	FUEL FLOW lb/hr/eng
0 - 3,000	LOW	2100	148	12	Cruise	495
3,001 - 6,000	LOW	2100	148	12	Cruise	495
6,001 - 9,000	LOW	2100	148	12	Cruise	495
9,001 - 12,000	LOW	2100	148	12	Cruise	495
12,001 - 14,000	LOW	2100	148	12	Cruise	495
14,001 - 16,000	LOW	2200	142	12	Cruise	505
15,001 - 17,000	HIGH	2100	149	12	*Cruise	510
17,001 - 20,000	HIGH	2200	142	12	*Cruise	520
20,001 - 24,000	HIGH	2300	135	12	TO & CL	535

**1,000 Brake Horsepower**

PRESSURE ALTITUDE FEET	BLOWER	RPM	BMEP	BMEP DROP	SPARK	FUEL FLOW lb/hr/eng
0 - 3,000	LOW	1850	153	12	Cruise	440
3,001 - 6,000	LOW	1850	153	12	Cruise	440
6,001 - 9,000	LOW	1850	153	12	Cruise	440
9,001 - 12,000	LOW	1950	145	12	Cruise	445
12,001 - 15,000	LOW	2100	135	12	Cruise	455
15,001 - 18,000	LOW	2200	129	12	Cruise	465
15,001 - 18,000	HIGH	2100	135	12	*Cruise	470
18,001 - 21,000	HIGH	2200	129	12	*Cruise	480
21,001 - 24,000	HIGH	2300	123	12	TO & CL	495

FIGURE 29.—Cruise Power Table.

OPERATING CONDITIONS (4 ENG.)		1	2	3
AIRCRAFT WEIGHT - START DUMP	LB	102,000	96,500	100,100
ZERO FUEL WEIGHT	LB	83,200	72,700	76,150
DUMP RATE	LB/MIN	2,736	2,736	2,736
DUMP TIME	MIN	5.6	7.2	6.9
FUEL FLOW	LB/HR/ENG	495	715	545
ENGINES OPERATING DURING DUMP		4	3	4

FIGURE 30.—Fuel Dump Conditions.

<b>PASSENGER LOADING TABLE</b>		
<i>Number of Pass.</i>	<i>Weight Lb</i>	<i>Moment 1000</i>
<b>Forward Compartment Centroid-582.0</b>		
5	850	495
10	1,700	989
15	2,550	1,484
20	3,400	1,979
25	4,250	2,473
29	4,930	2,869
<b>AFT Compartment Centroid-1028.0</b>		
10	1,700	1,748
20	3,400	3,495
30	5,100	5,243
40	6,800	6,990
50	8,500	8,738
60	10,200	10,486
70	11,900	12,233
80	13,600	13,980
90	15,300	15,728
100	17,000	17,476
110	18,700	19,223
120	20,400	20,971
133	22,610	23,243

<b>CARGO LOADING TABLE</b>		
<i>Moment 1000</i>		
	<i>Forward Hold</i>	<i>Aft Hold</i>
<i>Weight Lb</i>	<i>Arm 680.0</i>	<i>Arm 1166.0</i>
6,000		6,966
5,000	3,400	5,830
4,000	2,720	4,664
3,000	2,040	3,498
2,000	1,360	2,332
1,000	680	1,166
900	612	1,049
800	544	933
700	476	816
600	408	700
500	340	583
400	272	466
300	204	350
200	136	233
100	68	117

**NOTE:** These computations are to be used for testing purposes only.

<b>FUEL LOADING TABLE</b>								
<b>TANKS 1 &amp; 3 (EACH)</b>			<b>TANK 2 (3 CELL)</b>					
<i>Weight Lbs.</i>	<i>Arm</i>	<i>Moment 1000</i>	<i>Weight Lbs.</i>	<i>Arm</i>	<i>Moment 1000</i>	<i>Weight Lb</i>	<i>Arm</i>	<i>Moment 1000</i>
8,500	992.1	8,433	8,500	917.5	7,799	22,500	914.5	20,576
9,000	993.0	8,937	9,000	917.2	8,255	23,000	914.5	21,034
9,500	993.9	9,442	9,500	917.0	8,711	23,500	914.4	21,488
10,000	994.7	9,947	10,000	916.8	9,168	24,000	914.3	21,943
10,500	995.4	10,451	10,500	916.6	9,624	24,500	914.3	22,400
11,000	996.1	10,957	11,000	916.5	10,082	25,000	914.2	22,855
11,500	996.8	11,463	11,500	916.3	10,537	25,500	914.2	23,312
12,000	997.5	11,970	12,000	916.1	10,993	26,000	914.1	23,767
<b>FULL CAPACITY</b>			<b>** (See note at lower left)</b>			26,500	914.1	24,244
<b>**Note:</b> Computations for Tank 2 weights for 12,500 lbs. to 18,000 lbs. have been purposely omitted.			18,500	915.1	16,929	27,000	914.0	24,678
			19,000	915.0	17,385	27,500	913.9	25,132
			19,500	914.9	17,841	28,000	913.9	25,589
			20,000	914.9	18,298	28,500	913.8	26,043
			20,500	914.8	18,753	29,000	913.7	26,497
			21,000	914.7	19,209	29,500	913.7	26,954
			21,500	914.6	19,664	30,000	913.6	27,408
			22,000	914.6	20,121	<b>FULL CAPACITY</b>		

FIGURE 31.—Loading Tables.



OPERATING CONDITIONS	1	2	3
ORIGINAL WEIGHT	155,000	130,500	100,350
ORIGINAL CG - PERCENT OF MAC	29.5	20.8	24.6
LENGTH OF MAC	164.5	164.5	164.5
LEMAC	TS-39.6	TS-39.6	TS-39.6
WEIGHT REMOVED	7,500	9,600	12,500
LOCATION OF WEIGHT REMOVED	TS+239.5	TS-120	TS-30

NOTE: STA. 527.0=TRIM STA. (TS) 0.0

FIGURE 32.—CG Shift.

OPERATING CONDITIONS	1	2	3
BASIC OPERATING WEIGHT (BOW)	70,500	70,450	69,800
BOW CG - PERCENT OF MAC	25.0	23.5	20.4
CARGO			
COMPT A (TS-299.5)	1,000	3,000	3,000
COMPT B (TS-210)	2,000	4,500	5,500
COMPT C (TS-120)	3,500	5,500	6,500
COMPT D (TS-30)	3,500	6,500	7,500
COMPT E (TS+60)	2,500	6,500	7,000
COMPT F (TS+150)	2,500	6,000	6,500
COMPT G (TS+239.5)	1,000	6,000	6,000
FUEL AVG STA 555.0	30,000	42,000	43,000

NOTE: STA 527.0 = TRM STA (TS) 0.0  
MAC 164.5 INCHES, LEMAC 487.4 (TS-39.6)

FIGURE 33.—CG in Percent of MAC.

OPERATING CONDITIONS	1	2	3
ORIGINAL WEIGHT	120,000	115,000	122,500
ORIGINAL CG           %MAC	20.2	28.7	23.2
LENGTH OF MAC       %MAC	164.5	164.5	164.5
LEMAC	TS-39.6	TS-39.6	TS-39.6
WEIGHT ADDED	6,500	12,500	8,500
LOCATION ADDED	TS+239.5	TS-120	TS+150

NOTE: STA. 527.0=TRIM STA. (TS) 0.0

FIGURE 34.—CG Added Weight.

OPERATING CONDITIONS	1	2	3
TAKEOFF WEIGHT	145,000	120,500	150,700
ORIGINAL CG %MAC	23.5	29.8	28.7
LENGTH OF MAC	164.5	164.5	164.5
LEMAC	TS-39.6	TS-39.6	TS-39.6
WEIGHT MOVED	2,770	4,000	1,700
CARGO LOCATION FWD	TS-210	TS+150	TS+239.5
AFT	TS+239.5	TS-120	TS-30

FIGURE 35.—CG Position Change.

OPERATING CONDITIONS	1	2	3
ORIGINAL WEIGHT	116,000	110,000	113,000
ORIGINAL CG %MAC	31.5	23.2	29.7
LENGTH OF MAC	168.7	168.7	168.7
LEMAC STA	545.9	545.9	545.9
WEIGHT REMOVED	2,500	3,100	3,800
LOCATION OF WEIGHT REMOVED	885.0	313.0	885.0

FIGURE 36.—CG Position Change.

OPERATING CONDITIONS	1	2	3
BASIC OPERATING WEIGHT (BOW)	61,310	62,700	59,340
BOW CG %MAC	24.0	15.5	26.5
PASSENGERS FWD (STA 300.0)	2,890	1,700	2,550
AFT (STA 654.0)	12,070	8,500	10,540
CARGO FWD (STA 313.0)	500	3,800	1,000
AFT (STA 885.0)	700	1,000	100
FUEL 1 AND 4 (STA 605.7)	7,300 EA	7,370 EA	10,500 EA
FUEL 2 AND 3 (STA 628.4)	7,300 EA	11,122 EA	10,500 EA
MAC	168.7		
LEMAC	545.9		

FIGURE 37.—Loading Conditions.

OPERATING CONDITIONS		1	2	3
ORIGINAL WEIGHT		100,000	102,500	98,700
ORIGINAL CG -	%MAC	13.1	28.7	17.6
LENGTH OF MAC -	STA	168.7	168.7	168.7
LEMAC -	STA	545.9	545.9	545.9
WEIGHT ADDED		3,500	3,650	4,000
LOCATION ADDED -	STA	885.0	313.0	885.0

FIGURE 38.—CG Position Change.

OPERATING CONDITIONS		1	2	3
TAKEOFF WEIGHT		114,000	102,000	108,000
ORIGINAL CG-	%MAC	32.0	20.4	31.5
LENGTH OF MAC		168.7	168.7	168.7
LEMAC		545.9	545.9	545.9
WEIGHT MOVED		1,500	2,400	500
CARGO LOCATIONS	FWD	313.0	313.0	313.0
	AFT	885.0	885.0	885.0

FIGURE 39.—Weight Shift Conditions.

OPERATING CONDITIONS		1	2
BASIC OPERATING WEIGHT (BOW)		58,000	59,100
BOW CG-	%MAC	15.0	11.5
PASSENGERS	FWD (STA 172.0)	1,360	1,190
	AFT (STA 570.0)	9,520	8,500
CARGO	FWD (STA 217.0)	1,500	2,560
	AFT (STA 720.0)	3,350	1,540
FUEL 1 & 4M	(STA 460.0)	4,170 EA	4,170 EA
2 & 3M	(STA 441.0)	3,048 EA	3,048 EA
1 & 4A	(STA 444.0)	1,650 EA	2,310 EA
2 & 3A	(STA 438.0)	1,632 EA	2,172 EA
MAC		163.6	
LEMAC		395.2	

FIGURE 40.—CG Load Conditions.

OPERATING CONDITIONS		1	2
ORIGINAL WEIGHT		96,000	100,000
ORIGINAL CG-	% MAC	20.5	16.7
LENGTH OF MAC		163.6	163.6
LEMAC-	STA	395.2	395.2
WEIGHT ADDED		3,500	2,500
LOCATION OF WEIGHT ADDED		715.0	715.0

FIGURE 41.—CG Weight Conditions.

OPERATING CONDITIONS		1	2	3
ORIGINAL WEIGHT		103,000	99,800	101,500
ORIGINAL CG -	%MAC	27.6	15.8	32.5
LENGTH OF MAC		163.6	163.6	163.6
LEMAC -	STA	395.2	395.2	395.2
WEIGHT REMOVED		2,600	2,850	4,050
LOCATION OF WEIGHT REMOVED		715.0	185.0	715.0

FIGURE 42.—CG Weight Conditions.

OPERATING CONDITIONS		1	2	3
TAKEOFF WEIGHT		100,500	98,700	89,200
ORIGINAL CG-	%MAC	12.3	32.5	15.6
LENGTH OF MAC		163.6	163.6	163.6
LEMAC		395.2	395.2	395.2
WEIGHT MOVED		750	1,000	940
CARGO LOCATIONS	FWD	185.0	185.0	185.0
	AFT	715.0	715.0	715.0

FIGURE 43.—Weight Removal Conditions.

OPERATING CONDITIONS		1	2	3
TAKEOFF WEIGHT		155,000	133,330	100,100
ORIGINAL CG	% MAC	21.9	31.5	16.5
AFFECTED CG LIMIT	% MAC	23.2	30.0	18.4
CARGO LOCATIONS	FWD TS	-120	-30	-210
	AFT TS	+150	+239.5	+60

MAC 164.5, LEMAC TS -39.6, TS 0=STA 527.0

FIGURE 44.—Cargo Shift.

OPERATING CONDITIONS		1	2	3
BASIC OPERATING WEIGHT		70,500	72,400	69,700
MAXIMUM ZERO FUEL WEIGHT		125,000	126,790	126,790
MAXIMUM LANDING WEIGHT		130,000	135,000	135,000
MAXIMUM TAKEOFF WEIGHT		155,000	155,000	155,000
FUEL TANK LOAD		60,500	41,610	35,300
ESTIMATED FUEL BURN		41,200	20,440	15,910

FIGURE 45.—Maximum Payload.

OPERATING CONDITIONS (4 ENG)		1	2	3
GROSS WEIGHT	LB	140,000	115,000	145,000
PRESSURE ALTITUDE	FT	16,000	20,000	5,000
AMBIENT TEMPERATURE	°C	-32	-5	+20
CRUISE TIME	HR	4.0	3.5	2.5

FIGURE 46.—Cruise Weight Change.

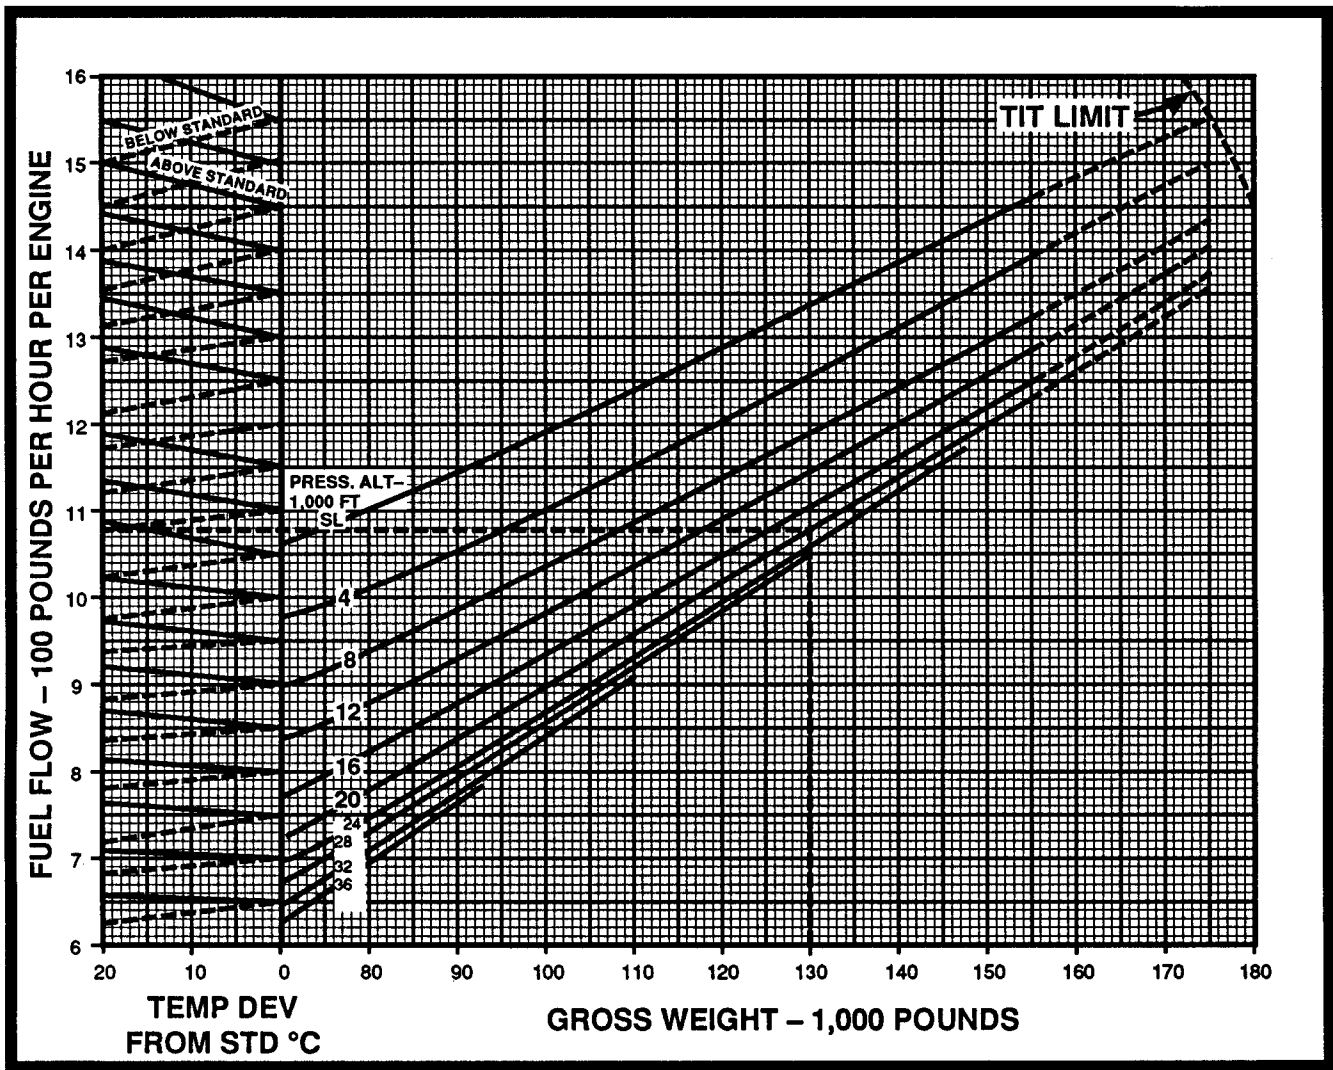


FIGURE 47.—Gross Weight Table.

OPERATING CONDITIONS		1	2	3
TAKEOFF WEIGHT		113,000	106,000	110,500
ORIGINAL CG -	%MAC	20.5	33.5	19.9
LENGTH OF MAC		168.7	168.7	168.7
LEMAC		545.9	545.9	545.9
AFFECTED CG LIMIT	%MAC	22.0	32.0	21.8
CARGO LOCATIONS	FWD	313.0	313.0	313.0
	AFT	885.0	885.0	885.0

FIGURE 48.—Cargo Shift Conditions.

OPERATING CONDITIONS	1	2	3
BASIC OPERATING WEIGHT	61,300	59,350	63,800
MAXIMUM ZERO FUEL WEIGHT	86,000	82,500	86,000
MAXIMUM LANDING WEIGHT	95,650	95,650	95,600
MAXIMUM TAKEOFF WEIGHT	116,000	113,000	116,000
FUEL TANK LOAD	36,000	33,100	38,500
ESTIMATED FUEL BURN	27,900	10,750	20,800

FIGURE 49.—Maximum Payload Conditions.

OPERATING CONDITIONS		1	2	3
CRUISE ALTITUDE	FT	19,000	17,000	23,000
AMBIENT TEMPERATURE	°C	-13	-19	-41
WEIGHT START CRUISE	LB	105,000	110,000	115,000
CRUISE TIME	HR	3.5	3.5	2.5
DESCENT AND LANDING FUEL BURN	LB	1,350	1,200	1,550

FIGURE 50.—Landing Weight Conditions.

STD.+10 °C GROSS WEIGHT - POUNDS	PRESS ALT-1000 FT											
	25	23	21	19	17	15	13	11	9	7	5	3__
115,000				321	323	324	325	324	323	322	320	319
				4210	4440	4690	4930	5170	5410	5660	5920	6170__
110,000			322	324	326	326	327	326	325	324	322	320
			3990	4220	4460	4700	4950	5180	5420	5680	5930	6180__
105,000			325	327	328	329	328	328	327	325	323	321
			4000	4230	4470	4710	4960	5190	5440	5690	5940	6190__
100,000		327	329	330	331	331	330	329	328	326	324	322
		3780	4010	4240	4480	4720	4970	5200	5450	5700	5950	6200__
95,000	328	330	331	332	333	332	332	331	329	327	325	323
	3580	3790	4020	4250	4490	4730	4970	5200	5450	5710	5960	6200__
90,000	332	333	334	335	335	334	333	332	330	328	326	324
	3590	3800	4020	4250	4490	4730	4970	5210	5460	5710	5960	6210__
85,000	335	336	337	337	337	336	335	333	331	329	327	325
	3600	3800	4030	4250	4500	4730	4980	5220	5470	5720	5970	6210__
80,000 *	338	339	339	339	338	337	336	334	332	330	328	325
**	3600	3800	4030	4260	4500	4740	4980	5220	5470	5730	5970	6220__

STD. DAY GROSS WEIGHT - POUNDS	PRESS ALT-1000 FT											
	25	23	21	19	17	15	13	11	9	7	5	3__
115,000			331	333	335	335	336	335	333	332	331	329
			4280	4430	4800	5050	5320	5590	5850	6100	6400	6690__
110,000		331	334	336	337	337	337	336	335	334	332	330
		4060	4290	4540	4800	5050	5320	5600	5870	6110	6410	6700__
105,000	331	335	337	338	339	339	339	338	336	335	333	331
	3840	4070	4290	4540	4810	5060	5330	5600	5880	6120	6420	6710__
100,000	335	338	340	340	341	341	340	339	338	336	334	332
	3850	4080	4300	4550	4810	5070	5330	5610	5890	6130	6430	6710__
95,000	339	341	342	342	343	342	341	340	338	337	335	333
	3850	4080	4310	4550	4820	5070	5340	5610	5890	6140	6440	6720__
90,000	342	343	344	344	344	343	342	341	340	338	336	333
	3860	4090	4320	4560	4820	5080	5340	5620	5900	6150	6450	6730__
85,000	344	345	346	346	346	345	343	342	340	339	336	334
	3870	4090	4320	4570	4830	5080	5350	5620	5910	6150	6450	6740__
80,000 *	348	348	348	348	347	346	345	343	341	339	337	335
**	3880	4100	4330	4570	4830	5090	5350	5630	5910	6160	6460	6740__

STD.-10 °C GROSS WEIGHT - POUNDS	PRESS ALT-1000 FT											
	25	23	21	19	17	15	13	11	9	7	5	3__
115,000		338	341	343	344	344	344	343	343	342	340	333
		4340	4620	4890	5170	5450	5740	6030	6320	6620	6920	7030__
110,000	338	341	344	345	346	346	346	345	344	343	341	333
	4070	4350	4630	4900	5180	5460	5750	6040	6330	6630	6930	7000__
105,000	342	345	346	347	347	347	347	346	345	344	342	333
	4080	4360	4640	4910	5190	5470	5760	6050	6340	6640	6940	6980__
100,000	345	347	349	349	349	349	348	347	346	345	343	333
	4090	4370	4650	4920	5200	5480	5770	6060	6340	6640	6940	6960__
95,000	348	350	351	351	351	350	350	348	347	346	343	333
	4100	4380	4650	4920	5210	5480	5770	6060	6350	6650	6920	6940__
90,000	350	352	353	353	352	352	351	335	348	347	343	333
	4110	4380	4660	4930	5210	5490	5780	6060	6350	6650	6900	6930__
85,000	353	354	355	355	354	353	352	350	349	347	343	333
	4120	4380	4660	4930	5220	5500	5780	6060	6360	6660	6880	6910__
80,000 *	355	356	356	356	355	354	353	351	350	348	343	333
**	4120	4390	4660	4930	5220	5500	5780	6060	6360	6660	6870	6900__

\*True Airspeed - Knots  
 \*\*Four Engine Fuel Flow - lb/hr

FIGURE 51.—Cruise Chart.



OPERATING CONDITIONS	1	2	3
BASIC OPERATING WEIGHT	58,000	57,700	58,750
MAXIMUM ZERO FUEL WEIGHT	83,200	83,200	83,200
MAXIMUM LANDING WEIGHT	88,200	88,200	88,200
MAXIMUM TAKEOFF WEIGHT	103,000	103,000	103,000
FUEL TANK LOAD	23,500	19,200	17,000
ESTIMATED FUEL BURN	17,625	16,700	8,050

FIGURE 52.—Maximum Payload Conditions.

OPERATING CONDITIONS	1	2	3
TAKEOFF WEIGHT	103,000	98,200	88,200
ORIGINAL CG                      % MAC	10.4	34.5	9.5
AFFECTED CG LIMIT              % MAC	11.0	33.0	11.0
MAC 163.6, LEMAC 395.2, FWD CARGO 185.0, AFT CARGO 715.0			

FIGURE 53.—Cargo Shift Conditions.