


South Jetty Interim Repairs

(Public Information Meeting – 23 Mar 06)




Agenda


- Overview
 - Emergency Breach Response Plan
 - South Jetty Interim Repairs
 - MCR Rehabilitation Study
- Contractor Work Plan
- Public Safety & Access
- Public Information Plan

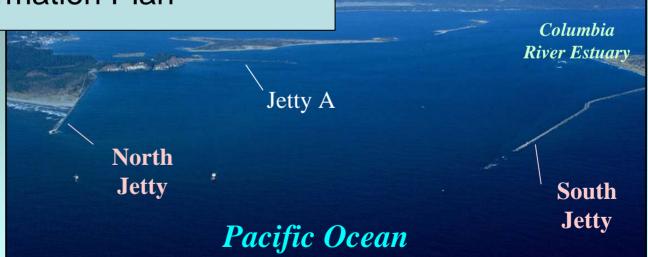

Emergency Breach Response Plan

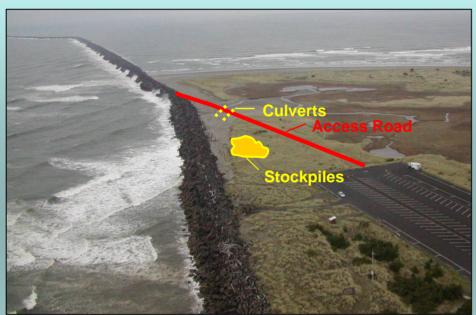

- 20% probability of breach
- Risks & Impacts
 - navigation
 - jetty deterioration
 - > repair costs
- Develop breach response plan
 - Award in Jan 06
 - Response period, Jan Apr 06
 - Construct road/ramp
- Value-added to SJ I/R contract



South Jetty Interim Repairs

- Interim Repairs → 10 to 15 years
- Awarded Feb 06
- Cost: \$11.4M w/ ~ \$8M options
- 2-yr contract, complete in Oct 07
- Place ~ 130,000 tons stone




Severely

Degraded

Areas

MCR Rehab Study

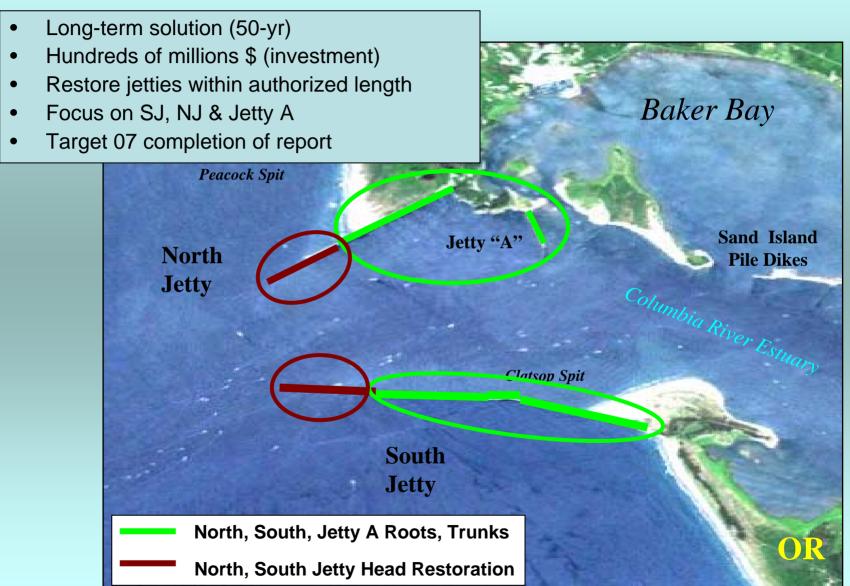

Contractor Work Plan

- Schedule:
 - Mob & Start Hauling: Apr 06
 - Repair Jetty
 - Inland Reach, 2006: May Oct
 - Ocean Reach, 2007: May Oct
- Shifts:
 - Hauling, M-F, 7am-7pm
 - Jetty Repairs, M-Sat, weather dependant
- Equipment
 - Trucks (hauling), off-road end dumps, crane, excavator, dozer
- Haul Routes
 - See Maps

Haul Routes – Jetty Stone



Haul Routes - Chink & Quarry Run



Public Safety & Access



- Public access to:
 - Ft. Stevens SP, incl. Lot "C"
 - Viewing tower
 - All bike/pedestrian trails
- Public access prohibited:
 - River beach via Lot C
 - Jetty beyond viewing tower
- Safety Plan/Information
 - Corps, Ktr and SP will develop comprehensive safety plan
 - Info flyers at Lot C

Public Communication Plan

Portland District, PAO, 503-808-4510 www.nwp.usace.army.mil/issues/jetty

- Radio
- Newspaper
- Information flyers
- Poster board
- Websites
- Outreach



