U.S. Department of Transportation United States Coast Guard

Commandant United States Coast Guard 2100 Second Street, S.W. Washington, DC 20593-0001 (202)426-9568

> COMDTINST M16466.2 12 MAR 1980

COMMANDANT INSTRUCTION M16466.2 Subj: Oil Pollution Response Planning Guide for Extreme Weather, publication transmittal

- 1. <u>PURPOSE</u>. This Instruction transmits the subject publication to provide district staff elements and On-Scene Coordinator's (OSC) with information and guidance useful in developing action and contingency plans for conducting oil pollution response operations open water.
- 2. <u>DISCUSSION</u>. The guide considers two general categories of response operations at sea:
  - a. Prevention of (further) spillage from tanker and other vessel casualties.
  - b. Oil spill mitigation and cleanup.
- 3. ACTION.
  - a. District Commanders shall implement the guidance contained herein and revise Regional Contingency Plans accordingly.
  - b. On-Scene Coordinators shall implement the guidance contained herein and revise Local Contingency Plans accordingly.

/s/ W. E. Caldwell

Encl: (1) Oil Pollution Response Planning Guide for Extreme Weather

## 1.0 INTRODUCTION

This Guide is intended to provide the On-Scene Coordinator (OSC) with information and guidance useful in developing action plans and contingency plans for conducting oil pollution response operations in open water. The Guide considers two general categories of response operations at sea:

- Prevention of (further) spillage from tanker and other vessel casualties.
- 2. Oil Spill mitigation and cleanup.

The following types of information are presented in the guide:

- 1. Outlines for Action Plans.
- 2. Planning guidance.
- 3. Requirements for initial casualty assessment.
- 4. Roles of ship's Master, Salvor, other key personnel.
- 5. Description of response system and equipment options.
- 6. Data needs for use in selecting appropriate response approach.
- 7. Selection criteria for deciding between alternative response approaches.
- 8. Checklists for various types of the response operations.
- 9. Sources for additional information.

Background is provided on state-of-the-art (SOA) techniques and system that can be employed in pollution response situations. This document also provides a decision-making guide in certain cases for selecting the preferred approach in view of the sea state, casualty parameters, and other environmental conditions. The examples given and the criteria stated may be combination of parameters that may be encountered in actual operations. Therefore, the action of the OSC must be based on the actual conditions that exist, or that are expected to exist within the time frame of the response operation. Likewise, no hard and fast rules exist on how to deploy and operate the various systems discussed. In many cases the details of the possible system components are unknown at this time (tow vessels, receiving and other containers, mooring systems, etc.), and procedures for integrating the components into efficient systems have not been developed. The OSC must determine what is available to him in the event of an emergency, and probably develop some of his own methods for using them. The Strike Teams and the U.S. Navy Supervisor of Salvage (SUPSALV) can be valuable in assisting the OSC in this area, and practice operations should be undertaken whenever possible. Cleanup contractors in some cases, as well as operators of nearby Navy oil spill cleanup equipment, can also be helpful in establishing satisfactory procedures.

Although this Guide summarizes many of the considerations in responding to real or potential oil spill incidents, it will not ensure the OSC of making the correct response decision in all cases. This Guide does not provide a cookbook approach to handling a pollution incident, and it is not a handbook of pollution response details to pull out and use only when an incident occurs. It will be most valuable as a planning tool, presenting items that an OSC should consider in the event of an incident, and general approaches to planning operations and making basic decisions. Many of these decisions should also incorporate the advice of other people, such as salvors, equipment operators, EPA and other government regulatory officials, Strike Team members, and other pollution experts.

As new response systems become available, this Guide should be updated to include discussions of these systems, and an effort should be made to evaluate their sea state and weather capabilities with respect to existing systems. New information on the capabilities of existing systems should also be factored into periodic updatings. Unfortunately, operating or test data are lacking or are subject to various interpretations in many of the existing approaches considered, and therefore, the extremes in the system capabilities discussed in this Guide represent more engineering and operational judgements than actual operating experience. (1) Realistic appraisals of system performance, on the part of the users and developers or manufacturers, will be to everyone's benefit in oil pollution response planning and operation.

# 2.0 GENERAL

This section deals with general considerations in planning for an open-water, high-sea-state oil pollution response operation, whether it be an actual spill, or a potential spill involving a stricken oil carrier. Topics covered include:

- . Action Plans
- . Extreme weather effects
- . Time Plans
- . Initial assessment of casualty situations
- . Information sources

#### 2.1 Action Plans

Plans to deal with spills or potential spills at specific locations within the OSC's area of responsibility should be included in local contingency plans as directed by COMDTINST 16465.10. These Action Plans should anticipate the probable types of incidents and the areas that should be protected in the event of a spill. They should also outline the steps that should be taken to combat a hypothetical spill at this location.

The purpose of Action Plans is to minimize the delays involved in planning and executing control and cleanup operations when an accident does occur. Although no individual plan can hope to anticipate all aspects of a situation, by careful examination of prevailing environmental conditions (by season), location of environmentally sensitive areas, and examination of potential accident sites, much can be done to increase the probability of achieving a successful response with minimal time delay.

No format is specified for Action Plans, although several types of information should be included, and some common procedures can be practiced. An example of the information types and common procedures that can be included in an Action Plan is given in Table 2.1. To avoid unnecessary duplication, specific Action

## TABLE 2.1 ACTION PLAN GUIDELINES

- 1. Region covered by specific plan
- 2. Type(s) of pollution incidents covered in this plan
  - Passive responses likely to be required (booming of sensitive areas, booming around stricken vessel, booming around shoreside discharge point, etc.)
  - b. Active responses likely to be required (skimming, beach cleanup for un-boomed areas, casualty vessel off-loading, etc.)
- 3. Location(s) of pollution incident likely accident areas, etc.
- 4. Sensitive areas requiring protection primary, secondary.
- Prevailing environmental conditions (by season winds, currents, etc.) at all locations of interest.
- 6. Probable effects on sensitive areas from accidents at specific locations

   matrix format (resource location va. accident location, for various seasons if significant, andfor various accident types or magnitudes).
   Based on probable combinations of accidents and sensitive area locations, estimate:
  - a. Time available to establish protection of sensitive areas
  - b. Most effective command post locations primary, secondary
  - c. Equipment and personnel needs
  - d. Location of nearest sources of required containment/control equipment, boats, and personnel (including commercial and other governmental sources)
  - e. Location of most suitable mobilization and deployment sites
  - f. Tentative booming plans for initial protection of sensitive areas
- 7. Initial response procedures
  - a. Upon notification of an actual or impending casualty:
    - . Make required notifications and establish lines of communications (see local contingency plans include polluter, owner, etc.)
    - . Make on-site assessment of the situation utilize consultants, if necessary Prepare to assume command of the incident
    - . Commence monitoring the situation
    - c. If command of the incident is assumed (or is imminent) the following steps should be taken; not necessarily in this order:

TABLE 2.1 (Continued)

- . Review status of personnel, equipment, and systems available to be deployed to the scene (military and commercial).
- . Review alternative courses of action based on continuing assessment and preplanned responses.
- . Make decision on course of action, including location of command post, mobilization/deployment sites, and initial allocation of response resources.
- c. Upon selecting the course of action to be taken, perform the following actions, not necessarily in this order:
  - . Mobilize and deploy government and contractor equipment.
  - . Arrange for emergency charters of appropriate floating plant (barges, tugs, etc.), aircraft, etc.
  - . Establish a command post to include the functions called for in the local contingency plans and pollution response bill.
  - . Prepare and carry out operations orders, as required.
  - . Perform other functions, as necessary.

Plans should minimize the amount of information already contained in local Contingency Plans. See enclosure (14) to COMDTINST 16465.10 for guidance in developing the inputs to Action Plans.

Both "active" and "passive" responses should be included in Action Plans. "Active responses" are defined as those in which an effort is made to remove the pollutant from the environment before it reaches sensitive areas. "Passive responses" are defined as those in which a sensitive area is protected from pollution damage by booming off the area. Obviously, in the presence of a spill both types of action may be required. Active responses may involve booming to contain the spread of oil and aid in skimming before shore areas are affected. Active responses for slick control may also include slick dispersion, in-situ burning, and other techniques discussed in Section 4 of this Guide. An active response that is not discussed is beach cleanup, where existing methods involving intensive manual labor must be applied.

In the event of a vessel casualty where there is a potential for stopping or preventing spillage, active response may involve pumping the cargo or bunkers to other tanks or another vessel jettisoning cargo (to save the bulk of the cargo from spilling), or other techniques to be discussed in Section 3. In this case, a passive response may involve booming around the casualty to contain any oil spilled during transfer operations.

Most elements of Action Plans will depend on the local situation and conditions, and on the equipment locally available. However, where major pollution incidents are possible, such as in areas of open water and heavy tanker or barge traffic, and.or where extreme weather conditions exist, plans should reach beyond local sources to include Strike Teams, Navy Supervisor of Salvage (SUPSALV), and commercial operators of specialized equipment. One of the purposes of this Guide is to provide background information on the types of response approaches and equipment that may be considered for emergency use, especially in extreme weather, but which may not be available locally.

Where it is feasible, Action Plans should include Time Plans (See Section 2.3) that indicate the scheduling problems, key events, and potential bottlenecks that can occur in carrying out a response operation. Time Plans, when compared with the time available to respond (before sever damage is done), will help to determine whether or not a particular response method is worth using in the case at hand. Example Time Plans are presented for several response approaches in Sections 3 and 4.

Checklists will also be valuable in ensuring preparedness for utilizing a particular approach. These lists indicate the important information that must be on hand or quickly obtainable before decisions are made, the equipment selections that have to be made, sub-plans for carrying out specific operations within the scope of the overall response method, and contingency plans in case of failure of the principal approach.

# 2.2 Effect of Weather on General Pollution Response Operations

Bad weather can halt or delay any type of response operation. In the case of small spills the failure of a response operation because of bad weather can usually be tolerated if the ensuing cleanup operation is not too difficult. Where spills are large, or potentially large, the effects of bad weather can be far more serious, and the problems of dealing with or working around the weather should be given special attention. Providing guidance for dealing with the weather problem is one of the aims of this Guide.

Generally, the most difficult problem imposed by bad weather is the wave conditions (Sea State) generated in open water. High waves will make most boom and skimming devices ineffective. Waves and wind can cause difficulty in off-loading casualty vessels, as well as threatening the remaining integrity of the casualty. Sea states, for purposes of this Guide, are defined by significant wave height (H(1/3)) ranges, as shown in Table 2.2, for fully-developed, winddriven seas (see also Reference 2). The term "extreme weather" will be used to refer to Sea State 4 and above. Other aspects of bad weather, such as cold, precipitation, wind, etc., can also reduce the effectiveness of pollution responses, but these can usually be dealt with in conventional ways not unique to open water situations.

# TABLE 2.2. SIGNIFICANT WAVE HEIGHT RANGES FOR VARIOUS SEA STATES

<u>Sea State</u>	Range of H (1/3') feet
0	0 - 0.1
1	0.1 - 1.2
2	1.2 - 3.1
3	3.1 - 5.4
4	5.4 - 7.5
5	7.5- 12.5
6	12.5 - 20.0

In extended operations where the weather could be a problem, the equipment selected for use in response operations should be capable of operating, or at least surviving, in the sea conditions anticipated. In an actual response operation, updated local weather forecasts should be obtained continuously. Navy meteorologists and the National Weather Service can provide this information. The OSC may access information from Navy meteorologists via the Regional Response Team. Private (commercial) weather forecasting services can also be utilized. For planning purposes, statistical information is available on the persistence of favorable or unfavorable seas at various points along the U.S. coastline. ((3)) The operating limits for equipment and systems are estimated in later sections.

## 2.3 Time Plans

The Time Plans referred to in Section 2.1 can be prepared as time-line diagrams similar to Critical Path Method (CPM) or PERT charts. Examples are shown throughout the Guide for specific response methods. Although other methods of estimating response time requirements can be used, the time-line approach has several advantages:

- a. The interrelationship of all of the significant steps in performing the response can be shown.
- b. Steps that must be completed before subsequent steps can be taken are indicated.
- c. After the estimated times to complete the steps are placed on the diagram, a "critical path" can be mapped, indicating the sequence that requires the greatest total time to complete the response. Ways to reduce the time requirements along the critical path steps cab then be investigated. (Note: The length of the step line or its location on the page has no significance.)
- d. Changes in the critical path can be determined if variations or ranges for the time estimate for various steps are assumed.
- e. Any degree of complexity can be used in the diagram. However, because of the number of variables involved in a typical response operation, a relatively simple diagram is recommended for planning purposes, showing only the major steps.
- Progress during an actual operation can be monitored with the aid of this type of time plan.

The Time Plan examples shown in the response examples are based on a representative scenario, which is described in Table 2.3. The times shown are only rough estimates. For example, if tugs and barges are readily available near the site of an anticipated casualty, a relatively short response time could be utilized, based on actual estimates by the owner/operator. Sequences of events and special approaches should also be based on what the OSC determine will function best in his area of responsibility.

## 2.4 Initial Assessment of Casualty Situation

A rapid and thorough assessment of the casualty situation or spill is necessary in order to aid in initial decision making. The assessment should generally include determination of the casualty type, casualty vessel characteristics, oil characteristics (cargo data), damage estimate, and environmental data.

### TABLE 2.3

#### SCENARIOS FOR EXAMPLE TIME PLAN DIAGRAMS

For a grounded tanker that is leaking oil:

- 1. Oil Visocity: Medium crude 30 cs (0.87 s.g.)
- 2. Sea Conditions: Operate: 19 knot wind, H(1/3) = 6.9 ft. Survive: 29 knot wind, H(1/3) = 15.7 ft.
- 3. Oil Quantity: 100,000-DWT Tanker
- 4. Other Casualty Features:
  - . Location: 25 miles offshore, 50 miles from nearest staging area, 200 miles from nearest major supply center.
  - . Vessel grounded holed and leaking speed at grounding approx. 8 knots.
  - . Vessel power systems inoperative
  - . List 10
  - . Trim negligible
- 5. Oil leakage Rate: 1000 gpm average outflow rate
- 6. Slick features:
  - . At 1 mile from source: thin slick, 2000 ft. wide, with thickness 0.03 mm; 400 ft. wide windrow in center of slick, containing elongated oil pancakes 5 mm thick and 100x200 ft. in area (90% of oil).
  - . Wind/wave driven slick velocity 0.7 kts, in addition to tidal current of 2 kts. max.

# 7. Other Environmental Features;

- . Diurnal tidal current of 2 kts maximum
- . Tide range is 3 ft.
- . Sea Temperature 4 C
- . Air Temperature OC
- . Intermittent precipitation
- . Minimal debris present

This information will be useful to the salvor as well as the OSC and his staff. The information must be collected and reported rapidly and accurately. Some information can be obtained through a phone patch with the ship's Master, (8) but the fullest information cannot be obtained this way.

Response personnel conducting the assessment should be thoroughly trained in the techniques required. Several types of personnel may be called upon to perform this function, such as:

- . Officer from the Marine Safety Office (MSO) or the Captain of the Port (COTP), delivered by helicopter. This person is likely to be the first person on board the stricken vessel, other than the ship's Master and crew.
- . A knowledgeable MSO/Marine Inspection Office (MIO) inspector. This person should be immediately dispatched to the casualty even though intervention has not taken place.
- . Strike Team personnel. However, to wait for a Strike Team may take too long.
- . Search and Rescue (SAR) vessel Damage Control Officer. Such a vessel may not be nearby, however.

Table 2.4 presents a listing of assessment items that could be important in a casualty situation. Not every item would be significant in every likely response approach; however, having all of the information available will aid in evaluating alternative responses. The information should be relayed to the OSC as it is developed. As the casualty situation changes, either because of changing environment conditions or through progression of the response operation, the situation should be reassessed, and updated information should be relayed to the OSC.

# 2.5 Other Information Sources

Each casualty situation can be expected to differ in some way from any others, and the OSC will probably require outside assistance in dealing with a potential vessel spill situation. Some of the more important inputs to come from outside the Coast Guard chain of command will include:

I NF ORMAT I ON	PURPOSE	SOURCE	COMMENTS
CASUALTY (SHIP) SITUATION			
<u>Casualty Type</u>	General information	Ship's Master	Language barrier is a problem
<u>Vessel Data</u>			
Type of vessel	Mainly for salvage con- siderations (Appendices C & D)	Ship's drawings/data	Builder/owner may have additional information
Length	Ŧ	=	
Beam	I	£	
<b>Draft (actual, before damage)</b>	Ξ	Ship's log	Accuracy may be questionable
Freeboard (actual, before damage)	2	= ,	Ξ
Irim (actual, before damage)	Ξ	=	=
Structural details	-	Ship's drawings/data	Builder/owner may have additional information
Air pressure capacity of tank tops	Ŧ	÷	=
Tank/piping layout	Ŧ	=	
Pump location/performance features (head, capacity)	<del>.</del>	z	
Type/location of auxiliary power	:	Ŧ	
Hoses, emergency gear on hand	Salvage/pump-off considerations	Crew	
Hydrostatic data			
Tons per inch immersion (IPI)	Ground reaction/Salvage calculations	Ship's records/ calculations	Check builder/owner
Moment to change trim one inch (MIT)	Estimates, grounding point	Ŧ	
Damage stability curves	Damage estimates/salvage calculations	-	2
Tank capacities as function of trim/list and depth or ullage	Estimating losses	Ship's data	

TABLE 2.4. CASUALTY SITUATION AND SPILL ASSESSMENT

COMMENTS		Bad weather may make sampling hazardous or difficult		Loss of power can cause tem- perature drop	Increases with temperature drop						Difficult and unsafe in bad weather	Waves need to be compensated (electrical wave gauge)	Bow or stern decks could be awash		May vary if vessel shifts with waves on the strand	
SOURCE		Ship log/sampling	Ship's log	Measurement	Data/Measurement	Data/Measurement	Ship's Log	-	Ship's log/CliRIS data/HACS		<ol> <li>Visual waterline marks</li> <li>Freeboard measurements</li> </ol>			Gauges on vessel	-	Direct measurement, probably by crew
PURPOSE		Help in confirming properties (Appendix E)	Estimate of loss; salvage calculations	Help in confirming viscosity	For pumping calculations	For salvage calculations	Estimate of loss; salvage calculations	Estimate of loss; salvage calculations	For protective equipment requirements, precautions		Determine grounding point and force (Appendix D)			Aid in determining grounding point, degree of damage and tank contents	÷	Determine change in cargo, volume, and therefore damage indication
INFORMATION	Data on Cargo (Tankers), Fuel Oil, and/or Lube Oil	Oil type in each tank	Initial Quantity in each tank	Tenperature	Viscosity	Density	Initial liquid depth	Initial Ullage	Hazardous properties	Dawage Estimate	Actual drafts upon grounding			Trim	List	Ullage in all tanks (or depth of liquid)

TABLE 2.4. (Cont'd)

COMMENTS	Gauges may not be readily available	Change divided by time interval gives approximate rate				Measurements wust be continued	uuring salvage operations									Difficult to ascertain in rough weather. Diver inspection probably required.	Ship can change position
SOURCE	Thieving paste, electronic gauges	Direct measurements at time intervals		<ol> <li>Deductions from other measure- ments and calculations</li> </ol>	<ol> <li>Taut line from bow to pilot house</li> </ol>	2) Strain gauges	<ol><li>Deck wrinkle</li></ol>	4) Paint Distortion		Inspection by crew "	-		: 2	Estimate (calculation)/diver inspection	•	Inspection - probably underwater	Direct observations
PURPOSE	Determining which tanks have damage (including piping),and degree of oil loss and water intrusion	Indicates leakage or ingression rate	Salvage input, determining which tanks to pump off first		Indicates load condition on ship and degree of stress/	components				Planning response "	=			Salvage planning	-	Indicates type of salvage approach required	Planning salvage-type operations
INFORMATION	Depth of oil/water interface (if any)	Rate of level change	Location of breached tanks, or tanks with damaged piping		Amount of hog/sag				catus of ship's components:	Engine room and engines Emergency generator Steering gear	Cargo pumps	Piping Bilot Farrer	Inerting system	Location of grounding point	Ground reaction	Type of grounding (impalement or otherwise)	Orientation of ship (heading with respect to compass, seas, winds, current)

IABLE 2.4. (Cont'd)

	INULL CIT. VOUL U		
I NF ORMAT I ON	PURPOSE	SOURCE	COMMENTS
Size/location of holes	Planning pumping/salvage operations	Inspection/Calculations	Difficult to determine underwater
Permissable approach distance (fire, explosion, hazard, etc.)	To determine safe operating limits (Appendix A)	Overall evaluation of cargo, damage, and situation	
Environmental Data (Present and Projected, where applicable)			
Time/date of casualty	Estimating conditions at time of casualty	Crew	
Position	Affects salvage approach (Appendix F)	Crew	
Tidal cycle/height	=	Weather service, charts	
Currents	=	=	
Wind speed and direction	=	Direct observation/weather service	
Precipitation/visibility	3	*	
Temperature	Ŧ	=	
Sea conditions (sea state)	7	=	
Proximity of environmentally sensitive areas	Affects salvage cleanup approach	Contingency plans	These areas should be identified independently of any casualties
Bottom topography	May help to determine reaction force around stranded vessel	Charts/diver inspection/ soundings around vessel/ bottom samples	Most all of these sources may be necessary to determine con- ditions. Diving may be hazardous.
011 Slick Data			
0il Rate	Planning cleanup approach (Appendices B & H)	Measurement/estimation	Only an average rate can probably be determined

TABLE 2.4. (Cont'd)

	COMMENTS	May be hazardous in bad weather	I	Poor visibility of bad weather may complicate	Coast Guard oceanographic unit can provide spill trajectory forecasting	Poor visibility of bad weather may complicate	Forecasting by Coast Guard oceanographic unit	Only a gross estimate is possible	
(Cont'd)	SOURCE	Slick sampling and measurement	Direct measurement/sampling	Aerial and vessel observation	Measurement or forecasting	Aerial or vessel observation	Direct observation and trajec- tory forecasting	Estimation based on spilled and recovered amounts	Direct Observation
TABLE 2.4. (Cont'd)	PURPOSE	Planning oil cleanup and disposal	Planning cleanup approach	-	Slick trajectory prediction	Planning cleanup approach	-	Planning cleanup and estimating potential environ- mental damage	Planning cleanup approach
	INFORMATION	Oil Type (viscosity on water, amount of weathering)	Thickness	Area covered	Wind or wave driven velocity and direction	Existence of windrows, pools, etc.	Spreading and break-up of slick (description of state of slick)	Volume in slick at any time	Debris present

- . Ship's Master and owner
- . Salvor
- . Owners and operators of commercial or other government response equipment

Ship's Master and owner: The ship's Master and owner are the most knowledgeable parties regarding the vessel's cargo, equipment, and current condition. Thus, the OSC should pay particular attention to their recommendations and encourage the Master's direct participation in the casualty response. However, should the Master and the OSC disagree on a course of action, and if there is an imminent threat of a major pollution incident as a result of the casualty, the OSC may override the objections of the Master under authority of the Intervention on the High Seas Act (33 USC 1476) and the Clean Water Act Amendments of 1977, section 311 (c) (33 USC 1321). Final authority for action under the Intervention on the High Seas Act is retained by the Commandant. Guidance on the use of the Act may be found in COMDTINST 16453.1.

The Master and crew are invaluable sources of information in

a vessel-related incident, by virtue of the following:

- . They are intimately familiar with the layout and working of the vessel.
- . They should know what the events were leading to the casualty, and what actions have been taken up to the present.
- . They can be helpful in developing additional data needed for planning the pollution response and/or salvage operations.
- . The Master has access to the ship's plans and data carried on board. Also, all of the cargo information is accessible to him.
- . The crew can have initiated response operations, such as transferring cargo, etc., before anyone else has gotten involved.
- . Many subsequent response operations can be performed by, or with the assistance of, the crew, such as operating the ship's pumps and systems, etc.

One problem in dealing with the Master or crew is the

language barrier, which, with foreign crews, can result in real communications problems. Further information on the ship's Master's role during an accident at sea can be found in Reference 8.

Salvor: By the term "salvor" is meant any and all people with special knowledge and skills in the field of ship salvage and rescue towing. It is sometimes said that "Ship Masters are trained in the business of <u>keeping</u> vessels off the rocks; salvors in the business of <u>getting</u> vessels off the rocks." There is a great deal of truth in this saying and one will be wise to keep it in mind. Few ship masters have any experience at all in ship salvaging techniques.

"Salvors" in the broad sense of the term may include surveyors (though not <u>all</u> surveyors are salvage-experienced) from U.S. Salvage Association or the Salvage Association of London; specialist salvage consultants who may be dispatched by underwriters or owners to survey the situation; employees of the salvage company with whom the Ship's Master, the owners or underwriters or the Coast Guard have contracted to attend to the situation at hand; or to representatives of the Navy's Supervisor of Salvage or from the Fleet's Salvage Forces.

Two general types of information may be available from salvors-that which can best be described as "operational" or "special seamanship"; and that which is primarily "special engineering" dealing with damaged stability, residual hull strength, ground reaction and the like.

In general, two types of specialists are needed to provide the full spectrum of this information: the Salvage Master and the Salvage Engineer. A special caution is appropriate towards evaluating these information sources: just as the Ship's Master handles "normal seamanship," the Salvage Master handles "distressed seamanship." Likewise, the average naval architect/ naval engineer is seldom expert or pre-trained to handle damaged or distressed ship stability and structural matters; this is the realm of the Salvage Engineer. Rarely is the same person to be relied on for expert advice in both these general areas.

While it is a truism that no two salvage incidents are alike and that the usual salvage operation is ad hoc in nature, it will nonetheless in many cases be found that salvors have previously had to cope with similar exercises. The experience factors which they bring to the effort can be vital in either saving the distressed vessel or in mitigating pollution. Of particular note is the growing trend for tanker companies, and particularly owners/operators of vessels which carry hazardous cargoes (such as LNG; anhydrous ammonia, etc.), to have prepared special contingency plans wherein actual salvage situations have been postulated and pre-gamed. These contingency plans often include salvors who have been a part of the pre-gaming and, hence, are well "up on the step" as regards working out the problems--both operational and engineering--involved in the particular distress situation; that is, in making the salvage/pollution distress exercise less and hoc than it might otherwise have to be.

Salvors may be able to supply information such as the following:

- . Availability of salvage tugs, mooring support craft, lighters or other floating plant which may be required to commence the salvage job.
- . Availability of fire fighting personnel and equipment, as well as pollution control equipment and people.
- . Local weather and sea conditions including tide, current anomalies and sea bottom conditions as they relate to scouring and to anchor holding.
- . Evaluation of time factors to bring into play salvage forces for lightening, extraction from strand or other "real-time" evolutions.
- . Analysis of damage state of ship and evaluations of time-criticality of the situation as it may relate to jettisoning cargo; placing out moorings, ballasting down, emergency use of engines, etc.
- . Emergency Damage Control measures.
- . Analysis of hull girder strength and likelihood of ship breaking up.
- . Various options as to means to salvage--along with forces required, engineering needed, and chances of success.
- . Safety aspects of the situation.

Equipment Owners/Operators: Owners/operators of response equipment can provide useful information in the contingency planning stages and during operations. Information from these sources can usually be obtained in the areas of:

- . Equipment (pumps, salvage gear, etc.)
- . Capacities and limitations
- . Size/Weight
- . Handling provisions (helicopter deployable, etc.)
- . Availability (location, quantity on hand, time for delivery)
- . Deployment and setup recommendations
- . Operation (on contract)
- . Leasing requirements
- . Floating equipment
- . Types of vessels (workboats, barges, tugs, cranes, etc.)
- . Size/capacity (including speed, duration at sea)
- . Availability (location, number on hand, time to arrive on site)
- . Chartering requirements

In addition to direct contacts with owners/ operators, information on equipment availability can be obtained through SKIM (Spill Cleanup Equipment Inventory System). SKIM is a computer based inventory of equipment available for pollution response in the U. S. The inventory includes public equipment (USCG, USN, etc.) and equipment maintained by contractors, cooperatives, and private companies. Information may be extracted from the inventory on the basis of location, equipment type or equipment operator. The system is currently being accessed and updated by Coast Guard Marine Safety Offices using dataphone terminals. Instructions for utilizing SKIM may be found in the Marine Safety Manual, (CG-495).

Typical equipment owners/operators include such organizations as:

. Coast Guard Strike Teams: Atlantic, Gulf, and Pacific

Coast teams are available for large or unusual casualty response operations. Principal response tools are the ADAPTS pumping system, OWOCS high-seas barrier, and the skimming barrier. However, may other equipment items are available, and the Strike Team personnel are highly trained in their use. Most equipment is packaged and maintained for quick response via tractor-trailer, C-130 aircraft and helicopter.

- . U. S. Navy Supervisor of Salvage (SUPSALV): SUPSALV maintains two major equipment bases in the continental U. S. at Cheatham Annex, Virginia, and Stockton, California. Considerable quantities of oil spill control equipment are stored at both bases, principally inflatable booms (Goodyear) and Marco Class V skimmers. Many other equipment items are included, also, such as pumping equipment, heaters (Clayton boilers), mooring equipment, beach gear, and ship fenders. SUPSALV policy is to send out supervisory personnel with their oil spill control equipment, but most of the operating labor must be provided by the user. Most of the equipment is maintained in a ready-for-issue (RFI) state, but response time can be expected to be greater than that of the Strike Teams. Much equipment can be airlifted but this involves more preparation than if truck transport is used.
  - In addition to the equipment pools, SUPSALV maintains contracts with commercial organizations to conduct oil spill cleanup services and salvage operations. These organizations operate their own as well as Navy assets. These assets include salvage vessels, which could be useful in many pollution response operations. SUPSALV can be contacted at NAVSEA headquarters in Washington, D.C.
- . Various Navy commands: Various shoreside and fleet commands have specific oil spill cleanup responsibilities, which are generally implemented through contract organizations or other groups. Much of the equipment utilized is provided by the Naval Facilities Engineering Command (NAVFAC). Primarily, this equipment is designed for harbor or protected water operation.

In addition, various types of Navy vessels, such as tugs, and salvage and rescue ships, would be useful in assisting in offshore response operations. Certain tankships could also be used for off-loading or for recovered oil storage. Typical vessel characteristics are listed in Section 5.5.

- . Cleanup contractors: Cleanup contractors in the local areas usually have equipment to deal with only small protected-water spills (harbor boom, small skimmers, vacuum trucks, sorbents, etc.). However, they do have access to labor pools that can be utilized in many cases. Larger contractors may have specialized equipment that can be valuable in certain cases. Contractual arrangements, using the Coast Guard Basic Ordering Agreement (BOA), should be made in advance to ensure quick response when necessary.
- . Equipment dealers and manufacturers: Dealers and/or manufacturers may have equipment available that can be purchased quickly, but this is unlikely except for small items (small skimmers, harbor boom, etc.) suitable only for harbor use. These facilities can be monitored for equipment availability, however.
- . Spill cleanup co-ops: Several co-ops have a considerable inventory of oil spill cleanup equipment suitable for open water and in-shore use. Maintenance and operation are performed by contractors, so that a trained cadre is available to operate the equipment. In many cases the equipment on-hand is designed for use in a specific area and is not easily transportable to distant locations on a fast-response basis (large dedicated skimmers, large off-shore boom systems, barges, etc.).
- . Transportation companies: In certain areas transportation and offshore service companies can provide tugs, barges, tankships, workboats, and other vessels that could be useful in pollution response operations. Various applications of these vessels are discussed in other sections. The management of these companies can provide recommendations on the utilization of their vessels, and on limitations and other operational characteristics.

Various types of casualties fit into this category, as outlined below:

- 1. Grounding:
  - a. sand
  - b. mud
  - c. coral
  - d. rocks
  - e. impalement
    - (1) rocks
      - (2) wreckage or other structure
- 2. Collision:
  - a. between ships
  - b. with structure (bridge, nav. aid, piers, icebergs)
- 3. Hull rupture:
  - a. from external cause (other than grounding or collision)
  - b. from internal cause (structural failure hogging, sagging, corrosion, fatigue, etc.)
- 4. Fire
- 5. Explosion
- 6. Sinking
- 7. Loss of command (steering)
- 8. Flooding
- 9. Breakup in heavy seas

This guide will concentrate on the grounding cases, as groundings occur frequently and involve most of the response options that the other casualty types would. These cases usually involve the interaction of salvage personnel, pollution abatement personnel, and the ship's owners/underwriters/operator. Although the Coast Guard will be active in following any casualty situation involving potential pollution, in offshore grounding cases, especially in heavy weather, there is a good probability of having to assume command of the overall operation.

Although this Guide is oriented toward oil tanker casualties, the pollution abatement will generally apply to any other large ship casualty whose fuel oil, lube oil, and day tank contents could constitute a major oil spill threat. Frequently, the OSC will first become involved in the casualty situation through a search and rescue (SAR) mission. From this vantage point, monitoring and assessment of the situation can begin. In many cases, however, progression of a casualty incident to the SAR stage before the OSC becomes involved indicates that it is probably too late to perform certain time-critical operations, such as jettisoning, which could possibly save the ship and the bulk of the cargo. Assessment and surveillance should begin as soon as possible after any casualty occurs in which pollution could be a threat.

## 3.1 Response Guidelines for Tanker Casualties

In the event of a ship casualty, the pollution danger can be classified in two ways:


- 1. Ship is damaged and spillage is occurring
- Ship is in danger of (additional) damage that can cause spillage

In the first case the obvious solution is to stop any further spillage by one of the following approaches:

- Plug the leak (difficult-to-impossible to accomplish in time to prevent maximum leakage from the tank unless the leak is very small) (9)
- Remove the cargo from the leaking tank (store in other tanks or off-load)

In the latter case, where spillage is not occurring but may be imminent, several approaches can be taken, depending on the probability of additional damage occurring and on the magnitude of damage anticipated. The extreme case of damage would be a breakup of the ship, which can occur in heavy weather and cause spillage of the entire cargo.

Each response operation can be characterized by the length of time it takes to perform the operation, as influenced by the effects of the weather and sea conditions. Unfortunately, worsening weather and sea conditions can also shorten the time that the casualty will remain intact without further damage. Figure 3.1 indicates how these time factors interact to determine whether a particular response approach is viable or not.

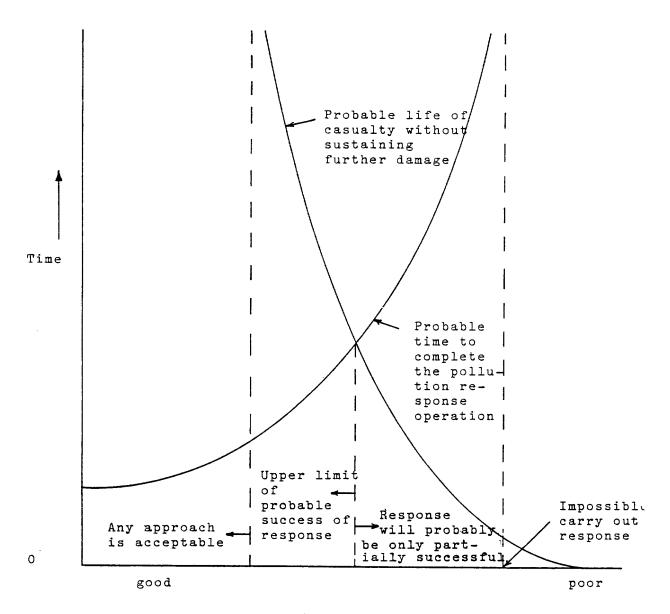




FIGURE 3.1 TIME EFFECTS ON CASUALTY LIFE AND RESPONSE APPROACH

26

The most difficult factor to estimate in FIG. 3.1 is the life of the casualty as a function of the weather. This will depend on the type of casualty, the amount of damage already sustained, the characteristics of the vessel, and certain environmental conditions (for example, sea bottom characteristics in the case of a grounding). At best, the subjective opinion of a salvor, who has examined the vessel and the information collected during the initial assessment, may provide the only realistic estimate of the remaining life as a function of the anticipated weather.

One problem with the effect of weather and sea conditions on the casualty life is that the effects can be cumulative; i.e. a series of storms can weaken the structure in successive increments resulting in eventual break-up, whereas little weakening is likely to occur during the calm periods between the storms. The same holds true for the response time, where the rate of task accomplishment may be zero during storms and proceed at maximum rate during calm. Figure 3.2 shows a simple example of these points. In this case, the vessel breaks up before the response is finished; however, 80% of the work is accomplished, resulting in only 20% cargo loss.

The conclusions that can be drawn from the above discussion are that:

- Where extended periods of bad weather are forecast, the most rapid response method available should probability be utilized.
- If relatively good weather is anticipated almost any response approach can be utilized successfully, depending on the casualty type, and elimination of all pollution should be attempted.

## 3.2 Response Alternatives

The response alternatives can take several general approaches as outlined below:

- 1. Save the ship first, thereby containing the cargo
- 2. Save the cargo first and deal with the empty ship later

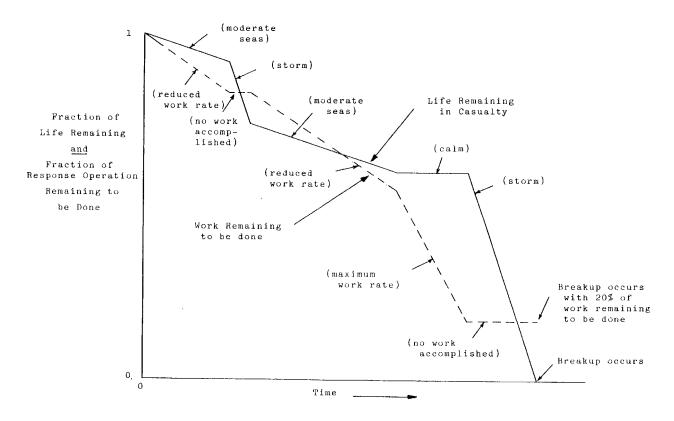


FIGURE 3.2 EXAMPLE OF CUMULATIVE EFFECTS OF RESPONSE TIME AND CASUALTY LIFE

- 3. Destroy the cargo while it is still on the ship, and deal with the ship later.
- 4. Destroy the ship and cargo.

Depending on the casualty type, one or more of these approaches could be pursued. For an all around best approach, the first alternative is preferred, as both the vessel and cargo are saved, and minimum handling of the cargo is required. The second alternative can have the same and result as the first (both cargo and ship saved), and it may be the only viable alternative in many cases (groundings). The third alternative only attempts to minimize pollution, probability destroying the vessel in the process (burning), and is only recommended as a last resort. The fourth alternative infers sinking the ship in deep water with cargo aboard (probably burning) and can only be done with a floating casualty. This action is usually the result of not being able to do anything else other than towing the casualty away from sensitive areas where its ultimate breakup will cause the least amount of environment harm. In general, as much cargo off-loading as can be safely performed should be done before a ship is sunk. By closing off openings on the cargo and fuel tanks the risk of subsequent leakage may undertaking on a burning ship or on one in imminent danger of sinking.

Specific techniques applicable to each of the first three general approaches are listed below:

- 1. Save the ship
  - a. Strandings
    - . Shift cargo to empty tanks and pull the ship off the strand
      - . Portable pumps
      - . Ships pumps (if operable)
    - . Pump part of cargo to flaring burner (portable pumps), and pull off strand

- . Pump part of cargo to another vessel and pull the ship off the strand
  - . Portable pumps
  - . Ship's pumps (if operable)
- . Jettison part of cargo
- . Gel the cargo in vulnerable tanks
- b. Collision, hull rupture, explosion
  - . Shift cargo from damaged ranks to sound tanks
    - . Portable pumps
    - . Ship's pump (if operable)
  - . Pump part of the cargo to other vessels
    - . Portable pumps
    - . Ship's pumps (if operable)
  - . Gel the cargo in vulnerable tanks
- 2. Save the cargo first, then deal with the vessel
  - Off-load <u>all</u> cargo to barges, tankships, portable containers
    - . Ship's pumps (if operable)
    - . Portable pumps
- 3. Destroy the remaining cargo
  - a. Bomb the vessel and burn the cargo in-situ
  - b. Use explosives to open up the vessel and burn the cargo in-situ

Note that the principal difference between approach 1 and 2 as far as off-loading is concerned is that <u>all</u> of the cargo is removed in approach 2, but only <u>part</u> of the cargo (enough to permit) towing the ship) is removed in approach 1. Approach 2 would apply more to cases in which the ship is badly damaged and/or a major salvage job would be required before she could be moved. In general, if rough weather is anticipated, it is best to refloat the vessel as soon as possible and then tow it to calm water for further off-loading. Many ports and harbors would be adverse to permitting a damaged but laden tanker to enter their jurisdictions, and the problem of finding a safe haven can be a problem. This problem should be addressed during contingency planning. In any particular situation, some of the above techniques may not be feasible, because the time required to perform then in the anticipated weather conditions may be greater than the life expectancy of the casualty.

A summary of the estimated sea state working ranges or limits for the state-of-the-art response approaches discussed later appears in Table 3.1. The potential for success of each approach is noted as good, fair, or poor depending on the sea state existing during operations. These ratings were arrived at by engineering judgements and are at best subjective.

## 3.3 Response System Descriptions

In the following sections, description of the approaches are given, the showing Time Plan diagram that may be used to estimate the response time requirements for specific areas, and providing decision diagrams for deciding if the approach is feasible. Of the feasible approaches, the ones that in the opinion of the OSC, best meet the priorities below should be considered for implementation:

- 1. Low pollution risk
- 2. Low risk to personnel and response equipment
- 3. Fast response time
- 4. Low risk to casualty vessel
- Low overall cost (including hull and cargo value and beach cleanup costs)

Details of specific equipment items and support systems are presented in Section 5.

TABLE 3.1 SEA STATE OPERATIONAL LIMITS FOR RESPONSE APPROACHES

RESPONSE APPROACHES	-	ç	SEA STATE	V	ſ	بو
Jettison-ship's pump portable pumps	good annd	good good	poog	good fair	good fair	good poor
Stabilize the vessel with seawater ballast and moorings for delayed off-loading	good	good	good	good	fair	poor- fair
Stabilize the vessel with moorings for off-loading in existing conditions	good	рооб	рооб	good	fair- good	poor- fair
Off-load caryo without stabilization	good	fair- good	poor- fair			
Burn cargo in tank by bombing	good	fair	poor- fair			
Burn carqo in tank by planting explosives	poof	fair	poor- fair			
Cut up the vessel for towing	fair	poor				

# 3.3.1

Approach: Off-load Cargo to a Receiving Vessel

# A. Applications

- 1. Change trim or list and lighten vessel to remove from strand.
- Remove cargo from holed or damaged tanks, or from tanks where failure is imminent.

# B. Description of Approach

- 1. The following components are required:
  - a. Pumping system: If the ship's pumps are operable, and piping or any on-board hoses will permit, this equipment should be utilized. Otherwise, ADAPTS or similar high-capacity portable pumps will be required (see Section 5.1).
  - b. Salvage vessel: In the case of a grounding, one or more salvage vessels should be available to take the vessel in tow upon freeing. These vessels may also be used to assist in the actual freeing operation if beach gear is employed. Salvors should be consulted for utilization of beach gear and salvage vessels.
  - c. Receiving (lightening) vessels for off-loaded oil: A variety of receiving vessels can be utilized, ranging in size from barges or tankships to flexible (rubber or plastic) towable containers (see Section 5.4). The size should be compatible with the amount of cargo to be off-loaded, to minimize the number of transfer operations required. A small draft may be required for grounding cases. Extra hoses may be required, also.
  - d. Fenders to place between the casualty and the receiving vessel: Either foam-filled or pneumatic rubber floating fenders can be used. Foam-filled fenders offer the advantage that they will not lose their energy absorption capacity if punctured by a damaged casualty. Usually three or more fenders are required. The size should be selected according to the size of the vessel involved.

- 2. In a grounding case, determine the ground reaction, the point of stranding, the change in trim and displacement required to reduce the ground reaction sufficiently to free the ship, the amount of cargo to be shifted, and and from where the cargo should be removed. See Appendix D for typical grounding calculations and examples. The input data can be obtained from the casualty assessment step.
- 3. Determine the number of pumping systems and receivers required. Procure the necessary equipment.
- 4. Bring receiving vessel and fenders alongside and secure.
- Prepare salvage ships with beach gear for pulling (if necessary) and initial towing (grounding situation). The vessel should be taken in tow when propulsion or steering systems are inoperable in cases other than groundings.
- 6. Off-load the cargo. Time the operations so that the ship can be pulled off at high tide in grounding situations.

## C. Variations on Basic Approach

- 1. In a grounding situation, to minimize working of the hull on the strand while the ship is light, the oil off-loading can be accompanied by equivalent ballasting with sea water to keep the ship heavy. After the oil is safely removed, the ballast water can then be pumped rapidly overboard using all available pumping capacity to free the ship at the proper time (high tide). This approach is especially recommended in rough seas or when all of the cargo is to be off-loaded.
- 2. If a grounding is not too severe, or if only one or two tanks are leaking in a non-grounding situation, it may be possible to merely shift cargo within the vessel, utilizing unused tanks, ballast tanks, ullage space, or other available spaces. Again, either ship's pumps or portable pumps may be used. Pillow tanks laid on deck may also be used if available, but vessel stability is decreased by this approach. The general calculations for changing trim by shifting cargo are given in Appendix D.
- 3. Flaring (burning) of cargo: this technique is for all practical purposes, unavailable at this time, although the Coast Guard does have a portable flaring burner system under development. In principle, the cargo would be pumped to the burner mounted on the casualty's desk, rather than to an off-loading vessel. The advantages are that no oil spill pollution would be incurred, while at the same time the need for a receiving vessel for off-loading would be avoided. However, the time requirement for on-board flaring could be much greater than for off-loading. For example, a 100,000-DWT tanker has

a pumping system capable of discharging on the order of 50,000 gpm, while a state-of-the-art flaring system (of the type used for testing offshore oil wells) has a maximum capacity of less than 500 gpm -- factor of 100 differences. Even a single ADAPTS pump has a capacity three times that of a flaring burner. In addition to the problem of slow burning rates, a considerable mobilization and setup time would be required, with bad weather compounding the difficulties. After emergency flaring systems become available, their use will probably be limited to small tankships and barges. Consideration should be given to flaring cargo when a suitable lightening vessel is not available, particularly if only one or two leaking tanks are to be off-loaded.

- 4. Pressurizing a breached tank with air is a technique commonly used for displacing water to lighten a vessel during salvage operations. The deck openings must be sealed, and the allowable pressure that can be applied to the tank must be known. If cargo is displaced, the technique becomes a form of jettisoning. Air pressure can also be used for off-loading cargo through the ship's piping if the tanks are sound. However, the pressure required to force the oil from even a nearly full tank up to the deck piping could endanger the structural integrity of the tank (maximum pressure on the order of 4 to 6 psig). Pressure drop in the transfer piping and hoses requires additional pressure in the tank, thus limiting the applicability of the technique to a relatively small amount and rate of offloading. Portable air compressors are common, and the smaller sizes could be transported by helicopter to the casualty.
- 5. The use of water pumped into the tank to displace oil is similar to the technique discussed in 4. above. This approach suffers from the same over-pressure problem, although in this case the pressure on the tank top does not change as the oil is displaced. However, a tank top opening into the piping system is required, which is normally no available on tankers, and any unsecured openings will leak oil and not air. Again, this will only work in a sound tank.

### D. Advantages

- 1. Lightens a ship or stops leakage with no loss of cargo.
- If off-loading is complete, then the pollution problem is minimized no matter what happens to the ship (breakup, etc.).

### E. Disadvantages

- 1. Process can be slow if the tanker is large, and if:
  - . Ship's pump are inoperable (portable pumps must be used exclusively).
  - . The grounding is hard.
  - . The ship is impaled through the bottom (rock pinnacle, old wreck, etc.).
  - . The weather is bad in Sea State 3 and above.
- It can be difficult and hazardous for a receiving vessel to approach alongside and moor if the water is shallow and if the sea state is high.
- Availability of suitable off-loading vessels may be limited, and obtaining such vessels can cause delays.
- handling of hoses between vessels can be difficult, particularly if:
  - . Hoses are heavy (ships cargo hoses) and power on the casualty is lost, limiting lifting capability.
  - . Hoses have to be provided with flotation, or if floating hoses are used.
  - . Un-manned receivers, such as Dracones, are used in higher sea states.

## F. Special Problems/Techniques for Extreme Weather

1. Mooring receiving vessel alongside stranded tanker:

Rough seas can make conventional fendering or anchoring of a lightering vessel an unsafe operation. A dynamic stationkeeping system would be desirable but no typical lightering vessels have this capability, and the shallow water in the vicinity of a stranded vessel could make this approach infeasible.

One system that is presently in use for securing off-shore supply boats to drilling rigs uses two synthetic mooring lines to tie the vessels together. Power is then applied by the supply boat to maintain tension in the lines. The synthetic ropes have significant stretch and act as springs to absorb the dynamic loads. The shock to the platform and vessel is significantly reduced and extreme weather transfer of cargo can be carried out. These systems are limited to 12-foot seas. Figure 3.3 shows how this system might be applied to an off-loading operation using a receiving barge and tug. Separations of 50-100 feet can probably be safely maintained. Mooring line sizes should be selected on the basis of tub/barge size and sea conditions. Provisions for supplying and handling heavy and bulky floating hoses must be considered in planning operations.

2. Stabilizing a grounding casualty:

In a grounding situation where a large amount of cargo must be removed and a considerable length of time is involved, consider stabilizing the vessel during the offloading process. The purpose is to prevent movement of the ship due to wind, current, tide and wave forces, thus minimizing further damage to the hull until an off-loading or salvage operation can be completed.

Two techniques may be useful:

- a. Fill all available ullage and unused space in a stranded vessel with seawater to increase the ground reaction, by seating the vessel firmly on the strand.
- b. Provide additional moorings on the casualty vessel.

Special considerations for stabilizing:

- . Consider all spaces for flooding ballast tanks, double bottoms, even the engine room (if in operable).
- . Bottom beneath ship must be fairly smooth and not steeply sloped.
- . Ship should be oriented in direction of least natural force when ballasting or mooring.
- . Casualty's anchors must be placed by another vessel because they are located at the bow where the grounding usually occurs.

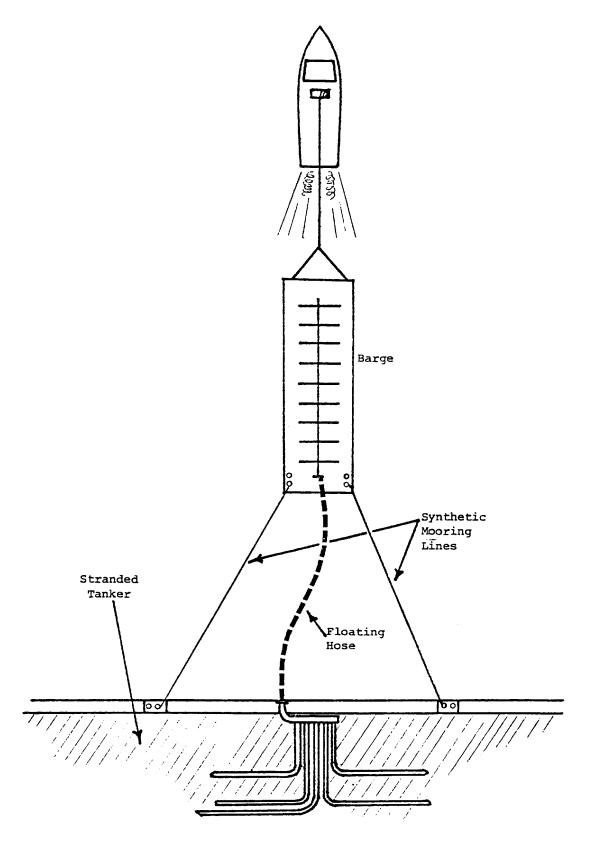


FIGURE 3.3 MOORING SYSTEM FOR OFF-LOADING STRANDED TANKER IN HIGHER SEA STATES

- Stern moorings have to be procured, deployed by a separate vessel, and tensioned from the casualty deck. Special aircraft-deployed, self-powered winches may be required for tensioning.
- . The natural forces (wind, current, waves) must be estimated to determine the necessary ballasting and moorings.
- . Ideal ballasting pumps are of the low head, high volume, low weight, centrifugal type. Agricultural irrigation pumps (well-point) are well suited, as are salvage water pumps (ADAPTS may be too slow for a large vessel).
  - Deck wash may increase as operations proceed and the freeboard is reduced.


# G. Planning Considerations


 Time Plans: Figure 3.4 shows an example Time Plan for the case where the cargo from a stranded tanker is to be offloaded into a barge moored for rough-sea conditions (Figure 3.3). Also, portable pumping systems are used, which are delivered by helicopter. In this example, obtaining a barge is shown to be a critical operation.

Figure 3.4 also shows an example Time Plan for the situation where a grounded tanker is stabilized by ballasting, using portable sea water pumping systems. This operation could be conducted in parallel with the off-loading operation.

- Decision Process: Figures 3.5 and 3.6 show the general decision process to determine if off-loading and ballasting/stabilizing are viable techniques for a given situation. Similar considerations would be made for other casualty situations besides groundings.
- 3. Planning Checklist: See Table 3.2.

FIGURE OMITTED FIGURE 3.4 - TIME PLANS FOR CARGO OFF-LOADING AND SHIP BALLASTING

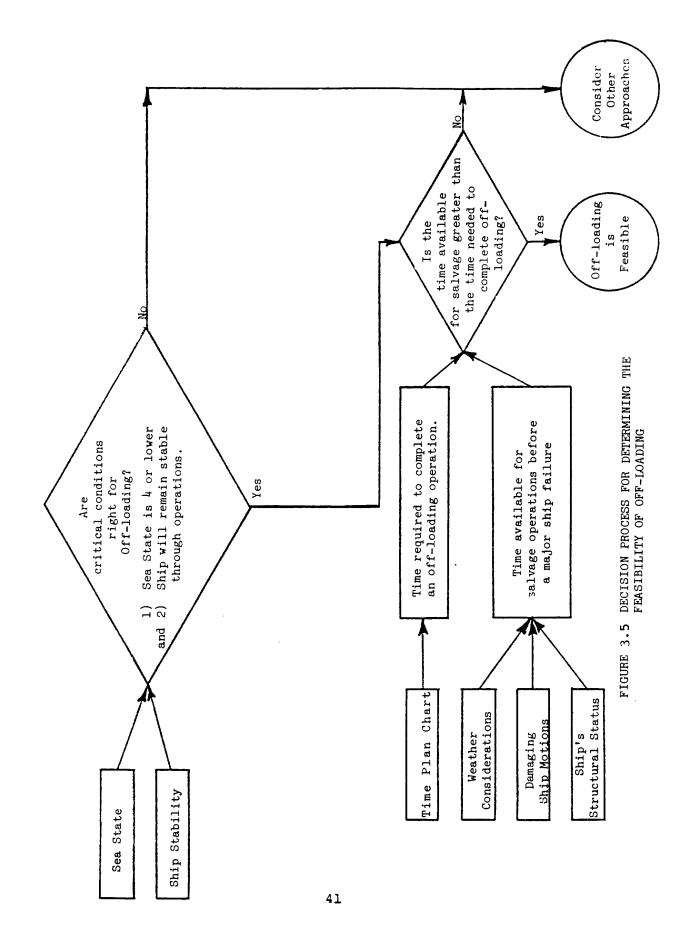

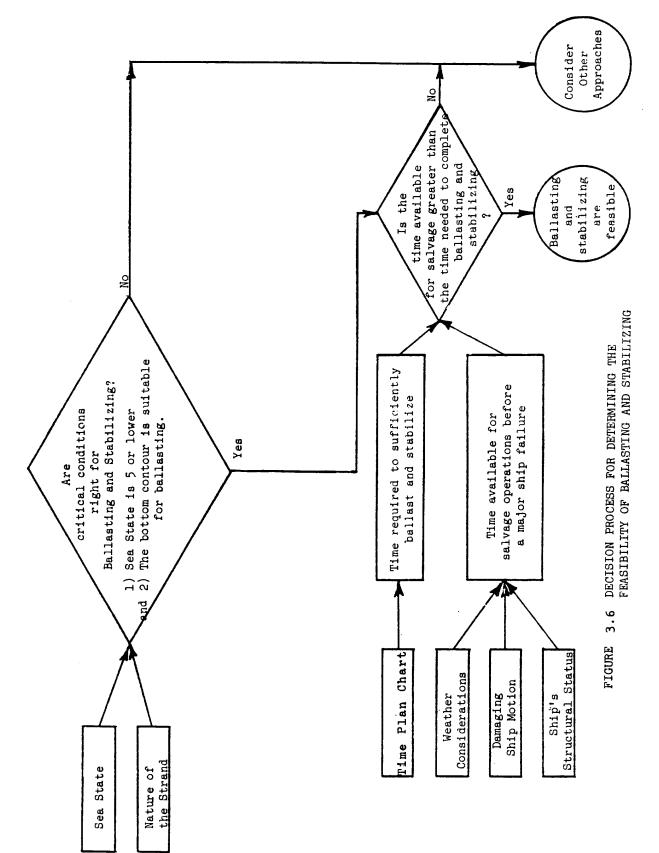

## TABLE 3.2

# OFF-LOADING -- PLANNING CHECKLIST

1. Assessment completed (See Section 2.4)?

Special considerations in assessment:

- a. Damaged or holed tanks?
- b. Impalement?
- c. Water depth around casualty?d. Weather forecasts?
- e. Operability of ship's pumping system?
- f. Trim and list? Stability?
- g. Oil properties and temperature?
- 2. Estimates made for:
  - a. Ground reaction (Appendix D)?
  - b. Location of grounding (on hull -- Appendix D)?
  - c. Quantities of il to be removed, and from which tanks (Appendix D)?
  - d. Stability predictions (Appendix C)?
  - e. Structural integrity?
  - f. Desired pumping rate?
  - g. Towing power requirements (Appendix G)?
- 3. Information available on:
  - a. Ship's pumping/piping system:
    - . can they be used?
    - . capacities?
    - . adequate hoses available?
  - b. Steering/propulsion system:
    - . force that can be developed in backing the ship off the strand.
    - . additional pulling required by beach gear/salvage tug.
  - c. Emergency pumping or air-pressurizing systems:
    - . number available and location?
    - . response times (delivery systems, personnel)?
    - . availability of extra or special hoses (floating)?
    - . can they be used for pumping ballast water?

- d. Receiving vessels (with tugs, if necessary):
  - . type, sizes available?
  - . response times?
  - . unloading facilities (on-shore)?
  - . mooring methods and equipment?
  - . availability of fenders?
  - . chartering procedures?
- e. Towing/salvage vessels for standby or pulling:
  - . type, sizes, available?
  - . response times?
  - . anchor handling and mooring capabilities?
  - . chartering procedures?
- 4. Selections made for:
  - a. Pumping systems and hoses?
  - b. Receiving vessels and support craft?
  - c. Fenders?
  - d. Special moorings?
  - e. Standby tugs/salvage vessels?
    - . towing gear?
- 5. Plans made for:
  - a. Casualty stabilizing for rough weather?
  - b. Receiver mooring to casualty?
    - . calm water (fendering approach)
      - . rough water (synthetic-line-standoff approach)
  - c. Mobilization and delivery of pumping equipment?
  - d. Pumping plan?
  - e. Pulling casualty off a strand?
  - f. Casualty towing and other tug/salvage vessel operation?
    - . setting casualty moorings
    - . employment of beach gear
  - g. Handling of off-loaded cargo?
  - h. Replacing off-loaded cargo with sea water?
  - i. Cargo shifting within the vessel confines?
  - j. Personnel protection?
  - k. Receiving the casualty vessel at a port?

- 6. Contingency plans prepared for:

  - a. Emergency stabilizing?b. Equipment/personnel removal from the casualty?
  - c. Oil spill control in event of breakup?
  - d. Scuttling vessel if it cannot be towed?
  - e. Bombing and burning (as a last resort)?
  - f. Gelling certain cargo tanks before towing?
- 7. Safety considerations (See Appendix A)?

# 3.3.2

Approach: Jettison Part of Cargo

#### A. Applications

- 1. Immediate change of trim and lightening to remove from stranding during bad weather.
- Final lightening of vessel during off-loading process, when bad weather is imminent and receiving vessel cannot remain alongside.

# B. Description of Approach

- 1. The following components are required:
  - a. Ship's cargo pumps: These are an integral part of the ship's machinery, but all piping, power, and control systems must be in working order before the pumps can be used. Short hose lengths or ducting may be desirable to keep oil off the deck during discharge.
  - b. Tug/Salvage vessel: One or more tugs or salvage vessels should be available to take the vessel in tow upon freeing until steerageway is attained. These vessels may also be used to assist in the actual freeing operation if beach gear is employed. Salvors should be consulted for utilization of beach gear and salvage vessels.
  - c. Spill control and cleanup equipment: Although it is not absolutely necessary to have this equipment operating at the beginning of the jettisoning process, it should be mobilized and deployed as soon as possible. The size and type of equipment needed will depend on several conditions. (See Section 4 for details.) Barrier (boom) systems may be preferred, as jettisoning will probably be performed at a rate much higher than any skimmer is capable of handling continuously.
- Determine ground reaction, the point of stranding, and the change in trim/displacement required to reduce the ground reaction sufficiently to back off the ship using ship's power. (See Appendix D for calculations.)
- 3. Determine the amount of cargo to be jettisoned and from which tanks.

Arrange for the tug to stand by and assist the vessel after backing off the strand.

- 4. Arrange to have spill containment/recovery equipment brought to the scene to control the jettisoned oil.
- Jettison the cargo using the high-volume ship's pumps, so that the vessel will back off the strand at high tide.
- 6. Clean up the resulting oil slick.

### C. Variations on Approach

- Although ship's pumps provide the highest jettisoning rate (on the order of 10 percent of the cargo per hour), it is possible to use portable pumping systems. The problem with this approach is that if the rate is too slow the strand may become worse in time, and only unnecessary pollution will result from jettisoning.
- 2. Pressurizing certain tanks with air can force cargo out through the piping system and into the water. Also, if a tank is breached, air pressure in the tank will force water and cargo out the hole, thereby increasing the buoyancy. In either case the deck openings must be sealed, and the allowable pressure on the tank top must be known. Portable air compressors are common and many sizes can be easily transported to the casualty by helicopter.

#### D. Advantages

- Lightens a vessel and removes it from the strand potentially faster than any other method. Assessment, calculations, and tug procurement are still required, however.
- Saves the bulk of the cargo from causing pollution, at the expense of a relatively smaller amount of pollution.
- Provides the best chance of maintaining the hull and ship systems intact.
- 4. Could be accomplished (with adequate tug assistance) in sea conditions up to Sea State 5 or 6.

### E. Disadvantages


- 1. Causes deliberate pollution
- If performed without the aid of an adequate tug in bad weather, the vessel can reground before it can maintain steerageway.
- 3. The decision to jettision, even though successful, leaves the OSC open for criticism from those who may feel that the salvage job could probably have been performed without causing any pollution.
- 4. If the vessel is impaled, and this is not detected during the assessment, much more cargo may have to be jettisoned than originally anticipated. This could lead to far more pollution than estimated, with the possibility of not being able to free the vessel after all.

## F. Special Problems/Techniques for Extreme Weather

The technique of jettisoning is in itself a special technique for extreme weather. If bad weather is imminent or exists, jettisoning may be the only technique that will save the bulk of the cargo. However, the worse the weather the more important it is to have an adequate tug or tugs standing by to prevent further grounding as the vessel lightens. When in doubt, stabilizing by ballasting or moorings can be considered (See Off-Loading).

## G. Planning Considerations

- Time Plans: A Time Plan diagram for jettisoning can be prepared similar to the off-loading case, although a much simpler diagram would result. Contingency plans for stabilizing would require a diagram similar to Figure 3.4. One of the skimming/dispersing Time Plans should be utilized for planning cleanup operations.
- Decision Process: Figure 3.7 shows a general decision diagram for determining the feasibility of jettisoning. Several key steps are involved. The final decision should be made on a priority basis considering other feasible systems (off-loading, others).
- 3. Planning Checklist: See Table 3.3.

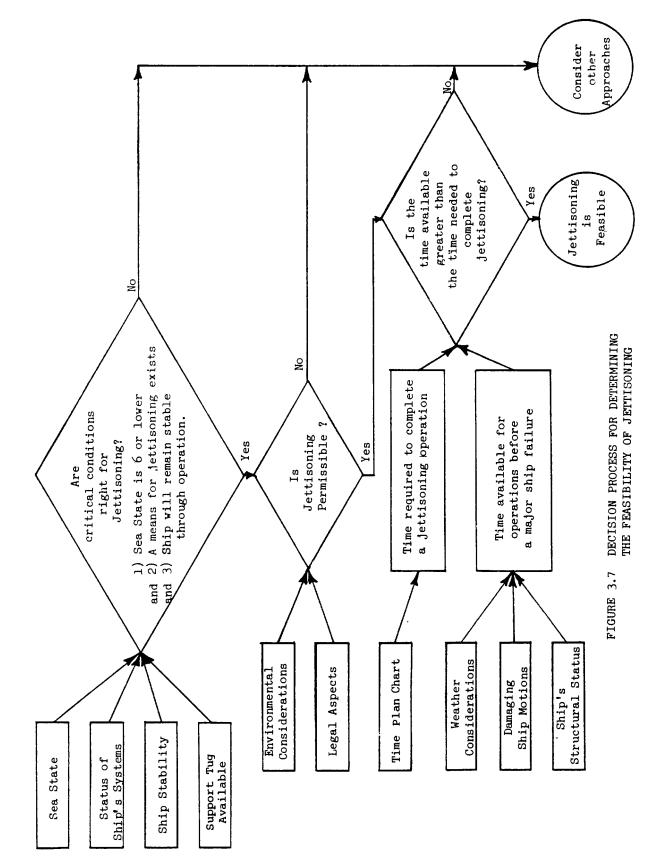

## TABLE 3.3

### JETTISONING -- PLANNING CHECKLIST

1. Assessment completed (See Section 2.4)?

Special considerations in assessment:

- a. Damaged or holed tanks emptied?
- b. Impalement?
- c. Proximity to environmentally sensitive areas?
- d. Operability of ship's systems (steering, propulsion, pumping)?
- e. Weather forecasts?
- f. Trim and list? Stability?
- 2. Estimates made for:
  - a. Grounding reaction (Appendix D)?
  - b. Location of grounding (on hull -- Appendix D)?
  - c. Quantities of cargo to be removed, and from
  - which tanks (Appendix D)?
  - d. Stability predictions (Appendix C)?
  - e. Structural integrity?

# 3. Information available on:

- a. Ship's pumping/piping system:
  - . can they be used?
  - . capacities?
  - . special provisions for pumping overboard
     (special hoses, ducts, etc)?
- b. Steering/propulsion system:
  - . force that can be developed by prop to back the ship off the strand?
- c. Available cleanup or spill control systems:
  - . barriers and/or skimmers?
  - . dispersant systems?
- d. Availability and type of towing vessels in the vicinity?
  - . towing capabilities?
  - . other capabilities (emergency salvage, rescue, etc.)?

- 4. Selections made for:
  - a. Auxiliary towing vessel?
    - . towing gear?
    - . mooring system?
- 5. Plans made for:
  - a. Jettisoning procedure?
    - . tanks to be jettisoned and order of jettisoning
    - . quantities to be jettisoned
    - . pumping or tank pressurization (blowing)
    - . timing for freeing at high tide
  - b. Tug assistance?
    - tug-vessel interaction (passing tow lines, tow points)
    - . direction of tow
    - . stabilization during jettisoning (prevention of broaching, hardening on the strand, etc.)
    - . backup or supplemental towing vessel utilization.
  - c. Spill cleanup?
  - d. Protection of shorelines and critical areas?
  - e. Special provisions for the case of emergency jettisoning at the end of an off-loading operation:
    - . emergency jettisoning plan prepared?
    - . plans for rapid casting off of mooring lines, anchors, etc., prepared?
    - are tugs/salvage vessels prepared for emergency towing?
    - . cleanup/dispersant equipment and plans ready, with proper EPA approvals?
- 6. Contingency plans prepared for:
  - a. Stabilization (ballasting, mooring) and off-loading if jettisoning is not proving successful?
  - b. Flaring cargo?
- 7. Safety considerations (See Appendix A)?

Approach: Bomb the Vessel and Burn the Cargo In-Situ

### A. Application

- Consider as a last resort when off-loading is unsuccessful and breakup is imminent. Bombing will probably destroy the ship.
- Can be used on floating casualties if the risks in sinking the ship are acceptable (very deep water, away from land, etc.

## B. Description of Approach

- 1. The following components are required:
  - a. Bombs or missiles to open up the deck plating. Bombs can be two-part devices such as used on the <u>Torrey Canyon</u>: the initial impact to open the hull plating, with a time-delayed explosion occurring after the penetration to ignite the cargo. Special missiles would probably improve effectiveness, however. Depth charges are not recommended.
  - b. Aircraft to deliver the bombs or missiles. Air Force or Navy planes would be required.
  - c. Military vessels or combat helicopters, to provide fire-power to opening up holes in the side of the vessel (wing tanks) to promote more complete burning.
  - d. Spotter vehicles to report on damage incurred.
- Planes would bomb the deck, opening up holes and igniting the cargo. Approximately 10-percent of the deck above a specific tank must be opened to ensure maximum combustion.
- After sufficient oil is burned off the lower the tank level, fire-power should be used to open vent holes in the side of the tank to enhance combustion. A 10-percent opening is desirable.
- Observations must be made to observe changes in vessel draft, additional oil spillage, and other indications of effectiveness.
- 5. After burning is completed conventional salvage operations can be undertaken.

### C. Variations on Basic Approach

- Explosives (cutting charges) could be planted on the vessel by explosives experts, thus ensuring that adequate openings were made. However, the presence of girders and other structural members below the deck could make this a difficult task, and would call for careful and time consuming planning. Side openings could also be made with planted explosives, or else shelling could be used. Incendiary charges or bombs could be used to ignite the cargo.
- Homing devices placed on specific deck locations might improve the accuracy of missiles, particularly when smoke obscures the view. Special missiles would be required for this, however.
- Incendiary bombs could be used to enhance ignition if the initial bombing fails to ignite the cargo.

## D. Advantages

- Effects of operations or weather on personnel are small because nobody can be present ont he casualty during burning.
- Bombing may be the only thing that can be done in certain circumstances, and even though it may be largely ineffective it indicates that an effort is being made.
- 3. No logistical problems such as providing receiving vessels for off-loaded oil.

## E. Disadvantages

- After initial ignition, smoke may obscure visibility for making additional bomb or missile hits (not a problem with planted explosives).
- Openings of 10-percent in a tank represent extremely large areas for a large tanker. Projectiles tend to open up a small hole and depend on the explosion to open up larger areas.
- 3. The risk of causing more damage and pollution than might be saved is great in the case of bombing.
- Certain viscous cargos may not burn (on the order of 5,000 cs or greater).

- 5. Air pollution could be a problem.
- Burning rates are fairly slow, at best. For fully vented tank (10-percent on side and top) and a 12-knot wind feeding the flame, a burning rate of 7 inches per hour might be obtained under optimum conditions.
- Center tanks are not amendable to side venting by gun fire or planted explosives.
- Monitoring burning effectiveness is not easy compared to offloading.
- 9. Burning is uncontrollable after ignition.
- With planted explosives, initial detonation and/or heat may cause disruption of electrical (denotation) circuits and other problems. All charges may have to be set off at once.
- 11. Bad weather could make planting explosives very hazardous, especially along the sides of the vessel.
- 12. Mobilization times for planting explosives could be long.
- Bombing may sink a floating ship (desirable in certain cases).
- 14. The vessel will probably be destroyed.
- F. Special Problems/Techniques for Extreme Weather
  - 1. Setting explosives can be difficult in bad weather.
  - Poor visibility in bad weather can limit bombing or shelling operations.

# G. <u>Planning Considerations</u>

- Time Plans: Diagrams similar to other Time Plans can be prepared for this operation. Planting explosives appears to be the preferred means to success for opening up the deck, but this requires the most planning and preparation. Much of this planning effort must be performed after the casualty occurs, thus making this a slow response operation.
- 2. Planning checklist: See Table 3.4.

## TABLE 3.4

### BOMBING AND/OR EXPLOSIVES -- PLANNING CHECKLIST

1. Assessment completed (See Section 2.4)?

Special considerations in assessment:

- a. Condition of vessel
- b. Vessel structural data and tank layout
- c. Cargo condition (quantities, estimated viscosity)
- Vessel/cargo condition as a result of any other response techniques that have been attempted (off-loading, jettisoning, etc.)
- 2. Estimates made for:
  - a. Ground reaction?
  - b. Location of grounding?
  - c. Quantities of cargo to be removed, from which tanks?
  - d. Damage probability as result of burning and bombing (structural weakening, etc.)?
  - e. Explosives/ordnance required?
- 3. Information available on:
  - a. Location and availability of suitable aircraft? Gunboat? Combat Helicopters?
  - b. Location and availability of suitable ordnance (special -- bombs, missiles)?
  - c. Supply of explosives (special configurations of shaped charges, mounting hardware, detonating equipment)?
  - d. Structural drawings of ship, showing deck reinforcing, tank locations, etc.
  - e. Status of all cargo compartments amenable to bombing/explosive (oil quantity remaining, oil type and viscosity)

f. Response times

- 4. Selection made for:
  - a. Combat aircraft
    - . quantity?
    - . type?
    - . source?
    - . function (bombing, missile launching)

- b. Ordnance and explosives
  - . type?
  - . quantity?
- c. Gun boats
  - . quantity?
  - . ordnance capabilities?
- d. Staging sites?
- e. Evaluation techniques?
- f. Surveillance methods?
- g. Personnel?
  - . aircraft and vessel crews
  - explosives experts (special contractor or military)
  - system design group for planning explosives layout and evaluating effects of explosives (or bombs) on ship structure
  - . evaluation crews (post burning)
- 5. Plans prepared for:
  - a. Contracting with explosives/ordnance consultants (commercial and/or military)?
  - b. Mobilizing aircraft and vessels?
  - c. Bombing/missiles pattern?
  - d. Layout of explosives and detonation sequence?
  - e. Delivery of explosives (ordnance, explosives) to vessels?
  - f. Vessel inspections before and after burning?
  - g. Towing or salvage of remains of vessel?
  - h. Documenting questions?
- 6. Contingency plans prepared for:
  - a. Oil spill control and cleanup?
  - b. Additional burning or explosives setting where initial failures occur?
- 7. Safety considerations (See Appendix A)

3.3.4

Approach: Cargo Gelling

- A. Application
  - Where a vessel tank is in danger of opening and oil could be spilled.
  - Before towing a casualty, to minimize spillage if further damage occurs.

## B. Description of Approach

- 1. The following components are required:
  - a. Gelling agent: Although several types of agents will form gels with oil, only certain polymer forming organic reagents will work at reasonable ratios of agent-to-oil. Even then, quantities of 3 to 10 percent of the oil weight are required to provide adequate shear strength (e.g., the center tanks on a 100,000 DWT tanker could contain 7,700 tons of oil and would require as much as 770 tons of gelling agent).
  - b. Mixing equipment: The gelling agent must be thoroughly mixed with the oil, at an energy input of approximately 1 Hp-minute/1,000 gallons. Mixing could be provided by circulating oil through an educator, using an ADAPTS pump.
  - c. Test equipment to measure the shear strength of the gel (1.2 psi shear strength necessary to prevent extrusion through all but very large holes).
  - d. Cargo heating equipment: Low temperatures will cause lower shear strengths to develop for a give quantity of gelling agent (at 4C shear strength for 3% agent is 0.7 psi; at 15 C shear strength increases to 1.2 psi). To reliquefy the gel, it must be heated to approximately, 54C, but this would be done in port. Heat transfer to a gelled, semi-solid cargo would be a problem.
- Mix the gelling agent thoroughly with the oil at the recommended energy input. If any water is present a good gel will not form. (However, a formed gel is stable in the presence of water.)
- 3. Allow the mixture to react for 8 to 24 hours until the proper shear strength is achieved.

4. Tow the vessel to port for off-loading the cargo.

### C. Advantages

- 1. The possibility of oil leakage and pollution is reduced if the cargo is gelled.
- 2. Free-surface effects on vessel stability are reduced if the cargo is gelled.

# D. Disadvantages

- Providing 3 to 10 percent gelling agent to a casualty presents a logistics problem almost as severe as direct off-loading of liquid cargo.
- 2. Gelling agents are expensive.
- The cargo is contaminated by the addition of the gelling agent.
- 4. The presence of water is detrimental to gel formation; therefore, holed tanks cannot be treated effectively.
- 5. Heating equipment is difficult to mobilize and deploy.
- Cleaning or disposing of the vessel after gelling would be a problem.

# E. Planning Considerations

Because of the serious drawbacks to the use of gelling as a response method, no planning guidelines have been developed.

#### 4.0 OIL SPILL MITIGATION AND CLEANUP

The objective of responses in the event of a spill is to minimize the resultant environmental pollution. The techniques discussed are applicable to spills from tankers, oil well blowouts, pipeline ruptures and other sources. Although several response approaches are possible, they fall into one of the two following categories:

- Skim the oil from the water surface and remove it from the environment.
- Redistribute the oil or its decomposition products throughout the environment.

Category 2 can be further subdivided as follows:

- The use of chemical dispersants to remove oil from the water surface and suspend it as droplets in the water column.
- In-situ slick burning to remove the oil from the water surface.
- Sinking of the oil slick by adding suitable materials.

Only the first of the Category 2 techniques is considered to be viable at this time. Burning is not well developed, and sinking is not permitted in U.S. water.

Response approaches can also be categorized in other ways. Table 4.1 categorizes the response approaches as "system types", for both skimming and redistribution approaches. These system type represent basic functional approaches that may be available to the OSCA in planning a skimming or dispersant operations. Within each of the skimming system types, for example, the skimming devices and the basic skimming mechanisms (the means of actually removing the oil from the sea surface) may differ considerably. Appendix H presents a summary of the basic skimming mechanisms that are employed in various skimming devices. TABLE 4.1. SPILL MITIGATION AND CLEANUP

## I. SKIMMING APPROACHES

- A. Barrier Systems. Variation includes:
  - Skimmer operators independently inside the apex of barrier.
    - a. Skimmer tethered in the apex of the barrier, and umbilical-supported by a vessel some distance away
    - b. Skimmer supported from a boom which is mounted on a vessel located adjacent to the apex of the barrier
    - c. Self-propelled skimmer, remotecontrolled from a nearby vessel
  - 2. Skimmer part of the barrier envelope
    - a. Skimming mechanism built into the barrier
    - b. Skimmer with herding barriers attached to the hulls
- B. Direct-Acting Skimmers (No long Barriers)
  - 1. Dedicated, independent skimmers
  - Vessel-of-Opportunity Skimming Systems (VOSS)

# II. REDISTRIBUTION APPROACHES

- A. Dispersant Systems
  - 1. Aircraft applied disperants
  - 2. Vessel applied dispersants
- B. In-Situ Slick Burning
- C. Slick sinking

### 4.1 Response System Selection

Figure 4.1 describes a general outline for deciding the best course of action for a spill response, along with several of the principal factors to be considered. Several of the key questions listed on the diagram are discussed below:

. <u>Does the Coast Guard have geographic jurisdiction for</u> <u>removing the discharged oil?</u> Coast Guard geographic jurisdiction for responding to an oil spill is cited in the Clean Water Act Amendments of 1977, 33 USC 1321 (c) (1). It states that removal is authorized if the discharge occurs into or upon the navigable waters of the U.S., the contiguous zone, adjoining shorelines, or in connection with activities under the Outer Continental Shelf Lands Act, the Deepwater Port Act of 1974, or the Fishery Conservation and Management Act of 1976. A removal operation is also authorized if the spill poses a substantial threat to these waters.

. <u>Can skimmers be used?</u> If the spill occurs in, or threaten, waters for which the Coast Guard has responsibility 2 for removal actions, the OSC should determine if skimmers can be utilized. From an environmental standpoint, skimming is preferred to other treatment methods because it removes the pollution from the environment. It is usually desirable to utilize skimmers when the following conditions exist:

- A thick (1-5mm) oil slick exists (near the spill source or in windrows).
- The slick covers an area where environmental risks from dispersed oil are great (for example, near shell fishing areas).
- 3. Sea and weather conditions are expected to be within operational or survival limits.

If skimmers cannot be used, because the oil is too thin or weather conditions preclude skimming, then dispersants will have to be considered. If skimming is possible, then an examination of system availability should be made. A likely case is that skimmers can be utilized on part of the slick but not on all of it. In this case, different areas of the slick should be considered separately in the decision making process.

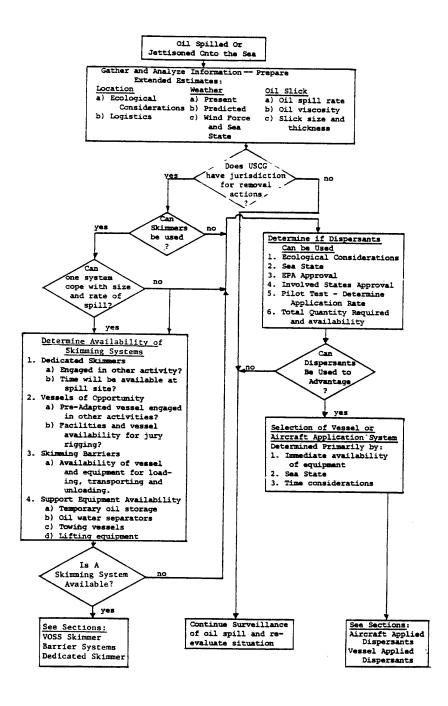


FIGURE 4.1 SELECTION OF A SPILL RESPONSE APPROACH

. <u>Is a skimming system available?</u> Later sections in this guide discuss the types of skimming systems that can be used. Proper planning by the OSC will determine what specific systems and equipment are available to him. An estimate of the spill and environmental conditions will then narrow the choice. A final choice would be made considering the best response time, ease of control, and other factors. For a large spill several systems may be required, and possibly not enough skimmers can be made available. In this case, consideration of dispersants is again required.

. <u>Can dispersants be used to advantage?</u> In general, it is simpler to apply dispersants to the oil than it is to skim it. From Tables 5.3 and 5.5, the sea state capabilities of dispersant techniques exceed the capabilities of available skimming approaches, although logistics and operational problems are not simple. Details of the various dispersant techniques are discussed later. It may be desirable to utilize dispersants when the following conditions exist:

- 1. A thin (<1mm) wide-area slick exists.
- The oil slick covers an area where environmental risks are minimal (offshore, favorable current, deep water, etc.).
- Conditions are too extreme for skimming techniques, but aircraft of vessel application of dispersants can be utilized.

The second condition above is most critical, and regulations are in force to ensure that dispersants are not used in an indiscriminate manner that might harm aquatic life. Some of the considerations in these regulations are shown in Figure 4.1. Annex 10 of the "National Oil and Hazardous Substances Pollution Contingency Plan" gives full details. At the present time a study is being performed by the EPA to develop better guidelines for the use of dispersants.

## 4.2 Response System Descriptions

The following sections describe in more detail the basic system approaches that can be considered in planning operations. Time plan diagrams are shown in many cases, and diagrams are presented outlining the general considerations to be made in determining if the approach is feasible. Of the feasible approaches, the ones that, in the opinion of the OSC, best meets the priorities below should be pursued:

- Low residual pollution (pollution that cannot be controlled by the response method, or that is a result of the response method, e.g. dispersants).
- 2. Low risk to personnel and response equipment
- 3. Fast response time

Details of specific equipment items and support systems are presented in Section 5.

# 4.2.1

Approach: Vessel-of-Opportunity Skimming System (VOSS)

## A. Applications

- Relatively thick slicks (1-5mm or greater) in windrows and patches, in conditions up to Sea State 4 to 5 depending on the design.
- 2. Where higher maneuverability than can be provided with large sweeping barrier systems is required.

## B. Description of Approach

- 1. The following components are required:
  - a. Vessel of opportunity

Some criteria for vessel selection for rough weather use are:

- . seaworthy in Sea State 4 and above (implies 160 feet or longer).
- . large open deck area for support equipment (such as power modules, lifting gear, pumps, manifolds, etc.).
- capable of operating continuously at less then 3 knots.
- . some on-board oil storage capability is necessary, whether it be from integral or portable tankage.

The likelihood of acquiring a suitable vessel on short notice, without prior arrangements, could be low. The OSC must identify suitable vessels within his area of responsibility, and be prepared to obtain them when necessary.

Potential vessels may include:

- . Commercial vessels:
  - . offshore supply boats
  - . towed small barges
  - . small tankers
  - . tugboats
  - . dredges
  - . fishing vessels

- . Coast Guard vessels:
  - . WLB 180-foot buoy tenders
  - . WMEC 210-foot medium endurance cutters
- . Other Government vessels:
  - . ASR
  - . ARS
  - . ATF
  - . smaller AGORs
  - . small tankships.
- b. A skimming device that can be placed over the side of of the vessel and operated from the vessel. At the present time several promising VOSS skimming devices for rough water include:
  - . sorbent rope concepts (under development)
  - . loose sorbent system (none available at this time).
  - . the SOCK skimmer (under development).
  - . the Spring Sweep skimmer (Warren Spring Laboratory design - under development)

Table 5.3 describes other devices that may be used for VOSS application in the lower sea state.

- c. Handling and lifting system for the skimming apparatus. Separate equipment may have to be provided, although so skimmers may be equipped with their own integral handle system.
- d. Storage tanks for recovered oil.
- e. Slick surveillance function for directing the vessel to new patches of oil (other vessels, aircraft).
- Vessel of opportunity would be obtained and the equipment would be installed on it at the time of a spill.
- Surveillance vehicles (boats, aircraft) would proceed to the spill site to direct the VOSS to the thicker regions of the slick. Slick trajectory forecasting would be utilized also.
- VOSS system would proceed to the spill site, deploy skimmers, and commence skimming operations.
- 5. Recovered oil, would be transferred off the VOSS periodically.

### C. Variations on Basic Approach

- Various means of storing and handling recovered oil can be utilized. Interim storage of skimmed oil/water mixtures can be provided by:
  - a. Integral tankage on-board the VOSS (some supply boats, tank ships, towed barges).
  - b. Temporary deck-mounted tankage (steel tanks, rubber pillow tanks -- vessel stability must be considered).
  - c. Towed vessels (Dracones or other bladders, small barges -- restricts maneuverability of VOSS).

Bulk storage can be provided in two ways:

- At-sea transfers from interim storage to large barges or tankers maintained in the vicinity of the spill (difficult operations in extreme weather).
- b. Transfers to shore-side tankage (or direct to disposal facilities) via pipelines, tank trucks, or vacuum trucks brought to pier-side (time-consuming for remote spill).
- Vessels of opportunity could be obtained in various states of readiness:
  - a. Pre-adapted, with special fittings, etc., already installed to receive specific skimming equipment in the event of a spill (needs outfitting at a pier, or possibly via helicopter delivery).
  - b. Pre-adapted, with skimming equipment permanently stored on-board for rapid assembly (can outfit in-transit to the spill).
  - c. Random vessels with no pre-adapting (most common, but most difficult and time-consuming to outfit).

Types (a) and (b) require advanced planning, and probably long-term contractual arrangements if non-military vessels are involved.

# D. Advantages

- Provide a relatively small, self-contained, and highly maneuverable skimming system.
- Provides a seaworthy vessel for personnel and support, while allowing the skimmer/boom apparatus to be small and light to conform with the wave profiles.
- Reduces overall cost of a complete skimming system (over a dedicated skimmer).
- 4. Provides a quick response potential if vessels are properly equipped ahead of time.

- 5. Skimming apparatus is relatively small, portable, and can be stored at several locations.
- 6. Survivability of system is high because the skimming apparatus can be pulled back on deck.
- 7. Because large containment booms are not involved, skimming speed in some cases can be increased from 1 to 3 knots.

## E. <u>Disadvantages</u>


- Success depends on having the right vessels available when needed. Previous commitments by vessels can make them unavailable.
- 2. Vessel crews may be untrained in skimming operations.
- Installation of equipment can be time consuming on a random vessel -- slow response speed.
- 4. Lack of interim oil storage tanks can limit operational times.
- 5. Good setups are not commonly available.
- Skimming rate are relatively low (compared to barrier systems).


## F. Special Problem/Techniques for Extreme weather

- If bulk oil storage is provided by a barge that has been towed to the vicinity of the spill, transfers from the VOSS may be more easily made in higher sea states if the barge is first taken in tow by the VOSS itself. Transfers can be made by pumping the oil through a floating or suspended hose.
- Downwind skimming may improve skimming efficiency, because the frequency of wave encounter is reduced and adverse skimmer and vessel motions are minimized.
- G. Planning Considerations
  - Time Plans: Figure 4.2 shows an example Time Plan for the situation where a supply boat is outfitted with a skimmer at a pier (staging area). The VOSS then proceeds to the spill area where it takes a barge in tow to provide for interim storage during skimming operations. A considerable amount of time is shown for obtaining and outfitting the supply boat. Careful planning can help to minimize the delays in this step.

- 2. Decision Diagram: Figure 4.3 shows a general Decision Diagram for determining if the VOSS approach will provide an adequate response time in the event of a spill.
- 3. Planning Checklist: See Table 4.2.

FIGURE OMITTED FIGURE 4.2 - TIME PLANS FOR VESSEL-OF-OPPORTUNITY SKIMMING SYSTEM (VOSS) AND DEDICATED SKIMMER

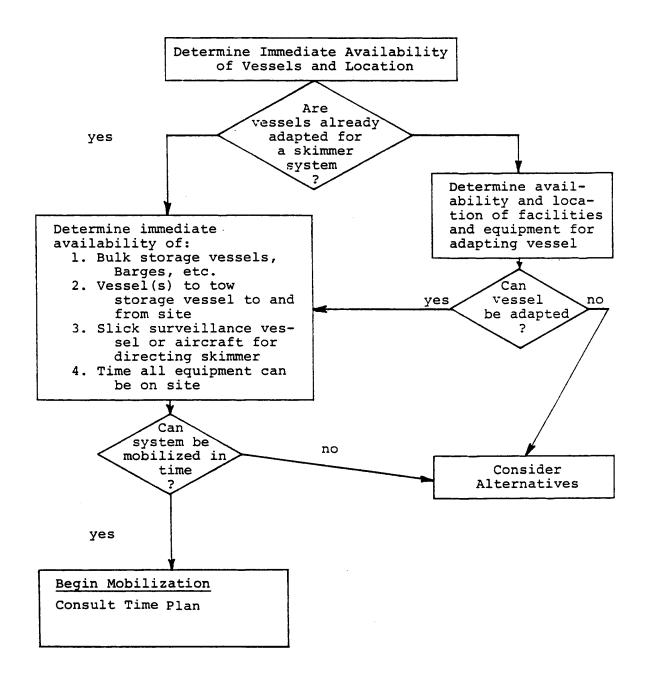



### TABLE 4.2

# VOSS -- PLANNING CHECKLIST

- Assessment completed (see Section 2.4)? Special considerations in assessment:
  - a. Slick thickness (approximate, in patchs and windrows).
  - b. Slick area coverage and distribution (windrows, patchs, other).
  - c. Projected intercept areas and times of arrival of recoverable slick fractions at these areas.
  - d. Rate of recoverable slick formation.
  - e. Wave conditions existing and projected.
- 2. Estimates made for:
  - a. Time available for cleanup to prevent resource damage?
  - b. Average rate of skimming required?
  - c. Number of VOSS systems required?
  - d. Number of receiving vessels needed:
- 3. Information available on:
  - a. Location of suitable vessels and availability?
  - b. Location of skimming and installation equipment?
  - c. Location of suitable staging facilities (piers with cranes, sufficient water depth, accessability to necessary facilities, availablity)?
  - d. Location of interim and/or bulk storage receivers, and availability? Tugs?
  - e. Response times of candidate VOSS systems?
  - f. Location of disposal facilities for recovered oil?
- Selections made for:
   a. Vessels
  - - . number?
    - . type?
    - . additional interim storage requirements?
    - . extra on-board handling equipment?

- b. Appropriate skimming equipment for above vessels?
  - . delivery system (truck, helicopter)
- c. Barges or other towable bulk storage receivers?
   . pumps and/or hoses?
  - . personnel protection aboard barge?
- d. Staging sites
  - . loading equipment?
  - . suitable for vessel draft?
- e. Recovered oil off-loading sites?
  - . supplementary pumping equipment?
  - . tank trucks?
  - . storage tanks?
  - . disposal sites?
  - . debris handling?
- f. Surveillance methods?
  - . aircraft?
  - . vessels?
  - . special equipment for estimating slick thickness?
- g. Personnel
  - . skimmer crews?
  - . surveillance crews?
  - . barge crews?
  - . other?
- 5. Plans made for:
  - a. Chartering vessels?
  - b. Arranging for access to staging areas, off-loading piers?
  - c. Delivery of skimming equipment?
  - d. Skimming patterns?
  - e. Cargo transfers (VOSS to other receivers)?
  - f. Surveillance patterns?

- g. Documenting operations?
  - . operations log
  - . determining cleanup effectiveness
  - . updating slick location and configuration
  - . photography
- h. Schedule for refueling? crew changes?
- 6. Contingency plans prepared for:
  - a. Booming of environmentally sensitive areas?
  - b. Dispersant application if skimming is ineffective?
  - c. Survival operations?
- 7. Safety considerations. (see Appendix A)?

# 4.2.2.


Approach: Containment Barrier Assisted Skimming

## A. Application

- Relatively widespread slicks, either thick or thin, in sea conditions up to State 3 of possibly 4 depending on the system components.
- For open water, where high maneuverability is not required.
- 3. Where high skimming rates are desired.
- B. Description of Approach
  - 1. The following components are required:
    - a. Containment barrier: Various types can be used depending on the sea conditions. For the highest sea state capability (3 to 4), the Coast Guard OWOCS should be utilized. Characteristics of other barriers are given in Table 5.4. The length required may depend on the size of the slick and other factors, but in general, approximately 600 feet will be satisfactory, deployed with a 400-foot opening.
    - b. Skimmer: Various types of skimmers can be utilized.
      All types are designed to operate in the thick (4-6 inches) pool of oil that accumulates in the apex of the barrier. Table 5.3 gives characteristics of the various types of skimmers that can be used, including the Coast Guard skimming barrier.
    - c. Storage vessel for recovered oil: The skimmers for this service have essentially no on-board oil storage capacity, and all of the oil must be stored in a barge or tankship. Dracones or other unmanned receivers could be difficult to work with in the higher sea states.
    - d. Vessels for towing the barrier, skimmed and recovered oil receiver. The vessels should be capable of:
      - . sustained towing at speeds of 1 knot or less
      - . operation and survival in the sea states expected
      - . capable of extending operation at sea

Vessels suitable for towing operations in the higher sea states include but are not limited to:

- . Offshore supply boats (commercial) with controllable pitch (CP) propellers and bow thrusters.
- . WLB bouy tenders
- . Certain coastal buoy tenders
- . WMEC cutter (possibly)
- . Navy ATF tugs
- e. Delivery system for equipment: This will depend on the equipment to be used and may possibly be accomplished by one of the towing vessels. Probably the best delivery system for the higher sea states is a 160-foot or larger offshore supply boat, equipped with an A-frame and a stern roller. The size of such a vessel makes it a good platform to work from in assembling a skimmer and/or in preparing a barrier for launching. An entire system could possibly be preassembled on deck, even to the point of starting the skimmer mechanism (unless remotely startable) and passing the transfer hose beneath the barrier. A possible layout utilizing the OWORS skimmer and OWOCS barrier just before launching is shown in Figure 4.4. Use of the Coast Guard sled (FDS) in higher sea states could possibly be utilized, but would offer no advantages over the supply boat delivery method. Transport speeds would be limited by towing vessel motions and motions of the sled itself. At the work site, assembly would have to be done in the water, which would be undesirable in heavy weather. In lower sea states, the FDS would be a good vehicle for delivering both the OWOCS barrier (which can be used to corral the oil initially) and the OWORS skimmer. The skimmer could also be delivered and deployed by a 180-foot WLB in very low sea states (3-foot waves or less).
- f. Slick surveillance function: Because of the limited maneuverability of barrier systems, a continuous slick spotting function is not necessary.
- The barrier would be loaded onto a delivery vessel, transported to the spill, and deployed.
- Towing vessels would be obtained, dispatched to the spill, and take the barrier in tow. Other vessels would also be dispatched to perform other required functions, depending on the system.

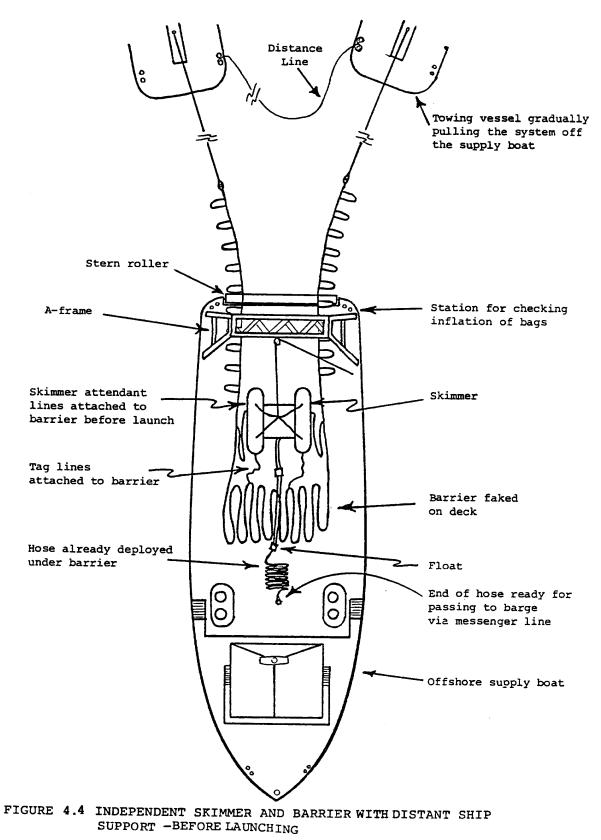

- 4. The skimmer would be loaded onto a delivery vessel (or towed directly), transported to the spill and deployed. The method of integration with the barrier, if any, would depend on the skimming utilized.
- 5. A receiving vessel for the recovered oil would be obtained, transported to the spill, and connected to the skimmer pumping system. The vessel may or may not be towed independently of the barrier, depending on the system. Figure 4.5 shows an example of a scheme involving the OWOCS/OWORS, with a receiving barge towed independently of the barrier.
- Surveillance vehicles (boats, aircraft) would direct the barrier system to the oil.
- 7. Skimming operations would be conducted, with receiving vessel changes, as necessary.
- C. Variations on Basic Approach
  - Various approaches to deploying and utilizing a skimmer can be employed:
    - a. Coast Guard skimming barrier approach: This is basically an OWOCS barrier with special weirs installed in the sections near the apex to withdraw oil. The weirs are connected to hoses leading to hydraulically-driven diaphragm pumps floating behind the barrier, manifolded to hoses leading back to the receiving barge. Conformance of the skimmer section essentially identical to the rest of the barrier. integrated skimmer-barrier system is launched as a single unit, simplifying deployment and retrieval operations. Although the Coast Guard skimming barrier is probably the best of the existing barriertype skimmer systems, it is expected to be only marginally effective in Sea State 4. An oil-water separator would probably be required because of the large amounts of water the system may pick up in higher sea states.
    - b. An independent skimmer is tethered or positioned in the apex of the barrier and controlled through an umbilical by vessel located a substantial distance from the skimmer. This system is utilized in the present Coast Guard OWOCS/OWORS approach (see Figure 4.5).
    - c. A skimmer is solely supported by a crane system mounted on a vessel operating next to the barrier. The mode of operation would require that after a boom had swept up some oil, the support vessel would be brought alongside the boom and the skimming head would reach out over the barrier and transform the collected pool to on-board tanks. The skimmer head is supposed to be relatively isolated from the support vessel and free to conform

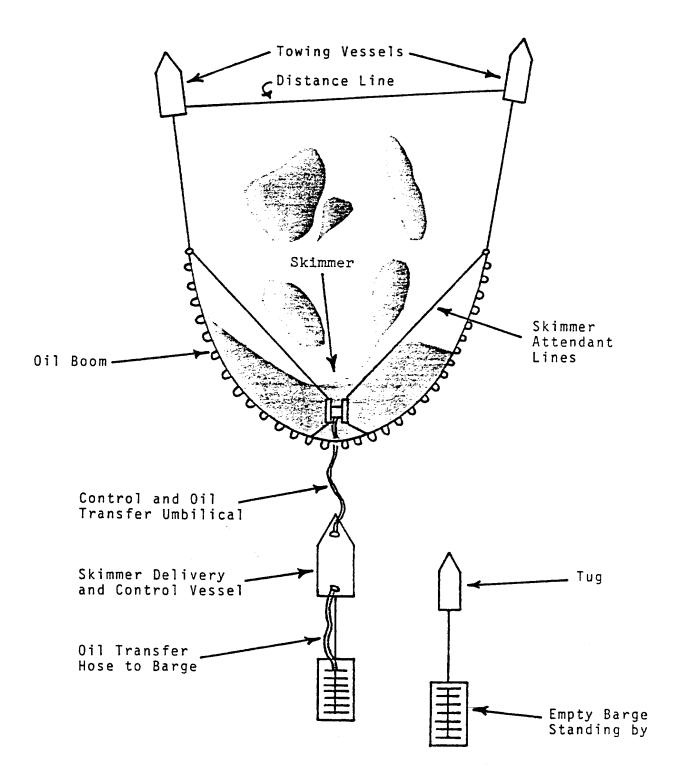


FIGURE 4.5 INDEPENDENT SKIMMER AND BARRIER WITH DISTANT SHIP SUPPORT - FULLY DEPLOYED

to the wave motion inside the boom. Commercial systems utilizing this concept (Framo) use an oleophilic disk skimming mechanism similar to the OWORS. The Framo unit is claimed to have been used in 3-meter high waves on a blowout in the North Sea. Periodic transfers of recovered oil to barges or shore-side tanks is required, as for VOSS skimmers. The support vessels for supporting the skimmer should have bow and stern thrusters to permit the vessel to approach the barrier apex sideways.

- d. A skimmer is umbilical-controlled from a remote vessel as in the case (b), but it is also selfpropelled and thus not tethered to the barrier. The Norwegian Euroskim skimmer utilizes this concept. Oil storage problems similar to (c).
- e. A vessel-type skimmer (manned or unmanned) is fitted with long towed barrier sections on each side of the skimmer mouth to direct oil into the skimmer. Several systems use this concept (Huskey skimmer, U.S. Navy skimmer). Vessel motions are considerably different than barrier motions, limiting this technique to low sea states to avoid excessive oil losses.
- In addition to a sweeping mode of operation (towed), the barrier can also be moored in a current to allow the oil to thicken in the barrier naturally. Unfortunately, offshore currents are usually weak and oscillatory, making the fixed mode of operation impractical in most cases.
- D. Advantages
  - 1. A large area can be covered in a single sweep. This is especially advantageous if the oil is emitting from a single source such as a well blowout.
  - A relatively thin slick can be concentrated into a thick pool for efficient recovery in low sea states.
  - The number of complete skimming systems required is minimized by this approach.
  - 4. Barriers can be deployed independently to contain a small spill before skimming operations are conducted (except in variations (la) or (le).
  - 5. In most cases equipment is relatively small and can be delivered to the spill site at conventional ship speeds.

#### E. Disadvantages

- System utilization is complicated and requires careful coordination between several vessels and equipment items. This is particularly difficult in extreme weather.
- Barriers are limited to 1-knot tow speeds to avoid heavy oil losses.
- Deployment of systems is more difficult than with other approaches (VOSS, dedicated skimming, dispersants). Hookups in the water (divers) may be difficult to impossible in extreme weather.
- 4. Maneuvering capability is limited.
- Slow skimmer response in most cases. However, with good planning, reasonably rapid response with some systems can be obtained (USCG skimming barrier). The need to obtain several vessels at once is a disadvantage.
- 6. With variation (c) the close proximity of the skimmer vessel to the barrier makes this operation hazardous to the barrier and uncomfortable to the operator in higher sea states.
- Survival potential of the equipment is reduced because of the difficulty of recovering it in bad weather and the need to leave it deployed in most cases.
- F. Special Problems/Techniques for Extreme Weather
  - Downwind skimming may improve skimming efficiency, because the frequency of wave encounters is reduced and adverse skimmer and vessel motions are minimized.
  - 2. Deployment/launching operations can be difficult to impossible to carry out safely. Systmes may have to be assembled in calm water and towed to the site. This can slow the response speed significantly. Launching methods where devices can be pulled off a low, flat deck (work boat stern, barge deck) may be better than crane and boom launching methods.
  - 3. Changing out a recovered oil barge could be difficult if it is being towed directly by the barrier or barrier towing vessels. In heavy weather, independent towing of the barge by a separate tug would permit faster breakaway in an emergency, and, also provide continuous control of the barge. Because the barge towing vessel could also be functioning as the support platform for the skimmer machinery (power units, control panels, etc.), a transfer of a full barge to another towing vessel (and vice versa for the empty replacement barge) would be required.

## G. Planning Considerations

1. Time Plan: Figure 4.7 shows an example Time Plan for a case similar to variation (b), where an independent skimmer is tethered in the apex of the barrier. The situation at the start of the launch sequence is shown in Figure 4.4 Figure 4.5 shows the setup after the receiving barge has been positioned and the skimming operation has commenced.

Figure 4.7 also shows steps in the launch sequence that would not be required if the Coast Guard skimmer-barrier was being utilized in a similar operation.

Other variations would have similar Time Plans, which would have to be developed around available equipment.

- Decision Diagrams: Figure 4.6 shows a general Decision Diagram for considering the utilization of a barrier system for spill control, assuming sea state conditions are within limits for the system.
- 3. Planning Checklist: See Table 4.3.

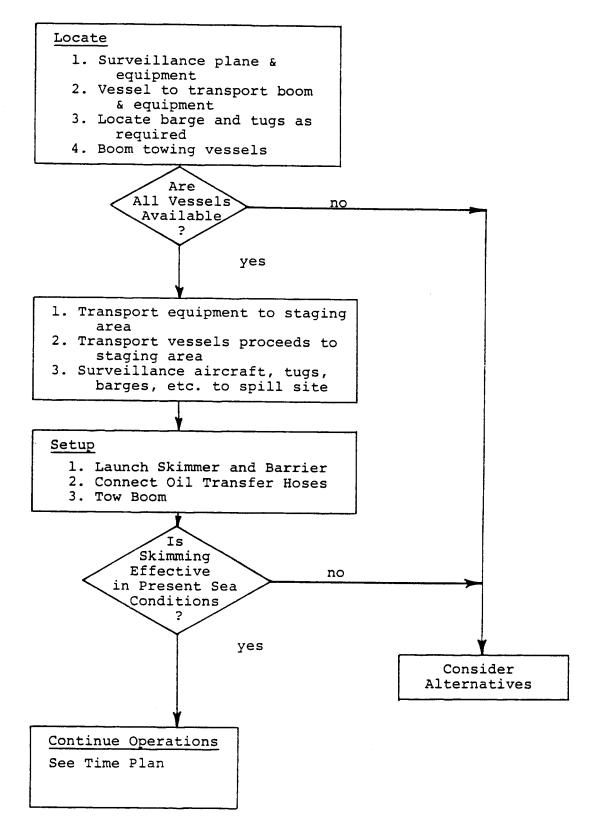


FIGURE 4.6 BARRIER USE CONSIDERATIONS

FIGURE 4.7 - TIME PLAN FOR SKIMMER INDEPENDENT OF BARRIER

# TABLE 4.3

# BARRIER SYSTEMS -- PLANNING CHECKLIST

1. Assessment completed (see Section 2.4)?

Special consideration in assessment:

- a. Slick area coverage and distribution of thicker patches of oil.
- Locations where collecting the slick would be most desirable.
- c. Rate of recoverable slick formation.
- d. Wave conditions existing and projected.
- e. Distance from support facilities.
- 2. Estimates made for:
  - a. Time available for cleanup to prevent resource damage?
  - b. Average rate of skimming required?
  - c. Number of systems necessary?
  - d. Number of receiving vessels needed?
  - e. Number of support vessels needed?
- 3. Information available on:
  - a. Location of suitable vessels and availability? Support gear?
  - b. Location of skimmers and barriers?
  - c. Location of suitable staging facilities?
  - d. Location of receiving barges or tankships, and availability? Tugs?
  - e. Location of disposal facilities for recovered oil?
- 4. Selections made for:
  - a. Vessels
    - . number?
    - . type?
    - on-board equipment for launch assist?
      towing? other?

- b. Barriers length? sized for expected conditions? launching facilities? FDS sled?
  - c. Skimmers
     type compatible with the approach variation
     to be used?
     launching facilities?
     support platforms for power units, control
     stations?
- d. Barge or other oil receivers

towing vessels? auxiliary vessels for towing? oil-water separators? pumps or hoses? personnel protection aboard barge?

e. Staging sites

loading equipment?
suitable for vessel draft?

f. Recovered oil off-loading sites

supplementary pumping equipment? tank trucks? storage tanks? disposal sites? debris handling?

g. Surveillance methods

aircraft? vessels?

- h. Personnel
  - . skimmer operating crews? surveillance crews? barge crews? supplementary crews for manning other support or towing vessels? other?

- 5. Plans made for:
  - a. Chartering vessels?
  - b. Outfitting vessels with support equipment (launching equipment, towing)?
  - c. Delivery of skimming equipment and barrier?
  - d. System assembly plan?
  - e. Skimming plan (sweeping, mooring)?
  - f. Surveillance patterns
  - g. Receiver barge change-out?
  - h. Documenting operations?
    - . operations log
    - . determining cleanup effectiveness?
    - . photography?
    - . updating slick location and configuration?
  - i. Schedule for crew changes? Refueling?
- 6. Contingency plans prepared for:
  - a. Booming of environmentally sensitive areas?
  - b. Dispersant application is skimming system is ineffective?
  - c. Use of VOSS or dedicated skimmers for escaping oil?
  - d. Survival operations?
- 7. Safety considerations (see Appendix A)?

# 4.2.3

Approach: Dedicated Skimmer

# A. Applications

- Relatively thick slicks (1-5 mm or greater) in windrows and patches, in sea condition up to State 3 or 4, depending on the design.
- 2. Where higher maneuverability than can be provided with large sweeping barrier systems is required.
- 3. Where fast response is required.

# B. Description of Approach

- 1. The following components are required:
  - a. Dedicated skimming vessel: This is a skimming vessel designed specifically for skimming operations, and usually includes a fixed skimming mechanism, integral herding boom arms (to increase sweep width), recovered oil tankage, and support equipment (pumps, hoses, crew facilities, etc.). Other pollution control functions are sometimes included in the design to increase operating flexibility.

For rough weather use, a dedicated skimmer should have, in addition to the above, the following characteristics:

- . The vessel should provide a stable working platform for personnel. This implies a length of 160 feet or more for Sea State 4 or higher.
- . The skimming mechanism should have a high encounter rate with the oil. This implies a wide beam since herding boom arms become impractical in higher sea states.
- . The skimming mechanism should have minimum relative motion with the water. Non-surface-piercing concepts are more likely to be successful.

See Table 5.3 for characteristics of specific dedicated skimmer models.

- b. Bulk storage facilities for recovered oil/water mixtures.
- c. Slick surveillance function for directing the vessel to new patch of oil (other vessels, aircraft).
- Upon notification of a spill, the skimmer would be dispatched immediately to the vicinity of the spill.
- Surveillance vehicles (boat, aircraft) would proceed to the spill site to direct the skimmer to the thicker regions of the slick. Slick trajectory forecasting would be utilized also.
- Recovered oil would be periodically off-loaded to bulk storage facilities.

# C. Variations on Basic Approach

- 1. Bulk storage can be provided in two ways:
  - a. At-sea transfers from onboard storage to large barges or tankers maintained in the vicinity of the spill (difficult operation in extreme weather), or direct to disposal facilities.
  - b. Transfers to shore-side tankage, via pipelines, tank trucks, or vacuum trucks brought to pier-side (time-consuming for remote spill).
- In relatively calm conditions the skimmer could be utilized with long containment barriers attached to increase the sweep width (see Section 4.2.2).

### D. Advantages

- Provides a relatively small, self-contained, and highly maneuverable skimming system.
- 2. Rapid response. All required facilities are onboard and ready to operate.
- 3. Good availability. Priority is to emergency skimming.
- 4. Simple to mobilize because no equipment must be installed.

- 5. Crews are well trained in conducting skimming operations.
- 6. Skimming speeds from 1 to 3 knots may be feasible (special designs not available at this time may be capable of 6 to 10 knot skimming. Slick encounter rates may still be small, however, because of the limited width of the skimming mechanism and the inability to use herding boom arms).

# E. <u>Disadvantages</u>

- Almost all skimmers of this type located in U.S. waters are too small to be seaworthy in extreme weather operations.
- 2. Because of their specific designs, available skimmers are limited in the other work they can do, and therefore costs may be high.
- Skimming mechanisms are generally fixed to the hull, and therefore have poor conformance with wave profiles in higher sea states.
- Rigid sweeping boom arms typically present on many skimmers are not effective in higher wave conditions.
- Onboard oil storage is generally limited, possibly limiting effectiveness in large spills.
- Skimming rates are relatively low (compared to barrier systems).
- 7. Transit speeds may be lower than for other skimming methods because of the peculiar shape of the hull in many cases.

### F. Special Problems/Techniques for Extreme Weather

 Adequately sized and properly outfitted skimming vessels are mandatory. The skimming mechanism should be designed from the motions of the vessel, or else recovery and/or throughput efficiencies will be low (effective oil-water separators will help improve recovery efficiency).

- 2. If bulk oil storage is provided by a barge that has been towed to the vicinity of the spill, transfers from a dedicated skimmer may be more easily made in higher sea states if the barge is first taken in tow by the skimmer itself. Transfers can then be made by pumping the oil through a floating or suspended hose.
- 3. Downwind skimming may improve skimming efficiency, because the frequency of wave encounter is reduced and also skimmer vessel motions are minimized.

# G. Planning Considerations

- 1. Time Plans: Figure 4.2 (Section 4.2.1) shows an example Time Plan for the case when a skimmer can be dispatched directly to a slick, and transfers of recovered oil to bulk storage are made to a large barge at sea. This example shows how the time in obtaining a bulk storage facility can limit the effectiveness of a rapid response technique such as a dedicated skimmer.
- 2. Decision Process: If dedicated skimmers are available, and are capable of operating (and surviving) in the environment at the spill site, they should be dispatched immediately whether or not other response techniques are also being considered for use. Figure 4.8 shows a brief outline of the more significant considerations in deciding to utilize sweeping barriers and skimmers, assuming sea conditions are satisfactory for the system under consideration.
- 3. Planning Checklist: See Table 4.4.

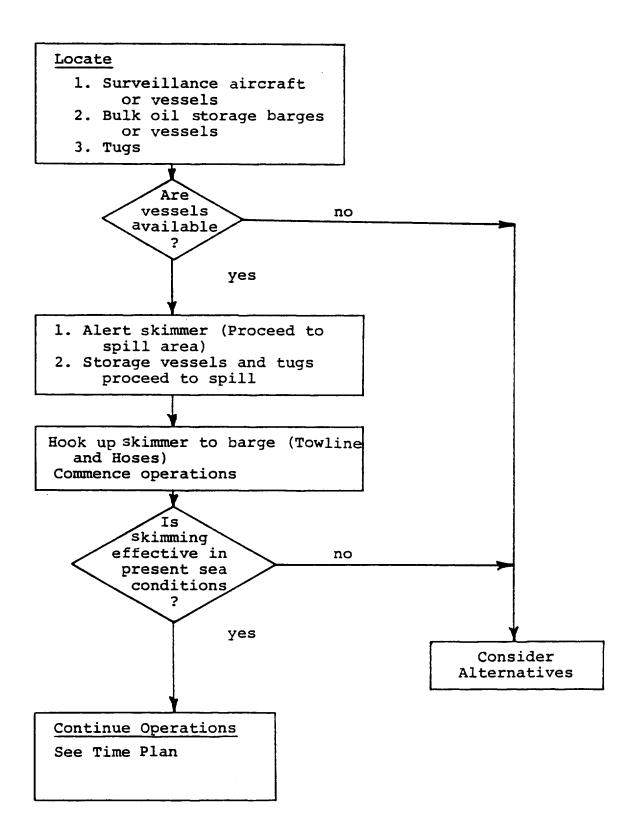


FIGURE 4.8 DEDICATED SKIMMER CONSIDERATIONS

## TABLE 4.4

## DEDICATED SKIMMER -- PLANNING CHECKLIST

1. Assessment completed (see Section 2.4)?

Special consideration in assessment:

- a. Slick thickness (approximate, in patches and windrows)
- b. Slick area coverage and distribution (windrows, patches, etc.).
- c. Projected intercept areas and times of arrival of recoverable slick fractions at these areas.
- d. Rate of recoverable slick formation.
- e. Wave conditions.
- f. Distance from port.
- 2. Estimates made for:
  - a. Time available for cleanup to prevent resource damage?
  - b. Average rate of skimming required?
  - c. Number of skimming systems required?
  - d. Number of receiving vessels needed?
- 3. Information available on:
  - a. Location of skimmer?
  - b. Location of bulk receivers and availability? Types?
  - c. Response times?
  - d. Location of disposal facilities for recovered oil?
- 4. Selections made for:
  - a. Skimmers?
  - b. Barge or other towable bulk storage receivers?
    - . pumps and/or hoses?
    - . personnel protection aboard barge?

- c. Recovered oil off-loading sites
  - . supplementary pumping equipment?
  - . tank trucks?
  - storage tanks?
  - . disposal sites?
  - . debris handling?
- d. Surveillance methods
  - . aircraft?
  - . vessels?
  - . special equipment for estimating slick thickness?
- e. Personnel
  - . additional skimmer crews?
  - . surveillance crews?
  - . barge crews?
  - . other?
- 5. Plans made for:
  - a. Contacting/mobilizing skimmers? Barges and tugs?
  - b. Arranging access to oil off-loading piers?
  - c. Skimming patterns?
  - d. Surveillance patterns?
  - e. Documenting operations?
    - . operations log
    - . determining cleanup effectiveness
    - . updating slick location and configuration
    - . photography
  - f. Schedule for refueling? Crew changes?
- 6. Contingency plans made for:
  - a. Booming of environmentally sensitive areas?
  - b. Dispersant application if skimming is ineffective?
  - c. Survival operations?
- 7. Safety considerations (see Appendix A)?

# 4.2.4

#### Approach: Dispersants, Vessel Applied

#### A. Applications

- For thin, wide-spread slicks where skimming is likely to be ineffective.
- 2. Where the combination of ecological, social, and economic damage caused by dispersed oil would be less than that caused by untreated oil.

# B. Description of Approach

- Permission must be obtained in accordance with Annex X of the National Contingency Plan.
- 2. The following components are required:
  - Bulk supplies of concentrated self-mixing dispersants. See Table 5.5 for a list of EPA accepted dispersants. Consult manufacturers for specific properties.
  - b. Dispersant storage and bulk transport system.
  - c. Spraying system to apply the dispersant, including pumps, hoses, spray booms, and support hardware. A typical setup is shown in Figure 4.9 based on the Warren Spring Laboratory (WSL) system (see Table 5.5 for comparative features of this and similar systems). This system consists of spray booms, approximately 15 feet long, which are suspended over each side of the vessel with a supporting and deploying framework. Towed breakerboards (pallets) can be used to provide additional turbulence. A typical spraying system mounted on a vessel can spray a swath 60 feet wide at a speed of 8 knots. This will provide a coverage of approximately 67 acres/hour per vessel.
  - Vessels suitable for conducting spraying operation: General requirements for a vessel suitable for operations in rough weather are:
    - . 160 feet or longer (for Sea State 4 and greater).
    - . Capable of maneuvering in sea states from 4 to 6 (for extreme weather use).
    - . An open deck for mounting spray booms.
    - . On-board storage for dispersant (36,000 gallons would permit 30 hours of spraying at 20 gpm), or open deck space for portable tanks.

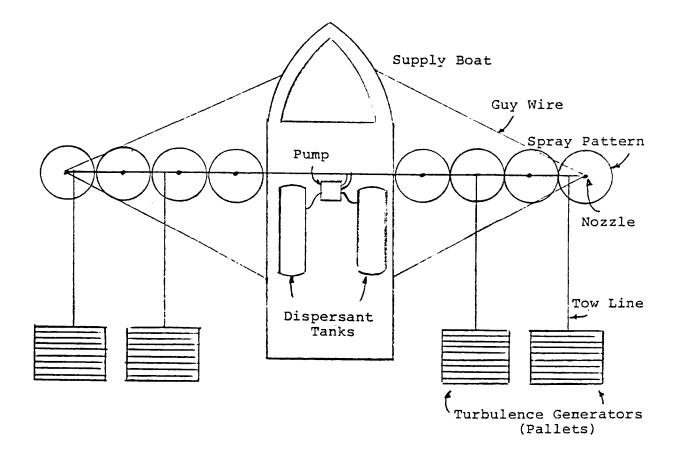


FIGURE 4.9 DISPERSANT SYSTEM - VESSEL APPROACH

Some vessels that might be suitable include buoy tenders, some Navy ships, fishing vessels and offshore supply boats.

- e. Surveillance system for directing spray boats to the slick (spotter aircraft or patrol boats)
- Spray vessels would be obtained, outfitted for the operation, and dispatched to the staging area for dispersant loading.
- Surveillance aircraft would be obtained and flown to the spill area as soon as possible. Slick surveillance might be supplemented by computer forecasting of oil trajectory. Vessel surveillance should be conducted, also.
- 5. Bulk dispersant supplies would be provided to the staging area for loading onto the spray boats.
- Spray boats would conduct spraying operations as directed by surveillance vehicles and/or planned patterns. Resupply vessels as necessary.
- 7. Record results of operations.

# C. Variations on Basic Approach

- Bulk supplies of dispersant can be provided in several ways. Because of the large quantities that may be required careful planning is required for logistic support.
  - . Use tank trucks to bring dispersant from remote storage to dockside, and then fill on-board tanks
  - . Provide bulk storage in a barge, which is towed to the spill site for at-sea transfer to tanks onboard the spraying vessels (limited to less severe sea states)
  - . Provide dispersant in drums directly to the vessel (limited to small spills)

### D. Advantages

- 1. Wind drift of slick is reduced if slick is dispersed.
- 2. Biodegradation of oil is enhanced.
- 3. Dispersed oil has less tendency to stick to solids.

- 4. Sea state capability is high compared to most skimming methods (less than aircraft application, however).
- 5. Can provide a quick-response capability if vessels are pre-adapted for spraying equipment.
- 6. Efficiencies can be better than for aircraft-applied dispersants because of slower and more controlled rate of application.

# E. Disadvantages

- Unless the OSC and the RRT have conducted the necessary contingency planning for the use of chemical agents, the U.S.E.P.A. approval process specified in Annex X of the National Contigency Plan may prove to be too time-consuming to permit the use of dispersants.
- Long-term environmental effects of dispersants and dispersed oil are not well understood.
- Bulk supplies of dispersants are not normally available, nor are the tankage and facilities that are required to handle them.
- Dispersants are generally not as effective on thick slicks and viscous oils.
- 5. High costs of dispersants.
- Vessels may not be available when needed, or may lack sufficient storage capacity for dispersants.
- Generally a slower response potential than aerial techniques, depending on the amount of per-adaptation of planes.

### F. Special Problems/Techniques for Extreme Weather

- The use of breaker boards (turbulence generators) will probably not be necessary in higher sea states, even when non-self-mixing dispersants (concentrates) are utilized.
- 2. If bulk dispersant supply is provided by a barge that has been towed to the vicinity of the spill, transfers to the spraying vessel may be more esily made in higher sea states if the barge is first taken in tow by the spraying vessel itself. Transfers can then be made by pumping the dispersant through a floating or suspended hose.

# G. Planning Considerations

1. Time Plans: Figure 4.10 shows a representative Time Plan for a vessel-applied dispersant operation. This case is comparable to the aircraft-applied case, in which dispersant replenishment is provided by a barge towed to the site of the spill.

The principal time constraints, other than the approval (permission) process, will probably be in obtaining and preparing the spraying vessels for operation, and in replenishing the vessels if on-board capacities are limited. Serveral vessels will be required if the spill covers a wide area.

- Decision Diagram: Assuming that application of dispersants by vessel is desirable, the general considerations to be made in determining if it is feasible are outlined in Figure 4.11. A decision guide for determining the desirability of using dispersants is being prepared by the EPA.
- 3. Planning Checklist: See Table 4.5.

FIGURE 4.10 - TIME PLANS FOR VESSEL-APPLIED DISPARSANT SYSTEM AND AIRCRAFT-APPLIED DISPERSANT SYSTEM

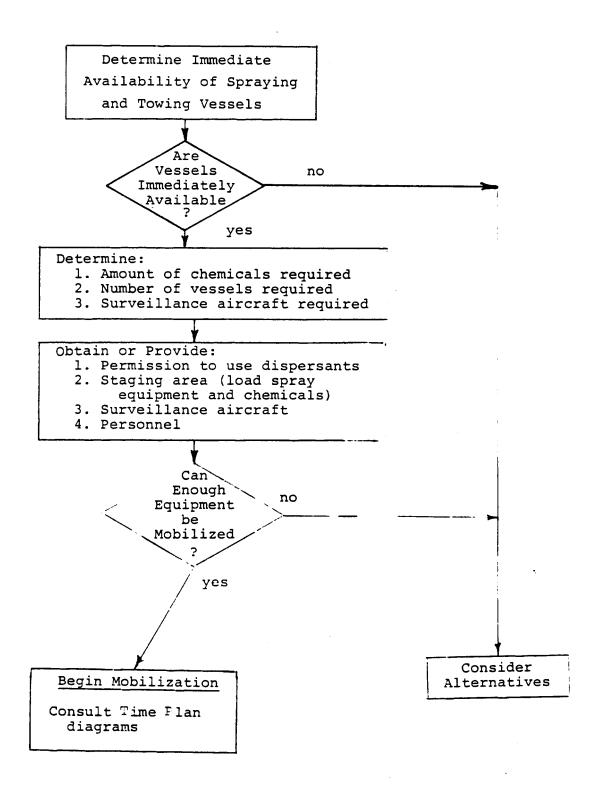


FIGURE 4.11 VESSEL APPLIED DISPERSANT SYSTEM CONSIDERATIONS

### TABLE 4.5

#### DISPERSANTS, VESSEL-APPLIED -- PLANNING CHECKLIST

1. Assessment completed (see Section 2.4)?

Special considerations in assessment:

- a. Slick thickness (approximate)
- b. Slick area coverage and distribution (windrows, patches, continuous film, etc.)
- c. Projected impact areas and times of slick arrival at shoreline, or other environmentally sensitive regions.
- d. Location of sensitive areas (from Action Plans)
- e. Rate of slick formation.
- 2. Estimates made for:
  - a. Time available for application to prevent resource damage?
  - b. Rate of dispersant application required? (Examine properties of individual EPAaccepted dispersants. Ratios of dispersant to oil may vary form 1:1 to 1:50, with 1:10 being a good average for initial planning, depending on the dispersant type. Efficiencies can be expected to be better than for aircraft.)
  - c. Number of vessels and spraying systems required?
  - d. Total quantity of dispersant required?
  - e. Number of supply vehicles required (tank trucks, barges)?
- 3. Information available on:
  - a. Location of dispersant storage sites? Distances involved?
  - b. Quantities/type stored? Storage mode?
  - c. Response time?
  - d. Location of suitable docks? Other vessel loading facilities?

- 4. Selections made for:
  - a. Surveillance vehicles
     . number and type aircraft and/or vessels?
  - b. Spraying vessels
    - . number?
    - . type?
    - . storage capacity? Does extra storage capacity have to be installed?
  - c. Spraying equipment
    - . number?
    - . type? (see Figure 4.9 for representative type)
  - d. Staging locations
    - . docks/piers?
    - . airstrips (surveillance aircraft)
  - e. Logistics support
    - . tank trucks capacity and number?
    - . barges capacity and number?
  - f. Personnel requirements
    - . spraying system operators?
    - . barge/loading crews?
    - . spotters?
    - . other?
- 5. Plans made for:
  - a. Obtaining required equipment?
  - b. Pattern for applying dispersant on slick
  - c. Schedule for resupply? Refueling? Crew changes?
  - d. Documenting operation?
    - . operations log
    - . mapping treated areas
    - . recording dosages
    - . updating slick location and configuration
    - . determining effectiveness of treatment (visual, water samples, infrared and other electronic techniques by CG surveillance planes)
    - . photography

- e. Obtaining required permission to apply dispersants (EPA). sampling oil
  - . determining effect of specific dispersant
- 6. Contingency plans prepared for:
  - a. Booming of environmentally sensitive areas?
  - b. Use of spraying aircraft?
  - c. Cleanup operations in case slick proves to be sufficiently unaffected by dispersant treatment?
  - d. Survival operation?
- 7. Safety consideration (see Appendix A)

# 4.2.5

Approach: Dispersants, Aircraft Applied

#### A. Applications

- 1. For thin, wide-spread slicks where application by vessel, or the use of skimmers, would be too slow or ineffective.
- For the sea state range where vessel application (or skimming) is impractical but where a slick will continue to exist and pose a threat to the coastline or other environmentally sensitive area.
- 3. Where the combination of ecological, social and economic damage caused by dispered oil would be less than that caused by untreated oil.

# B. Description of Approach

- 1. Permission must be obtained in accordance with Annex X of the National Contingency Plan.
- 2. The following components are required:
  - a. Bulk supplies of concentrated self-mixing dispersant (see Table 5.5 for presently available types.).
  - b. Dispersant storage and bulk transport system.
  - c. Aircraft for spraying. Various types of aircraft can be used, but all must be specially outfitted for dispersant spraying, and preparation must be made well ahead of time to be able to obtain the aircraft on short notice.

Typical aircraft (commercially available) include:

- Helicopters, utilizing an externally-slung crop spraying apparatus with special nozzles (for large droplet formation) -- low capacity (100 to 600 gallons)
- Light planes equipped for crop spraying, with special nozzles (e.g. Piper Pawnee) -- low capacity (100 to 150 gallons).
- . DC-4 (C54) with special apparatus installed in plane 2,500-3,000 gallon capacity.
- . DC-6 with special apparatus -- 2,500-3,000 gallon capacity.
- . Super Constellation with special apparatus 3,500 gallon capacity.

- d. Surveillance aircraft equipped with oil detection equipment or spotters.
- Spray planes would be Obtained, prepared for operation and flown to the staging airfield.
- 4. Surveillance aircraft would be obtained and flown to the spill area as soon as possible. Slick surveillance might be supplemented by computer forecasting of oil trajectory.
- 5. Dispersants would be loaded onto tank trucks and transported to the staging airport.
- Trucks and spray planes would continually shuttle dispersant from storage areas to the oil spill until complete dispersion of the oil had been effected, or until further application was no longer practical or effective.
- 7. Record results of operations.

# c. Variations on Basic Approach

Supplies of dispersants can be provided in several ways. Careful planning is required to be able to obtain, deliver, and store the dispersants at convenient airports in the quantities needed for a particular spill. Possibilities include:

- . Permanent field storage tanks of dispersant at preselected airports, with shuttle tank trucks for filling aircraft.
- . Storage at other remote locations with a fleet of tank trucks for delivery direct to aircraft.
- . Large capacity centralized barge storage that can be towed to nearby unloading site, with shuttle tank trucks for delivery to aircraft.

#### D. Advantages

- 1. Wind drift of slick is reduced if slick is dispersed.
- 2. Biodegradation of slick is enhanced.
- 3. Dispersed oil has less tendancy to stick to solids.
- 4. Aircraft and personnel are not subject to sea conditions.
- 5. Provides rapid coverage of wide area, thin slicks.
- 6. Provides highest sea state operating capability.

#### E. Disadvantages

- Unless the OSC and the RRT have conducted the necessary contingency planning for the use of chemical agents, the U.S.E.P.A. approval process specified in Annex X of the National Contingency Plan may prove to be too time-consuming to permit the use of dispersants.
- Long-term environmental effects of dispersants and dispersed oil are not well understood.
- Aircraft application equipment is not common and considerable planning and committment will be required to ensure a rapid response.
- Bulk supplies of self-mixing dispersants are not normally available, nor are the tankage and facilities that are required to handle them.
- 5. Self-mixing dispersants are not generally as effective of viscous oils or thick slicks.
- 6. Additional aircraft are required for spotting slicks.
- 7. High winds can cause inefficient dispersant application.
- 8. Limited capacity onboard aircraft for a single sortie.
- 9. High costs of dispersants.
- Lower efficiencies than for vessel application because of less controllable application conditions (drift of sprayed dispersant due to wind, loss of dispersant to evaporation before contact with surface).
- F. Special Problems/Techniques for Extreme Weather
  - Higher sea states and winds can make a slick more difficult to see and treat. Spotter aircraft and surface markers are especially important in tracking the untreated slick between sorties of the dispersant aircraft. Lower flight elevations and more path overlap would be helpful in improving application efficiency.
  - 2. Natural dispersion by breaking waves and turbulence will occur at a more repid rate as the sea state increases. At some point this process will become more effective than adding dispersant, and dispersant application can be terminated. As the weather subsides look for reappearance of oil on the surface.

## G. Planning Considerations

 Time Plans: Figure 4.10 (Section 4.2.4) shows a Time Plan for a large spill in which the bulk of the dispersant is contained in a large barge sited at a location 200 miles away. The application aircraft are assumed to initially fill their tanks from a land-based supply point located a considerable distance from the spill. After the bulk supply is towed to a nearby staging site, shuttle tank trucks refill the planes on a greatly accelerated schedule.

The times involved will depend on the type of aircraft, staging site, etc. Further details on flight times, loading times, etc., are included in references (6) and (7).

- Decision Diagram: Assuming that application of dispersants by aircraft is desirable, the general considerations to be made in determining if it is feasible are outlined in Figure 4.12. A decision guide for determining the desirability of using dispersants is being prepared by the EPA.
- 3. Planning Chekclist: See Table 4.6.

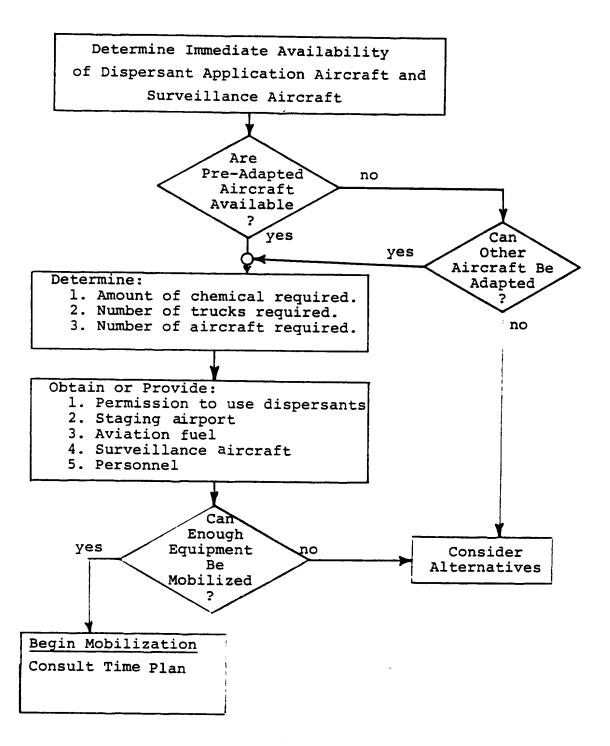


FIGURE 4.12 AIRCRAFT APPLIED DISPERSANT SYSTEM CONSIDERATIONS

### TABLE 4.6

### DISPERSANTS, AIRCRAFT-APPLIED -- PLANNING CHECKLIST

1. Assessment completed (see Section 2.4)?

Special considerations in assessment:

- a. Slick thickness (approximate).
- b. Slick are coverage and distribution (windows, patches, continuous film, etc.).
- c. Projected impact areas and times of slick arrival at shorelines or other environmentally sensitive regions.
- d. Location of sensitive areas (from Action Plans).
- e. Rate of slick formation.
- 2. Estimates made for:
  - a. Time available for application to prevent resource damage?
  - B. Rate of dispersant application required (examine properties of individual EPA-accepted dispersants. Ratios of dispersant to oil may vary from 1:1 to 1:50 with 1:10 being a good average for initial planning, depending on the dispersant type).
  - c. Number of aircraft required (examine individual characteristics)?
  - d. Number of tank trucks required?
  - e. Total quanitity of dispersant required?
  - f. Fuel requirements for aircraft?
- 3. Information avaialable on:
  - a. Location of dispersant storage sites? Distances involved?
  - b. Quantities/type stored?
  - c. Response time?
  - d. Location of suitable airfields?
  - e. Fuel sources?

- 4. Selections made for:
  - a. Surveillance aircraft
    - . number?
    - . type?
  - b. Dispersant application aircraft
    - . number?
    - . type?
    - . special equipment which must be installed?
    - . fuel quantity?
  - c. Staging airport?
  - d. Tank trucks
    - . number?
    - . type (dispersant or fuel)?
    - . capacity?
  - e. Personnel required
    - . aircraft crews?
    - . aircraft ground crews?
    - . truck drivers?
    - . dispersant storage area pumping crew?
    - . supply personnel (food, etc.)?
  - f. Vessels and crews (for surveillance and inspection, if weather permits)?
- 5. Plans made for:
  - a. Obtaining required equipment?
  - b. Pattern for applying dispersant on slick?
  - c. Schedule for resupply? refueling? crew changes?
  - d. Documenting operations?
    - . operations log
    - . mapping treated areas
    - . recording dosages
    - . updating slick location and configurations

- . determining effectiveness of treatment (visual, water samples, infrared or other electronic techniques by CG suveillance planes)
- . photography
- e. Obtaining required permission to apply dispersants (EPA). sampling oil
  - . determining effect of specific dispersant
- 6. Contingency plans made for:
  - a. Booming of environmentally sensitive areas?
  - b. Use of spraying vessels?
  - c. Cleanup operations in case slick proves to be sufficiently unaffected by dispersant treamtment?
- 7. Safety considerations (See Appendix A)

# 4.2.6

Approach: Microbial Elimination of Oil Spills

# A. Applications

 Final cleanup of oils spills, after the bulk of the oil has been removed by other means.

### B. Description of Approach

- 1. The following components are required:
  - a. Microbial agents: All microbial agents must be accepted by the U.S.E.P.A. in accordance with Annex X of the National Contingency Plan.
  - b. Application hardware: Conceivable application methods include:
    - . Aircraft: Conventional crop disting planes could probably be adapted to apply powered agents.
    - . Vess3els: Vehicle-mounted crop dusting equipment could be used. If the microbes can be mixed with water, conventionaldispersant spraying equipment can be used.
    - . Hand-operated machinery: For shoreline or small boat application (seeders, hand-casting, etc.)
- Apply the agent to the slick in the presence of adequate aeration (implies application to relatively thin slicks).
- As the assimilation process is very slow, booming may have to be employed to prevent shoreline contamination by offshore slicks.

# C. Advantages

- Achieves natural degradation of oil tonon-toxic waste products.
- Achieves cleanup at a faster rate than by depending on naturally occurring bacteria (e.g., where no cleanup effort has been applied at all).

- 3. Precludes the need for other cleanup equipment.
- 4. Rough seas can aid the assimilation process by helping in the oxygen transfer process.
- D. Disadvantages
  - 1. The processes for using microbes are undeveloped at this time. The technology is still basically in the R&D stage.
  - 2. The process is very slow, at best. With adequate nutrients available (nitrogen, phosphorous) the limiting factor in the assimilation rate would be the oxygen transfer to the slick from the air. In a 30-knot wind, for example, it would take at least 2 to 3 days to assimilate a slick 125 microns thick. Lower wind speeds would result in less oxygen transfer and therefore slower assimilation rates.
  - 3. Microbe costs would be high: At a 1:80 application ration (10 lb. agent per acre, for a 125 micron slick), the projected microbe cost would be on the order of \$25,000,000 to clean up a 100,000-ton spill. Significant quantities of agents are not available at the present time. Therefore, the process will probably be limited to the treatment of small spills.
  - 4. Shelf life of microbe mixtures is not unlimited.

# E. Planning Consideration

Because techniques for lareg-scale application of microbial/nutrient agents have not been developed, no planning guidelines are presented. However, many of the considerations in applying dispersants by vessel or aircraft would probably be applicable.

# 4.2.7

Approach: Slick Burning

- A. Applications
  - Burning thick slicks of low eiscosity oil in calm water.

### B. Description of Approach

- 1. The following components are required:
  - a. Ingniters: Flame throwers, napalm, pyrotechnics, and burning projectiles have been used with varying degrees of sucess. Air drop, use of a device such as a tear-gas canister, rifle-launcher, or a catapult can be used for delivery of the igniter to the slick.
  - b. Wicking agents: A number of wicking agents have been tried, among them being straw, porous silica, porous ceramics, and a variety of buoy-type floating wicks. Special equipment may be required to apply certain types of agents to the slick. Blowers, hand spreading, or similar techniques can be used. It is possible that an oil-based slurry of agent could be applied, which would make spraying techniques usable, and would provide a pre-wetted wick for the slick.
  - c. Surveillance vehicles to locate suitable patches of oil.
  - d. Vessels to transport the wicking agents and igniters (unless air drops are used) to the spill.
  - e. Equipment to cleanup the unburned residue (booms, debris handling equipment).
- The wicking agent is broadcast onto the slick and allowed to wet with the oil.
- 3. Igniters are dropped onto the slick to ignite the oil.
- The unburned oil and debris are collected by booms, and cleaned up.

### C. Variations on Basic Approach

 Combustion of a thin slick is difficult to sustain because the heat is conducted away into the underlying water, and the wicking agent cannot easily "draw" oil from a thin slick. To maintain a thick pool of oil for more efficient burning, boom-like containment systems have been proposed. These are still in the development stage, however, and they have not yet been shown to be feasible for large-scale use.

### D. Advantages

- Under optimum conditions a large percentage of oil can be disposed of without skimming or dispersant application.
- 2. Burnable debris can be partially disposed of in-situ.

# E. <u>Disadvantages</u>

- Slick burning is usually difficult to sustain, even in calm water.
- 2. A large amount of residue is usually left over (a typical result from an application of wicking agent at 2 weight percent of an oil slick yields a residue of wicking agent and tarry solids comprising 15 weight percent of the weight of the slick). This residue constitutes an additional pollution problem to deal with.
- 3. The wicking agent must be replenished as it becomes pluggesd with tars and residuces.
- 4. Viscous or weather oils may not burn at all.
- 5. Does not work in waves.
- The low bulk density of most wicking agents requires large volumes to be handled (on the order of 25 percent of the slick volume).

# F. Planning Considerations

Because a successful technique for burning typical oil slicks has been developed, no planning guidelines are presented.

### 5.0 RESPONSE EQUIPMENT AND SYSTEM

This section provides more specific information and estimates on the operating characteristics and limitations of the specific equipment items that can be used in response operations. The topics include equipment for preventing pollution from vesses1, skimming and dispersing equipment, and common equipment such as oil storage containers, work vessels, etc. Data sheets on the more commonly available items are also contained in Appendix H.

# 5.1 Portable Pumping Systems

Table 5.1 lists the principal characteristics for several portable pumping systems that have been designed for or can be used for cargo pumping. Most of them are available in the USA, including the Framo pumps. Several of these systems are available through oil pollution control contractors.

The pump rate comparison column in Table 5.1 shows the pumping rate at one head and for water only. The actual capacity of a given pumping system will depend on the oil viscosity, elevation difference between fluid levels (vessel tank to receiver), and hose length and diamter.

The size of the transfer hose will probably be dictated by availability. The length required will depend on the juxtaposition of the stranded vessel and the receiver. The hose pressure rating must also be considered, but ADAPTS pumps, for example, operate at relatively low (50 psi or lower) discharge pressures. A floating hose is preferred if the distance between vessels is so great that the hose must be in the water. Table 5.2 is an examploe of the handling capabilities for different size hoses of different lengths. This table is based on a flow of crude oil at 130 period () F and 340 S.S.U. entering the hose at 20 psi with no elevation difference between inlet and outlet fluid levels. Note that in many cases more than one pump discharge could be transported through a single hose. Other capacities can be determined TABLE 5.1. EMERGENCY CARGO PUMPS

PUMP	ORIGIN	SYSTEM TYPE <sup>1</sup>	PUMP SIZE DIAMETER <sup>2</sup> (in)	PUMP WEIGHT (1bs)	PUMP RATE COMPARISON <sup>3</sup> (9pm)	PRIME MOVER POWER (HP)	TOTAL SYSTEM WEIGHT* (lbs)
Frank Mohn AS Framo TK4 Framo TK5 Framo TK6	Norway	רס הס הס	11.8 11.7 20.5	132 154 200	680 1,144 2,752	70 110 160	い。3,650 い。2,575 い。2,620
Marlow Pumps Hydra Merse 6MFA-052	USA	ŭ	13.5	~	∿ 1,000	~ 60	2
Ocean Science & Engineering APTS	USA	C)	0.11	225	980	43	1 ,325
Prosser 40 HP - Model 41000	USA	م	12.75	295	870	40	4 ,295
Seaward International STOPS	USA	ø	10.0	200	1,030	43	1,300
Sloan 10-inch	USA	ŋ	10.0	2	3,050	06	ړ
Thune-Eureka AS PUS 130 (CCN 100) PUS 500 (CCN 150)	Norway	רס הס	10.6 12.2	133 155	1,016 2,200	~ 90 ~ 150	2,330 3,100
US Coast Guard ADAPTS lo-inch, 2-stage ADAPTS 8-inch, 1 stage Stripper Pump	USA	נה וה נה	10.5 12.5 12.1	<b>455</b> 264 290	920 900 733	4 4 4 3 3 3	1,755 1,564 1,590

Notes:

<sup>1</sup> System Type - a. Diesel-hydraulic b. Diesel-electric <sup>2</sup> Pump Size Diameter - overall pump diameter which determines whether pump will fit through 12.5 - inch Butterworth fitting.

<sup>3</sup> Pump Rate Comparison - the pumping rate in gallons per minute of water with 70 feet of head.

\* Total System Weight - the weight in pounds of the major system components (i.e., pump, power supply, and fluids (fuel and hydraulic oil)). Weight of hoses is not included.

for various viscosities by standard methods. Appendix E present representative pumping capacities for the ADAPTS 10-inch pump as a function of hose length (Standard 6-inch ADAPTS hose) and viscosity.

# TABLE 5.2 FLOW HANDLING CAPABILITIES OF VARIOUS

# HOSE SIZES (GPM)

#### Hose Lengths Hose Size 50' 100' 200' 300' 6" 3000 2300 1600 1300 8" 6500 4800 3300 2700 10" 11000 8000 5800 4700 12" 18000 13000 9000 7500

### Hose Lenghts

A new pumping system for more viscous oils is being procured by both the Coast Guard and SUPSALV. These units will have characteristics similar to the Framo TK5 or Prosser units.

Other pumping systems can also be used for oil or water (ballasting) pumping in certain cases:

- . <u>Ship's pumps</u>: Actual capacities can usually be obtained from the ship's master or crew. As a rule of thumb, the total pumping capacity of a large tanker is roughly 10 percent of the deadweight tonnage capacity per hour.
- . <u>Salvage pumps</u>: These de-watering pumps are usually available through the USN SUPSALV or commercial salvage companies. Capacities of several representative sizes are presented in Appendix E.

Positive displacement pumps: These pumps are designed to pump viscous fluids, but but are not generally available as complete portable pumping systems. Also, size and weight usually perclude utilizing these pumps as submersible units. Representative capacities as a function of oil viscosity are presented in Appendix E.

For viscous cargos, or for cargos that have cooled considerably as a result of tanker heating system failures, externallysupplied heating systems may be needed. Such systems are usually assembled specifically for particular salvage operations, and are not available off-the-shelf. SUPSALV has had experience in this area.

# 5.2 Skimmers

Table 5.3 shos a comparison of skimmers that have been designed for harbor or openwater use. Small open-water skimmers are not included. The system types in which the various skimming systems are generally used are indicated (see Table 4.1 for type description), as well as the basic skimming mechanism utilized (Appendix B). The sea state capabilities are for the most part based on engineering judgments, product literature, experience or observations on similar equipment. Factors considered in the sea state assessment include the following:

- Performance in terms of processing rates, efficiency, etc.
- 2. Operational control of the integrated system
- 3. Personnel capabilities
- 4. Mobilization and setup of the system
- 5. Support logistics during operation
- 6. Reliability of equipment and systems
- 7. Long-term enviromental effects
- 8. Survivability in higher sea states

In Appendix H, selected product literature is presented to provide additional information on equipment details.

CAPABIL ITIES
SKIMMER
011
5.3.
TABLE

L	SKIMNER	ORIGIN	LENGTH (ft)	SYSTEM TYPE <sup>1</sup>	SKIMMING MECHANISM <sup>2</sup>		TEM OPI	ERATIO	A IN SE	SYSTEM OPERATION IN SEA STATES <sup>3</sup> 2 3 4 5 6	 SURVIVAL SEA STATE	OIL TREATMENT RATE COMPARISON <sup>5</sup> (9pm)	STORAGE CAPACITY <sup>6</sup> (gal)
· · · · · · · · · · · · · · · · · · ·	AB Gustaf Terling Destroil DS 150 DS 210 DS 210 DS 310	Sweden	5 8 7 5 18 5 18	1.8.2 1.8.2 1.8.2	~ସ /ପ /ପ	<b>۲</b> ۳0	<b>6</b> 6 4	ه م			 94+ 94+	70 230 450	None None None
	Bennett Pcllution Controls Mark 3 Mark 4 Mark 6	USA	28 40 42	1.8.1 1.8.1 1.8.1	999 000	<u>и</u> с и	4 4 4 4 4 4 4 4 4	<u> </u>			 	100 100 100	500 7 2,500
121	Bennex Euroskim System	Norway		I.A.l.c	م	IJ	IJ	 iu-	۰-		 <del>6</del> +	750	None
	Bridgestone S-II · M · L	Japan	38 68 92 8	1.8.1 1.8.1 1.8.1	ססס	кос	مدن	م م ب	۵.		 ₩ <b>4</b> 0	130 180 260	1,300 4,900 16,000
	Crisafulli Pump Co. Aqua Sweeper Small Large	USA	35 35	1.8.1 1.8.1		۵. ۲. ۲.	د <u>د</u> ب	۵.۵			 m m	1007	200
	Centrifugal Systems Limpiamar	USA	94	I.8.1	σ	IJ	G	۴.	¢.		 ور	600	~
	Frank Mohn AS Framo	Norway	1	I.A.1.b	a, b	IJ	 LL.	۹.			 64	500	None
· · · · · · · · · · ·	JBF Scientific Dip 2001 Dip 3003 Dip 5001	USA	38 38 68	1.8.2 1.8.1 1.8.1	ססס	<del>ن</del> د ند رح	4.9	<u>م م بر</u>	م		 ۍ سې ۲	60 <sup>7</sup> 270 <sup>7</sup> 250 <sup>7</sup>	150 4,000 10,000

<sup>1-a</sup>See NOTES at end of TABLE 5.3.

STORAGE CAPACITY <sup>6</sup> (gal)	None	None 400 None	2,000	440 3,800 1,700 3,400 None None	000,00€∿	∼ 750 √ 750 √26,000	
01L TREATMENT RATE COMPARISON <sup>5</sup> (gpm)	と 30 と 250	50 150 750	160	120 2000 2000 2000	1,200	440 170 300 390	
SURVIVAL SEA STATE * F	<b>м</b> 4	5 m m 1 m m m 1 m m m 1 m m m 1 m m 1 m m 1 m m 1 m m m m	e	6 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	6+		
1ES <sup>3</sup> 6							
SEA STATES <sup>3</sup> 5 6							
		۵.		۵.۵.۵	٩		
SYSTEM OPERATION IN 2 3 4	<i>م</i> م	<u>а</u> а ц	٩	م م <sup>م</sup> م م ل ل ل ب ب م	Ц	2 2 2 <b>2</b>	
2 2	۵. ۱۰.	۵. ۲. ۵	٩	<u>م</u> ۱۱ ۱۲ ۱۲ ۱۲ ۵	G	لد لد نر ند	
SYS	шo	н. С С	لد	<u>بر ن ن ن ن بر</u>	U	0000	
SKIMMING MECHANISM <sup>2</sup>	<b>a</b> a	ممم	q	<b></b>	d,e	נפסס	
SYSTEM TYPE <sup>1</sup>	I.A.l.a I.A.l.a	I.A.l.a I.B.l I.A.l.a	I.B.1	1.8.1 1.8.1 1.8.2 1.A.2.5 1.A.2.5 1.A.2.5 1.8.2 1.8.2	1.8.1	I.8.2 I.8.1 I.8.1 I.8.1 I.8.1	
LENGTH (ft)	17 25	23 23 23	33	28 58 37 37	116	20 57 57	
ORIGIN	USA	USA	USA	USA	Japan	Japan	
SKIMMER	Intex, Inc. Vortex 011 Drinker VX-100 VX-200	Lockheed Clean Sweep Model R2002 Model R2003 (raft) OWORS	LPI Corporation 05ED 33	MARCO Pollution Control Class I Class III Class V Class VII Class XI Class XI	Mitsubishi Heavy Industries Seiryu Maru	Mitsui Ocean Development MIPOS-S MIPOS-10 MIPOS-C-15 MIPOS-B-17	

TABLE 5.3. (Cont'd)

122

- - -

1-1 See NOTES at end of TABLE 5.3.

SKIMMER	ORIGIN	LENGTH	SYSTEM TYPE <sup>1</sup>	SKIMMING Mechanism <sup>2</sup>		SYSTEM OPERATION IN SEA STATES <sup>3</sup> 2 3 4 5 6	ERATIO 3	A IN SI	S I STAT		SURVIVAL SEA STATE	01L RATE	0,0
		(11)				1			-	,		(tudg)	(gal)
	France								_				
		i	1.8.2	e	<u>.</u>	۵.	٩				6+	130	None
		1	1.8.2	e -	<u>ه</u>	۵. ۵	۵.۵				- 9 -	260	None
			1.8.2	er er	<b>.</b>	- G	 2 IL.	۵.			+ + 9	460	None
		1	1.8.2	υ QJ	9	G	u.	۵.			64	520 <sup>9</sup>	None
Offshore Devices USCG Skimming Barrier	NSA	I	I.A.2.a	ø	9	G-F	ĹĿ.	F-P	۹.		ŝ	400	None
011 Harvester Mark III	USA	33	1.8.1	a	٤	۵.	۵.				en E	1507	None
011 Mop, Inc. Dynamic Skimmer 2RV	USA	38	1.8.1	σ	ĿĿ.	۹.	٩				m	50	2,000
Quality Marsh Industries Skimjet	NSA	16	I.8.1	R	Ľ	٩	۵.				e	45	4
Shell 011 Co. SOCK (25' wide)	USA	ļ	I.B.2	۴	J	 LL_	۹.	٩			+9	20016	None
Seaward International Spiltrol Huskey	USA	25 42	I.8.1 I.A.2.b	D، موا	u. 0	<u>م.</u> بي	4 <u>-</u>	٩	<u></u>		3 4-5	50 <sup>7</sup> 350	1,176 None
ma Seaskfmmer	England	Ĩ	I.A.1.b	۵	ю	G	٤.,	۵.	<u> </u>		6+	400	None
1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 -													

1-10See NOTES at end of TABLE 5.3.

TABLE 5.3. (Cont'd)

TABLE 5.3. (Cont'd)

Notes:

<sup>1</sup> System Type - Refer to Table 4.1, Spill Mitiqation and Cleanup, for the type of system that the <u>Skimmer</u> is to be used with.

<sup>2</sup> Skinming Mechanism - See Appendix B for further descriptions

- Weir skimmen . Ci di si
- Oleophilic disks Surface-piercing oleophilic belt
- Cyclonic separator SOCK skimmer 9. <del>.</del> . .

Dynamic inclined plane

ъ.

Zero-relative-velocity (ZRV) sorbent mechanism

s Key is: G = Good, F = Fair; P = Poor. These ratings indicate estimated performance of the system as a whole, including barriers, support, etc., when the <u>Skinmer</u> is used with the <u>System Type</u> indicated. A blank suggests that no operation should be

<sup>+</sup> Survival of the entire system, including barriers, etc., is implied. Where equipment can be easily recovered aboard seaworthy

- <sup>5</sup> Oil treatment rate These rates are estimated based on system capacities, slick properties, and operating efficiencies, assuming the ġ.
- Relatively calm seas, implying "Good" steady-state operating conditions -- rates can be expected to drop off to very low values in the "Poor" operating condition. Slick is assumed to be 3 mm thick and uniform viscosity 400 cs (partially weathered crude). Encounter rate is 1 knot for barrier systems (Type I.A) & 2 knots for direct-acting skimmers (Type I.B). þ.
  - <del>၂</del>
- ÷
- Slick encounter width is the barrier opening (400 feet) for barrier systems (Type I.A) å device opening (including small sweep booms, if Fart of the device) for direct-acting skimmers (Type I.B). For barrier systems (Type I.A), at least 2 inches of oil thickening is assumed in the apex. For barrier systems, either the Coast Guard OWOCS or another appropriate type of open-water barrier is used. ئىپ نە

<sup>6</sup> Storage capacity implies integral storage contained on the <u>Skimmer</u>, and not any external bulk storage that may be required.

<sup>7</sup> Utilizing integral sweep arms to increase encounter rate.

Short lengths of herding barrier utilized in VOSS application.

<sup>a</sup> Sweep width includes half the beam of a 30-foot-beam vessel, assuming oil is not pushed away from the hull at low speeds. Performance may be optimistic in the higher sea states. <sup>1°</sup> Still under development.

124

### 5.3 Containment Booms

Table 5.4 presents the characteristics of various containment booms. This table divides the booms into offshore, outer harbor, and inner harbor types. The division has been made somewhat arbitrarily according to the overall height, with booms up to 24 inches high classified as inner harbor types, 24 to 36 inches generally classified as outer harbor types, and 36 inch and over classified as offshore types. Some overlap can be expected in actual performance capabilities, as indicated by the estimated performance/operation ratings in various sea conditions.

The performance/operation rating provides a separate indication of a boom's oil containment ability, which is primarily a function of freeboard, draft, wave conformance, and stability, and its operatability. which is a function of its deployment, handling, control, durability, strength, and general "seaworthiness" characteristics. A low rating in the operation category indicates that at least one of the boom's operational characteristics is objectionable, and the boom should be carefully considered for use in that sea state. For example, the Navy OOC boom is durable and strong, but it is very heavy and difficult to deploy and handle, and requires a long lead time to prepare for operation; it therefore receives a low rating in all sea states.

The operational ratings are also based on <u>relative</u> operatability in the sea states indicated; i.e. the Coast Guard OWOCS is a good choice for a Sea State 3 operation because it can be deployed rapidly and is generally designed for these conditions. It is not necessarily a good choice for Sea State 1, however, because there are other booms that are much easier tohandle and deploy in these conditions, and that will give performance as good as the OWOCS; the OWOCS therefore receives a lower rating in this sea state. TABLE 5.4. OIL BOOM CAPABILITIES - Offshore Booms<sup>1</sup>

		OVERALL				PERFORM	ANCE/OF	PERATI	S NI NO	PERFORMANCE/OPERATION IN SEA STATES		TENSILE	STORAGE	
011 BOOM	ORIGIN	HE IGHT (in)	FREEBOARD (in)	DRAFT (in)	BOOM TYPE <sup>2</sup>	-	2	e	4	5 6	SEA STATE'	STRENGTH <sup>2</sup> (lbs)	VOLUME (ft <sup>3</sup> /100ft)	WE IGHT (1bs/100ft)
AB Sjuntorp Costal Type Open Sea Type	Sweden	83	16 27	22 36	D.4.b.2.A D.4.b.2.A	G/6 G/F	F/G G/G	P/6 F/6	P/F		ধ ধ	11		1 80 1 80 1 80
American Marine Supermax	USA	36	12	24	A.1.a.3.A	6/6	F/6	P/6			4	30,003	911	290
Bennett Pollution Controls 2005m Boom Series 18 Model 24 Series 24 Model 24 Viking Series	USA	48 120	90 53 19	26 26 60	A.2.b.1.A A.2.b.1.A A.2.b.1.A	6/6 6/6 6/F	F/G G/G G/F	P/6 F/6 6/6	P/F F/G	P/F	ৰ ৰ ৩	16,500 25,000		4 328
Bennex K171 Boom KL-8 X-F1 X-F11 XL-F11	Norway	۲ ۲ ۲ 8 8 8 7 8 8 7 8 8 7 8 8 8 8 8 7 8	6000	۲ 2 2 د د د د 18 338 د ۲8	A.3.b.2.C A.3.b.2.C A.3.b.2.C A.3.b.2.C	G/F G/F G/P	6/6 6/6 6/7	F/G F/G F/G F 6/5	P/F P/F -P/5 F/G	P/F P/F	ວວບຕາ	44,100 132,300 132,300 132,300	22 80 80 80 80 80 80 80 80 80 80 80 80 80	872 872 2,012 2,012 2,012 2,012
Goodyear Sea Sentry 12-24 Navy Boom (1/2" Chain)	NSA	36	12	24 24	C.2.b.1.A C.2.b.1.A	6/6 6/F	F/G F/G	9/6 P/6			<del>له</del> س	10,600 18,000	– 128	350 1,280
Hurum Enterprises Flexy II, 36" Flexy High Seas, 72"	USA	36	12 24	24 48	D.1.a.2.8 D.1,2.b,c1.8	F/G G/F	P/F F/F	d/d			6 4	11	- 72	3C0 600
Kepner Plastics Fabricators Standard Sea Curtains AHD2203020FF AHD23030620FF	USA	51	17	34 42	A.2.a.1.A A.2.a.1.A	G∕ F G∕ F	F/G F/G	P/6 P/6			ດເບ	104.CO0 169,000	11	005 1
Compactible Sea Curtains SH018230F SYF0N2435556F		4 19	15 21	26 70	A.2.a.b.1.A A.2.a.b.1.A	9/9 9/9	6/6 6/6	F/G F/G	P/F P/F		សល	95,000 120,000	11	350 1,200
Sea Terder BoomsM BH032206MF		36	12	24	A.2.a.1.B	G/F	F/G	P/F			4	15,000	1	365

•••

<sup>1-e</sup>See NOTES at end of TABLE 5.4.

126

TABLE 5.4. (Cont'd) — Offshore Booms<sup>1</sup>

•

		OVERALL				PERFOR	MANCE/C	DERAT	ION IN S	PERFORMANCE/NPERATION IN SEA STATES <sup>3</sup>		TENSILE	STOPAGE	
01L B00%	ORIGIN	HEIGHT (1n)	FREEBOARD (in)	DRAFT (in)	BOOM TYPE <sup>2</sup>	-	2	m	4	5 6	SEA STATE"	STRENGTH <sup>5</sup> (1bs)	VOLUPE (ft <sup>3</sup> /)COft)	VEICHT (1bs/100ft)
Kleber Balear 3	France	21	21	œ	0.3,4.a or b.	G/F	6/6	F/G	P/F		4	1		177
Norsk Oljelense A/S Purse Seine Oil Eoom	Norway	ļ.	1	1	I.A   A,C.4.b.2.C						i		l	 i
Offshore Devices Coast Guard High Seas Boom (CNOCS)	USA	48	21	27	C.4.b.2.B	G/F	6/6	F/G	P/F		ŝ	~ 50,000	132	1,600
0il Spill Containment Corp Gilfence, 36" Oilfence, 43"	USA	36 48	18 24	18 24	E.5.a.5.8 E.5.a.5.8	9/9 9/9	F/G G-F/G	9/9 9/6			ى ئى 	64,800 96,000	145 185	525 840
Slickbar Heavy Duty Mark 5	USA	36	12	24	C.1.a.2.A	6/6	F/G	P/6			m	10,000		
Trellaborg Troflboom Universal Giant	Sweden	41 59	16 20	25 39	C.4.a.2.B C.4.a.2.B	6/F 6/F	9/9 9/9	F/G 6/6	P/F F/G	P/F	<del>م</del> به	27,500 44,860	11	514 514 1.250
Uniroyal Sealdsocm, 72"	NSA	22	24	48	E.5.a.2.B	G/P	6/6	F/G	P/F		ى	45,600		9 <u>5</u> 0
US Ravy Navy OOC Type Oil Boom	USA	72	24	48		G/P	6/P	F/P	q/q		ۍ ۲	∿ 48,000	1,440	6,850
Vikora Seabcom	England	44	27	17	E.5.b.4.D	9/9	6/6	9/9	F/6	P/F	2	55,000	r 25	152
Welsh Oil-Tech <sup>7</sup> General Purpose Boom Class 3	USA	36	13	23	A.2.a,b.1.A	6/6	F/6 1	P/G	<u> </u>		4	1	1	
khittaker Expandi-011 Boom Sea Boom ∉4300	USA	43	18	25	A.2.b.1.A	6/6	6/6	F/6	P/F		4	16,500	19	353

- - - 127

:-\*See NUTES at end of TABLE 5.4.

TABLE 5.4. (Cont'd) — Outer Harbor Booms<sup>1</sup>

011 800%	ORIGIN	OVERALL HEIGHT (in)	FREEBOARD (in)	DRAFT (in)	BOOM TYPE <sup>2</sup>	PERFOR	AANCE/01	3	DN IN SEA	PERFORMANCE/OPERATION IN SEA STATES <sup>1</sup> 1 2 3 4 5 6	SURVIVAL SEA STATE	TENSILE STRENGTH <sup>5</sup> (1bs)	STORAGE VOLUME (ft <sup>3</sup> /100ft)	WEIGHT (1bs/1coft)
AB Sjuntorp Port & Lake Type	Sweden	28	12	16	D.4.b.2.A	6/6	F/6	P/6			4	1	1	269
American Marine Airmax	NSA	24	12	12	A.2.b.1.A	9/9	F/G	P/F		· · · · · ·	4	20,000	01	 I
Bennett Pollution Controls Perrarent Harbor Boom 30 in 35 in	USA	36	12	18 24	E.5.a.2.A E.5.a.2.A	F/F G/F	P/F F/F	P/P	<b></b>		4 0	35,000 40,000	11	1.200
Type II Class 1 Zoborn Boor		36	12	24	A.l.a.2.B	J.,G	F/6	P/F			e	1	1	1
Series 12 Model 13		90	10	20	A.2.b.1.A	6/6	F/G	P/G			e	5,700	125	180
B.f. Gcodricn Seitoom 36 PFX Seaboom 36 PFS	USA	36	12	24 24	E.5.a.2.B E.5.b.2,4.B	F/F F/F	P/F P/F					10,000 10,000	11	1,050
Environetics Bca Boom Boa Boom II	USA	36 27	12	24 18	E.5.b.l.A E.5.a.l.A	9/9 9/9	F/G F/G	P/F P/F				11	r 7 2 45	
Gcodyear Sea Sentry 9-18	NSN	27	6	8	C.2.b.1.A	6/6	F /G	P/G			e	10,600	I	003
Aurum Enterprises Flexy II, 24"	USA	24	8	16	D.1.a.2.B	F/G	P/F				. <b>m</b>	1	48	260
Kepner Plastics Fabricators Standard Sea Curtains EH9]41609FF Correctible Sea Curtain	USA	30	]2	18	A.2.a.1.A	6/6	F /G	P/F		<del></del>	°.	000, 69	ł	្លះ
SHO11160F Sea Tender Room		30	12	18	A.2.a,b.1.A	6/6	F /6	P/6			2	69,000	1	220
BH3B1405MF		24	80	16	A.2.a.1.8	F/G	P/6				3	10,000	I	290

128

• • •

!-\*See NCTES at end of TABLE 5.4.

TABLE 5.4. (Cont'd) -- Outer Harbor Booms<sup>1</sup>

		OVERALL				PERFOI	MANCE /	PERFORMANCE/OPERATION IN SEA STATES	ION IN	SEA STA		SURVIVAL		STORAGE	tic four
W0C8 110	ORIGIN	HEIGHT (in)	FREEBOARD (1n)	DRAFT (in)	BOOM TYPE <sup>2</sup>	-	2	~	4	2	6 SEI		SIREMUTH (1bs)	(ft 3/100ft) (	
Kleber Acorn 111 Baiear 2	France	36	12	20 21	C.4.a.1.A D.3,4.a or b.	9/9 9/9	F/G F/G	P/G			<u>.</u>	44	11	1	1,005
Metropolitan Petroleum MP-Eoom-Heavy Duty	USA	36	12	24	A.1.a.2.A	6/6	F/G	P/G			<del></del>	4	35,000	93	360
0il Spill Containment Corp Oilfence, 24"	USA	24	12	12	E.5.a.5.B	6/6	F/G	P/G			· ·	 د	48,000	70	375
Seaward International <sup>9</sup> Sea Fence Outer Harbor	USA	28	12	16	A.3.a.2.B	6/6	F/G	P/G				4	15,000	63	400
Trelleborg Troilboom-Bantam	Sweden	30	10	20	C.4.a.2.B	6/6	F/G	P/G				ચ	27,500	1	314
Uniroyal Sealdboom 1-P1y, 36" 2-P1y, 36"	USA	36	12	24 24	E.5.a.2.B E.5.a.2.B	F/G F/G	P/F P/F					4 U	20,000 48,000	11	330 583
Welsh Oil-Tech <sup>7</sup> General Purpose Boom Class 2	USA	24	6	15	A.2.a,b.1.A	F/G	P/G				<u></u>	m	ł	l	l
Winittaker Expandi-011 Soom Harbor Zoom =3000	USA	R	=	61	A.2.b.1.A	G/G	F/G	9/G				m	5,700	E	156
											_				

1-9See NOTES at end of TABLE 5.4.

TABLE 5.4. (Cont'd) — Inner Harbor Booms<sup>1</sup>

						PERFORM	DEREARMANCE / ODERATION IN SEA	PERATIO	N IN CEA	STATES <sup>3</sup>		TELISTIF	STORAGE	
110 BO0H	ORIGIN	OVERALL HEIGHT (in)	FREEBOARD (in)	DRAFT (in)	BOOM TYPE <sup>2</sup>	-	2		4	2 9 2	SEA STATE	STRENGTH <sup>5</sup> (1bs)	VOLUNE (ft.3/100ft)	%E1GHT (1bs/1c0ft)
Acme Products 0.K. Corral-standard	NSA	18	ور	12	E.5.a.l.A	P/5						6,500	50	150
American Narine Simplex Optimax	USA	18	46	12	A.2.a.1.A D.1,2.a.1.A	P/G F/G	P/G		<u></u>		0.4	4,700	33	021 202
Bernett Pollution Controls Insince Booms	USA													
12 in 18 in		18 2	ەمە	212	A.1.a.2.A A.1.a.2.B	9/9 9/9	 			·	4 4 4	14,400	322	212
36 in		36	12	24	A.1.a.2.B A.1.a.2.B	r/6 F/G	P/6				4 4	14,400	53	346
24 in Boar 6		24	10	14	E.5.a.2.A	F/G	P/F				4	30,000	1	1,000
Type I Class 1		13	5	8	A.1.a.2.B	P/6					e	ł	I	1
Type I Class 2 General Purpose Boom	. 1	24 18	<del>و</del> ، 20	16 12	A.1.a.2.B A.1.a.2.A	F/6 P/6	P/G				4 M	7,000	11	200
River Boom		18	9	12	A.1.a.2.A	P/G					4	14,000	I	275
Series 7 Model 12		61	9	13	A.2.b.1.A	P/G					e	5,700	4.6	30
Eenne× t:0FI - HL-30	Norway	~ 20	12	2 80	A.3.b.2.C	F/G	P/6		<u> </u>		e	6 ,600	I	400
B.F. Goodrich S∈atcom 18 PFX	USA	18	Q	12	E.5.a.2.B	P/G			<u></u>			6,000	1	800
Cascade Industries River Boom Harbor Boom Soom	USA	24 22 24	ന്നമ	د د و د او او	8.2.a.1.A E.5.a.1.A E.5.a.1.A	P/6 P/6 F/6	P/G				~~~	8,000 8,000 8,000	111	
Crowley Environmental Services CES Petro Barrier		24	=	13	A.2.a.1.B	F/G	P/G			<del></del>	e	6,700	128	460
<sup>1-3</sup> See NOTES at end of TABLE 5.4.	5.4.						1							

TABLE 5.4. (Cont'd) - Inner Harbor Booms<sup>1</sup>

		OVERALL				PERFORM	TATICE/OP	ERAT 10	PERFORMATICE/OPERATION IN SEA STATES <sup>3</sup>	STATES <sup>3</sup>		TENSILE	STORAGE	
011 800%	ORIGIN	HEIGHT (in)	FREEBOARD (in)	DRAFT (in)	BOOM TYPE <sup>2</sup>	-	2		4 5	9	SEA STATE	STRENGTH <sup>5</sup> (1bs)	VOLUTIE (ft 3/100ft)	WEIGHT (1bs/1coft)
Environetics Boa Boom 111	USA	15	 2	01	E.5.a.l.A	P/6					2	1	د ا5 ۱5	1
Hurun Enterprises Flexy II, 14" Flexy II, 18"	USA	14 18	• •	9	D.1.a.2.B D.1.a.2.B	9/6 P/6					~~	.	16 20	100
Kepner Flastics Fabricators Standerd Sea Curtains S405808FF Eh561208FF AH281208FF	NSA	13 18 20	457	9 51 51	A.2.a.1.A A.2.a.1.A A.2.a.1.A	9/4 5/4	P/G			· · · · · ·	444	12,000 16,000 43,000		00 100 200
LOGDACTIDIE Sea Lurtain SHJ912JF Sea Tender Poom <sup>a</sup>		20	7	13	A.2.a,b.1.A	F/G	P/G				4	43,000	I	160
BH25768%F		12	4	80	A.2.a.1.B	P/G			<u> </u>		2	5,000	1	140
Kleber Eslear 1	France	24	10	14	D.3,4.aorb.	F/G	9/d				m	ł	1	335
Metropolitan Petroleum NP-Boom-Standard	USA	18	Q	12	A.1.a.2.A	P/6					2	2,600	30	230
011 Soill Containment Corp Oilfance, 18"	USA	18	5	6	E.5.a.5.B	F/G	P/6				-	32,400	30	260
Seaward International <sup>®</sup> . Sea fence Incer Harbor	USA	18	8	10	A.3.a.2.B	F/6	P/G				e	10,000	47	260
Slickber Multi-purpose Mark 9 Eeach Boom Mark 6	USA	18 18	ورور	12	C.1.a.2.A C.1.a.2.A	F/6 F/6	P/6				<b>5</b> 5	5,000 5,000	 	r 275
Unircyal Sealdboom, 18" Nini	USA	81	9	12	E.5.a.2.B	P/6			<del> </del>		4	11,000	I	150
Welst Oil-Tech <sup>7</sup> General Purpose Boom Class 1	USA	12	2	7	A.2.a,b.1.A	P/6					2	ł	1	I

<sup>1-5</sup>See NOTES at end of TABLE 5.4.

σ
-
ب
-
ō
c
$\sim$
•
4
ŝ
يسا
_
TABLE
2
-

Notes:

Offshore Booms - booms of 36" or greater overall height which are generally designed for open water use. Outer Harbor Booms - booms of 24"-36" overall height generally designed for use in sheltered waters with some chop. Inner Harbor Booms - booms of 24" or less overall height generally designed for use in calm sheltered waters. <sup>1</sup> Definitions:

<sup>2</sup> Boom Type: Tension Means . Tension Material . Flotation Type . Ballast Means . Boom Geometry

om Geometry	A. Top float (generally cylindrical) with skirt B. Fence and skirt	Purse seine	Cylindrical float with cylindrical skirt	Unknown		
	1. Chain A 2. Weights B				x. Unknown	
Flotation Type	a. Foam b. Pneumatic	c. Hard floats	x. Unknown			
<b>Tension Material</b>	l. Cable 2. Chain	3. Kevlar	4. Synthetic	Rope	5. Fabric	x. Unknown
Tension Means	A. Bottom B. Top	C. Middle	D. Top & Rottom	E. No Tension	menter	X. Unknown

Performance/Operation in Sea States: Key is G = Good; F = Fair; P = Poor. The first rating is estimated performance of each oil boom when used within the accepted limits for all oil booms (tow speeds of about 1 knot). Performance is defined as the ability to contain a high percentage of the surrounded oil. Good performance implies good wave conformance, good stability, little washover, etc. The second rating is estimated overall operation of the boom. Such factors as: speed of deployment or response, durability, eace of handling and control, "seaworthiness", cleanup, etc. are considered. A blank in a sea state suggests that operation should not be attempted.

- Dot Survival limit of the oil boom is for the deployed state but freely streaming (not in a "U" configuration). Oil loss does constitute failure.
- Tensile strength ultimate strength of tension member or fabric in case of boom without tension member. A factor of safety of about 4 should be applied to these values to determine the useful working load. 5
- Built to Mil-B-28617A (YD)
- <sup>7</sup> Built to Mil-8-28617C (YD)
- Built to Mil-B-28627B (Y0)
- <sup>9</sup> Built to Mil-8-29186 (YD)

The booms can be used for protecting desired areas (passive responses) or for slick containment to aid in skimming (active responses). Booms that are being considered for use with specific skimmers should have similar sea state operating capabilites (see Table 5.3).

Details on some of the more desirable booms are given in Appendix  $\ensuremath{\textsc{H}}\xspace.$ 

Towing for ces depend on the tow speed (generally less than 1 knot for effective containment), boom length, mouth opening, draft, and sea conditions. Various references can be used to estimate towing forces. ((5)) For reference, a 612-foot long OWOCS (27-inch draft) towed with a 400-foot mouth opening at 1 knot in a Sea State 3 would have an average towing force (per vessel) of approximately 6,400 pounds. This is easily handled by most buoy tenders, offshore supply boats, offshore fishing boats, and similar vessels.

## 5.4 Dispersant Application Systems

Table 5.5 shows comparitive features of general dispersant application systems. The Warren Spring, Cleans Atlantic, and Exxon system consist of spray booms and pumps, and can be mounted on any suitably sized vessel such as an offshore supply vessel, small tank ship, or similar vessel. The sea state rating assumes that vessels of these types are used to support the system during operation. The Water Witch and Combat Cat are specific vessel types with dispersant gear integrated into the design.

The Globe Air, Inc., system is not one particular system, as several different aircraft can be equipped with the spraying gear. The treatment rate listed in the table represents one of the largest capacity systems. Almost any crop spraying aircraft, including helicopters, can also be equipped with suitable tankage, pumps, and nozzles for spraying dispersant. Smaller aircraft can only provide limited treatment rates, however.

	STORAGE	CAPACITY <sup>5</sup> (gal)	Drums	500	< 4,000	~ 200	200	Drums		with.	•	essels,	ing the
	OIL TREATMENT	RATE COMPARISON <sup>4</sup> (9pm)	48	500	< 8,000 t	~ 14	48	300		tem is to be used	e of the system as a whole, including barriers A blank suggests that no operation should be	aboard seaworthy v	estimated based on system capabilities, slick properties, and operating efficiencies, assuming the
	SURVIVAL	SEA STATE <sup>3</sup>	+9	6+	6+	m	m	64		persant Sys	is a whole, that no op	recovered	operating e
	res s	9	٩	٩.	ш.			4		he Dis	stem a ggests	easily	, and
TIES	A STAI	5	ц.	بد	9			L.		that t	the sy ank su	an be	erties
PAB1L1	IN SE	4	ყ	9	9			9		ys tem	ce of A bl	ment c	k prop
TEM CA	RATION	m	9	9	5	٩.	۵.	<del>ن</del>		e of s	forman cated.	equip	, slic
NT SYS	SYSTEM OPERATION IN SEA STATESS	2	9	IJ	IJ	u.	ы.	ۍ		he typ	ed per e indi	Where	lities
DISPERSANT SYSTEM CAPABILITIES	ISYS	-	5	IJ	5	G	IJ	9		, for t	estimat tem Typ	olied.	capabi
TABLE 5.5. D	SYSTEM	TYPE -	11.A.2	II.A.2	11.A.1	11.A.2	II.A.2	II.A.2		i and Cleanup	Ngs indicate with the <u>Sys</u>	, etc., is im	ed on system
-		(ft)				20	11			ll Mitigation	These ratin stem is used	ing barriers,	estimated bas
		URIGIN	England	USA	USA	England	England	USA		ble 4.1, Spi	r; P = Poor. ispersant Sy: te.	stem, includ	
		ULSPERSANI STSLEM	Warren Spring (vessel) <sup>7</sup>	Clean Atlantic (vessel)	Globe Air, Inc. (aircraft)	Combat Cat 7	Water Witch <sup>7</sup>	Exxon (vessel)	NOTES:	<sup>1</sup> System Type - Refer to Table 4.1, Spill Mitigation and Cleanup, for the type of system that the <u>Dispersant System</u> is to be used with.	<sup>2</sup> Key is: G = Good; F = Fair; P = Poor. These ratings indicate estimated performance of the system as a whole, including barriers support, etc., when the <u>Dispersant System</u> is used with the <u>System Type</u> indicated. A blank suggests that no operation should be attempted in this sea state.	<sup>1</sup> Survival of the entire system, including barriers, etc., is implied. Where equipment can be easily recovered aboard seaworthy vessels, high ratings are given.	<ul> <li>4 Oil treatment rate - These rates are following conditions:</li> </ul>

134

- following conditions:
- Relatively calm seas, implying "Good" steady-state operating conditions -- rates can be expected to drop off to very low values in the "Poor" operating condition. Slick is assumed to be <l mm thick and uniform, viscosity 400 cs (partially weathered crude). a.

  - Encounter rate is >4 knots. Slick encounter width is spray boom width. A nominal treatment ratio of 1 part <u>concentrated</u> dispersant to 20 parts oil is assumed. و د د و

<sup>5</sup> Storage capacity implies integral storage contained on the Dispersant System, and not any external bulk storage that may be required.

<sup>6</sup> High rate of treatment is for only 10 minutes spraying per round trip. Various sizes of aircraft may be utilized.

<sup>7</sup> Breaker boards required.

<sup>e</sup> Dispersants with properties presently accepted by the EPA include the 'following:

. Conco Dispersant K	Corexit 9527	. Gold Crew	h. Sea Master NS-555
e.	÷.	÷	ė
(GFC Chemical Co.)	(BP Oil Limited)		(Adair Equipment
ictific Oil Dispersant	b. BP 1100 WD		d. Cold Clean
à.	ġ.	ပံ	ч.

(Continental Chemical Co.) (Exxon Chemical Co.) (ARA Chem) (Whale Chemical Co.) co Dispersant K exit 9527

# 5.5 Oil Receiving Vessels

Separate oil receiving vessels are required for offloading operations and for certain skimming operations. The characteristics of several types of receiving vessels are shown in Table 5.6.

Tankers are available in a wide range of sizes, and the size needed for a particular operation will depend on several factors, including:

- . quantity of fluid to be off-loaded or received
- . available water depth (limits vessel draft)
- . manueverability required (may need tug assist)
- . facilities available for transferring cargo to shore
- . sea conditions

Tankers have an advantage in that they are selt-propelled, but they are not normally available on a quick response basis. Although only military tankers are listed in Table 5.6, they do represent characteristics similar to many smaller commercial tankers.

Steel petroleum barges are fairly common in many areas, and are available in a wide range of sizes. Barges to be used offshore must be Coast Guard certificated for offshore use. Most barges are not equipped with pumps. If it is desired to utilize a barge tank for oil-water separation, special pumps and piping must be installed. Also, shelter must be provided if operating personnel are required on board (large barges sometimes have shelter already installed).

Barges have a disadvantage in that they must be towed. An adequately sized tug must be obtained to tow the barge, unless the barge is used as an integral part of the system, such as in a barrier-skimmer system where the barge is towed by one of these components. Usually, a satisfactory tug can be provided by the barge leasor. In rough seas careful control must be maintained over the barge, and maneuverability will be limited. Because of low freeboard, the full barge storage capacity can probably not be utilized.

	TABLE 5.6.	TYPICAL 01	TYPICAL OIL RECEIVING VESSELS	SSELS		
VESSEL	ORIGIN	LENGTH OVERALL <sup>1</sup> (ft)	LOADED DISPLACEMENT (tons)	LOADED DRAFT <sup>2</sup> (ft)	LIQUID CAPACITY <sup>3</sup> (barrels)	SPEED <sup>s</sup> (knots)
IANKERS * US Navy Military Sealift Command "Falcon" Class (AO) "Sealift" Class (AO) "Suamico" Class (AO) "Peconic" Class (AO6)	nsa	672 587 325 325		36 36 19	310,000 220,000 134,000 30,000	16.5 10
STEEL PETROLEUM BARGES						
Representative Sizes Large Small TOWABLE FLEXIBLE TANKS		430 300 250 150 60		22222	150,000 105,000 49,508 14,508 10,000 1,142	
Dunlop Dracone	England	26 - 298		2 - 9	28 - 6,914	10
Uniroyal Oil Salvage Container	USA	? - 140		3 - 6	119 - 5,000	Ŀ.
Firestone Fabritank	USA	15 - 44		5 - 7.5	061'1 - 611	2
Kepner Sea Container	USA	15 - 66		6 - E	14 - 333	10
Superflexit Caiman Flexiclone	France	7 - 85 30		2.5	63 - 756 38	° "
Zodiac Diodon Tank	NSA	10.5 - 21		m	17 - 34	2
NOTES:						

TYPICAL OIL RECEIVING VESSELS TARIFS6 <sup>1</sup> Length Overall. For Towable Flexible Tanks, the range of lengths is given (smallest and largest tank).

<sup>2</sup> Loaded Draft. For Towable Flexible Tanks, the range of draft is given for smallest and largest tanks. Where draft was not available, tank height was used -- draft may be somewhat less.

<sup>3</sup> Liquid Capacity. For Towable Flexible Tanks, the range of capacity for each type is given (smallest and largest tank).

\* The tankers listed represent typical size ranges that might be considered, whether they be military or commercial vessels.

<sup>3</sup> Speed. For Towable Flexible Tanks, is the approximate safe maximum tow speed (knots) when full.

Towed flexible tanks (rubber or plastic) are limited to relatively small si they can provide a rapid response capability for off-loading leaking tanks and other small-scale operations. These tanks can be transported to the casualty by a vessel in a rolled or folded condition, and then deployed (partial inflation may be required). After filling they must be towed back to port for unloading. However, it is conceivable that several containers could be filled, moored near the casualty site, and then towed to port all at one time. The large Caiman tanks can be self-propelled (outboard motors) for use around harbors.

Make-shift storage capacity can be installed on certain vessels, such as by temporarily installing deck tankage or pillow tanks. However, this approach may be unsatisfactory because of stability reduction on the vessel, or because of the generally limited capacity that can be installed. For an application such as dispersant storage, such methods may be necessary.

### 5.6 Work Vessels

Work vessels are used in all phases of pollution response operations. Applications include towing of booms and receiving vessels, VOSS or dispersant system support, personnel transport, and equipment delivery and deployment. A wide variety of vessels are available, although obtaining the best vessel when it is needed can be difficult if preplanning has not been adequate. Table 5.7 shows the characteristics of several vessels representing the tyupes of work boats that might be utilized in different types of offshore pollution response operations.

Vessels of over 160 feet in length would generally be able to operate or survive in all weather conditions in which response operations might be carried out (up to Sea State 5 or 6). Smaller vessels may be useful for limited tasks, but vessel

VESSEL APPLICATION <sup>5</sup>		ບບ ຊ ຊ ຊ ຊ	a a c a		A,B,C,F	A 0,5,7 7,7,0 7,7,0	А 8 В 8	ш ш	ш
LIQUID CARGO <sup>4</sup> (tons)					600	~ 450 ~ 850 ~ 370		11	L
DECK CARGO <sup>3</sup> (tons)					500	450 563 20	111	11	ى
BOW THRUSTER (yes/no)		yes yes no	6 6 6		yes	yes no no	yes no no	<u></u> 8 8	ê
POWER <sup>2</sup> (hp)		1200 1600 1000	3000 2000 2440		7500	5750 1500 800	7400 2550 700	700 175	230
MAX SPEED (kts)		13	ן5 ז5		15.5	14 11 25	~~~	~ ~	د 30
DRAFT (ft)		13	16 14 13		17	دا 10 8	s 18 6 0 6	4	m
LENGTH OVERALL (ft)		180 157 110	205 109 214		210	190 130 90	149 100 65	40 21	34
TYPE <sup>1</sup>		<del>م بر</del> م	- <b>5</b> 0		a,c	ບ ດ ຫ ອ ອ	υυ <del>υ</del>	لهند لهند	ų.
ORIGIN		USA	USA		Netherlands	NSA	USA	USA	NSA
VESSEL	MILITARY	Coast Guard "Balsam" Class (MLB) "Red" Class (WLM) 110' Harbor Tug (WYTM)	U.S. Navy Fleet Tugs (ATF) Large Harbor Tug (YTB) "Diver" Class (ARS)	COMMERCIAL	Smit-Lloyd B.V. 100 Class	Seahorse "North Seahorse" "Auster" "Coastal Seahorse" "Canadian Seahorse"	Jackson Marine "Godfather" "Mister Lou" "Judie"	MonArk Boat Co. 4014 V 21' "Little Giant"	Raider Marine Raider SRV-1034 *

TABLE 5.7. TYPICAL WORKBOATS

13.8

TABLE 5.7. (Cont'd)

NOTES:

 Salvage Ship g. Offshore Buoy-tender h. Coastal Buoy-tender e. Crew Boat f. Utility Boat c. Ocean Tug d. Coastal Tug <sup>1</sup> Type - a. Offshore Supply Boat b. Coastal Supply Boat

<sup>2</sup> Power - Either shaft or brake horsepower. A rough rule of thumb for bollard pull is 1 ton of pull per 100 HP. This is not true for higher speed vessels.

Deck Cargo - This limit may not be possible if full liquid cargo is on board. m

\* Liquid Cargo - Built-in tankage for this amount. This limit may not be possible if deck is fully loaded.

Low speed towing. I kt or less with good control (e.g., boom towing) Heavy towing. straight line (e.g., receiving barge towing) VOSS support, 1-3 kts with good control Personnel transport, high speed Equipment deployment (e.g., boom, skimmer, etc.) Dispersant application, 4-8 knots 5 Vessel Application - A. I
8. F
C. V
C. V
D. F
E. F
F. 6
F. 6

mothions can become severe in the higher sea states causing personnel and vessel distress (seasickness, injury, water on the deck, slamming, loss of steering control at low speeds, etc.).

Selection of a vessel for a particular task or mission involves determination of:

Vessel characteristics:

- . size and space available (for equipment installation, operating deck space, etc.)
- speed/steering capability (CP propellers, thrusters, etc.)
- . towing capability (winches, bitts, etc.)
- equipment handling capability (A-frame, davits, hoists, winches)
- . liquid storage capacity (tankage, room for temporary tanks, stability)
- . limitations on types of liquids that can be stored (petroleum cargos, dispersants, others)
- . personnel facilities (other than for normal crew)
- . general "seaworthiness" (length, draft, freeboard, stability, etc.)
- . communications/navigation capabilities
- . duration time on-site
- . ability to operate in hazardous atmospheres

Availability:

- . owner/operator
- . prior committments of vessel
- . time to charter and move to staging area
- . willingness of owner/operator to cooperate
- . liability committments

Other floating platforms can also be used for special tasks. For example, the Coast Guard FDS sled can be used for transporting barriers, skimmers, and other equipment to be used in the water, directly to the casualty site. Barges can also be used to support tasks reuiring a large deck area, unusually heavy equipment, or other purposes.

# 6.0 REFERENCES

- Beach, March, Ruetenik, and Davis, "Investigation of Extreme Weather Oil Pollution Response Capabilities--Final Report," Dot-CG-80372-A USCG Report CG-D-68-78, Seaward International, Inc., Sept. 15, 1978.
- Myers, Holm, and McAllister, <u>Handbook of Ocean and Underwater</u> Engineering, McGraw-Hill Book Co., New York, 1969, pp 11-98.
- 3. "Environmental Conditions With Specified Geographical Regions--Offshore East and West Coasts of the United States and in the Gulf of Mexico--Final Report," U.S. Deportment of Commerce, NOAA Environmental Data Service, April, 1973.
- 4. <u>Naval Ship's Technical Manual</u>, Chapter 079, Volume 2, Damage Control, NVSEA 0901-LP-079-0020, July 1, 1977.
- 5. Milgram, J.H., "Physical Requirements for Oil Pollution Control Barriers, "<u>Proceedings of Joint Conference on Prevention and</u> <u>Control of Oil Spills</u>, March 13-15, 1973, Washington, D.C., pp. 375-381.
- Lindblom, G.P., "Logistic Planning for Oil Spill Chemical Use," <u>Proceedings of 1979 Oil Spill Conference</u>, March 19-22, 1979, L.A., Calif., pp, 453-458.
- Hildebrand, P.B., Allen, A.A., and Ross, C.W., "The Feasibility of Oil Spill Dispersant Application in the Southern Beaufort Sea," EPS-3-EC-77-16, Minister of Supply and Services Canada, Sept., 1977.
- 8. <u>Peril at Sea Guidance to Masters</u>, Oil Companies International Marine Forum, 12th Floor, Portland House, Stag Place, London, SELE-5BH, 1979.
- 9. Christensen, R.D., and Motherway, D.L., <u>Survey Update on Damage Assessment and State of the Art of Patching and Plugging Systems</u>, Hazardous Chemicals Discharge Prevention and Reduction Project (794151), Interim Report, Dec., 1978, U.S. Coast Guard R&D Center, Groton, CT.

# APPENDIX A

### Safety Considerations

In order to evaluate the various hazards and related safety precautions when carrying out the response scenaria of this study, a brief discussion of each appropriate hazard category has been included in this Appendix. A description of the hazard is followed by a discussion of the precautions, preparations, and equipment needed to effectively deal with them. The descriptions are not intended as a complete safety manual, but rather as a means of highlighting possible problem areas and the general approach to controlling them. The user should make reference to appropriate reference material (CHRIS and other safety manuals) for detailed guidance concerning hazard abatement.

The hazard summaries are preceded by a matrix of Response Methods vs. Hazards, which points out the summaries appropriate to the response method utilized. The matrix serves as a quick guide to the areas of primary concern as well as a checklist of suggested safety considerations. While the matrix has been made to be complete, the possibility of hazards outside the indicated areas does exist. Supervisory personnel should remain aware of any unusual environmental or procedural factors which may create unusual safety hazards and be prepared to deal with them.

# Details of Safety Hazards

### Fire Hazards

 From Explosives: These materials are those that may generate highly flammable or explosive mixtures with air, and can be easily ignited by sparks or hot surfaces. Included in this category are gases, cryogenic liquids, liquids with a flash point below ambient temperature, dusts, and mists of flammable liquids. Gasoline, naphtha, LNG, LPG, and light hydrocarbons (penthane to octane) are some common materials with this volatility.

# HAZARDS

.

1	FIRE			LOSI	ON	HEAI	JTH	ENVI MEN	RON- TAL
From Explosives	From Combustibles	From Burnable Materials	From Shock Sensitive Materials	From Detonatable Materials	From Reactive Materials	From Toxicity	From Hypothermia	From Cold Climate	From Ship Motion
	1	1			1		1	~	~
	1	1			1		1	1	1
√ √	√ √	✓ ✓ ✓	√ √	√ √	✓ ✓	√	$\checkmark$	✓ ✓ ✓	✓ ✓ ✓
					✓	1	1	√	
	1	1			~	√	1	√	~
	√	1					√	√ /	1
	v √	V					v √	v √	✓ ✓

RESPONSE METHODS

# Casualty Vessels

Jettisoning Ballasting & Stabilizing Off-Loading In-Situ Burning Cutting ship Apart

# Oil Slicks

Aircraft Dispersants Vessel Dispersants Vessel of Opportunity Skimming Dedicated Skimmer Skimming Barrier Barrier & Skimmer

A-2

Extreme caution must be taken in the presence of these materials. Electrical equipment must be of the appropriate class, tools must be non-sparking, smoking is prohibited, and all other sources of ignition must be excluded. Fire extinguishers and other fire treatment systems will generally be ineffective with these materials, although they should be available to extinguish potential ignition sources.

- 2. From Combustibles: These materials include those that may be ignited under ambient temperature conditions. Such materials include liquids with a flash point less than 15C above ambient temperature, solid materials which are fibrous, shredded, or granular, and solid materials which contain available oxygen. Kerosene, light crude oils, and #1 fuel oils are in this category. Sources of ignition, including open flames, smoking materials, overheated equipment, engine exhausts, and electrical short circuits, must be avoided. Fire extinguishing systems should be located near operating personnel and near the combustible materials. They should be of a type appropriate to the fire hazard. Personnel should be trained in the use and care of this equipment.
- 3. <u>From Burnable Materials</u>: These materials include those that can be ignited if moderately heated, including liquids with a flash point from 15 to 70C above ambient temperature, and other materials which can be readily burned in air such as wood, paper, and asphalt. Most fuel oils and crude oils are in this range of flash point.

Open flames must be avoided, smoking allowed only in areas clear of such materials, and care taken to avoid excessive heat in the vicinity. Fire extinguishers or charge hoses should be located at several points throughout the operating area. Precautions should be taken for avoidance of smoke inhalation should fires occur.

### Explosion Hazards

- From Shock Sensitive Materials: These materials include those that are capable of exploding by themselves, at ambient temperatures and pressures. They may be sensitive to mechanical and/or thermal shock. Blasting caps, detonators, etc., are in this group. Only personnel trained in the safe handling and use of explosives should be permitted in the area.
- 2. From Detonatable Materials: These materials include those that are capable of exploding if exposed to an initiating source, or if heated when confined. All blasting materials and pyrotechnics are detonatable in this manner. Possible initiating sources or sources of heat must be kept away from these materials. Means for cooling, such as water deluge hoses should be charged and located nearby. Personnel should be instructed in the necessary precautions to be taken, and only personnel trained in the use and handling of explosives should work wuth these materials.
- 3. <u>From Reactive Materials</u>: These materials include those from which explosive materials or violent reactions may occur upon contact with water or with other common materials (e.g. diborane and water or nitrates and oil). Care must be taken to avoid hazardous mixtures of these materials. The primary precaution is thorough education of personnel working with them.

- From Toxicity: Materials handled can cause serious injury or death upon exposure to personnel, through toxic or corrosive properties. Reference should be made to the hazard of each specific material for detailed information on the type and degree of hazard and the precautionary measures to be taken. The CHRIS manual or other appropriate reference sources should be consulted.
- 2. From Hypothermia: Exposure to extreme cold and/or high winds could result in hypothermia (extreme loss of body heat) or frostbite (damage to exposed skin from exposure of cold). Adequate protective clothing combined with limitation of exposure to cold will minimize the risk of hypothermia or frostbite. Keeping clothing dry, providing shelter from wind, and insuring awareness of the difficulty of detecting these conditions before serious damage has been done are additional necessary precautions that must be taken.

### Environmental Hazards

- From Cold Climates: Low temperature may cause hazards due to snow, sleet, or icing of decks and equipment. (See also Personal Health - Item 2). This hazard is compounded when ship motions are present (see 2 below). Precautions to be taken include provision of life-lines and hand-holds throughout the operating area. Footgear with non-slip soles will also make icing hazards less severe. Personnel should wear Personal Flotation Devices at all times.
- From Ship Motion: Winds and accompanying heavy seas may cause ship motion, making operations hazardous. When combined with rain, snow, or ice this hazard is much more severe.

Ship motions can also cause motion sickness which can be hazardous due to loss of ability to think clearly as well as significantly reducing operator efficiency. Equipment handling and deployment are difficult and hazardous in these conditions. Life-lines and hand-holds should be provided through-

out the operating area. Personal Flotation Devices should be worn at all times. Medication for prevention of motion sickness should be dispensed under the supervision of a Medical Officer. Extreme care should be taken when moving equipment; correct rigging procedures are even more important than usual when heavy seas and ship motions are present.

### APPENDIX B

#### Skimming Mechanisms

Brief descriptions of typical skimming mechanisms and the ways in which they can be utilized are given in the follow-ing sections.

<u>Weir Skimmers</u>: Several skimmers utilize a weir to separate a thickened oil layer from the underlying water. Wave conformance of the weir lip is extremely critical, and this mechanism is best utilized in skimming barriers where the support framework (in this case, the barrier itself) conforms well to the surface in higher sea states.

<u>Oleophilic Disks</u>: This skimming mechanism utilizes disks that rotate in a thickened pool of oil, lifting the oil from the surface where it can be scraped off the disks and recovered. Oil booms are required to thicken the oil sufficiently. Various hull-shaped or other floating devices are used to support the disk arrays and associated machinery.

Surface-Piercing Oleophilic Belt: In this mechanism, an endless, rotating, porous (foam) belt dips into a thickened pool of oil and removes oil by sorbent action, while water drains back to the surface. This mechanism requires a heavy supporting structure, and is usually employed on a vessel system.

Dynamic Inclined Plane: In this case, a non-porous rotating conveyor-type belt is not used to collect oil directly, but only directs the oil beneath the skimmer to a collection chamber.

<u>Cyclonic Separator</u>: This mechanism employs a cyclonic separator attached to the side of a support ship, and uses the momentum of the water flowing past the ship to separate the oil from the water encountered by the device. Other devices have separate mechanisms for generating a vortex, but the stability of the vortex is a problem in waves.

SOCK Skimmer: The SOCK concept is to have a covered oil boom arranged on each side of the vessel. A wide opening is maintained by a rigid framework, which also provides attachment points for the tow lines. The cover on the top of the boom has several oil suction ports to remove the oil as it collects near the back of the SOCK, which also serves as a wave damper.

Zero-Relative-Velocity (ZRV) Sorbent Mechanisms: ZRV systems can operate at high forward speeds (3 knots), because the sorbent lies "stationary" on the water for a brief period. These systems fall into three classes -- loose sorbent (foam cubes or thin slabs) continuous rope (MOP) sorbent, and continuous belt (foam or other material) sorbent. Each of these concepts solves the wave conformance problem with a different degree of wave compliance, with loose sorbents giving potentially the best conformance and belt sorbents the least. Upon removal of the sorbent foam from the oil slick, the sorbent is squeezed out and the oil is collected. The sorbent is then returned to the water for further oil collection.

### APPENDIX C

# Stability Calculations

The basic calculations for determining the stability of

a vessel in a sound or damaged state are included in this Appendix. Sample problems are provided as examples of the calculation method. The following areas are treated.

- 1. Computing GM
- 2. Computing BM (Metacentric radius)
- 3. Shifting weight in vertical direction (Trans. Stab.
- 4. Shifting weight in athwartships direction (Trans. Stab.)
- 5. Adding or subtracting new weight (Trans. Stabl)
- 6. Computing angle of list
- 7. Loose water, free surface effect
- 8. Free surface, with free communication
- 9. Moving weights in longitudinal plane
- 10. Computing change of Hm
- 11. Glossary of Terms and Symbols

This Appendix was taken from:

<u>Fundamental Salvage Calculations</u>, U.S. Naval School "Diving and Salvage," compiled by Lt. W. R. Bergman USN - revised by Lt. E. V. Downey USN, 1965. IX. Stability.

:

Chapter 88 of BUSHIPS Technical Manual is the finest text available on stability. The intent of this guide would be aborted if we made an excessive review of all phases but the following will definitely assist in stability salvage computations.

A. Computing for GM.

## Transverse Value

Sample Problem # 15

Formula:  $GM = \left( \begin{array}{c} 0.44 \\ \hline 11 \end{array} \right)^2$ 

Note: .hh is constant for all ships b = beam Ti = time in seconds for one complete roll (Port to STB'd and Back)

Given: Roll time = 10 sec  
Beam = 35 feet  
GM = 
$$(0.44 \times 35)^2$$
  
GM =  $(15.4)^2$   
GM =  $(1.54)^2$   
GM =  $(1.54)^2$   
GM =  $(2.37)^6$  FT

As a fast review recall the successive points G (center of gravity) B (center of bouyancy) M (metacenter). The distance GM is a measure of initial stability and is called metecentric height. Now for illustration let us put a small list on the ship (refer to Plate # 2) you will note the quantity GZ which is the righting arm or the tendency of the ship to right itself, it will vary from 0 to () maximum value until an upsetting arm is experienced. Multiplying the righting arm by displacement gives us righting moment.

B. Computing BM (metecentric radius).

Sample Problem  $\frac{1}{\sqrt{16}}$ Formula: BM =  $\frac{I}{\sqrt{12}}$ Note: I =  $\frac{Ib^3}{12}$ V = Volume of under water body Given: Box shaped lighter L = 75 b = 28 Hm = 6:

C-2

Work:

---

$$I = \frac{75 \times 28^{3}}{12} = \frac{75 \times 22000}{12} = 137,500$$
$$V = 6 \times 75 \times 28 = 12,600$$
$$BM = \frac{137,500}{12,600} = 10.9$$

C. Shifting weight in the vertical plane from a low position to a higher position or vice versa.

It can be seen that moving a weight in the vertical plane will change the center of gravity. Lock at plate # 3. The shift of gravity/ GGl can be found as follows.


Formula: 
$$GGl = \frac{w \ X \ d}{W}$$
  
Sample Problem # 17  
Formula:  $GGl = \frac{w \ X \ d}{W}$   
Note:  $w = weight moved$   
 $d = distance weight moved$   
 $W = displacement$   
Given:  $w = 10T$   
 $d = 20^{T}$   
 $W = 1000$  tons  
Work:  
 $GGl = \frac{10 \ X \ 20}{1000}$   
 $GGl = .2 \ Ft.$ 

The important thing to notice is the loss of righting arm GR which decreases GZ for the entire range of stability. The loss or gain of righting arm can be expressed as follows.


Formula GR = GG1 () (loss would take place raising, gain lowering)  $% \left( \left( \left( 1\right) \right) \right) =\left( 1\right) \left( 1\right) \left($ 


D. Shifting weight in the atwartships direction, The same formula GG1 = ( ) is used but the loss of righting arm is expressed as:

Plate # 3

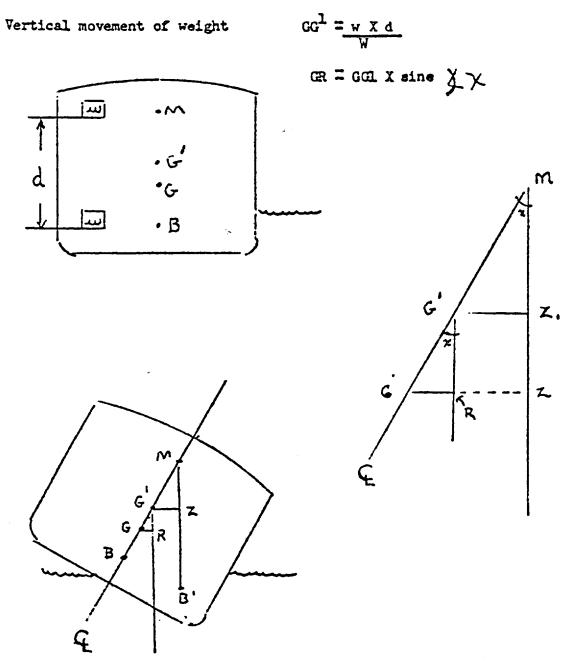

# Plate #4

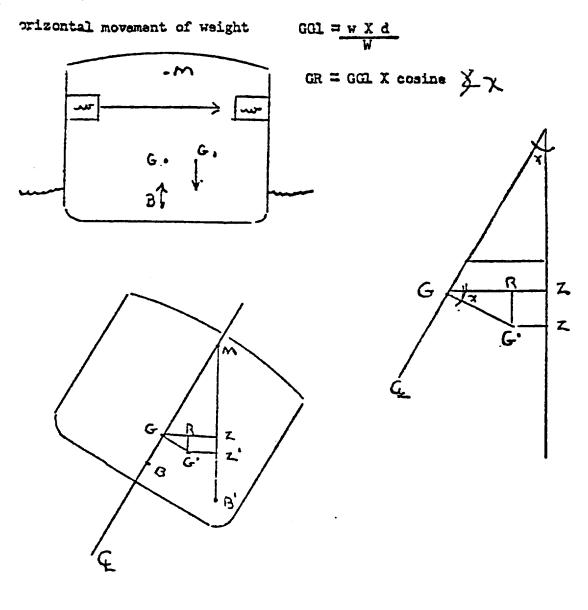



Formula: GG1 X cosine angle this is guickly understood by looking at Plate # 4.

E. Adding or substracting new weight.

The easiest way of figuring this problem is by first assuming that you placed the weight at the center of gravity the G would remain the same. Then proceed as we would for a vertical or transverse weight movement. However you can see we have added weight and both B () M will change. Lets take one problem and not compute the loss in right-ing arm as we did before but compute the new GM.

# Sample Problem # 18

$$GG1 = \underline{w \ X \ dk}$$
$$W \stackrel{f}{=} w$$

Note: You will notice the similarity to the other formula with
 the exception of dk which is the vertical distance from
 the added weight to G.
Given:
 w = 500 tons
 w = 11,500 tons
 GM = 3.5 ft
 The weight is added 41 ft on the center line above the

keel.

KM = 28.1 (Obtained from curves of form)

Work:  $GGl = \frac{w X dk}{w - w}$ 

$$GG1 = \frac{500 \times 16.4}{11,500 \neq 500} .68 \text{ ft}$$

Discussion: Where did 16.4 come from. Distance from K to where weight was placed was 41' KM (28.1) - GM (3.5) = KG (24.6) now G to weight = 41 - 24.6 = 16.4 KG1 = KG (24.6) () GG1 (.68) = 25.28 () 25.3 G1M1 = KM1 - KG1 2.5 = 27.8 - 25.3

F. <u>Computing angle of list</u>. The time will come when we desire to compute the angle of list by adding a weight of the center line.

## Formula:

Tan of the angle = 
$$\frac{W X d}{(W + W)(GLM)}$$
 New GM

Discussion: When you find the tangent of the angle proceed to the tangent tables and extract the angle.

## G. Loose water free surface effect.

Thus far we have talked about only solid weights. What about loose water or free surface effect by partial flooding of a compartment. Visualize an off center compartment half filled with water, as the ship heels this water moves, the weight shifts and causes a shift in the center of gravity. This will definitely cause ???? in out righting arm. For simplicity we will experience a "virtual rise" in the center of gravity by that we mean this shifting of water will effect the righting arm the same as if G had actually moved upward we could produce the same effect at some given point. It would be laborous and complicated to compute each and every loss for many different angles of heel. Therefore we have used the "virtual rise" method. To easily compute.

 $GGv = \frac{T}{v}$ .

$$GG\mathbf{v} = \frac{\mathbf{I}}{\mathbf{V}} = \frac{\mathbf{I}}{\Delta \mathbf{x} 35}$$

Formula:

:

- Note: GGv = our virtual rise of gravity. I = is out now familiar moment of inertia, in this case the moment of inertia of the free surface area about its own fore and aft axis. I = b()1 b is the atwartship breath of the free surface 12 with the ship upward.
- Procedure: After computing the above the loss of righting arm may be found by this formula GGv S xine of the angle of list on heel.
- Note: The breath of the compartment is the key factor hence a single fore and aft centerline bulkhead which cuts a compartment in two will <u>quarter</u> the free surface effect.
- H. Free surface effect will open communication to the sea. The case will arise when a compartment will be flooded and holed to the sea with water rushing in and out alternately. To establish the "virtual rise" in gravity and the corresponding effect on stability the following formula is used.

Sample Problem # 21 Formula  $GGv = \frac{ay^2}{v}$ 

- a = area of free surface in square ft.
- y = atwartship distance from the center of the free surface to the ships centerline.

I. Moving weights in longitudinal plane. Thus far we have only discussed weight additions in the transverse plane lets now discuss weight movement in the longitudinal. Sample Problem # 22 Formula: Change of trim = <u>Trimming moment</u> MT1 Ha = 19' 9" Given: Hf = 20' 3''Hm = 20'Move 50 tons of ammunition 300' aft. MT1 = 1,940 foot tons Work: Moment = 50 X 300 = 15,000 Change of trim = 15,0001,940 = 8 inches Note: Since we are moving the weight aft the trim will be by the stern. J. Computing change of Hm. This computation comes in very handy in applying parralel rise or sinkage computations. In adding and subtracting weights in particular flooding and deflooding compartments. Formula: Change in Hm = wͲРΤ w = Equals weight added or subtracted

# GLOSSARY OF TERMS AND SYMBOLS

	GLOSSARI OF TERMS AND SIMBOLS
a	- area of free surface in square feet
A	- area
AGW	- after grounding displacement
AP	- after perpendicular
b	- beam
В	- center of buoyancy
BGW	- before grounding displacement
BM	- transverse metecentric height
BM1	- longitudinal metecentric height
Cb	- block coefficient
Cm	- midship coefficient
Ср	- waterplane coefficient
d	- distance
dk	- vertical distance from G to final height of weight
dn	- neutral point distance
dr	- physical distance from center of flotation to midpoint of
	actual grounding point
dw	- distance from center of floatation to where weight was moved.
F	- force
FP	- forward perpendicular
G	- center of gravity
G1	- new center of gravity
GGv	- virtual rise in center of gravity
GM	- metecentric height
GM1	- longitudinal metecentric height
Н	- head of water
Ha	- after draft
Hf	- forward draft
Hm	- mean draft
HmAG	- mean draft after grounding
HmBG	- mean draft before grounding
I	- moment of inertia
K	- keel
KG	- distance from keel to center of gravity
KG1	- new distance from keel to center of gravity
KM	- distance from keel to metacenter
KM1	- new distance from keel to metacenter
L	- length
LO	- length of stiffeners in feet
LBP	- length between perpendiculars
LOA	- length overall
М	- metacenter
M1	- new metacenter
MTI	- moment to trim one inch
NP	- neutral point
R	- ground reaction
RY	- tide reaction
Т	- tons
Ti	- time for period of complete roll
TPI	- tons per inch immersion
U	- coefficients of friction
V	- volume
W	- displacement - ()
W	- weight
У	- atwartship distance from center of free surface to the
	centerline
Z	- section of modulus

### APPENDIX D

### Grounding Calculations

The basic calculations for determining the ground reaction of a stranded vessel and the factors that affect ground reaction are included in this Apendix. Sample problems are provided as examples of the calculation procedure. The following areas are treated.

- 1. Ground reaction and methods fro determining:
  - a) Change of mean draft method
  - b) Tons per inch immersion (TPI) method
  - Computing ground reaction using forward draft readings.
- 2. Computations of TPI and MTI
- 3. Determination of the neutral loading point
- 4. Tide effects on ground reaction
- 5. Glossary of terms and symbols

Also included in this Appendix is a table of average vessel dimensions.

The grounding calculations were taken from:

Fundamental Salvage Calculations, U.S. Naval School (Diving and Salvage," complied by Lt. W. R. Bergman USN - revised by Lt. E. V. Downey USN, 1965. The table of average vessel dimensions is based on a table taken from:

Emergency Transfer Systems for disabled Tankers, Supervisor of Salvage, Naval Ship System Command, prepared by Murphy Pacific Marine Salvage Co., contract N00024-73-C-0273 (Task 74-11), p. 32.

#### III. Ground reaction and methods for determining.

Consider a ship moving with a certain speed over a body of water those sea bottom is gradually shoaling. If the ship maintains its course and speed toward the shoal at some point in its travel the keel of the ship will touch the bottom from this point of contact the kinetic energy of the ship will begin to expend itself in two ways. First, is in the conversion into frictional energy in stopping the ship. Second, is in the conversion into potential engery in raising the ship. This raising of the ship or changing its mean draft (Hm) to a lower value is the effect of producing ground reaction (R). G round reaction may be defined as how many tons aground the <u>vessel is</u>. In proceeding we will assume the center of floatation is exactly amidships.

### A. Change of mean draft method:

This is the easiest method of computing ground reaction. Both the forward and after draft readings must be available to utilize this method. Occasionally such conditions as heavy surf, ground swells, and extreme counter design at times render this method useless.

Sample Problem #2

Formula: R = BGW - AGW
Assumed: Curves of form available
Procedure: Take Hf and Ha and compute Hm before grounding.
Use curves of form to obtain displacement. Take Hf
and Ha and compute Hm after grounding. Use curves
of form and derive after ground displacement.
Given: BGW = 2100 T

AGW = 1850 T R = 2100 T - 1850 T R = 250 T

B. TPI Method:

The same results may be approximated by finding the product of the change of mean draft (Hm) in inches and the value of TRI. This is a handy method in situations where the cruves of form are not available, nor is initial displacement but you do possess a rough estimate of TPI.

```
Sample Problem # 3
Formula: R = (HmBG - HmAG)TPI
Given: HmBG = 10'6() to determine how much pull
required,
HmAG = 9'3() multiply tons by coefficients.
(Pg. 3)
TPI = 20.2T
Work: R= (10'6" - 9'3") 20.2T
R= (15"0) 20.2T
R= 303T
```

# C. Computing ground reaction using forward draft readings:

Two methods of computing values of R have been discussed; in each of these method an after draft reading after grounding is required. In the majority of stranding situations the obtaining of an after draft reading is virtually impossible due to the presence of ground swells, heavy seas breaking over the stern, extreme list etc. These situations will naturally necessitate the estimation of R by a method utilizing information from the curves of form or values of MTI and TPI obtained on scene which will be discussed later.

```
Sample Problem #4
Formula: R = 2. MTI. TPI. change in Hf in inches
                 (2MTI) () (dr . TPI)
Given:
          HFBG = 10'
          HFAB = 8'
           BGW = 1680
           MTI = 365'T
           TPI = 20T
            dr = 100' (This new term is the location, in feet, of
                        the point of ground contact to the midship
                        perpendicular)
Work:
       R = 2 \times 365 \times 20 \times 24
            (2X365) () (100X20)
       R = 350 () 400
           2()730
       R = 128T
```

IV. Computations of TPI and MTI

The novice will see the importance of the values of TPI and MTI in salvage computations. They are <u>mandatory</u> math tools of the salvor. Curves of form are the frosting on the cake and many times they are not available so lets proceed with this hypothesis that they are not available. First look over the tabulated chart below. These coefficients in brevity are a relation of the actual volume by shape of the vessel as compared to the block square volumes utilizing beam, height, and length measurements.

For comparison the fol	lowing figures	are given:		
TYPE	BLOCK C()	MIDSHIP C()	WATERPLANE	C ()
	COEFFICIENT	COEFFICIENT	COEFFICIENT	
Ocean Liner	.597	.956	.725	
Large Cargo	.775	.992	.848	
Larger Tanker	.757	.978	.845	
Great Lakes Freighter	.874	.990	.918	
Yacht	.565	.938	.724	
Harbor Tug	.585	.892	.800	
Destroyer	.521	.833	.740	
Cruiser	.573	.820	.714	
Lifeboat	.600			

A. Finding TPI with physical measurements of the ship and the standard table of ship block, midship, and waterplane coefficients.

Sample Problem # 5 Formula:

$$IPI = \frac{b X L X Cp}{420}$$

Procedure: First find at the waterline of the stranded ship the length and the beam and multiply them together giving you the area of the waterplane. However this is the block area and our vessel has a taper at bow and stern. Refer to the standard table of ship coefficients and select under the Cp colume for the vessel you are working with.

Given: Destroyer Type  
b = 30'  
L = 300'  
TPI = 
$$\frac{b \times L \times Cp}{420}$$
  
TPI =  $\frac{30 \times 300 \times .740}{420}$   
TPI =  $\frac{9000 \times .740}{420}$   
TPI =  $\frac{6660.0}{420}$   
TPI = 15.85 Tons

B. Computing TPI with TPI of a similar ship known. This TPI of a similar ship could be obtained from numerous sources. Either before getting underway to the salvage scene or on arrival. We also will need to know the length and beam of both the similar ship and the ship stranded/grounded.

```
Sample Problem # 6
    Formula: TPI(1) = TPI (2) \underline{L1} . \underline{b2}
                                  L2 b2
                         (Note use of 1 and 2 are not math functions but a
                         labeling of two ships 1 being the stranded ship
                         and 2 designating similar ship.)
               TPI(2) = 12
    Given:
                L1 = 12
                    = 210
= 39
                L2
                b1
                b2
                      = 39
               TPI(1) = 12 \quad \frac{200}{210} \quad \frac{39}{39}
    Works:
               TPI(1) = 12 \frac{20}{21} . 1
               TPI(1) = 12(.95 \times 1)
               TPI(1) = 12(.95)
               TPI(1) = 11.45(T)
Computations of MTI. We have pretty well covered TPI lets move on
to MTI. Computations with no curves of form available.
    C. MTI solutin with TPI known.
    Sample Problem # 7
    Formula: MTI = 30 \times TPI()
                         b
    Given: TPI = 12
               b = 35
    Note: The figure 30 is a constant for all ships
```


Work: MTI =  $\frac{30 \times (12)()}{35}$ MTI =  $\frac{30 \times 144}{35}$ MTI =  $\frac{4320}{35}$ 

MTI = 123 TD. MTI solution with GM1 known Sample Problem # 8 Formula: MTI = GM1 X12L Note: 12 is constant for all ships Given: W = 2000 GM1 = 80 L = 200Works:  $MTI = 80 \times 2000$ 12 X 200  $MTI = \frac{160,000}{24,000}$ MTI = 66.7 TComment: If longitudinal metecentric radius (BM1) is known it is readily seen that it could be substituted for GM1 since they are approximately equal. E. Calculating MTI with known MTI of a similar ship and the length and beam of both ships know. Again this is a simple proportion problem as we discussed in the TPI section. Sample Problem # 9 Formula: MT11 = MT12 ()<u>L1</u> ()() x <u>b1</u> L2 b2 MT12 = 80Given: L1 = 200 L2 =205 b1 = 40B2 = 40Work: MTI1 = 80()<u>200</u> ()() X ()<u>40</u> () 200 40 MTI1 = 80 (.9506) X 1 MTI = 76.2

F. Computing MTI with only L and b of the stranded ship known Sample Problem # 10 Formula: MTI - L()b 5040 Given: L - 200 b - 30 5040 constant for all ships Note: Work: MTI - (200) () X 30 5040 MTI - 40000 X 30 5040 MTI - 12()00,000 5040 MTI - 238T

### V. Determination of the neutral loading point.

A ship may be aground in one of two ways. It may be aground along its entire length or it may be only partially aground. Depending upon circumstances, trimming may be possible, therefore some point exists along the length of the ship where weight may be added or removed without changing the magnitude of ground reaction. We said before that the center was to be considered as being located at the midships perpendicular for our discussions, I'm confident that you realize while the vessel is afloat this point, in reality, is actually located either forward or aft of the midship perpendicular. This is the point then that all longitudinal movements of the vessel evolve about. As the result of the grounding this longitudinal pivot point must shift to a new location as a direct effect of the segment of force R tending to raise the ship. This new pivot point is called the neutral loading point (NP) and is the point where weight may be added or removed without affecting the ground reaction.

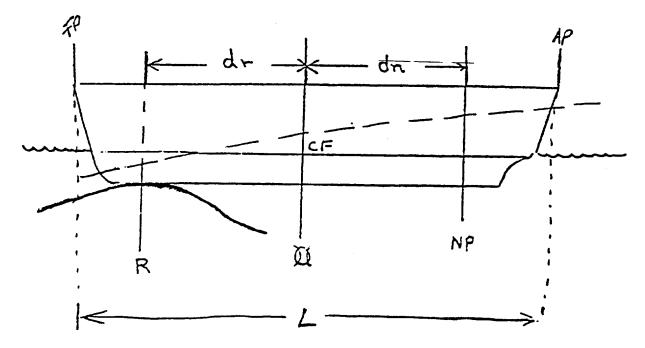

In looking over the above sketch we can see that if weight is added at R, R increases by the amount equal to the weight. As the weight is shifted aft and closer to the neutral point the less effect the weight has on R. If the shift continues past NP going aft it will result in a decrease of R.

Sample Problem # 11 Formula:  $dn = \frac{MTI.L}{TPI.dr}$ Given: MTI = 180 T TPI = 15T dr = 30' L = 200'Work:  $dn = \frac{180 \times 200}{15 \times 30}$   $dn = \frac{36,000}{450}$ dn = 80'

# VI. <u>Tide effects on ground reaction</u>.

In most instances when a vessel is stranded she is in a position where the tide may cause her to change trim as she rests on the rocks. It is therefore mandatory to determine what is the effect of tide on the ground reaction. To determine the change of R due to rise of tide it must be re-


membered that the change of tide occuring at the actual location counts and they must be calculated from the tide tables to this point. In over theoretical simplication, to relate trim to the center of flotation, assume that the ship is free floating and that the rock rises, pushing the ship at the point of grounding out of the water an amount equal to the rise in tide.

Sample Problem #12 Formula:  $RY = \frac{Y, TPI, MTI, L}{(MTI.L()(TPI.dr()))}$ Note: Always figure Y in inches Given: Y = 24"MTI + 200'T TPI = 15T L = 200' dr + 30' RY =  $\frac{24.15.200.20}{(200.200)()(15,900)}$ RY =  $\frac{14,400,00}{53,500}$ TY = 269T

a	- area of free surface in square feet	
A	- area	
AGW	- after grounding displacement	
AP	- after perpendicular	
b	- beam	
В	- center of buoyancy	
	- before grounding displacement	
	- transverse metecentric height	
	- longitudinal metecentric height	
	- block coefficient	
Cm	- midship coefficient	
	- waterplane coefficient	
d	- distance	
dk	- vertical distance from G to final height of weight	
dn	- neutral point distance	
dr	- physical distance from center of flotation to midpoint of actu	al
	grounding point	
dw	- distance from center of flotation to where weight was moved.	
F	- force	
FP	- forward perpendicular	
G	- center of gravity	
Gl	- new center of gravity	
	- virtual rise in center of gravity	
GM	- metecentric height	
	- longitudinal metecentric height	
	- head of water	
	- after draft	
	- forward draft	
	- mean draft	
	- mean draft after grounding	
	- mean draft before grounding	
	- moment of inertia	
	- keel	
	- distance from keel to center of gravity	
	- new distance from keel to center of gravity	
	- distance from keel to metacenter	
	- new distance from keel to metacenter	
	- length	
	- length of stiffeners in feet	
	- length between perpendiculars	
	- length overall - metacenter	
	- new metacenter	
	- moment to trim one inch	
	- neutral point	
	- ground reaction	
	- tide reaction	
	- tons	
	- time for period of complete roll	
	- tons per inch immersion	
	- coefficients of friction	
	- volume	
	- displacement - ()	
	- weight	
	- atwartship distance from center of free surface to the centerl	ine
	- section of modulus	

APPROXIMATE TANKER DIMENSIONS

Dead Weight Tonnage (DWT)	L.O.A. (ft)	Beam (ft)	Draft (ft)	Tons Per Inch Immersion (TPI)	nch TPI)
15,000	480	70	27	70	
25,000	590	80	33	06	
50,000	730	100	40	140	
100,000	880	125	50	220	
200,000	1,070	155	62	350	

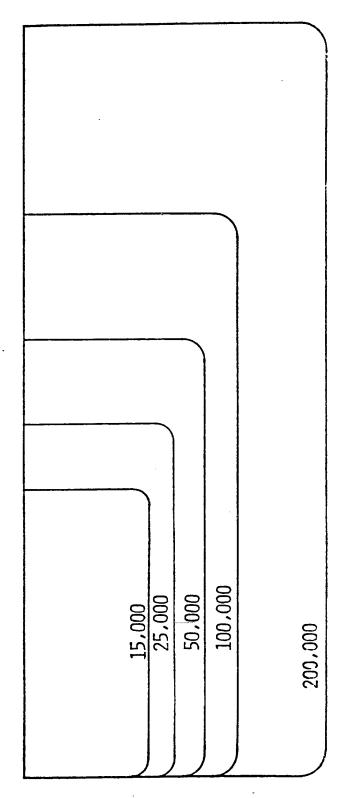




#### APPENDIX E


#### Pump Performance Characteristics

Several graphs of ADAPTS pumping capacity((1)) for different pressure head, discharge hose lengths, and oil types are included in this Appendix. A graph of seawater pumping capacity((1)) for ADAPTS is also given. A graph of oil viscosity as a function of temperature((1)) for several oil types, a graph of pump performance degradation((2)) as a function of viscosity, and a graph of thermal decay of oil cargos((3)) for various tanker classes will be helpful in evaluation the reduction in pumping capacity which occurs when cargo heater fail. A final table of common salvage pump capacities((4)) in tons of seawater per minute is provided to aid in evaluating ballasting times.


#### References


- <u>Operating Instructions for ADAPTS Type II Pumping Sub System</u>, vol. I, U.S. Coast Guard, Ocean Engineering Div., March 1963, pp. (2-42)-(2-45), 2-49.
- Mittleman, J., <u>Cold Oil Pumping Studies</u>, <u>Naval Coastal Sys</u>tems Center, NCSC TM209-78, May 1978, p. 19.
- 3. <u>Emergency Transfer Systems for Disabled Tankers</u>, Supervisor of Salvage, Naval Ship Systems Command, prepared by Murphy Pacific Marine Salvage Co., contract N00024-73-C0273 (Task 74-11), p. 20.
- 4. <u>Ship Salvage Notes</u>, U.S. Naval School, "Diving and Salvage," Feb. 1968, p. 287.



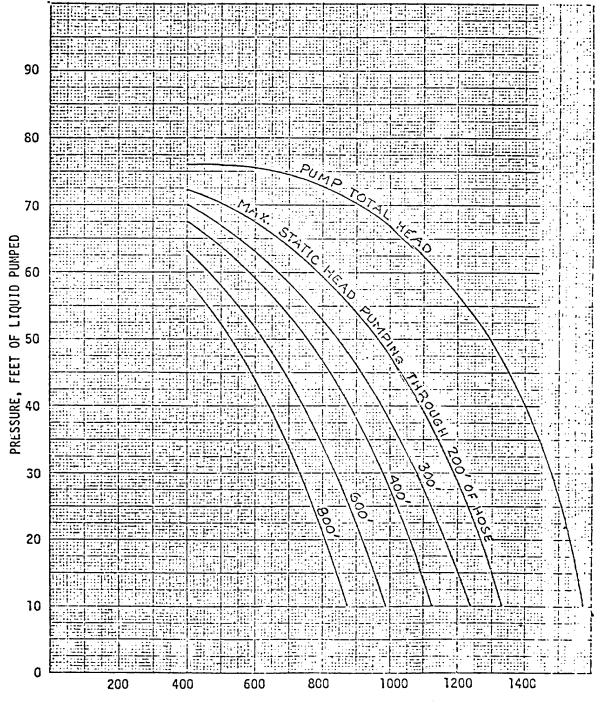


FLOW, GPM E-2




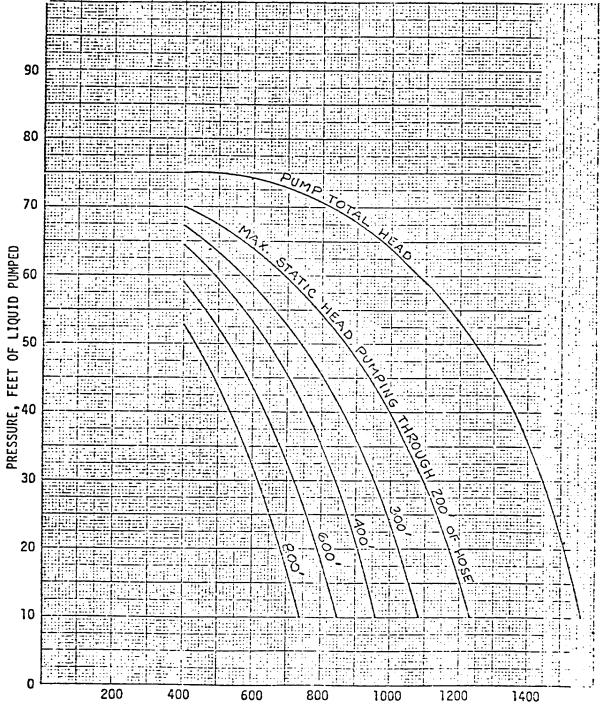


FLOW, GPM E-3

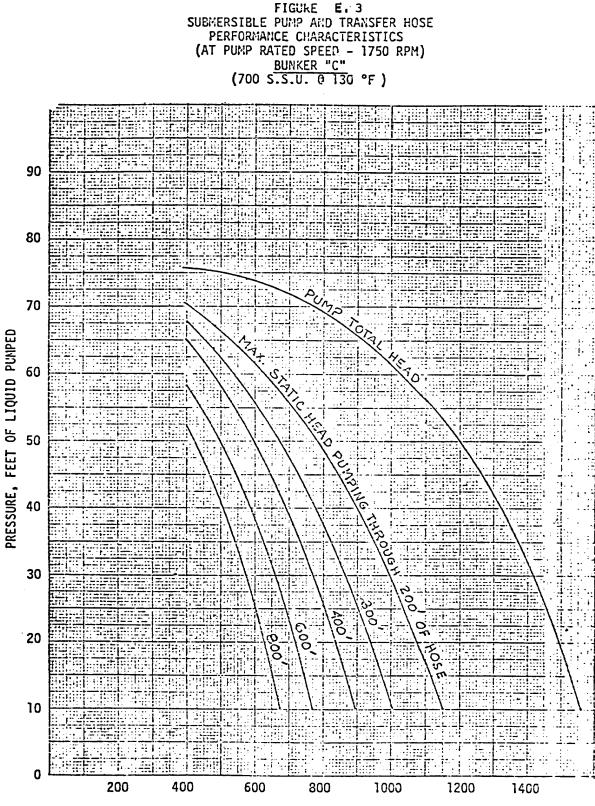

FLOW, GPM E-4

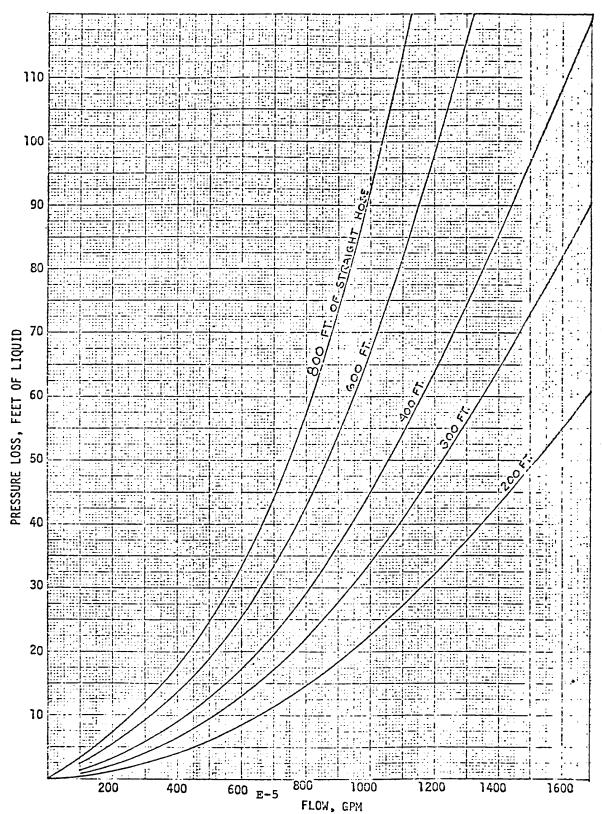


# FIGURE E.4 , TRANSFER HOSE PRESSURE LOSS SEAWATER

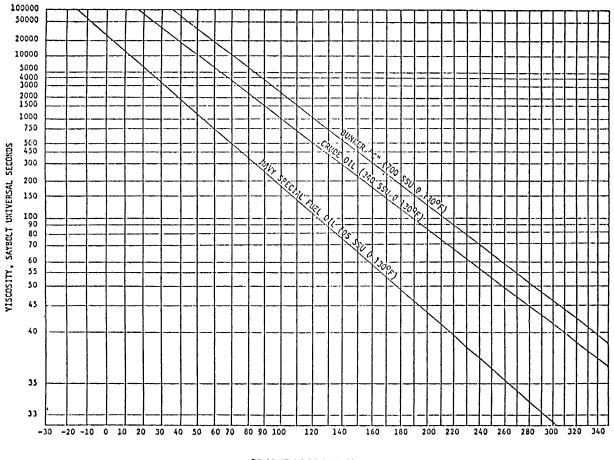


TEMPERATURE DEGREES FAHRENHEIT

GURE E.S VISCOSITIES

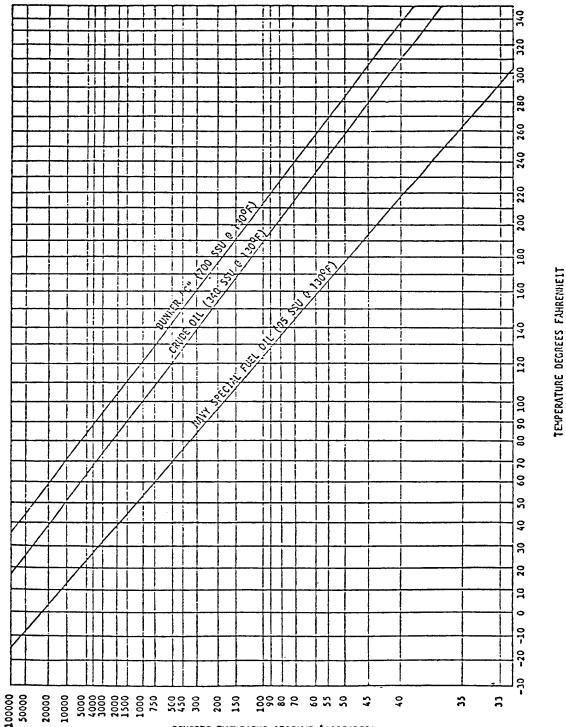


'GURE E.S VISCOSITIES



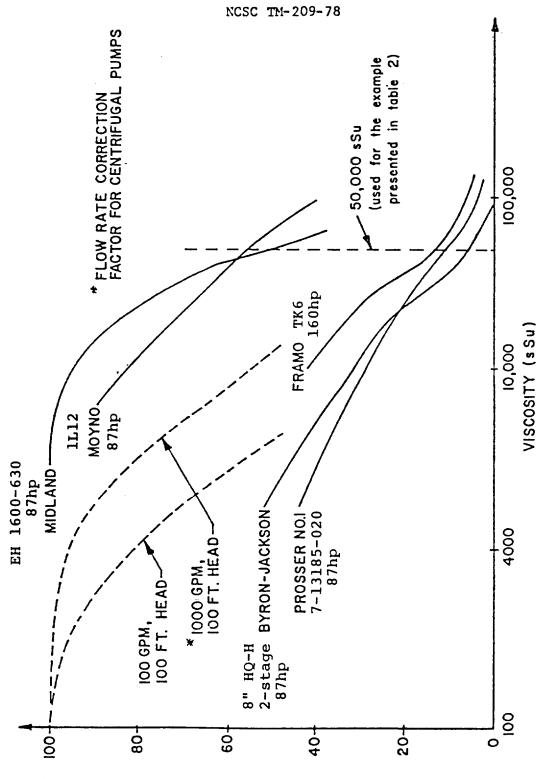

OIL FLOW RATE AS A PERCENT OF WATER FLOW RATE

FIGURE F. 6 PERFORMANCE DEGRADATION 2

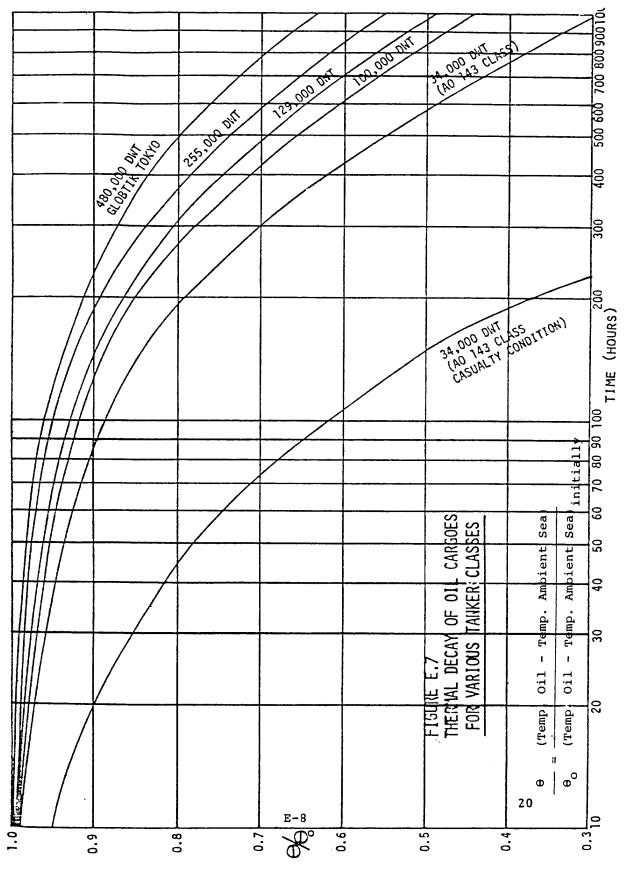

E-8

#### FIGURE E.8 SALVAGE PUMP CAPACITIES

#### Tons per minute

			One ton 2240 lbs One gal 8.53 lbs	•
	SUCTION	UTAD	One C.F. 64 lbs	. (sea)
<u>10 Fee</u>	And and a second se	20 Feet	25 Feet	
	<u>1</u>	0" <u>Pump</u>		
TOTAL HEAD				
15 Feet       12.2         20       "       11.9         25       "       11.7         30       "       11.3         40       "       10.7         50       "       9.6         60       "       8.0         70       "       5.2	10.9 10.8 10.7 10.2 9.45 0 8.00	9.9 9.8 9.3 8.7 7.7 5.25	6.8 6.5 6.0 5.3 4.6	
	<u>6</u>	" Pump		
25 Feet       5.7         30       "       5.6         40       "       5.5         50       "       5.1         60       "       4.7         70       "       4.0	4-9 4-7 4-4	4.0 3.9 3.7 3.4 2.9	3.01 2.97 2.80 2.63 2.32	
	3	"Pump		
25 Feet 1.23 30 " 1.21 40 " 1.12 59 " 1.00 60 " 0.91	1.04 1.01 0.86	0.90 0.88 0.83 0.74 0.72	0.64 0.63 0.60 0.56	

#### APPENDIX F

#### Wind and Current Force Calculations

The basic calculations for determining the wind and current forces acting on a vessel are included in this Appendix.

This Appendix was taken from:

Ogg, R. D., <u>Anchors and Anchoring</u>, 8th edition, 1977, (Danforth), pp. 12-15.

rately predict air drag for various objects research that it is now possible to acouthe Inst correlation of these tectors was published by Sir isaac Nawton as cally as 1886, it is only because of avalian the object in the windstream. Although The formula for air deag "O" is com-Honey expressed

0 - Co. WB


unthe durrelity of air, which varies as

÷.

- explained in a later paragraph
- is the wind velocity. Is the cross sectional area tak on al tight ungles to the direction of the 20
- Co is the dimensionless openiciani of drag which varies with shape or DUNG.

profile and can be deturmined from wind turnel lests. estimating perposes. Variations in size ligures somewhal, buillor practical purof object and wind velocity affect these suitably scaled model and run tests on Including some typical values of Gillor Generally it is impractical to build a aniadividual boat. Thanatare, we are

NAUTI Ğ



ervisonere concave to wind neurolise cuoto ingo das masis ingo das masis ingo das masis indo das anas indo das anas indo das anas indo das anas indo das ana ana reconstructure with ally lor peasure boals a lique in found satisfactory. Abrit ally lor peasure boals a lique in a norwal with un dar- tor the wind with un dar- tor the wind with un dar- tor the wind with un dar- tor variations mark dirocity with a darisity and hun do of a darisity and a hun do of a darisity and darisity and darisity and darisity and hun do of a darisity and daris	Hollow herrisphere, concave to wind If the amernomitier cuotic the If the amernomitier cuotic the Write, cyrinulors, masis Cargo thror, wind dead ahead Write dead ahead Stroamilieed passinger finer, wind dead ahead Stroamilieed passinger finer, Write an anti- Stroamilieed passinger finer, Pleature brats, wind dead ahead Pleature brats, wind dead ahead Alectrol Strutter cupic the proviolus Alectrol Strutter and with a blocky ploid pues might pass that four the proviolus of Blowith a real value with an den- ble square but neved from the proviolus formula, wind dead value are with the proviolus formula wind dead value are with the den- sity hormatic area and with an den- sity hormatic area and area and and dead and an area density and area and with an den- sity hormatic area area and and ado ada.	5	182		38			2.	-	47	38	88	38		Ħ.			1.1	đ	1	11		. 7	C
ervisoriaria concave nerrometer cuoto nerrometer cuoto nuo disc nuo disc nuo disc nuo disc nuo disc nuo discata sha ervisoriore, convex to read shard an to ally lor pousure boats nuo discriter cupt nuo dity lor pousure boats nuo discriter cupt nuo dity lor pousure boats nuo dina share dity lor pousure boats nuo dina sectoro di nuo di a con and with tinty utter estimated tinty articutes to nuo density and huncors nuo density and huncors	ow herwisphere, concave ke anemometer cuot rectangular plate rectangular plate es, cylmidos, masis si, cylmidos, masis politico, wuid dead ahead antilved passanger liner, antilved passanger liner, antilved passanger liner, antilved passanger liner, antilved passanger liner, antilved passanger liner, antil sixu, anemometer cupt antimet, charter share antimet, cupt passure boats own the found satisfactory a really stack super structure antimet, cupt passo the for an any ta rected from the plate antimet, contrater and with hermitar variations an de mast domaile a ch. and with hermitar variations and de antimet domaile a ch. and with hermitar variations and de antimet domaile a ch. and with hermitar variations and de aver the domaile a ch. and with	um o		Weight and	01211	1.14		head	70	brind.	1.1.1	10.00		in a	A bo	pilot	9	101.0	TATIN A	ur der	NIN'S	diad in	No Gu	CIII M LIG
ervisophere, con hernometer aug angular plate angular plate (hulder, mista fer, wind dard ah bed passenger) ervisiphere, con tervisiphere,	ow hernisphere, con ke anemometer cuo ractangolar plate ractangolar plate ractangolar plate si cylmidors, masis go tinor, wuid dead ah antiker a passangari ning dead ahaad ah antiker a passangari ning dead ahaad ah ow hernisphore, con trans and an an ow hernisphore, con trans ow hernisphore, con trans ow hernisphore, con trans ow hernisphore, con trans ow hernisphore, con trans ow fight an an own the found satisfi a really stack super a antigrup a 20 wind a co. and denniar variavensm herniar variavensm	Cave		COMP.	head	oBd	iner.	14 20		vex to	1	WWW 21	00412	boals	Letony Fruction	lochy.	ULE IO	idau	Director.	-91	an' da	uhtod-	OLON .	N CO K
envisorher dis nerronnellor pla nor unor discon nor , wurd discon nor , wurd discon electic discon envisorher envisorher ally lar pla ally lar pla ally lar pla ally lar pla ally lar pla ally lar pla ally lar pla nerd angut ally lar pla nerd angut are discon are d	dw hornispher ke anemonielit ple rectengular ple s. cylintörs, m jo thror, wund da antier, wund da antieve boata hassa antieve boata hassa antieve boata, wr ere by hernispherie we hernispherie we amemonielit tere we hernispherie with strut. Fill	000	nde Dia	10.000	e ad a	da be	1Jager	1 14		100	reup		hape	BILLER	si lista Lineral	d R E	() Fel	Ele	Val 103	Line.	11SIII	est in	01150	ad-Du2
dense perros (hutta to al to a	An horns we another rectanged s. cylintel s. cylintel anter wu anter wu anter wu anter wu anter wu anter beat out b	phere	arple	50	E Sta	Id DB	9856	a head		e lova	mete	1	filar s	Totd 17	Hund S	1WO2	h asre	010	(Lin the second	darce	CINER OF	ultect		2 411 51
	A MARK A	GITUS	Indua	unrid	NHILL W	I.W.	i pari	lead.		emis	DUTTED	L.W.	ned C	allyfic	to 10	1.83	1 ILB	A LEB		tuoit	1111	NIIII/	Distill	N'AGI

Humidity, contrary to recal assumption, ized when one consider that the den-18.02) is only about (ive-signits inat of dry air (molocular weight 28.95). silvet water yaper (molecular, weight decreases air density as may be real-It is evident from the above that au

velocity will drive a sailboat harder when there is a high barometer or during cold will exert more force than with the same secounts for some of the additional severity of whiter seas. Also, a given wind willy a given velocity on a cold dry day velocity on a warm humid day, which NUTITED

Substituting the dansity of U.S. standard almosphere" in the above tormula and converting to useful units where D Is in pounds, V-in knots and S-in square feet wegul

00339 CeV/15 ő For convenience, sayeral values of Co pounds por square foot of cross section locity than unrobsiructed winds higher un. The value for Sican be injured from this for multiplits well to hote that surface ara plotted in the chart showing drag in caused by waves, usually nave less vo-Buistrul, Block of Micolov brink Inertal winds, dod to friotion and hu balance

(In = 0023779 slugs / h.2 at 50° F. with a barometer of 29:92 lin Hg NACA-NBS Standarul

> charly. As imight the expected, high handmetric pressures will increase air den-sity while high temperators will lower li.

eter, tomporthing, mid humidity (sec

F-2

WIND DRAG

poses, the following values are suitable

for estimation. You will hole from these

hqures the trememobus importance of

grinimeaus

Wind lorce or "drag." as it is relerized wind velocity, air density, and snape of to In serodynamics. Is detarinuned by

boat plates or notural monsurements and must include such tions as musts, e.g. pung, venhinkorn, that

(C-M of ., 10 humma a cross sectional area (r/pging inclured) of 60 square fact in a wind velocity of 60 kmols would be Inteardned bout with dray costlociant As an example live wind drag plin calculated as follows:

70 × 00339 × 60" × 60 0

As an alternate method, wind drag may examp be found by using the chart below. Here we find the drag per square TOUTING & ANALINOXIDE & TOOL - 683 pounds

- 10mcm
- 680 pounds D - 8.5 × 80

# CURRENT DRAG

precientie, sconetures even gi silier than On rivers, in lidal areas, and during proter weather, current load can be apthat due to the wind. During hurricanus and other similar storms abrotmal currents should be antimpated

Current drag is generally sagar to un-duretund framwind drag because of its


8 10 case graves, second memory processing starting according to the second memory of the second starting according to the second memory of the second starting second starting of the second second starting second starting second second second second starting second starting second second second second starting second starting second second second second starting second The second second open provide the two management of the second second

to boid a boal against a current of the wared yelodity. Considerable data in the requires approximately the same lores water of a given speed an a would take sources as boal, engine, and propeller manufacturees, navel anotheois, etc. While durant deep can be mous. to propel or tow a boat through the In molection of the part propulsion II respect we available who up the party is

ured dir solly by towing a boat. It may be approximated au (ollows from propul-ELVE-COLO

Puist the current drag in Where:

-nem or short and initial or man-RPM with propeller fevolu-His the imgine horsepower Imited from engine pet-Pissible propellier prictium formatice data whan the V is the velocity in knots delivered billive desired itale vacuum or ihrattie -swed yund nuty be we-Involution are known ゆうただに このは ちにのお Ipunad series

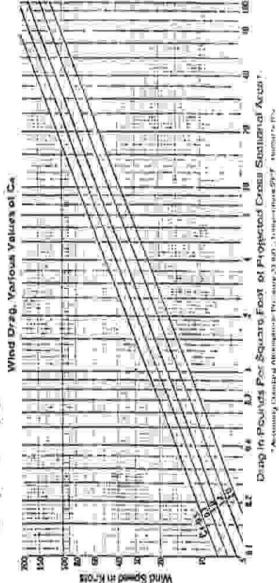



using a 60 horeapower auxiliary angine sistance of a forty foot or ulsing aloop in a five knot current, a test ron was made A velocity of five knows was achibved at 1000 properties FUSM with the angine delivering an esumated twanty hor se-power to an eight inch piloh propelior. Subsiliuting in the above formula we As an example to delemine the redet:

drag in pounds, boubia the square loor sge in the propriser and multiply by the current velocity in knole squared. This rule is for proving in knole sperure. for entirely exposed propriser and tifty per cent to this figure. propeller drag. To visualiza propeller If you really want to include mury. Thing, you may also consider your 312.5 pounds.

#### APPENDIX G

#### Tug Power Requirements for Towing

"In estimating the power required for the towing ship (ships) it will be sufficiently accurate to take the towing resistance of the dock\*, i.e., the tow rope pull, as 1 lb. per sq. ft. of wetted surface at a speed of 4 1/2 knots. This varies only slightly according to the molded lines of the dock's\* underwater body. The resistance at other speeds, up to a certain limit, will vary almost directly as the square of the speed. Most tubs may be figured as fiving a tow rope pull of about one ton for every 100 ihp."

In heavy seas, 3 times this estimated pull may be required.

Taken from:

The U.S. Navy Towing Manual

\*This paragraph refers to the towing resistance of a floating drydock. It will serve as a rough estimate for towing other vessels.

#### APPENDIX H

#### Key Response Item Data Sheets

Presented here are commercial data sheets on many of the key response items discussed in this report. These are systems that appear to be viable and are currently or soon-to-be available in the American marketplace.

#### EMERGENCY CARGO PUMPS

# Framo Offloading System

## **TECHNICAL SPECIFICATIONS**

Applications: Capacity: Hydraulic motor: Hydraulic working pressure: 320 bar. Hydraulic oil flow:

Instrument and controls:

TK5 pump, suitable for most chemicals and light to medium viscosity products. Emergency discharge, transfer and fire fighting. Materials exposed to cargo: Stainless steel AISI 316 L and Teflon. 190 m³/h. against 70 mwc. ref. diagram. Axial piston design. 130 l/min.

FRAMO patented cofferdam/shaft seal arrangement eliminates contamination risk. The pump is supplied with 18 m, of consentrically fitted pressure and return hydraulic hoses, with control valve and snap-on couplings.

TK6 pump, suitable for SW. and petroleum products of light to heavy viscosity. Applications: Emergency discharge, transfer and dewatering. Coated SW-resisting aluminium. Material in housing: Material in impeller: Stainless steel AISI 316. Capacity: 500 m³/h, against 30 mwc. Hydraulic motor: Axial piston design. Hydraulic working pressure: 240 bar. :210 l/min. Hydraulic oil flow:

The pump is fitted with snap-on couplings for connection of separate pressure and return hydraulic hoses.


Dieselhydraulic, selfcontained powerpack, for operation of one TK5 or one TK6 pump at rated capacity.

160 HP at 2800 rpm. Diesel engine rating: Hydraulic pump: Axial piston design. Hydraulic working pressure: Max. 320 bar. Max. 210 l/min. (at 250 bar). Hydraulic oil flow: Volume 80 I. Hydraulic oil expansion tank: Part, flow, automatic engaged Hydraulic cooling system: Volume 301. Diesel fuel start tank: Valved 1/2" snap-coupling. External fuel supply: Hydraulic, automatic and manual recharging. Engine start system: Hydraulic, automatic stop for engine and hydraulic Engine stop system: system malfunction. Twin spark arresting silencer. Exhaust: Hydraulic, mechanical.


The powerpack is built as a compact portable unit with skid base and aluminium frame.



TK5-pump.  $H = 653 \,mm$ .  $Ø = 298 \,\text{mm}.$ (Butterworth size) Weight: 70 kgs. (Excl. hoses). Weight: 130 kgs. (Incl. hydr. hoses) Discharge conn.: 125 mm. Sandvik clamp coupling for alternative fiange adaptors









Dieselhydraulic Powerpack.

L = 2100 mm., B = 800 mm., H = 1200 mm. Weight incl. oil and fuel ready to start: 1100 kgs.





H-3


#### SPECIFICATIONS

#### Submersible Pump

Type – 8-inch, single stage, submersible turbine pump, hydraulically driven Capacity – See Curve Size – 10" OD x 60" long Weight – 200 lb., including drive motor

#### Hydraulic Power Unit

Engine — 4 cylinder diesel, air cooled, manual/hydraulic start Capacity — 40 HP at 3000 RPM Hydraulic Pump — Fixed displacement, vane type Capacity — 29 GPM at 3000 RPM, 2000 psi working pressure. 35 gallon hydraulic reservoir Unit Size — 45" x 48" x 36" Unit Weight — 1100 lb.



#### Cargo Hose

Type — Lightweight, fabric reinforced rubber collapsible discharge hose fitted with aluminum quick connect cam-type end fittings

Size - 6-inch diameter, 50 feet long

Weight — 115 lb. per 50' length, including end fittings

Pressure Rating - 75 psi working; 275 burst

Explosion Protection - Double wire electrical ground in hose wall

#### Hydraulic Hose

Size — 1-inch inside diameter, 80 ft. per section Weight — 110 lb. per 80 ft. section Fittings — Quick connect type Pressure Rating — 2000 psi working; 8000 psi minimum burst


#### Handling Gear

Tripod — 2 ton capacity, legs adjustable from 8 ft. to 15 ft. Manual Grip Hoist — 3/4 ton capacity with 5/16'' wire rope Combined Weight — 250 lb.


#### **Optional Accessories**

Hose Guide External Fuel Bladder Flow Meter Pump Flange Adapter Pump Booster Adapter

SEAWARD, INC.



**STOPS Hydraulic Power Unit** 



**STOPS Submersible Pump & Tripod** 

### SELF-CONTAINED TANKER OFFLOADING PUMP SYSTEM

OIL SKIMMERS

#### BENNETT SKIMMERS

#### Standard System

The bow ramp functions as a variable height weir, by-passing most of the incoming water underneath the skimmer and allowing only the surface layer of oil and water to pass into the interhull area. This, together with the operation of the gill doors, has the effect of reducing the interhull flow velocity relative to the skim-mer's speed through the water. Debris is filtered out of the incoming oil and water by a sloped screen which facilitates its transfer to the debris storage rack. (A debris conveyor may be fitted instead of a screen.) Oil draining from the storage rack runs into the interhull collection area.

The oil layer flowing through the interhull area next comes into contact with the dry belt at almost zero rela-

Fig. 5 STANDARD SYSTEM


tive velocity, since both are moving in the same direction. The belt displaces the oil layer beneath the surface of the water and the hydrostatic pressure forces the oil layer into close contact with the belt. This accelerates absorption of low viscosity oils and adsorption of high viscosity oils. (The dual absorptive and adsorptive properties of the belt eliminate the need to modify the system for changes in oil viscosity.)

Oil removal from the belt is carried out through the perforated squeeze belt running in contact with the main belt around the head roll. Squeezing over the large surface area of the head roll keeps the main belt in compression for an extended period. ensuring the thorough removal of all oil. High viscosity oils are removed from the squeeze belt by a scraper.

For very heavy oil flows the secondary weir system comes into action. trapping any oil not collected by the belt. Oil accumulates underneath the variable height weir and then flows through ports into the sump.

#### Unitised System


The unitised system is designed for installation in existing catamaran hulls or where it is desired to raise all interhull skimming equipment out of the water for high speed transit. It differs from the standard system in that the leading edge of the scoop replaces the bow ramp and the flow control vane replaces the gill doors. In very heavy oil flows, oil may be pumped directly from the back of the scoop.

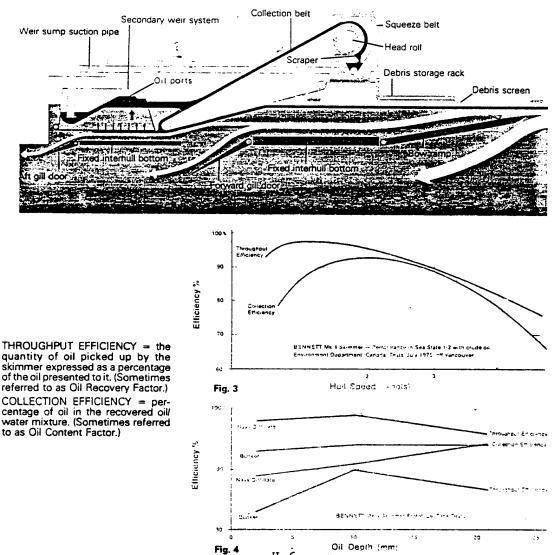


H-6

quantity of oil picked up by the skimmer expressed as a percentage of the oil presented to it. (Sometimes referred to as Oil Recovery Factor.) COLLECTION EFFICIENCY = percentage of oil in the recovered oil/ water mixture. (Sometimes referred

#### BENNETT MARK 4 AND 6

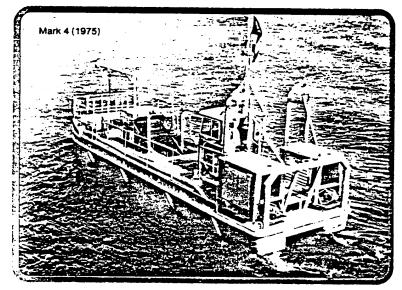



Mark 6D The Mark 6 range of skimmers has been developed from the successful Mark 4 unit. The Mark 6D features a central diesel/hydraulic power plant with twin overstern hydraulic propulsion units. It is designed for inshore/offshore skimming duties up to sea state 3. Large deck area for auxiliary equipment storage. Crane with grapple for oversize debris handling.

handling. Length: 42 ft (12.8 m) Beam: 14 ft (4.27 m) Speed: 5 - 10 knots Oil recovery rate: 350 U.S. gpm (79.5 m<sup>3</sup>/hr) Oil storage: 2500 U.S. gallons (9.46 m<sup>3</sup>)


	The	Bennett	Mark	IV	Skimmer	is	а	self-propelled	unit	powered	bу	two	GM	6V5 <b>3</b>
engines.														

#### 3.6.2 Specifications.


Length Overall	40'-03''	(1) 2	<b>`</b>
•		(12.3 metres	•
Beam	11'-11''	(3.6 metres	)
Draft – Loaded		*	
Ballast Pontoons on	7'-00''	(2.1 metres	)
Ballast Pontoons off	3'-05''	(1.0 metres	)
Freeboard	2'-00''	(0.6 metres	)
Shipping Height	10'-06''	(3.2 metres	)
Power - 2 G.M. 6V53 Diesel			
Engines rated at	240 H.P. (22	00 RPM)	
Porpulsion and Steering	2 Schottel 360	<ul> <li>Drives</li> </ul>	
Design Speed	7 Knots		
Pumpage	Moyno progress	ive capacity	
	pumps		
Construction	Aluminum		~
Gross Weight	34,000 lbs		(15.4 metric tons)
(shipping configuration)			
Towing	Lugs provided f	ore and aft	

#### CYCLONET 100

Cyclonet 100 is designed for slick-skimming operations in the open sea. It consists of two one-meter-diameter, Cyclonets which may be mounted on either side of moderately sized vessels such as trawlers, small oil tankers, etc. Maximum flow of oil mixture removed is 180 m3/hr (this is maximum discharge of pump provided). Ship speed may lie between 3 and 10 kmots.

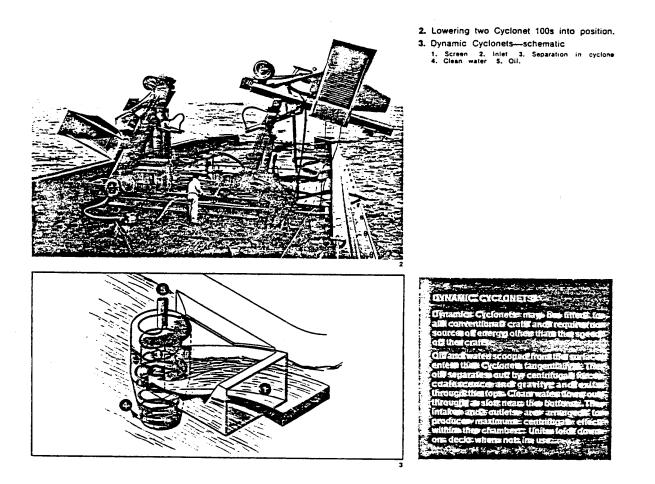



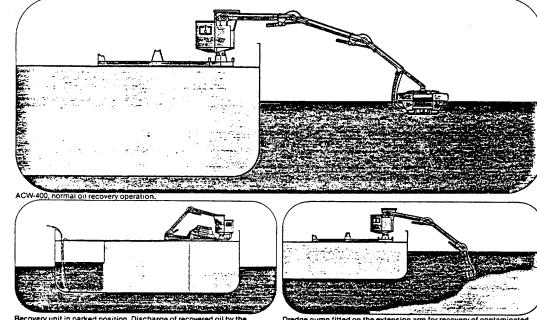

Recovery unit in parked position. Discharge of recovered oil by the portable submersible pump.

#### a ノ | | N.

The ACW-400 is designed for operation under sea-state 4-5 Beaufort, with significant waves of 2-3 m. Based upon the results achieved during the operation at Ekolisk in May 1977, the system was approved by the Norwegian Authorities for the North Sea contingency maintai-ned by the field operators clean seas group.

The ACW-400 will handle light diesel oil as well as emulsified, cold and viscous crude and bunker fuel. The recovery arrangement can be adjusted from a closed adhesion system for the light diesel film to an open flow high volume weir system which on heavy layers is limited by the transfer pump capacity only.

The great advantage is, however, achieved through the combination of the systems. In addition to the adhesion function the recovery drums have a conveyor effect and accumulate oil ahead of the adjustable weir barrier. This forces the water level down and create a heavy layer which barrier the source over the weir with minimum water content. The surplus oil being accumulated under the guiding vanes will then also be flushed over the weir and eliminate clogging.

Operational conditions	Capacity/head

Operational conditions	Capacity/head	Watercontent beyond emuisio
Viscosity 100 C. Stoke Oil layer 20 cm. Oil layer 2,5 cm.	400 m <sup>3</sup> /h - 35 mwc. 60 m <sup>3</sup> /h - 45 mwc.	Max. 20% Max. 10%
Viscosity 500 C. Stoke Oil layer 20 cm Oil layer 2,5 cm.	250 m <sup>3</sup> /h - 40 mwc. 100 m <sup>3</sup> /h - 45 mwc.	Max. 15% Max. 10%
Viscosity 1500 C. Stoke Oil layer 20 cm. Oil layer 2,5 cm.	150 m <sup>3</sup> /h - 35 mwc. 100 m <sup>3</sup> /h - 40 mwc.	Max 10% Max. 15%


Dredge pump fitted on the extension arm for recovery of contaminated sand, reed etc., or dredging.



over adhesion discs. Maximum capacity abt. 100 m³/h

Pumpwell/weir in upper position. All oil being carried





Pumpwell/weir in middle position. Accumulated oil gravitating over the barrier. Surplus oil under guiding vanes being flushed over the barrier.

Pumpwell/weir in lower position. Surface oil layer gravitating directly into pumpwell. Conveyor effect of recovery drum improving the flow of oil over the barrier.

<u>\_H=9</u>


#### FRAMO (Contd.)

The FRAMO ACW-400 is designed for highvolume recovery of oil contained in booms on water. A new combination of weir and adhesion skimming principles improves the overall efficiency and is particularly advantageous for handling of high viscosity emulsified oil.


The ACW-400 is a selfcontained unit that can be instantly installed on a wide range of vessels from harbour tugs and ferries to offshore supply vessels and tankers. The recovery operation at Ekofisk during the «Bravo» blowout proved successful operation from an offshore supply vessel in sea state 4-5 Beaufort.

The recovery system is controlled by one man from an operation cabin. The skimmer head is mounted on a hydraulically balanced extension arm which incorporates both oil transfer and hydraulic transmission lines, thus eliminating all hose handling problems. From parked position on the deck the skimmer's head is launched and positioned in the oil slick by the extension arm. When in position, an automatic load compensation system is engaged allowing the arm and the head to follow the main wave movements at an ideal stable skimming draught. The skimmer head can be moved sideways and the extension adjusted independant of the automatic vertical movement. The skimmer head can be lifted back on deck in seconds allowing the recovery vessel to retreat immediately if required in emergency. The system includes a portable submersible pump primarely intended for discharge and transfer of the collected oil. This pump is designed for entering tanks through butterworthsize openings and is also excellent for emergency offloading of disabled vessels to prevent pollution. Being made from stainless steel the pump can handle both oils and chemicals, and lowered into the sea it can feed fire monitors at 9 bar. The pump is hydraulically driven from the powerpack on the recovery unit. This powerpack can easily be disconnected for separate use with the portable pump.

As optional the extension arm can be fitted with a hydraulically driven dredge pump for recovery of contaminated sand, mud or reed with solids of otin 100 mm.This mini dredge arrangement is also recommendable for regular harbour and canal maintenance work.

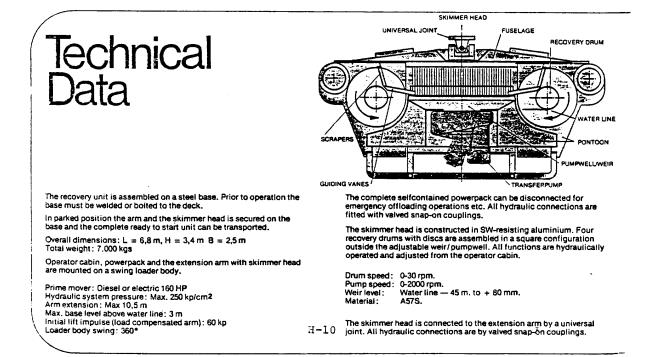




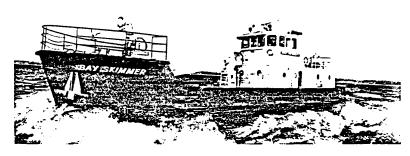

OFFSHORE OIL RECOVERY VESSELS --100 LT TO 750 LT, OIL STORAGE 10,000 TO 70,000 GALLONS

Double chined displacement hulls amply powered with twin propulsion systems provide high cruising speeds and excellent seakeeping characteristics. The bows are arranged to be opened during oil recovery operations and closed while transiting or operating as work boats and supply vessels.



Dynamic Inclined Plane (DIP) Recovery Systems collect oil by forcing it under the surface of the water. Oil follows the surface of the moving inclined plane to a collection well underneath the unit. Buoyant forces cause the oil to naturally separate in the well where it forms a deep oil pocket. Water-free oil is pumped from the top of the well to storage.




- The ability to harvest any floating material, including debris and sorbents, without changing the recovery system configuration.
- Automatic oil/water separation so that the recovered oil is transferred water free. No water is added by the pickup process.
- A rugged, long-life belt, that uses natural forces to transport the oil to the collection well. No absorbent, or flow-through, principles are required.
- Recovery may be performed at speeds, or in currents, between 0 and 3 knots.
- Excellent performance in waves since the oil is collected under the unit.

JBF SCIENTIFIC CORPORATION 2 Jewel Drive Wilmington; Mass. 01887 Tel. (617) 657-4170 H-11


Copyright © 1974, 1976 JBF Scientific Corporation \*JBF and DIP are trademarks of JBF Scientific Corporation JBF DIP OIL and Sorbent Recovery Systems are made under one or more of the following U.S. Patents: No.3,716,142 3,804,251 3,926,812



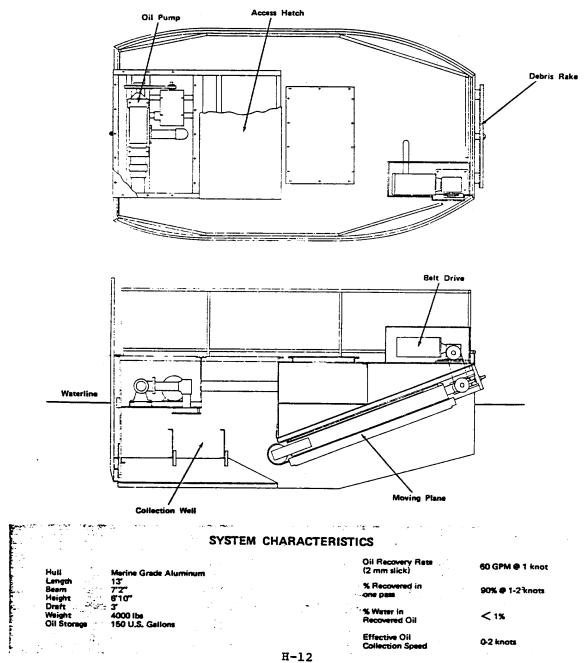

Copyright © 1974 JBF Scientific Corporation \*JBF and DIP are trademarks of JBF Scientific Corporation JBF DIP OIL and Sorbent Recovery Systems are made under one or more of the following U.S. Patents: No. 3,716,142 3,804,251 3,926,812



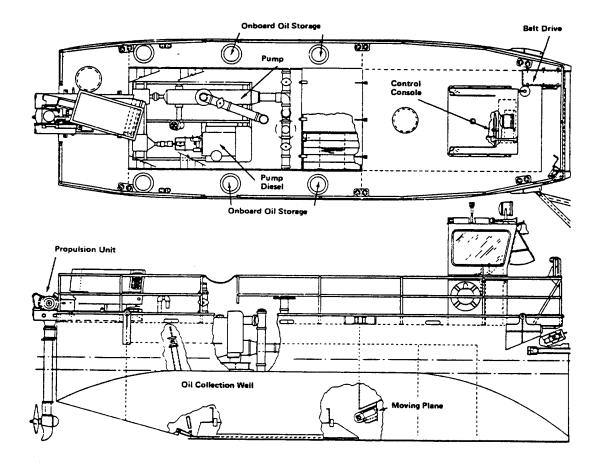


#### SYSTEM CHARACTERISTICS

Hull Length Beam	Marine Grade Aluminum 38' 11'	Oil Recovery Rate % Recovered in one pass	450 gpm 90% @ 1-2 knots
Draft	4′8″	% Water in	< 1%
Weight	16 LT	Recovered Oil	
Oil Storage	4000 US Gallons	Effective Oil	0-3 knots
Pump	450 gpm	Collection Speed	

#### H-13

Copyright c 1974 JBF Scientific Corporation "JBF and DIP are trademarks of JBF Scientific Corporation JBF DIP OIL and Sorbent Recovery Systems are made under one or more of the following U.S. Patents: No. 3,716,142 3,804,251 3,926,812



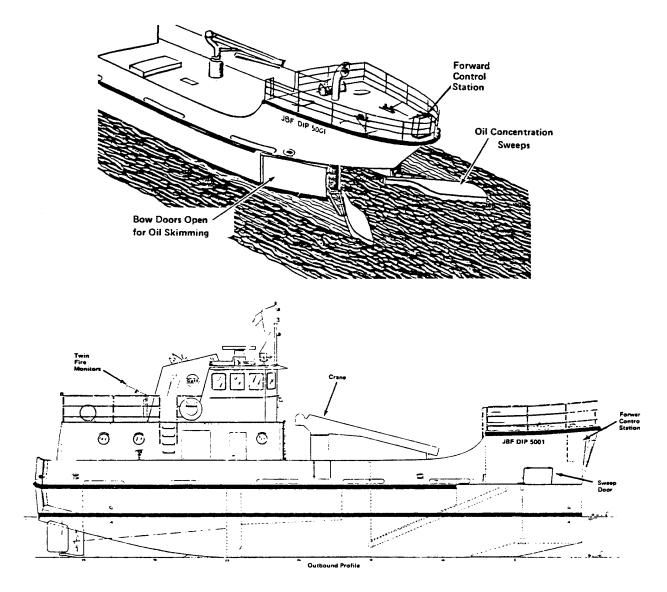


#### SYSTEM CHARACTERISTICS

Hull	Steel	Draft, Ready for Sea	5'	Electric Power, Each Generator	25 KW
Displacement (Fully Loaded)	100LT	<b>Draft, Full Load</b>	6′	Cargo Capacity	10,000 gal.
Length Overall	68'	Horsepower, Total	500	Recovery Rate	550 gpm
Length, Designed Waterline	65′	Fuel Consumption,		% Recovered in One Pass	90 @ 1-2 knots
Beam, Molded	17'	Full Power	28 GPH	% Water in Recovered Oil	< 1%
Depth, Molded	9,	Cruising Range	300 mi.	Effective Oil Collection Speed	0-3 knots

#### H-14

Copyright@ 1977 JBF Scientific Corporation \*JBF and DIP are trademarks of JBF Scientific Corporation JBF DIP OIL and Sorbert Recovery Systems are made under one or more of the following U.S. Patents. No. 3,716,142 3,804,251 3,926,812

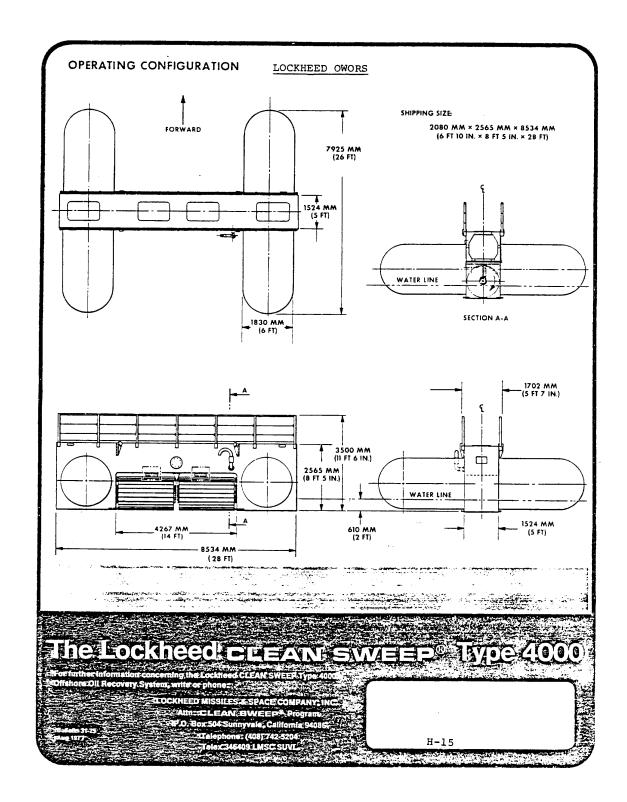


#### LOCKHEED OWORS (Contd.)

#### OPERATIONAL TESTING


The CLEAN SWEEP<sup>1</sup> Type 4000 has unusual structural credentials for operation and survival under severe sea conditions. The system is capable of operating efficiently in any North Sea sea state in which it would be expected to recover spilled oil. (A turbulent sea that mixes the oil with the sea water or causes it to sink below the surface would make recovery impossible; so would a sea state so severe that the support crew could not function.) The Coast Guard unit was successfully towed in a Sea State 5 at 14.8 km/hr (8 knots) with 5-meter (16-foot) seas and 74-km/hr (40-knot) winds. The unit survived long-term exposure to these conditions and returned to operations without repair. It is the only oil recovery device on the market that has been proved in these severe conditions.

Oil recovery performance testing has been conducted with outstanding results. In one case, more than 3,780 liters/min (1,000 gpm) of 75-mm (3-in.)-thick 1,500 cSt black oil was recovered in 610-mm (2-ft) waves at towing speeds of 3.7 km/hr (2 knots). In another, more than 378 liters/min (100 gpm) of 0.25-mm (0.01-in.)thick light lubrication oil was recovered in calm water at 3.7-km/hr (2-knot) speed. The unit is on station for duty in case of casualty oil spills. In competitive testing against other devices under a wide range of conditions, the Lockheed CLEAN SWEEP disc-drum system was the undisputed winner. È

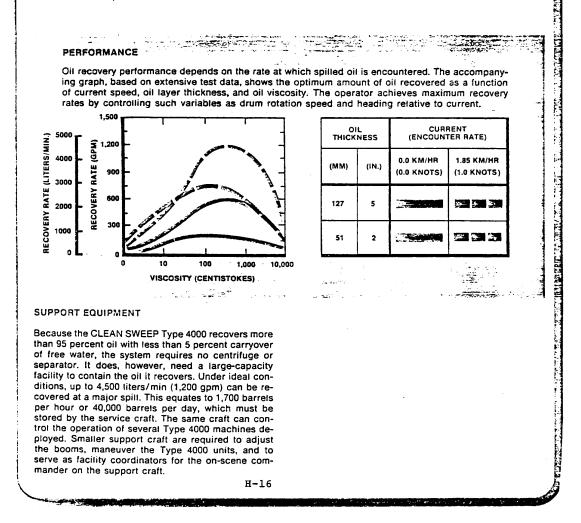

# CLASS III

harbors, sounds. Three of these Uses two Filterbelts to recover up to 600 gpm of oil in a large spill of crude or thick bunker oil. Range 480 miles. Accommodations for crews; ope-Has radar, radio, sonar and other navigational equipment. Skims at up to 3 knots. Twin main diesels of 200 hp 58 feet (19 meters) for large bays, sels specifically designed and built lor oil spill recovery — are manned San Francisco and Puget Sound. each drive water jets or optional al operating ability at night. On-board pumping capacity of 400 gpm. Water skimmers – the most advanced vesand ready to go in the major ports of rates continuously for days at a time. variable-pitch propellers. Exceptionheated sumps for 90 bbls; off-loading spray booms create 45-foot swath. Can carry work boats and more than 000 feet of containment boom.



have water spray booms to "sweep" oil to Filterbelt

# CLASS V

signed for responding in one direction, skimming in the other. Unique design for exceptional 36 feet (11 meters) "reversible skimmer" demaneuverability — turns 360° in-place. Skims at up to 3 knots; can be towed to sea at 12 knots. Skims up to 300 gpm. This heavy-duty skimmer has been proven to be rugged, reliable in many spills - notably the 2,000,000 bbl Gowanus Ship Canat spill.




Flotilla of Class V skimmers being delivered to Navy support lacility from Marco shipyard in Seattle. Class V can be transported by highway trailer or heavy-lift helicopter; also, a modular version can be shipped via C-130 cargo plane. Nearly 30 Class V skimmers have been delivered to US Vavy, major oil companies, port-protection agencies.



lection booms, and skimmer. Each skimmer Class XI "PetroPack" Skimmer is shipped in packages by any mode for quick assembly on tanker, tug, or workboat. System includes power unit, outrigger spars, colrecovers up to 48 tons/hr

# CLASS VII

rating features to Class V. Larger size permits spill containment boom. Has 80 bbl on-board 50 feet (15 meters) similar in design and opeindependent operation in remote areas and laster responding speed, carries 1000 feet of storage capacity. Alyeska has Class VII on duty at Valdez, and Vancouver BC has one for Burrard Inlet protection.




Class VII skimmer can rotate on its own axis, respond at knots, skim at 3 knots.

Both skimmers also have large induction pumps Both skimmers store recovered oil in sump for behind "Filterbelt" to draw even viscous and off-loading with on-board pumps with sufficient head to reach trailing barge, platform, or tanker. weathered products to the recovery unit.




Skimmer is launched from workboat stern like a skift. Unmanned, radio-controlled, and towed by booms from workboats or tugs. 37 feet (11.2 m). Recovers up to 80 tons/hr Class X "Satellite"

5

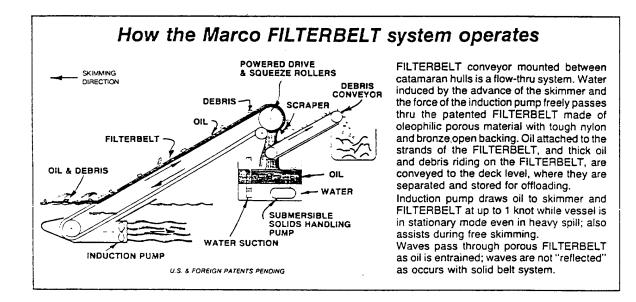

### FILTERBELT OII Recovery Performance Data



Oil recovery performance is a composite of laboratory and test basin data, confirmed by field experience. Curves are shown for the maximum oil recovery rate (saturation) of the Filterbelt.

Experience has shown that oil encounter rates in open water skimming do not approach the Filterbelt saturation levels due to the rapid spreading of oil into relatively thin slicks on the water surface. Open water recovery rates are usually best determined by slick thickness, sweep width, and sweeping speed.

Where oil is in a thick layer, such as in a containment boom, recovery rates are determined by these curves. Continuous rates are subject to vessel stowage capacity or offlog ding pumping rate. z

Oil recovery is enhanced by moderate waves. Recovery rate for a specific class of skimmer is a function of number and width of belts.



#### MARCO CLASS V

#### CONDENSED SPECIFICATION

#### 36' CLASS V OCEAN SKIMMER VESSEL MARCO DWG. NO. E-226-3-(A) MARCH 1976

Particulars:	English:	Metric:			
Length 0.A.	36'-0"	10.97 m			
Beam O.A.	12'-0''	3.66 m			
Depth, Md.	5'-1"	1.55 m			
Draft, L.S.	2'-11''	0.89 m			
Draft, R.F.S.	0.97 m				
Draft, Full Load	aft, Full Load 4'-2" 1.3				
Height, Overall	verall 17'-0" 5.18 m				
Height (Pilot House Top Removed)	House Top Removed) 8'-11'' 2.72 m				
Displacement, Light Ship	17,300 lbs.	7,847.3 kg			
Displacement, R.F.S.	18,200 lbs.	8,255.5 kg			
Displacement, Full Load	37,800 lbs.	17,146.1 kg			
Fuel Oil Capacity.	70 Gal.	18.5 Liters			
Hydraulic Oil Capacity	75 Gal.	19.8 Liters			
Sump Tank Capacity	40 BBLS	(40 BBLS)			
Induction Pump	16 HP	16 HP			
MACHINERY					
Main Engine:	Detroit Diesel Enai	ne 4-53			
	100 HP @ 2400 RPM				
Speed, R.F.S., Fwd.:	5 knots				
Speed, R.F.S., Astern:	3 knots				
Main Propulsion Unit:	Marco T-40 Thruster				
	Full 360° rotation of thruster				
	provides propulsion	and steerage.			
EQUIPHENT: Oil Transfer Pumps:					
ori fransfer Pumps:	One (1) 5" Midland				
	cavity pump rated 2				
	One (1) Marco UIOT				
Fluid Power Supply:	trash pump rated 400 gpm 0-30 psi. Marco 3-hole 1:1 geared hydraulic				
ridio rower suppry.	pump drive with 5 h				
Air Power Supply:	Engine driven 7.5 C				
"Filterbelt" Module:	Hydraulically drive				
	unit. Pneumaticall				
	roller.	,			
"Filterbelt" (for light oils):	One (1) 36" x 29'-8	" x l" belt.			
"Bunkerbelt" (for heavy oils):					
"Bunkerbelt" (for heavy oils): One (1) 36" x 29'-8" x 1/8" belt.					

NOTE: Specifications subject to change without notice.

H-19

-

MARCO POLLUTION CONTROL A Division of	Cres.	<u>DWI</u> 1 <sup>24-</sup> 9-76	500.6	TADADCO
MARINE CONSTRUCTION & DESIGN CO. Seattle, Mashington, U. S. A.	Cre m.	E-226-3-(A)		SEATTLE
		1. N.		

#### MARCO CLASS VII

CONDENSED	SPECIFICATIONS	
	11 Ocean Skimmer . E-234-1-1100-1,-2	
Particulars: Length, 0.A.	English: 48'-1''	Metric:
Length, L.W.L.	42'-0''	14.66 m
Beam Molded (at deck)	14'-0''	12.80 m
Beam, Maximum	14'-9''	4.27 m
Depth Molded	4'-6''	4.50 m
Displacement R.F.S.	34000 lbs.	1.37 m
Nav. Draft R.F.S.	54000 185. 41-411	15400 kg
Nav. Draft Full Load	5'-5''	1.32 m
Clearance, W.L. to top of Pilot House	14'-0"	1.65 m
Clearance, W.L. to top of Tower	21'-0"	4.27 m
Sump Tank Capacity (42 U.S. gal/bbl)	-	6.40 m
Freeboard, R.F.S.	80 bbls	12700 Liters
Freeboard Full Load	2'-6''	0.76 m
Gross Tonnage (approx.)	1'-5''	0.43 m
Free Sweep Width	25 tons	(25 tons)
	8'-0''	2.44 m
Belt Submergence (R.F.S. @ W.L.) Induction Pump	3'-0"	0.92 m
	16 HP	16 HP
Crew Accommodation/Operators Req. (min.)	-	
Fuel Oil Capacity	360 gal.	1350 Liters
Machinanu		
Machinery:		
Main Engine	Detroit Diesel 6V-53 1	65 HP @ 2400 RPM
Speed, R.F.S. Fwd.	7.5 knots	
Speed, R.F.S., Astern	4.5 knots	•
Main Propulsion Unit:	One (1) 100 HP thruste	r, full 360 rotation
	of thruster provides	propulsion and
•	steerage.	
Equipment:		
011 Transfer Pump:		
	Midland EH2500 rated @	400 GPM
Salt Water Wash Down Pump Fluid Power Supply:	Hydraulically driven,	100' head
i future rower suppry:	Marco 3-hole 1:1 geare	d hydraulic pump drive
Air Power Supply:	with 5 hydraulic pum	ps
0il Containment Boom	Engine driven 7.5 CFM	air compressor
	(2) x 492' ea., self-i	nflating lightweight
	containment boom wit	h adapters, bridles
"Filterbelt" Module:	and sea anchors	
intervent nouvre:	Hydraulically driven 3	toot wide belt unit,
"Filterbelt"	pneumatically actuat	ed squeeze roller.
	One (1) 36" combination	n Filterbelt with
Bilge Pump	replaceable pads	
	Clutched centrifugal,	self priming
NOTE: Specifications subject to change wi		
and a spectructions subject to change wi	chout notice.	
	-	
1	H-20	
MARCO POLLUTION CONTROL	ERG DWL Same	
A Division of		MARCO
MARINE CONSTRUCTION & DESIGN CO.	DWL DATE 13-76	
Seattle, Washington, U.S.A.		B
L, 0.0.A.	E-234-1	

MARCO CLASS X CONDENSED SPECIFICATION 37' CLASS X OCEAN SKIMMER VESSEL MARCO DVG. NO. E-224-10-1A DECEMBER 1976							
SPECIAL CLASS NON-SELF PROPELLI Particulars							
	English	Metric					
Length O.A. Beam O.A. Depth, Md. Draft, L.S. Draft, Full Load Approx. Height O.A.	36' - 11" 19' - 8" 6' - 10" 5' - 0" 6' - 0" 20' - 0"	11.25 m 6.00 m .2.08 m 1.83 m 6.07 m					
Displacement, Light Ship Approx. Displacement, Full Load Fuel Oil Capacity Hydraulic Oil Capacity Induction Pumps, 2 each	23,500 lbs. 34,500 lbs. 850 gal. 150 gal. 15 HP	10,675.6 kg 15,646.3 kg 224.6 liters 39.6 liters 15 HP					
MACHINERY Main Engines	Two, Detroit Die 2400 RPM.	esel Engines 3-53. 75 HP @					
EQUIPMENT Cil Transfer Pumps	-Two 5" Midland progressive cavity pump rated 200 gpm @ 85 psi.						
Fluid Power Supply	Two each Marco 3 pump drive with	3-hole 1:1 geared hydraulic 5 hydraulic pumps.					
Air Power Supply	5 CFM air compressor.						
Filterbelt Modules	Two hydraulicall units. Pneumati	y driven 3 foot wide belt cally actuated squeeze roller.					
Filterbelt (for light oils) Bunkerbelt (for heavy oils)	Two 36'' x 29' - Two 36'' x 29' -	8" x 1" belt. 8" x 1/8" belt.					
Remote Controls	Dual radio contr from parent vess	ols to activate ship systems el.					
Cradle	Combination stow specifically fit towline fairlead	age and launching cradle ted with bolt type clamps and					
Boom Adapters	Marco boom curta board for use wi	in adapters port and star- th oil containment booms.					
Lifting Bridle	<b>One</b> point bridle <b>sel</b> and cradle	capable of lifting both ves- at shoreside staging area.					
Note: Specifications subject to change		· ·					
	H-21	( MALE )					
HARCO POLLUTION CONTROL A Division of MARINE CONSTRUCTION & DESIGN CO. Seattle, Washington, U.S.A.	ини иниципального иниципал И сплального иниципального иниципального иниципального иниципального иниципального иниципального иниципального И сплального иниципального иниципального иниципального иниципального иниципального иниципального иниципального и						

#### MARCO CLASS III

#### CONDENSED SPECIFICATIONS

CONDENSED SPEC	TFICATIONS	
58' Class III Bay	/Sound Skimmer	
Marco Dwg. No. E		
Particulars:	English:	Metric:
Length, O.A.	57*-10"	17.93 m
Length, L.W.L.	52'-7.5"	16.04 M
Beam, O.A.	23'-4",7'4"/hull	7.11 m, 2.23 m/hull
Depth, Mld.	71-3"	2.21 m
Displacement, R.F.S.	58 L. tons	58.9 m tons
Nav. Draft R.F.S.	41-11"	1.5 m
Clearance, W.L. to Top Pilot House	24 -0"	7.32 m
Clearance, W.L. to Top Mast	501-01	15.24 m
Oil Slops Capacity (42 U.S. gal. barrel)	90 bbls.	(90 bbls)
Approx. Deadwt. Tons	12.6 L. tons	12.8 m. tons
Tons per Inch or cm. Sinkage (saltwater)	1.14 L. tons	1.158 m tons
Approx. Loaded Sinkage	11"	27.94 cm
Trash Storage Capacity (nominal)	378 sq. ft.	35.1 m <sup>2</sup>
Freeboard, R.F.S.	31-31	l m
Freeboard $\frac{1}{2}$ F.O. and $\frac{1}{2}$ water, full slops	21-6"	0.76 m
Gross Tonnage	47	(47)
Free Sweep Width	16'-0"	3.44 m
Oil Herding Water Spray Boom (sweep width)	341	10.4 m
Width Between Hulls	81-8"	2.64 m
Max, Belt Submergence (R.F.S. @ W.L.)	27''	68.6 cm
Induction Pumps, 2 ea. @	16 HP	16 HP
Crew Accomodation/Operators Req. (min.)	2/2	2/2
Fuel Oil Capacity	1040 gals. (U.S.)	3,936 liters
Fresh Water Capacity	1040 gals. (U.S.) 30 gals. (U.S.)	113.6 liters
Machinery:	_	
Main Engines, 2 ea.	200 SHP @ 2800 RPM,	Caterpillar 3208
Range 🧟 .8 Power	460 n. miles	
Propulsion	Hamilton 1341 Jet	
Faultanaate		
Afflord Ruman 2 or @	150 CRH @ 100 FRU	
Offload Pumps, 2 ea. @	250 GPM @ 100'TDH	
Bow Thrusters, 2 ea. @	40 HP	
Crane, 1 ea. Auxiliary Rover, 2 ea	1400 lbs. @ 32 ft.	~
Auxiliary Power, 2 ea. Filterbalts (No. 5 Sizo) 2 eo. @	12.5 KW 220/110V A.	L.
Filterbelts (No. & Size), 2 ea. @	3' x 29''	
NOTE: Specifications subject to change wit	hout notice.	
· · · · · · · · · · · · · · · · ·		
		-
		2
	H-22	2
	ssle DWL Sale	
A Division of	assle DWL Sale WL 0417/7/76 1/8''=	1'0' TARCO
A Division of	assle DWL Sale WL 0417/7/76 1/8''=	


#### MARCO CLASS XI

	1211100	CHAOD AI				
	CONDENSED SPECIF	ICATION	1			
22' CLASS XI OIL RECOVERY SYSTEM						
. 1	MARCO DWG. NO. E-224-11-1					
	JANUARY 19	77				
NON-SELF PROPELLED, REM	OTE OPERATED, OC	EAN SKIMMER FOR USE !	ITH VESSEL OF OPPORTUNITY			
Particulars	English	Metric				
Length O.A.	22' - 0"	6.71 m				
Beam O.A.	8' - 0"	2.44 m				
Draft, Operating	2" - 7"	.83 m				
Displacement, Operating	5,960 1bs.	2,708 kg				
Hoisting Weight	3,860 lbs.	lbs. 1.764 kg				
Length Stowed	18' - 1"	- <b>5.</b> 52 m				
Beam Stowed	6", - 1"	6.86 m				
Height Stowed	6" - 8"	2.07 m	1			
POWER UNIT						
Machinery	As a unit measu	uring L-3.05 m. M-1 5	52 m, H-1.83 m (10'x5'x6')			
	weighing 1445 1	g (3400 lbs.).	~ 11, II 1:05 E (10 x5 x8 )			
Diesel Engine	John Deere Mode	1 4239T. 75 HP at 2	1000 RPM			
Gearbox	Marco two pump	direct drive, gear r	atio 1:1.			
Hydraulic Pumps	Vickers single	pump model 25V17 (26	GPM) and Vickers			
	double pump mod	el V2020-9-6 (14:10	GPM).			
EQUIPMENT						
Flotation Cell	Rugged, multi-c	ompartment, reinforc	ed rubber buoyancy			
	chamber of 70 mm diameter (28").					
Oil Transfer	Variable speed hydraulic, two-lobe positive displace-					
	ment pump, Tuth	ill model 330, rated	at 38 tons/hour at			
Personal V. C	15 m head, capa	ble of handling l" s	olids.			
Recovery Hose Con-	As a unit measu	ring L-3.35 m, W-1.8	3 m, H61 m (11'x6'x2')			
nection Kit	and weight of 7	09 kg (1565 lbs.) co	ntaining hydraulic			
Filterbelt Module	hoses, oil disc	harge hoses, and spa	res and repair parts.			
Filterbeit module	Hydraulically d	riven 3 foot wide be	lt unit with hydrauli-			
	cally actuated	squeeze roller, incl	uding hydraulic drive			
Control Station	induction flow pump.					
	Incorporates power unit and skimmer unit controls, guages and instruments.					
Air Compressor			n to inflate buoyancy			
	cell.					
Storage Pallets	Raised wood pallets suitable for forklift transport.					
Lifting Bridle	Four corner single lift bridle for use with power unit.					
Boom Connectors	Vessei and hose	connection kit.				
	Diversion Boom.	U.S. Navy type for a	standard Navy Oil			
Note: Specifications su		without notice.				
	3-					
		H-23				
MARCO POLLUTION (			TTAREA			
	A Division of					
MARINE CONSTRUCTION & DESIGN CO. Scattle, Washington, U.S.A. E-224-11-1						
		L	1 <b></b>			

OIL MOP ZRV

# DYNAMIC SKIMMER

PAT. PENDING

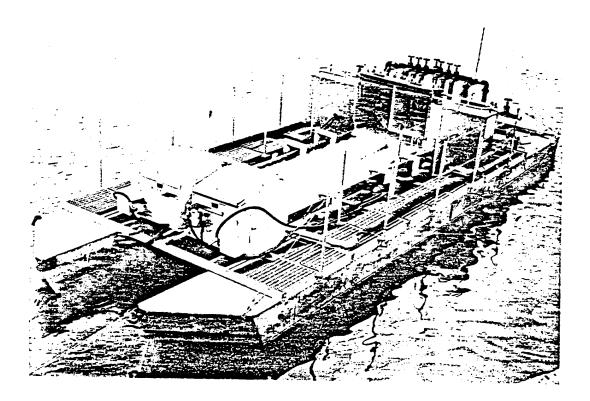

RECOVERY RATE	250 BBL/HR
RECOVERY SPEED	6 KNOTS
STORAGE CAPACITY	2400 GAL. 9,080L
PUMPING CAPACITY	400 BBL/HR
TRAVEL SPEED	15 KNOTS
LENGTH	38' 2'' 11.6M
WIDTH	12' 2'' 3.7M
SHIPPING WEIGHT	20,000 LB. 9,072KG

### OIL MOP Inc.


Engineers Road, Post Office Drawer P, Belle Chasse, La. 70037, U.S.A. 24 hour telephone—(504) 394-5110, Cable address—OILMOP, NEW ORLEANS, Telex - 58 7488



H-24

#### OIL MOP ZRV (Contd.)

#### VESSEL TRAVEL

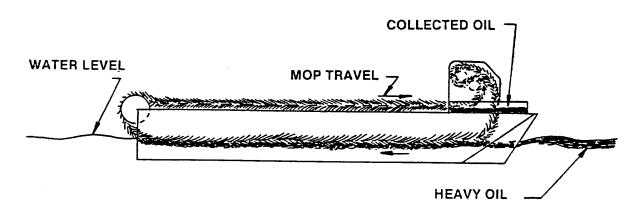

The Oil Mop Dynamic Skimmer Recovery System is based upon the concept of moving an absorbent floating rope mop in the opposite direction of vessel travel. This makes the relative velocity between the mop and the water's surface equal to zero thus allowing the vessel to travel at a high speed while recovering a significantly large amount of oil. As the vessel moves through the water a series of continuous loop rope mops are laid in the calm water at the bow of a catamaran hull. The mops are pulled to the stern as oil is absorbed on the fibers due to the selective surface tension between fiber and oil. The oil soaked mop travels back to the powered rollers in a through where it is squeezed and the oil is collected.

#### OTHER FEATURES OF THE OIL MOP DYNAMIC SKIMMER


• The unit can be dismantled and stored in two standard 20' containers for easy transportation by truck or air.

• The unit has a large total pick-up rate. In theory each mop can pick up over 40 BBL's an hour or a total of 250 BBLs/hr for the 40' model with two (2) Mark II-9H's.

• The unit is not affected by debris or ice in the water. The rope mop travels over and around objects absorbing the oil from them but not removing them from the water.

• Sea conditions do not affect the pick-up rate. The rope mop floats on the surface following the contours of the waves, which passes through the catamaran hull undisturbed.

• Since the recovery machinery is separate from the catamaran, it does not require a specialized hull. The vessel is available for other purposes such as fire fighting, line handling, and general utility boat.

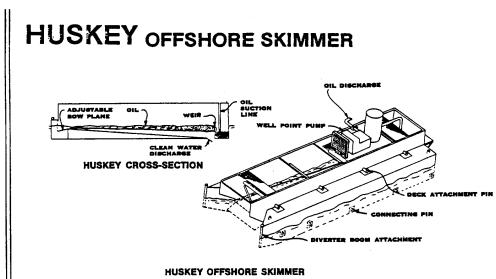

#### PRINCIPLE OF OPERATION

Once in the operating area, ballast water is added to the oil storage compartments. This serves two purposes: It gives the skimmer the proper draft to conduct skimming operations and provides the skimmer with the necessary stability to operate in up to 5-foot waves. Fine trim of the skimmer is provided by ballasting the forward and aft trim tanks located in each pontoon.

In operation, the gathered oil and water flow into the skimmer over the bow plane, which is adjusted so as to prevent any oil from escaping beneath the skimmer. As the oil and water enter the skimmer and flow along the skimmer's sloping floor, flow velocity and turbulence decrease rapidly, facilitating the natural separation of the oil and water. The floating oil spills over the adjustable weir into a sump, while the clean sea water is discharged through a slot in the skimmer's hull. The skimmer's pumping system picks up the oil from the sump and transfers it to a tanker barge

or floating fabric storage tank towed behind the skimmer.

#### SPECIFICATIONS

Longth	(LWL)	39 Ft 6 in	12,040 mm	Displacement (bailested 3 Pt 914 mm draft)	57,600 lbs	2_,130 KG
	(LOA)	42 Ft 3 in	12,878 mm	·····		
Width	(Overali) (Disassembled)	16 Ft 8 FL	4,77 mm 2,38 mm	Weight (dry)	29,800 lbs	13,520 KG
Height	(Huli)	7 Pt 1 in	2, 59 mm	Permanent Foam Flotation	40,900 ibs	18,550 KG
	(Top of Pump)	10 Ft 2 in	3, 99 mm			
Draft		3 Pt	14 mm			

#### **OTHER SEAWARD INTERNATIONAL PRODUCTS**

SEA CUSHION—Marine Fenders SEA FLOAT—Anchor Pendant Buoys SEA COLLAR—Hose and Hawser Floats SEA FLOAT—Utility Floats SEA CURTAIN—Oil Containment Barrier SLURP—Oil Skimmer SPILTROL HARBOR SKIMMER SPILFIGHTER—Dispersant Applicator WSL SPRAY BOOM—Dispersant Applicator STOPS—Tanker Pumping System & Services

A3M977



#### MAIN OFFICE:

6269 Leesburg Pike Falis Church, Va. 22044 Phone: (703) 534-3500 Telex: 899-455 MANUFACTURING PLANT: P.O. Box 98 Clearbrook Industrial Park Clearbrook. Va. 22824

SEAWARD INTERNATIONAL, INC.

DISTRIBUTED BY:

H-26

Early arrival and deployment of containment, skimming, and cleanup equipment can help limit the area affected by an offshore oil spill and reduce overall damage.

With this in mind, a device has been designed by Shell Development Co.'s transportation research and engineering department to combine reasonably high recovery with good maneuverability and low cost. The equipment, called spilled oil cleanup kit (Sock), utilizes currently available technology for the most part and consists of components portable enough to fit on any work boats and supply boats that might be available for quick response to a spill.

Major components of the Sock skimmer when deployed are shown in Fig. 1. The units can be used on both sides of the vessel, or one can be used alone on either side. The prototype kit includes the following components:

- Sock. The actual oil skimming device is a one-piece, nylon-reinforced nitrile rubber unit employing a wave damper, an oil collector, and multiple (integral) suction ports for oil recovery. Dimensions are 25 ft wide and 43 ft long, with a draft of 4½ ft.
- Floating frame. The lightweight aluminum frame supports the forward end of the Sock and maintains its opening. It also provides a solid structure for attaching the forward tow lines. The frame allows the Sock to roll and pitch independently of the vessel.

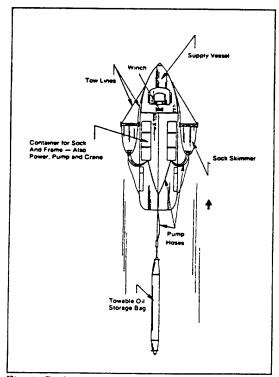


Fig. 1. Deployment of Sock skimmer kits from a supply vessel.

- Crane. A 70,000 ft-lb hydraulic crane is permanently mounted at one end of each kit to facilitate assembly and deployment.
- Pump and power unit. A 60 hp air-cooled diesel engine provides hydraulic power to the crane and to the 330 gpm rotary positive displacement pump used for oil recovery and transfer.
- Container. This has the standard dimensions and fittings of a 35 ft cargo container. It also serves as a foundation for the crane, pump, and power unit. It can also double as an oil-water separator.
- Towable bags. In the event of a large spill, oil drawn from the top of the oil-water separator can be piped to commercially available towable bags for temporary storage. Bags increase the drag on the vessel and actually improve its slow speed maneuverability.

A key component of the Sock is the flexible boomskimmer (Fig. 2). As the Sock is towed, flow is right to left and then downward and out of the open bottomed stern portion. The 4½ ft deep sidewalls of the Sock act as a conventional boom in concentrating the oil. A flexible boom in the forward part of the Sock is attached to the top by rope ties. Because integral flotation in the top cover constrains the top to lie flat, the bottom remains nearly parallel. The interconnected forward part of the Sock dampens high frequency components of the wave surface.

Unlike a draped boom, Sock has a top, which is useful near the stern because it avoids a free-surface air-oil interface. The oil is constrained by the top, which allows suction directly from the oil layer.

Sock is not intended to replace special purpose skimmer vessels. When stored on platforms, however, Sock kits should be able to respond more quickly to an offshore oil spill than skimmer vessels berthed in protected harbors. And, the kit form requires little maintenance when not in use, and is expected to permit rapid transport to remote locations.




Fig. 2. The actual oil skimming device.

H-27

PETROLEUM ENGINEER, OCTOBER, 1977

#### USCG SKIMMING BARRIER




Figure 7. Schematic of typical tow arrangement with skimming barrier

The skimming harrier is one of the most straightforward, simple, and effective systems that has yet been developed for use on the high seas. Its simplicity is a major advantage for use offshore. Deployment of barrier and skimmer are simultaneous and no more difficult than deployment of a barrier alone. The skimmers have no moving parts which would be difficult to maintain in the expected environment. The pumping system needs no priming, can pass debris, and has the low surface speeds required for minimum enulsification.

Reference: Milgram, J.H. and R. A. Griffiths, "Combined Skimmer-Barrier High Seas Oil Recovery System," Proceedings 1977 Oil Spill Conference, New Orleans, March 8-10, 1977.




Figure 4. Production design of single weir skimming strut



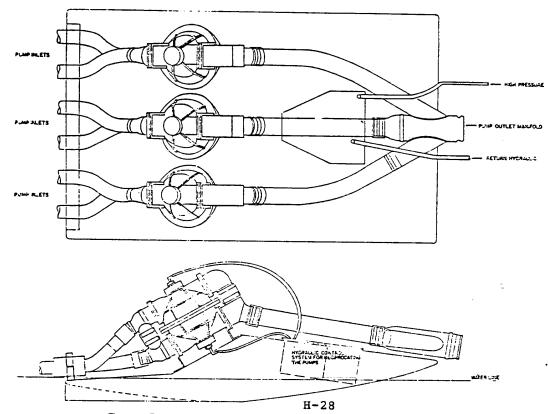



Figure 5. Pump float with three hydraulically-driven double-acting diaphragm pumps

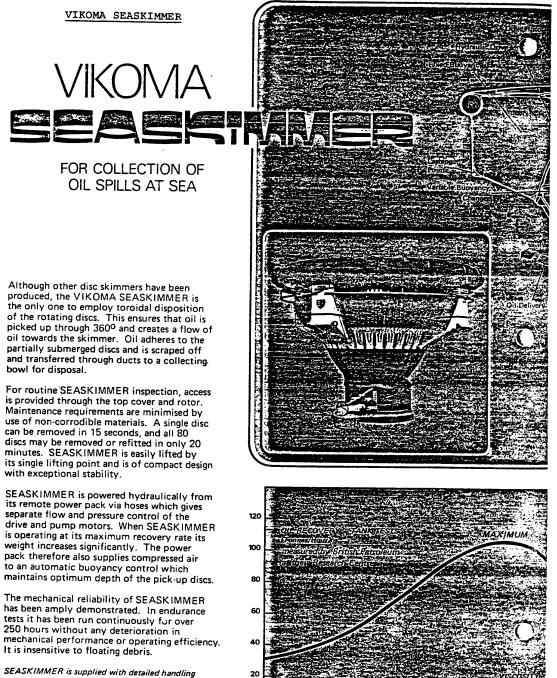

and maintenance instructions. A complete spares service is available together with technical advice on all aspects of oil pollution abatement.


H-29

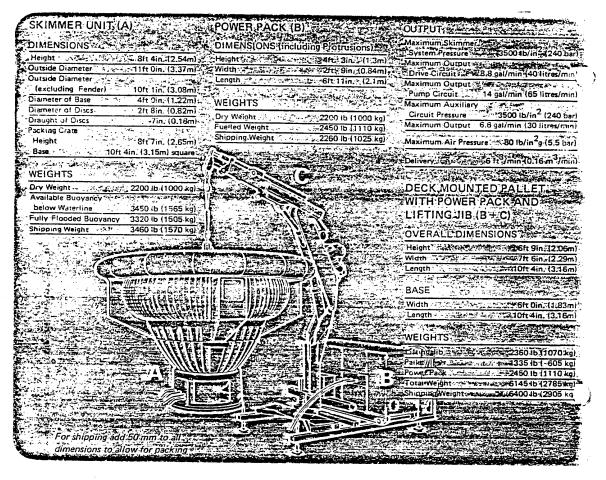



We reserve the right to alter the specification of this equipment without prior notice.

VIKOMA Oil-spill Clearance Equipment is manufactured under licence from BP TRADING LIMITED




VIKOMA, SEAPACK, SEABOOM and SEASKIMMER are Trademarks of the British Petroleum Company.


PRINTED IN ENGLAND

H-30

Sir 1060 5 74


OIL CONTAINMENT BOOMS

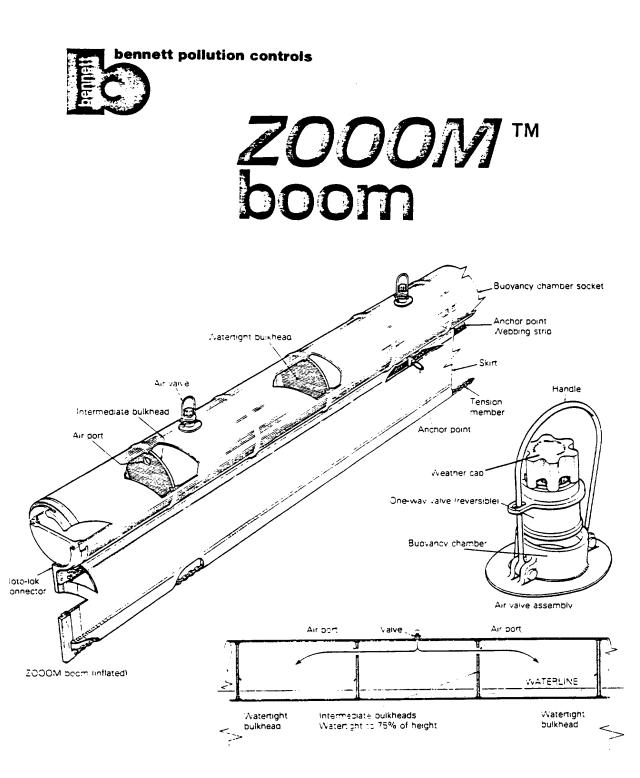



### THE SEA SENTRY® 12-24 BOOM for open waters

The Sea Sentry 12-24 oil boom is recommended for pier areas and open water where waves and currents are fairly rough. Each section has a 12" freeboard and a 24" impermeable skirt. The 12-24 is equipped with handles on top and bottom for ease of handling. There are five floats on each section—each with a double air chamber. In case of damage to one side of a float, the second chamber offers enough buoyancy to maintain freeboard until the unit is repaired. Bright orange stripes on each end of each float provide high-visibility warning of the boom installation. Quick-connect air valves fit all standard pumps. An optional 30" open mesh nylon net skirt is available for installation where extensive vortexing is a problem.

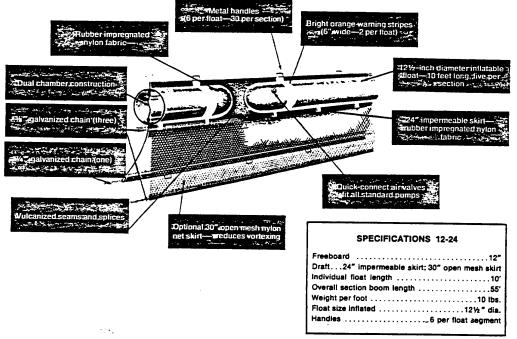

#### GOODYEAR AEROSPACE CORPORATION ENGINEERED FABRICS DIVISION ROCKMART, GEORGIA 30153 404-684-7855 H-33

821-932-545



## "Standard" Model SeaCurtain Booms

"Standard" SeaCurtain* Model – Boom Selection Chart									
SERVICE	MODEL NUMBER		NOMINAL		GROSS TENSILE	WEIGHT			
	NUNDER	FREEBOARD		HINGE SECTION	STRENGTH *	=/ft	kg/m		
CALM	BHD5808FF	4'' 10 cm	9" 23 cm	8′ 240 cm	12,000 lbs 5.400 kg	1.0	1,5		
WATER	BHD61208FF	5″ 13 cm	13'' 33 cm	8' 240 cm	16,000 lbs 7.300 kg	1.2	1,8		
СНОРРҮ	A or BHD81208 F F	7'' 18 cm	13'' 33 cm	8′ 240 cm	19-43,000 lbs. 9-20.000 kg	2.5-3.0	3,7-4,5		
WATER	A or BHD141608FF	12'' 30 cm	18" 46 cm	8′ 240 cm	33-69,000 lbs 15-31.000 kg	5.1-8.8	7,6-13		
OCEAN	AHDZ203020FF	17" 43 cm	34″ 86 cm	20' 610 cm	70-104,000 lbs. 32-47.000 kg	11-18	16-27		
	AHDZ303620FF	26'' 66 cm	42'' 107 cm	20' 610 cm	128-169,000 lbs. 58-77.000 kg	14-19	20-28		

DATA SHEET

Note: "A" models include auxiliary tension cables. \*A safety factor of 4:1 to 6:1 is recommended for use with these data.

SECTION LENGTH: Standard lengths are 50', 100' and 50 meters.

BARRIER MATERIAL: Keptex Saturn yellow, heavy duty, plastic coated polyester fabric is resistant to rip, tear, abrasion, weather, oils and most chemicals.

**FLOTATION:** Eight foot long, flexible, double walled, cylindrical float sections of closed cell ball foam are electronically sealed into the boom as an integral part thereof. The flotation is sufficient diameter to encompass the entire freeboard and provide reserve (excess) buoyancy of more than 10 times the total weight of the boom per foot.

BALLAST/PRIMARY TENSION MEMBER: Galvanized chain (or equal), with sufficient weight and strength to assure wave conformance and survival, is sealed into the bottom of the skirt fabric as an integral part thereof. The chain is attached to the Quikconnect end connectors in such a manner as to maintain bottom tension and adequate draft without eccentric loading.

SECONDARY TENSION MEMBER (if required): A galvanized wire rope, polyester webbing strap or similar auxiliary tension member can be attached immediately below float line on each side of the skirt for the entire length of the boom with corrosion resistant fasteners and reinforced skirt construction. This enables the boom to handle higher loads with part of the skirt always in compression and without greatly affecting performance.

CLEANING: SeaCurtain<sup>\*</sup> booms may be cleaned with KepKleen<sup>\*</sup> 99 or mild detergent and warm water. REPAIRS: Repair kits are available for very easy repairs of any component, if required.

STORAGE: Standard SeaCurtain\* booms may be folded at each float section hindge point (usually 8') or may be wound on a reel for more efficent deployment and recovery.


OPTIONS: Standard SeaCurtain\* booms offer unlimited options including variations in float diameter, skirt length, ballast and materials as well as "fast current", "high load" and others. See our flyer on "OPTIONS FOR SPECIAL APPLICATIONS" or contact the factory for further information and quotations.

TRADE MARK

Offshore Devices, Inc. Summit Industrial Park, Bldg. 43 Peabody, Massachusetts 01960

-

Telephone: (617) 581-6404



A high seas oil containment boom. It utilizes a combination of rigid panels and flexible curtain sections. The barrier incorporates both rigid flotation panels and inflatable floats which are perpendicular to the boom providing outrigger stability. It is designed to be functional in five foot seas and twenty knot winds. The b

The boom is normally deployed in a "U" configuration. It is transported in a floatable container which may be lowered into the water by a crane at dockside or by a work boat. The end of the container will then be re- leased and opened. One tension line extension is then accessible. This will be made fast to a vessel or dock. A work boat then attaches to the oppo- site end of the container and slowly moves away. The boom will thus be extracted from the container, and the inflatables will automatically inflate as each leaves the container.
3 1/2 knots in U shape. 5 knots streaming.
The boom will remain functional at speeds up to 1.5 knots. However, all oil slicks, restrained by a barrier against a current, will undergo entrain- ment of some oil into the water flowing beneath the barrier in current speeds greater than 1 knot.
(612 feet) 187m, units. However, any length of 1,83m, units are available.
Barrier units may be joined to maximum total length of 917m.
(27") 69cm
(21") 53cm.
(48'') 122cm
two-ply nylon, elastomer coated.
Strut is galvanized steel tubing 23" x 48" (58cm x 122cm.) -Skimming
strut is 6061-T6 aluminum with weir opening 4" x 22" (10cm x 51cm),
Ethafoam panels (within steel panel).
Cylindrical 13" dia. x 48" (33cm dia. x 122cm) long, spherical ends.
CO2 automatic at extraction
(16 lbs./ft.) 25kg./m., approximately
5' x 9' x 18' (612' boom) (1,5m, x 2,8m, x 5,5m, (187m, boom alone).
22 lb. (10kg.) steel at bottom of strut; 10 lb. (4.5kg.) lead at bottom of dynamic ballast buckets.
4" (10cm.) circumference, double braid polyester.
Repair kits available.
International Orange curtain material.
Industrial detergents and water
20' x 8' x 8' for 612' section - 15,400 ibs.
(6m, x 2.44m, x 2.44m, for 187m, section - 7000kg.)
Up to 1.5 knots. However, all oil slicks restrained by a barrier against a current will undergo entrainment of some oil into the water flowing beneath the barrier in current speeds greater than 1 knot.
Compatible with all ocean temperatures.
Excellent
Up to 20 knots
Typically 5' (2m.) in long waves, good performance at much higher waves is obtained.
Designed for and accepted by the U.S. Coast Guard

H-35

U.S. Pat. M302




### SEA FENCE OIL CONTAINMENT BOOM

#### CONSTRUCTION:

The SEA FENCE oil containment boom is constructed of a polyester fabric stiffened by flexible spring steel battens, to minimize splash-over. Excellent buoyancy and stability are provided by floats cut from solid blocks of flexible closed-cell foam. The bottom tension member is constructed of parallel Kevlar fibers which give high strength at a very low weight.

The flotation units, battens and bottom tension member are coated with urethane elastomer, which gives the SEA FENCE outstanding resistance to oil, water, sunlight and abrasion. The snagfree design, with its smooth seamless exterior, allows easy cleaning and the large integrally cast handles provide a sure grip for deployment.

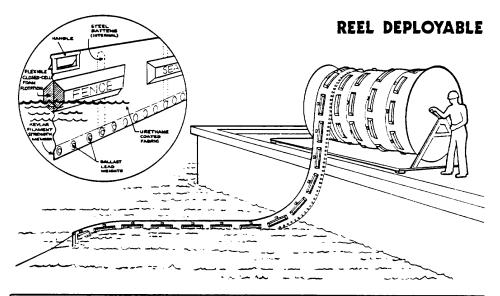

SPECIFICATIONS	inner Ha	arbor Boom	Outer Harbor Boom		
SPECIFICATIONS	U.S. Units	Metric Units	U.S. Units	Metric Units	
Height (overall)	17½ in	445 mm	28 in	710 mm	
Freeboard	7½ in	190 mm	12 in	305 mm	
Draft	10 in	255 mm	16 in	405 mm	
Weight per Foot	2.6 lb/ft	3.9 kg/m	4.0 lb/ft	6.0 kg/m	
Buoyancy per Foot	7.5 lb/ft	11.2 kg/m	12.7 lb/ft	19 kg/m	
Handle Spacing	66 in	1.68 m	47 in	1,19 m	
Storage Capacity of Reel					
(8 ft O.D. x 10 ft long)	1000 linear ft	305 m	750 linear ft	230 m	
Tensile Strength (ult.)	10.000 lb	4540 kg	15.000 lb	6810 kg	

Ruggedness, durability, easy cleaning and simple deployment are key features of the SEA FENCE oil containment boom. SEA FENCE combines the light weight and ease of handling required for quick response with the toughness and stability of a permanent type of boom.


Originally designed by Seaward International for the U.S. Navy, the SEA FENCE is bottom-tensioned with internal Kevlar fibers, providing full stability in currents of two knots and greater.

Rapid deployment is made easy by the SEA FENCE's ability to be stored on, and deployed from, a reel. Up to 1,000 feet of the boom can be stored on a single reel. Boom handling is facilitated by the convenient and comfortable handles built into the boom.

# VIKOMAEEAPAES


SEAPACK is based on a 23 ft GRP hull and contains 1600 ft of SEABOOM. The latter is a three tube fabrication in a special Butaclorcoated nylon fabric which has a high tear strength and may be readily repaired by unskilled personnel if damaged in service. The three tube configuration gives SEABOOM effective draught and freeboard even under severe sea conditions, makes it extremely flexible and manoeuvrable and gives it good wave-following characteristics. The inflation cuff prevents the boom twisting during the laying operation and aids recovery after use.

One end of the boom is connected within the SEAPACK hull to a diesel-driven fan and ducted propeller water pump which simultaneously fill the air and water tubes. Compressed air cylinders are included for inflating the flotation cuff. The hull has a towing ring and large inflatable fender. No crew is required and no manual attention to SEAPACK is necessary after launching until the boom has to be recovered after use.



SEAPACK being lowered into water by its own lifting strops.


SEAPACK may be launched from a slipway or lowered into the water from a crane. Thereafter its diesel engine is started and it is towed to the operation site. Fuel consumption is small and long tows will not restrict subsequent operations. On arrival at the scene of an accident, boom deployment is initiated by launching a drogue (sea anchor) which is already attached to the SEAPACK hull's stern. SEAPACK is then towed away at 3-4 knots and its 1600 ft of boom lays and inflates automatically in only 15 minutes. Once this operation is complete, the boom compartments will remain inflated even if the boom is subsequently damaged.




Boom structure

SEAPACK is easily transportable. Over reasonable distances it may be towed on its own trailer. Over long distances, where speed is important, it should be carried on a lorry or truck, on board ship, or in a suitable transport aircraft such as a Hercules freighter.

SEAPACK being re-packed after use



# Whittaker Expandi-OIL BOOM

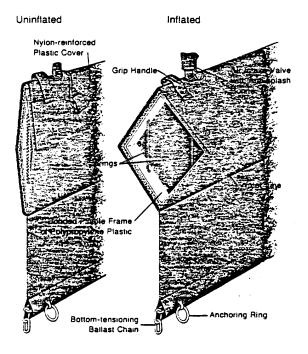

#### HOW IT WORKS

The boom is self-inflating and expands by itself the moment it is released. Made of tough, durable material, it operates in temperature extremes from +74°C. (+165°F.) to subfreezing exposure and is oil-proof and mold-resistant.

The boom has internal bonded pliable frames which are pre-sprung with rust-proof springs. Each 25-meter boom contains 18 sections, with airtight spaces between sections. A bottom-tensioning chain is used to serve as ballast. The boom also incorporates anchoring rings and grip handles on 8-meter intervals.

The boom comes folded and tied in 25-meter segments. To cover large areas fast, multiple elements can be pre-connected and packed for transport to an oil-threatened area.


Segments are joined by inserting the skirt end of one into the metal clip end of another and sliding the two together by pulling a ring and a handle. The ballast chain is joined and locked with a simple slot key.

#### SPECIFICATIONS

	Harbor Boom Model No. 3000		Sea Boom Model No. 4300		
_	Metric	English	Metric	English	
Breaking strength of ballast chain (approx.)	2590 kgf 25 meters long in a package 900mm x 700mm x 380mm.	5700 lbf. 82 feet long in a package 35.42" x 27.56" x 14.96".	7500 kgf 15.2 meters long in a package 850mm x 1050mm x 300mm.	16,500 lbf 50 feet long in a package 33.46" x 41.34" x 11.81"	
Volume of boom element Buoyancy Weight per section Boom resistance in tearing Boom material weight Freeboard Draft Accessories	53 kg/linear meter 58 kg 300 kp/5 cm 600 gm/m <sup>2</sup> 280mm 470mm Patch kits of adhesiv	8.8 cu. ft. 36 lbs./linear foot 127.9 lbs. 670 lbs./2" width .123 lbs./ft. <sup>2</sup> =/8 <sup>-2</sup> / <sup>2</sup> / <sub>7</sub> / <sup>2</sup> 11.02" 18.50" e and fabric; towing adi 4300 1100mm (43") Se	0.27m <sup>3</sup> 120 kg/linear meter 80 kg 410 kp/5 cm 800 gm/m <sup>2</sup> 450mm 650mm	9.5 cu. ft. 83 lbs./linear foot 176.4 lbs. 915 lbs./2" width .164 lbs./tt. <sup>2</sup> 18.02" 25.50" 50mm (30") Harbor	

DISPERSANT SYSTEMS

## WSL SPRAY BOOM SYSTEM DISPERSANT APPLICATOR

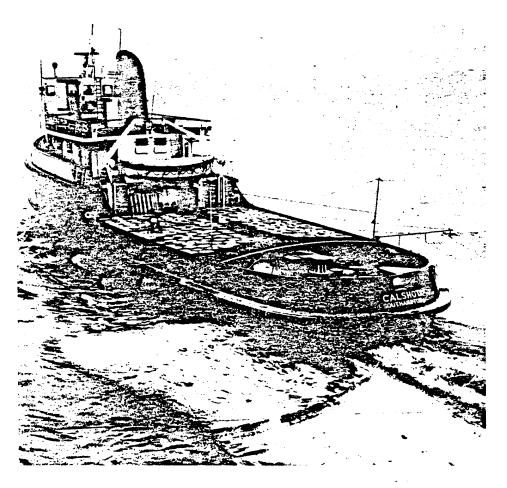

#### DESCRIPTION

The WSL SPRAY BOOM SYSTEM, developed by the Warren Spring Laboratory of the British Department of Industry, is designed to apply dispersant to floating oil and to agitate the treated oil to speed the dispersion of the slick. The equipment is designed for installation on vessels of opportunity, such as tugs or fishing boats. It can be rigged without welding or fitting and without skilled labor.

The dispersant is applied uniformly over a wide area by means of spray booms rigged outboard from either side of the vessel. A diesel driven pump transfers the dispersant material, at a rate of 24 gpm, from storage tanks or drums to the multiple spray nozzles on each boom. "Surface-breaker" boards towed behind the spray booms agitate the treated oil, forcibly mixing it with the upper few inches of sea water, breaking the oil slick up into droplets.

A smaller version, designed for use on small boats, is shown on the reverse. This equipment is particularly suited for inshore, shallow water use.

#### CLEAN ANTLANTIC DISPERSANT SYSTEM

A chemical dispersant spraying system for use on sea-going work boats has been developed. Using two spray booms, the system can spray a path up to 18.3 m (60 ft) wide at a speed of 8 knots, thus covering approximately 0.27 km(2) (67 acres) per hours. The design is based on the use of "self-mis surfactant." It requires little mixing energy for effective dispersion of the oil slick. Three of these systems have been completed for Clean Atlantic Associates, an oil spill clean-up cooperative.

The system is made up of an apparatus for deploying and supportin two 6.1 m (30 ft) spray booms, a 33.6 kw (45 hp) pump skid for pumping a mixture of seawater and dispersant, and Marine Portable 1892.5 litre (500 gal) tankage for storing the dispersant.

The spray apparatus is designed to be attached to the bow of the boat. This allows the boom to spray the mixture of seawater and dispersant ahead of the bow wake. Subsequent mixing energy is provided by the bow wake. When not using a self-mix dispersant, additional mixing energy can be provided by breaker boards, however, these are not included in this system.

Seawater is drawn from an overboard suction line, proportioned with the chemical dispersant at a typical ratio of 33 to 1, and pumped at high pressure, 0.62 to 0.69 N/m(2) (90 to 100 psi), through fan-type nozzles.

The entire system is readily adaptable to various sizes and shapes of vessels, and operates independently of the vessel to which it is mounted.

Reference: Allen, T.E., "Apparatus for Application of Chemical Dispersants in Open Sea," ASTM Symposium on Chemical Dispersants for the Control of Oil Spills, Williamsburg, VA., Aug. 1977.

#### FLEXIBLE OIL RECEIVER



## DRACONE BARGE

		7
Ant States and Antonio Antonio	AND AND AND	LANCHO MARKERI CARAVICATION
		There
CONLETION		ARICONNE STATISTICAL

TYPE			A1	A2	D5	D10	E	F	J	L	0
100% Capacity	Cu. me	tres	4.6	9	23	45	100	190	367	521	1 100
100% Capacity	Imp. G	allons	1 000	2 000	5 000	10 000	22 000	42 000	81 000	114 000	242 000
100% Capacity	Litres		4 545	9 090	22 730	45 450	100 010	190 930	368 225	518 240	1 100 125
100% Capacity	U.S. G	alions	1 200	2 400	6 000	12 000	26 400	50 400	97 200	136 800	290 400
100% Capacity	Barreis	;	28	56	142	285	628	1 200	2 314	3 257	6 9 1 4
Length	Metres	}	8	14	15	31	38	50	68	67	91
Diameter	Metres	;	0-94	0.94	1.42	1.42	1.88	2.30	2.75	3.20	4.30
Empty Weight	kg.	······	203	300	390	743	1 000	2 275	3 536	4 065	4 318
		Cargo S.G.			1		1				
Draught Fully loaded		0.7	0.60	0.60	0.85	0.85	1 · 14	1-42	1.50	1.58	2.25
in sea water		0.8	0.68	0.68	0.95	0.95	1.27	1.50	1.80	1.98	2.54
Metres		0.9	0.78	0.78	1.13	1.13	1.52	1.70	2.10	2.25	2.87
		1-0	0.90	0-90	1.32	1.32	1.70	1.95	2.50	2.60	3.70
Towing hose bo	me mm.		50	50	50	100	100	100	100	100	100
		Speed		1		1		1			
4 Knots		150	157	180	189	300	481	558	1 188	2 132	
Drag kg. fully iaden		6 Knots	260	273	450	472	700	1 118	1 338	2 614	4 069
in sea water		8 Knots	396	415	960	975	1 500	2 090	2 495	4 700	-
		10 Knots	574	602	1 450	1 487	2 300	3 309	4 241	- 1	-

н-43

✿U.S. GOVERNMENT PRINTING OFFICE: 1986-621-298/106

#### OIL POLLUTION

#### RESPONSE PLANNING GUIDE

FOR

EXTREME WEATHER

Prepared For

U. S. Coast Guard Office of Research and Development Washington, D. C. 20590

Contract DOT-CG-80372-A

Ву

Seaward Internation, Inc. 6269 Leesburg Pike Falls Church, Virginia 22044

Symbol		1 f z } ]	a a a	5 £	3 2 8 8 32 2	*
c Measures To Find		inches inches feet yards miles	square inches square yards square miles scres	ounces pounds short tons	= a = a 0 0	Fahrenheit Fahrenheit 160 100 100 100 100 100 100
rsions from Metri Multiply by	LENGTH	900 900 91 91 91 91 91 91 91 91 91 91 91 91 91	<pre></pre>	0.036 2.2 1.1 VOLUME	0.03 2.1 1.06 0.26 0.26 1.3 1.3 1.3	9.5 (then add 32) add 32) add 32) 39.6 20 31 40 1 31
Approximate Conversions from Matric Moasures When You Know Maliply by To Find	-	millimaters continuters melers kilometers	square cantimeters square meters square tilomaters hectares (10,000 m <sup>2</sup> )	grama kilopams tomas (1000 kg)	millillers liters liters liters cubic meters cubic meters	Celsius Temparatur 1 + + + + + + + + + + + + + + + + + + +
Symbol		E 5 = = 5	€~e <sup>°</sup> 5 ±	a	Ē Ē Ē	₽ ₽ ₽ ₽ ₽ ₽
	1.1.1.1.1. 14/101111111111111111111111111111111111			.1.       		
,  ,	<b>n</b>	ן ז ז ז ד ד	ls ∣s Έ~ε~Έ.Σ	،  _ ۲_	3  1 EEE^E	. u
Mossures To Find		Contimeters Contimeters Maters Attomaters	squars carlimeters aquest maters aquest maters square kilometers hecteres	grams kilograme tomes	mililiters militiers militiers liters liters liters cobic meters cobic meters	COIC merces a Celsius - temperature -
	LENGTH	2 g g = -	AREA 6.8 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0	28 0.45 VOLUME	8 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	TEMPERATURE (exect) 5/9 (after ure subtracting 32) 0.1 Lowersons and muse default to 1.225, 50 Catalog Nu. C13.10.266.
Approximate Conversions to Metric When You Know Multiply by		inches lest yards miles	aquere inches aquere inches aquere yerds aquere miles acres	ounces pounds short (ons (2000 fb)	tesspoons tablespoons fluid ounces cups guerts guerts cubic fest	reaction of the second of the
						54 lena aghts a

METRIC CONVERSION FACTORS

#### TABLE OF CONTENTS

Sect:	ion N	umber Page Numb	ber
1.0	INTR	DDUCTION	1
2.0	GENE	AL	4
	2.1	Action Plan	4
	2.2	Effect of Weather on General Pollution	0
	2.3	Response Operations	8 9
	2.4	Initial Assessment of Casualty Situation	10
	2.5	Other Information Sources	12
3.0	PREV	ENTION OF OIL SPILLAGE FROM VESSEL CASUALTIES	24
	3.1	Response Guidelines for Tanker Casualties	25
	3.2	Response Alternatives	27
	3.3	Response System Description	31
		3.3.1 Approach: Off-Load Cargo to a Receiving Vessel	33
		3.3.2 Approach: Jettison Part of Cargo	46
		3.3.3 Approach: Bomb the Vessel and Burn the Cargo In-Situ	52
		3.3.4 Approach: Cargo Gelling	57
4.0	OIL	SPILL MITIGATION AND CLEAN-UP	59
	4.1	Response System Selection	61
	4.2	Response System Descriptions	
		4.2.1 Approach: Vessel-of-Opportunity Skimming System (VOSS)	65
		4.2.2 Approach: Container Barrier Assisted Skimming	75
		4.2.3 Approach: Dedicated Skimmer	88
		4.2.4 Approach: Dispersants, Vessel Applied .	95
		4.2.5 Approach: Dispersants, Aircraft Applied	L05
		4.2.6 Approach: Microbial Elimination of Oil Spills	L13
		4.2.7 Approach: Slick Burning	L15

TABLE	OF	CONTENTS	(Cont'	d)
-------	----	----------	--------	----

Sect	ion Number Page Number
5.0	RESPONSE EQUIPMENT AND SYSTEMS
	5.1 Portable Pumping System
	5.2 Skimmers
	5.3 Containment Booms
	5.4 Dispersant Application Systems 133
	5.5 Oil Receiving Vessels
	5.6 Work Vessels
6.0	REFERENCES
	APPENDIX A - SAFETY CONSIDERATIONS
	B - SKIMMING MECHANISMS B-1-2
	C - STABILITY CALCULATIONS
	D - GROUNDING CALCULATIONS D-1-11
	E - PUMP PERFORMANCE CHARACTERISTICS E-1-9
	F - WIND AND CURRENT FORCE CALCULATIONS F-1-3
	G - TUG POWER REQUIREMENTS FOR TOWING G-1
	H - KEY RESPONSE ITEMS DATA SHEETS H-1-43

#### LIST OF FIGURES

Figure No.	Title	Page No.
3.1	Time Effects on Casualty Life and Response Approach	26
3.2	Example of Cumlative Effects of Response Time and Casualty Life	28
3.3	Mooring System for Off-Loading Stranded Tanker in Higher Sea States	38
3.4	Time Plans for Cargo Off-Loading and Ship Ballasting	40
3.5	Decision Process for Determining the Feasibility of Off-Loading	41
3.6	Decision Process for Determining the Feasibility of Ballasting and Stabilizing	42
3.7	Decision Process for Determining the Feasibility of Jettisoning	49
4.1	Selection of a Spill Response Approach	62
4.2	Time Plans for Vessel-of-Opportunity Skimming System (VOSS) and Dedication Skimmer	70
4.3	Vessel-of-Oppurtunity Skimming System (VOSS) Considerations	71
4.4	Independent Skimmer and Barrier with Distant Ship Support - Before Launching	77
4.5	Independent Skimmer and Barrier with Distant Ship Support - Fully Deployed	79
4.6	Barrier Use Considerations	83
4.7	Time Plan for Skimmer Independent of Barrier	84
4.8	Dedicated Skimmer Considerations	92
4.9	Dispersant System - Vessel Approach	96

#### LIST OF FIGURES (Cont'd)

Figure <u>No.</u>		Page No.
4.10	Time Plans for Vessel-Applied Disperant System and Aircraft-Applied Disperant System	100
4.11	Vessel-Applied Disperant System Considerations	101
4.12	Aircraft-Applied Dispersant System Considerations.	109

LIST OF TAB
-------------

Table No.	Title		age D.
2.1	Action Plan Guidelines		5
2.2	Significant Wave Height Ranges for Various Sea States		9
2.3	Scenarios for Example Time Plan Diagrams		11
2.4	Casualty Situation and Spill Assessment $\ldots$ .	•	13
3.1	Sea State Operational Limits for Response Approaches	•	32
3.2	Off-Loading Planning Checklist	•	43
3.3	Jettisoning Planning Checklist		50
3.4	Bombing and/or Explosives Planning Checklist		55
4.1	Spill Mitigation and Cleanup		55
4.2	VOSS Planning Checklist	•	72
4.3	Barrier Systems Planning Checklist	•	85
4.4	Dedicated Skimmer Planning Checklist		93
4.5	Disperants, Vessel-Applied Planning Checklist		102
4.6	Dispersants, Aircraft-Applied Planning Checklist		110
5.1	Emergency Cargo Pumps		118
5.2	Flow Handling Capabilities of Various Hose Sizes (gpm)		119
5.3	Oil Skimmer Capabilities	•	121
5.4	Oil Boom Capabilities		126
5.5	Disperant System Capabilities	•	134
5.6	Typical Oil Receiving Vessels	•	136
5.7	Typical Workboats	•	138