

Effects of forest practices on peak flows and consequent channel response in western Oregon: a state-of-science report

Gordon E. Grant, Sarah L. Lewis, Frederick J. Swanson, John H. Cissel, and Jeffrey J. McDonnell

AUTHORS

Gordon E. Grant is a research hydrologist and **Frederick J. Swanson** a research geologist, U.S. Department of Agriculture, Forest Service, Pacific Northwest Research Station, Forestry Sciences Laboratory, 3200 SW Jefferson Way, Corvallis, OR 97331; **Sarah L. Lewis** is a Faculty Research Assistant, Department of Geosciences, and **Jeffrey J. McDonnell** is a professor, Department of Forest Engineering, Oregon State University, Corvallis OR 97331; **John H. Cissel** was the science liaison for western Oregon, U.S. Department of the Interior, Bureau of Land Management, Corvallis, OR 97331, and is currently the program manager for the Joint Fire Science Program, Boise, ID 83705.

IN REVIEW

ABSTRACT

Grant, Gordon E; Lewis, Sarah L; Swanson, Frederick J.; Cissel, John H; McDonnell, Jeffrey J., 200x. Effects of forest practices on peak flows and consequent channel response in western Oregon: a state-of-science report, Gen. Tech. Rep. PNW-GTR-XXX. Portland, OR: U.S. Department of Agriculture, Forest Service, Pacific Northwest Research Stations. XXXp.

This is a state-of-the-science synthesis of the effects of forest harvest activities on peak flows and channel morphology in western Oregon. We develop a database of relevant studies reporting peak flow data across rain-, transient-, and snow-dominated hydrologic zones and provide a quantitative comparison of changes in peak flow across both a range of flows and forest practices. Increases in peak flows generally diminish with decreasing intensity of percent watershed harvested and lengthening recurrence intervals of flow. Watersheds located in the rain-dominated zone appear to be less sensitive to peak flow changes than those in the transient snow zone; insufficient data limit interpretations for the snow zone. Where present, peak flow effects on channel morphology should be confined to stream reaches where channel gradients are less than approximately 0.02 and streambeds are composed of gravel and finer material. We provide guidance as to how managers might evaluate the potential risk of peak flow increases based on factors such as presence of roads, watershed drainage efficiency, and specific management treatments employed. The magnitude of effects of forest harvest on peak flows in the Pacific Northwest, as represented by the data reported here, are relatively minor in comparison to other anthropogenic changes to streams and watersheds.

Keywords: peak flow, forest harvest, channel morphology, Pacific Northwest

PREFACE

The relationship between forest practices and streamflow has been with us for millennia. Plato wrote of the connection between forests and streamflow in the Critias, and an ancient Chinese proverb reads: “To rule the mountain is to rule the river”. The first so-called “protection forest” was established in Switzerland in 1342 to control torrents in the Alps, and such forests were common by the 16th century in Switzerland, Austria, and Germany. In the U.S., establishment of federal Forest Reserves in 1891 was motivated by securing “favorable conditions of flow” as well as providing for timber supply. Widespread concern over the relationship between forest cutting and floods provided the impetus for laws establishing the National Forest system in 1905, and this concern is renewed following all major floods when it becomes fashionable to damn forestry as a primary cause of flooding. In the view of the public, and even among trained professionals, the relationship between deforestation and floods is well-established and self-evident (FAO, 2005).

The long history of scientific research examining the effects of forests and forest practices on hydrology reveals a much more complex story. Beginning with the first paired-watershed experiments at Wagon Wheel Gap, Colorado in 1910 hydrologists have sought to establish the relationship between timber harvest, road construction, and related activities, and streamflow in a wide range of climatic, geographic, vegetative, and management settings. Earliest approaches relied on the paired-watershed design, utilizing two or more neighboring watersheds with similar geologic, topographic, and vegetation attributes that were gaged over a period of time, followed by various management treatments in some but not all watersheds. The relationship between various metrics of streamflow in the treated versus reference watershed constituted a direct measure of a treatment effect. Although the earliest efforts treated watersheds as “black boxes”, later efforts utilized a variety of field, statistical, and modeling techniques to tease apart specific hydrologic mechanisms responsible for observed differences in response to logging. In these experiments other geomorphic, chemical, and ecological variables were typically measured as well as streamflow.

The published results of these studies provide a voluminous, dense and often contradictory literature. With reference only to the effects of forest harvest on peak flows -- the focus of this paper -- results range from study to study, watershed to watershed, and region to region. This has prompted numerous attempts to systematize and synthesize the literature with the intent of clarifying the issue for managers, policy makers, and the public (e.g., Ziemer and Lisle, 1998; Church and Eaton, 2001; Ice et al., 2004; Moore and Wondzell, 2005). Consensus views have been difficult to achieve, however, perhaps because of the wide range of experimental locales, statistical approaches, treatment types and intensities, and watershed histories represented in the technical literature. These differences have also surfaced in competing interpretations of results within the hydrologic literature, sometimes utilizing the same data set, (e.g., Jones and Grant, 1996, 2001; Thomas and Megahan, 1998, 2001; Beschta et al, 2000).

Despite this lack of consensus from the scientific community, land managers and regulatory agencies are in the position of having to plan forest land management in a

manner that addresses the peak flow issue. Forest land managers in the western U.S. have developed strategies intended to minimize the potential effect of forest activities on streamflow, particularly peak flows. Such strategies are often identified as means of addressing potential cumulative watershed effects and have included a wide range of approaches, including scheduling constraints on timber harvest (i.e., aggregate recovery percentage [ARP]), and procedures to represent land use activities in a common currency of disturbance (i.e., equivalent clearcut area [ECA], equivalent roaded area [ERA]) (reviewed by Reid, 1993). More recently, regulatory agencies in the Pacific Northwest charged with implementing the Endangered Species Act (ESA) must reconcile the scientific literature on peak flows with the potential effects to fish species and critical habitat as a result of activities designed under the Aquatic Conservation Strategy of the Northwest Forest Plan (Tuchmann et al., 1996; Reeves et al., 2006). In particular, the peak flow issue has most commonly surfaced as part of the ESA consultation process associated with specific land management projects proposed by federal agencies. Regulatory agencies and land managers must resolve uncertainties associated with this issue, and reasonably assess the relationship between any potential peak flow changes and consequences to channel morphology and fish viability. Moreover, there has been continuing litigation regarding cumulative effect analyses within NEPA documents.

With both the Bureau of Land Management (BLM) and Forest Service facing major revisions of their regional-scale forest plans in the next few years in the Pacific Northwest there is a clear need to revisit the issue of peak flows as it applies to forest management. This study and report were initiated by the BLM to provide a venue for technical analysis and guidance towards development and implementation of their new resource management plans (RMPs). This is particularly timely, since many of the forest management practices that were represented in small watershed studies in the past are changing in response to societal and ecological factors. Interpreting and extrapolating the results of this historical science in light of new management treatments is clearly necessary to bridge gaps in our understanding, and requires the perspectives of research scientists, field practitioners, and forest planners. This project is intended to begin to fill that gap.

Our focus is exclusively on hydrologic changes to peak flows and consequent effects on stream channels. We recognize that there are many other hydrologic effects relevant to managers, including changes to low flows, water yield, etc. In the interests of providing focus, and also because the peak flow issue remains one of the most contentious in terms of land management decisions, we restrict our analysis to changes in peak flow. Further, we do not examine other well-researched geomorphic responses to land management (i.e., landslides) even though hydrologic processes are often involved. Finally, in interpreting potential effects of peak flow changes on channels we emphasize changes that have biological implications, i.e., changes to aquatic habitat and sediment transport, but do not consider biological or water quality effects directly. We use published and peer-reviewed scientific literature including both primary studies and syntheses in our analysis.

In order to ensure that a broad range of both management and scientific views were considered in the development of this document we held two 1-day workshops for external comment and review. The first, held in Corvallis, OR in November, 2005, included land managers and resource specialists (primarily hydrologists) from the BLM, Forest Service, and NOAA Fisheries. This workshop somewhat paralleled a similar one encompassing a broader set of hydrologic issues held at the H.J. Andrews Experimental Forest in May, 2004 and funded by the Focused Science Delivery Program of the USDA Forest Service, PNW Research Station. At the 2005 workshop the discussion focused on introducing our overall approach to this issue, including the hydrologic zone and management treatment framework, and soliciting input and suggestions on how to improve our analysis. The second workshop, held in Corvallis in March 2006, included scientists from across the Pacific Northwest whose work is relevant to aspects of the peak flow issue. Here we looked for an oral review and critique of the ideas contained in this paper and attempted to identify areas of common agreement and disagreement within the research community. Results of all three workshops have been incorporated into the document as best we could, but the paper does not necessarily reflect agreement or consensus among all workshop participants. Results from this study were also presented at the BLM State of the Science Conference in Corvallis in June, 2006.

This document provides both a novel, state-of-science synthesis of the peak flow issue in western Oregon, and an approach for managers and resource specialists to evaluate the risk of potential peak flow increases on stream channels.

SUMMARY

This paper presents a state-of-the-science synthesis of the effects of forest harvest activities on peak flows and channel morphology west of the crest of the Cascade Range in Oregon. The primary intent is to provide technical guidance to federal land managers in distinguishing potential major from minor effects. We develop a database of relevant studies reporting peak flow data across rain-, transient-, and snow-dominated hydrologic zones and provide a quantitative comparison of changes in peak flow across both a range of flows and forest treatments. We consider treatments that are implemented at the scale of individual harvest units and small catchments (<10 km²). We also suggest an approach for evaluating potential risk from peak flow increases in larger basins (>10 km²) with complex management histories. We provide a qualitative analysis for interpreting likely magnitude of peak flow changes on channels of different geomorphic types.

The primary research studies used to evaluate effects of forest practices on peak flows come from long-term, experimental watersheds and, to a lesser extent, modeling and process studies. We organized studies from the literature based on hydrologic zones and intensity of management activities conducted. Next, we analyzed the data for peak flow trends across the range of flows and intensity of management treatments represented, ultimately focusing on geomorphically effective events (recurrence interval greater than 1 year) that have the potential to influence channel morphology. We constructed response lines representing the maximum and mean reported peak flow increases (expressed as percentage increase) from small watershed studies, and evaluated these increases against the limits of detectable change from flow measurements alone (approximately 10 percent). We then expanded our scale of investigation to look at how other factors such as roads, patterns of cuts, and riparian buffers potentially influence peak flows at larger watershed scales, and suggest means of interpreting the envelope lines from the small watershed studies in larger basins. Finally, we fold considerations of channel type and morphology, as defined primarily by channel gradient, into the analysis to provide a first-order prediction of whether peak flow increases of a particular magnitude might affect channel structure in a particular basin.

The site scale data support the interpretation that watersheds located in the rain-dominated region are less sensitive to peak flow changes than those in the transient snow region. The data further support the interpretation that if peak flow increases do occur, they can be detected only in flows of moderate frequency and magnitude at a return period of six years or less. Effects of forest harvest on extreme flows cannot be detected by using current technologies and data record lengths, but hydrologic theory suggests that such effects are likely to be small.

Small watershed studies (particularly those involving clearcuts) likely represent the maximum effect of forest harvest on the landscape, and we suggest that such effects should diminish, or at most remain constant, with watershed size. We provide guidance as to how managers might evaluate the potential risk of peak flow increases based on factors such as presence of roads, riparian buffers, and the specific management treatments employed.

Moreover, the data support the inference that when present, peak flow effects on channels should be confined to a relatively discrete portion of the stream network: stream reaches where channel gradients are less than approximately 0.02 and where streambed and banks are gravel and finer material. Peak flow effects on channel morphology can be confidently excluded in high gradient (slopes >0.10) and bedrock reaches and are likely to be minor in most step-pool systems. On the other hand, if channels are sand-bedded, a more detailed hydrologic and geomorphic analysis seems warranted.

The magnitude of effects of forest harvest on peak flows in the Pacific Northwest, as represented by the data reported here, are relatively minor in comparison to other anthropogenic changes to streams and watersheds. The impact of forest harvest in the Pacific Northwest on peak flows is substantially less than dams, urbanization, and other direct modification of channels.

IN REVIEW

CONTENTS

INTRODUCTION

CONTEXT

Defining Peak Flows

Influences on Peak Flows

Historical Changes in Management Practices

BACKGROUND

Hydrologic Processes Affecting Peak Flows

Paired Watershed Studies

Modeling Studies

STUDY DESIGN AND ELEMENTS

Geographic and Spatial Scales

Management Treatments

Hydrologic Zones

Scaling Hydrologic Processes and Effects

Limitations of Analysis

METHODS

Literature Review and Distribution of Relevant Studies

Peak Flow Dataset Compilation and Analysis

FINDINGS

Peak Flow Changes at the Site Scale

Analysis of Peak Flow Increases in Larger Basins

Application

Channel Response to Potential Peak Flow Increases

MANAGEMENT IMPLICATIONS

ACKNOWLEDGMENTS

ENGLISH EQUIVALENTS

LITERATURE CITED

APPENDIX 1: ADDITIONAL RESOURCES

APPENDIX 2: WATERSHED DATA TABLES

INTRODUCTION

This paper presents a state-of-the-science synthesis of the effects of forest harvest activities on peak flows and channel morphology west of the crest of the Cascade Range in Oregon, for use by federal land managers. In this paper we suggest reasonable ranges of interpretation for existing studies and provide a framework for extrapolation the findings to modern applications. This work draws on recent literature reviews (i.e., Guillemette et al., 2005; Moore and Wondzell, 2005), which examine a full suite of hydrological changes due to forest management across a large geographic region. Here we adopt a narrower geographic and topical focus due to the prominence of the peak flows issue in current management and regulatory discussions throughout western Oregon.

Our intent is to help land managers distinguish potential major from minor effects in evaluating impacts of forest harvest on peak flows. We maintain that, despite some controversy in the interpretation of study results, there is actually a substantial amount of agreement among scientists as to the likely magnitude and consequence of peak flow changes. Moreover, we recognize important variation in peak flow response across hydrologic regions and forest harvest treatment types and suggest ways that this variation can be acknowledged in forest planning. Because of the changing nature of land use practices, and large gaps in data for various treatment types, this study must inevitably rely on extrapolation of well-established results into areas with much less data, hence certainty. We have tried to do this by using clear logic and assumptions that can provide useful sideboards to constrain uncertainty, and guide management decisions.

Our study was framed by the following objectives:

- 1) Identify how management activities affect relevant hydrologic processes and geomorphic responses;
- 2) Describe geographic variation in hydrologic processes and geomorphic response across western Oregon;
- 3) Identify sensitivity and magnitude of potential peak flow increases resulting from management activities;
- 4) Consider how sensitivity and magnitude of peak flow increases are related to magnitude and type of climatic events, watershed condition, and geography;
- 5) Use these findings to help managers understand the likely magnitude of forest management effects on peak flows and channel morphology in western Oregon.

Beginning with some brief background perspectives on the peak flow issue we lay out an approach that we believe offers a consistent train of logic to help guide management direction in this area. We develop a database of relevant studies reporting peak flow data, and provide a quantitative comparison of change in peak flow across both a range of flows and forest treatments, and among hydrologic zones. We also consider how treatments that are implemented at the scale of individual harvest units might also affect peak flows at the scale of larger drainage basins, where the pattern and age of management units, presence of roads, and condition of riparian areas are all factors. Finally, we provide a qualitative analysis for interpreting likely magnitude of peak flow changes on different channel types.

CONTEXT

Understanding the approach taken here requires appreciation of the broader context of peak flow effects and the changing nature of forest management practices.

Defining Peak Flows

In the Pacific Northwest, natural fluctuations in stream discharge are controlled by seasonal precipitation patterns. With the majority of precipitation falling in the winter months, the annual hydrograph of a stream has a characteristic shape, reaching its highest levels during intense rain events or spring snowmelt, and receding to its lowest levels in the late summer. The highest instantaneous discharge of a stream each water year can be compiled to create a series of annual peak streamflows, which are commonly used to calculate recurrence interval or return period; these terms will be used here interchangeably. For example, from ten years of measured annual peak streamflows, the magnitude of flow events with a one, two, five or ten year recurrence interval can be calculated, but not the 20 or 50 year flow, due to the limited record length. Hydrograph peaks due to individual precipitation events occurring throughout the year that are less than the annual peak can also be compiled to determine the range of flow magnitudes with recurrence intervals less than one year. The longer the hydrologic record available, the more accurate the characterization will be of the range of peak streamflows likely to occur.

The annual sequencing of flows and the inter-annual variation in discharge influences both the geomorphology of the stream channel and the ecology of aquatic and riparian habitats. This natural variation supports a complex relationship between channel morphology and ecosystem function. Flows that have the capacity to initiate sediment transport, and thus channel change, are called geomorphically effective flows. These flows generally occur at or above bankfull discharge, at recurrence intervals greater than one year (Andrews, 1983; 1984) and are often captured by the analysis of an annual peak flow series. Flows with recurrence intervals of less than one year may play important ecological roles, but are beyond the scope of this synthesis.

Influences on Peak Flows

It is well documented that intensive forest harvest, including clearcutting, broadcast burning, road building, and riparian disturbance, have the potential to dramatically change the biophysical processes in watersheds. Changes in annual water and sediment yield, low flows, peak flows, and water quality metrics (eg. temperature, chemical composition) have all been observed after forest harvest, and tied to resultant ecological impacts. These interactions have become an important feature of assessment of proposed forestry operations, although some aspects of these interactions are scientifically well understood, and some are not. We now have long records from experimental watershed studies (some exceeding 50 years) and maturing capability of simulation modeling to allow us to better test hypotheses of these complex linkages.

Forest management practices are not the only causes of historic variations in peak flow and other pertinent hydrologic parameters. Urbanization, agriculture and grazing can all

influence drainage efficiency, defined as the routing and timing of water delivery to the channel and through a stream network (Tague and Grant, 2004). At the larger basin scale, dam and reservoir operations typically also alter the natural hydrograph, thus complicating the interpretation of direct effects of forest management to peak flows and channels. Natural disturbances such as stand-replacing wildfires, or landslides and debris flows, can also dramatically alter hydrologic and geomorphic systems.

A wide array of components factor into hydrologic and geomorphic behavior, including climate, biotic and geophysical processes, natural disturbances, and management practices that may alter those components; storage and fluxes of water, sediment, and wood; and resulting channel and water column habitat for aquatic organisms. This review focuses on a subset of these components; forest management effects on peak flow and channel structure (fig.1). We recognize that this wider array of components and management practices may influence peak flow and channel structure independently and interactively, rather than directly. For example, peak flows redistribute sediment and pieces of large wood that, in turn, trap additional sediment, thereby creating channel habitat. We also recognize that in addition to our interest in changes in the magnitude of peak flow for the purposes of channel changing sediment transport, changes in the timing and duration of peak flow events, and the magnitude of peaks with recurrence intervals less than one year, may have important ecological ramifications not discussed here. Although it is challenging to disentangle the complex effects of forest management on peak flows and channel morphology, we strive to keep our emphasis on the direct effects of forest management.

Historical Changes in Management Practices

Forest management practices on federal lands have changed a great deal in the last 50 years in response to changing markets, technology, social values, legal context, and scientific understanding of ecosystem responses. Intensive stand-level silviculture for timber production dominated federal forestry in the 1950s, 1960s, and 1970s. Although there was variation throughout the region and over time, typical practices included dispersed patch clearcutting, broadcast burning, and artificial regeneration. In some places, usually on sites that were more difficult to regenerate, shelterwood cuts were used instead of clearcuts. Shelterwoods typically left 30-40 percent of the basal area of the stand after the first harvest; a second harvest then removed these trees after regeneration was established, commonly ten years later. Sometimes the second cut was never implemented and the shelter trees were left as a component of the stand, such as in Coyote Creek watershed 1. The majority of paired watershed studies in the region examine these early types of regeneration harvests.

In the late 1980s, changing science and changing values created an urgent need to modify these practices to reduce risks to species, habitats, and ecological processes, including peak stream flows. Integrating the lessons learned from long-term ecological studies into management practices resulted in the retention of large green trees, snags, and logs when regeneration harvests occurred, although the level of live tree retention, varied greatly among sites. This practice of leaving green trees became known as “variable-retention

harvesting” and encompassed practices where as few as two trees per acre (tpa) and as many as 30-40 tpa were left.

Regeneration harvests were dramatically reduced in the 1990s and post 2000 due to the need to conserve and recover populations of listed species, including northern spotted owls, marbled murrelets, and several species of anadromous salmonids. Emphasis shifted to commercially thinning plantations established after clearcutting in the 1950s and 1960s. Although some commercial thinning was implemented prior to the 1990s it was limited in extent. Initial native forest and pre-commercial thins were conservative and had little impact on stand development. However, as more information regarding the development of late-successional habitat emerged thinning practices removed more material, sometimes leaving as few as 40 tpa. Thus, the range of practices now described as thinning is as broad as, in terms of material retained, and potentially overlaps with variable-retention harvesting.

The spatial pattern of forest harvests has also changed over time. In the 1950s, 1960s and 1970s clearcuts were dispersed across the landscape to help establish a road network, to intersperse areas of forage and cover for large game animals, and to distribute the hydrologic effects of forest cuttings. This began to change in the 1980s as the wildlife value of the remaining but increasingly scarce patches of intact older forest increased. Harvests were often aggregated to minimize fragmentation of the remaining old forest.

From a hydrological standpoint, a treatment that retains an extremely low percentage of live trees (eg. two tpa, 100-80 percent harvested) can be assumed to be functionally equivalent to a clearcut. At the other end of the range (30-40 tpa, 30 percent harvested to lightly thinned), the challenge is to detect when hydrologic functions of a harvested watershed become significantly modified from uncut forest.

BACKGROUND

An extensive literature on the variety of mechanisms addresses effects of forestry practices on peak flows (i.e., Harr, 1980; Jones and Grant, 1996; Ziemer and Lisle, 1998; Beschta et al., 2000, Reid and Lewis, 2007; Moore and Wondzell, 2005). We begin by summarizing general findings about key processes affected by forest harvest, and then explore the history, interpretations and limitations of the paired watershed and modeling studies that have addressed changes in peak flow.

Hydrologic Processes Affecting Peak Flows

In general, changes in site-level conditions accompanying forest harvest are predicted to change local hydrologic processes such that peak flows generally increase (fig.1). The strong seasonality of many of these effects can be diagnostic of which processes are active at any given time. Our analysis involved interpreting how the change to each process is likely to scale with the intensity of treatment, and is summarized below and in figure 2.

Evapotranspiration

Removal of trees and leaf area decreases evapotranspiration rates, leading to increased soil moisture in harvested areas; this reduces the subsurface saturation deficit that needs

to be made up before direct runoff can occur, thereby increasing peak flows for the same volume storm. This effect is most pronounced in autumn when forest soils are driest. Once the soil mantle wets up, this effect largely disappears. This effect is expected to scale more or less linearly with the amount of vegetation removed by forest harvest (Rothacher, 1973; Harr, 1976).

Interception

Canopy removal decreases the amount of water intercepted by vegetation during precipitation events allowing a greater proportion of total precipitation to reach the forest floor. Decreases in direct interception due to canopy removal therefore have the potential to increase soil moisture levels, thereby increasing peak flows (Reid and Lewis, 2007). This effect should scale linearly with amount of canopy removed and can occur in any season.

Cloud water interception

Cloud water interception by the canopy (sometimes referred to as fog-drip [Harr, 1982]) can be a major source of water input in some watersheds. In this case, canopy removal has the potential to decrease cloud water interception, decreasing peak flows. Since this process is strongly influenced by wind bringing moist air masses through canopies, the largest effects should be in harvested areas on upper hillslopes and ridges facing in the direction of the prevailing wind. Harvesting leeward slopes and valley bottoms should have less effect.

Snow accumulation and melt rates

Changes to snow accumulation and melt rates may result in peak flow changes during both rain-on-snow (ROS) events and spring flows. Snow tends to accumulate in canopy openings and melt faster during warm rain-on-snow events, primarily as the result of energy released by moisture condensing on the snow surface; this effect is predicted to scale with the opening size (Harr and McCorison, 1979). Large canopy openings, especially at higher elevations, are also subject to increased sublimation due to wind, thereby reducing snow cover over time (Storck et al., 2002). Scaling this process is complex due to this non-linearity of response.

Soil compaction

Roads also play a key role in altering peak flow dynamics (fig. 1). Compaction of soils due to the construction of new access or skid roads results in less infiltration and greater overland flow. When this increased flow is intercepted by road networks that cross subsurface flowpaths and change flow routing, both the peak magnitude and time of peak concentration may change in a watershed. Since these mechanisms directly involve flow routing, the actual effect on peak flows depends on how increased flow and accelerated timing of runoff from road surfaces interact with other water delivery processes (Luce, 2002). This effect should roughly scale with percent of area compacted and/or length of road network that is directly connected to streams (Wemple et al., 1996), but is highly dependent on the location of roads in the landscape (Wemple & Jones, 2003). It is difficult to disentangle road effects from harvest effects, because most harvested basins have roads. Instead we draw upon modeling studies that estimate the magnitude of peak flow increase likely due to road construction alone (Bowling and Lettemaier, 2000).

Paired Watershed Studies

Experimental watershed research in the Pacific Northwest began more than 50 years ago with the establishment of three small watersheds in the H.J. Andrews Experimental Forest in the western Cascades of Oregon, and grew to include multiple sets of watersheds in British Columbia, Washington, coastal and southern Oregon, and northern California. The studies were performed over small areas (0.1 to 10 km²), and originally intended to assess initial effects of management practices. In several cases the gauging records were terminated five to ten years after treatments, but in others the watershed records have been sustained or, in some cases, reactivated after a break in record of several decades.

Small watershed studies predominantly use control-treatment comparisons in adjacent watershed pairs, although some experimental studies (i.e., Casper Creek) utilize a nested approach with multiple gages measuring streamflow and other watershed products at several scales within the same watershed. Comparisons among sets of experimental watersheds arrayed longitudinally or along environmental gradients provide important information as well.

The experimental design in paired-watershed studies is typically based on comparison of metrics extracted from hydrographs between treated and untreated watershed following a pre-treatment period during which streamflows from the two watersheds are calibrated against each other. The difference between the pre- and post-treatment relation for the pair is then interpreted as the treatment effect, although other statistical comparisons are possible depending on objective (see Jones, 2005 for review).

Although the paired-watershed approach is well-established in the literature, it has a number of limitations.

- The pre-treatment period may not include the same range of flows as observed in the post-treatment period, leading to some uncertainty about what the predicted flow would have been based on the treated/control relationship. This is primarily a problem for extreme high and low flows;
- The relationship between the treated and control watersheds may change over time for reasons other than the treatment, for example: (a) forests are aging in both cases, but are at different points in succession, hence type and rate of change of forest stand condition; (b) one or both watersheds may be affected by natural disturbances, such as fire or defoliating insects or windthrow; or (c) both control and treated watersheds may be affected by edges created by adjacent treatments;
- Extreme floods are very important, but by definition occur rarely, so the sample size of these events is always small and it is difficult to move beyond anecdotal predictions to robust statistical analysis;
- Disentangling the effects of multiple treatments (i.e., forest cutting and roads) within the same watershed is problematic, especially when treatments overlap in both time and space;
- The timescales over which these experiments are typically run often include climatic variation that can influence the outcome of the experiment in unknown ways. For

example, the measured treatment effect might be different if it occurred at the beginning of a dry or wet cycle as driven by the Pacific Decadal Oscillation. Progressive global warming over the past and into future decades introduces additional uncertainty in interpreting results.

- Small watershed studies are inherently expensive and difficult to maintain, and therefore represent case studies without even pseudoreplication. In the absence of true replication, it is difficult to make strong statistical inferences.
- Small watershed studies are limited by the accuracy of the instruments and techniques used to measure streamflow, and accuracy varies over the distribution of flows, ranging from a few percent for low flows measured with an accurately calibrated weir, to 10 to 15 percent or more for high flows measured by standard stage-to-discharge techniques and calibrated against periodic wading discharge measurements (see Sauer and Meyer, 1992, for discussion of error).

Modeling Studies

Increasingly, researchers are using process-based models to formulate hypothesis that are tested against available measured data. Some models employ detailed understanding of hydrologic and geomorphic processes to inform the statistical analysis of long-term datasets (Lewis et al., 2001). Other models, such as the Distributed Soil-Hydrology-Vegetation Model (DHSVM) (Bowling and Lettenmaier, 1991), and the Regional Hydro-Ecologic Simulation System (RHESSys) (Tague and Band, 2001) utilize spatially distributed datasets to investigate complex linkages between management treatments and hydrologic response. Modeling efforts are increasingly relied upon to fill both data gaps and process-linkages that are not addressed by the traditional paired watershed literature, and are therefore included in this synthesis.

STUDY DESIGN AND ELEMENTS

To synthesize the available data from a wide variety of studies we developed a framework to maximize the correlation of findings, and explore process-based explanations for the results of paired-watershed and modeling studies of forest harvest effects on peak flows. The following sections explain the definitions we used to explore the dataset and introduce our approach to distilling the results of our analysis in a rigorous and useful fashion.

Geographic and Spatial Scales

We develop our analysis at two spatial scales. The site scale refers to studies that examine hydrologic response for management practices conducted on hillslopes, plots, or within small experimental watersheds (area $<10 \text{ km}^2$). This scale is generally synonymous with the terms drainage and catchment, and includes headwater (zero- and first-order) streams, and is significantly smaller than the management units defined by the hydrologic unit code (HUC). Management treatments at this scale typically involve one or several management activities with or without the presence of roads; we focus on the hydrologic impact of specific forest harvest activities. Most experimental watershed studies have been conducted at the site scale (area $<10 \text{ km}^2$), and therefore most of our data synthesis and analysis occurs at this scale.

At the basin scale ($10 \text{ km}^2 < \text{area} < 500 \text{ km}^2$) we consider ways of evaluating the composite effects of roads, along with the size, age, and spatial distribution of harvested units, together with the effects of riparian buffers or reserves. We use this broader spatial scale to examine likely geomorphic response to peak flow increases in terms of sediment transport and channel morphology. Our basin scale is larger than the site scale and generally synonymous with the terms sub-watershed and watershed employed by other classification schemes. Our basins include second to fifth order streams, and may be applied to HUC management units up to 5th field watersheds.

At both scales of analysis, we exclusively employ the term watershed when referring to a topographic area bounded by drainage divides where surface water drains to a common point (usually a gage station). This is not to be confused with the U S Geological Survey's HUC watershed class, which denotes a drainage basin of a particular size. Our watersheds have no implied scale.

Although our results are focused on western Oregon, we draw on studies beyond this area, to provide context and a broader range of climatic zones and forest and treatment types. The study sites forming the basis for our analysis are typically located in steep (slopes range from 30 to greater than 60 percent), mountainous terrain with varying geology and soils but usually supporting mature to old-growth coniferous forests with pre-treatment ages greater than 100 years. In general, initial management treatments occurred less than 50 years ago.

Management Treatments

The long timescales involved in implementing and following a paired watershed design means that land management practices evolve after the original treatments were imposed. For example, in the Pacific Northwest, small experiments in the 1960s and 1970s typically utilized complete clearcutting without riparian buffers and hot, broadcast burning of slash. Such treatments are not generally employed today on public lands. No paired watershed studies provide data on practices commonly used today including green-tree, standing dead, and downed wood retention; extensive riparian buffers; limited ground disturbance logging methods; and less intense slash reduction methods. Although this might be viewed as a serious limitation on interpreting peak flow effects of contemporary forest practices, we maintain that the clearcut treatments and un-treated control watersheds neatly bracket the intensity of today's treatments, providing a reasonable frame of reference for interpreting the potential effects of today's practices.

Because contemporary forest practices are so varied and unlike some of the practices used in experimental watersheds, it is necessary to describe classes of practices by using a common frame of reference (fig. 3). We elected to use the percent of watershed area harvested (hereafter referred to as percent harvested) as the metric to compare studies and treatments, because it can be interpreted from the description of the harvest practice for each study. This classification only represents a general magnitude of harvest, and ignores both type and spatial pattern of harvest. Under this scheme, the same percentage harvested generally can represent a range of basal area cut or canopy removed, and does not distinguish among patch sizes. For example, clearcutting a single patch equal to fifty

percent of an area, cutting small patches totaling fifty percent of an area, and thinning fifty percent of the trees over one hundred percent of an area all represent fifty percent harvested. However, we recognize that hydrologic effects may not be the same. In the above example, we would predict that hydrologic impacts would decrease in the presented order of diminishing intensity of treatment (fig. 3).

Hydrologic Zones

Hydrologic zones represent landscapes sharing the common hydrologic processes of precipitation type and seasonality, hydraulic conductivity and residence times, and partitioning of surface and sub-surface flow (Winter, 2001). These factors involve interactions among climate, geology, soils, and vegetation. Since historical weather data and seasonal observations of precipitation type are easily coupled with elevation data for a watershed, we adopt the widely-used definition of three hydrologic zones based on dominant precipitation type; rain-dominated, snow-dominated, and the transient snow zone that lies between them.

The transient snow zone (TSZ) is of particular interest because it represents the geographic region where rain-on-snow (ROS) events are particularly common during winter months, and such events are potentially affected by timber harvest (Christner and Harr, 1982; Harr, 1986; Berris and Harr, 1987; Jones and Grant, 1996). For western Oregon, the lower boundary of the TSZ falls between 350m and 450m, and the upper boundary falls between 1100m and 1200m (Christner and Harr, 1982; Harr, 1986). For southern Oregon, the TSZ falls at the relatively higher elevational band between 760m to 1050m and 1200 to 1700m.

Recent studies have further partitioned the landscape, on the basis of temperature (Nolin and Daly, 2006) and geology (Tague et al., 2007). No commonly accepted hydrologic zone classification for the Pacific Northwest satisfactorily incorporates these factors for our purposes, although several candidates have been proposed (Winter, 2001; Wolock et al., 2004). In the absence of a detailed classification, we rely on the use of site-specific information to guide the interpretation of our analysis within each broad hydrologic zone.

Scaling Hydrologic Processes and Effects

We used available studies to evaluate relative magnitude and general trend of each treatment effect by hydrologic zone and peak flow generating mechanism (fig. 2). We considered process-based scaling issues and the distribution of processes by hydrologic zone. For example, snow accumulation and melt processes are likely to be maximally expressed in the transient snow zone, moderately expressed in the snow zone, and minimally expressed in the rain zone. The relative trend presented is a broad interpretation of the degree to which the process under consideration scales with percent harvested. This is a conceptual scaling only, and is not tied to quantitative data. This approach sets sideboards on the potential relative magnitude of peak flow increases as a function of hydrologic mechanisms, flow magnitude, and geography.

Limitations of Analysis

The studies reported in this document paint a reasonably consistent picture of forest management effects on peak flows. There are some outliers, however, and additional factors that may create real and apparent discrepancies among studies:

- Even within a somewhat homogeneous region such as the Pacific Northwest, existing studies represent a range of geology, topography, climate, and vegetation types, each of which gives rise to differences in hydrologic process domains and responses to the same treatment;
- The treatments vary, ranging from clearcutting with broadcast burning and roads to small patch cuts with no roads or burning. The location of treatments with respect to other important features (i.e., roads, streams, sources of groundwater, mass movements, soils of different depths) is highly variable and typically not described or replicated;
- Studies employ different statistical techniques involving different sets of assumption and sensitivities to change (Jones, 2005). Furthermore, different standards of statistical significance contribute to varying interpretations.
- Definitions and uses of specific hydrologic metrics vary among studies, including what constitutes a peak flow (e.g., any hydrograph rise, flows above a threshold, only geomorphically-effective flows);
- Different studies may employ or compare different lengths of record or calibration periods, and these may span different climatic periods;
- Studies utilizing hydrologic models employ a range of models with varying sensitivities to key hydrologic processes.

Despite these limitations, small watershed studies represent the best and in many cases only means of quantifying the effects of forest practices on streamflow, particularly when combined with modeling and/or field-based process studies.

METHODS

We first organized published studies based on hydrologic zone and intensity of management activities (percent harvested). Next, we analyzed the data for peak flow trends across the range of flows and percent harvested, ultimately focusing on geomorphically-effective flows (recurrence interval greater than one year) that have the potential to influence channel morphology. Then we constructed envelope curves representing the maximum reported peak flow increases, as supported by our site scale analysis (area < 10km²).

We next expanded our investigation to the basin scale (area >10 km²) to look at how other factors such as roads, patterns of cuts, treatment type, and riparian buffers potentially influence peak flows at larger watershed scales, and suggest a method to interpret the envelope curves from the site scale studies in larger basins. Finally, we folded considerations of channel type and morphology, as defined primarily by channel gradient, into the analysis to provide a first-order prediction of whether peak flow increases of a particular magnitude might affect channel structure in a particular watershed.

Literature Review and Distribution of Relevant Studies

A broad literature review was performed to compile research linking forest practices in the Pacific Northwest with changes to peak flow. We surveyed the literature with standard computer-based search engines using keyword searches for combinations of relevant terms (eg. peak streamflow, flood, forest harvest, logging etc.). Search criteria limited our geographic focus to western North America, except in the case of broad topical review papers. We also compiled references by crosschecking citations in relevant articles (most notably Moore & Wondzell, 2005), and through personal communication with researchers in the field. The resulting bibliography includes literature on relevant general hydrologic processes, as well as experimental and modeling studies that specifically investigate forest harvest effects on peak flow (app. 1).

Our subsequent synthesis efforts focused on identifying studies that specifically report changes in peak flow due to forest harvest, and distilling the data to provide a transparent summary that facilitates comparison among studies. Figure 4 illustrates the range of experimental sites where research has been conducted on the effects of forest harvest on peak flow. The sites (area <10km²) are arrayed by hydrologic zone, as defined by dominant precipitation type, and management treatment, represented as percent area harvested. Each box includes the name of the experimental site and the relevant studies that analyzed peak flow data from that site. The right hand column represents larger basins (area >10km²), which typically have a more complex history of forest management. Modeling studies included here may also report general findings from multiple sites (e.g. Bowling et al., 2000), when information on forest treatment and watershed characteristics are not reported for individual sites.

Although the Pacific Northwest has long been the geographic focus of small watershed studies, these studies were not intentionally designed to represent the full range of management treatments across all hydrologic zones (fig. 4). The snow-dominated zone is particularly poorly represented in Oregon. The combination of older paired studies from Colorado and Idaho, the emerging modeling literature out of British Columbia and Colorado, and process-based work in southern Oregon (Storck et al., 2002) gives us a starting point for interpreting change in snow-dominated zones.

Early studies in the documentation of peak flow increases due to forest harvest include the only Oregon watersheds in the rain-dominated zone (the Alsea watersheds) along with the H.J. Andrews Forest in the transient snow zone. One of the best designed and well documented long-term experimental studies, Caspar Creek, in northern California also falls into the rain zone, providing valuable modeling and empirical data. The main complication in interpreting the dataset from the rain-dominated zone is the presence of roads in almost all watersheds. There has been a corresponding direct focus on road effects on hydrologic routing (e.g., Wemple and Jones, 2003) and resulting changes in peak flow (Coe, 2004).

Much of the research effort in Oregon is understandably focused in the transient snow zone (TSZ), primarily because it affects much of the federal forest land in the Cascades. Treatments in these studies cluster around 100 and 30 percent harvested, and often

included broadcast burning and road construction. Most larger basin studies are also situated in this hydrologic zone. General trends at the site scale are therefore best able to support larger basin issues (i.e., roads, scaling) in this hydrologic zone, particularly when combined with modeling and process studies. Our analysis is limited to studies that actually report quantitative data, as opposed to descriptive observations, on changes in peak flow, as opposed to water yield or low flow, due to forest harvest. Supplemental and additional literature may be found in appendix 1.

Peak Flow Dataset Compilation and Analysis

For each reference listed in the study framework, relevant information was compiled in a series of data tables (app. 2). This information includes the management history of each experimental watershed (location, climate, forest type, harvest history, etc.) and the research design and findings of each study (return interval of peak flow analyzed, length of record used, method of analysis, reported findings, etc.). Modeling and experimental studies were compiled separately, recognizing the inherent differences in study design and format of findings. These data tables represent the numbers reported by the authors; no additional analyses were performed on the data. No unpublished data are included in this analysis.

There is a wide range in analytical technique and reporting of peak flow data, even for a single site with a common dataset (eg. table 1). The pre- and post-treatment flow measurements are generally linearly or logarithmically regressed, or compared by using analysis of variance (ANOVA). The calculated changes in peak flow can be reported for flows grouped by season (fall, winter, spring), size (small, medium, large), type of precipitation event (rain, rain-on-snow), and post-treatment period length. Data are usually reported as a percent change in peak flow, which facilitates comparison among sites. Some studies index findings to changes in absolute magnitude of flow in a control watershed, whereas others studies index changes to recurrence interval. Since few studies report data across this entire range, table 1 exemplifies the challenge that managers face in making sense of the scientific literature.

For this synthesis we were interested in published results from paired watershed or modeling studies where peak flow changes could be evaluated either i) across a range of flows for a single watershed, and/or ii) at a greater than one year return period, where the statistical significance of the results were reported. Other criteria used to select studies included the use of a calibration period and sufficient explanation of the methods employed in analysis.

Several experimental studies do not report quantitative data that we could use for our comparison. These references were retained, however, for qualitative use in later sections of the synthesis. Some studies grouped findings by season (Harr et al, 1975) or precipitation form (Harr, 1986) and did not report a combined change that was inclusive of all sizes of peak flows. Cheng et al (1975) do not provide information on the recurrence interval of the flows, probably due to the very short post-treatment record, and the reported decrease in peak flow (-22 percent) is therefore not interpretable. Flume Creek (Hudson, 2001) is the only experimental study we found testing contemporary

management practices, but calculates the percent change to peak flow of only that population of peaks falling above the 95 percent confidence interval for the pre-treatment regression (rather than the entire post-treatment population), thereby inflating the values reported.

Site scale data are limited by the accuracy of the instruments and techniques used to measure streamflow, and accuracy varies over the distribution of flows, ranging from a few percent for low flows measured with an accurately calibrated weir, to 10 to 15 percent or more for high flows measured by standard stage-to-discharge techniques and calibrated against periodic wading discharge measurements (Sauer and Meyer, 1992). Based on considerations of gage and measurement error at high flow events, we identify a minimum detectable change in peak flow (detection limit) of ± 10 percent for our site scale analysis. This value is shown on our graphs as a gray area around zero, suggesting that percent changes in peak flow that fall in this range are within the experimental and analytical error of flow measurement and cannot be ascribed as a treatment effect.

Peak flow studies increasingly utilize a format introduced by Thomas and Megahan (1998) to graph percent change to peak flow at a single site over a range of flows. We adopt this as one format for study comparison (Figures 5, 6). Studies at seven sites and two studies reporting average values for a collection of similar and related sites reported data appropriate for this type of analysis. The data required are percent change to peak flow keyed to a control watershed return interval or flow across the entire wet season (e.g. bold values in table 1). The point at which the regression lines intersect the 10 percent detection limit suggests the maximum discharge (or return period) for which a peak flow change is detectable from an experimental watershed study (fig. 7). Watersheds from both the rain-dominated and transient-snow hydrologic zones were used in this analysis. No appropriate data are available from the snow-dominated zone.

Our second analysis explored changes in peak flow across a range of forest treatments, and incorporated a much larger subset of the compiled studies. The data criteria were percent change in peak flow for the population of peaks with a recurrence interval of one year or greater (tables 2-4). Flows of this magnitude are largely recognized as geomorphically effective, defined as having the capacity to initiate sediment transport (Andrews, 1983; 1984). Data are presented individually for each of the three hydrologic zones; rain-dominated, transient snow (TSZ) and snow-dominated (fig. 8).

Two formats are employed to display this data. First, all data from tables 2-4 are plotted to show the spread in values keyed to management treatment type (fig. 8a-c). Studies that reported no significant change without a percent value, or across a larger population (e.g. all size peaks) or both subsets of the wet season (e.g. both fall and winter flows) are included as an indication of no detectable change (zero value) (see tables 2-4). To facilitate interpretation of this data set, representative values for each study in each watershed were then grouped by percent harvest (fig. 8d-f). Percent harvest group ranges (100-80 percent, 79-40 percent and 39-0 percent) were determined primarily by natural data spread, but these breaks are intuitively supported by the general scaling of changes in hydrologic function with percent harvest (see fig.2). Studies reporting no significant

change (nsc) rather than a numeric value, studies reporting negative change, and multiple values for a site reported by the same study are not included in the calculated of the averages and standard deviations plotted (fig. 8d-f).

FINDINGS

Peak Flow Changes at the Site Scale

Event magnitude

The largest peak flow increases reported were for small storms with recurrence interval much less than one year (Figures 5, 6). Peak flow increases of as much as 90 percent over the control were reported for these small events. For all but one study examined, increases in peak flow diminish with increasing storm magnitude. The trend appears to be roughly an exponential decrease and was modeled as such, in both experimental watershed studies (fig. 5, 6a, 6c) and modeling studies (fig. 6b) and from the site to large basin scale (fig. 6c). For most watersheds the decreasing trend is strongly influenced by the small number of the largest storm events. However, this trend is consistent across a wide range of studies, lending confidence to the interpretation that percent increase in peak flow is greatest for the smallest storms. This is also consistent with studies from other regions and general hydrologic understanding (i.e., Leopold, 1980).

Only one watershed (Coyote 1) (fig. 5b) did not follow the general trend of decreasing magnitude of change with event return period, but actually showed the highest percent increases in peak flow for the largest storms. These anomalous results may reflect cross-transfer of water during the largest events as a result of road drainage, as discussed by Harr et al. (1979) at the time of publication, and subsequently by other researchers (Wright et al., 1990). In general, results from the Coyote Creek watersheds are suspect due to the paucity of large storms during either the pre- and post-treatment periods. We report the results for both Coyote 2 and Coyote 3, however, because they fit our criteria of acceptable data, but exclude Coyote 1 from further analysis.

Peak flow increases generally approach the 10 percent detection limit (minimum detectable change in flow) at recurrence intervals less than six years, although this varies from watershed to watershed (fig. 5, 6). Some studies suggest the 10 percent detection limit is reached at somewhat longer recurrence intervals (i.e., fig. 5b, 6b). Since experimental pre- and post-treatment periods are generally not long enough to represent these longer recurrence intervals, we cannot confidently extrapolate the curves to the corresponding percent increase in peak flow. The field and analytical methods represented by these studies therefore do not provide evidence that forest harvest increases peak flows for storms with recurrence intervals longer than six years.

When the recurrence interval corresponding to the minimum detectable change is plotted across the range of percent forest harvested represented by these watersheds (fig. 7), a trend of higher recurrence intervals corresponding to greater percentages of area harvested is discernable. With the exception of Coyote 2 there is a distinct linear downward trend with Y-intercept at approximately zero percent harvested. This interpretation is consistent with hydrologic theory that predicts diminishing effect of

forest harvest with both increasing flow magnitude (Leopold, 1980) and decreasing harvest intensity.

Management treatment

The largest percent increases in peak flows are expressed at 100 percent harvested (clearcut); this is true for all hydrologic zones (fig. 8). There is no consistent pattern of treatment type and reported changes in peak flow (fig. 8a-c). Zero percent change or no significant change in peak flow is reported from 25 to 100 percent harvested in both the rain and transient zones, and from 9 to 50 percent harvested in the snow zone. Increases in peak flow range from 0 to 40 percent in the rain and transient zones, and from 0 to 50 percent in the snow zone. In all three zones, averages and standard deviations of reported increases, a conservative estimate of mean percent change in peak flow, support the general trend of smaller changes in peak flows with lower levels of harvest (fig. 8d-f).

There is wide scatter and little discernible trend to the data from the snow-dominated zone (fig. 8c, 8f). This may be due to the fact that both modeling and field studies have focused at relatively low levels of percent harvested (<50 percent). The scatter is also indicative of the primary importance of other factors (e.g., aspect, elevation, timing and temperature of snowfall) in this hydrologic zone. We therefore suggest that the snow zone graph should not serve as a basis for management direction, and do not include it in subsequent interpretation figures.

Roads

Increase in peak flows due to roads and associated soil disturbances complicate the interpretation of our analysis for harvested area alone. In the rain-dominated zone, all but one study site (Deer 4, Alsea) includes roads covering at least 2 percent of the treatment area (table 2, fig. 8a). Therefore, we cannot disentangle the influence of roads on the observed increases in peak flow in this hydrologic zone. In the transient zone, only two experimental sites (Watersheds 3 and 6, H.J. Andrews), and two modeling sites (Hard and Ware, Deschutes) include significant roads in the treatment (table 3, fig. 8b). Studies in Watershed 3 report values at the upper end of the range (13 and 16 percent) for 25 to 30 percent harvested sites, whereas values for Watershed 6 are at the lower end of the range (nsc and 16 percent) for clearcut sites. Modeling studies for Washington watersheds suggest an approximate doubling of the percent change in peak flows due to harvest alone when road construction is included (Bowling and Lettenmaier, 2001). We cannot parse the available site scale data to look at the effects of roads of different ages, location in the landscape, or other factors that contribute to the degree of influence of roads on change in peak flows.

Seasonality

Although we did not do a comprehensive analysis of seasonality of peak flow increases, we observe that in most studies percent increases are greatest for fall storms (Jones and Grant, 1996; Thomas and Megahan, 1998; Beschta and others, 2000). The most consistent mechanism for producing peak flow changes appears to be related to reduced evapotranspiration following harvest resulting in higher soil moisture levels, hence increased runoff during early fall storms. The only countervailing evidence that we are

aware of comes from Caspar Creek where peak flow increases of approximately 20 percent were distributed across both season and storm intensity (Reid and Lewis, 2007). The authors of this study interpret these findings as resulting from canopy interception losses that occur regardless of storm type in a redwood dominated forest. Though intriguing, these findings have not yet been published in the peer-reviewed literature.

Riparian buffers

During high flows, riparian water tables rise close to the soil surface, facilitating flow of water across the riparian zone (Rivenbark and Jackson, 2004). Presence of trees, roots, and woody debris on floodplains increases hydraulic resistance, and may thereby decrease velocities of both water flows and flood waves (i.e., hydrograph peaks) (Darby, 1999). This effect is likely to be particularly pronounced in wide, alluvial rivers with well-developed floodplains, where flows have the opportunity to inundate valley floors and interact with vegetation (Tal and others, 2004). Most mountain rivers, however, have relatively narrow valleys with floodplains constructed by both fluvial and non-fluvial processes (Grant and Swanson, 1995). Research has documented the interaction of flood flows and vegetation during floods in these systems (i.e., Swanson and others, 1998; Johnson and others, 2000). We are unaware, however, of any research specifically linking presence, absence, or extent of riparian forests to flood hydrology in mountain landscapes.

The evapotranspiration demands of riparian forests are likely to play only a very minor role during peak flows of the magnitude described here, as these flows typically occur during wet mantle periods when evapotranspiration is low. We have no data on whether riparian buffers are likely to mitigate or offset potential peak flow increases from harvested areas.

Forest age and recovery

Percent change in peak flow generally decreases with time after harvest (Jones and Grant, 1996; Thomas and Megahan, 1998; Jones, 2000). Due to limited data availability, we use this general finding to guide our analysis by reporting peak flow increases for the first post-harvest interval, generally two to five years, reported for each study if possible, and use the entire post-treatment period only when that is the only value reported, which tends to underestimate the potential increase for the first years immediately after harvest. Key questions that we are unable to address with this dataset include whether thinning resets the clock at the time of second harvest, and whether the response is the same for cutting second growth and old growth.

Spatial pattern of harvest

The specific mechanisms that drive peak flow increases are likely to be sensitive to the scale of forest patches, in terms of their horizontal and vertical dimensions, and their distribution and contiguity. In particular, rain-on-snow processes at the stand level have been shown to vary with both forest stand age and patch size (Harr and Coffin, 1992), so we would expect this effect to be present for watersheds in the transitional snow zone. There is even stronger evidence for patch size and orientation affecting snow accumulation and melt processes in the snow zone (Troendle and King, 1987; Storck et

al., 2002; Winkler et al., 2005). We see less evidence supporting patch age and size contributing to peak flow effects for watersheds in the rain zone.

Our findings on effects of partial harvest (non-clearcuts) are limited by scant data. In general, we expect that the magnitude of peak flow increases depicted by figure 8 represent the maximum potential increases for large canopy openings since the size of opening relates directly to key hydrologic processes (fig. 2). In theory, partial cutting and thinning should result in peak flow changes that are lower than those indicated for clearcutting, and may be undetectable in some watersheds.

Summary of site scale findings

The maximum percent increases in peak flow can be used to construct linear envelope curves, or response lines, that encompass the full range of data reported by the studies in the rain and transient snow zones (fig. 9, 10). We also plot a mean reported change based on the averages of the data from figures 8a and 8b. Theoretically, these response lines represent conservative estimates of maximum and mean measured increases in peak flow for a given percent harvest and can be used to evaluate the potential for hydrologic response to management treatment. By conservative, we mean that these lines are high estimates of potential forest harvest effects. Whereas the maximum line, by definition, represents the highest reported increases, the mean line is also biased toward higher values, as reported zero values are not included in the calculation.

In the rain zone, the maximum response line reaches the 10 percent detection limit at approximately 29 percent harvested (fig. 9). This suggests that if less than 29 percent of the watershed is harvested, there is no data that supporting a resultant increase in peak flow; in fact, the first detectable reported value occurs at 40 percent. The mean reported change response line crosses the detection limit at 45 percent harvest. Remembering that this dataset inherently includes greater than two percent roads in most studies, we posit that a response line representing harvest without the construction of new roads would shift down, suggesting an even higher threshold for harvest prior to detectable change in peak flow. However, the absence of any data to support this prevents us from drawing a without-roads response line for the rain dominated zone.

For watersheds within the TSZ, we are able to begin to disentangle the influence of road construction from peak flow increases due to harvest alone (Figure 10). We construct a maximum response line by using data only from studies with less than two percent roads. The Andrews Watershed 3 data point that includes roads (30 percent harvested, 16 percent increase), and the modeled points from Bowling & Lettenmaier (2001) that include roads (35 percent harvested, 23 percent increase; and 66 percent harvested, 29 percent increase) plot above this line. The maximum without-roads response line reaches the detection limit at approximately 15 percent harvested. The mean response line, which includes a few basins with roads, crosses the detection limit at a slightly higher value of 19 percent harvested. We lack sufficient data at the upper end of the harvest range to draw a maximum with-roads response line for the TSZ.

Once we have defined the maximum and mean reported changes in peak flows that are likely at various levels of harvest, we must revisit our definition of “percent harvested.”

Since “50 percent harvested” represents a variety of treatment intensities (fig. 3), and our experimental and modeling data are drawn from the most intense of those treatment (clearcutting) we must address the effects of less intense treatments such as partial harvest and thinning. Drawing on scaling inferences from basic understanding of hydrologic processes to identify plausible trends and magnitudes (fig. 2) we suggest that the mean response lines may provide good guidance in the prediction of likely changes in peak flow from treatments that result in lower disturbance intensities and overall reductions in basal and leaf area than clearcutting. For example, the mean response line suggests a 40 percent thinning over 100 percent of area could be predicted to result in a detectable peak flow increase of approximately 14 percent in a TSZ watershed and would be under the detection limit in rain-dominated watersheds.

Confidence in the general trends and magnitudes of peak flow increases shown in figures 8, 9 and 10 is enhanced by comparison with published global data sets for peak flow increases due to forest harvest (Figure 11, after Guillemette et al., 2005). The trend shows very similar magnitudes of peak flow increases as a percent of area harvested and our data are contained entirely within the larger data set. The correspondence between our results and these broader global data should be interpreted cautiously, as the higher peak flow increases reported by Guillemette et al., 2005 include practices that are not typically associated with forest harvest activities in the Pacific Northwest, including expansive road and skid trail networks, widespread application of herbicides, and extensive scarification.

Analysis of Peak Flow Increases in Larger Basins

A key concern in the management arena is how peak flow increases measured at the site scale (area 10 km^2) should be interpreted at the larger basin scale ($10 \text{ km}^2 < \text{area} < 500 \text{ km}^2$). As we have previously discussed, changes to peak flows are influenced by factors other than harvest, including overall basin condition, the age and pattern of forest stands within a larger basin, the location, age, and extent of road networks, and the extent (both laterally and longitudinally) of riparian buffers. These factors become increasingly complex to quantify in larger basins, and therefore increasingly important in interpreting potential peak flow increases.

Unfortunately, very few studies address the response of peak flows to forest management larger basins in this region, the papers by Jones and Grant (1996, 2001) with follow up analyses by Megahan and Thomas (1998) being the exception. Some modeling studies examine larger basins (Bowling and Lettenmaier, 2001). None of these studies addressed the full set of management issues that apply at larger basin scales. Thus, we cannot strictly rely on data as the basis for interpreting likely peak flow effects at the basin scale, but must draw on inferences from field and modeling studies as well. Here we present general principles for interpreting peak flow effects in larger basins and suggest an approach consistent with data from small watersheds.

The magnitude of any peak flow increase in response to forest management diminishes with increasing basin area for several reasons, including attenuation of flood peaks due to channel resistance, floodplain storage, and transmission losses, as well as effects of storm

size and origin (Garbrecht, 1991; Archer, 1989; Singh, 1997; Shaman et al., 2004). The magnitude of this effect varies from basin to basin and is affected by the location and timing of tributary inputs, but can typically result in reductions in unit stream flows of 50 percent or greater (Woltemade and Potter, 1994).

No hydrologic mechanism exists by which peak flow increases measured as a percent change can combine to yield a higher percent increase in peak flows in a larger basin. For example, if peak flows in two confluent sub-basins each increase by 15 percent, the resultant increase downstream of the confluence can be no more than 15 percent and is likely to be less. As a consequence, the magnitude of peak flow increases for larger basins will necessarily be equal to or smaller than those reported for small watersheds.

For the few studies where increases in peak flows for large basins have been reported, the magnitude of increase is typically less than the inter-annual variability in streamflows. For example, the range of peak flow increases for larger basins (60 to 600 km²) as reported by Jones and Grant (1996; their fig. 7) and measured as the difference in peak flows between neighboring watersheds with different forest harvest histories, is less than the inter-annual range of streamflows as measured over the same period. This may partially explain why no studies in the Pacific Northwest have demonstrated the effect of forest harvest on peak flows by using time series of mean or instantaneous peak flow statistics – the inter-annual variance swamps the land use signal. As an aside, this has direct implications for interpreting likely effects of peak flow increases on channel morphology and aquatic habitat, when peak flow increases occurring in the landscape are less than the “natural” variability in streamflows to which channels and presumably ecosystems are adjusted.

Application

Taken together, these general principles provide strong inference that peak flow increases in large basins will almost invariably be less than those in small watersheds, suggesting that the response lines for small watersheds (fig. 9,10) represent maximum increases for all size watersheds. The degree to which the predicted increases are less than maximum reported response line should be based on an analysis that incorporates the manager’s best evaluation of the separable effects of watershed size, roads, previous cutting history, and degree of forest recovery in establishing an overall level of acceptable “risk” or what some have termed “threshold of probable concern” (Rogers and Biggs, 1999). We suggest that potential peak flow increases in large basins be interpreted from figures 9 and 10, with predicted increases falling around the mean response line in most cases. This analysis can be viewed as semi-quantitative, in the sense that it incorporates numerical analyses of key watershed conditions, but does not attempt to define a statistically rigorous solution.

A larger basin analysis should begin with standard accounting approaches to establish the current condition of the watershed with respect to its prior forest cutting and recovery history. Such approaches can include the equivalent clearcut area (King, 1989; see Reid, 1993 for review), aggregate recovery percentage or other metrics of forest regrowth (i.e., Talbot and Plamandon, 2002). The proposed treatment should then be added to the

existing ECA or similar metric to determine the effective percent area harvested. Locating this value on the maximum reported change line from figures 9 and 10 establishes the upper bound of potential response, with a lower bound of no response.

Determining where the proposed treatment falls within this range requires an assessment of the intrinsic basin condition and intensity of proposed management action (fig. 12). For example, the existing and proposed road network should be evaluated with respect to its degree of connectivity with the stream network (e.g. Wemple and others, 1996). Additional qualitative analyses can be performed for the extent of riparian buffers, and existing and proposed sizes of cutting units. The analysis can then be extended to include intrinsic basin factors, such as soil depth, permeability and porosity of bedrock, and other geologic factors influencing the drainage efficiency, or speed with which water is routed through the watershed (Tague and Grant, 2003). In general, we would expect that factors contributing to faster runoff (i.e., shallower soils, low permeability bedrock) would result in greater drainage efficiency in transmitting any potential peak flow increases to the watershed outlet. Taken together, these analyses provide a useful estimate of the extent to which proposed management actions are more or less likely to result in peak flow increases by various mechanisms.

We propose that this sort of analysis of potential peak flow increases becomes the basis for interpreting the response lines presented in figures 9 and 10. A greater weight of factors on the left side of figure 12 would lead to an interpretation of peak flow increases closer to the maximum response line, whereas a greater weight on the right side would lead to an interpretation of increases at or below the mean response line. The outcome of this type of approach is not a single number for peak flow increases, but a plausible and defensible range of potential increases that is based on the preponderance of evidence and consistent with both data and inference. The following examples, beginning with simple interpretations and proceeding to more complicated analyses, suggest basic guidelines for applying the response curves and process-based understanding generated by the data synthesis to possible management scenarios. These are not meant to represent real treatments for actual watersheds, and should not be viewed as such.

Example 1:

A harvest is scheduled for a 100-yr old forest in the rain zone of the Oregon Coast Range. If the proposed cut is approximately 20 percent, both the maximum and mean response lines in figure 9 suggest a 20 percent cut would not result in a detectable increase in peak flows with a return period of greater than one year. If the proposed cut is 35 percent of the area, figure 9 suggests the resulting increase in peak flow would not be detectable following the mean response line, and would be approximately 13 percent from the maximum reported response line, resulting in a range of 0 to 13 percent increase in peak flow. Figure 12 can then be used to narrow down the range of likely peak flow response. For the case of a single large clearcut on thin soils in a watershed with pre-existing dense road network that is hydrologically connected to the stream network, the predicted increase in peak flow would fall near the upper end of the range (i.e., 13 percent). If, on the other hand, the proposed treatment involved a 20 percent thinning on similar soils

with the same road network, then the predicted response is more likely to fall nearer the lower end of the range, and not be detectable.

Example 2:

A patch cut involving the removal of 50 percent of basal area in small (less than 0.05 km²) patches is proposed for a five km² watershed with no existing roads in the transient snow zone of the western Cascades. From figure 10, the maximum response at the smaller watershed scale is potentially a peak flow increase of 21 percent, with a mean response of 15 percent. If the treatment included construction of new, hydrologically connected roads, the peak flow increase could be higher. The larger basin (area = 100 km²) in which this watershed falls has an ECA of 25 percent. This pre-existing basin condition corresponds to a peak flow increase of as much as 13 percent prior to any additional treatments. At the larger basin scale, the ECA increases to 27.5 percent, and the maximum response increases by 1 percent to 14 percent. In this case, the small proportion of the larger basin scheduled for harvest results in only a small increase in ECA, and a very small increase in peak flows at the larger basin scale.

Channel Response to Potential Peak Flow Increases

Despite the interest that this issue has garnered, to date no field studies explicitly link peak flow increases with changes in channel morphology. Although there is an extensive literature on forest harvest effects on stream channels, no studies that we are aware of have demonstrated a direct correlation between peak flow changes due to forest harvest alone and changes to the physical structure of streams. This statement refers specifically to the effect of peak flow changes directly on channels as measured by changes in channel geometry, planform, or sediment transport; but not to secondary effects that could potentially be attributable to peak flow changes, such as local increases in soil water leading to increased mass movements that deliver sediment to channels and may result in changes in channel structure. Disentangling these different causal mechanisms on channel change can be problematic as they are often confounded (Lyons and Beschta, 1983; Grant, 1988). We do not consider such linkages here although they clearly are a factor in some basins.

In the absence of direct studies our approach to evaluating the likely effect of peak flow increases on channels roughly follows the train of logic suggested by Grant (1987: 143):

“...a necessary condition for channel changes is that flows have sufficient force to move bed material. For a given cross-section, channel slope, and size distribution of bed material, the magnitude of flows required to move different size fractions on the bed can be estimated...”

Percent increases in peak flows can be indexed against the magnitude of flows required for sediment transport while recognizing that sediment transport represents a necessary but not sufficient condition for channel change. The magnitude of flows required for sediment transport, termed geomorphically effective flows, vary from channel type to channel type and even within the same channel, but some general principles apply and

can be used to identify where the most likely channel responses to any peak flow changes are likely to be located.

A detailed channel and cross-section analysis is necessary to rigorously define sediment transport thresholds (i.e., Buffington and Montgomery, 1997; Hicks and Gomez, 2003; Rosgen, 2006). We provide a more general conceptual framework relating channel types to the return period of critical flows required for sediment transport of a reference grain size, assumed here as the median grain size (D_{50}). We therefore define Q_{cr} as the flow required, on average, to move the reference grain size, and RI_{cr} as the corresponding recurrence interval of that flow. We further propose a simple classification system for channel types based on channel gradient. This scheme follows that proposed by Montgomery and Buffington (1997), but also loosely corresponds to the stream typology proposed by Rosgen (1996) and used by many federal agencies. Four broad channel types are considered: cascade, step-pool, gravel-bed, and sand-bed. These channel types generally occur within discrete slope ranges (Montgomery and Buffington, 1997) (fig. 13).

In general, the frequency of sediment transport increases with decreasing channel gradient. This is due to a number of factors including the correlation between gradient and bed grain size, and the dependency of critical dimensionless shear stress on gradient and channel type (e.g., fig. 8-4, Rosgen [1996]). The analytical basis for this claim is beyond the scope of this paper; see Andrews (1983) for details. But approximate ranges for RI_{cr} can be based on field evidence (fig. 12). For example, Andrews (1984) found that flows equal or slightly less than bankfull were required for initiation of gravel transport on 24 gravel-bed streams in Colorado; such flows were equaled or exceeded, on average, several days each year. Much less frequent transport is reported for step-pool and cascade channels. Grant et al. (1990), for example, report RI_{cr} for step-pool channels of 20-50 years. Wohl (2000: 106-112) gives a good summary of varying entrainment frequencies and bedload transport rates as a function of stream type. This approach is also consistent with stability analyses for channel types suggested by Rosgen (2006; tables 2 through 4).

Following these analyses we can begin to address which channel types are most likely to be affected by potential peak flow increases. We set the lower bound on RI_{cr} as less than one year and the upper bound at approximately six years (fig. 7 and shaded rectangle in fig. 13). The intersection of this rectangle with the labeled stability fields for each of the channel types provides a rough estimate of the likelihood of peak flow increases translating into sediment transport and associated channel morphology changes. This analysis reveals that the steepest channel types (cascade and step-pool) generally have RI_{cr} values above those likely to be affected by peak flow increases. In contrast, gravel- and sand-bed channels have RI_{cr} values where peak flow increases may be a factor. In Oregon and Washington gravel bed channels are the dominant stream type likely to be sensitive to any peak flow changes since sand-bed channels in forested landscapes are rare in the Pacific Northwest.

Figure 13 provides only a rough guide to where peak flow changes have the potential to be manifest – it is intended primarily to show where such changes are unlikely to occur. Moreover, local scour and fill can occur in a wide range of channels over a wide range of peak flows. For example, Faustini (2000) reports local changes of one to several grain diameters in channel cross section area for a cobble-bed, step-pool channel on the scale from peak flows less than a 10-year recurrence interval. However, substantial changes in most channel cross-sections require peak flows with recurrence intervals greater than 10 years. Field observations and more detailed analyses are called for where a high concern for potential peak flow changes exists (i.e., Rosgen, 2006). Also, this analysis focuses only on sediment entrainment. Potential effects of changing hydrologic regimes on other channel processes, including changes in the frequency of wood entrainment and transport, lateral migration, or pool/riffle dynamics are not considered. However, this analysis sets the lower threshold of concern as wood entrainment or channel geometry or planform changes generally occur at higher RI_{cr} than initiation of sediment transport. This analysis is likely to be particularly useful in identifying parts of the stream network where risk of channel response to peak flow changes is relatively low.

MANAGEMENT IMPLICATIONS

This analysis of the available data on forestry-induced peak flow changes and likely first-order geomorphic effects on streams raises a number of key questions with respect to management of forest lands. We have tried to frame the issue as broadly as possible, while still providing our best estimates of the state-of-the-science. We were conservative in our interpretations -- the manner in which we constructed the response lines in figures 9 and 10 is an example of this. The available data do not permit an entirely rigorous and statistically valid analysis of whether or not forest harvest activities cause peak flow changes sufficient to cause geomorphic or ecological effects. The data do, however, provide a sound basis for discriminating “big” effects from “small” effects, and help to identify geographic regions and parts of watersheds where such effects are more likely to occur and result in detectable changes.

Specifically, the small watershed data support the interpretation that watersheds located in the rain-dominated region are less sensitive to peak flow changes than those in the transient snow zone. This is reflected in the difference between the 29 percent (rain) versus 15 percent (transient) harvested area detection limit (figures 9 and 10). Furthermore, the data support the interpretation that if peak flow increases do occur, they can be detected only in flows of moderate frequency and magnitude. This is not to say that forest harvest has no effect on extreme events, just that we cannot detect them. Hydrologic theory, however, suggests that such effects are likely to be small.

Considerations as to how these effects might scale up in larger basins indicated that small watershed studies likely represent the maximum effects of forest harvest present on the landscape, and that such effects will at most remain constant with watershed size. This finding is consistent with the observations of Jones and Grant (1996) that similar percentage harvested in small and larger basin pairs resulted in similar magnitudes of peak flow changes. In general, we would predict that harvest effects diminish as basin size increases.

Moreover, the data suggest the inference that peak flow effects on channels, if any, should be confined to a relatively discrete portion of the network: river and stream reaches where channel gradients are less than approximately 0.02. Peak flow effects on channel morphology can be confidently excluded in high gradient (slopes >0.10) and bedrock reaches, and are likely to be minor in most step-pool systems. On the other hand, if channels are sand-bedded, a much closer hydrologic and geomorphic analysis seems warranted.

The magnitude of effects of forest harvest on peak flows in the Pacific Northwest, as represented by the data reported here, are relatively minor in comparison to other anthropogenic changes to streams and watersheds. In particular, the effects of dams on hydrologic regimes, including peak flows, can be several orders of magnitude greater, particularly where the dams are large and used for flood control (Grant, 1997). Urbanization similarly imposes much larger changes to peak flows than does forest harvest, although less than dams. For example, moderate amounts of urbanization in watersheds located in Puget Sound increased peak flows by factors of 1.5 to 2.75, with corresponding and measurable effects on channel incision and geometry (Moscrip and Montgomery, 1997; Booth and Henshaw, 2001).

Concerning the effects of forest harvest on the largest floods, Jones and Grant (2001, p. 177) note that the peak flow issue "... cannot be resolved with statistics based on a mere handful of extreme flood events. Future physical process based modeling and field studies will improve our understanding of forest harvest effects on these rare big floods...". Ultimately the best way forward towards understanding effects of management on large peak flow events will be to illuminate the black box of forested watersheds in Oregon and the Pacific Northwest with new field-based experimental work in order to understand flow pathways, residence times, and stream sources. Given the extreme expense and difficulty in mounting such campaigns, modeling studies provide a key way to move beyond a singular focus on paired watershed studies (and purely statistical analysis of flow data) to seek new ways of quantifying forest harvesting and road construction influences on peak flows, particularly at the extremes of the flow frequency distribution.

The change detection modeling approach (Kundzewicz and Robinson, 2004) is one way to deal with the many of the datasets where controversy lingers, and new sites where controversy will undoubtedly rage. This is a very straightforward use of a model (Kuczura, 1987), but surprisingly has had little use in interpreting peak flow issues. Seibert and McDonnell (in press) recently worked with the HJ Andrews dataset and examined how a simple conceptual precipitation-runoff model could be used to quantify change. This modeling approach is a possible useful alternative to the paired catchment approach to evaluate the effects of a land-use or land-cover change. The approach is especially useful in cases where a suitable control catchment does not exist, which is often the case for larger catchments.

Utilizing the data from decades worth of small watershed studies, we have attempted to constrain the problem of peak flow increases and likely geomorphic effects on channel systems. Although such data are incomplete, subject to interpretation, and particularly problematic for interpreting modern practices, they do provide a sound basis for setting boundaries on the likely magnitudes and directions of change. In setting these limits we recognize the importance of site level information and risk assessment that can only be provided by the on-the-ground manager and specialist. Future work incorporating new field experiments supplemented by modeling is necessary to close some of the gaps. This analysis provides forest managers and regulators with the information needed to proceed with some measure of confidence while these newer studies take root.

IN REVIEW

ACKNOWLEDGMENTS

This research was funded by a Pacific Northwest Cooperative Ecosystems Studies Cooperative Agreement between the USDI Bureau of Land Management and Oregon State University. Supporting funds were also provided by the USDA Forest Service Pacific Northwest Research Station and its Focused Science Delivery Program. Feedback from workshop participants and reviewers of early drafts was intergral to the success of the synthesis. Participants in the managers workshop (December 2005) included Deigh Bates, Liz Berger, Robert Beschta, Steve Burns, Dan Carpenter, Bengt Coffin, Duane Dippon, Lowell Duell, Dave Halemeier, Steve Hofford, Bill Hudson, Sherri Johnson, Mikeal Jones, Dave Kretzing, Laurie Lindell, Joe Moreau, Chester Novak, Dave Squyres, Kris Ward, and Chuck Wheeler. Participants in the science workshop (March 2006) were Younes Alila, Tim Beechie, George Ice, Sherri Johnson, Julia Jones, and Charlie Luce. Participation in a workshop does not imply endorsement of this manuscript. Comments on early drafts were also provided by Margaret Beilharz, Caty Clifton, Terry Cundy, Denise Dammann, Jim Fogg, Dan Moore, Jami Nettles, Maryanne Reiter, Bob Ruediger, and Dave Smith. The final manuscript was greatly improved by discussions with Chester Novak and Chris Sheridan.

IN REVIEW

ENGLISH EQUIVALENTS

When you know:	Multiply by:	To find:
Meters (m)	3.28	Feet
Hectares (ha)	2.47	Acres
Square kilometers (km ²)	0.386	Square miles
Cubic meters per second (m ³ /s)	35.31	Cubic feet per second

IN REVIEW

LITERATURE CITED

- Andrews, E.D. 1983.** Entrainment of gravel from naturally sorted riverbed material. *Geological Society of America Bulletin*. 94(10): 1225-1231.
- Andrews, E.D. 1984.** Bed-material entrainment and hydraulic geometry of gravel-bed rivers in Colorado. *Bulletin of the Geological Society of America*. 95: 371–378.
- Archer, D.R. 1989.** Flood wave attenuation due to channel and floodplain storage and effects on flood frequency. In: Beven, K.; Carling, P., eds. *Floods: hydrological, sedimentological, and geomorphological implications*. Chichester, England: John Wiley & Sons: 37-46.
- Berris, S.N.; Harr, R.D. 1987.** Comparative snow accumulation and melt during rainfall in forested and clear-cut plots in the western Cascades of Oregon. *Water Resources Research*. 23(1): 135-142.
- Beschta, R.L.; Pyles, M.R.; Skaugset, A.E.; Surfleet, C.G. 2000.** Peak flow responses to forest practices in the western cascades of Oregon, USA. *Journal of Hydrology*. 233: 102-120.
- Booth, D.B.; Henshaw, P.C. 2001.** Rates of channel erosion in small urban streams. In: Wigmosta, W.; Burges, S., eds. *Land use and watersheds: human influence on hydrology and geomorphology in urban and forest areas*. Water Science and Application Series Vol. 2. Washington, DC: American Geophysical Union: 17-38.
- Bowling, L.C.; Lettenmaier, D.P. 1997.** Evaluation of the effects of forest roads on streamflow in Hard and Ware Creeks, Washington. *Water Resources Series Tech. Rep.* 155. Seattle, WA: University of Washington. 189 p.
- Bowling, L.C.; Lettenmaier, D.P. 2001.** The effects of forest roads and harvest on catchment hydrology in a mountainous maritime environment. In: Wigmosta, W.; Burges, S., eds. *Land use and watersheds: human influence on hydrology and geomorphology in urban and forest areas*. Water Science and Application Series Vol. 2. Washington, DC: American Geophysical Union: 145-164.
- Bowling, L.C.; Storck, P.; Lettenmaier, D.P. 2000.** Hydrologic effects of logging in western Washington, United States. *Water Resources Research*. 36(11): 3223-3240.
- Buffington, J.M.; Montgomery, D.R. 1997.** A systematic analysis of eight decades of incipient motion studies, with special reference to gravel-bedded rivers. *Water Resources Research*. 33: 1993–2029.
- Cheng, J.D.; Black, T.A.; de Vries, J. [et al.]. 1975.** The evaluation of initial changes in peak streamflow following logging of a watershed on the west coast of Canada. In: *The hydrological characteristics of river basins: Proceedings of a symposium*. IAHS Publ.

117. [Place of publication unknown]: International Association of Hydrological Sciences: 475-486.

Cheng, J. D. 1989. Streamflow Changes After Clear-Cut Logging of a Pine Beetle-Infested Watershed in Southern British Columbia, Canada. *Water Resources Research* 25: 449-456.

Christner, J.; Harr, R.D. 1982. Peak streamflows from the transient snow zone, western Cascades, Oregon. In: *Proceedings of the 50th western snow conference*. Fort Collins, CO: Colorado State University Press: 27-38.

Church, M.; Eaton, B. 2001. Hydrological effects of forest harvest in the Pacific Northwest. Tech. Rep. 3. Vancouver, BC: University of British Columbia. 55 p.

Coe, D. 2004. The hydrologic impacts of roads at varying spatial and temporal scales: a review of published literature as of April 2004. Bellingham, WA: Nooksack Indian Tribe. 30 p. Prepared for: Upland Processes Science Advisory Group of the Committee for Cooperative Monitoring, Evaluation, and Research (CMER).

Connelly, B.A.; Cundy, T.W. 1992. Cumulative effects of forest management on peak streamflows during rain-on-snow events. In: Jones, Mikeal E.; Laenen, Antonius, eds. *Interdisciplinary approaches in hydrology and hydrogeology*. [Place of publication unknown]: American Institute of Hydrology: 470-484.

Darby, S.E. 1999. Modeling Effect of Riparian Vegetation on Flow Resistance and Flood Potential. *Journal of Hydraulic Engineering* 125(5): 443-454.

Duncan, S.H. 1986. Peak stream discharge during thirty years of sustained yield timber management in two fifth order watersheds in Washington State. *Northwest Science*. 60(4): 258-264.

Food and Agriculture Organization of the United Nations [FAO]. 2005. Forests and floods: Drowning in fiction or thriving on facts? RAP Publ. 2005/3, *Forest Perspectives* 2. Bangkok: Center for International Forestry Research; Food and Agriculture Organization of the United Nations. 30 p.

Faustini, J.M. 2000. Stream channel response to peak flows in a fifth-order mountain watershed. Corvallis, OR: Oregon State University. 339 p. Ph.D. dissertation.

Fowler, W.B.; Helvey, J.D.; Felix, E.N. 1987. Hydrologic and climatic changes in three small watersheds after timber harvest. Res. Pap. PNW-RP-379. Portland, OR: U.S. Department of Agriculture, Forest Service, Pacific Northwest Research Station. 13 p.

Garbrecht, J. 1991. Effects of spatial accumulation of runoff on watershed response. *Journal of Environmental Quality*. 20: 31-35.

Golding, D.L. 1987. Changes in streamflow peaks following timber harvest of a coastal British Columbia watershed. In: Swanson, R.H.; Bernier, P.Y.; Woodard, P.D., eds. Forest hydrology and watershed management: Proceedings of an international symposium. IAHS Publ. 167. Wallingford, Oxfordshire, United Kingdom: International Association of Hydrological Sciences: 509-517.

Grant, G.E. 1987. Assessing the effects of peak flow increases on stream channels--a rational approach. In: Proceedings of the California Watershed Management Conference. Wildlands Resources Center Rep. 11. Berkeley, CA: University of California: 142-149.

Grant, G. 1988. The RAPID technique: a new method for evaluating downstream effects of forest practices on riparian zones. Gen. Tech. Rep. PNW-GTR-220. Portland, OR: U.S. Department of Agriculture, Forest Service, Pacific Northwest Research Station. 36 p.

Grant, G.E. 1997. A geomorphic basis for interpreting the hydrologic behavior of large river basins. In: Laenan, A.; Dunnette, D.A., eds. River quality: dynamics and restoration. Boca Raton, FL: CRC Press: 105-116.

Grant, G.E.; Swanson, F.J. 1995. Morphology and processes of valley floors in mountain streams, Western Cascades, Oregon. In: Costa, J.E.; Miller, A.J.; Potter, K.W.; Wilcock, P.R. eds. Natural and Anthropogenic Influences in Fluvial Geomorphology: The Wolman Volume. Geophysical Monograph No. 89. Washington, DC: American Geophysical Union: 83-101.

Grant, G.E.; Swanson, F.J.; Wolman, M.G. 1990. Pattern and origin of stepped-bed morphology in high-gradient streams, western Cascades, Oregon. Geological Society of America Bulletin. 102(3): 340-352.

Guillemette, F.; Plamondon, A.P.; Prevost, M.; Levesque, D. 2005. Rainfall generated stormflow response to clearcutting a boreal forest: peak flow comparison with 50 world-wide basin studies. Journal of Hydrology. 302: 137-153.

Harr, R.D. 1976. Hydrology of small forest streams in western Oregon. Gen. Tech. Rep. PNW-55. Portland, OR: U.S. Department of Agriculture, Forest Service, Pacific Northwest Forest and Range Experiment Station. 15 p.

Harr, R.D. 1980. Streamflow after patch logging in small drainages within the Bull Run Municipal Watershed, Oregon. Res. Pap. PNW-268. Portland, OR: U.S. Department of Agriculture, Forest Service, Pacific Northwest Forest and Range Experiment Station. 16 p.

Harr, R.D. 1982. Fog drip in the Bull Run Municipal Watershed, Oregon. Water Resources Bulletin. 18(5): 785-789.

Harr, R.D. 1986. Effects of clearcutting on rain-on-snow runoff in western Oregon: a new look at old studies. *Water Resources Research*. 22: 383-392.

Harr, R.D.; Coffin, B.A. 1992. Influence of timber harvest on rain-on-snow runoff: a mechanism for cumulative watershed effects. In: Jones, M.E.; Laenen, A., eds. *Interdisciplinary approaches in hydrology and hydrogeology*. [Place of publication unknown]: American Institute of Hydrology: 455-469.

Harr, R.D.; Fredriksen, R.L.; Rothacher, J. 1979. Changes in streamflow following timber harvest in southwestern Oregon. Res. Pap. PNW-249. Portland, OR: U.S. Department of Agriculture, Forest Service, Pacific Northwest Forest and Range Experiment Station. 22 p.

Harr, R.D.; Harper, W.C.; Krygier, J.T.; Hsieh, F.S. 1975. Changes in storm hydrographs after road building and clear-cutting in the Oregon Coast Range. *Water Resources Research*. 11(3): 436-444.

Harr, R.D.; Levno, A.; Mersereau, R. 1982. Streamflow changes after logging 130-year-old Douglas-fir in two small watersheds. *Water Resources Research*. 18(3): 637-644.

Harr, R.D.; McCorison, F.M. 1979. Initial effects of clearcut logging on size and timing of peak flows in a small watershed in western Oregon. *Water Resources Research*. 15(1): 90-94.

Harris, D.D. 1977. Hydrologic changes after logging in two small Oregon coastal watersheds. *Water Supply Paper 2037*. Washington, DC: U.S. Geological Survey. 31 p.

Hetherington, E.D. 1982. A first look at logging effects on the hydrologic regime of Carnation Creek experimental watershed. In: Hartmann, G.F., ed. *Proceedings of the Carnation Creek workshop: a 10 year review*. Nanaimo, BC: Pacific Biological Station: 45-62.

Hicks, D.M.; Gomez, B. 2003. Sediment transport. In: Kondolf, G.M.; Piegay, H., eds. *Tools in fluvial geomorphology*. Chichester, United Kingdom: John Wiley & Sons: 425-461.

Hudson, R. 2001. Roberts Creek Study Forest: preliminary effects of partial harvesting on peak streamflow in two S6 creeks. Extension Note EN-007. Nanaimo, BC: British Columbia Forest Service, Vancouver Forest Region. 9 p.

Ice, G.G.; Adams, P.W.; Beschta, R.L. [et al.]. 2004. Forest management to meet water quality and fisheries objectives: watershed studies and assessment tools in the Pacific Northwest. In: Ice, G.G.; Stednick, J.D., eds. *A century of forest and wildland watershed lessons*. Bethesda, MD: Society of American Foresters: 239-261.

- Johnson, S.L.; Swanson F.J.; Grant, G.E.; Wondzell S.M. 2000.** Riparian forest disturbances by a mountain flood – the influence of floated wood. *Hydrological Processes* 47: 3031–3050.
- Jones, J.A. 2000.** Hydrologic processes and peak discharge response to forest removal, regrowth, and roads in 10 small experimental basins, western Cascades, Oregon. *Water Resources Research*. 36(9): 2621-2642.
- Jones, J.A. 2005.** Intersite comparisons of rainfall-runoff processes. In: Anderson, M.G., ed. *Encyclopedia of hydrological sciences*. Chichester, United Kingdom: John Wiley & Sons: 1839-1854.
- Jones, J.A.; Grant, G.E. 1996.** Peak flow responses to clear-cutting and roads in small and large basins, western Cascades, Oregon. *Water Resources Research*. 32: 959-974.
- Jones, J.A.; Grant, G.E. 2001.** Comment on “Peak flow responses to clear-cutting and roads in small and large basins, western Cascades, Oregon.” *Water Resources Research*. 37(1): 179-180.
- King, J.G. 1989.** Streamflow responses to road building and harvesting: a comparison with the equivalent clearcut area procedure. Res. Pap. RP-INT-401. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Research Station. 13 p.
- Kuczera, G. 1987.** Prediction of water yield reductions following a bushfire in ash-mixed species eucalypt forest. *Journal of Hydrology*. 94: 215-236.
- Kundzewicz, Z.W.; Robson, A.J. 2004.** Change detection in hydrological records – a review of the methodology. *Hydrological Sciences Journal*. 49(1): 7-19.
- Lamarche, J.; Lettenmaier, D.P. 2001.** Effects of forest roads on flood flows in the Deschutes River basin, Washington. *Earth Surface Processes and Landforms*. 26(2): 115-134.
- Leopold, L.B. 1980.** Techniques and interpretation: the sediment studies of G.K. Gilbert. Special Pap. 183. Geological Society of America: 125-128.
- Lewis, J.; Mori, S.R.; Keppeler, E.T.; Ziemer, R.R. 2001.** Impacts of logging on storm peak flows, flow volumes and suspended sediment loads in Caspar Creek, California. In: Wigmosta, M.S.; Burges, S.J., eds. *Land use and watersheds: human influence on hydrology and geomorphology in urban and forest areas*. Water Science and Application Vol. 2. Washington, DC: American Geophysical Union: 85-125.
- Luce, C.H. 2002.** Hydrological processes and pathways affected by forest roads: What do we still need to learn? *Hydrological Processes*. 16(14): 2901-2904.

Lyons, J.K.; Beschta, R.L. 1983. Land use, floods, and channel changes: Upper Middle Fork Willamette River, Oregon (1936-1980). *Water Resources Research*. 19(2): 463-471.

Montgomery, D.R.; Buffington, J.M. 1997. Channel-reach morphology in mountain drainage basins. *Geological Society of America Bulletin*. 109(5): 596-611.

Moore, R.D.; Scott, D.F. 2005. Camp Creek revisited: Streamflow changes following salvage harvesting in a medium-sized, snowmelt-dominated catchment. *Canadian Water Resources Journal*. 30: 331-344.

Moore, R.D.; Wondzell, S.M. 2005. Physical hydrology and the effects of forest harvesting in the Pacific Northwest: a review. *Journal of the American Water Resources Association*. 41(4): 763-784.

Moscrip, A.L.; Montgomery, D.R. 1997. Urbanization, flood frequency, and salmon abundance in Puget Lowland streams. *Journal of the American Water Resources Association*. 33: 1289-1297.

Nolin, A.W.; Daly, C. 2006. Mapping “at risk” snow in the Pacific Northwest. *Journal of Hydrometeorology*. 7(5): 1164-1171.

Reeves, G.H.; Williams, J.E.; Burnett, K.M.; Gallo, K. 2006. The Aquatic Conservation Strategy of the Northwest Forest Plan. *Conservation Biology* 20(2): 319–329.

Reid, L.M. 1993. Research and cumulative watershed effects. Gen. Tech. Rep. PSW-GTR-141. Albany, CA: U.S. Department of Agriculture, Forest Service, Pacific Southwest Research Station. 118 p.

Reid, L.M.; Lewis, J. 2007. Rates and implications of rainfall interception in a coastal Redwood forest. In: Standiford, R.B.; Giusti, G.A.; Valachovic, Y.; Zielinski, W.J.; Furniss, M.J., technical editors. *Proceedings of the redwood region forest science symposium: What does the future hold?* Gen. Tech. Rep. PSW-GTR-194. Albany, CA: Pacific Southwest Research Station, Forest Service, U.S. Department of Agriculture.

Rivenbark, B.L.; Jackson, C.R. 2004. Concentrated flow breakthroughs moving through silvicultural streamside management zones: Southeastern piedmont, USA. *Journal of the American Water Resources Association* 40(4): 1043-1052.

Rogers K.; Biggs, H. 1999. Integrating indicators, endpoints and value systems in strategic management of the rivers of the Kruger National Park. *Freshwater Biology*. 41: 439–51.

Rosgen, D. 1996. *Applied river morphology*. Pagosa Springs, CO: Wildland Hydrology. 390 p.

- Rosgen, D.L. 2006.** A watershed assessment for river stability and sediment supply (WARSSS). Fort Collins, CO: Wildland Hydrology Books. [Paged unknown].
- Rothacher, J. 1973.** Does harvest in west slope Douglas-fir increase peak flow in small forest streams? Res. Pap. PNW-163. Portland, OR: U.S. Department of Agriculture, Forest Service, Pacific Northwest Forest and Range Experiment Station. 13 p.
- Sauer, V.B.; Meyer, R.W. 1992.** Determination of error in individual discharge measurements. Open-File Rep. 92-144. Denver, CO: U.S. Geological Survey: 4-7.
- Schnorbus, M.; Alila, Y. 2004.** Forest harvesting impacts on the peak flow regime in the Columbia Mountains of southeastern British Columbia: an investigation using long-term numerical modeling. *Water Resources Research*. 40, W05205, doi:10.1029/2003WR002918.
- Seibert, J.; McDonnell, J.J. [in press].** Peak flow responses to clear-cutting and roads in small and large basins: a change detection modeling approach. *Water Resources Research*.
- Shaman, J.; Stieglitz, M.; Burns, D. 2004.** Are big basins just the sum of small catchments? *Hydrological Processes*. 18: 3195–3206.
- Singh, V.P. 1997.** Effect of spatial and temporal variability in rainfall and watershed characteristics on stream flow hydrograph. *Hydrological Processes*. 11(12): 1649-1669.
- Storck, P.; Bowling, L.; Wetherbee, P.; Lettenmaier, D. 1998.** Application of a GIS-based distributed hydrology model for prediction of forest harvest effects on peak stream flow in the Pacific Northwest. *Hydrological Processes*. 12: 889-904.
- Storck, P.; Lettenmaier, D.P.; Bolton, S.M. 2002.** Measurement of snow interception and canopy effects on snow accumulation and melt in a mountainous maritime climate, Oregon, United States. *Water Resources Research*. 38(11): 1223, doi:10.1029/2002WR001281.
- Tague, C.; Band, L. 2001.** Evaluating explicit and implicit routing for watershed hydro-ecological models of forest hydrology at the small catchment scale. *Hydrological Processes*. 15(8): 1415 - 1439.
- Tague, C.; Grant, G.E. 2004.** A geological framework for interpreting the low flow regimes of Cascade streams, Willamette River Basin, Oregon. *Water Resources Research*. 40, W04303, doi:10.1029/2003WR002629.
- Tague, C.; Farrell, M.; Grant, G. [et al.]. [In press].** Hydrogeologic controls on summer stream temperatures in the McKenzie River basin, Oregon. *Hydrological Processes*.

Tal, M.; Gran, K.; Murray, A.B.; Paola, C.; Hicks, D.M. 2004. Riparian vegetation as a primary control on channel characteristics in multi-thread rivers. In: Bennett, S. J.; Simon, A., eds. Riparian Vegetation and Fluvial Geomorphology. Water Science and Application Vol. 8. Washington, DC: American Geophysical Union: 43– 58, AGU, Washington, D. C.

Talbot, J.; Plamondon, A.P. 2002. The diminution of snowmelt rate with forest regrowth as an index of peak flow hydrologic recovery, Montmorency Forest, Quebec. In: Proceedings of the 59th annual Eastern Snow Conference. [Place of publication unknown]: [Publisher unknown]: 85–91.

Thomas, R.B.; Megahan, W.F. 1998. Peak flow responses to clear-cutting and roads in small and large basins, western Cascades, Oregon: a second opinion. *Water Resources Research*. 34(12): 3393-3403.

Thomas, R.B.; Megahan, W.F. 2001. Reply to comment on “Peak flow responses to clear-cutting and roads in small and large basins, western Cascades, Oregon.” *Water Resources Research*. 37(1): 180-183.

Troendle, C.A.; King, R.M. 1985. The effect of timber harvest on the Fool Creek watershed, 30 years later. *Water Resources Research*. 21: 1915-1922.

Troendle, C.A.; King, R.M. 1987. The effect of partial and clearcutting on streamflow at Deadhorse Creek, Colorado. *Journal of Hydrology*. 90: 145-157.

Tuchmann, E.T.; Connaughton, K.P.; Freedman, L.E.; Moriwaki, C.B. 1996. The Northwest Forest Plan: a report to the President and Congress. Washington, DC: U.S. Department of Agriculture, Office of Forestry and Economic Assistance. 253 p.

Van Haveren, B.P. 1988. A reevaluation of the Wagon Wheel Gap forest watershed experiment. *Forest Science*. 34: 208-214.

Wemple, B.C ; Jones, J.A. 2003. Runoff production on forest roads in a steep, mountain catchment. *Water Resources Research*. 39(8): 1220, doi:10.1029/2002WR001744.

Wemple, B.C.; Jones, J.A.; Grant, G.E. 1996. Channel network extension by logging roads in two basins, western Cascades, Oregon. *Water Resources Bulletin*. 32: 1195-1207.

Whitaker, A.; Alila, Y.; Beckers, J.; Toews, D. 2002. Evaluating peak flow sensitivity to clear-cutting in different elevation bands of a snowmelt-dominated mountainous catchment. *Water Resources Research*. 38(9): 1172, doi:10.1029/2001WR000514.

Winkler, R.D.; Spittlehouse, D.L.; Golding, D.L. 2005. Measured differences in snow accumulation and melt among clear-cut, juvenile, and mature forests in southern British Columbia. *Hydrological Processes*. 19: 51-62.

Winter, T.C. 2001. The concept of hydrologic landscapes. *Journal of the American Water Resources Association*. 37(2): 335-349.

Wohl, E. 2000. Mountain rivers. *Water Resources Monograph Series*, Vol. 14. Washington, DC: American Geophysical Union. 320 p.

Wolock, D.M.; Winter, T.C.; McMahon, G. 2004. Delineation and evaluation of hydrologic-landscape regions in the United States using geographic information system tools and multivariate statistical analyses. *Environmental Management*. 34: S71-S88.

Woltemade C.J.; Potter, K.W. 1994. A watershed modeling analysis of fluvial geomorphologic influences on flood peak attenuation. *Water Resources Research*. 30(6): 1933-1942.

Wright, K.A.; Sendek K.H.; Rice, R.M.; Thomas, R.B. 1990. Logging effects on streamflow: storm runoff at Caspar Creek in northwestern California. *Water Resources Research*. 26(7): 1657-1667.

Ziemer, R.R. 1981. Storm flow response to road building and partial cutting in small streams of northern California. *Water Resources Research*. 17(4): 907-917.

Ziemer, R.R., tech. coord. 1998. Proceedings of the conference on coastal watersheds: the Caspar Creek story; 6 May 1998; Ukiah, CA. Gen. Tech. Rep. PSW-GTR-168. Albany, CA: U.S. Department of Agriculture, Forest Service, Pacific Southwest Research Station. 149 p.

Ziemer, R.R.; Lisle, T.E. 1998. Chapter 3. Hydrology. In: Naiman, R.J.; Bilby, R.E., eds. *River ecology and management: lessons from the Pacific Coastal Ecoregion*. New York: Springer-Verlag: 43-68.

APPENDIX 1: ADDITIONAL RESOURCES

- Alila, Y. and Beckers J. 2001. Using numerical modelling to address hydrologic forest management issues in British Columbia. *Hydrological Processes* 15(18): 3371-3387.
- Austin, S. A. 1999. Streamflow response to forest management: a meta-analysis using published data and flow duration curves. Fort Collins, CO: Colorado State University. 121p. M.S thesis.
- Beckers, J.; Y. Alila Y. 2004. A model of rapid preferential hillslope runoff contributions to peak flow generation in a temperate rain forest watershed. *Water Resources Research* 40(3).
- Brown, G. W. 1972. The Alsea Watershed Study. Pacific Logging Congress. *Loggers Handbook*, Vol. 32.
- Buttle, J. M., I. F. Creed, et al. 2005. Advances in Canadian forest hydrology, 1999-2003. *Hydrological Processes* 19(1): 169-200.
- Christner, J. 1981. Changes in Peak Streamflows from Managed Areas of the Willamette National Forest. Portland, Oregon, USDA Forest Service, Pacific Northwest Region, Willamette National Forest: 28 p.
- Cosandey, C., V. Andreassian, et al. 2005. The hydrological impact of the mediterranean forest: a review of French research. *Journal of Hydrology* 301: 235-249.
- DeWalle, D. R. 2003. Forest hydrology revisited. *Hydrological Processes* 17(6): 1255-1256.
- Harr, R. D. 1976. Forest Practices and Streamflow in Western Oregon. Gen. Tech. Report PNW-49. Portland, Oregon, USDA Forest Service, Pacific Northwest Research Station.
- Harr, R. D. 1983. Potential for augmenting water yield through forest practices in western Washington and western Oregon. *Water Resources Bulletin* 19(3): 383-394.
- Harr, R. D.; Cundy, T.W. 1992. The November 1990 Floods in Western Washington, U.S.A. INTERPRAEVENT 1992, Bern.
- Hetherington, E. D. 1987. Hydrology and logging in the Carnation Creek watershed - what have we learned? Proceedings of the Workshop: Applying 15 Years of Carnation Creek Results. T. W. Chamberlin. Nanaimo, B.C., Carnation Creek Steering Committee, Pacific Biological Station: 11-15.
- Hetherington, E. D. 1998. Watershed Hydrology. In: Carnation Creek and Queen Charlotte Islands Fish/Forestry Workshop: Applying 20 Years of Coast Research to Management Solutions. P. Dan L. Hogan, J. Tschaplinski, Stephen Chatwin eds. Nanaimo, B.C., B.C. Ministry of Forests Research Branch: p 333-340.
- Jackson, W. L.; Haveren B.P. 1984. Rainfall-Runoff Prediction and the Effects of Logging: The Oregon Coast Range. Denver, Colorado 80225, USDI Bureau of Land Management Denver Service Center.

- Jones, J. A.; Post D.A. 2004. Seasonal and successional streamflow response to forest cutting and regrowth in the northwest and eastern United States. *Water Resources Research* W05203, doi:10.1029/2003WR002952.
- Jones, J. A.; Swanson, F.J. 2001. Hydrologic inferences from comparisons among small basin experiments. *Hydrological Processes* 15(12): 2363-2366.
- Keppeler, E. 2007. Effects of Timber Harvest on Fog Drip and Streamflow, Caspar Creek Experimental Watersheds, Mendocino County, California. In: Standiford, R.B.; Giusti, G.A.; Valachovic, Y.; Zielinski, W.J.; Furniss, M.J., technical editors. *Proceedings of the redwood region forest science symposium: What does the future hold?* Gen. Tech. Rep. PSW-GTR-194. Albany, CA: Pacific Southwest Research Station, Forest Service, U.S. Department of Agriculture.
- LaMarche, J.; Lettenmaier D.P. 1998. Forest road effects on flood flows in the Deschutes River basin, Washington. *Earth Surface Processes and Landforms*. 26(2): 115-134.
- Lewis, J.; Keppeler, E. 2007. Trends in Streamflow and Suspended Sediment After Logging, North Fork Caspar Creek. In: Standiford, R.B.; Giusti, G.A.; Valachovic, Y.; Zielinski, W.J.; Furniss, M.J., technical editors. *Proceedings of the redwood region forest science symposium: What does the future hold?* Gen. Tech. Rep. PSW-GTR-194. Albany, CA: Pacific Southwest Research Station, Forest Service, U.S. Department of Agriculture.
- Luce, C. H.; Wemple, B.C. 2001. Introduction to special issue on hydrologic and geomorphic effects of forest roads. *Earth Surface Processes and Landforms* 26(2): 111-113.
- MacDonald, L. H.; Hoffman J.A. 1995. Causes of Peak Flows in Northwestern Montana and Northeastern Idaho. *Journal of the American Water Resources Association*. 31(1): 79-95.
- Megahan, W. F.; J. Hornbeck J. 2000. Lessons learned in watershed management: a retrospective view. In: *Land Stewardship in the 21st Century: The Contributions of Watershed Management*; 2000 March 13-16; Tucson, AZ. Folliott, P.F.; Baker Jr., M.B.; Edminster, C.B.; Dillon, M.C.; Mora, K.L., tech. coords. Proc. RMRS-P-13. Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station.
- Post, D. A.; Jones, J.A. 2001. Hydrologic regimes of forested, mountainous, headwater basins in New Hampshire, North Carolina, Oregon, and Puerto Rico. *Advances in Water Resources* 24(9-10): 1195-1210.
- Rothacher, J. 1965. Streamflow from small watersheds on the western slope of the Cascade Range of Oregon. *Water Resources Research* 1(1): 125-134.
- Scherer, R.; Pike, R.G. 2003. Management Activities and streamflow in the Okanagan Basin: Outcomes of a Literature Review and a Workshop. FORREX, Kamloops, BC. FORREX series 9.
- Stanley, B.; Arp P.A. 2002. Effects of forest harvesting on basin-wide water yield in relation of percent of watershed cut: A review of literature. Fredericton, NB, Nexfor/Bowater Forest Watershed Research Centre; University of New Brunswick: 35.

Storck, P., 2000. Trees, Snow and Flooding: An Investigation of Forest Canopy Effects on Snow Accumulation and Melt at the Plot and Watershed Scales in the Pacific Northwest. Water Resources Series Technical Report 161, University of Washington, Seattle.

Storck, P., Lettenmaier, D.P. et al. 1995. Implications of Forest Practices on Downstream Flooding: Phase II Final Report. Seattle. Washington, Washington Forest Protection Association: 94 p.

Thyer, M., Beckers, J., et al. 2004. Diagnosing a distributed hydrologic model for two high-elevation forested catchments based on detailed stand- and basin-scale data. Water Resources Research. W01103, doi:10.1029/2003WR002414.

Troendle, C. A. 1987. Effect of clearcutting on streamflow generating processes from a subalpine forest. IAHS-AISH #167.

Waichler, S. R., Wemple, B.C., et al. 2005. Simulation of water balance and forest treatment effects at the H.J. Andrews Experimental Forest. Hydrological Processes 19: 3177-3199.

Wright, K. A., Sendek, K., et al. 1990. Logging Effects on Streamflow: Storm Runoff at Caspar Creek in Northwestern California. Water Resources Research 26(7): 1657-1667.

APPENDIX 2: WATERSHED DATA TABLES

Table 5 - HJ Andrews Experimental Forest

HJA 3, 1.01km², patchcut 30%, 6% roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest						
			cms/km ²	RI (yrs)			all	T	5	10	15	20	25
Jones & Grant, 1996	*Analysis of variance on log-transformed peaks	all	0.03	na	25	increase	11	28	22	17	14	14	
		fall	0.03	na	25	increase	7	30	23	12	15	5	
		winter	0.03	na	25	increase	8	23	22	21	16	23	
		spring	0.03	na	25	increase	5	42	25	23	7	15	
		small	0.03	<0.125	25	increase	4	36	27	16	15	12	
		large	0.35	0.4	25	increase	6	23	22	13	13	15	
#Thomas & Megahan, 1998	*Linear regression of log-transformed peaks	small	0.03	<0.125	25	increase		39	23				
		sm-med	0.11	0.125	25	increase		22	18				
		med-large	0.21	0.2	25	increase		17	17				
		large	0.35	0.4	25	increase		16	16				
Beschta et al, 2000	*Linear regression of log-transformed peaks	large	0.35	0.4	25	increase+	24						
		large	0.65	1	25	increase+	13						
		large	1.00	5	25	increase+	6						
Jones, 2000	Analysis of variance on log-transformed peaks	all	0.03	na	33	increase	8		19		14		10
		small, fall	0.03	na	33	increase	15		31		21		12
		small, spring	0.03	na	33	nsc	9		22		8		10
		rain	0.03	na	33	nsc	10						
		mixed	0.03	na	33	nsc	22						
		rain-on-snow	0.03	na	33	increase	26						
		large	0.65	>1	33	increase	16						

*used same dataset

all values statistically significant at 0.05, except ^ at 0.1, and +where nr

values estimated from table 3a

bold indicates values graphed in Figure 5.

WATERSHED 10, 0.1km2, clearcut 100%, no roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest					notes	
			cms/km ²	RI (yrs)			all	T	5	10	15		20
Harr & McCorison, 1979	Linear regression of peaks	all	0.22	na	1	decrease	-32						
Harr, 1986	Linear regression of peaks	all ROS	0.55	na	16	nsc	nr						
Jones, 2000	Analysis of variance on log-transformed peaks	all	0.03	na	22	increase			25		26		
		large	0.65	1	22	nsc	-8						

WATERSHED 6, 0.13km2, 100% clearcut, 9% roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest					notes	
			cms/km ²	RI (yrs)			all	T	5	10	15		20
Harr et al., 1982	Linear regression of peaks		0.45	1	6	nsc	nr						
Jones, 2000	Analysis of variance on log-transformed peaks	all	0.03	na	23	increase			37		20		
		large	0.65	1	23	increase	16						

WATERSHED 7, 0.15km2, shelterwood 60% in 1974, remaining 40% in 1984, no roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest					notes	
			cms/km ²	RI (yrs)			all	T	5	10	15		20
Harr et al., 1982	Linear regression of peaks		0.45	1	6	nsc	nr						analysis performed prior to second treatment, 60%
Jones, 2000	Analysis of variance on log-transformed peaks	all	0.03	na	12	increase			25	36			
		large	0.65	1	12	increase	27						

Table 6 - Fox Creek, Bull Run

FOX 1, .59km2, small patches 25%, 1% roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest					notes	
			cms/km ²	RI (yrs)			all	T	5	10	15		20
Harr, 1980	Linear regression of peaks	all	0.56	1	nr	nsc	0						
		all	nr	na	20	increase			12		5		
Jones, 2000	Analysis of variance on log-transformed peaks	small, fall	nr	0.28	20	nsc			7		12		
		small, spring	nr	0.28	20	nsc			22		-5		
		large	nr	1	20	increase	13						

FOX 3, 0.71km2, large patches 25%, 1% roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest					notes	
			cms/km ²	RI (yrs)			all	T	5	10	15		20
Harr, 1980	Linear regression of peaks	all	0.56	1	nr	nsc	0						
		all	nr	na	20	nsc			1		2		
Jones, 2000	Analysis of variance on log-transformed peaks	small, fall	nr	0.28	20	nsc			2		8		
		small, spring	nr	0.28	20	nsc			4		-8		
		large	nr	1	20	inc	13						

Table 7 - Malcolm Knapp Experimental Forest

Malcom Knapp, W1 .23km2, clearcut 71%

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	%	notes
			cms/km ²	RI (yrs)				
Cheng et al., 1975	Linear regression of peaks	all	nr	nr	2	decrease	-22	mean of values show NSC, assume large values are also NSC

Table – 8 Coyote Creek Experimental Watershed

COYOTE 1, .69km2, shelterwood, 50% in 1971. 1.6% roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest					
			cms/km ²	RI (yrs)			all	T	5	10	15	20
Harr et al., 1979	Linear regression of peaks	large	0.22	9	5	increase	47	47				
		all	nr	na	12	increase	36	42				
Jones, 2000	Analysis of variance on log-transformed peaks	small, fall	nr	0.24	12	increase	73	63				
		small, spring	nr	0.24	12	nsc	17	15				
		large	nr	1	12	nsc	10					
			0.19	1.1	5	nr	6					
Moore and Wondzell, 2005	Estimated from Harr et al., 1979 regression relationships	large	0.35	1.5	5	nr	25					
			0.45	2	5	nr	32					
			0.87	5	5	nr	44					
			1.23	10	5	nr	48					

COYOTE 2, .68 patchcut 30%, 1.7% roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest					
			cms/km ²	RI (yrs)			all	T	5	10	15	20
Harr et al., 1979	Linear regression of peaks	large	0.22	9	5	increase	10	10				
		all	nr	na	12	increase	32	40				
Jones, 2000	Analysis of variance on log-transformed peaks	small, fall	nr	0.24	12	increase	71	61				
		small, spring	nr	0.24	12	nsc	26	36				
		large	nr	1	12	increase	36					
			0.19	1.1	5	nr	18					
Moore and Wondzell, 2005	Estimated from Harr et al., 1979 regression relationships	large	0.35	1.5	5	nr	14					
			0.45	2	5	nr	13					
			0.87	5	5	nr	10					
			1.23	10	5	nr	9.6					

COYOTE 3, .59km2, clearcut 100%, 0.3% roads

Reference	Method of Analysis	category	Minimum peak flow		yrs of record	change	% change by years since harvest					
			cms/km ²	RI (yrs)			all	T	5	10	15	20
Harr et al., 1979	Linear regression of peaks	all	0.22	9	5	increase	36	36				
		all	nr	na	12	increase	45	73				
Jones, 2000	Analysis of variance on log-transformed peaks	small, fall	nr	0.24	12	increase	116	75				
		small, spring	nr	0.24	12	increase	24	71				
		large	nr	1	12	increase	26					
			0.19	1.1	5	nr	56					
Moore and Wondzell, 2005	Estimated from Harr et al., 1979 regression relationships	large	0.35	1.5	5	nr	46					
			0.45	2	5	nr	43					
			0.87	5	5	nr	37					
			1.23	10	5	nr	35					

Table – 9 Alsea Watershed

Alsea - Needle 7.1km², clearcut 82%, 5%roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	%change in mean peakflow		notes
							roads	all	
Harr et al., 1975	Linear regression of peaks	fall	nr	nr	<5	increase	nr	nr	
		winter	nr	nr	<5	increase	nr	nr	
Harris, 1977	Linear regression of peaks	large	0.55	nr	7	nsc		20	

Alsea - Deer 3.04 km², clearcut 25%, 4% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	%change in mean peakflow		notes
							roads	all	
Harr et al., 1975	Linear regression of peaks	fall	nr	nr	<5	nsc			
		winter	nr	nr	<5	nsc			
Harris, 1977	Linear regression of peaks	large	0.55	nr	7	nsc		2	

Alsea - Deer 2 0.56 km², clearcut 30%, 3% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	%change in mean peakflow		notes
							roads	all	
Harr et al., 1975	Linear regression of peaks	fall	nr	nr	<5	nsc			
		winter	nr	nr	<5	nsc			
Moore & Wondzell, 2005	Interpreted from Harr et al., 1975	nr	nr	nr	nr	nsc			not used in figures

Alsea - Deer 3 0.41 km², clearcut 65%, 12% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	%change in mean peakflow		notes
							roads	all	
Harr et al., 1975	Linear regression of peaks	fall	nr	nr	<5	increase	5	nr	
		winter	nr	nr	<5	increase	5	20	
Moore & Wondzell, 2005	Interpreted from Harr et al., 1975	nr	nr	nr	nr	increase	18	44	not used in figures

Alsea - Deer 4 0.16 km², clearcut 90%, no roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	%change in mean peakflow		notes
							roads	all	
Harr et al., 1975	Linear regression of peaks	fall	nr	nr	<5	nsc			
		winter	nr	nr	<5	nsc			
Moore & Wondzell, 2005	Interpreted from Harr et al., 1975	nr	nr	nr	nr	nsc			not used in figures

Table 10 - Carnation Creek Watershed

Carnation H, 0.12 km², clearcut 90%, 6.5% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	%change in mean peakflow		notes
							roads	all	
Hetherington, 1982	Linear regression of peaks	rain only	0.55	nr	during treatment	increase	20	20	

Carnation B, 9.3km², clearcut 41%, no roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	%change in mean peakflow		notes
							roads	all	
Hetherington, 1982	Linear regression of peaks	rain only	0.55	nr	during treatment	nsc	nr	nr	

Table 11 - Caspar Creek Experimental Watershed

Caspar Creek South - 4.24km², selection cut 67%, 5% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	%change in mean peakflow		notes
							roads	all	
Zeimer, 1981	Least squares regression of peaks	small	0.016	nr	4	increase			includes 2 yrs of treatment
		med	0.07	nr	4	nsc			
		large	0.16	1.01	4	nsc			
		very large	0.41	1.4	4	nsc			
		all	na	na	4	increase	10%	mean peak discharge	
Wright et al., 1990	Least squares regression of peaks (logarithmic)	all	na	na	4	increase	nsc	4%	general trend only
		small	<.067	nr	5	increase	20%	nr	includes 2 yrs of treatment
		large	>0.112	8	5	nsc			
		all	>.1	nr	15	nsc			

Caspar Creek North (NFC) 49.6% clearcut, 2% roads

Caspar subbasins 95-100% clearcut (BAN, KJE, GIB, CAR, EAG), 30-46% clearcut (ARF, DOL, FLY, JOH, LAN)

Reference	Method of Analysis	sub-basin	category	cms/km ²	RI (yrs)	yrs of record	change	%	notes
Zeimer, 1998	Linear regression of peaks	NFC	all	>.1	7x/yr		nsc	2	
		NFC	large			2	increase	9	
		NFC	fall	>0.125			increase	300%	first fall storms
		Partial _{ave}	medium	>.4	0.5		increase	16	
		Clear _{ave}	medium	>.4	0.5		increase	34	
		Clear _{ave}	large	nr	2	12	increase	27	
		Partial _{ave}	large	nr	2		increase	15	
		BAN	large	0.8	2		increase	21	
		KJE	large	0.8	2		increase	28	
		GIB	large	0.8	2		increase	39	
		CAR	large	0.8	2		increase	19	
		EAG	large	0.8	2		increase	27	
		Reid & Lewis, 2005	observed data from Zeimer, 1998	BAN	small		>.15		increase
KJE	small				>.15		increase	67	
GIB	small				>.15	2	increase	70	only use 2 years after treatment
CAR	small				>.15		increase	54	
EAG	small				>.15		increase	58	

Lewis et al., 2001, report significant increase in all sub basins except FLY & LAN, but do not report numbers

Supplemental nformation on Caspar Creek North sub-basins

- ARF 3.8km², 45.5% cut, 1.8% roads
- BAN .1km², 95% cut, 2.6% roads
- CAR .26km², 95.7% cut, 2.8% roads
- DOL .77 km², 36.4% cut, 2.5% roads
- EAG .27 km², 99.9% cut, 4.9% roads
- FLY 2.17km², 45.4% cut, 1.6% roads
- GIB .2km², 99.6% cut, 4.2% roads
- JOH .55km², 30.2% cut, 2% roads
- KJE .15km², 97.1% cut, 6.5% roads
- LAN 1.56km², 32.2% cut, 1% roads
- NFC 4.73km², 12.7+36.9% cut, 2% roads

Table 12 - Umatilla National Forest, Oregon

Umatilla National Forest
ELGIN 1, 2, 4

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		
							roads	all	notes
Fowler et al., 1987	not reported	all	nr	nr	6	nsc	0		cites Felix, unpublished

Table 13 - Deadhorse Creek, Colorado

Deadhorse Creek, 2.7km², mixed treatment 10%, 3.4% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		
							roads	all	notes
Troendle & King, 1987	ANCOVA	all	nr	nr	nr (<5)	nsc	0%		mean

North Fork, .41km², patch cut 36%, 3.1% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		
							roads	all	notes
Troendle & King, 1987	ANCOVA	all	nr	nr	nr (<5)	increase	50%		mean

Unit 8, .41km², shelterwood 40%, 4.9% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		
							roads	all	notes
Troendle & King, 1987	not reported	all	nr	nr	3	nr	nr		mean

Upper Basin, .78km², patch cut 30%, 3.2% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		
							roads	all	notes
Troendle & King, 1987	not reported	all	nr	nr	nr (<5)	nr	nr		mean

Table 14 - Camp Creek, British Columbia

Camp Creek, 33.9km², mixed treatment 27%, 7% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		
							roads	all	notes
Cheng, 1989	comparison of annual peak flow	all	nr	nr	6	increase	21		average for 6 years
Moore & Scott, 2005	ANCOVA	medium small	>.03 <.03	nr nr	17 17	nsc increase	nr nr		

Table 15 - Wagon Wheel Gap, Colorado

Wagon Wheel Gap, CO
Catchment B, .81km², 100% clearcut, no roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		
							roads	all	notes
Bates & Henry, 1928	comparison of mean daily flow	all	nr	nr	7	increase	50		daily mean flow
van Haveran, 1998	not reported	all	nr	nr	7	increase	50		max daily (not instantaneous peak)

Table 16 - Fool Creek, Colorado

Fool Creek, 2.89km², patchcut 40%, 5% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		notes
							roads	all	
Troendle & King, 1985	ANCOVA	all	nr	nr	28	increase	23%		

Table 17 - Horse Creek, Idaho

Horse Creek

subbasin 8, 1.48km², no harvest, 3.7% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		notes
							roads	all	
King & Tennyson, 1984	linear regression of peaks	all	nr	nr	nr	nsc	nr		

subbasin 10, .65km², no harvest, 2.6% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		notes
							roads	all	
King & Tennyson, 1984	linear regression of peaks	all	nr	nr	nr	nsc			

subbasin 12, .83km², patchcut 33%, 3.9% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		notes
							roads	all	
King, 1989	linear regression of peaks	all	nr	nr	nr	nsc	15		mean

subbasin 14, .62km², patchcut 27%, 1.8% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		notes
							roads	all	
King, 1989	linear regression of peaks	all	nr	nr	nr	increase	35		mean

subbasin 16, .28km², patch cut 27%, 3% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		notes
							roads	all	
King, 1989	linear regression of peaks	all	nr	nr	nr	increase	36		mean

subbasin 18, .86km², patch cut 29%, 4.3% roads

Reference	Method of Analysis	category	cms/km ²	RI (yrs)	yrs of record	change	% change in peakflow		notes
							roads	all	
King, 1989	linear regression of peaks	all	nr	nr	nr	increase	34		mean

Table 1 – Peak flow data from H.J. Andrews Forest Watershed 1

Reference	Method of analysis	Event type	Minimum flow (m ³ /km ²)	Return period (yrs)	Record length (yrs)	Reported direction of change ^c	Reported % change by yrs since harvest (%)						
							all	0	5	10	15	20	25
Rothacher, 1973	Linear regression of peaks	all	0.11	nr	5	increase	24						
		large	1.09	nr	5	nsc	nr						
Harr, 1986	Linear regression of peaks	rain-on-snow	0.98	2	18	increase ^d	nr						
Jones & Grant, 1996	Analysis of variance on log-transformed peaks ^a	all	0.03	nr	22	increase		27	46	28	31	30	
		fall	0.03	nr	22	increase		39	68	30	23	27	
		winter	0.03	nr	22	increase		22	31	28	36	27	
		spring	0.03	nr	22	increase		21	70	32	28	46	
		small	0.03	<0.125	22	increase		20	67	38	42	43	
large	0.35	0.4	22	nsc		27	20	25	16	16			
Thomas and Megahan, 1998 ^b	Linear regression of log-transformed peaks ^a	small	0.03	<0.125	22	increase		90	40	65	55		
		sm-med	0.11	0.125	22	increase		38	28	36	32		
		med-large	0.21	0.2	22	increase		28	25	16	16		
		large	0.35	0.4	22	increase		25	25	14	14		
Beschta et al, 2000	Linear regression of log-transformed peaks ^a	large	0.35	0.4	22	increase ^e	28						
		large	0.65	1	22	increase ^e	16						
		large	1.00	5	22	increase ^e	9						
Jones, 2000	Analysis of variance on log-transformed peaks	all	0.03	nr	30	increase		22		31		26	21
		small, fall	0.03	nr	30	increase		38		53		33	20
		small, spring	0.03	nr	30	nsc		9		41		28	22
		rain	0.03	nr	30	nsc		22					
		mixed	0.03	nr	30	nsc		22					
		rain-on-snow	0.03	nr	30	increase		31					
		large	0.65	>1	30	increase		25					

Bold text indicates values graphed in figure 5; nr indicates not reported.

^aall analyses used the same dataset

^bvalues estimated from their Table 3a

^cnsc indicates no significant change; all other values statistically significant at 0.05, except where noted.

^dsignificance not reported

^esignificant at 0.1

Table 2 – Paired watershed studies with reported peakflow data for the rain-dominated hydrologic zone

Location	Basin name	Area (km ²)	Harvest (%)	Treatment type	Roads > 2%	Return period (yr)	Reported change ^a (%)	Reference
Carnation Creek, BC	H	0.12	90	clear	Y	all	20	Hetherington, 1982
	B	9.30	41	mixed	Y	all	nsc	Hetherington, 1982
Alsea River, OR	Needle	7.10	82	clear	Y	all	20	Harris, 1977
	Needle	7.10	82	clear	Y	all	nsc	Harr et al., 1975
	Deer	3.04	25	clear	Y	all	2	Harris, 1977
	Deer	3.04	25	clear	Y	all	nsc	Harr et al., 1975
	Deer 2	0.56	30	clear	Y	all	nsc	Harr et al., 1975
	Deer 3	0.41	65	clear	Y	all	20	Harr et al., 1975
	Deer 4	0.16	90	clear	N	all	nsc	Harr et al., 1975
Caspar Creek, CA	SFC	4.24	67	mixed	Y	1	nsc	Ziemer, 1981
	SFC	4.24	67	mixed	Y	8	nsc	Wright et al., 1990
	SFC	4.24	67	mixed	Y	all	nsc	Ziemer, 1998
	N _{ave}	8.89	41.4	mixed	Y	2	15	Ziemer, 1998
	N _{ave}	0.98	97.8	clear	Y	2	27	Ziemer, 1998
	BAN	0.10	95	clear	Y	2	21	Ziemer, 1998
	KJE	0.15	97.1	clear	Y	2	28	Ziemer, 1998
	GIB	0.20	99.6	clear	Y	2	39	Ziemer, 1998
	CAR	0.26	95.7	clear	Y	2	19	Ziemer, 1998
	EAG	0.27	99.9	clear	Y	2	27	Ziemer, 1998
NFC	4.73	49.6	mixed	Y	2	9	Ziemer, 1998	

^a nsc indicates no significant change

Table 3 – Paired watershed and modeling studies with reported peakflow data for the transient snow zone

Location	Basin name	Area (km ²)	Harvest (%)	Treatment type	Roads > 2%	Return period (yr)	Reported change ^a (%)	Reference
Deschutes River, WA	Hard	2.30	35	modeled	N	2	10.1	Bowling & Lettenmaier, 2000
	Hard	2.30	35	modeled	Y	2	22.6	
	Ware	2.80	66	modeled	N	2	15.4	
	Ware	2.80	66	modeled	Y	2	29.0	
Fox Creek, Bull Run, OR	1	0.59	25	patch	N	1	nsc	Harr, 1980
	1	0.59	25	patch	N	1	13	Jones, 2000
	3	0.71	25	patch	N	1	nsc	Harr, 1980
	3	0.71	25	patch	N	1	13	Jones, 2000
H.J. Andrews, OR	1	0.98	100	clear	N	1	nsc	Rothacher, 1973
	1	0.98	100	clear	N	1	16	Beschta et al., 2000
	1	0.98	100	clear	N	1	25	Jones, 2000
	3	1.01	25	patch	Y	1	13	Beschta et al., 2000
	3	1.01	25	patch	Y	1	16	Jones, 2000
	10	0.10	100	clear	N	1	-8	Jones, 2000
	6	0.13	100	clear	Y	all	nsc	Harr et al., 1982
	6	0.13	100	clear	Y	1	16	Jones, 2000
	7	0.15	60	shelter	N	all	nsc	Harr et al., 1982
7	0.15	100	shelter	N	1	27	Jones, 2000	
Coyote Creek, OR	1	0.69	50	shelter	N	9	47	Harr et al., 1979
	1	0.69	50	shelter	N	1	10	Jones, 2000
	2	0.68	30	patch	N	9	10	Harr et al., 1979
	2	0.68	30	patch	N	1	36	Jones, 2000
	3	0.59	100	clear	N	9	36	Harr et al., 1979
3	0.59	100	clear	N	1	26	Jones, 2000	

^a nsc indicates no significant change

Table 4 – Paired watershed, large basin and modeling studies with reported peakflow data for the snow-dominated zone

Location	Basin name	Area (km ²)	Harvest (%)	Treatment type	Roads > 2%	Return period (yr)	Reported change ^a (%)	Reference
Umatilla National Forest, OR	ELG1	0.30	43	patch	Y	all	nsc	Fowler et al., 1987
	ELG2	0.24	50	shelter	N	all	nsc	
	ELG4	1.18	22	patch	Y	all	nsc	
Deadhorse Creek, CO	Dead	2.70	10	mixed	Y	all	0	Troendle & King, 1987
Wagon Wheel Gap, CO	B	0.81	100	clear	N	all	50	Van Haveren, 1988
Fool Creek, ID	Fool	2.89	40	patch	Y	all	23	Troendle & King, 1985
Horse Creek, ID	12	0.83	33	patch	Y	all	15	King, 1989
	14	0.62	27	patch	N	all	35	
	16	0.28	21	patch	Y	all	36	
	18	0.86	29	patch	Y	all	34	
Camp Creek, BC	Camp	33.9	27	mixed	Y	all	21	Cheng, 1989 Moore & Scott, 2005
	Camp	33.9	27	mixed	Y	all	nsc	
Redfish Creek, BC	Curr	26.2	9.9	modeled	N	1.9	6	Schnorbus & Alila, 2004
	1/3L	26.2	11.2	modeled	N	1.9	5	
	2/3L	26.2	18	modeled	N	1.9	6	
	1/3M	26.2	12.3	modeled	N	1.9	8	
	2/3M	26.2	19	modeled	N	1.9	15	
	1/3U	26.2	15.8	modeled	N	1.9	11	
	2/3U	26.2	22.4	modeled	N	1.9	17	
	1/3A	26.2	19.8	modeled	N	1.9	12	
	100L2	26.2	38.2	modeled	N	1.9	20	
	100U2	26.2	32.8	modeled	N	1.9	34	
	100A	26.2	52.7	modeled	N	1.9	34	

^a nsc indicates no significant change

Figure Captions

Figure 1 - A process model of the relation between land use practices and altered storm peaks (after Ziemer, 1998). Shading indicates processes considered in this report, A-D indicate boxes shown in figure 2.

Figure 2 - Conceptual change in process influence on peak flow due to forest harvest for A. evapotranspiration, B. direct interception, C. fog drip and D. snow accumulation and melt. The maximum possible change occurs at 100 percent harvest, and decreases with harvest as indicated by bar height for each of the three hydroregions: rain-dominated (R-dark grey), transient snow zone (T-light grey) and snow-dominated (S-white). The absolute value of the maximum effect is different among process and hydrologic zones.

Figure 3 - Forest harvest treatments that result in a reported value of 50 percent area harvested. Theoretical intensity of treatment and predicted influence on peak flow changes decreases from left to right.

Figure 4 - Experimental watersheds in the northwestern United States. Each box includes applicable studies reporting peak flow data. Gray text indicates area outside of Oregon; italics indicate modeling studies.

Figure 5 - Reported changes in peak flow for Oregon watersheds. Each point represents a published value for percent increase to peak flow after harvest, relative to the control flow watershed for A. Andrews Forest and B. Coyote Creek. Dashed vertical indicates one year return period. Dashed horizontal lines indicate the 10 percent detection limit.

Figure 6 - Reported changes in peak flow for California and Washington watersheds. Each point represents a published value for percent increase in peak flow after harvest relative to the return period of the control watershed for A. sub-basins of Caspar Creek, CA, B. modeled basins of Deschutes River, WA, and C. average values of 23 large basins in western Washington. Dashed horizontal lines indicate the 10 percent detection limit.

Figure 7 - Maximum recurrence interval at the detection limit as a function of the percent harvested for selected watersheds graphed in figure 5 and 6.

Figure 8 - Reported changes in peak flow for different treatment types in the A. rain-dominated, B. transient snow, and C. snow-dominated zones. Dark gray symbols represent treatment type. Small white circles inside larger gray symbol indicate a basin with greater than two percent of the area in roads. Modeled points connected with arrows represent increases due to roads within a single watershed. Mean and one standard deviation of non-zero values plotted in A-C are grouped by percent harvested (0-39 percent, 40-79 percent, 80-100 percent) in D. rain-dominated, E. transient snow, and F. snow-dominated zones. For all graphs, gray shading around zero indicates limit of detection (± 10 percent).

Figure 9 - Peak flow response to harvest in the rain-dominated hydrologic zone.


Solid line represents maximum values reported. Dashed line is a linear fit through the average values from figure 8c, and represents the mean reported change. Gray shading around zero indicates limit of detection (± 10 percent).


Figure 10 - Peak flow response to harvest in the transient snow hydrologic zone. Solid line represents maximum values reported for basins without roads. Dashed line is a linear fit through the average values from figure 8d, and represents the mean reported change (including some basins with roads). Gray shading around zero indicates limit of detection (± 10 percent).


Figure 11 - Reported changes to peak flow from world-wide studies, after Guillemette et al., 2005. Gray shading around zero indicates limit of detection (± 10 percent).

Figure 12 - Site conditions and management treatment considerations that potentially influence peak flows. Considerations are listed in decreasing likelihood of effect. Grayscale represents theoretical range in impact of each factor (black=high, white = low)

Figure 13 - Domains for initiation of sediment transport as a function of channel type and recurrence interval.

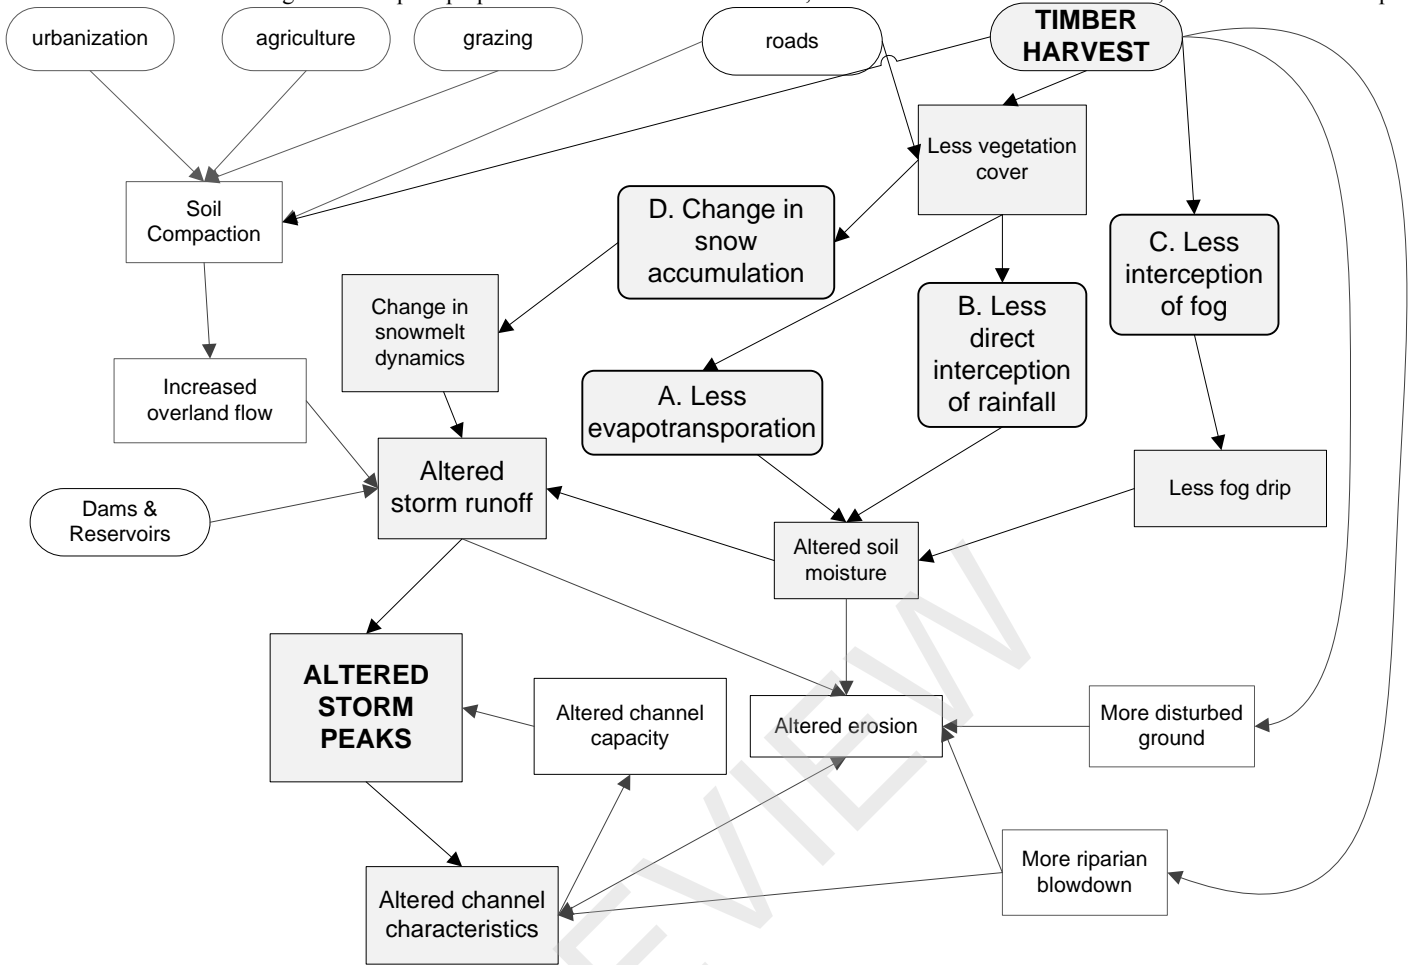


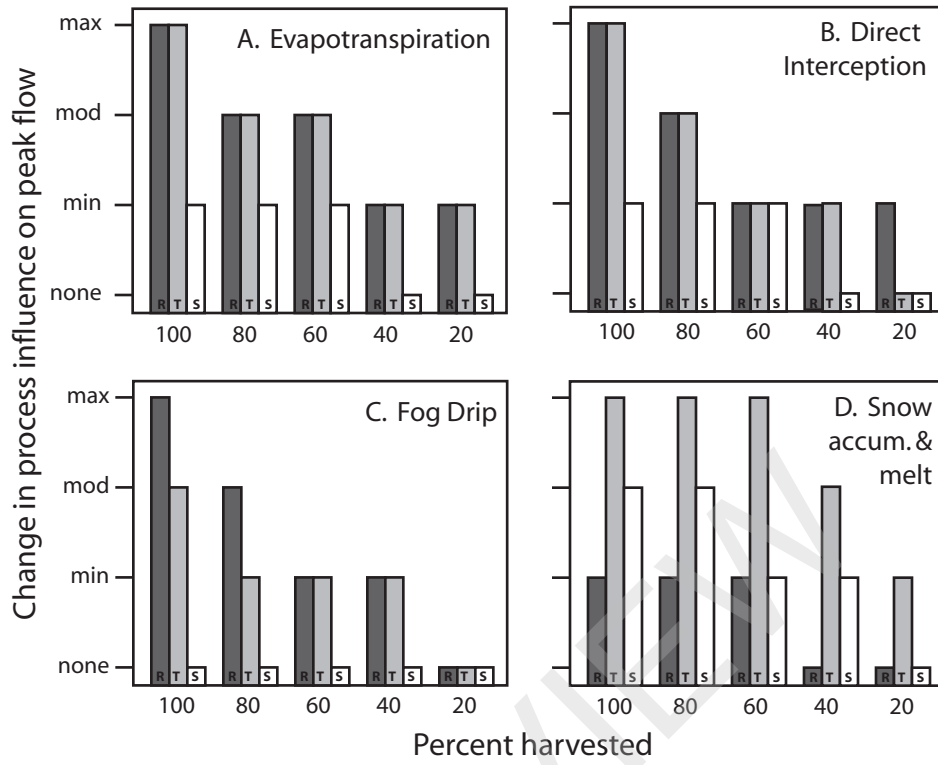


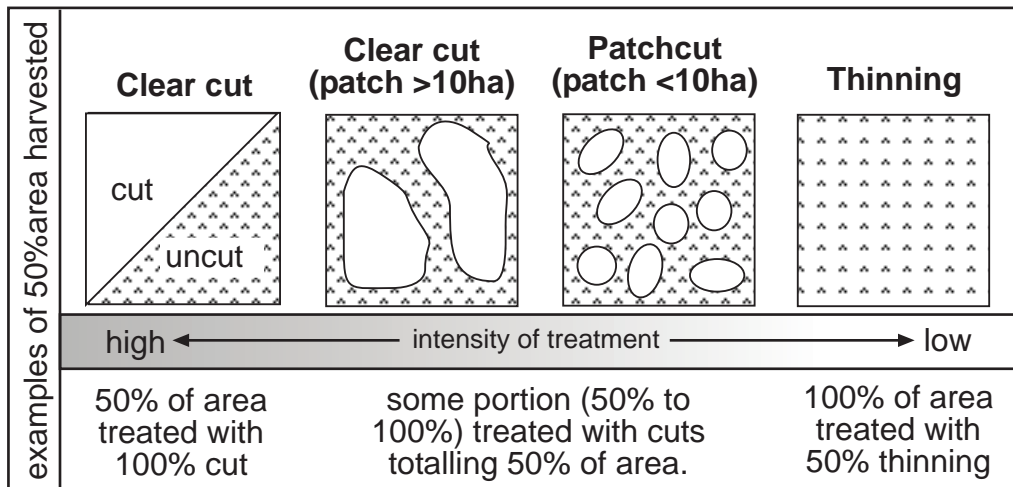



IN REVIEW

	Percent of Basin Harvested						Large Watersheds (>10km ²)
	100-80%	80-60%	60-40%	40-20%	20-0%	0%	
SNOW cold, persistent snowpack during winter months		Umatilla NF (2), Elgin OR (Fowler et al., 1987)	Umatilla NF (1), Elgin OR (Fowler et al., 1987)	Umatilla NF (4), Elgin OR (Fowler et al., 1987)		Umatilla NF (3), Elgin OR (Fowler et al., 1987)	Redfish Creek, BC (Whitaker et al., 2002; Schnorbus & Allia, 2004)
				Horse Creek (12, 14, 16, 18), Idaho (King, 1989)		Horse Creek, Idaho (King, 1989)	Camp Creek, BC (Cheng, 1989; Moore & Scott, 2005)
		Wagon Wheel Gap (B), CO (Van Haveren, 1988)				Wagon Wheel Gap (A), CO (Van Haveren, 1988)	Fool Creek, CO (Troendle & King, 1985)
				Deadhorse Subbasin, CO (Troendle & King, 1987)	Deadhorse Creek, CO (Troendle & King, 1987)		Deadhorse Creek, CO (Troendle & King, 1987)
TRANSIENT transient snow, near melting point during winter months	HJ Andrews (1), (Rothacher, 1973, Harr 1986, Jones & Grant, 1996, Thomas & Megahan, 1998, Beschta et al., 2000; Jones, 2000)			HJ Andrews (3), (Jones & Grant, 1996, Thomas & Megahan, 1998, Beschta et al., 2000; Jones, 2000)		HJ Andrews (2), (Rothacher, 1973, Harr 1986, Jones & Grant, 1996, Thomas & Megahan, 1998, Beschta et al., 2000; Jones, 2000)	Lookout paired with Blue River, (Christner & Harr, 1982; Jones & Grant, 1996; Thomas & Megahan, 1998; Beschta et al., 2000)
	HJ Andrews (6,7), (Harr et al., 1982; Jones, 2000)		HJ Andrews (7), (Harr et al., 1982)			HJ Andrews (8), (Harr et al., 1982; Jones, 2000)	Salmon Creek paired with NF MF Willamette (Christner & Harr, 1982; Lyons & Beschta, 1983; Jones & Grant, 1996; Thomas & Megahan, 1998; Beschta et al., 2000).
				Bull Run, Fox Creek (1,3), (Harr, 1980; Jones, 2000)		Bull Run, Fox Creek (2), (Harr, 1980; Jones, 2000)	
	HJ Andrews (10), (Harr & McCorison, 1979, Harr 1986; Jones, 2000)					HJ Andrews (9), (Harr & McCorison, 1979, Harr 1986; Jones, 2000)	HJ Andrews (Lookout), (Connelly & Cundy, 1992)
	Coyote Creek (3), (Harr et al., 1979; Jones, 2000)		Coyote Creek (1), (Harr et al., 1979; Jones, 2000)	Coyote Creek (2), (Harr et al., 1979; Jones, 2000)		Coyote Creek (4), (Harr et al., 1979; Jones, 2000)	Breitenbush paired with N Santiam (Christner & Harr, 1982; Jones & Grant, 1996; Thomas & Megahan, 1998; Beschta et al., 2000)
			Deschutes, WA (Ware) (Bowling & Lettenmaier, 2001; Lamarche & Lettenmaier, 2001)	Deschutes, WA (Hard) (Bowling & Lettenmaier, 2001; Lamarche & Lettenmaier, 2001)	Jamieson Creek, BC (Golding, 1987)	Elbow Creek, BC (Golding, 1987)	Deschutes (paired with Naselle, Duncan, 1986; LaMarche & Lettenmaier, 2001)
		Malcolm-Knapp, BC (1), (Cheng et al., 1975)				Malcolm-Knapp, BC (2), (Cheng et al., 1975)	western Washington basins (Storck et al., 1998; Bowling et al., 2000)
				Flume Creek, BC (4), (Hudson, 2001)	Flume Creek, BC (5), (Hudson, 2001)	Flume Creek, BC (6), (Hudson, 2001)	
RAIN rare snow events, dominated by rain during winter months	Aalsea Watershed (Needle), (Harr et al, 1975, Harris, 1977)			Aalsea Watershed (Deer), (Harr et al, 1975, Harris, 1977)		Aalsea Watershed (Flynn), (Harr et al, 1975, Harris, 1975)	
	Aalsea Watershed (Deer 4), (Harr et al., 1975)	Aalsea Watershed (Deer 3), (Harr et al., 1975)		Aalsea Watershed (Deer 2), (Harr et al, 1975)			
		Caspar Creek, CA (S), (Ziemer, 1981, 1998; Wright et al., 1990)				Caspar Creek, CA (N), (Ziemer, 1981, 1998; Wright et al., 1990)	
	Caspar Creek, CA (BAN, CAR, EAG, GIB, KJE) (Zeimer, 1998; Lewis et al., 2001)		Caspar Creek, CA (ARF, FLY) (Zeimer, 1998; Lewis et al., 2001)	Caspar Creek, CA (DOL, JOH, LAN) (Zeimer, 1998; Lewis et al., 2001)	Caspar Creek, CA (NFC) (Zeimer, 1998; Lewis et al., 2001)	Caspar Creek, CA (HEN, IVE, MUN) (Zeimer, 1998; Lewis et al., 2001)	
	Carnation Creek, BC (H), (Hetherington, 1982)			Carnation Creek, BC (B), (Hetherington, 1982)		Carnation Creek, BC (C,E), (Hetherington, 1982)	

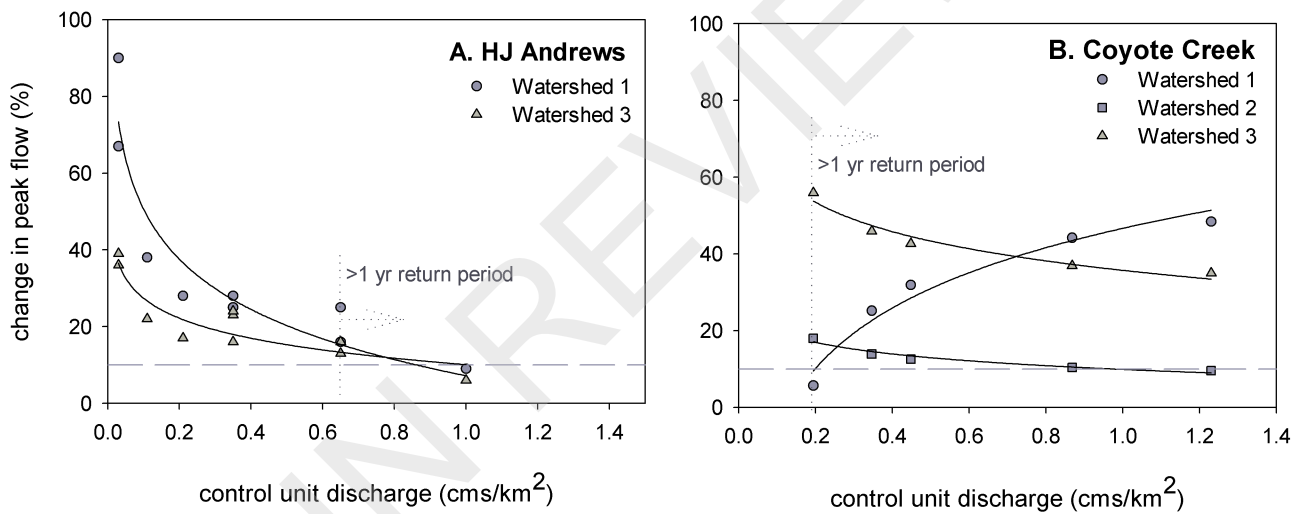

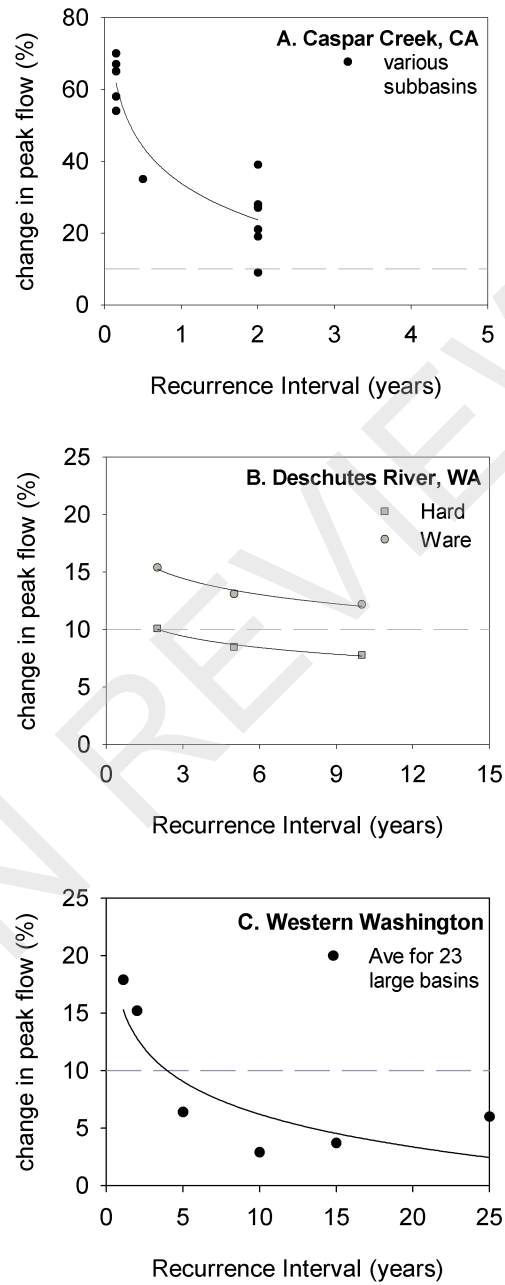


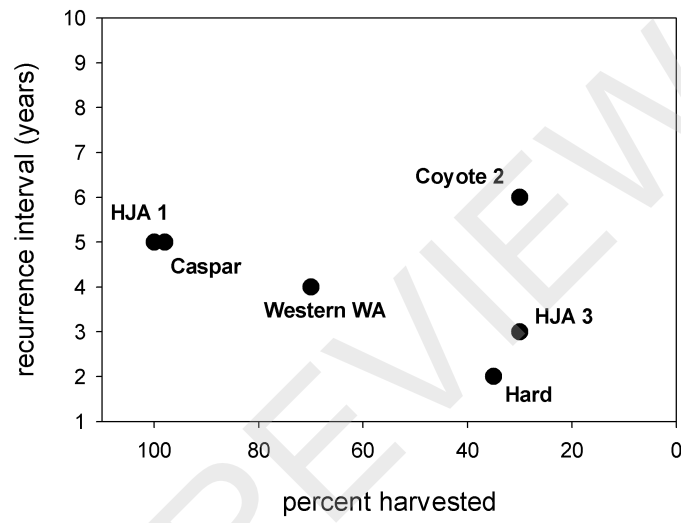


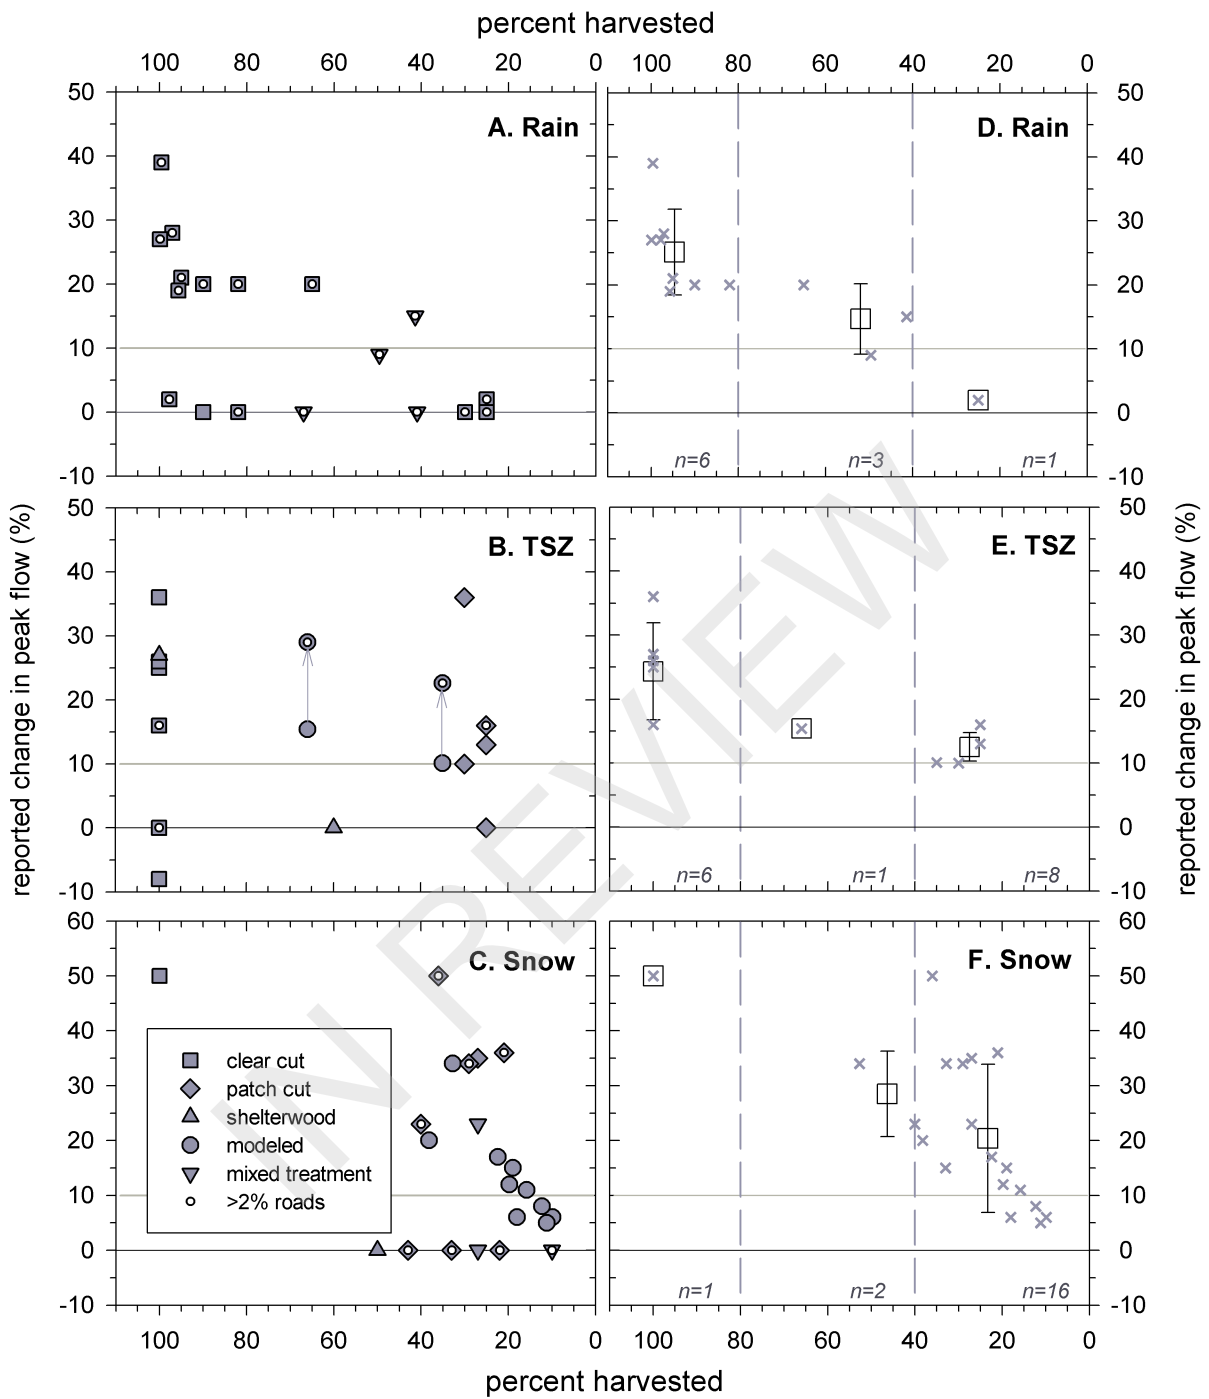


Grant et al, Effects of forest practices on peak flows

Figure 8

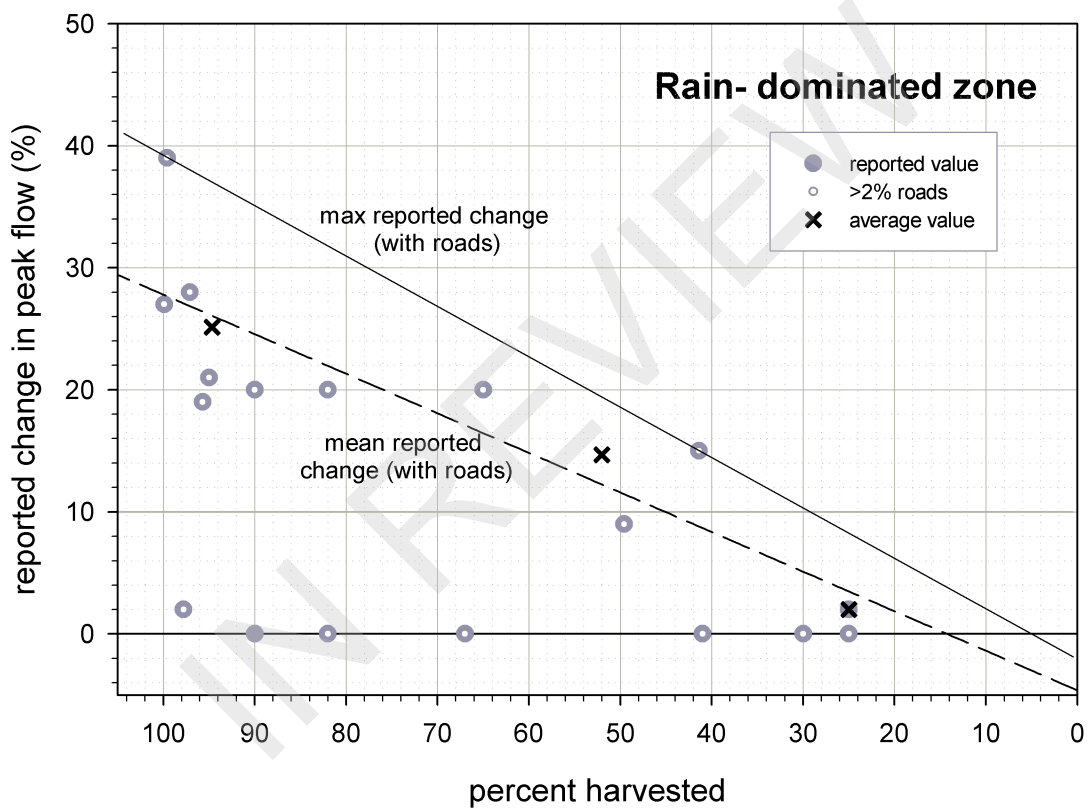

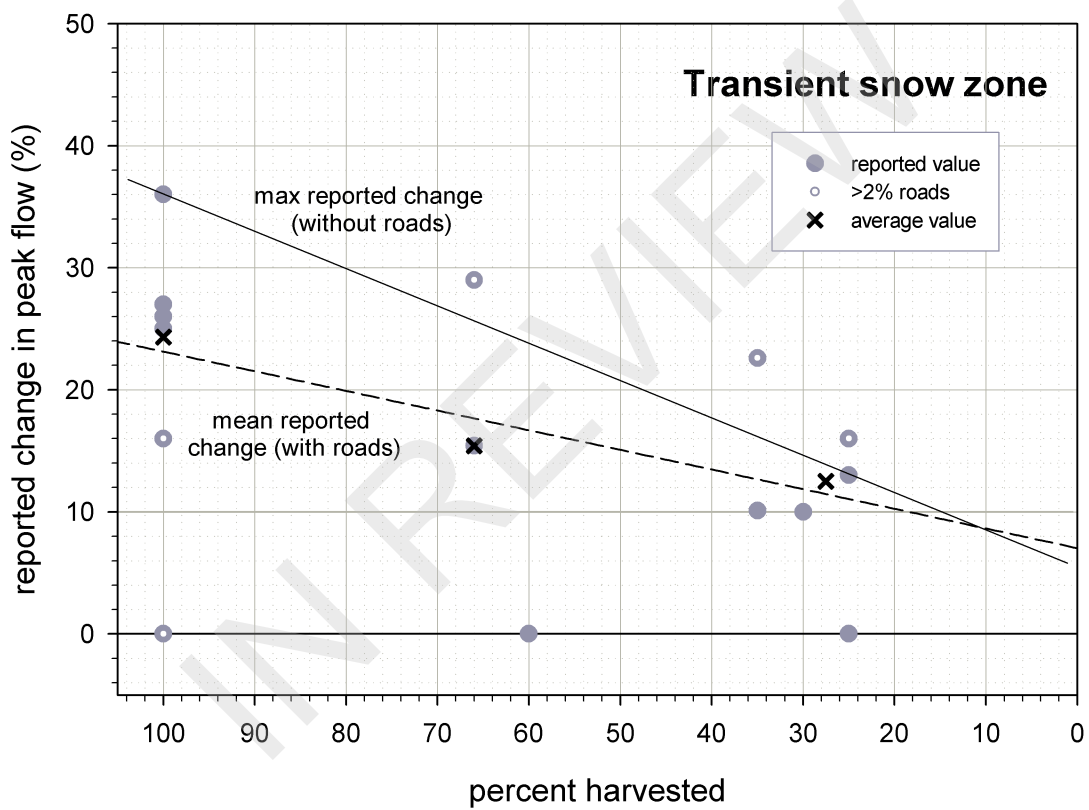

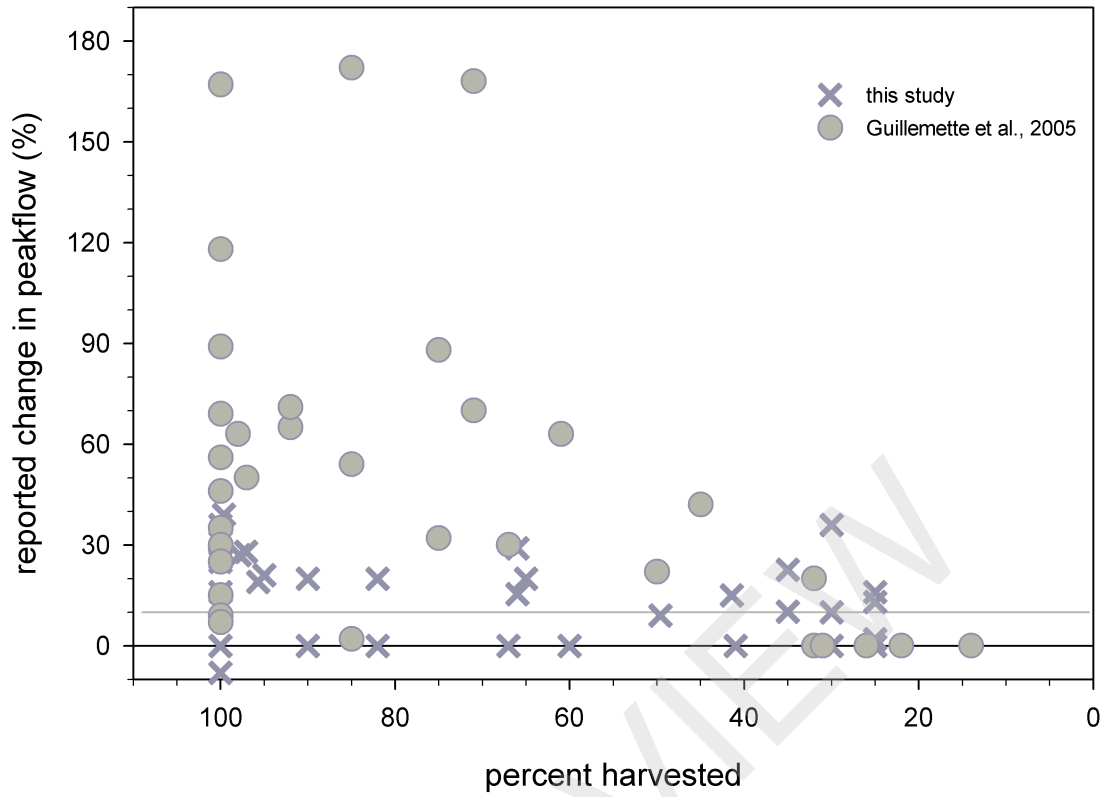

Likelihood of peak flow increase

High ← → Low

Potential Considerations

High	many, connected	few, disconnected	none, restored	roads
↕	fast	moderate	slow	drainage efficiency
↕	large	small	thinned	patch size
Low	absent	narrow	wide	riparian buffers

