

# PROJECT facts

U.S. DEPARTMENT OF ENERGY  
OFFICE OF FOSSIL ENERGY  
NATIONAL ENERGY TECHNOLOGY LABORATORY

Power Plant Improvement  
Initiative (PPII)

12/2006



## DEMONSTRATION OF A FULL-SCALE RETROFIT OF THE ADVANCED HYBRID PARTICULATE COLLECTOR (ADVANCED HYBRID™) TECHNOLOGY

### CONTACTS

**Kenneth E. Markel, Jr.**  
Director  
Office of Major Demonstrations  
National Energy Technology  
Laboratory  
3610 Collins Ferry Road  
P.O. Box 880  
Morgantown, WV 26507-0880  
304-285-4364  
kenneth.markel@netl.doe.gov

**John Rockey**  
Project Manager  
National Energy Technology  
Laboratory  
3610 Collins Ferry Road  
P.O. Box 880  
Morgantown, WV 26507-0880  
304-285-4711  
john.rockey@netl.doe.gov

### Background

This project demonstrated the Advanced Hybrid™ technology originally developed and tested by UND/EERC on a 2.5 MWe slipstream at Otter Tail's Big Stone Plant near Milbank, SD. The research was initially supported by the Innovations for Existing Plants component of the DOE Fossil Energy Coal R&D Program and then demonstrated under the Power Plant Improvement Initiative.

A full-scale demonstration of the Advanced Hybrid™ was performed at the 450 MW Big Stone Plant from October 2002 through December 2005. The technology consists of fabric filter bags interspersed with perforated electrostatic precipitator (ESP) plates and electrodes in the same housing. The filter bags can achieve greater collection of very fine particles than can the ESP plates, while the ESP plates can capture dust that is re-entrained due to back-pulsing of the fabric filter bags. The combination of these two technologies (ESP and filtration) in the patented Advanced Hybrid™ uses the ESP portion to capture the bulk (as much as 90%) of the particles and allows the filter bags to be made out of highly efficient membrane materials because of a reduction in filtration surface required as compared to conventional pulse-jet type fabric filters. As such, it is anticipated that the particulate control device can operate at 2.5 - 4 times

### PARTNER

Otter Tail Power Company  
Big Stone City, SD


### ADDITIONAL TEAM MEMBERS

Montana-Dakota Utilities and  
NorthWestern Public Service

University of North Dakota Energy  
and Environmental Research Center



Full Scale Advanced Hybrid™ Retrofit at Big Stone

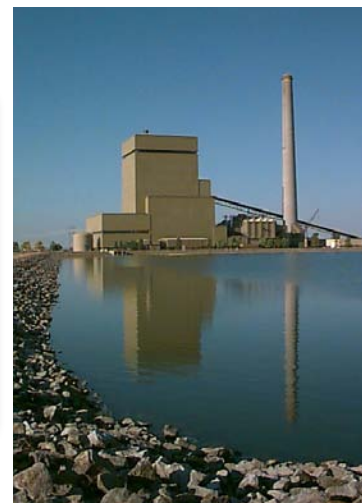

450 MW Big Stone Power Plant

## LOCATION

Otter Tail Power's Big Stone  
Power Plant  
Big Stone City, SD

## COST

**Total Project Value**  
\$21,359,336

**DOE/Non-DOE Share**  
\$6,490,585 / \$14,868,751

## ADDRESS

### National Energy Technology Laboratory

1450 Queen Avenue SW  
Albany, OR 97321-2198  
541-967-5892

2175 University Avenue South  
Suite 201  
Fairbanks, AK 99709  
907-452-2559

3610 Collins Ferry Road  
P.O. Box 880  
Morgantown, WV 26507-0880  
304-285-4764

626 Cochran's Mill Road  
P.O. Box 10940  
Pittsburgh, PA 15236-0940  
412-386-4687

One West Third Street,  
Suite 1400  
Tulsa, OK 74103-3519  
918-699-2000

## CUSTOMER SERVICE

1-800-553-7681

## WEBSITE

[www.netl.doe.gov](http://www.netl.doe.gov)

the throughput of conventional fabric filters. This technology offers the potential to increase fine particle (PM 2.5) collection efficiency by one or two orders of magnitude (i.e., 99.99% to 99.999% removal) at a cost that is roughly comparable to conventional particulate control technology.

## Description

The demonstration was conducted on a cyclone boiler firing coal from Wyoming's Powder River Basin (PRB). PRB coal produces fly ash that is among the most difficult to collect with ESPs. Challenging PRB coals, which are often less expensive and contain significantly lower amounts of sulfur, in many cases cannot be burned because existing ESPs cannot effectively capture the high-resistivity dust that is generated. Seventy-five percent of the existing ESPs on U.S. coal-fired utilities are over 20 years old, and many are operating with marginal performance. A growing number of power plant deratings occur because the existing ESP cannot operate efficiently and effectively at peak load. The present performance of these ESPs limits the type of fuel that can be burned in the boiler. The Advanced Hybrid™ technology, with its superior collection of fine particulate in a cost-effective, compact-sized device, can potentially capture a portion of the ESP upgrade market. Detailed project information and the final project report can be found on the NETL website at [http://www.netl.doe.gov/technologies/coalpower/cctc/PPII/bibliography/demonstration/environmental/bib\\_otter.html](http://www.netl.doe.gov/technologies/coalpower/cctc/PPII/bibliography/demonstration/environmental/bib_otter.html).

In addition (although not part of this demonstration project), the Advanced Hybrid™ technology can provide the control of heavy metals. Generally, heavy metals are directly condensed or adsorbed onto particles in the power plant gas stream. Since fine particles have a much greater surface area than larger particles, for the same amount of mass they adsorb a greater percentage of these heavy metals. The Advanced Hybrid™ technology's superior capture of fine particles will effectively control emissions of heavy metals that are not substantially in the vapor phase. Those elements in the vapor phase (e.g., mercury and selenium) will require sorbents. It is expected that the Advanced Hybrid™ system will be compatible with any of the proposed sorbents for mercury control.

