


Fort Calhoun

2Q/2002 Performance Indicators

Licensee's General Comments: none

Unplanned Scrams per 7000 Critical Hrs

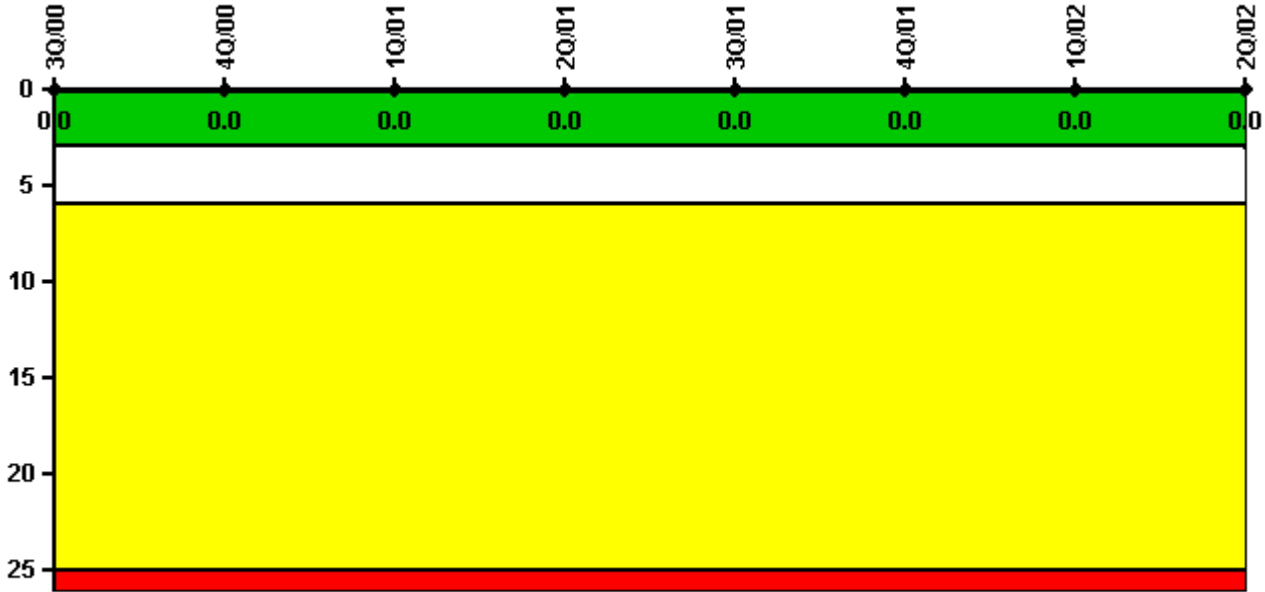


Thresholds: White > 3.0 Yellow > 6.0 Red > 25.0

Notes

Unplanned Scrams per 7000 Critical Hrs	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Unplanned scrams	0	0	0	0	0	0	0	0
Critical hours	2208.0	1664.3	1776.8	1541.0	2208.0	2208.0	2160.0	1506.4
Indicator value	0	0	0	0	0	0	0	0

Licensee Comments: none

Scrams with Loss of Normal Heat Removal

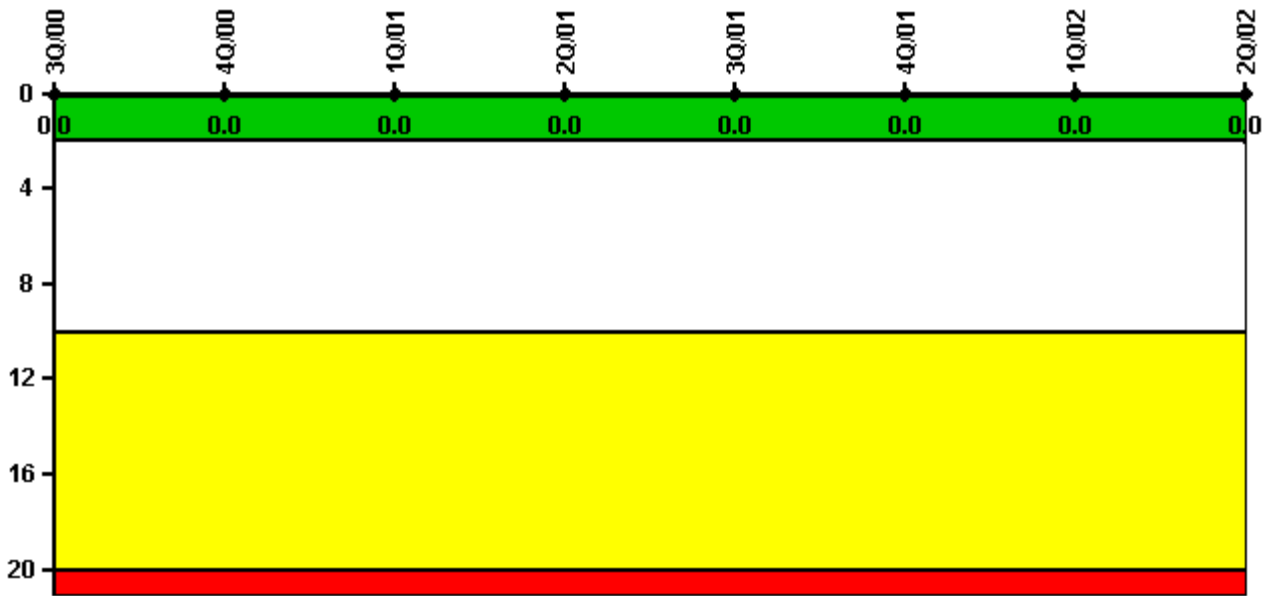


Thresholds: White > 2.0 Yellow > 10.0 Red > 20.0

Notes

Scrams with Loss of Normal Heat Removal	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Scrams	0	0	0	0	0	0	0	0
Indicator value	0	0	0	0	0	0	0	0

Licensee Comments: none

Unplanned Power Changes per 7000 Critical Hrs

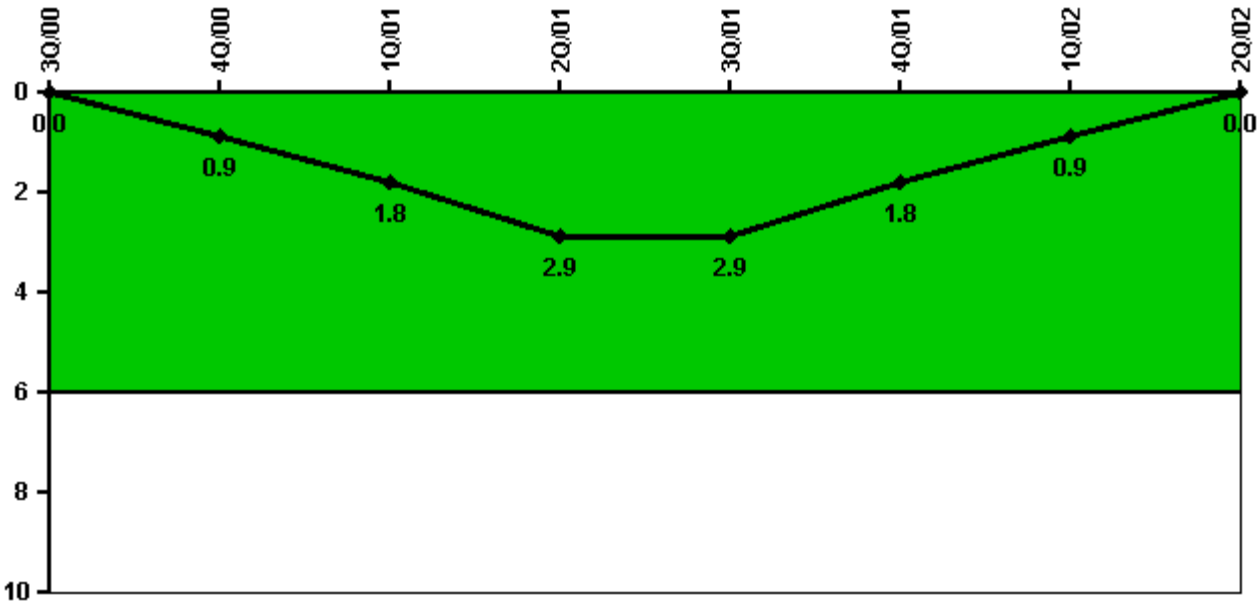


Thresholds: White > 6.0

Notes

Unplanned Power Changes per 7000 Critical Hrs	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Unplanned power changes	0	1.0	1.0	1.0	0	0	0	0
Critical hours	2208.0	1664.3	1776.8	1541.0	2208.0	2208.0	2160.0	1506.4
Indicator value	0	0.9	1.8	2.9	2.9	1.8	0.9	0

Licensee Comments: none

Safety System Unavailability, Emergency AC Power

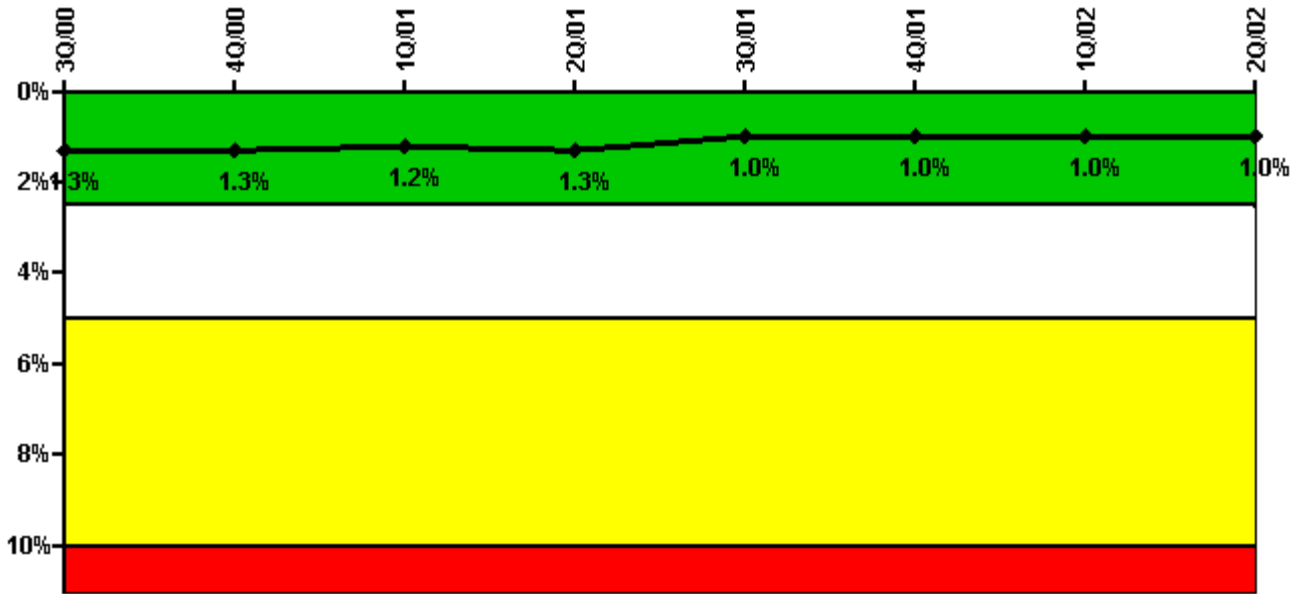


Thresholds: White > 2.5% Yellow > 5.0% Red > 10.0%

Notes

Safety System Unavailability, Emergency AC Power	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Train 1								
Planned unavailable hours	16.40	31.50	15.40	14.88	24.50	69.80	15.40	14.65
Unplanned unavailable hours	0	5.80	0	0	0	5.00	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	2208.00	2209.00	2160.00	2184.00	2208.00	2208.00	2160.00	2184.00
Train 2								
Planned unavailable hours	22.20	17.20	23.05	10.58	11.00	14.20	10.90	15.50
Unplanned unavailable hours	0	8.00	0	0	0	0.90	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	2208.00	2209.00	2160.00	2184.00	2208.00	2208.00	2160.00	2184.00
Indicator value	1.3%	1.3%	1.2%	1.3%	1.0%	1.0%	1.0%	1.0%

Licensee Comments: none

Safety System Unavailability, High Pressure Injection System (HPSI)

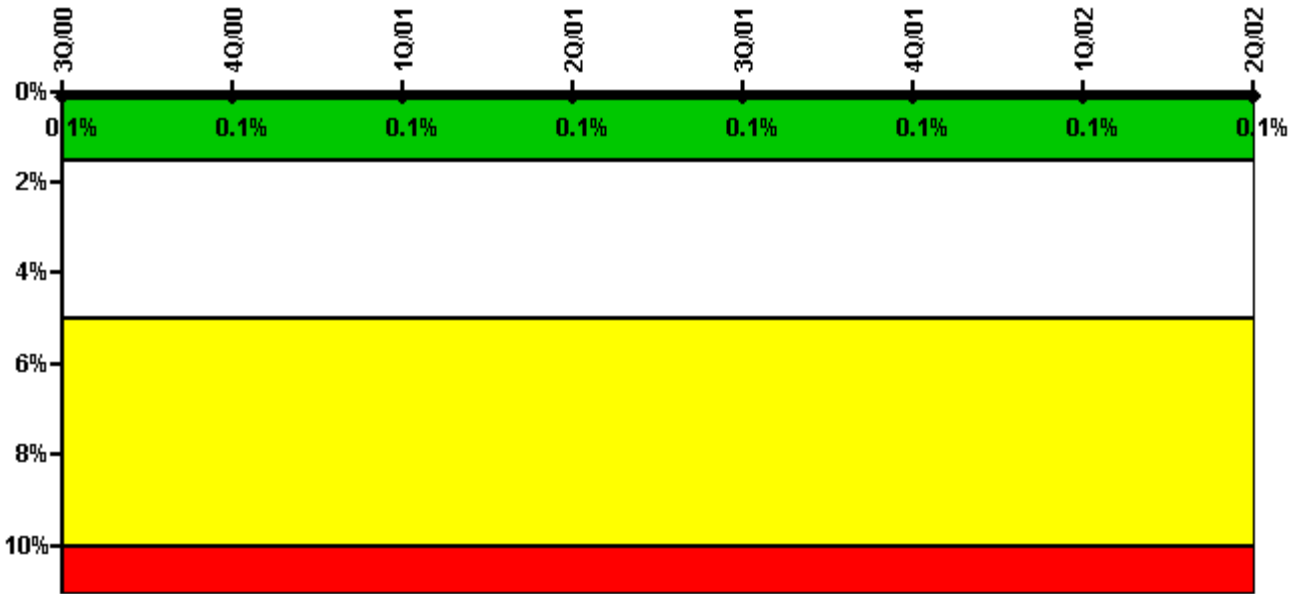


Thresholds: White > 1.5% Yellow > 5.0% Red > 10.0%

Notes

Safety System Unavailability, High Pressure Injection System (HPSI)	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Train 1								
Planned unavailable hours	0	0	0	0	0	0	0	0.28
Unplanned unavailable hours	0	0	0	0	0	0	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	2208.00	1664.30	1776.83	1541.00	2208.00	2208.00	2160.00	1506.90
Train 2								
Planned unavailable hours	0.50	0.40	5.40	0	8.90	1.40	0.40	11.68
Unplanned unavailable hours	0	0	0	0	0	0	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	2208.00	1664.30	1776.83	1541.00	2208.00	2208.00	2160.00	1506.90
Indicator value	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Licensee Comments: none

Safety System Unavailability, Heat Removal System (AFW)

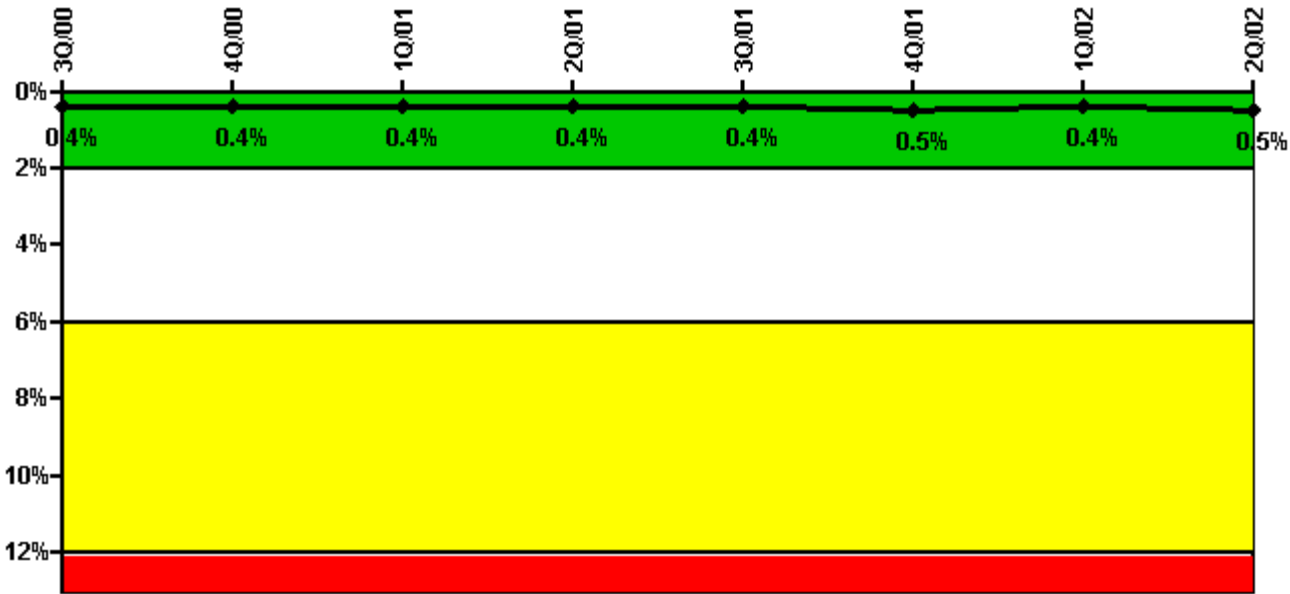

Thresholds: White > 2.0% Yellow > 6.0% Red > 12.0%


Notes

Safety System Unavailability, Heat Removal System (AFW)	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Train 1								
Planned unavailable hours	17.88	12.69	3.68	0	0	19.72	11.22	7.00
Unplanned unavailable hours	0	0	0	0	0	0	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	2208.00	1664.28	1776.83	1541.00	2208.00	2208.00	2160.00	1506.40
Train 2								
Planned unavailable hours	0.90	0	6.10	12.50	14.08	10.44	6.60	4.20
Unplanned unavailable hours	0	0	0	11.00	0	0	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	2208.00	1664.28	1776.83	1541.00	2208.00	2208.00	2160.00	1506.40
Indicator value	0.4%	0.4%	0.4%	0.4%	0.4%	0.5%	0.4%	0.5%

Licensee Comments:

2Q/02: 2002 RFO FW-6 was inoperable for 0.1 hours to perform SE-ST-AFW-3006 during plant startup. FW-10 was declared operable on May 31, 2002 at 0610 hours.

Safety System Unavailability, Residual Heat Removal System

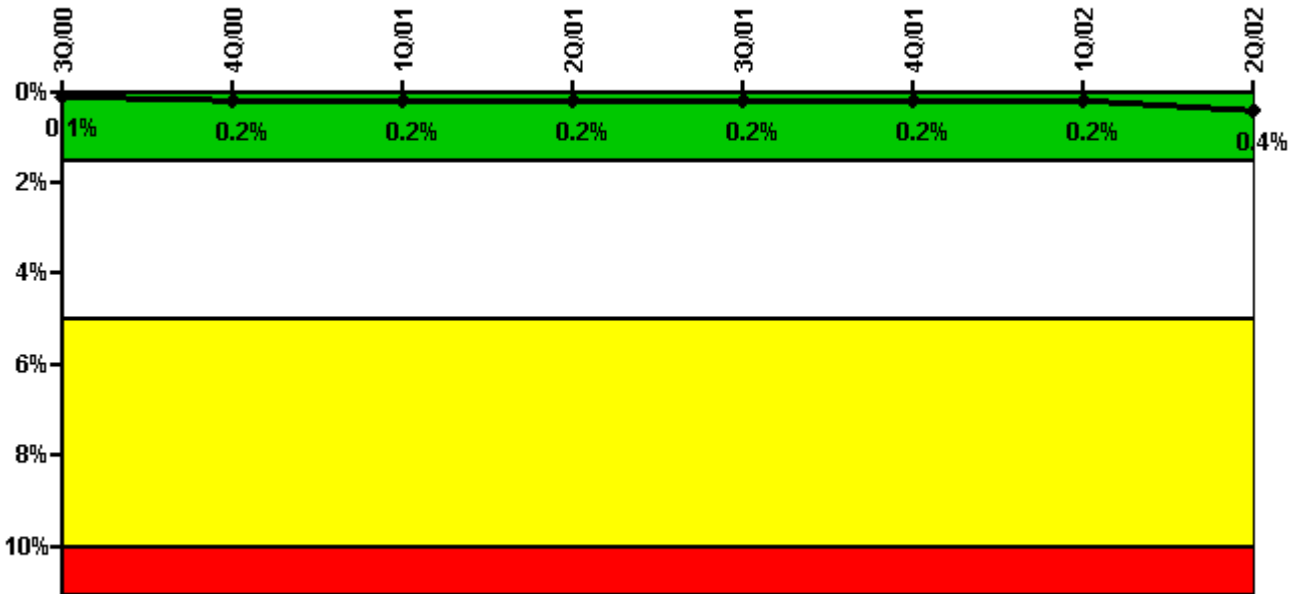

Thresholds: White > 1.5% Yellow > 5.0% Red > 10.0%


Notes

Safety System Unavailability, Residual Heat Removal System	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Train 1								
Planned unavailable hours	0.30	21.60	4.40	0.40	0.40	6.20	11.50	12.60
Unplanned unavailable hours	0	0	0	0	0	0.10	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	2208.00	1664.30	1776.83	1541.00	2208.00	2208.00	2160.00	1506.90
Train 2								
Planned unavailable hours	0	0	3.20	0	0	0	0	1.50
Unplanned unavailable hours	0	0	0	0	0	0	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	2208.00	1664.30	1776.83	1541.00	2208.00	2208.00	2160.00	1506.90
Train 3								
Planned unavailable hours	0	0.40	0	0	0	0	0.50	7.20
Unplanned unavailable hours	0	0	0	0	0	0	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0
Required hours	0	544.70	383.17	642.00	0	0	0	540.30
Train 4								
Planned unavailable hours	0	2.00	0	0	0	0	0.80	13.00
Unplanned unavailable hours	0	0	0	0	0	0	0	0
Fault exposure hours	0	0	0	0	0	0	0	0
Effective Reset hours	0	0	0	0	0	0	0	0

Required hours	0	544.70	383.17	642.00	0	0	0	540.30
Indicator value	0.1%	0.2%	0.2%	0.2%	0.2%	0.2%	0.2%	0.4%

Licensee Comments: none

Safety System Functional Failures (PWR)

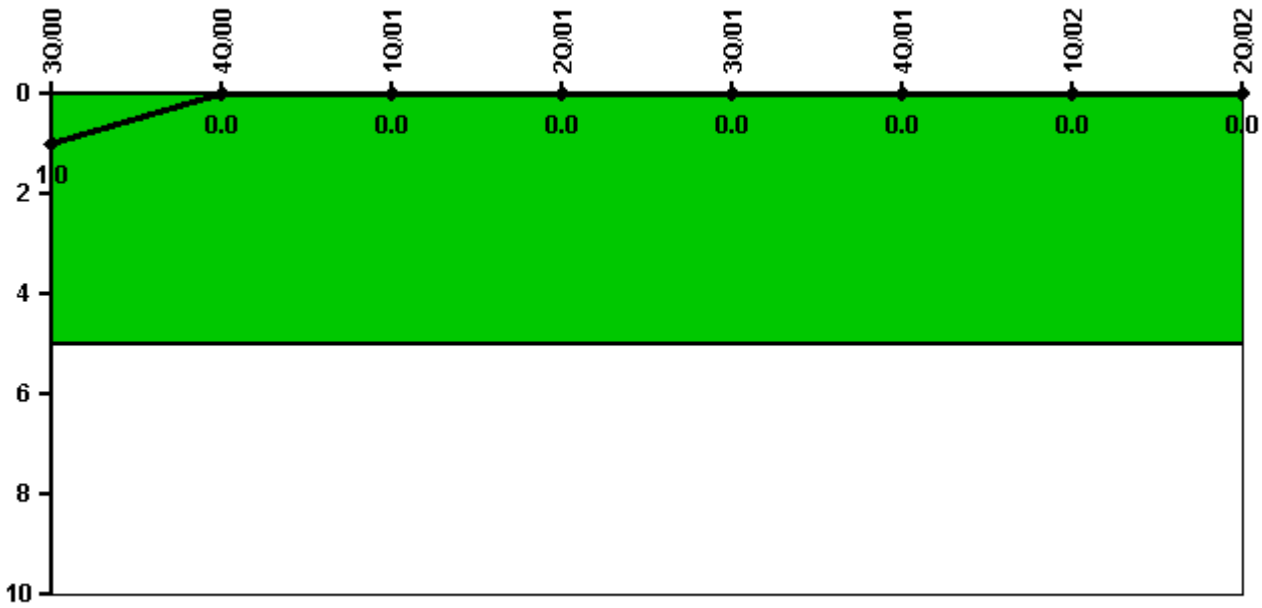


Thresholds: White > 5.0

Notes

Safety System Functional Failures (PWR)	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Safety System Functional Failures	0	0	0	0	0	0	0	0
Indicator value	1	0	0	0	0	0	0	0

Licensee Comments: none

Reactor Coolant System Activity

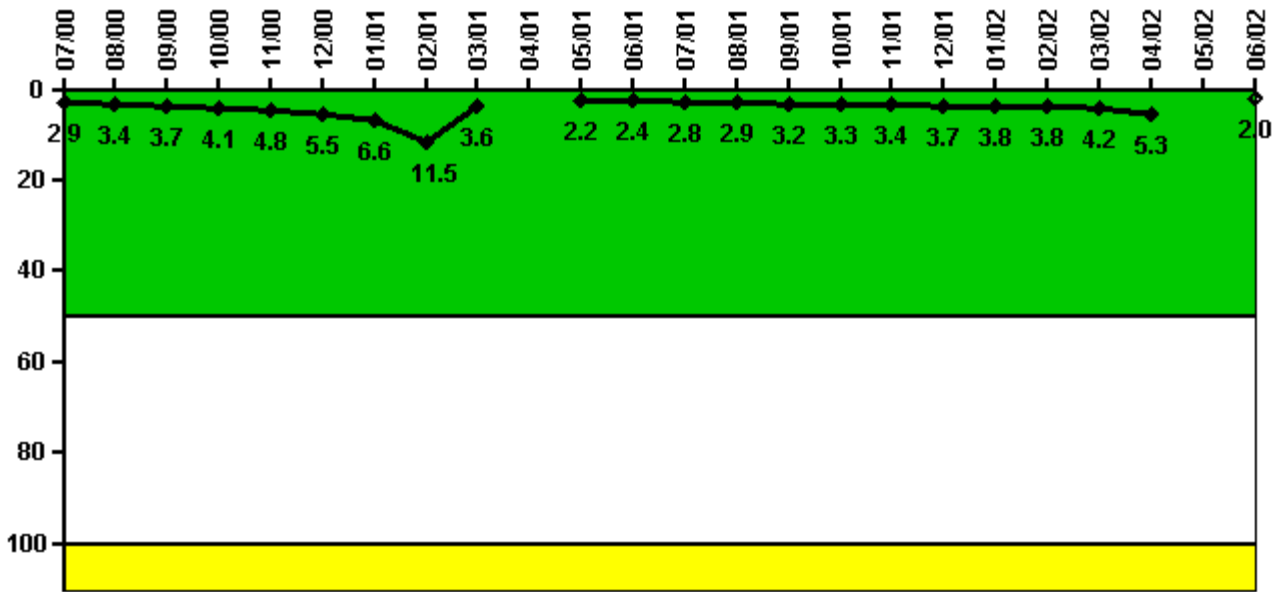

Thresholds: White > 50.0 Yellow > 100.0


Notes

Reactor Coolant System Activity	7/00	8/00	9/00	10/00	11/00	12/00	1/01	2/01	3/01	4/01	5/01	6/01
Maximum activity	0.029200	0.033600	0.037100	0.040900	0.047600	0.055400	0.065800	0.115000	0.036100	N/A	0.022200	0.024200
Technical specification limit	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Indicator value	2.9	3.4	3.7	4.1	4.8	5.5	6.6	11.5	3.6	N/A	2.2	2.4

Reactor Coolant System Activity	7/01	8/01	9/01	10/01	11/01	12/01	1/02	2/02	3/02	4/02	5/02	6/02
Maximum activity	0.027900	0.029100	0.032400	0.032700	0.034100	0.037200	0.037700	0.038400	0.041500	0.053100	N/A	0.020000
Technical specification limit	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Indicator value	2.8	2.9	3.2	3.3	3.4	3.7	3.8	3.8	4.2	5.3	N/A	2.0

Licensee Comments: none

Reactor Coolant System Leakage

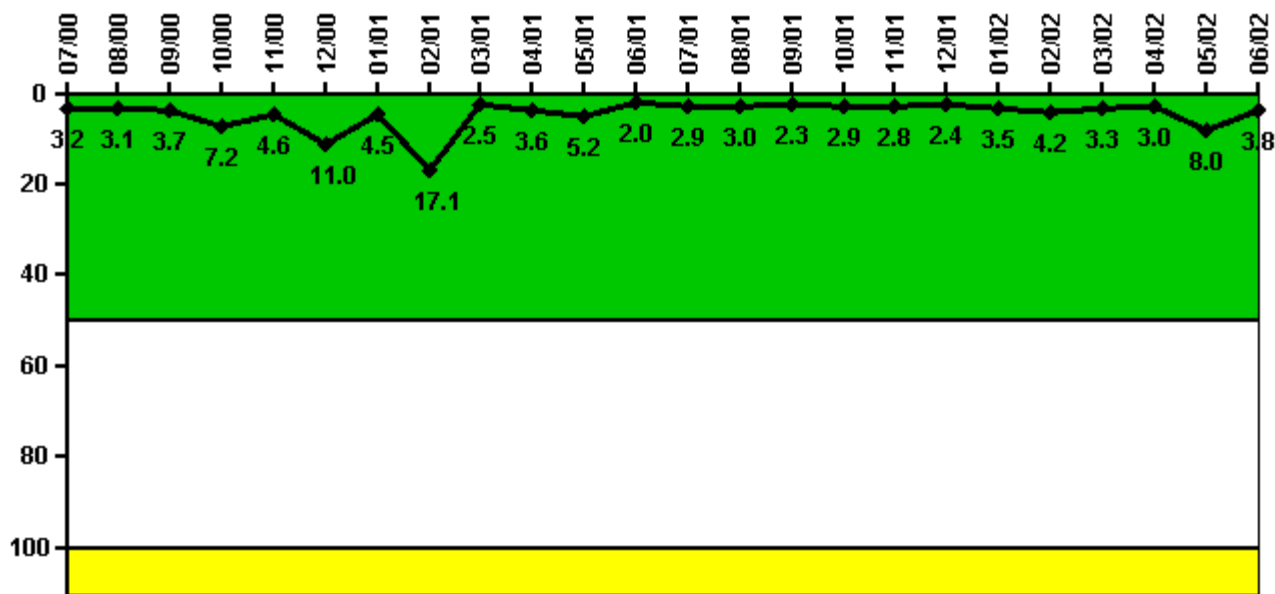

Thresholds: White > 50.0 Yellow > 100.0


Notes

Reactor Coolant System Leakage	7/00	8/00	9/00	10/00	11/00	12/00	1/01	2/01	3/01	4/01	5/01	6/01
Maximum leakage	0.322	0.310	0.370	0.720	0.460	1.100	0.445	1.710	0.250	0.360	0.522	0.198
Technical specification limit	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
Indicator value	3.2	3.1	3.7	7.2	4.6	11.0	4.5	17.1	2.5	3.6	5.2	2.0

Reactor Coolant System Leakage	7/01	8/01	9/01	10/01	11/01	12/01	1/02	2/02	3/02	4/02	5/02	6/02
Maximum leakage	0.293	0.297	0.226	0.290	0.275	0.239	0.346	0.422	0.332	0.298	0.802	0.380
Technical specification limit	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
Indicator value	2.9	3.0	2.3	2.9	2.8	2.4	3.5	4.2	3.3	3.0	8.0	3.8

Licensee Comments: none

Drill/Exercise Performance

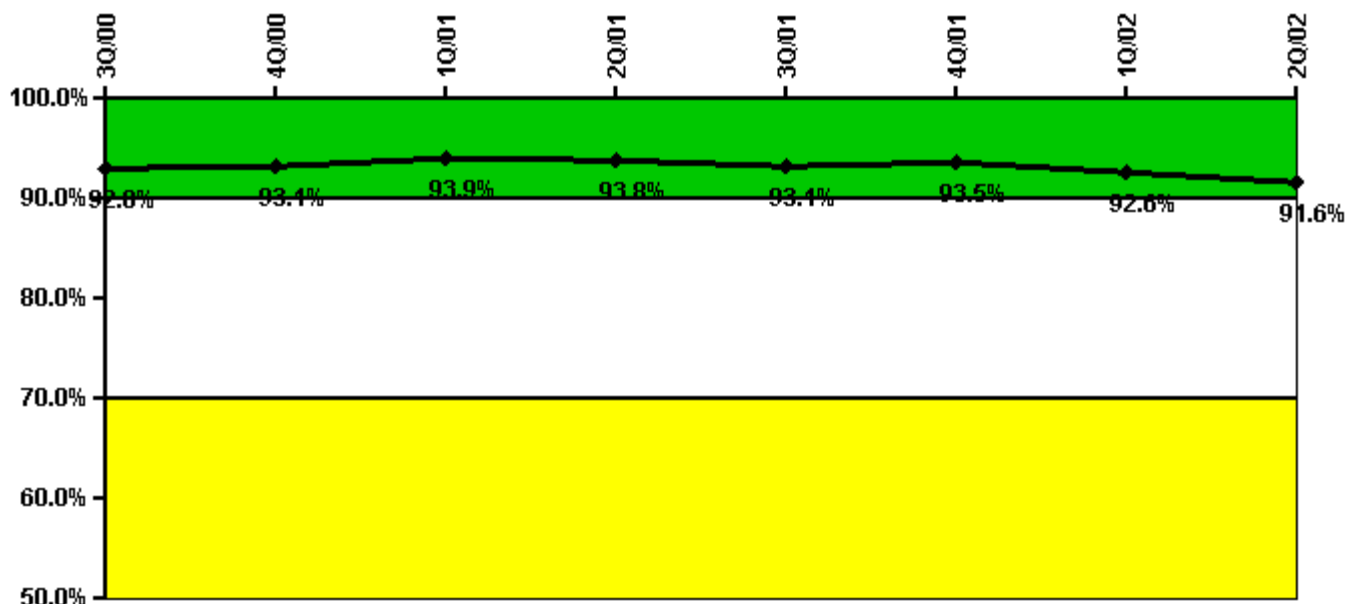


Thresholds: White < 90.0% Yellow < 70.0%

Notes

Drill/Exercise Performance	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Successful opportunities	12.0	14.0	8.0	6.0	11.0	21.0	59.0	21.0
Total opportunities	16.0	14.0	8.0	8.0	12.0	22.0	64.0	22.0
Indicator value	92.8%	93.1%	93.9%	93.8%	93.1%	93.5%	92.6%	91.6%

Licensee Comments: none

ERO Drill Participation

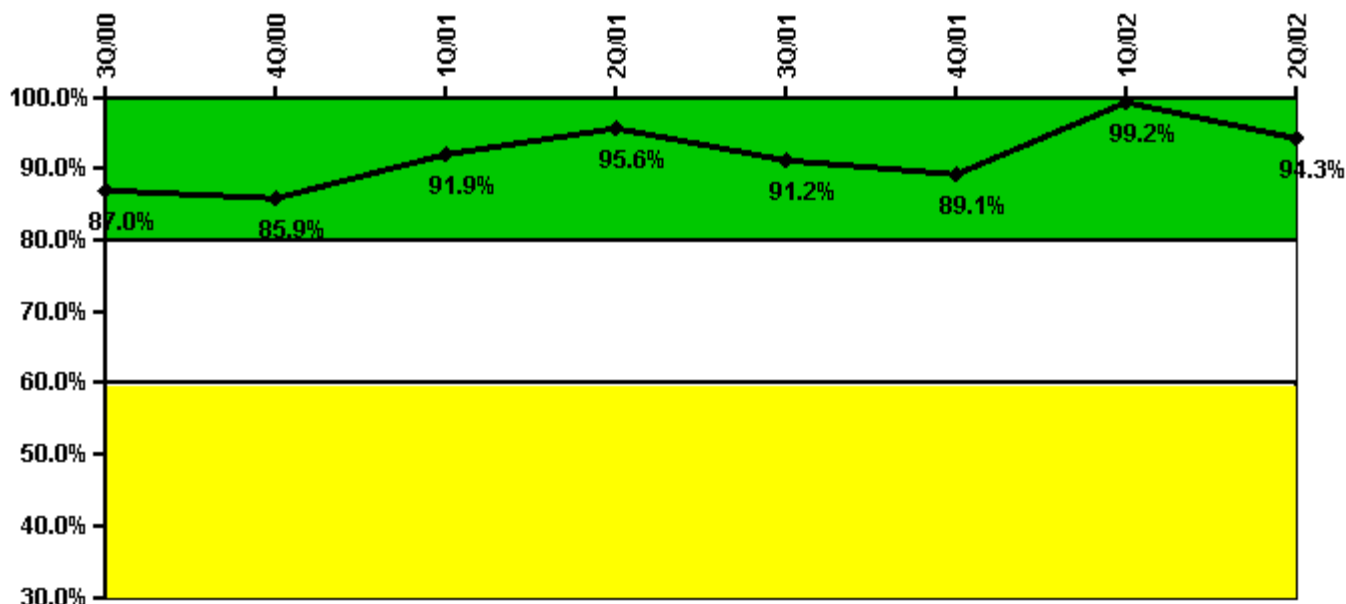


Thresholds: White < 80.0% Yellow < 60.0%

Notes

ERO Drill Participation	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Participating Key personnel	80.0	79.0	91.0	86.0	103.0	106.0	117.0	116.0
Total Key personnel	92.0	92.0	99.0	90.0	113.0	119.0	118.0	123.0
Indicator value	87.0%	85.9%	91.9%	95.6%	91.2%	89.1%	99.2%	94.3%

Licensee Comments: none

Alert & Notification System

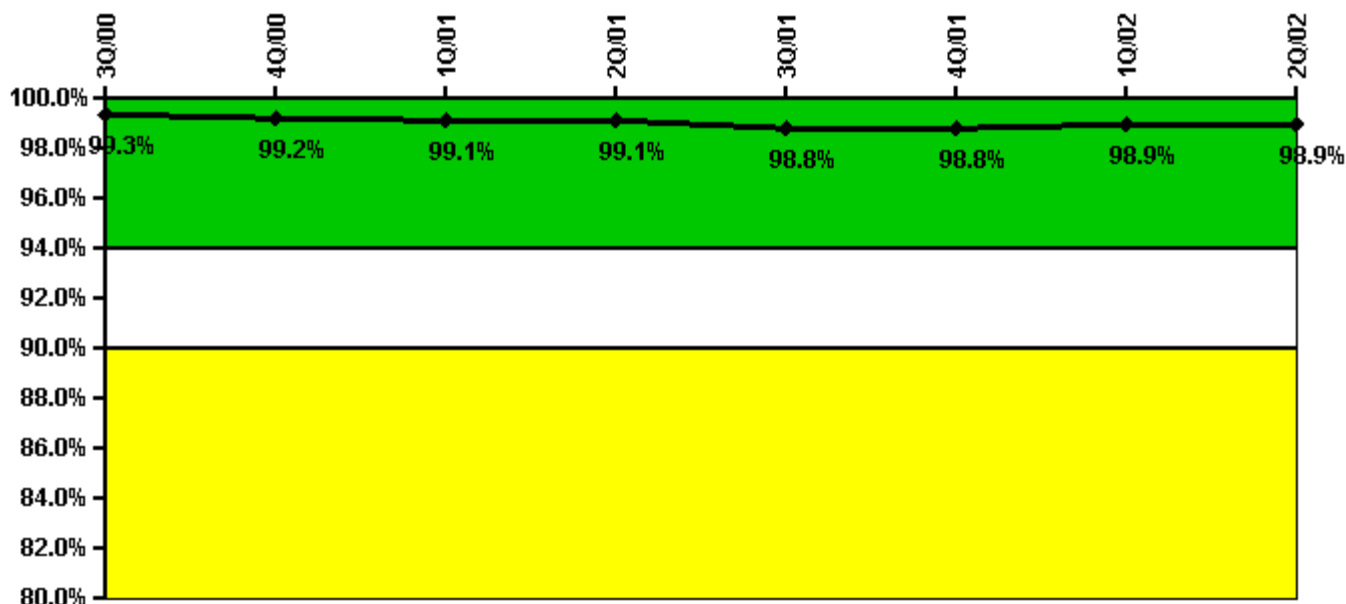


Thresholds: White < 94.0% Yellow < 90.0%

Notes

Alert & Notification System	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Successful siren-tests	799	801	699	803	789	803	701	803
Total sirens-tests	808	808	707	808	808	808	707	808
Indicator value	99.3%	99.2%	99.1%	99.1%	98.8%	98.8%	98.9%	98.9%

Licensee Comments: none

Occupational Exposure Control Effectiveness

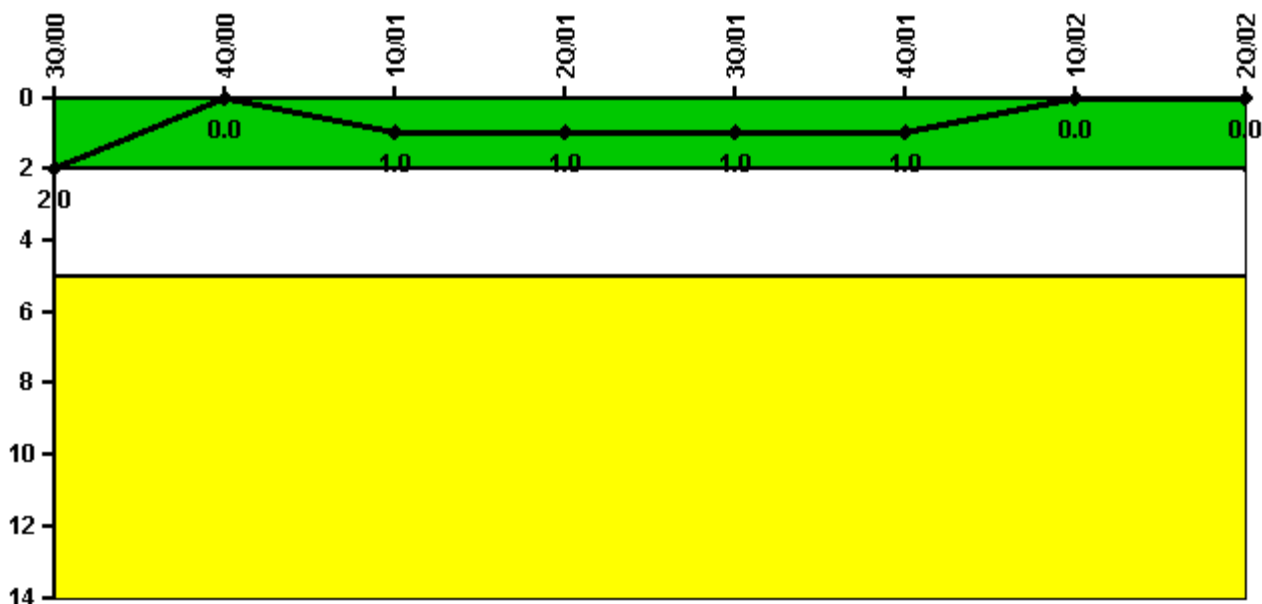

Thresholds: White > 2.0 Yellow > 5.0

Notes

Occupational Exposure Control Effectiveness	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
High radiation area occurrences	0	0	0	0	0	0	0	0
Very high radiation area occurrences	0	0	0	0	0	0	0	0
Unintended exposure occurrences	0	0	1	0	0	0	0	0
Indicator value	2	0	1	1	1	1	0	0

Licensee Comments: none

RETS/ODCM Radiological Effluent




Thresholds: White > 1.0 Yellow > 3.0

Notes

RETS/ODCM Radiological Effluent	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
RETS/ODCM occurrences	0	0	0	0	0	0	0	0
Indicator value	0	0	0	0	0	0	0	0

Licensee Comments: none

Protected Area Security Performance Index

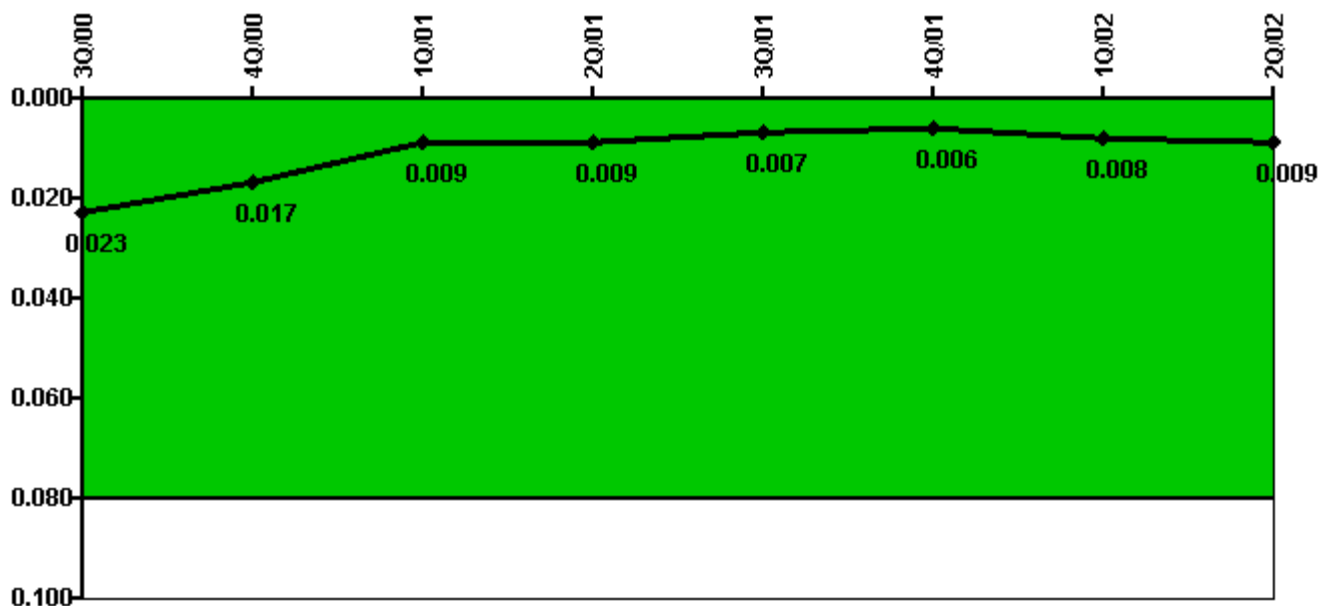

Thresholds: White > 0.080

Notes

Protected Area Security Performance Index	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
IDS compensatory hours	117.40	64.30	28.10	10.30	38.20	32.60	80.60	44.60
CCTV compensatory hours	0	0	0	1.2	20.9	0	0	0
IDS normalization factor	1.00	1.45	1.45	1.45	1.45	1.45	1.45	1.45
CCTV normalization factor	1.5	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Index Value	0.023	0.017	0.009	0.009	0.007	0.006	0.008	0.009

Licensee Comments: none

Personnel Screening Program



Thresholds: White > 2.0 Yellow > 5.0

Notes

Personnel Screening Program	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Program failures	0	0	0	0	0	0	0	0
Indicator value	0	0	0	0	0	0	0	0

Licensee Comments: none

FFD/Personnel Reliability



Thresholds: White > 2.0 Yellow > 5.0

Notes

FFD/Personnel Reliability	3Q/00	4Q/00	1Q/01	2Q/01	3Q/01	4Q/01	1Q/02	2Q/02
Program Failures	0	0	0	0	0	0	0	0
Indicator value	0	0	0	0	0	0	0	0

Licensee Comments: none

▲ [PI Summary](#) | [Inspection Findings Summary](#) | [Reactor Oversight Process](#)

Last Modified: July 31, 2002