

Laboratories for the 21st Century: Case Studies

Case Study Index

Laboratory Type

- Wet lab
- Dry lab
- Clean room

Construction Type

- New
- Retrofit

Type of Operation

- Research/development
- Manufacturing
- Teaching
- Chemistry
- Biology
- Electronics

Service Option

- Suspended ceiling
- Utility service corridor
- Interstitial space

Featured Technologies

- Fume hoods
- Controls
- Mechanical systems
- Electrical loads
- Water conservation
- Renewables
- Sustainable design/
planning
- On-site generation
- Daylighting
- Building commissioning

Other Topics

- Diversity factor
- Carbon trading
- Selling concepts to
stakeholders
- Design process

LEED Rating

- Platinum
- Gold
- Silver
- Certified



Patrick Corkery/PIX14916

NATIONAL RENEWABLE ENERGY LABORATORY, SCIENCE AND TECHNOLOGY FACILITY, GOLDEN, COLORADO

Introduction

The U.S. Department of Energy's National Renewable Energy Laboratory (NREL) has added a light-filled, energy-efficient new research facility to its campus in Golden, Colorado. Completed in August 2006, NREL's 71,347-ft² Science and Technology Facility (S&TF) houses nine laboratories for advanced materials synthesis, analysis, characterization, and support, as well as a 10,170-ft² process development and integration laboratory (PDIL).

As a Laboratories for the 21st Century (Labs21) partner, NREL set aggressive goals for energy savings, daylighting, and achieving a LEED rating of Gold or better (through the U.S. Green Building Council's Leadership in Energy and Environmental Design program). Through the Labs21 program, staff worked with the design team to analyze, design, review, and implement the energy-saving features highlighted in this case study. Staff also coordinated documentation for the LEED submittal, oversaw an analysis to validate the project's energy simulation, and prepared documentation to showcase the project through design awards and other venues.



U.S. Department of Energy
Energy Efficiency and Renewable Energy
Federal Energy Management Program



The S&TF laboratories are designed to accelerate renewable energy process and manufacturing research for both near-term technologies, such as thin-film solar cells, and next-generation technologies, such as organic and nanostructured solar cells. Energy costs for this building are estimated through computer simulation to be 41% lower than those of a comparable facility designed to American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE) standard 90.1 (1999), for an estimated savings of \$96,000 per year. The estimated annual energy savings is 10,648 million Btu. The cost of the Labs21 contribution to the project was \$67,000 over 3 years. Given that the Labs21 program had a significant influence on the outcome of this project, we estimate that at least 30% of the expected annual savings can be attributed to Labs21 support. This represents a 2.3-year simple payback. Energy-saving features include these:

- Variable-air-volume supply and exhaust systems for all laboratory and office areas
- Fan-coil units in laboratory spaces
- Low-flow chemical hoods and laminar-flow fume hoods
- Staged exhaust fans brought on according to building exhaust needs
- Exhaust air energy recovery and process cooling water energy recovery
- Indirect/direct evaporative cooling
- Expansion of the central plant in the adjacent building with a high-efficiency chiller and boiler to serve the S&TF load
- Underfloor air-distribution system in the office area with demand-based ventilation controls using carbon dioxide detection and monitoring
- 100% daylighting in office areas, good daylighting in laboratories, and lighting control throughout.

This case study is one in a series produced by Labs21, a joint program of the U.S. Environmental Protection Agency (EPA) and the U.S. Department of Energy (DOE) geared toward architects and engineers who are familiar with laboratory buildings. This program encourages the design, construction, and operation of safe, sustainable, high-performance laboratories.

Project Description

The S&TF is a two-story, 71,347-gross ft² (44,800 net ft²) laboratory building completed in 2006 at a total construction cost of \$22.7 million (\$318/gross ft²) and a total project cost of \$29.8 million. The architect and the

.....
"I applaud the thinking that went into it and the flexibility and adaptability of the design that emerged."
 Energy Secretary Samuel W. Bodman

.....
 mechanical, electrical, plumbing and fire protection engineers were the SmithGroup of Phoenix, Arizona. Civil Engineering was provided by Martin-Martin; landscape design was by Wenk Landscape Architects. The structural engineer was Paul Koehler Leffler, and the general contractor was M.A. Mortenson.

The ground floor includes laboratories, office space, and a lobby. The second floor houses laboratories and includes the PDIL. An elevated bridge connects the second floor service corridor to the adjacent 117,000-gross ft² Solar Energy Research Facility (SERF). The third level houses the bulk of the S&TF's mechanical support functions, including laboratory exhaust fans. The exterior consists primarily of precast concrete panels and metal panels at the entry that complement the exterior of the adjacent building.

Seven "interaction spaces" encourage informal discussions among researchers. Each space features seating, a white board, access to a local area computer network, and views to open space outside.

The building's centerpiece is the 10,170-ft² PDIL. It was designed to accommodate a new class of deposition, processing, analysis, and characterization tools (see Figure 1). These flexible tools can be integrated into prototype processes for developing thin-film and nanoscale devices and low-cost, high-throughput manufacturing processes that are not yet available in the United States. The processes can be applied to thin-film photovoltaics (PV), hydrogen nanostructures for production and storage, thin-film window coatings, and solid-state lighting. The intent is to reduce the risk and cost to industry associated with these processes.

The PDIL allows researchers to move samples between large tools under vacuum, which prevents the samples from coming in contact with airborne contaminants. Researchers can bring samples under vacuum to the lab in mobile transport pods.

Layout and Design

Laboratory spaces were designed around a common module to provide flexibility and distribution of utilities and services. The selected planning module is 10 ft x 27 ft. Structural bays allow an appropriate span for the second floor to reduce vibrations. Designers arranged building spaces to reflect the relationship of labs to one another,



Brent Nelson, NREL/PIX 14840

Figure 1. Interior of the PDIL

to offices, and to support spaces. The need to use toxic and flammable materials in some labs also influenced the plan. A space breakdown is shown in Table 1.

On the first level of the two-story laboratory portion of the building are labs that are more sensitive to vibration and noise and need to be darkened. Lab spaces were organized along a service corridor nearly identical to that of the second floor. Both floor plans are shown in Figure 2.

The rectangular PDIL is centrally located on the second-floor ground level (because the site slopes) and along support laboratories to improve operational efficiency and make future expansions easier. Large second-floor labs required the largest available floor plate, a direct

connection to the SERF for service, and proximity to the PDIL. Vibrations are controlled by means of a structural slab beneath the PDIL. Both floors feature daylighting and exterior views.

The office area is a structurally separate one-story module east and south of the labs. Advantages of this design include lower cost; enhanced safety due to separation of staff from labs using hazardous materials; and allowing daylight to enter offices from both the south and north sides.

Utility Servicing

Laboratories are organized along a central service corridor that supports them on each floor, like a spine supporting limbs. The service corridor is required to distribute hazardous production materials (HPM) to the labs because the S&TF is classified as high hazard occupancy 5 (H5) under the International Building Code (IBC). The service corridor accommodates gas lines, water lines, exhaust and supply ductwork, electrical, and signal system distribution to the back of the labs. The front of each lab includes access to an exit corridor that links to the rest of the building. As shown in Figure 2, the service corridor includes notched areas for heat- and noise-producing equipment. An in-floor utility trench allows this equipment to be connected to equipment inside the labs.

Design Approach

The building was conceptually designed and proposed for funding in 2001. As a first step in the design process, NREL research staff helped determine space requirements for each lab. A design charrette held in 2001 resulted in a recommendation to redesign the original one-story building as a two-story facility for greater sustainability, a smaller building footprint, and more efficient heating, ventilating, and air-conditioning (HVAC). The two-story conceptual design was completed in early 2002.

A request for proposals (RFP) was then issued to select the architectural and engineering (A/E) firm. The RFP included six selection criteria; the first two were weighted the highest and the last four were weighted equally:

- Past experience in integrating safety into a building design
- Demonstrated experience in designing to project technical requirements
- Demonstrated capability to design to the project budget



Table 1. Science and Technology Facility Space Breakdown

(Net ft², unless otherwise noted)

Function	Size (ft ²)	Percentage (1)
Offices and office support areas	10,425	23%
Laboratory support space	22,933	51%
Laboratory space	11,442	26%
Total net ft ²	44,800	100%
Other (2)	26,547	
Total gross ft ²	71,347	

Notes:

1. The percentage shows a breakdown of net ft² only. Net ft² equals gross ft² minus "other."
2. "Other" includes circulation, toilets, stairs, elevator shafts, mechanical and electrical rooms and shafts, and structural elements like columns. The net-to-gross-ft² ratio is 63% .

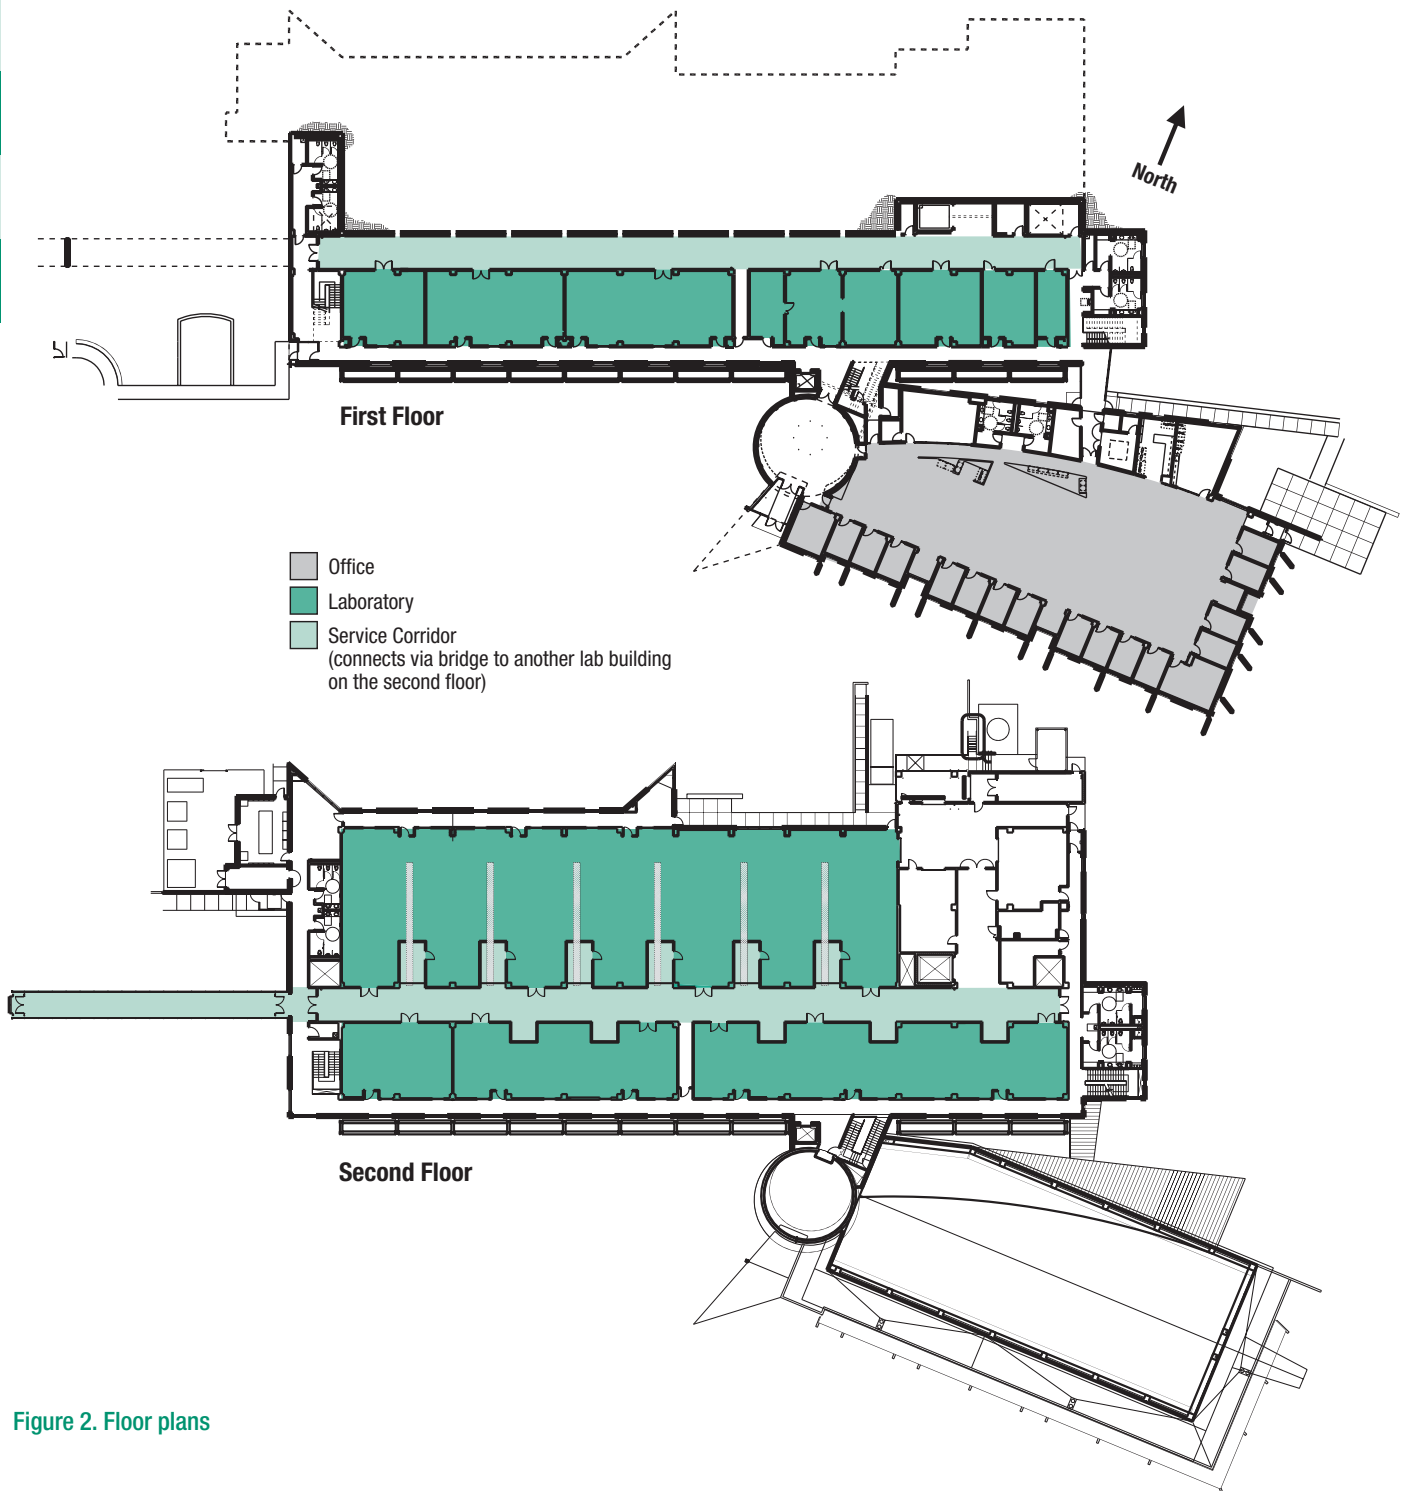


Figure 2. Floor plans

- Total price of design services for this procurement
- Demonstrated ability to incorporate “green building technologies” as defined in the LEED rating system, into design solutions
- Demonstrated ability to develop an architectural image consistent with the project site and the owner’s identity.

After a nationwide search, the selection team chose the SmithGroup team. The final design was completed in 2003, and construction began in early 2005.

Technologies Used

Site

The S&TF is oriented along an east-west axis so that windows on the north and south facades can provide natural lighting. A butterfly roof over the office module collects stormwater and directs it to detention ponds with xeriscape landscaping. The construction contractor recycled more than 80% of the construction waste by weight. In addition, a portion of the excavation soils were retained and used to restore a previously disturbed portion of the site.

Per the Labs21 Environmental Performance Criteria (the basis for the LEED Application Guide for Laboratories), NREL contracted for an exhaust effluent study using wind tunnel modeling to define the impact of emissions from exhaust sources at the building intake and other sensitive locations. The study suggested minimum acceptable design parameters in terms of exhaust stack height, exit velocity, volume flow and exhaust, and location of intake air. The recommendations were used in designing the air intake location and exhaust system.

Energy Efficiency

The energy efficiency features of the S&TF were designed to provide a 41% percent reduction in energy cost in comparison to a standard laboratory building. These features include a variable-air-volume (VAV) supply and exhaust system, variable-frequency motor drives, efficient fume hoods and fans, energy recovery, efficient heating and cooling equipment, and underfloor air distribution.

VAV Supply and exhaust system requirements. The minimum occupied air flow is 1 cubic foot per minute (1 cfm)/ft² as required by IBC H5 occupancy. The VAV system allows more supply air as needed for fume hoods and other exhaust devices.

The facility's chemical fume hoods feature an automatic sash closer to ensure that the sash is open no more than 18 in. when operating. An ASHRAE 110 test verified that the hood is performing to the recommended level by ANSI Z9.5-2003.

In laminar-flow hoods, HEPA-filtered air is introduced to protect the product and air is drawn in through the sash to protect the user. Laminar-flow hoods are a big energy user at NREL, so the S&TF hoods were designed to have two-speed blower motor control. When the sash is closed and no product is being tested, this signals the blower motor to operate at low speed and the VAV system to operate at a low set point volume, reducing airflow by 40%. The ASHRAE 110 test verified the hoods' containment performance.

Exhaust fans. The building's six exhaust stacks are on the southeast side. Each is connected to a dedicated direct-drive 20,000-cfm exhaust fan. Fans are staged on and off to maintain an exhaust plenum negative static pressure set point of approximately 1.5 in. water column. The fans are started in sequence until they exceed the set point; then, the bypass damper in the exhaust plenum modulates open to maintain the set point pressure as the system reacts to varying lab conditions. When the bypass damper modulates to 80% fully open, an exhaust fan shuts down and the bypass damper modulates toward closed to maintain the negative set point pressure. This saves

considerable energy in comparison to running a full-capacity fan and large bypass damper in part-load conditions.

Fan coils. Fan coil units provide heating and cooling directly to laboratory spaces, nearly eliminating the need for inefficient reheating systems. Fan coils allow the ventilation system to supply only the tempered air required for minimum ventilation (1 cfm/ft²) and makeup air for exhaust devices. Fan coils provide cooling for areas with high internal heat gain.

Energy recovery. A runaround-coil system with an estimated 63% sensible effectiveness reduces the heating and cooling requirements associated with conditioning ventilation air in labs. The system recovers energy from exhaust air to precondition supply air and uses waste heat from the process water loop to preheat ventilation air. This also provides "free" cooling for process cooling water when the outside temperature is below 60°F, for savings in both chiller energy and cooling tower water.

Efficient heating and cooling. The S&TF uses a high-efficiency condensing boiler and variable-speed chiller, indirect evaporative cooling, and a heat exchanger that allows cooling water to bypass chillers and be cooled directly by the cooling tower. Direct evaporative cooling cools offices and provides cooling and humidity control in labs. A modulating indirect gas-fired heating section in makeup air units heats makeup air for labs and reduces hot water piping needs. The condensing boiler provides heat for offices and fan coil units in labs.

Underfloor air distribution. The offices are conditioned by a VAV underfloor air distribution system. It provides fan energy savings and increases the number of hours when the economizer and evaporative cooling can be used by raising the supply air temperature. It also minimizes overhead ductwork.

Simple payback calculations for these and other efficiency features are shown in Table 2. Note the savings resulting from VAV is included in the base case building.

Water Efficiency

In addition to using a stormwater detention system for irrigation water, the building contains low-water-consuming fixtures, such as ultra-low-flow (0.5 gallon per flush) urinals. The cooling towers operate at 6 cycles of concentration, reducing makeup water requirements in comparison to those of a tower operating at more conventional cycles of concentration (e.g., 2 or 3). The cycles of concentration represents the relationship between the concentration of dissolved solids in the bleed-off to the concentration in makeup water. Increasing the cycles of concentration of the tower from 3 to 6 reduces make-up water consumption by a factor of 4.




Table 2. Simple Payback Calculations

Measure	Incremental Cost (\$)	Savings (\$/yr)	Payback Years
VAV only	\$300,000	\$92,120	3.3
Energy & recovery	\$80,000	\$36,487	2.2
Lab supplementary cooling & raised primary supply air temperature	\$150,000	\$14,873	10.1
Overhangs & glazing	*	\$4,400	NA
Lighting power density	*	\$5,694	NA
Daylight controls	\$10,000	\$4,111	2.4
Office underfloor air & evaporative cooling	\$20,000	\$3,103	6.4
Chiller plant upgrades	\$33,000	\$12,607	2.6
Tower free cooling	\$60,000	\$6,754	8.9
Process CHW for preheating	\$48,000	\$4,752	10.1
Lab AHU evaporative section	\$20,000	\$3,758	5.3
Fan pressure drops	*	\$19,064	NA
Fan staging	\$37,500	\$4,691	8.0
Boiler & DHW improvements	\$24,000	\$8,972	2.7

Note: NREL identified first-cost premiums using actual estimates and RSMMeans data.

AHU = air-handling unit; CHW = commercial hot water; DHW = domestic hot water; ER = energy recovery.

* The added first cost could not be broken out separately.

Modeling Energy Performance

NREL conducted a detailed energy modeling study to compare the S&TF's building energy performance with that of three reference case buildings: the LEED 2.1/ASHRAE 90.1-1999 energy cost budget; Labs21 Modeling Guidelines (www.labs21century.gov/pdf/ashrae_v1_508.pdf); and the LEED 2.2/ASHRAE 90.1-2004, Appendix G, Performance Rating Method. Energy cost savings for this building were 41% in comparison to the ASHRAE 90.1-1999 baseline, 46% in comparison to the Labs21 Modeling Guidelines, and 28% in comparison to the ASHRAE 90.1-2004 baseline. The big difference in the 2004 baseline is the inclusion of plug loads.

Indoor Environmental Quality

The goal was to provide 100% daylighting in first-floor office spaces between 10:00 a.m. and 2:00 p.m. and for daylighting to meet 50% of the labs' lighting needs. The daylighting system includes north- and south-facing windows and clerestories coupled with automated lighting controls, which dim or turn off electric lights as needed. The performance of the daylighting system was simulated to verify that the performance objectives would be met. Figure 3 shows clerestory windows in an office area.

Commissioning

NREL contracted directly with a third-party commissioning authority to work with the A/E project manager, construction contractor team, and NREL project manager to commission the building during each of these phases: Schematic Design and Design Development, Construction Documents, Construction and Acceptance, and Warranty. Commissioning at the Construction and Acceptance phase includes startup and testing of selected equipment. For the Warranty phase, it includes coordinating required seasonal or deferred testing and performance evaluations and reviewing the building 10 months after occupancy.

The commissioning authority evaluated the central automation systems; laboratory air supply and exhaust systems and controls; life safety systems; the toxic gas monitoring system; central plant systems; process and specialty gas systems, including hazardous production materials; all HVAC equipment; process cooling water systems, deionized water, back-up power systems, lighting control systems, and domestic hot water systems. This cost approximately 0.5% of the total construction budget, or about \$1.60/gross ft² of building area.

Building Metrics

A comparison between S&TF's energy use based on design calculations and an hourly computer simulation



Craig Ramdock, AIA, RNL Design/PX14841

Figure 3. S&TF interior office area



model is shown in Table 3 (which will be updated to include measured performance data after 1 year of operation). The biggest difference between the two methods for calculating energy use is the value for ventilation air. Calculations are based on nameplate values and assumed full loads. They follow Labs21 benchmark procedures and are included for comparison to other Labs21 data sets. The simulation model predicts loads based on a schedule and the typical 1 cfm/ft² of lab ventilation rather than design capacities and is assumed to be more accurate.

Measurement and Evaluation Approach

Continuous metering and monitoring equipment will measure various systems through the life of the building. Mechanical systems monitored include constant and variable motor loads, variable-frequency drive operations, chiller efficiency at variable loads (kW/ton), cooling load, air and water economizer and heat recovery cycles, air distribution static pressures, ventilation air volumes, and boiler efficiency.

Table 3. Building Metrics for the S&TF

System	Key Design Parameters	Annual Energy Usage (based on design data calculations)	Annual Energy (based on simulation) ⁽¹⁾
Ventilation (sum of wattage of all the supply and the exhaust fans)	Supply= 1.44 W/cfm Exhaust = 0.75 W/cfm Total =1.09 W/cfm ⁽²⁾ 1.4 cfm/gross ft ² ; 2.2 cfm/net ft ² , and 3.15 cfm/gross ft ² of labs ⁽³⁾	25.6 kWh/gross ft ² ⁽⁴⁾	9.6 kWh/gross ft ²
Cooling plant	400 tons 0.449 kW/ton	7.3 kWh/gross ft ² ⁽⁵⁾	4.8 kWh/gross ft ²
Lighting	Varies from 1.45 W/gross ft ² in labs to 0.86 W/ft ² in open offices	2.3 kWh/gross ft ² ⁽⁶⁾	2.3 kWh/gross ft ²
Process/Plug	4.70 average W/gross ft ² ; range varies from 0-10 W/gross ft ²	19.8 kWh/gross ft ² ⁽⁷⁾	21.3 kWh/gross ft ²
Heating plant temperature	95% efficient at 140°F supply	91.9 kBtu/gross ft ² (as per simulation)	91.9 kBtu/gross ft ² (as per simulation)
Total		55.0 kWh/gross ft ² /yr (estimated electricity only) 187.6 kBtu/gross ft ² for electricity only ⁽⁸⁾ 279.5 kBtu/gross ft ² /yr for electricity and gas	38.1 kWh/gross ft ² /yr for electricity only 131.5 kBtu/gross ft ² for electricity only ⁽⁸⁾ 223.4 kBtu/gross ft ² for electricity and gas \$3.33/gross ft ² estimated cost for electricity and gas ⁽⁹⁾

- Notes:
- Simulation study done by Architectural Energy Corporation, *Energy Modeling Analysis and Baseline Performance Comparison for NREL Science and Technology Facility*, June 10, 2006.
 - 180 hp (supply) plus 100 hp (exhaust) x 746 W/hp/93,000 cfm (supply) + 100,000 cfm (exhaust) = 1.09 W/cfm.
 - 100,000 cfm (total cfm based on exhaust)/44,800 net ft² = 2.2 cfm/net ft²; 100,000 cfm/71,347 gross ft² = 1.4 cfm/gross ft²; 100,000 cfm/31,700 net ft² of labs = 3.15 cfm/net ft² of labs.
 - 0.75 W/cfm x 100,000 cfm/gross ft² (exhaust) + 93,000 cfm/gross ft² x 1.44 W/cfm (supply)/71,347 ft² x 8760 hours/1000 = 25.6 kWh/gross ft² (40.6 kWh/net ft².)
 - 0.449 kW/ton x 400 tons x 2890 hours/71,347 gross ft² = 7.27 kWh/gross ft² (assumes cooling runs 33% of the hours in a year).
 - 1.11 W/gross ft² (weighted average) x 2080 hours/1000 = 2.3 kWh/gross ft². (In other case studies, it was assumed that lights are on 87.2 hours/week. In this case, because of the aggressive daylighting strategy, the assumption is that lights are on 40 hours per week.)
 - 4.70 W/gross ft² (weighted average) x 0.80 x 5256 hours/1000 = 19.78 kWh/gross ft². (The lab power density ranges from 0-10 W/ft² and the average office power density is 1.0 W/ft². (Assumes that 80% of all equipment is operating 60% of the hours in a year.)
 - Estimated data are presented in site Btu (1 kWh = 3412 Btu). To convert to source Btu, multiply site Btu for electricity by 3. *Note:* Golden, CO, has approx. 6020 Base 65°F heating degree-days and 679 Base 65°F cooling degree-days (based on Boulder, CO, weather data).
 - 2005 utility rate information: natural gas at \$0.75/therm plus a \$75.00 monthly charge; electricity at 0.029 per kWh plus \$13.76/kW (summer) and \$12.52/kW (winter) plus \$130.00/month service charge. Cost estimate based on simulation.



Electrical systems are measured by 9 electric sub-meters. The meters will identify 4 types of load in the S&TF including 1) lighting, 2) lab process load, 3) office load, and 4) building load. Domestic water and natural gas usage is also metered.



The central building automation system provides measured or calculated values for mechanical systems. It can also monitor some equipment and show trends over time. Advanced electric meters record electrical energy, demand, and power quality. Data are stored at the remote meter computer and can be accessed through the Internet.



Summary

NREL partnered with Labs21 to make the S&TF a model laboratory for the future. The S&TF incorporates many energy-efficient and sustainable design features, such as VAV, exhaust fans in sequence, fan coil units, energy recovery, efficient heating and cooling, underfloor air distribution in offices, daylighting, water-saving strategies for irrigation, and process cooling. The S&TF saves significant amounts of energy and water and provides a superior work environment for employees. NREL will continue to monitor and document the building's performance so others can learn from this experience.



Laboratories for the 21st Century
U.S. Environmental Protection Agency
Office of Administration and Resources Management
www.labs21century.gov



In partnership with the
U.S. Department of Energy
Energy Efficiency and Renewable Energy
Bringing you a prosperous future where energy
is clean, abundant, reliable, and affordable.
<http://www.eere.energy.gov/>

Federal Energy Management Program
www.eere.energy.gov/femp

Prepared at the
National Renewable Energy Laboratory
A DOE national laboratory

This publication is subject to Government rights.

DOE/GO-102007-2340
March 2007

Printed with a renewable-source ink on paper containing at least 50% wastepaper, including 10% postconsumer waste.

Acknowledgements

This case study would not have been possible without the energy modeling analysis done by Fred Porter of Architectural Energy Corporation. The study was written by Nancy Carlisle and Otto Van Geet, NREL, and reviewed by Matt Graham, DOE Golden Field Office; Paul Mathew, Ph.D., Lawrence Berkeley National Laboratory; and Sheila Hayter, P.E., Pete Sheldon, Ph.D., and Eric Telesmanich, NREL. Paula Pitchford was the editor and Susan Sczepanski the graphic artist (both of NREL).

For More Information

On the NREL Science and Technology Facility:

Otto Van Geet, P.E.
National Renewable Energy Laboratory
1617 Cole Boulevard
Golden, CO 80401
303-384-7369
otto_vangeet@nrel.gov

On Laboratories for the 21st Century:

Will Lintner, P.E.
U.S. Department of Energy
Federal Energy Management Program
1000 Independence Ave., S.W.
Washington, DC 20585
202-586-3120
william.lintner@ee.doe.gov

Daniel Amon, P.E.
U.S. Environmental Protection Agency
1200 Pennsylvania Ave., N.W.
Washington, DC 20460
202-564-7509
amon.dan@epa.gov

Nancy Carlisle, A.I.A.
National Renewable Energy Laboratory
1617 Cole Blvd.
Golden, CO 80401
303-384-7509
nancy_carlisle@nrel.gov

See also www.labs21century.gov/toolkit/bp_guide.htm
for these best practice guides:

Daylighting in Laboratories

Minimizing Reheat Energy Use in Laboratories

*Modeling Exhaust Dispersion for Specifying Exhaust/
Intake Designs*

Water Efficiency for Laboratories