

A0003747

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT			1. CONTRACT ID CODE	PAGE OF PAGES 1 4
2. AMENDMENT/ MODIFICATION NO. A00004	3. EFFECTIVE DATE 12/28/95	4. REQUISITION/ PURCHASE REQ. NO.		5. PROJECT NO. (If applicable) CIN-01
6. ISSUED BY U. S. Army Engineer District, New Orleans Corps of Engineers P.O. Box 60267 New Orleans, LA 70160-0267		7. ADMINISTERED BY (If other than Item 6)		
8. NAME AND ADDRESS OF CONTRACTOR (No., street, county, State and ZIP Code) Johnson Bros. Corporation of Louisiana 2002 20th Street, Suite A202 Kenner, LA 70065		(X)	9A. AMENDMENT OF SOLICITATION NO.	
			9B. DATED (See Item 11)	
		X	10A. MODIFICATION OF CONTRACT/ ORDER NO. DACW29-95-C-0093	
CODE	FACILITY CODE		10B. DATED (See Item 13) 8/24/95	
11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS				
<input type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers <input type="checkbox"/> is extended, <input type="checkbox"/> is not extended. Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing Items 8 and 15, and returning _____ copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.				
12. ACCOUNTING AND APPROPRIATION DATA (If required) Funds have not been increased or decreased as a result of this change. See Continuing Contract Clause.				
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ ORDERS, IT MODIFIES THE CONTRACT/ ORDER NO. AS DESCRIBED IN ITEM 14.				
(X)	A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.			
	B. THE ABOVE NUMBERED CONTRACT/ ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103 (b).			
X	C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF: CC I.95, "VALUE ENGINEERING"			
	D. OTHER (specify type of modification and authority)			
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input checked="" type="checkbox"/> is required to sign this document and return <u>original</u> copies to the issuing office.				
14. DESCRIPTION OF AMENDMENT/ MODIFICATION (Organized by UCF section headings, including solicitation/ contract subject matter where feasible.) The following change is made to the above numbered contract for the Lake Pontchartrain, Louisiana and Vicinity, Floodproofing Veterans Boulevard Bridges over 17th Street Canal, Orleans and Jefferson Parishes, Louisiana, to revise the waterstop placement in the girders. A savings in cost of \$56,728.22 will be realized. The Government will share 45% (\$25,527.70) and the Contractor will share 55% (\$31,200.52).				
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.				
15A. NAME AND TITLE OF SIGNER (Type or print) PAUL SCHARMER AREA MANAGER		16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print) CHESTER ASHLEY, ADMINISTRATIVE CONTRACTING OFFICER		
15B. CONTRACTOR/ OFFEROR Paul Schamer	15C. DATE SIGNED 1/8/96	16B. UNITED STATES OF AMERICA BY Chester Ashley	16C. DATE SIGNED 1-8-96	
(Signature of person authorized to sign)		(Signature of Contracting Officer)		

SF 30 CONTINUATION SHEET

14. Description of Amendment/ Modification (Cont.)

CHANGES TO THE BIDDING SCHEDULE: The schedule of Contract Items, Descriptions, Estimated Quantities, Units, Unit Prices, and estimated Amounts is modified as follows:

<u>Item No.</u>	<u>Description</u>	<u>Estimated Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Estimated Amount</u>	<u>Amount of Change</u>
0028	VE Waterstop Change	LS	---	LS	-\$56,728.22	-\$56,728.22
0029	VE Payment for Waterstop Change	LS	---	LS	\$31,200.52	\$31,200.52

CHANGE TO THE SPECIFICATIONS:

Delete paragraph 6.4 from Section 03150 - Expansion Joints and Waterstops

Delete paragraphs 5, 5.1, and 5.2 from Section 03601 - Epoxy and Epoxy Grout.

Add the following paragraphs to Section 03601 - Epoxy and Epoxy Grout:

5. Non-shrink Grout shall be used in lieu of Epoxy.

5.1. General. Descriptive literature of the grout proposed for use shall be furnished together with a certificate from the manufacturer stating that it is suitable for the application or exposure for which it is being considered. In addition, a detailed plan shall be submitted for approval, showing equipment and procedures proposed for use in mixing and placing the grout.

5.2. Prepackaged Material. Prepackaged material requiring only the addition of water will be accepted on the basis of certified laboratory test results showing that the material meets the requirements of ASTM C 1107. When fine aggregate is to be added, the Contractor shall also furnish for approval the mixture proportions together with certified copies of laboratory test results indicating that the mixture is in conformance with the requirements of ASTM C 1107.

5.3. Mixture Proportions. Mixture proportions using a volume-change controlling ingredient shall be submitted for approval. The submittal shall include the mixture proportions of all ingredients and certified copies of laboratory test results indicating that the materials and the mixture is in conformance with the requirements of ASTM C 1107.

5.4. Aggregates. Information identifying the aggregate source to be used along with gradation tests for fine and coarse aggregates shall be submitted for approval. The gradation test for fine aggregate shall include the No. 8 and No. 30 sieve sizes.

5.5. Water. The name of the source of mixing and curing water and documentation that mixing water meets CRD-C 400.

5.6. Placement. It shall be permitted that the 2nd pour of the non-shrink grout could be placed at the same time as the first, after placing the waterstop.

7.1 No measurement will be made for the work specified within this modification. Payment to revise the waterstop placement in the girders will be made at the contract lump sum price for "VE Waterstop Change" and "VE Payment for Waterstop Change".

CHANGE TO THE DRAWINGS: Revise contract drawing 35 of 79, FILE NO. H-4-40359, dated June 95, replace the detail of the Shear Key & Waterstop Blockout with the attached sketch SK-95-0093-01.

CHANGE TO CONTRACT PRICE: The contract price is decreased by \$25,527.70.


CHANGE TO CONTRACT TIME: The contract time is increased by 7 calendar days.

SF 30 CONTINUATION SHEET

It is further understood and agreed that this adjustment constitutes compensation in full on behalf of the contractor, its subcontractors and suppliers for all costs and markups directly or indirectly attributable to the changes ordered, for all delays, impacts and extended overhead related thereto, and for performance of the change within the time frame stated.

SKETCH

SK-95-0093-01

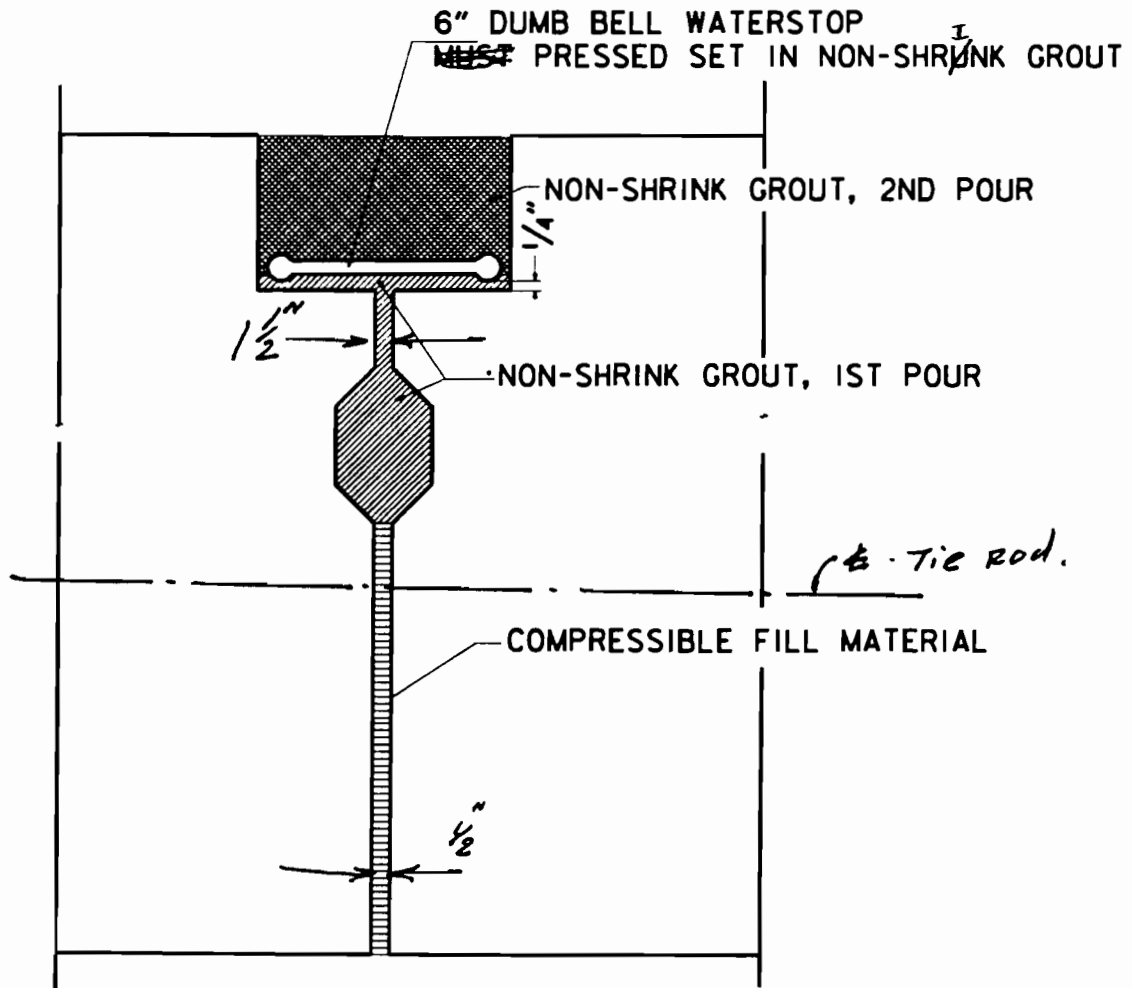

- Note: ① Press waterstop into 1st Pour of Non-shrink Grout before it is set. No air shall be trapped under waterstop.
- ② After 1st pour has set, fill blockout with 2nd pour of Non-shrink Grout.

OFFICE SE

Encl 2