




(A0007118)

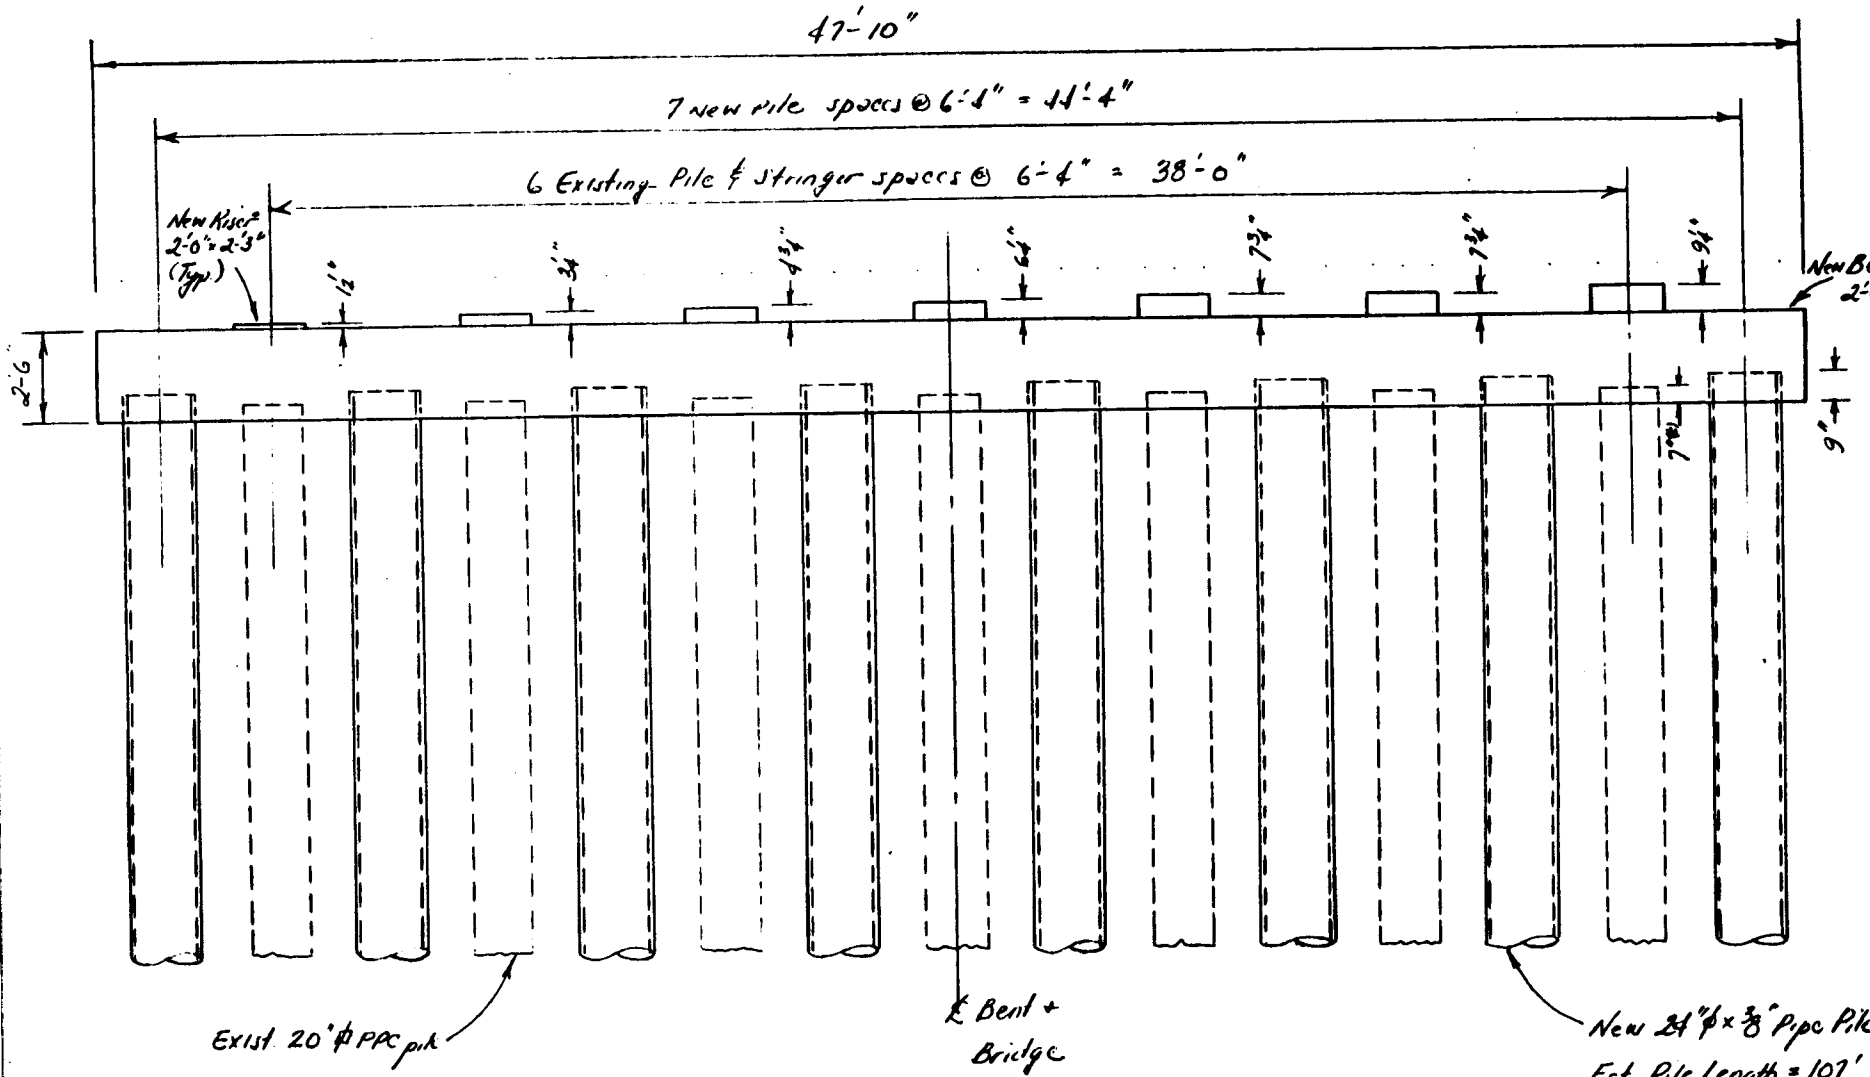

Section thru Pile Cap (o Pile)

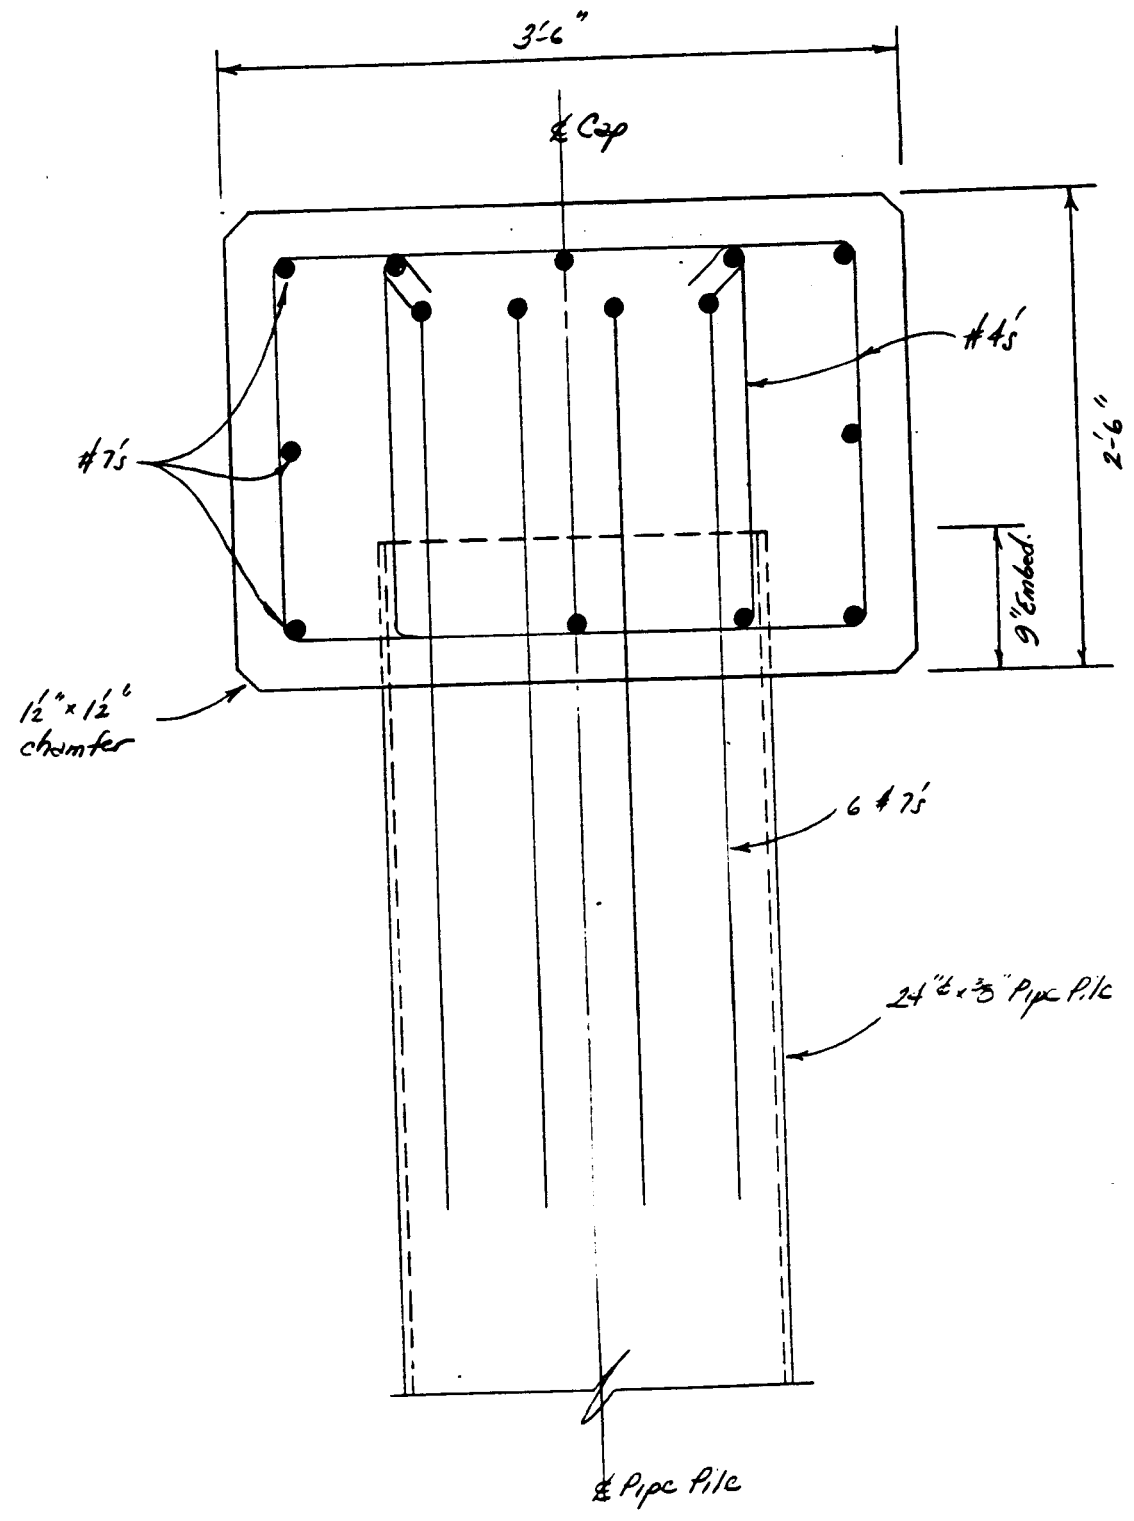

(Scale 1" = 1'-0")

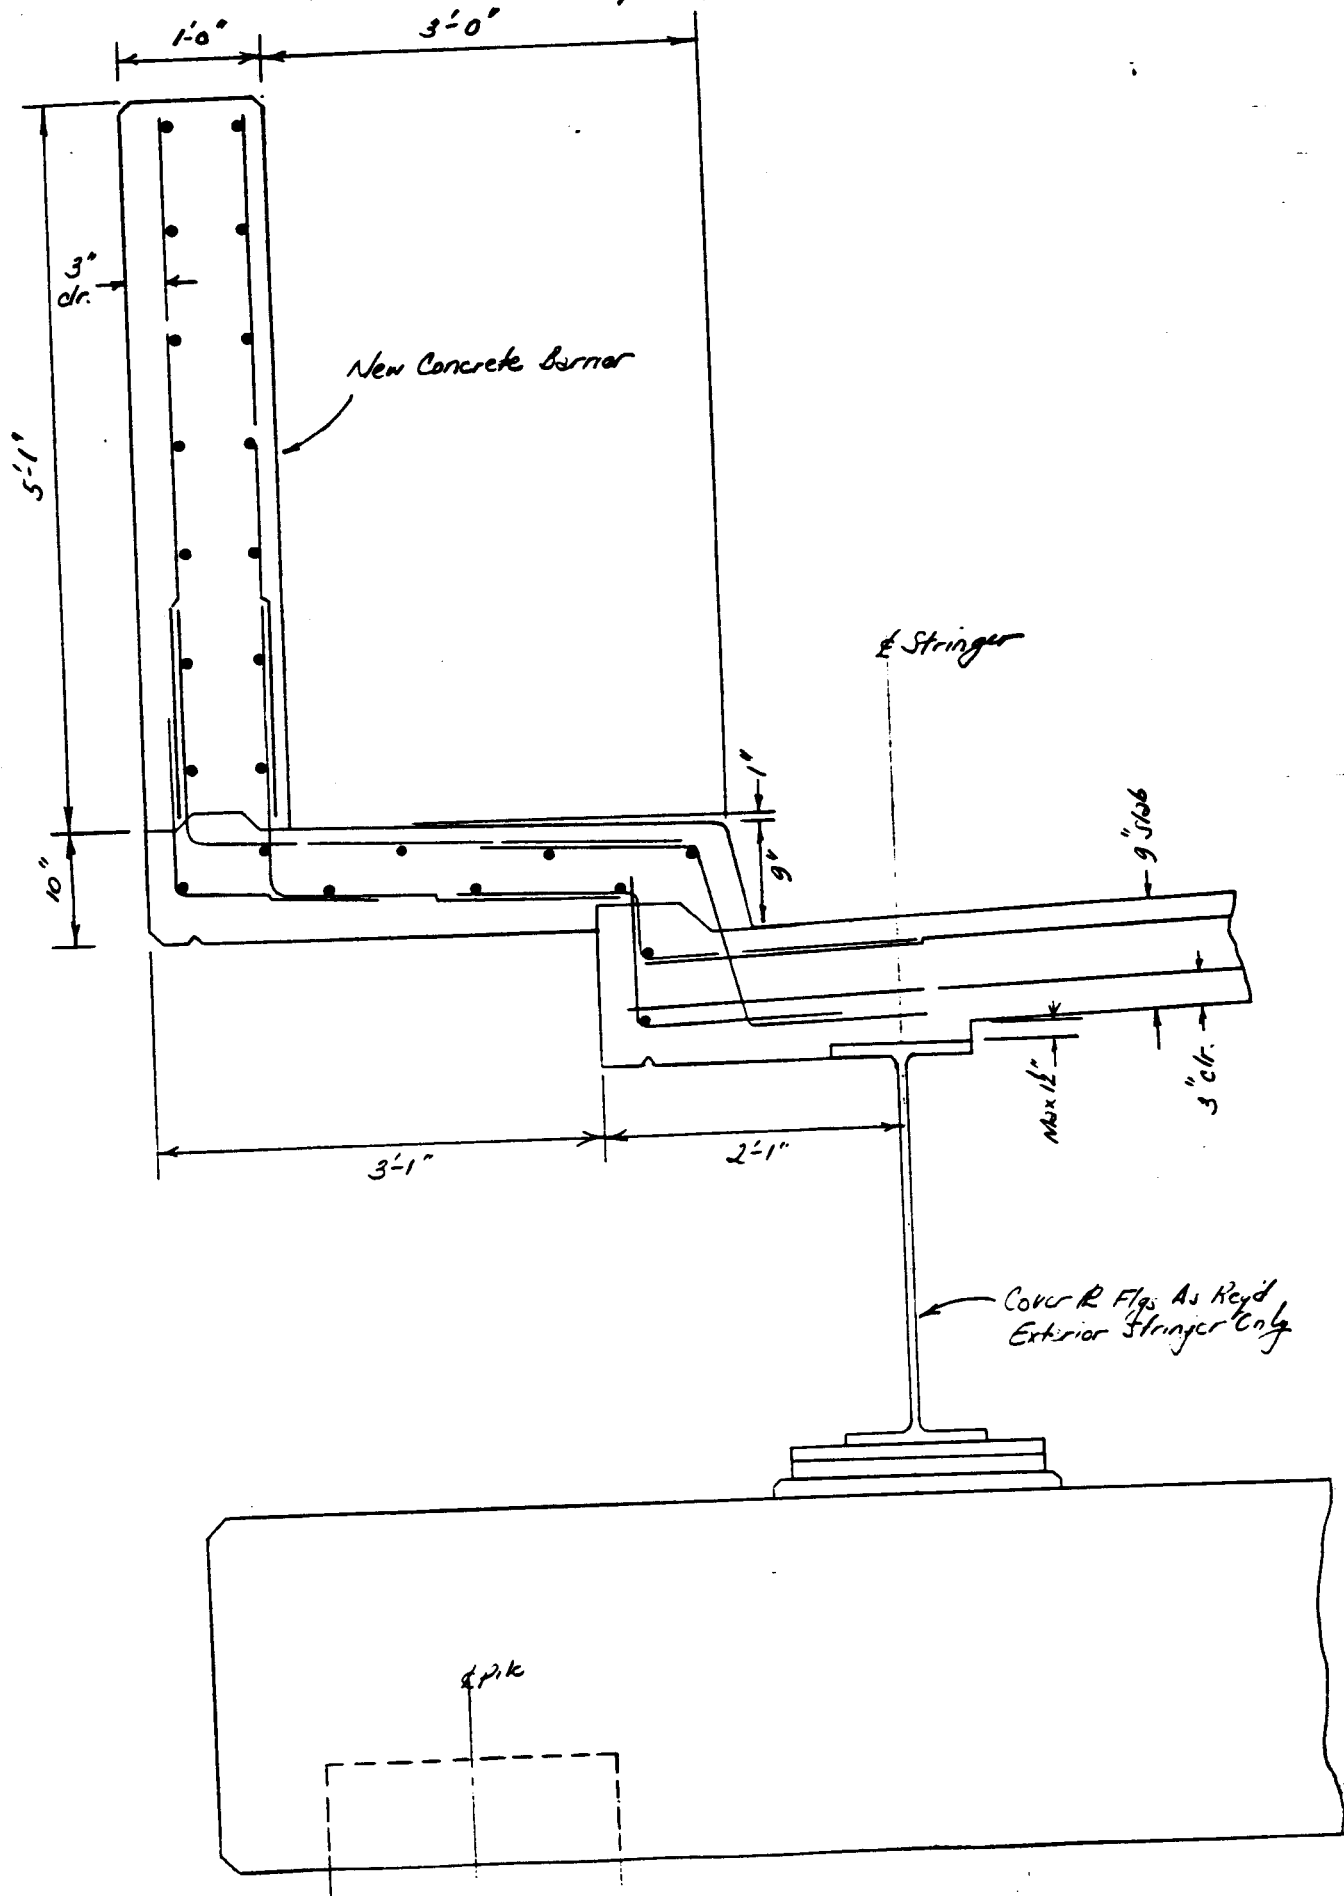

	UNIT	QUANTITY	UNIT COST	COST
Superstructure Concrete	CY	680	300. ⁰⁰	\$ 204,000. ⁰⁰
Substructure Concrete	CY	298	250. ⁰⁰	74,500. ⁰⁰
Reinforcing Bars	LB	207,060	0. ⁴⁰	82,824. ⁰⁰
Structural Steel (A36)	LB	25,561	3. ⁰⁰	76,683. ⁰⁰
Steel Pipe Pile (24"φ)	LF	10,272	125. ⁰⁰	1,284,000. ⁰⁰
Waterstop	LF	708	7. ⁰⁰	4,956. ⁰⁰
Compression St. Seal	LF	568	15. ⁰⁰	8,520. ⁰⁰
Remove Old Barrier & Slab	SYD	2,679	175. ⁰⁰	468,825. ⁰⁰
Remove & Re-install Exist. Stringers	EA.	1	65,000. ⁰⁰	\$ <u>65,000.⁰⁰</u>
Modify Exist. Sole Rls				2,269,308. ⁰⁰
			15% Contingencies	<u>340,396.⁰⁰</u>
				\$ 2,609,704. ⁰⁰