

FY 2013 MAINTENANCE DREDGING

PROJECT: Mississippi River
 SUBPROJECT: Outlets At Venice
 REACH: Tiger Pass
 PROJECT MANAGER: Donald Schneider
 PHONE: (504) 862-1828
 LOCAL SPONSOR: Plaquemines Parish, LA

DESCRIPTION OF WORK:

Maintain a -14' x 250' channel from Mile 67.0 to 14.0, and a 16' x 250' channel in the jetty and bar channel (with an additional 2' of advance maintenance.)

HISTORICAL DREDGING FREQUENCY: 2 to 4 years

LAST DREDGED: 2010

TYPE OF DREDGE: Cutterhead

ESTIMATED QUANTITY: 1,000,000 to 2,000,000 CY

ESTIMATED COST: \$3,000,000 - \$7,000,000

ADVERTISE: April 2013

OPEN BIDS: May 2013

AWARD: May 2013

START WORK: Jun 2013

DURATION: Approximately 90 days for contract


DREDGING REACH: Tiger Pass

DISPOSAL AREA: Adjacent to channel

DISPOSAL TYPE: Open Water

REMARKS: Wetland Development

MISSISSIPPI RIVER, OUTLETS AT VENICE, TIGER PASS

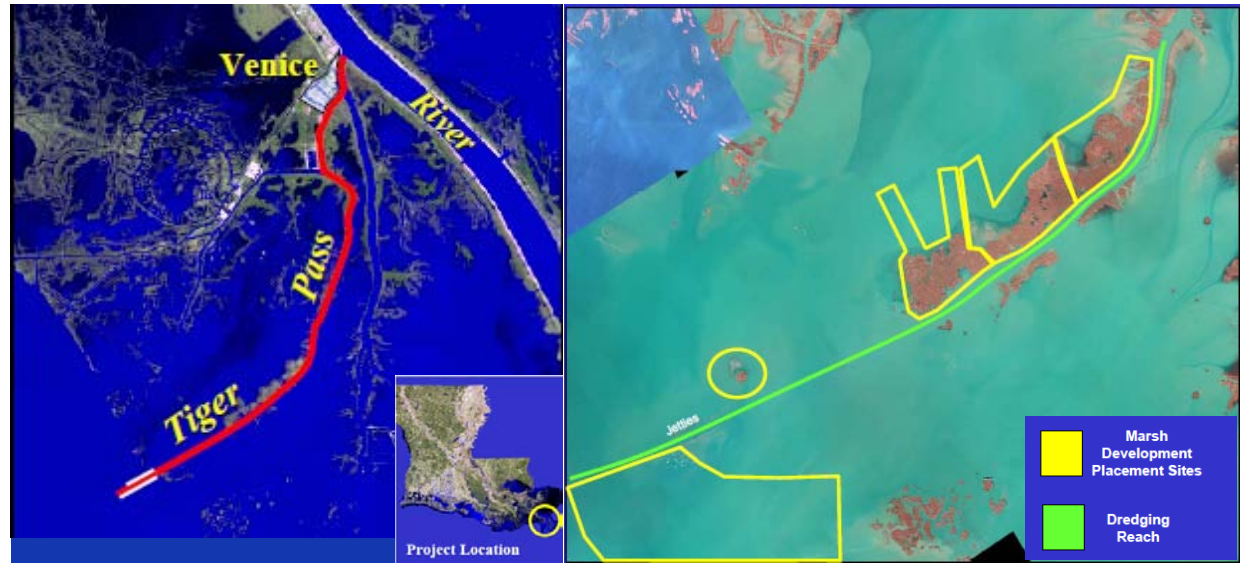

PROJECT AUTHORITY: The River and Harbor Act of 1968, approved 13 August 1968 (House Document 361, 90th Congress, 2nd Session).

NEPA DOCUMENTATION	FONSI	PUBLIC NOTICE	WATER QUALITY CERTIFICATION	
FEIS O&M	10-Sep-76	18-Nov-76	DNR 830110-04	21-Mar-83
SIR #3 Additional Marsh Restoration Disposal Areas, Jetty Maintenance, & Bird Islands	30-Nov-83			
EA #77 Additional Marsh Restoration Disposal Areas for Baptiste Collette & Tiger Pass	12-Sep-88	1-Aug-88	WQC 880712-02	17-Oct-88
EA #488 Extension of Tiger Pass Jetties	17-Nov-09	3-Aug-09	WQC 090717-04 AI 165818 CER 20090002	20-Oct-09

* revised Water Quality Certificate

BENEFICIAL USE OF DREDGED MATERIAL TIGER PASS

Fiscal Year	Contract No.	Disposal Area	Dredging Quantity (CY)	Acres
2000-2001	NO DREDGING			
2002	C-0067	WD	1,658,940	
2003-2004	NO DREDGING			
2005	C-0011	WD	1,565,868	
2006	C-0143	WD	2,387,500	88
2007-2008	NO DREDGING			
2009	C-0028	WD	2,148,270	24
2010	C-0124	WD	1,779,723	60
2011	NO DREDGING			

