


1. COMPONENT Marine Corps		FY 19_88 MILITARY CONSTRUCTION PROJECT DATA			2. DATE 17 March 1987	
3. INSTALLATION AND LOCATION Marine Corps Base Camp Lejeune, NC				4. PROJECT TITLE Repair Int/Ext Messhalls 325 and 508		
5. PROGRAM ELEMENT		6. CATEGORY CODE 72210	7. PROJECT NUMBER LE815MS		8. PROJECT COST (\$000) 342	
9. COST ESTIMATES						
ITEM			U/M	QUANTITY	UNIT COST	COST (\$000)
SUBTOTAL			LS	-	-	311
Contingency 10%			LS	-	-	<u>31</u>
BASIC CONTRACT COST			LS	-	-	342
Design Cost 6%			LS	-	-	<u>21</u>
TOTAL ESTIMATED COST			LS	-	-	363
10. DESCRIPTION OF PROPOSED CONSTRUCTION Repair the interior and exterior of Messhalls. (Structural, Electrical and Mechanical) Accomplish with R2 Project LE841RS						
REQUIREMENTS:						
PROJECT: Repair/Replace interior and exterior. (Structural, Electrical and Mechanical)						
REQUIREMENT: Replace old deteriorated and antiquated walls, doors, windows, floor and trim. Replace electrical and mechanical portions also.						
CURRENT SITUATION: The interior walls, floor and ceiling have deteriorated and damaged from normal wear and tear. The exterior windows and doors are worn, broken and parts are not available. The electrical and mechanical is old and antiquated and needs to be replaced.						
IMPACT IF NOT CORRECTED: If the Messhalls are not repaired as outlined in the enclosed scope of work maintenance cost will continue to soar. Present health hazards will exist. The Electrical and Mechanical System do not meet present codes for electrical and plumbing.						

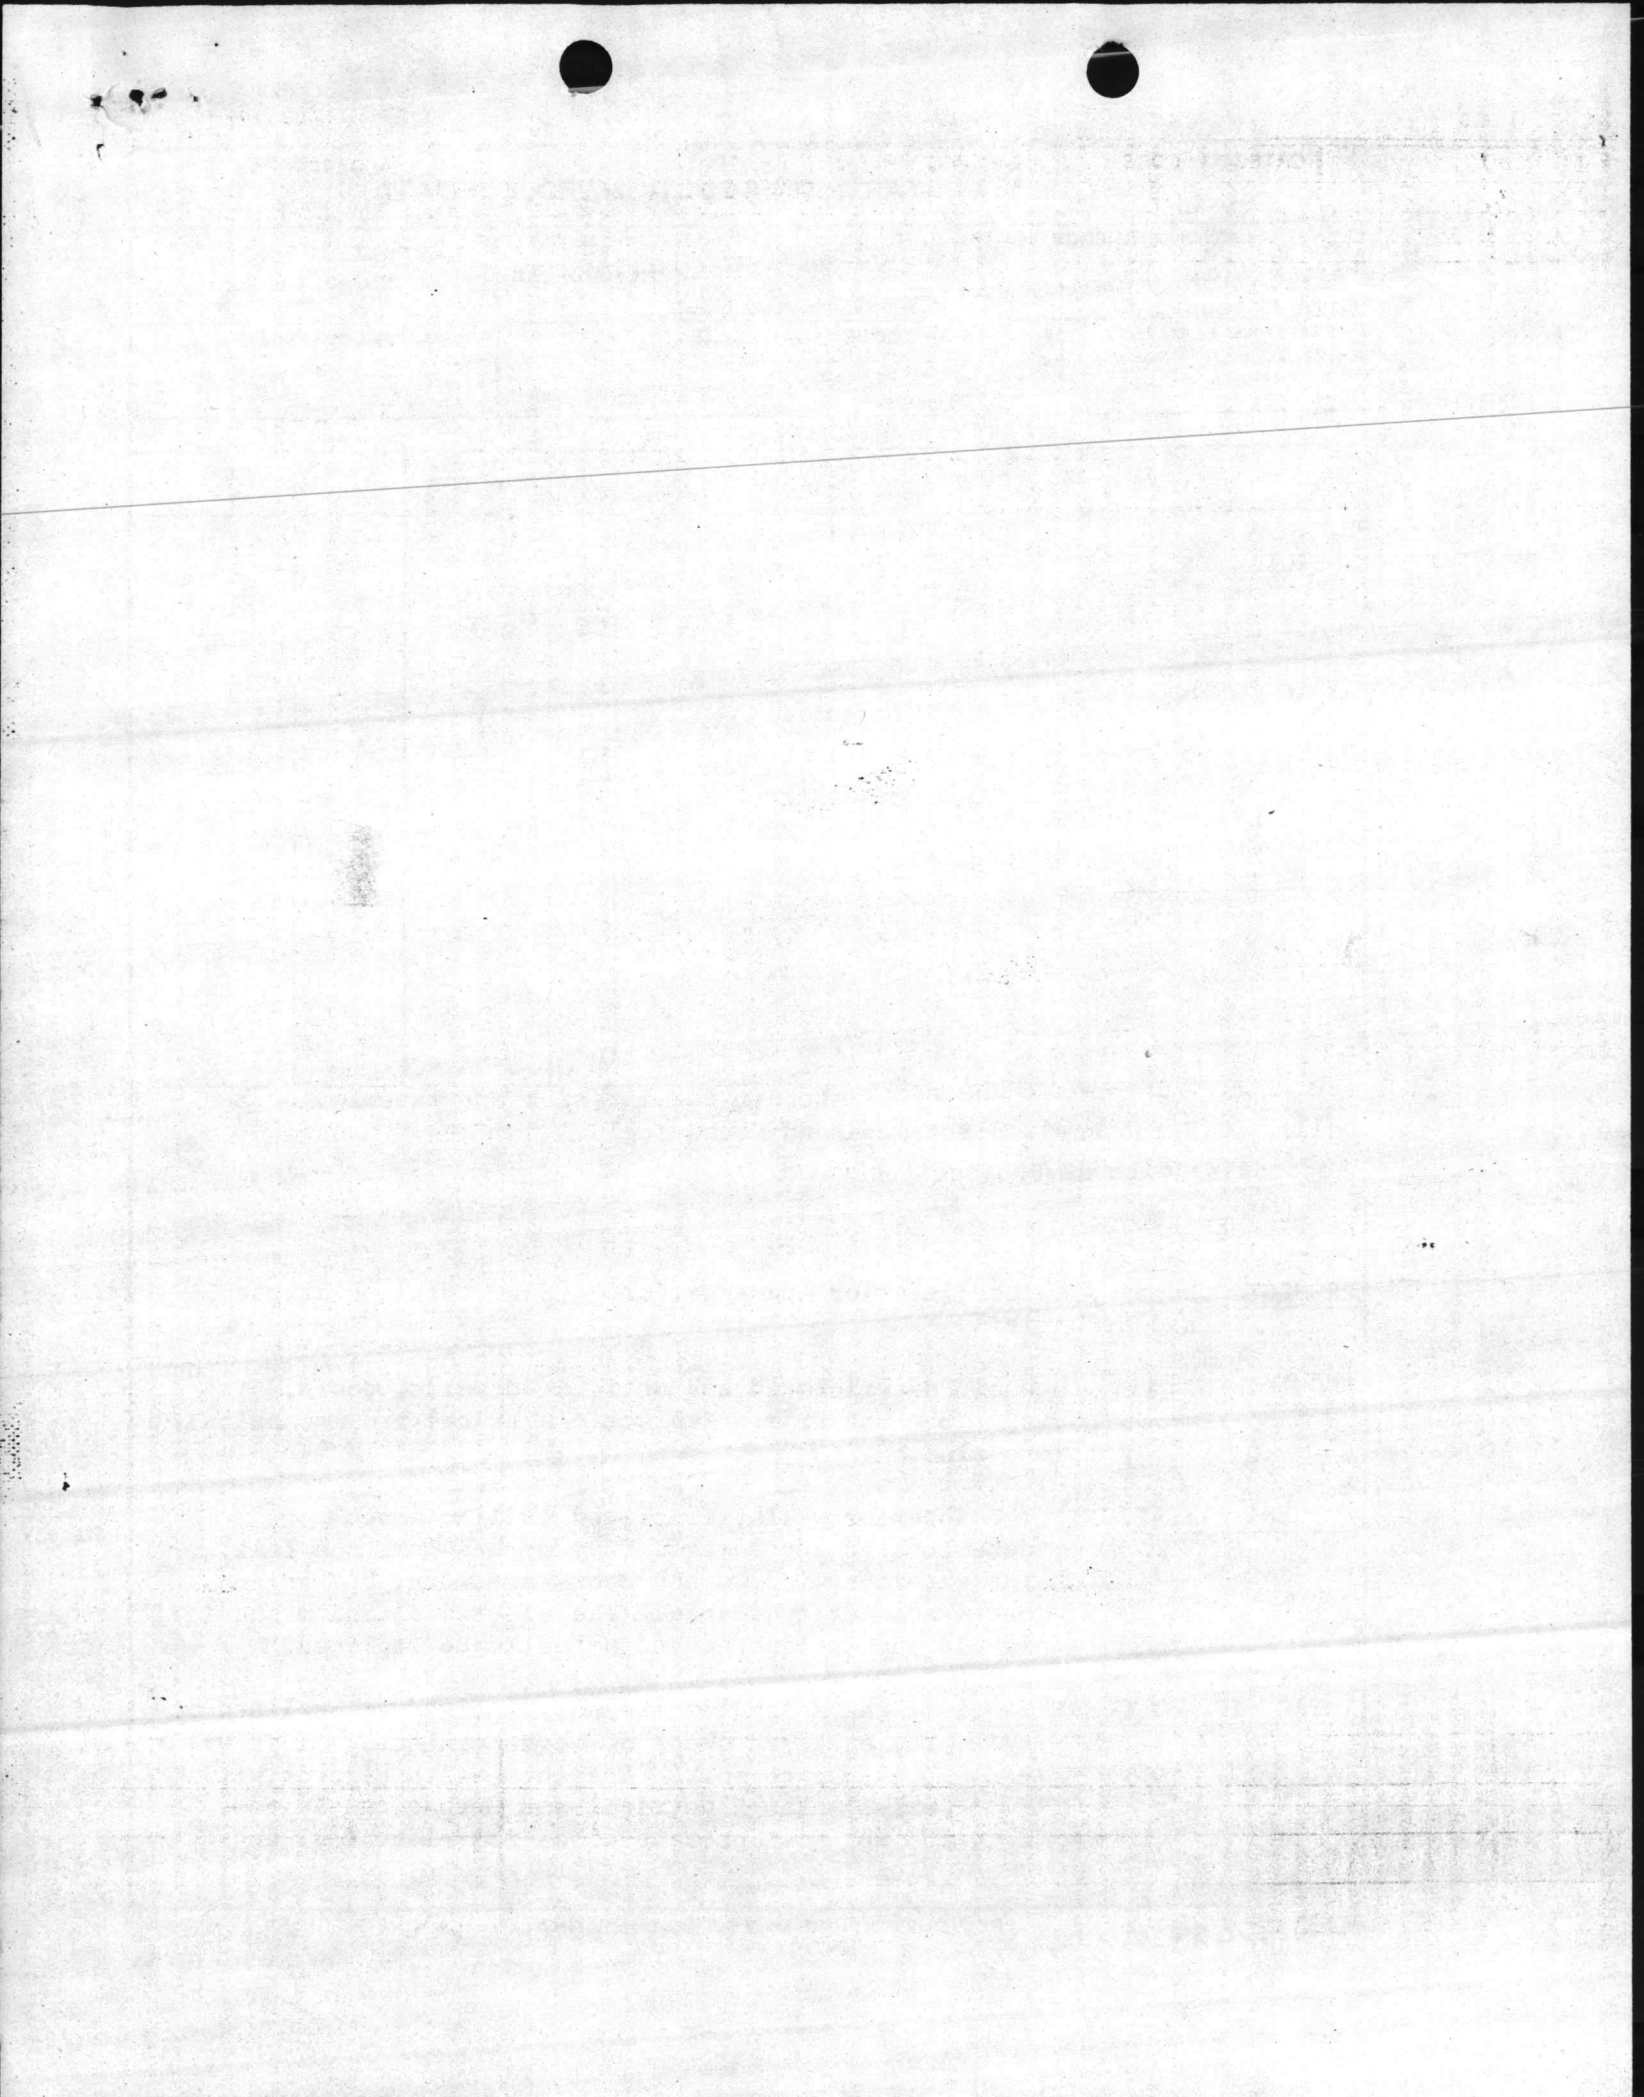

COST ESTIMATE

DATE PREPARED

SHEET OF

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

MCB, QLNC

ESTIMATED BY

CATEGORY CODE NUMBER

PROJECT TITLE


REPAIR INT/EXT Bldgs 325 and 508

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify)

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
Bldg 325								259,700
Bldg 508								<u>51,400.</u>
							TOTAL	311,100
							JAY	311,000

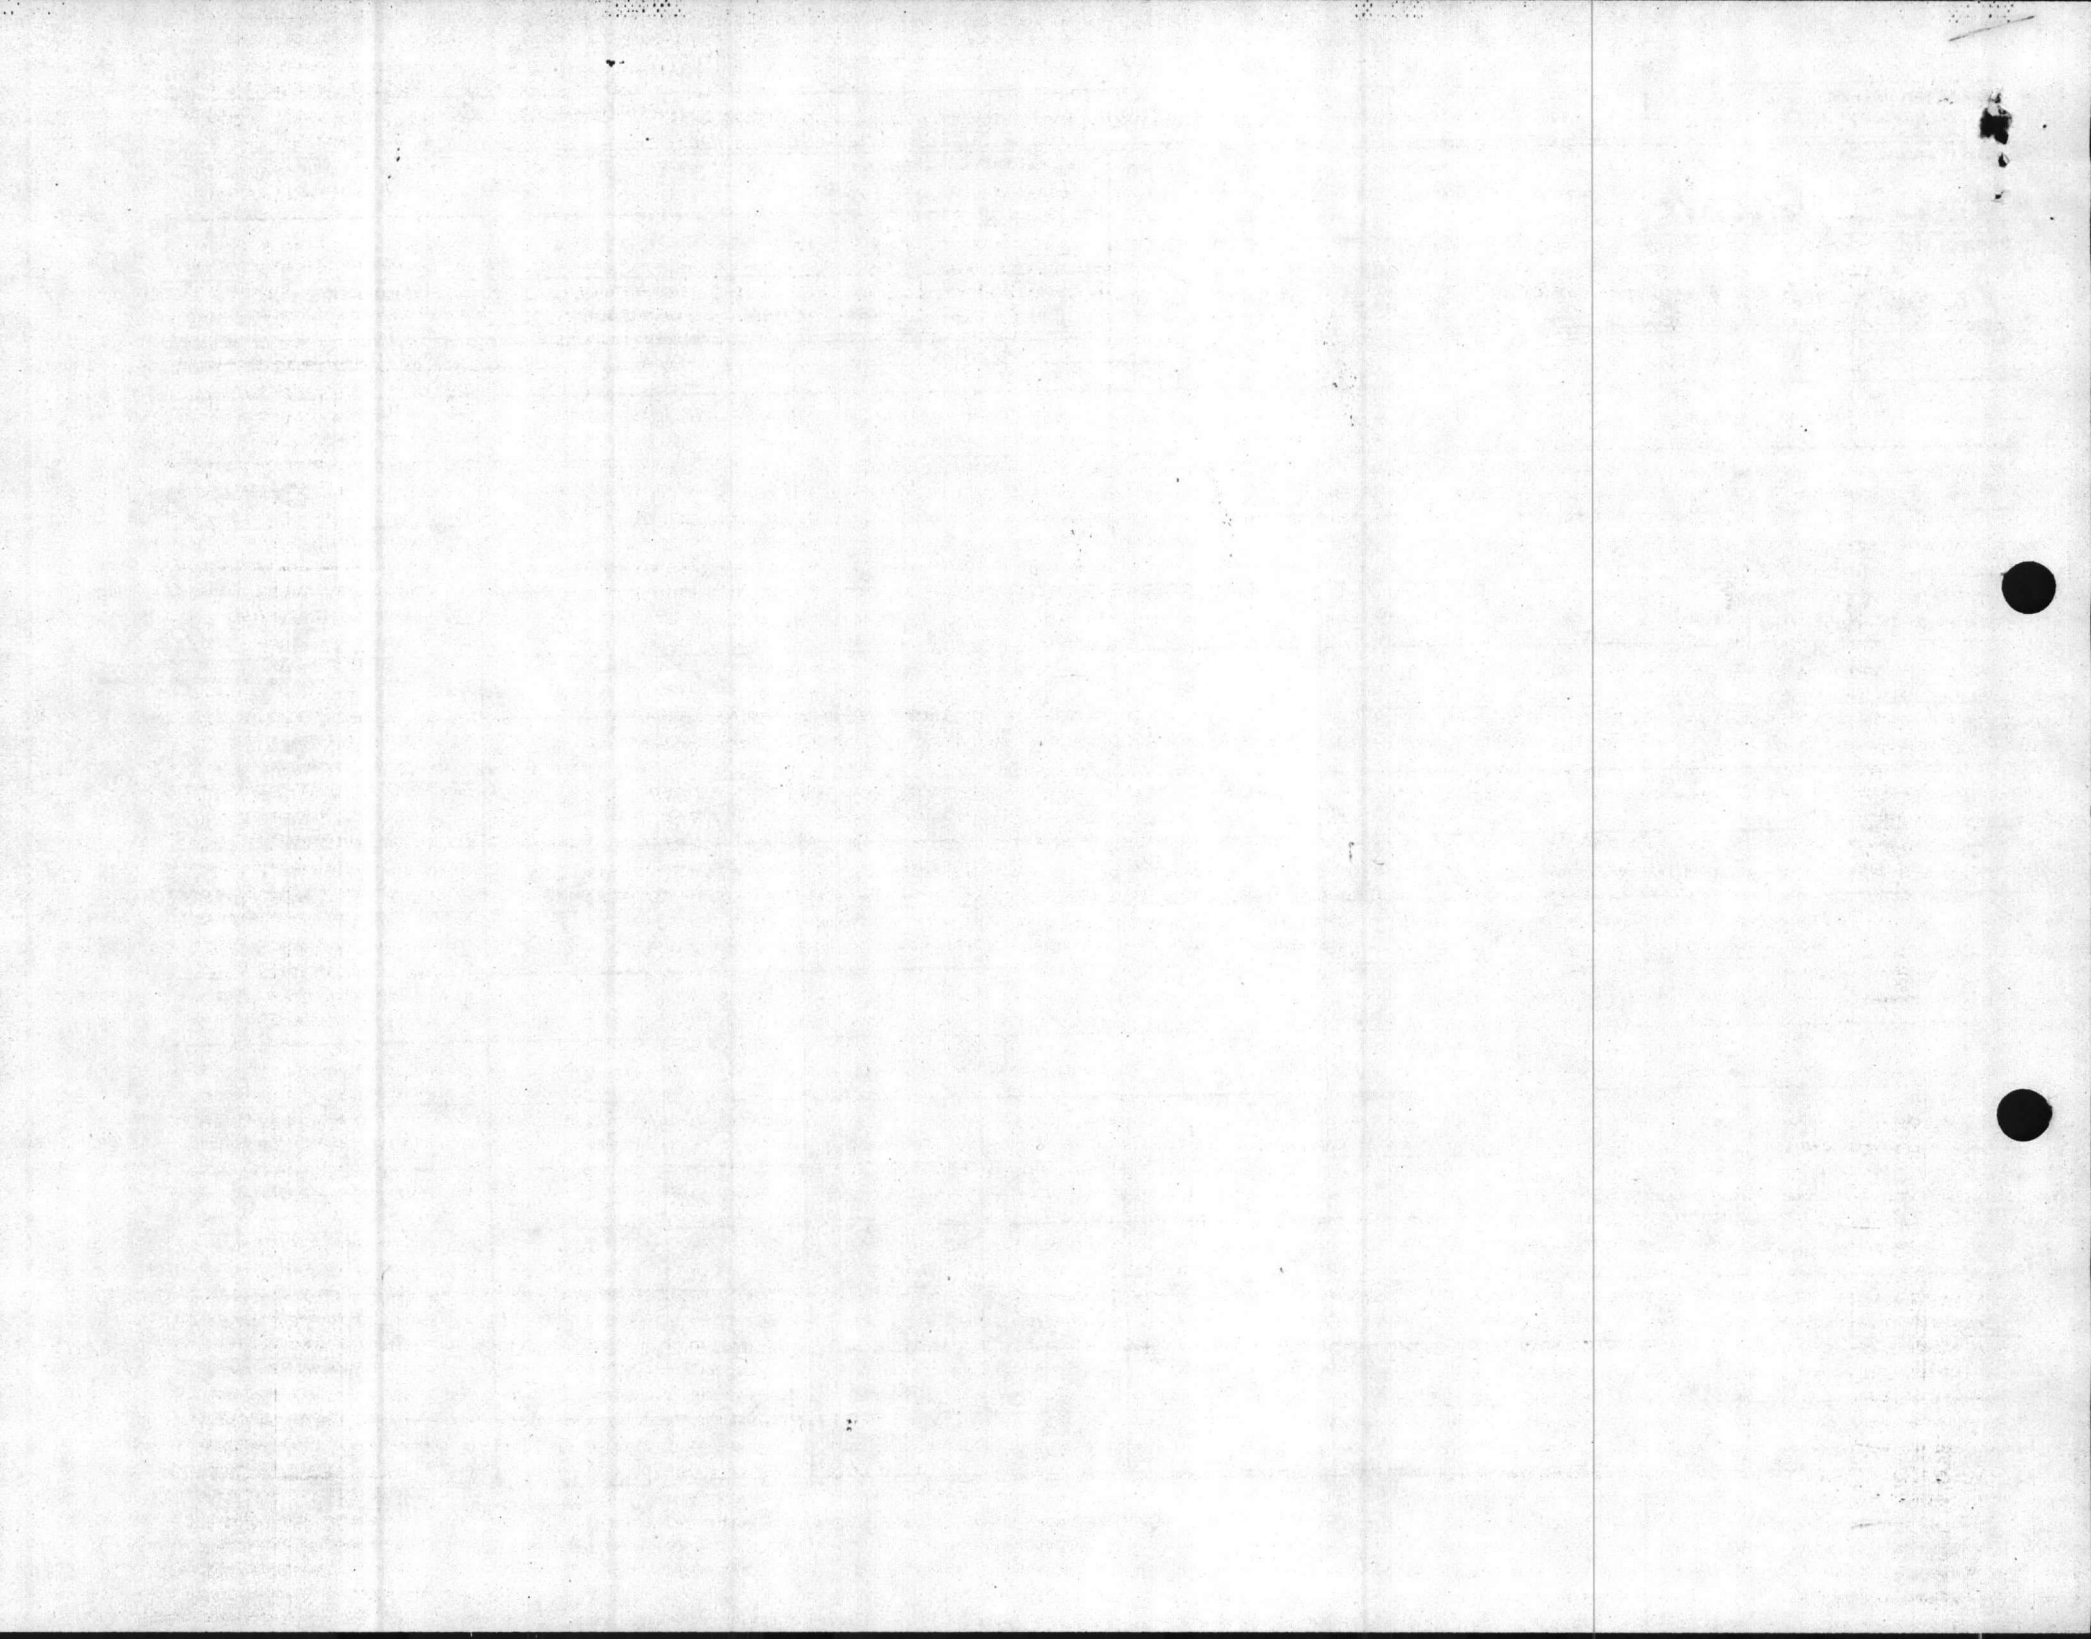

COST ESTIMATE

DATE PREPARED

SHEET OF

ACTIVITY AND LOCATION

325 [REDACTED]

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

HUFFMAN

CATEGORY CODE NUMBER

PROJECT TITLE


RENOVATE MESS HALLS

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify)

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
STRUCTURAL				67,548		38,852		106,400
ELECTRIC				21,100		13,000		34,100
MECHANICAL				31,100		16,250		47,375
BASIC TOTAL				119,748		68,102		187,875
OVER HEAD 15%								28,181
LABOR 18%								12,258
MATERIAL 4.5%								5,389
SUB TOTAL								233,703
PROFIT 10%								23,370
SUB TOTAL								257,073
BOND 1%								2,571
SUB TOTAL								259,644
						Rounded		259,700

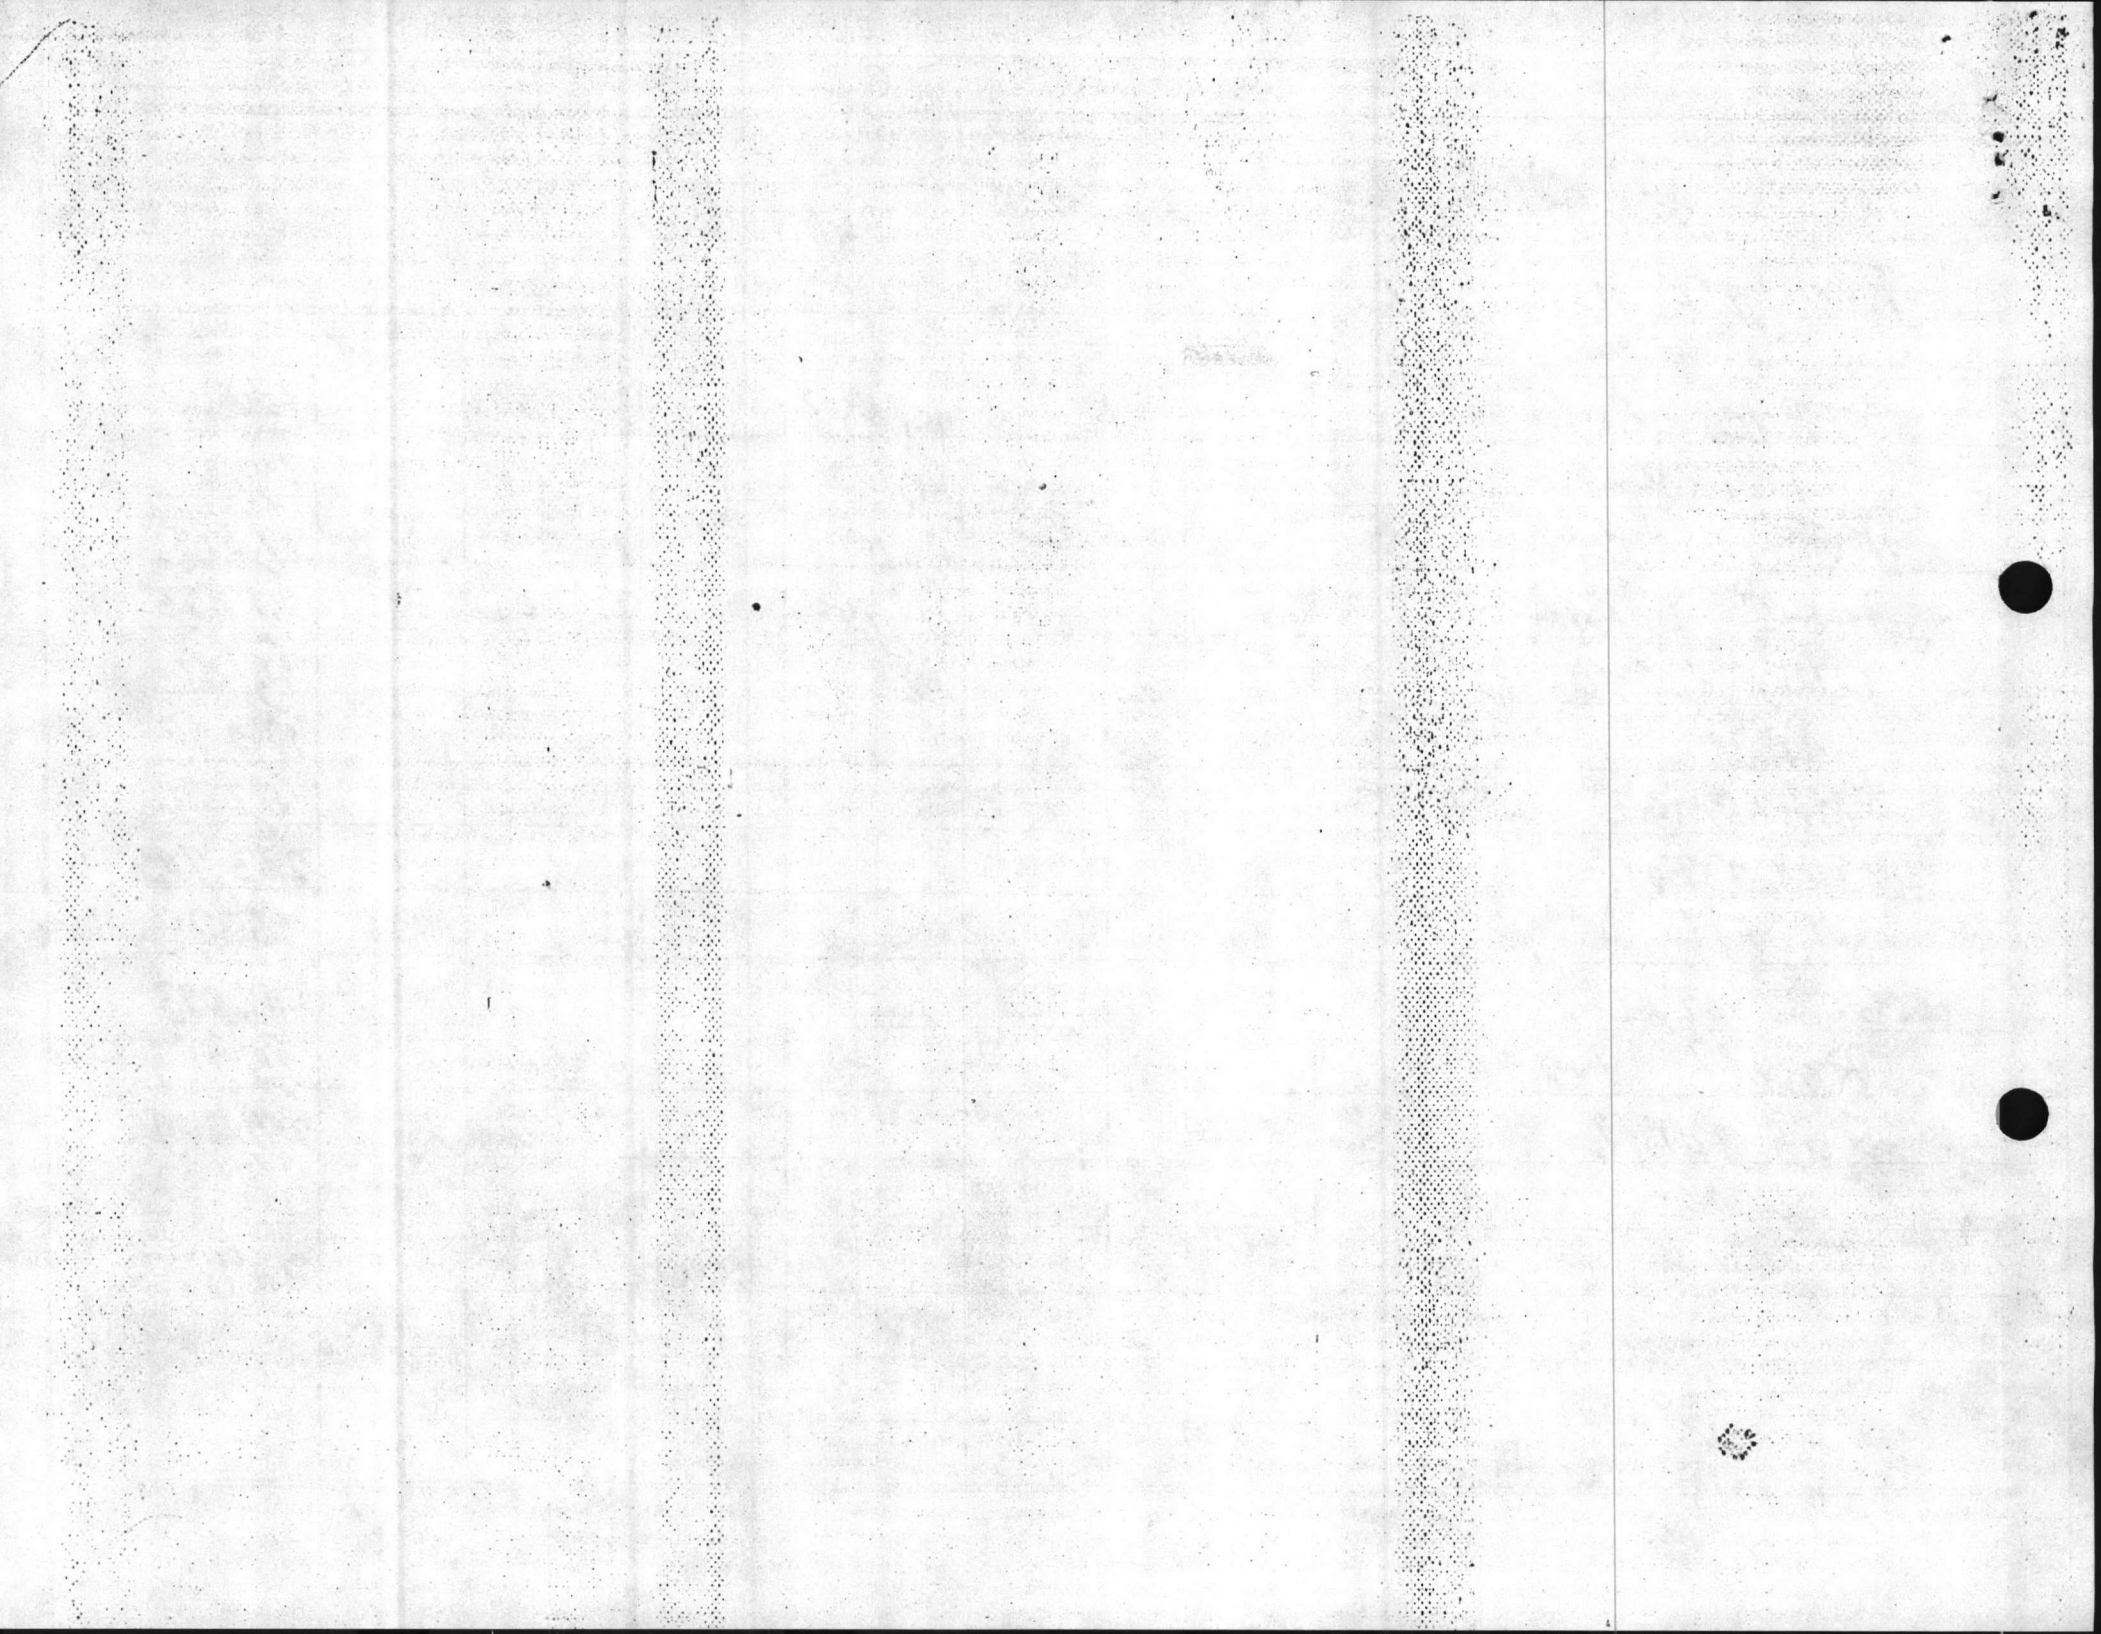

COST ESTIMATE

DATE PREPARED
3-20-86

SHEET **1** OF **11**

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

BLDG. 325- PHASE #3.

ESTIMATED BY

CATEGORY CODE NUMBER

PROJECT TITLE

SAWVER

722-10


RENOVATE MESS HALLS

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify) **PROJECT**

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
1 - DEMO & REPL WINDOWS w/MODERN STATE OF ART THERMOPLANE	140	EA.	130.	18200	76.	10,640	206	28,840
2 - DEMO & REPL DOORS w/ANODIZED ALUM FRAME, SAFETY GLASS, SIDE PANELS, & TRANSOMS.	4	EA	1190	4,760	510	2,040	1700	6,800
3 - RENOVATE HEADS, ADMIN SECT. INCLUDE CERAMIC WALLS, FLOOR, SHOWER, w/ CERAMIC STALLS.	200	SF	21.	4,200	9.	1,800	30.	6000
4 - DEMO & REPL INT. DOORS	12	EA	175	2100	40.	480	215	2580
5 - INSTALL STAINLESS STEEL WALLS, CEILING, REPL. REEFERS DOORS.	3.	EA	2,554	7,662	627.	1,911	3,191	9,573.
6 - DEMO & REPL GRID VINYL COAT, OVER SERVE LINES, STEEL IN DINING AREA.	14,560	SF	.63	9,173	.31	4,514	.94	13,686
7 - EXPOSE OUT WALLS AT SERVING LINES TO ACCOMMODATE CONDUIT, & J. BOXES, INSTALL CERAMIC TILE 5'x10'	650	SF.	1.45	943.	1.45	943	2.90	1886

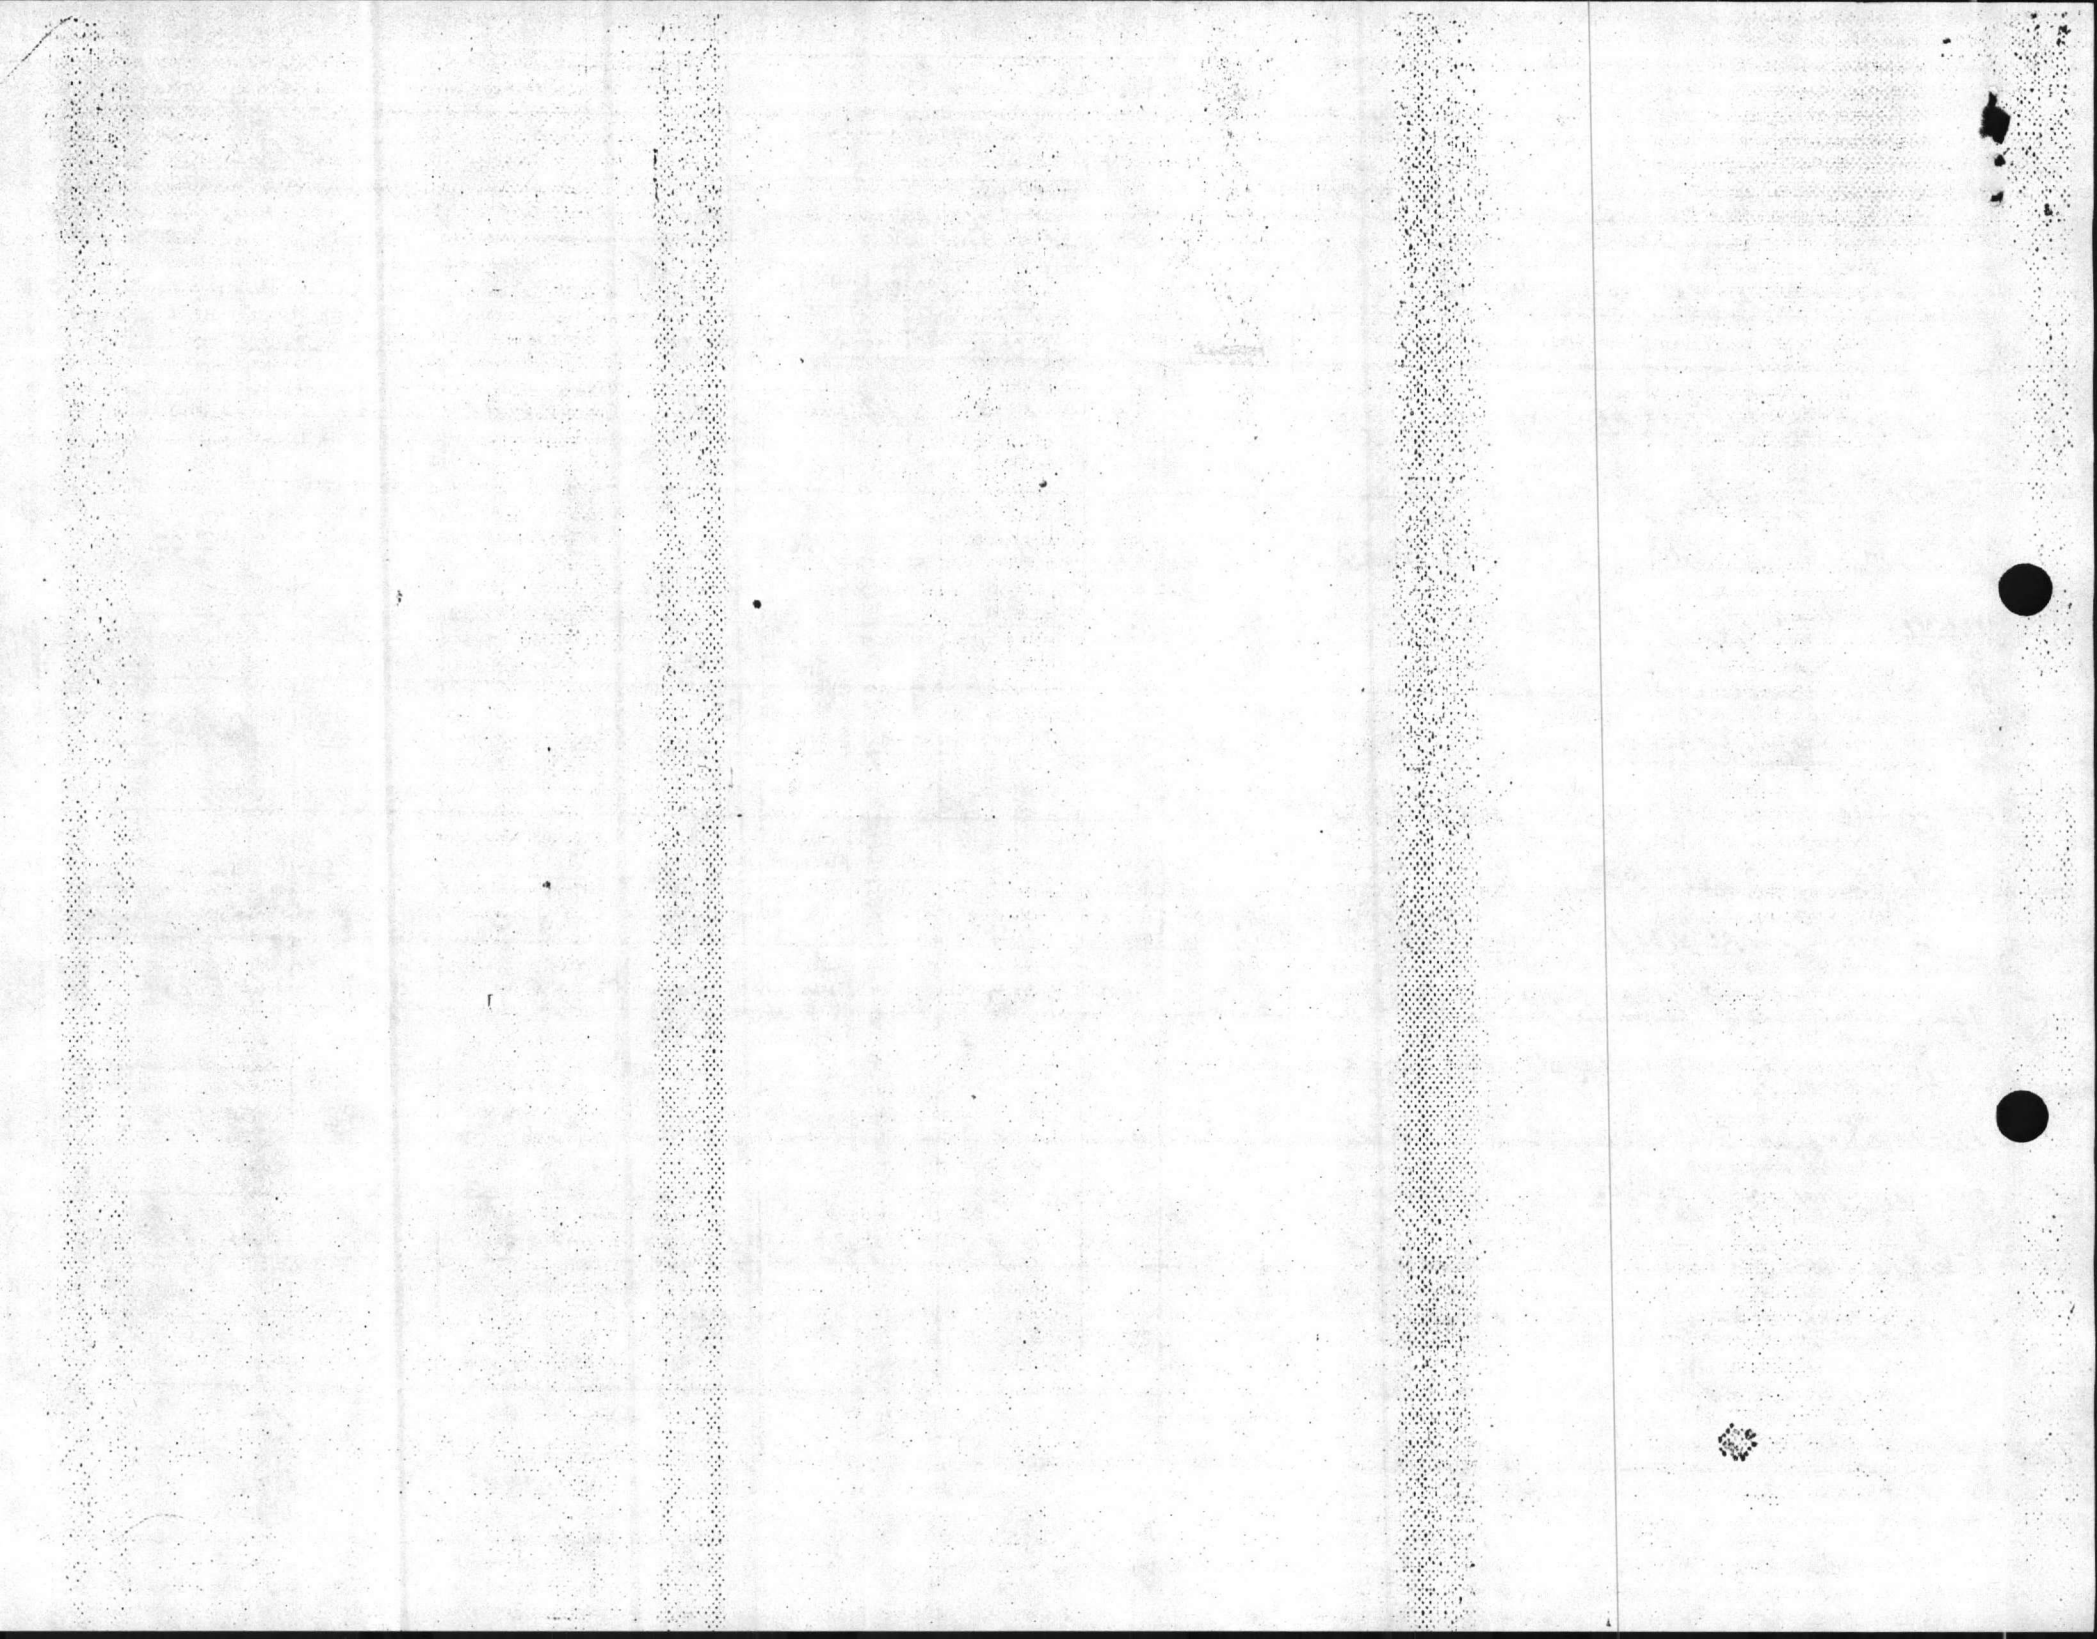

COST ESTIMATE

DATE PREPARED
3-20-86


SHEET **2** OF **11**

ACTIVITY AND LOCATION
BLDG # 325 PHASE # 3.
PROJECT TITLE
RENOVATE MESS HALL

CONSTRUCTION CONTRACT NO.
ESTIMATED BY
SAWYER
STATUS OF DESIGN
 PED 30% 100% FINAL Other (Specify) **PROJECT**

IDENTIFICATION NUMBER
LEB10M
CATEGORY CODE NUMBER
722-10
JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
3 - DEMO TERRAZO ON SERVING LINES. REPL W/ QUARRY TILE 12'x130'	1560	SF	1.85	2887	2.80	4,368	4.65	7254.
9 - REPR PLASTER WALLS, FURR OUT, INSTALL FIRE RATED PANEL W/ CHAIR RAIL & VINYL	5,976	SF	1.20	7,171	.40	7,390	1.60	9562.
REPR PLASTER WALLS. FURR OUT TO ACCOMMODATE ELECT. CONDUIT & J. BOXES. INSTALL FIRE RATED PANELING W/ CHAIR RAIL & VINYL WAINS CONT TO CEILING, DINING AREA								
10 - INSTALL 8" WOOD BASE (DINING SECT)	690	LF	.60	414	.25	173	.85	587
11 - DEMO & REPL BUILT UP ROOF W/ INLY RUBBER INSULATE GRAVEL STOP & GUTTER	5.5	SQ.	280.	1,540	120	660.	400	7,200
12 - SUSPEND CEILING OFFICES	1000	SF.	.63	630.	.31	310.	.94	940
13 - REPL REAR LOAD DOCK CONC. DECK COMP. W/ LOAD UNLOAD BUMPERS	2.	EH	150.	300.	100.	200.	250	500
14 - DEMO & REPL CERAMIC TILE (HALLS)	600	SF	1.45	870	1.45	870.	290	1740

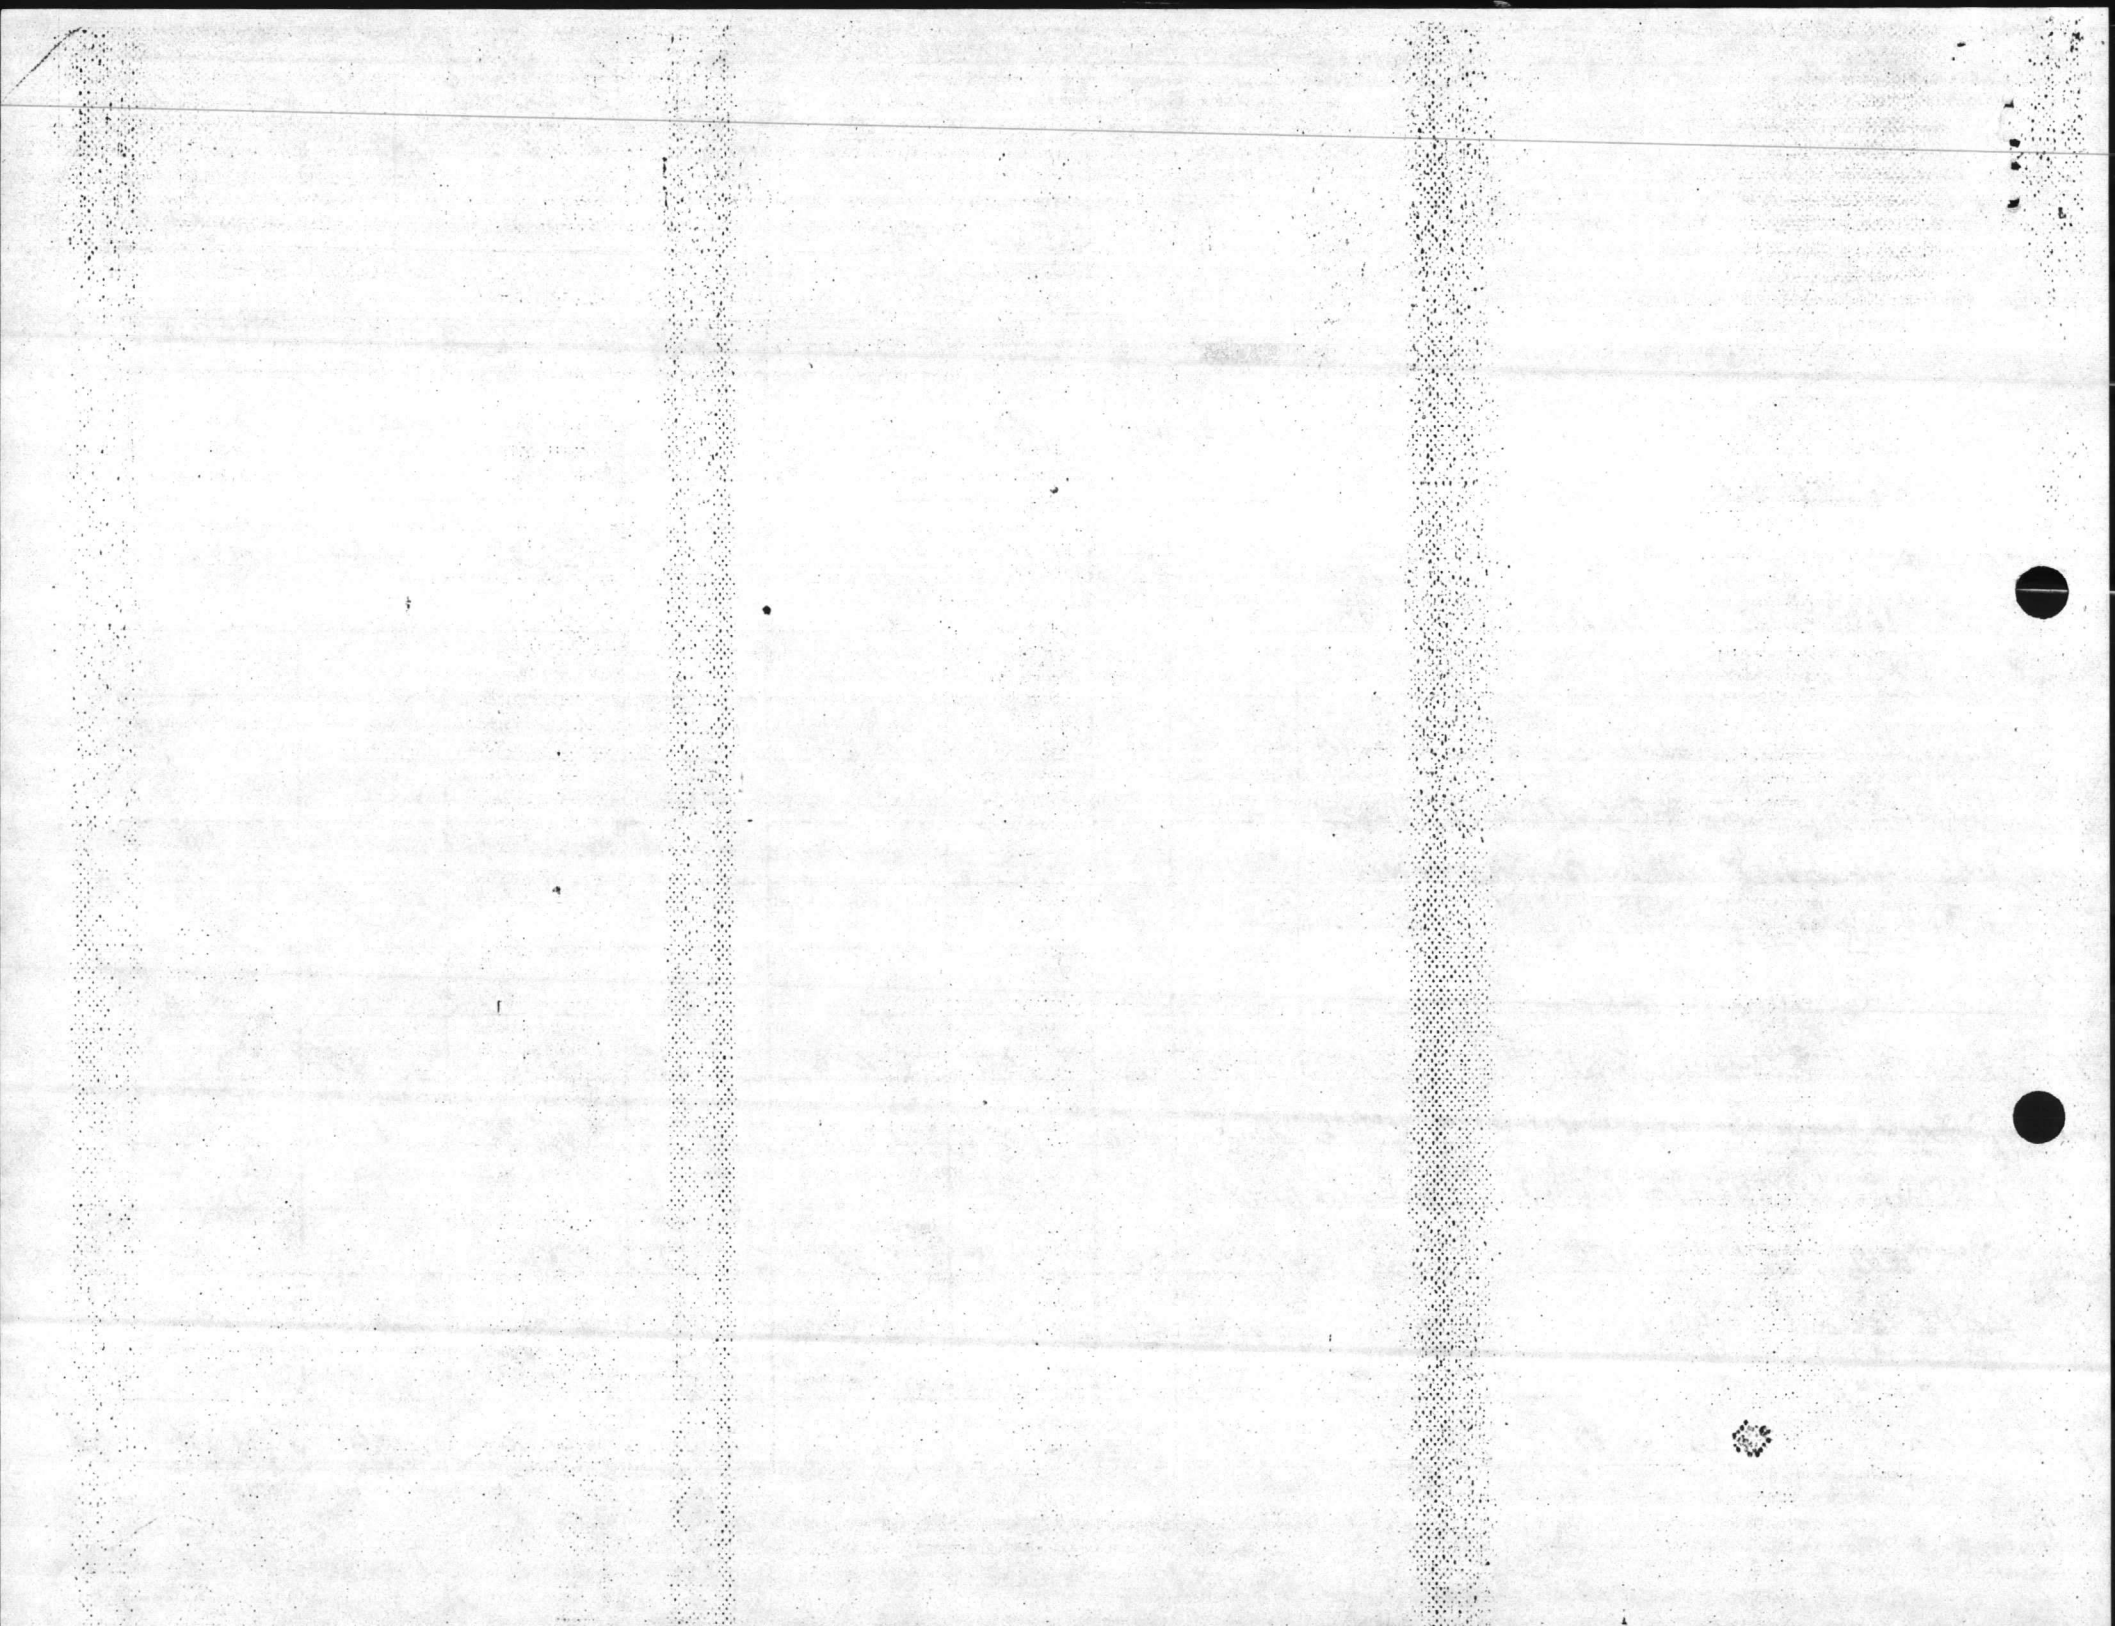

COST ESTIMATE

DATE PREPARED

3-20-86

SHEET 3 OF 11

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

LE810M

PROJECT TITLE
BLDG# 325 PHASE #3

ESTIMATED BY

Sawyer

CATEGORY CODE NUMBER

72270


STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify) **PROJECT**


JOB ORDER NUMBER

RENOVATE MESS HALLS.

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE		
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	
15 - DEMO NON FIRE RATED PANELING { REPL	2970	SF			.30	891	.30	891	
16 - REPL GASNET, ON DOORS FROM GALLEY TO DINING AREA	60	LF	3.75	225.	2.00	120.	5.75	345.	
17 - PAINT INT. AS APPLICABLE, EXT WATER BLAST & REFINISH CONC. SURFACES W/REFINISHER (NO PAINT)	4200	SF	.12	504	.48	2,016	.60	2,520	
18 - DEMO REPL ENTRANCE STOOPS. (AS SHOWN)	2	EA	800	1600	350	1,150	4	2300	
19 DEMO DECK QUARRY & CERAMIC WALL { TILE SKULLERY SECTION	1500	SF	1.45	2,175	1.45	2,175	2.90	4,350	
20 REPL EXT DOORS AS NOTED.	4	EA	275	1,100	150.	600.	425.	1700	
21 - PREP FACIN & SOFFIT & INSTALL VINYL	1368	SF.	.76	1040	.68	930	1.44	1970	
22 REPR. PLASTER THROUGH OUT. GALLEY, OFFICES, STORAGE, HENDS AS NECESSARY.	10	SY	5.35	54.	12.05	121.	1740	174	
TOTALS					67,548		38,852		106,400

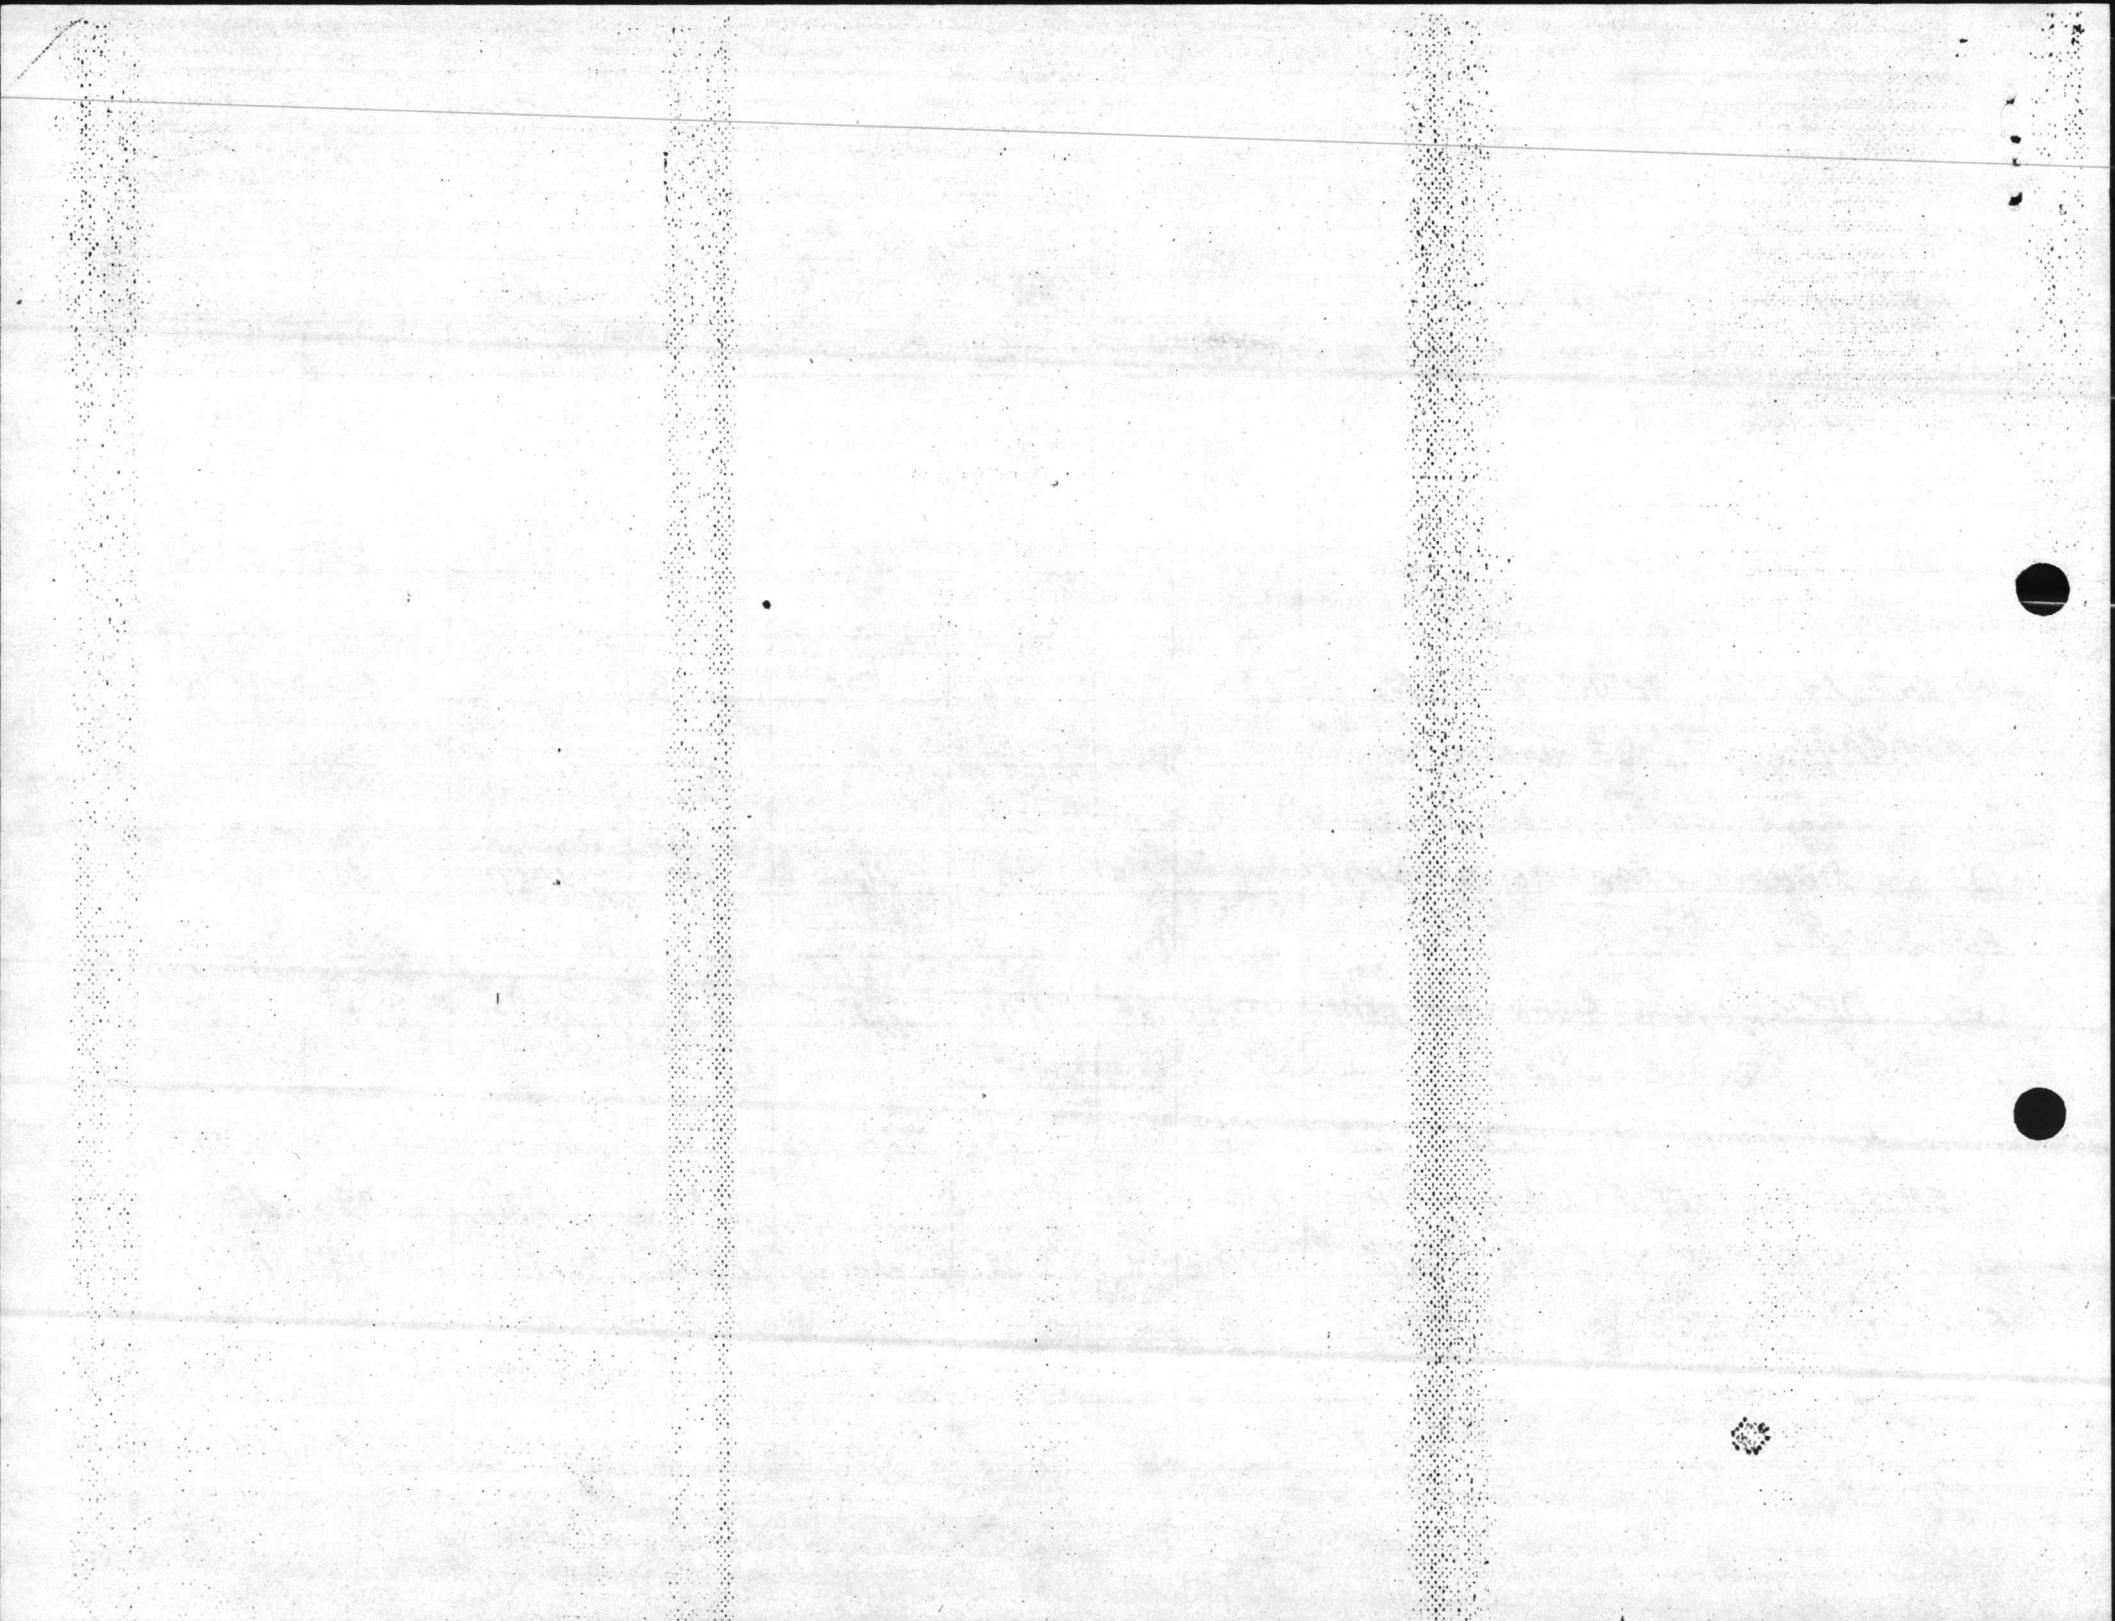


LEB10M
722-10

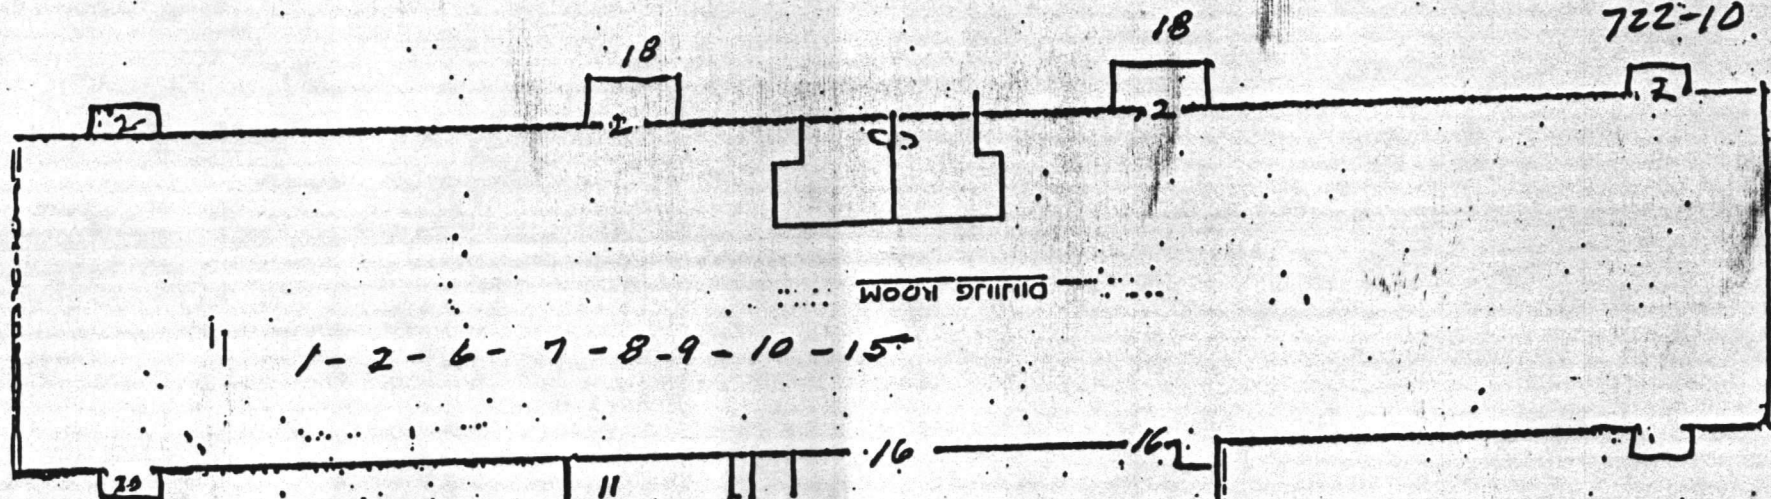

1-2-6-7-8-9-10-15

DISHING ROOM

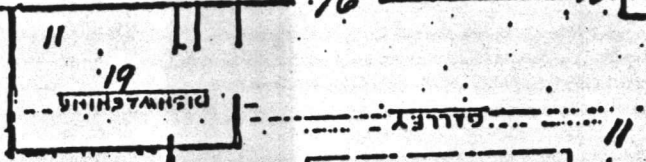

11


19

DISHING ROOM

GALLEY

BLDG-325

- 1- REPLACE WINDOWS THROUGHOUT
- 4- REPL DOORS, OFF WORK AREAS
- 5- REPL. DISPS REFRERS STAINLESS WARE CEILING
- 14- DEMO REPL CERAMIC, HANS.
- 17- PAINT INT EXT
- 21- PREP SOFFIT & INSTAL VINYL
- 2- REPAIR PLASTER THROUGHOUT

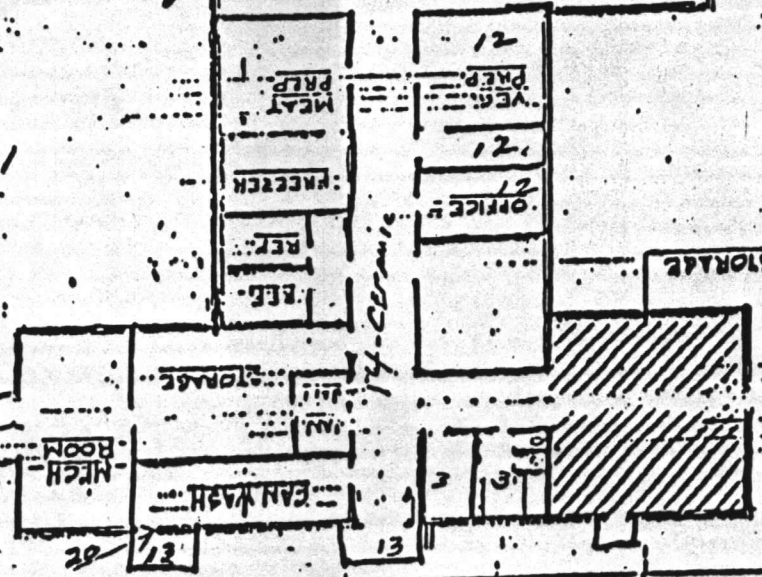

12

VEG PREP

12

OFFICE

DRY STORAGE

14 CERAMIC


MEAT ROOM


CAN WASH

20

13

13

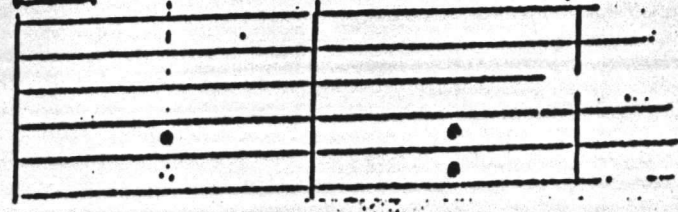

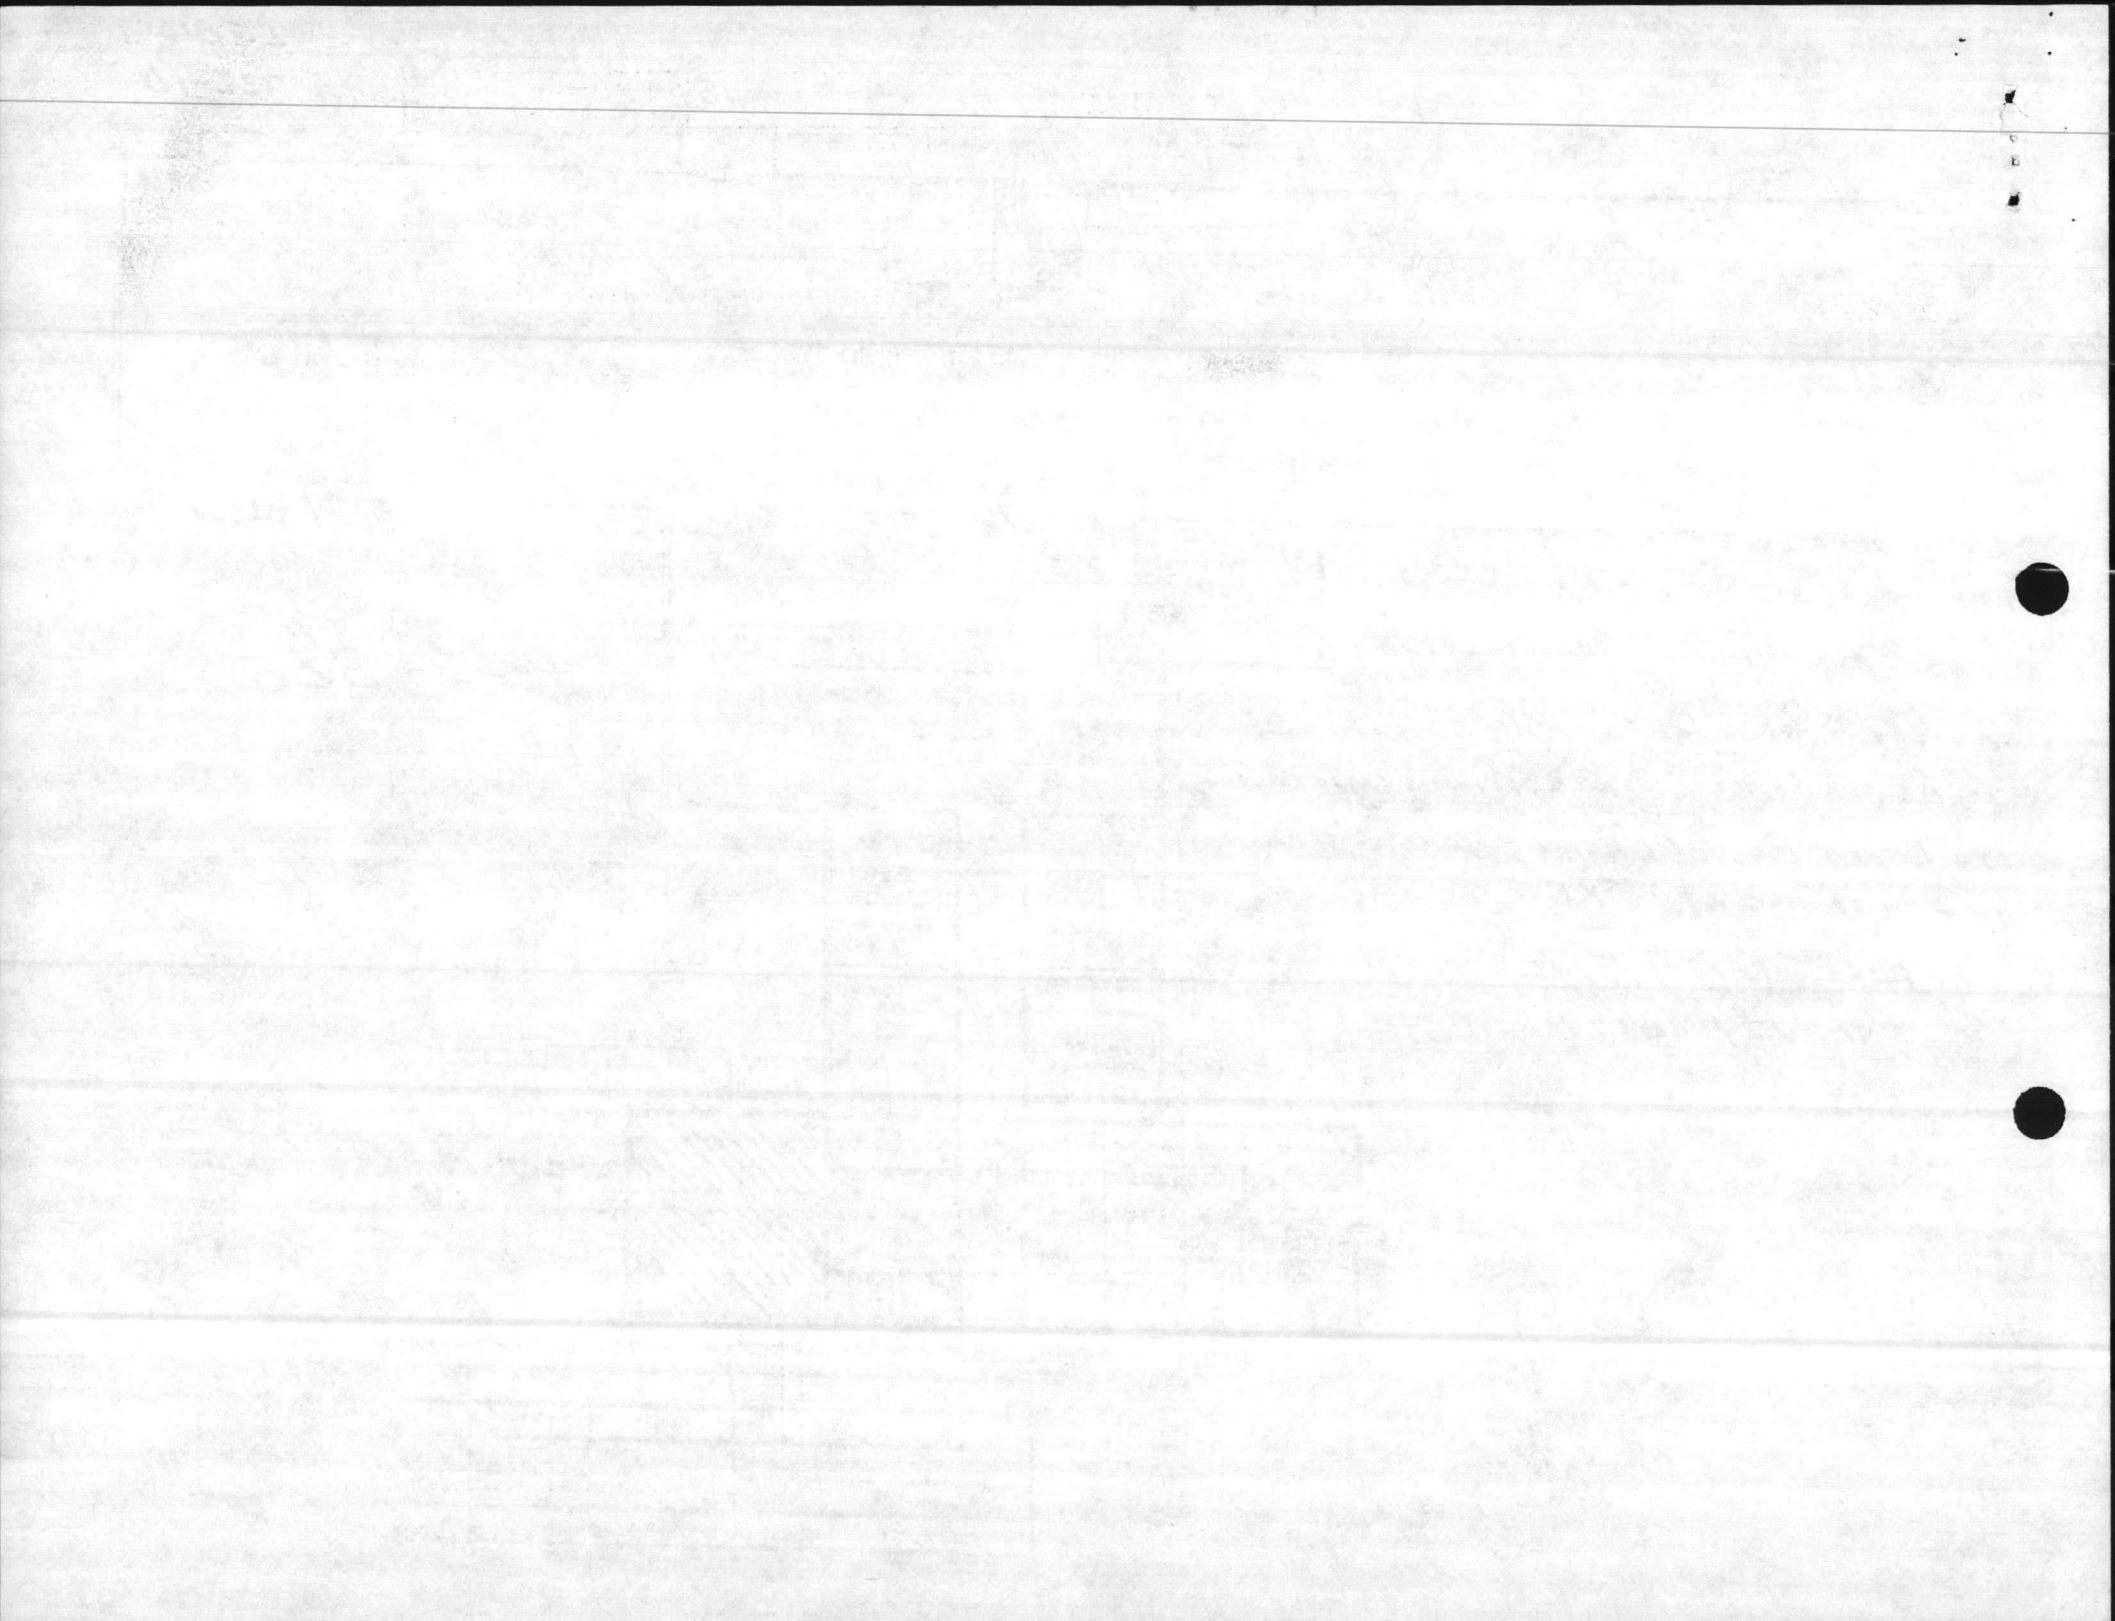

COST ESTIMATE

DATE PREPARED
3-20-86

SHEET **5** OF **11**

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

BIDG-325- PHASE # 3.

ESTIMATED BY

LEB10M

PROJECT TITLE

BLANTON

CATEGORY CODE NUMBER

722-10


RENOVATE ELECT SYSTEM.

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify) **PROJECT**

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
REPL ALL 4' X 2' 3 TUBE LAY IN FLOR FIXTURES W/ NEW 4' X 2' 4 TUBE				7000		3500		10500
INSTALL F+ FANS IN HEADS. (A) FA.				1600		1200		2800
REMOVE & REINSTALL FLV FANS OVER DOORS TO BE REPLACE				400		400		800
REMOVE ALL CONDUIT, WIRE, OUTLET BOXES, JUNCTION BOXES SWITCHES & PANEL, REIN- STALL RECESSED IN WALL, DINING AREA				1500		2000		3500

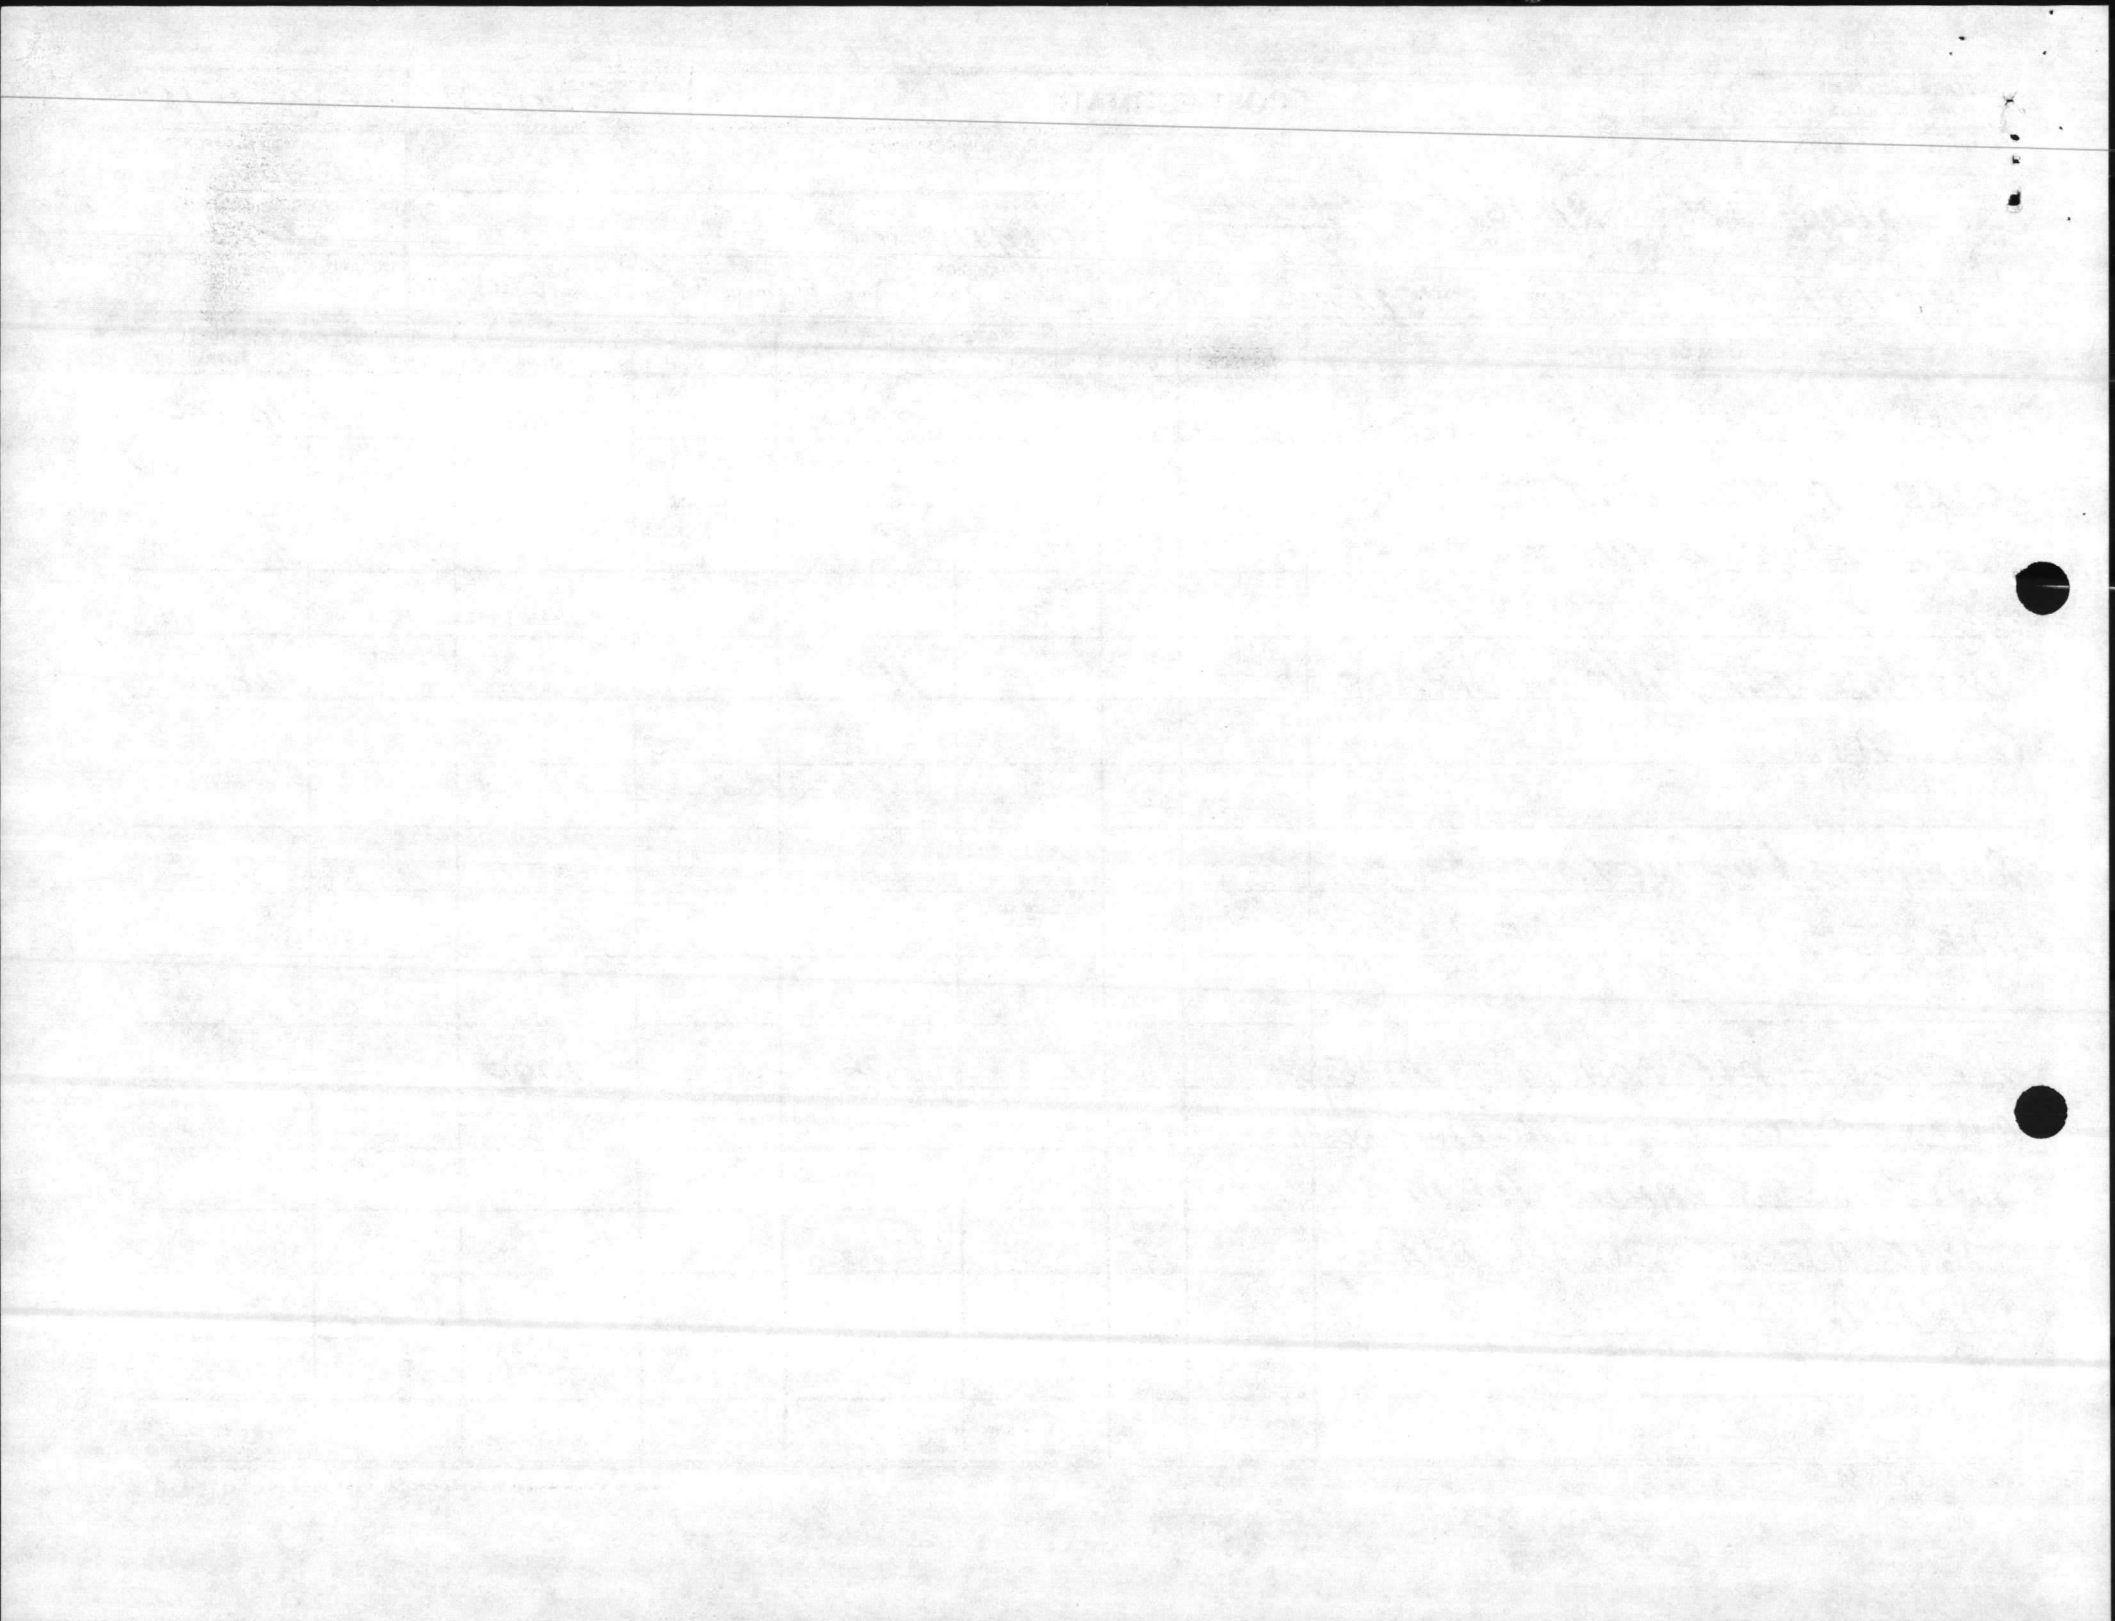

COST ESTIMATE

DATE PREPARED
3-20-06

SHEET **6** OF **11**

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

BLDG. 325- PHASE #3.

ESTIMATED BY

LEB10M

PROJECT TITLE

BLANTON

CATEGORY CODE NUMBER

722-10


RENOVATE ELECT SYSTEM.

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify **Project**)

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
CEILING TO BE REPLACED IN OFFICES AREAS. REPL. EXISTING W/NEW FLUOR. FIXTURES, TO BE COMPATIBLE W/NEW CEILING.				600		400		1000
REPL ALL 4'(2) TUBE VAPOR PROOF FLOOR FIXTURES IN GALLEY & SULLERY AREA				9500		4500		14,000
REPAIR ALL DAMAGE TO BLDG CAUSE BY RENOVATION.				500		1000		1500
TOTAL				21,100		13,000		34,100

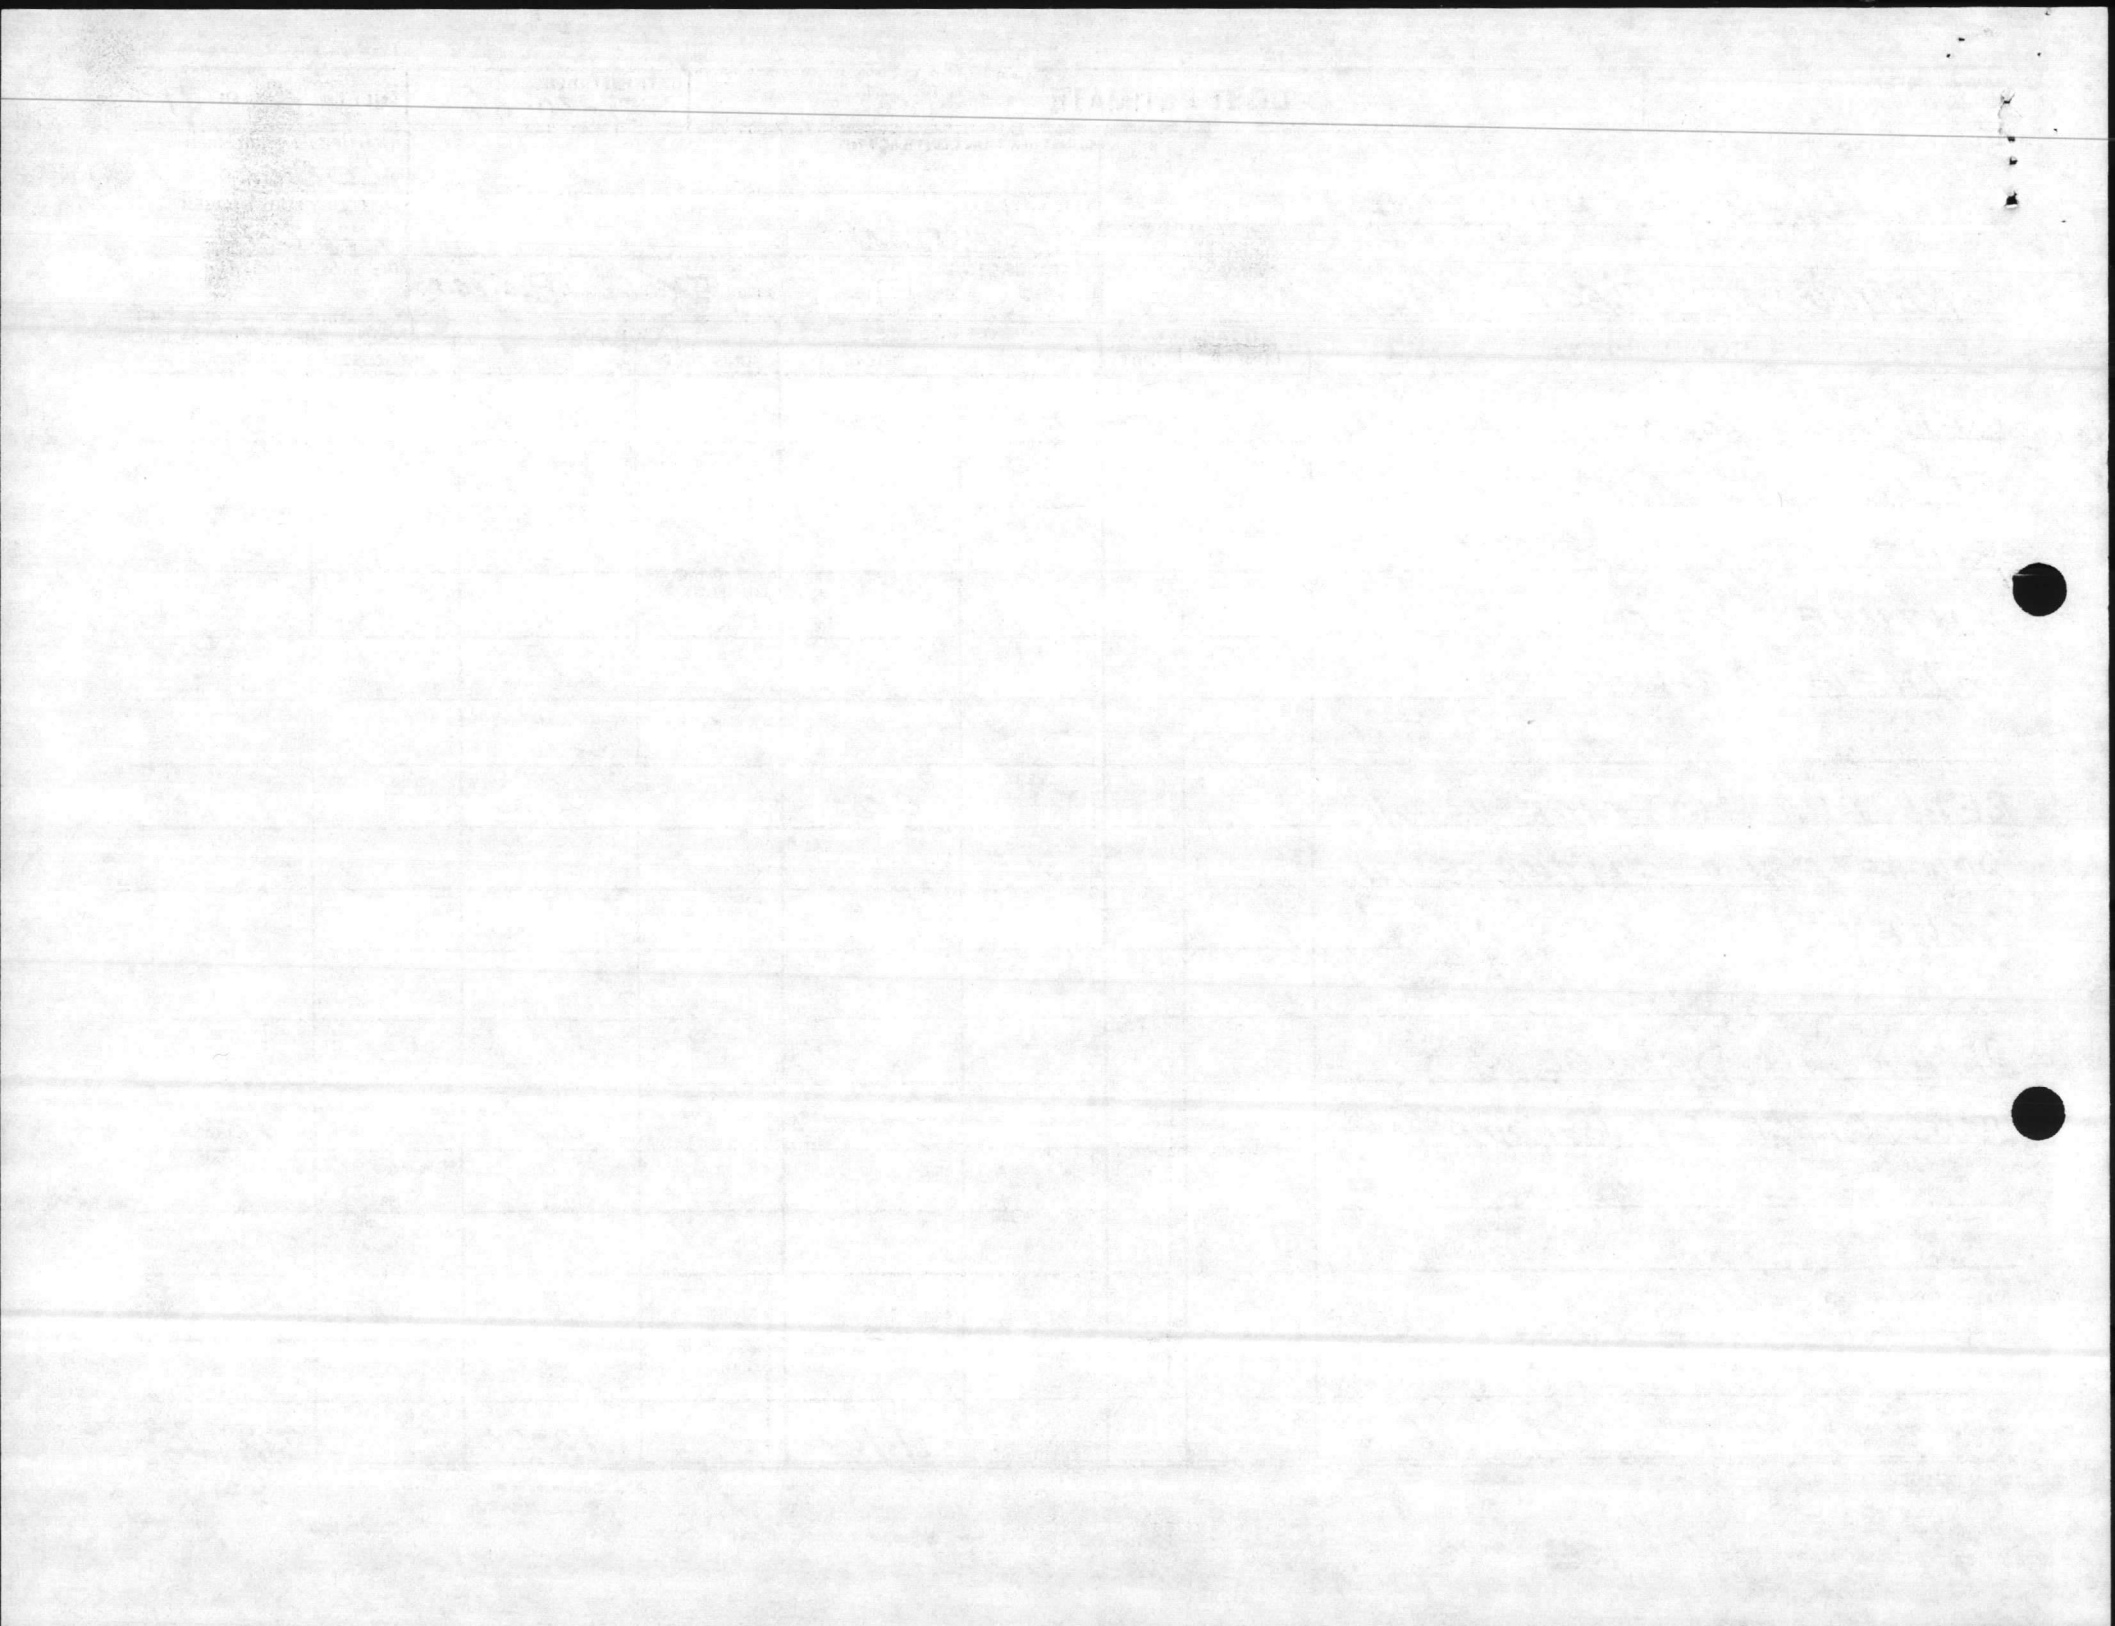

COST ESTIMATE

DATE PREPARED
 7-20-86

SHEET 7 OF 11

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

LE810M

PROJECT TITLE

BLDG-325 PHASE #3.

ESTIMATED BY

HILFFMAN

CATEGORY CODE NUMBER

722-10


STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify) PROJECT

JOB ORDER NUMBER

RENOVATE MESS HALLS.

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
HEADS NEAR STORAGE ROOM & LOADING RAMP. REMOVE ALL PLUMBING FIXTURES & SHOWER STALLS FOR NEW FLOOR & WALL TILE, REPL PLUMBING FIXTURES W/NEW STATE OF THE ART FIXTURES & TRIM. REPL SHOWER STALLS W/ MASONRY & CERAMIC SHOWERS.				2250		1200		3450
REPL. & SECURELY MISSING FLOOR DRAINS & CLEAN OUT. COVERS THROUGH BUILDING; REPL SCULLERY DISHWASHER FLOOR DRAIN INCLUDING P. TRAP				500		600		1100

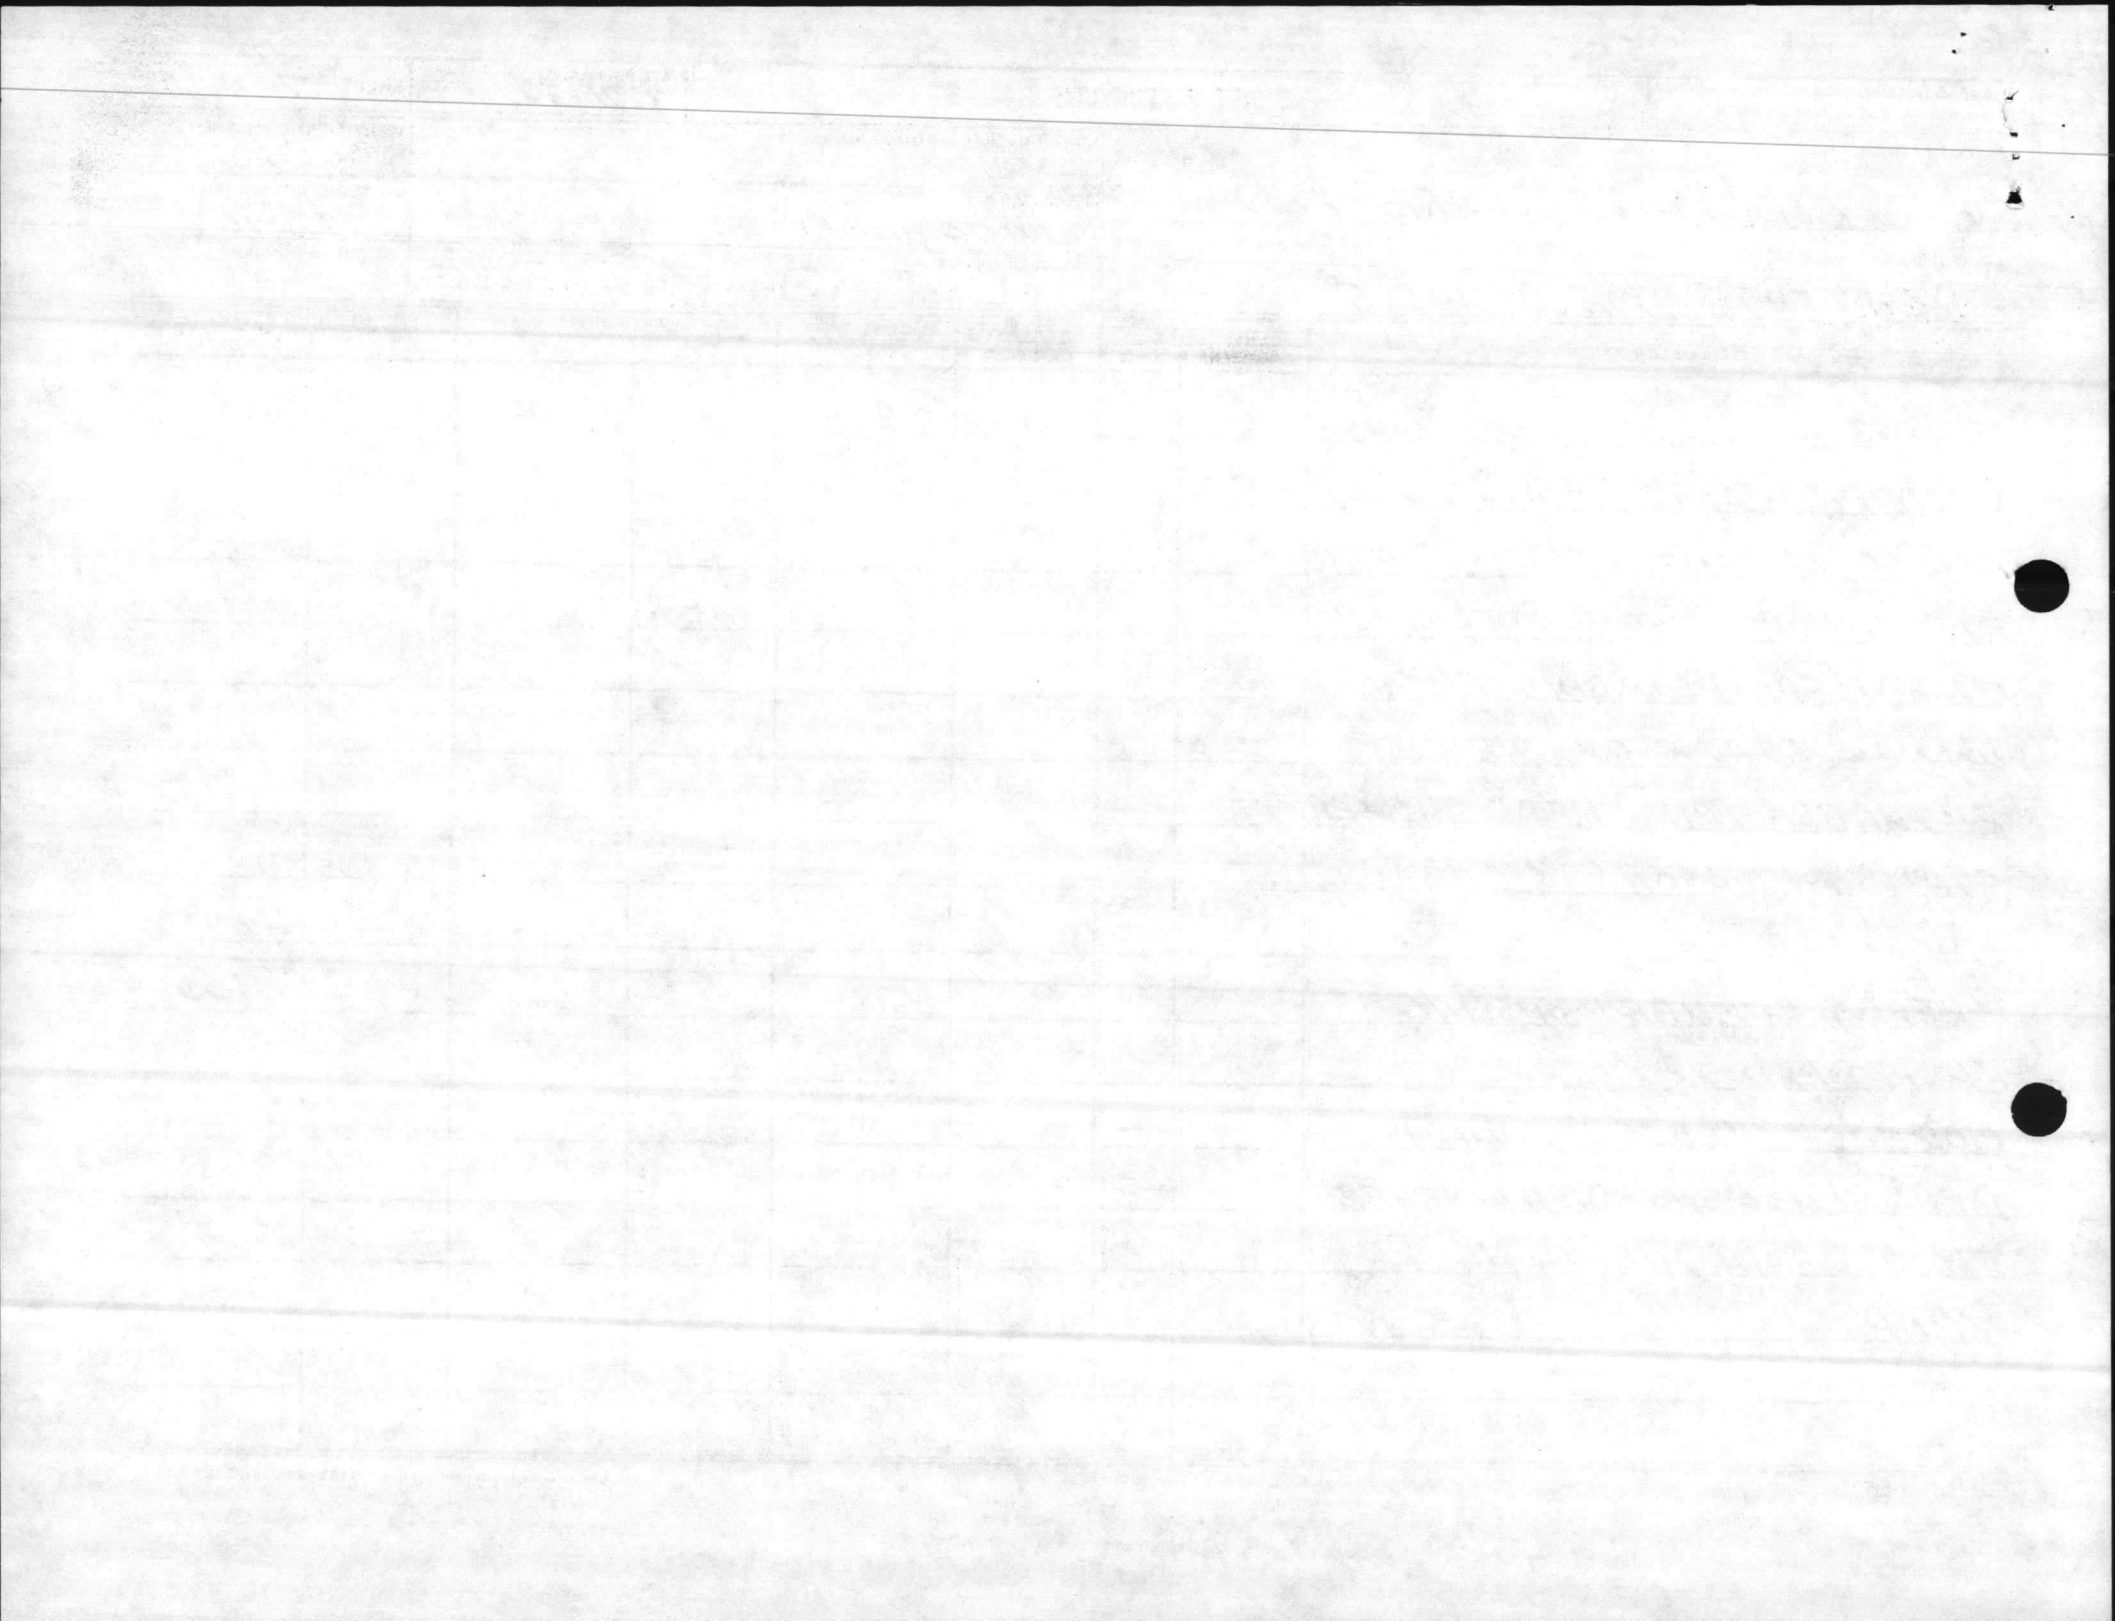

COST ESTIMATE

DATE PREPARED
 3-20-86

SHEET **B** OF **11**

ACTIVITY AND LOCATION

BLDG. 325 PHASE #3.

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

LEB104

PROJECT TITLE

RENOVATE MESS HALLS.

ESTIMATED BY

HUFFMAN

CATEGORY CODE NUMBER


722-10

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify Project)

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
IN SCULLERY ROOM DISCONNECT & RECONNECT, FOR TILE REPLACEMENT, ALL WATER, STEAM, CONDENSATE, DRAINS, & DUCKS TO SCULLERY EQUIP. IN SERVING LINE AREA (ALL SERVING LINES)						500		500
DISCONNECT & RECONNECT FOR FLOOR & WALL TILE REPLACEMENT & /OR INSTALATION ALL WATER, STEAM, CONDENSATE, DRAINS, DUCK, ANSKL FIRE LINES, EXTEND ALL PIPING AS REQUIRED; THROUGHOUT BLDG. FOR EQUIP. CONNECTIONS & /OR WALL REPAIRS, EXTENSION OR FURRED.						1200		1200

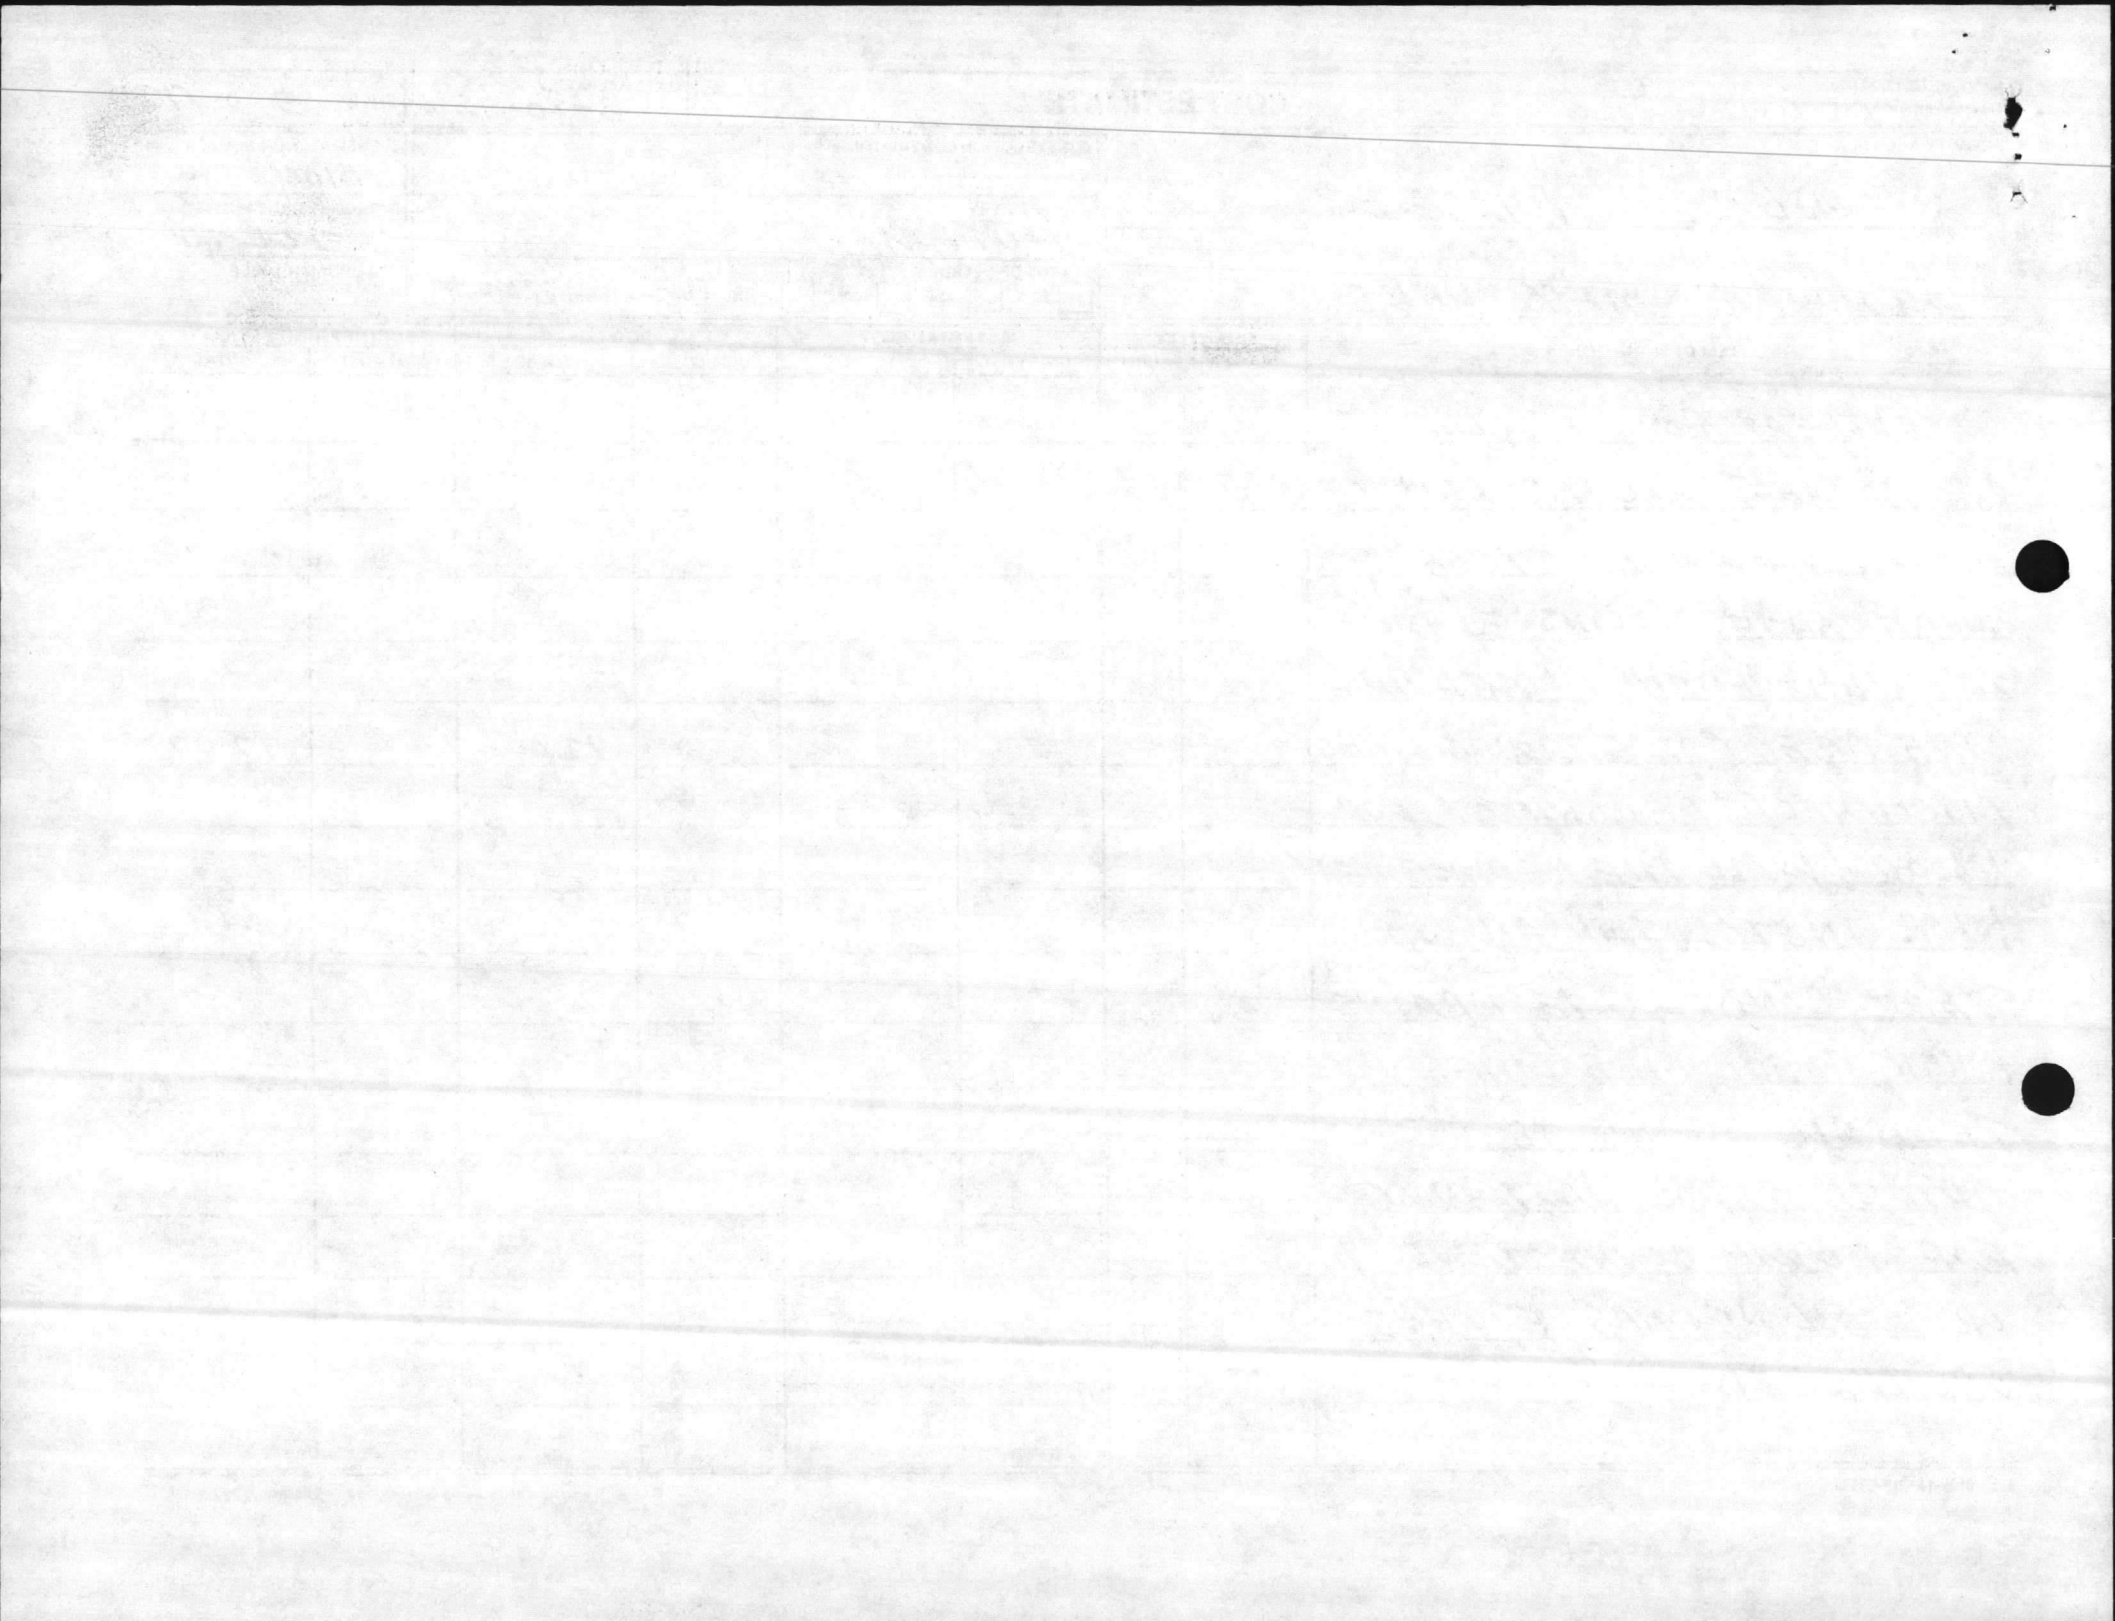

COST ESTIMATE

DATE PREPARED

3-20-86

SHEET 9 OF 11

ACTIVITY AND LOCATION

BLDG. 323- PHASE -3

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

LEB10M

ESTIMATED BY

HUFFMAN

CATEGORY CODE NUMBER

702-10


STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify)

JOB ORDER NUMBER

RENOVATE MESS HALLS.

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
IN HEADS ON MESS DECK EXTEND HTG & A/C SUPPLY & RETURN AIR DUCTS & GRILLS FROM EXISTING SYSTEMS MESS DECK AREA, REPL ALL SUPPLY & RETURN HTG & AC CEILING GRILLS ON ROOF. REPL ALL EX-FANS OVER GALLEY & SERVING LINES SCULLERY ROOF REPL EX-FANS OVER DISH WASHER & INCREASE SIZE & VOLUME. IN OFFICE, VEG. PREP, HEADS MEAT PREP. AREAS & WINDOW A/C UNITS & INSTALL CENTRAL HVAC SYSTEM COMPLETE IN SAME TO INCLUDE AIR HANDLER, H/C CONDENSER, COMPRESSOR →				400		800		1200
				4,000		700		4,700
				9,500		2,000		11,500
				1600		500		2100
				13,000		6,000		18,000

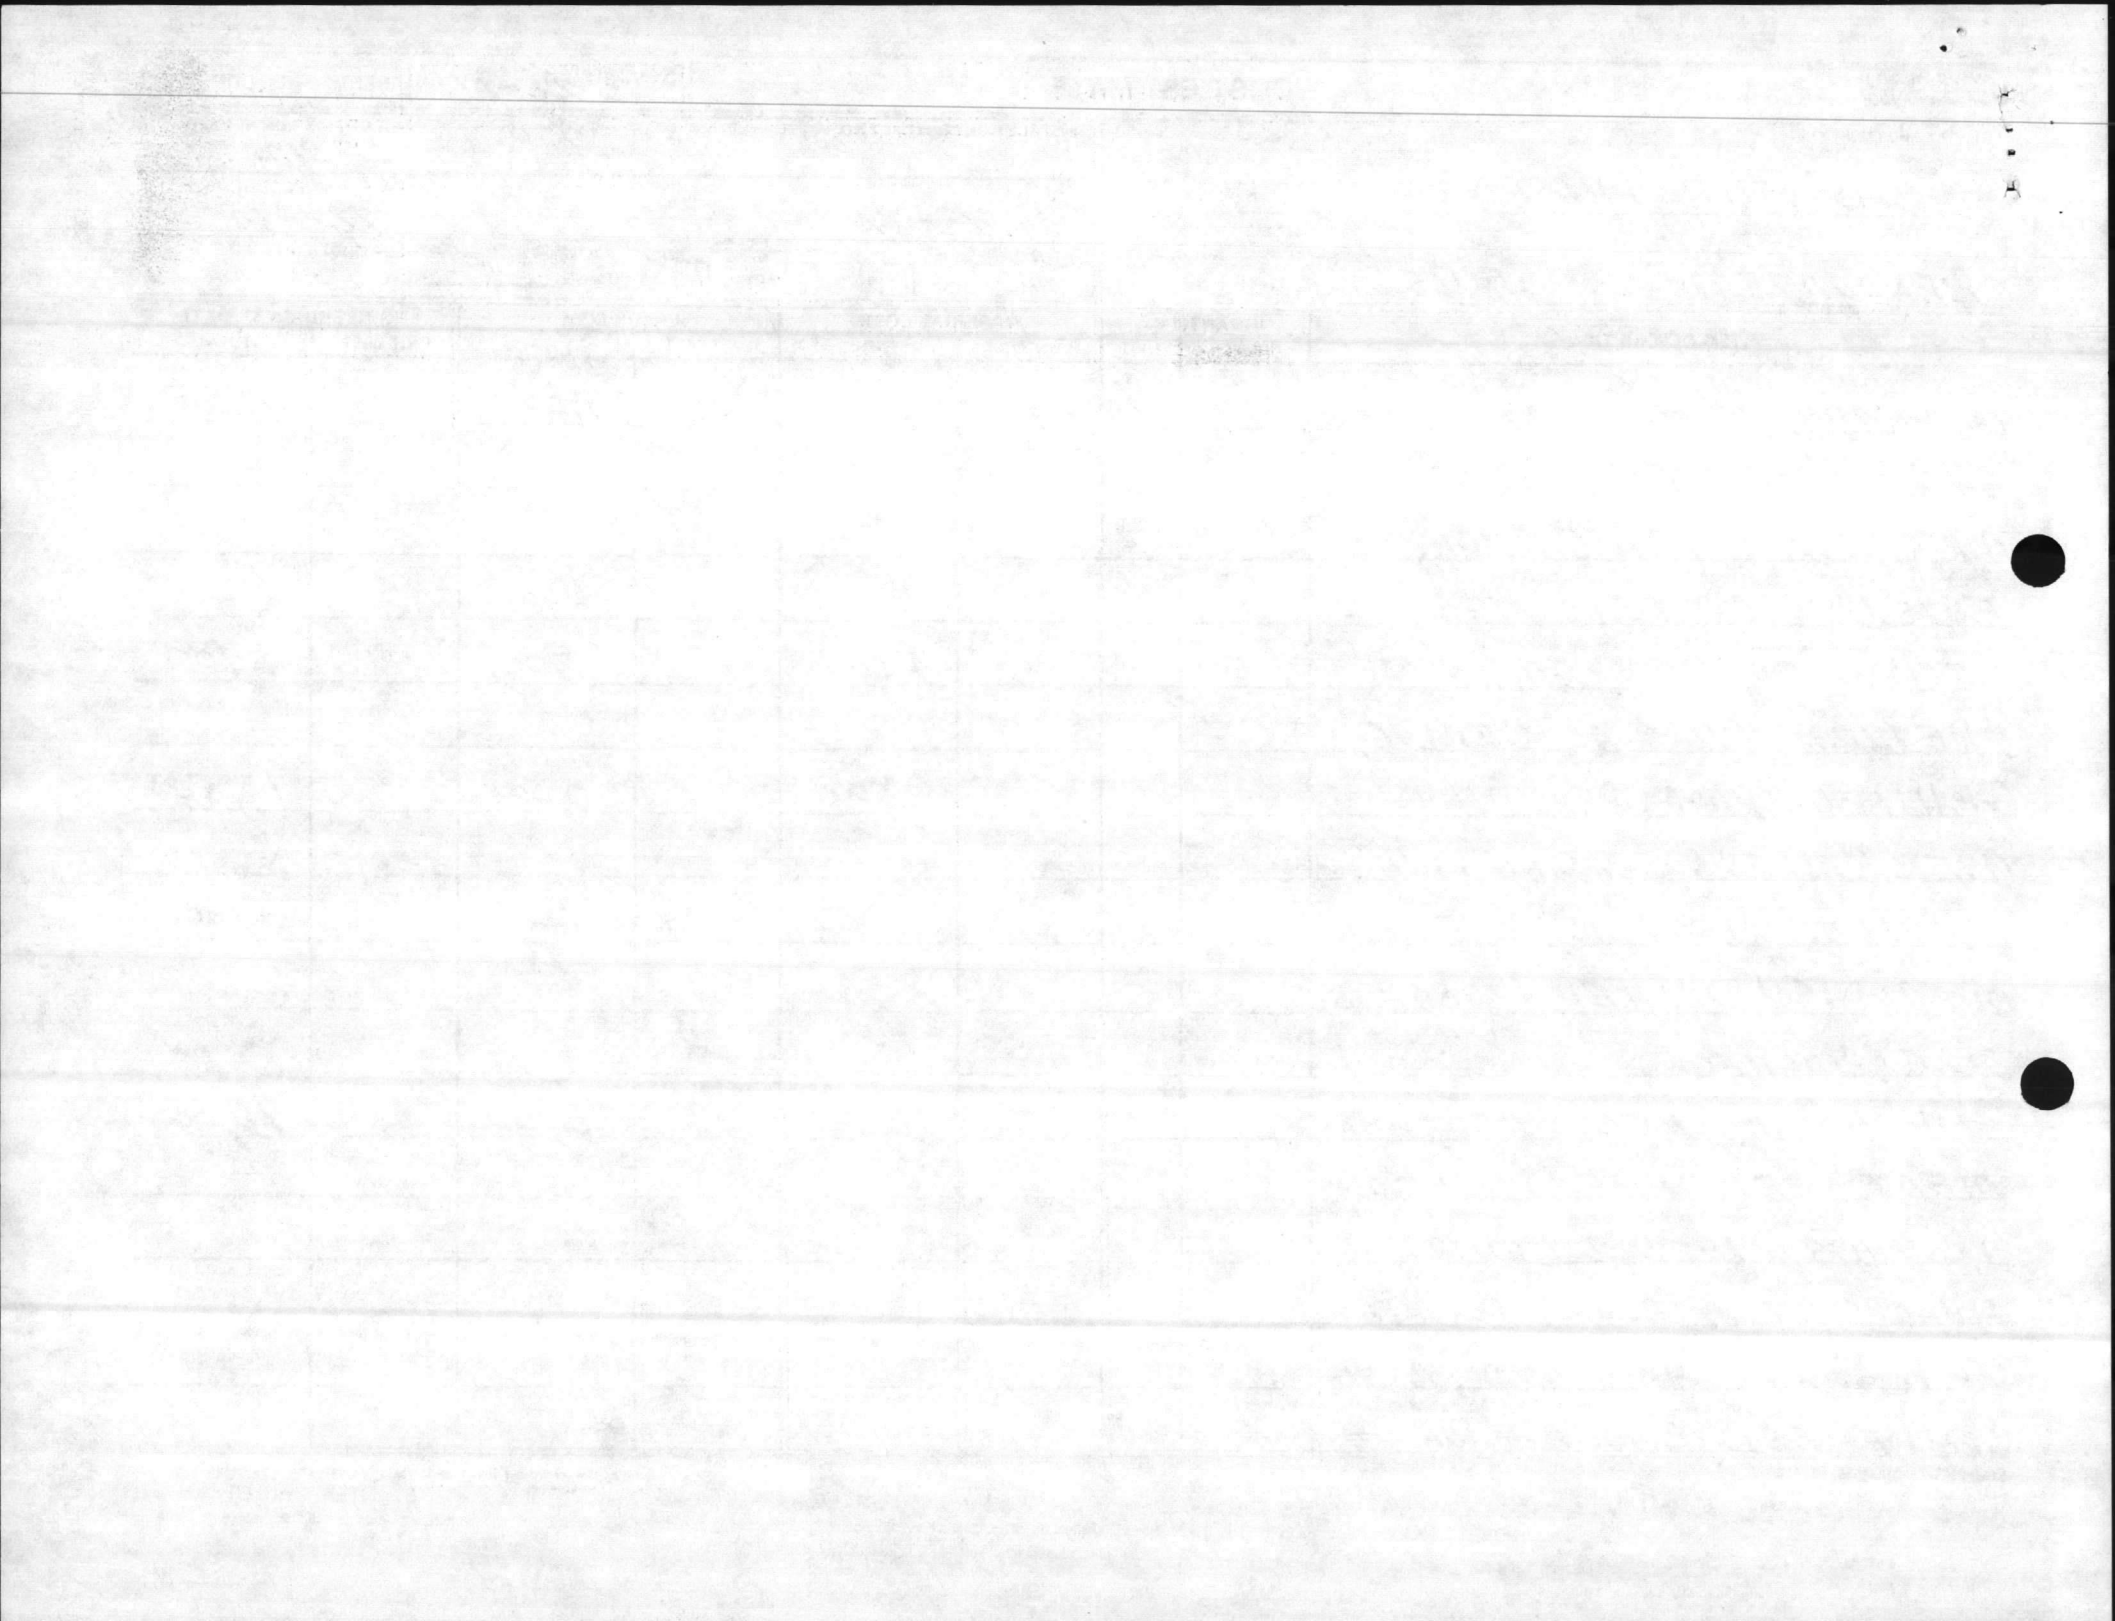

COST ESTIMATE

DATE PREPARED
3-20-86

SHEET **10** OF **11**

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

BLDG-325 PHASE #2

ESTIMATED BY

LEBOM

PROJECT TITLE

HUFFMAN

CATEGORY CODE NUMBER

722-10


RENOVATE MESS HALLS

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify) **PROJECT**

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
STEAM HEATING COILS, INSULATED DUCK PIPING, CONTROLS, WIRING, ECT. IN (3) OLD WALK IN COOLERS REMOVE, REHANG, RECONNECT EVAPORATOR FAN COILS UNITS FOR WALL & CEILING REPAIR.						1200		1200
REPLACE EXT. AC DUCK INSULATION W/ WATER TIGHT INSULATION (2) UNITS, & INSULATE PIPPINGS ABOVE NEC A/C AREA				850		1550		2400
TOTAL				31,100		16,250		47,375

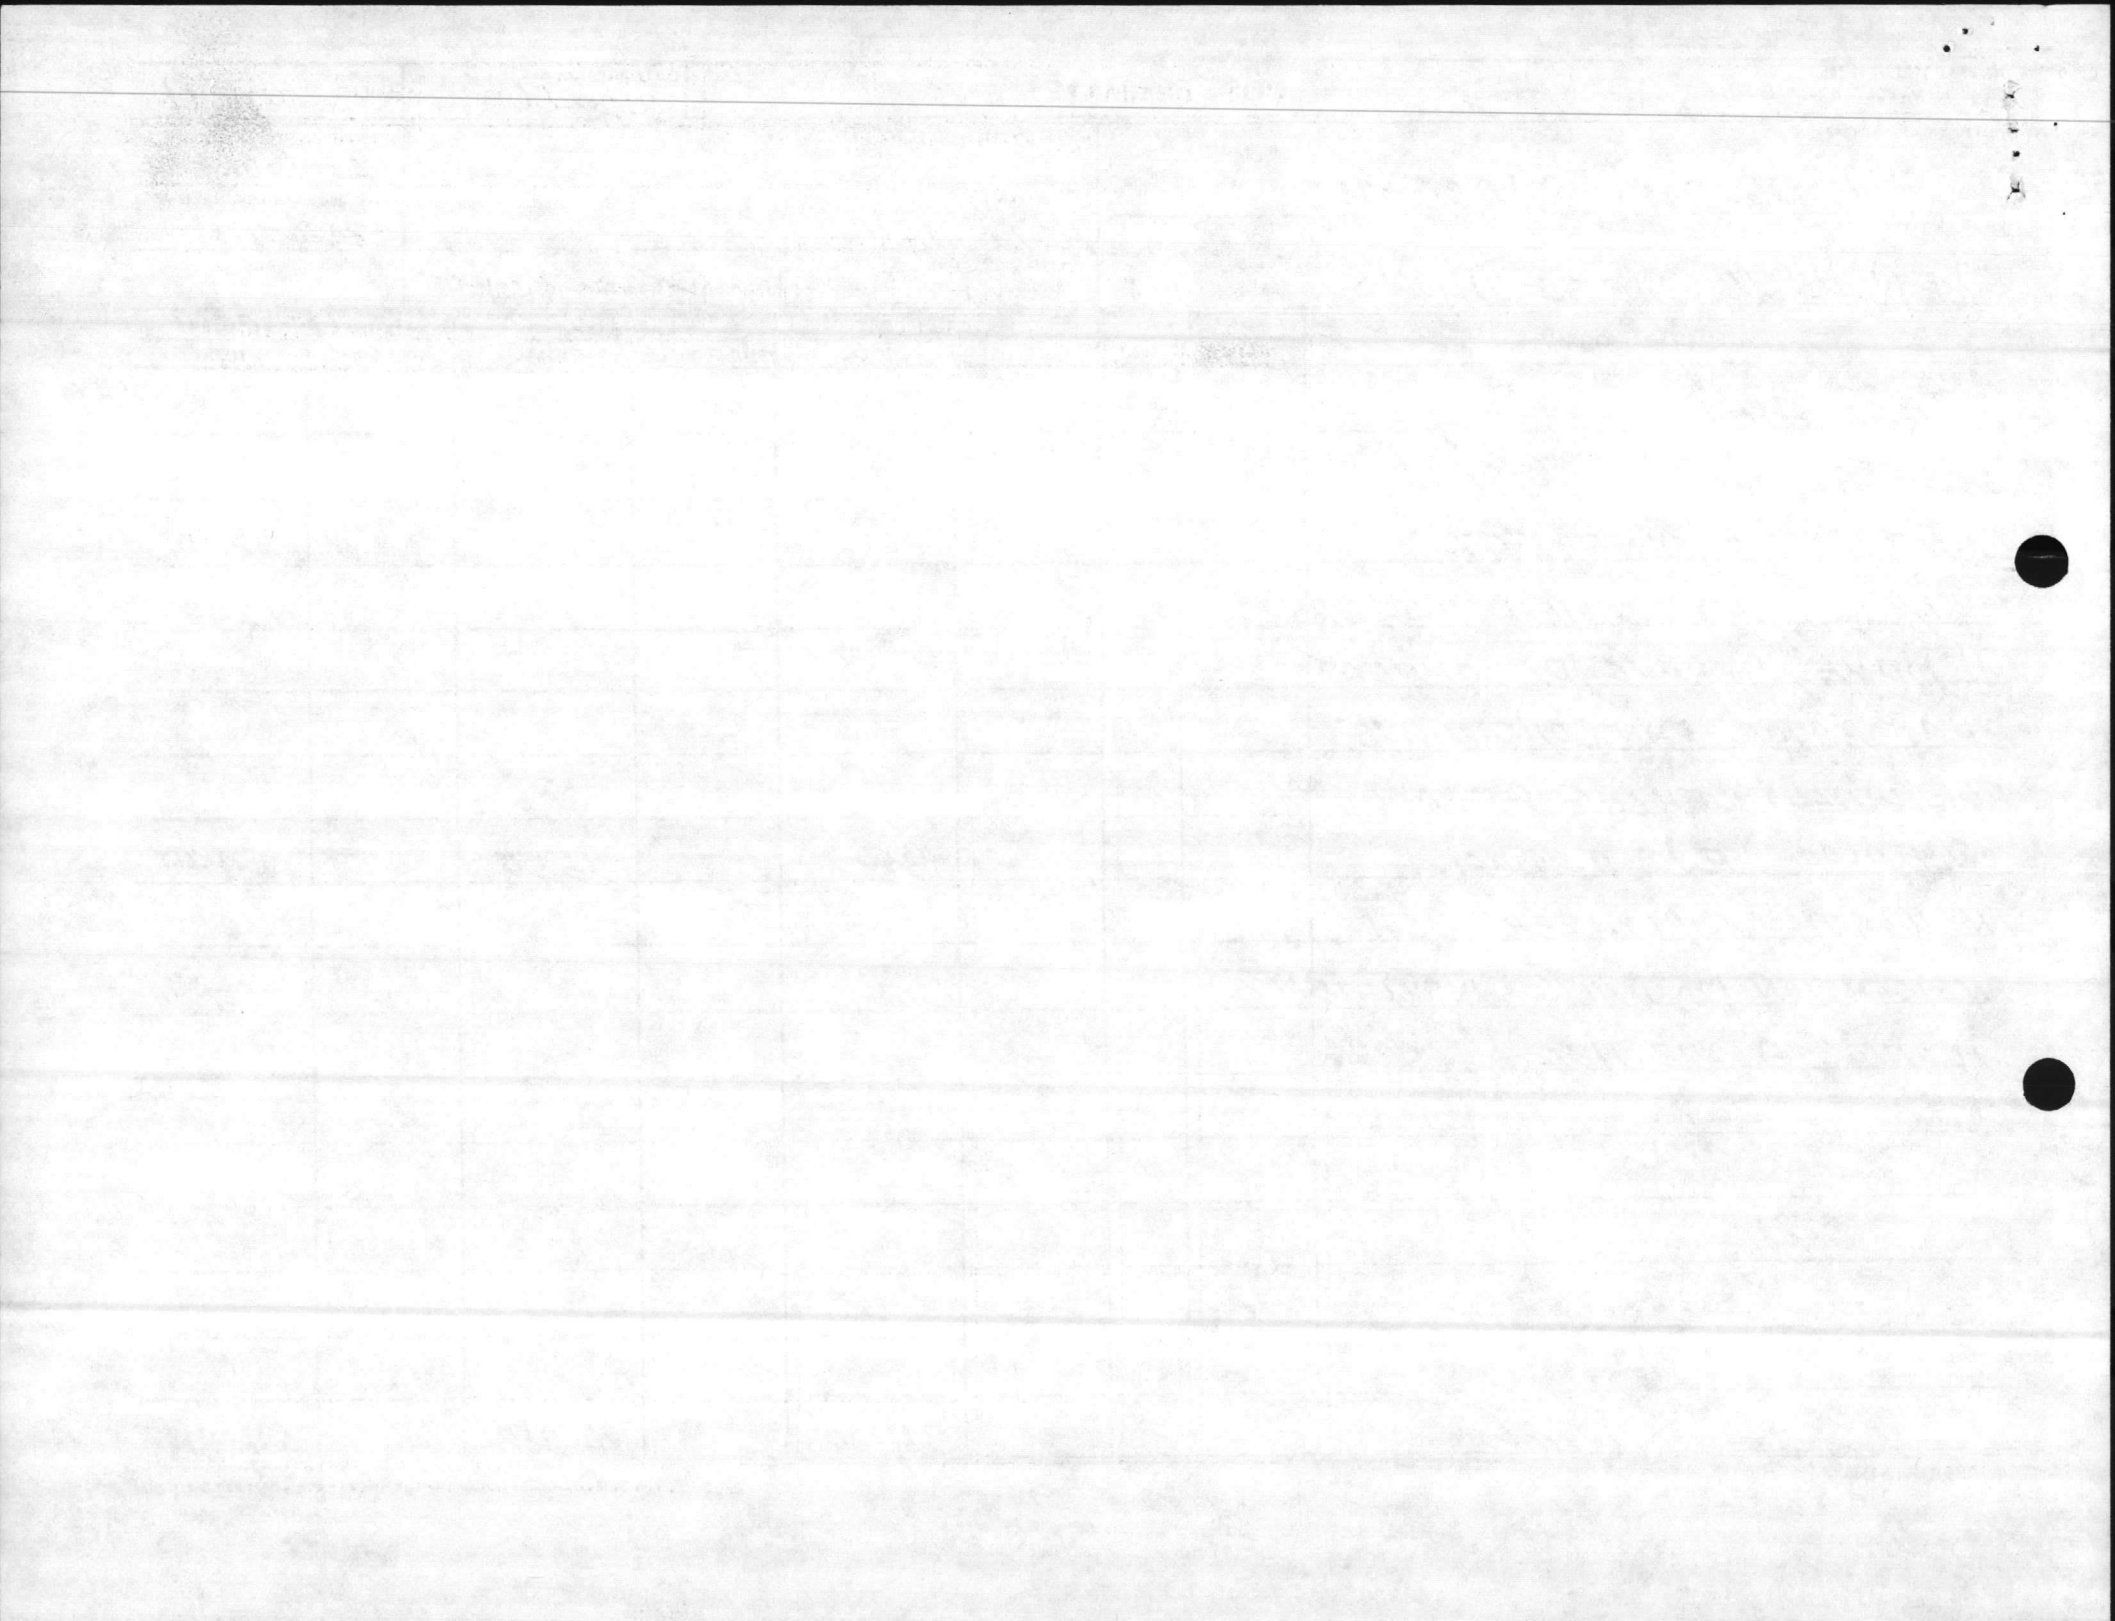

COST ESTIMATE

DATE PREPARED
 11-7-86

SHEET 11 OF 11

ACTIVITY AND LOCATION

325 PHASE 3

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

LE810M

ESTIMATED BY

HUFFMAN

CATEGORY CODE NUMBER

722-10

PROJECT TITLE


RENOVATE MESS HALLS

STATUS OF DESIGN

PED
 30%
 100%
 FINAL
 Other (Specify) **PROJET**

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
STRUCTURAL				67,548		38,852		106,400
ELECTRIC				21,100		13,000		34,100
MECHANICAL				31,100		16,250		47,375
BASIC TOTAL				119,748		68,102		187,875
OVER HEAD	1570							28,181
LABOR	1870							12,258
MATERIAL	4.570							5,389
SUB TOTAL								233,703
PROFIT	1070							25,370
SUB TOTAL								257,073
Bond	170							2,571
SUB TOTAL								259,644
						Rounded		259,700

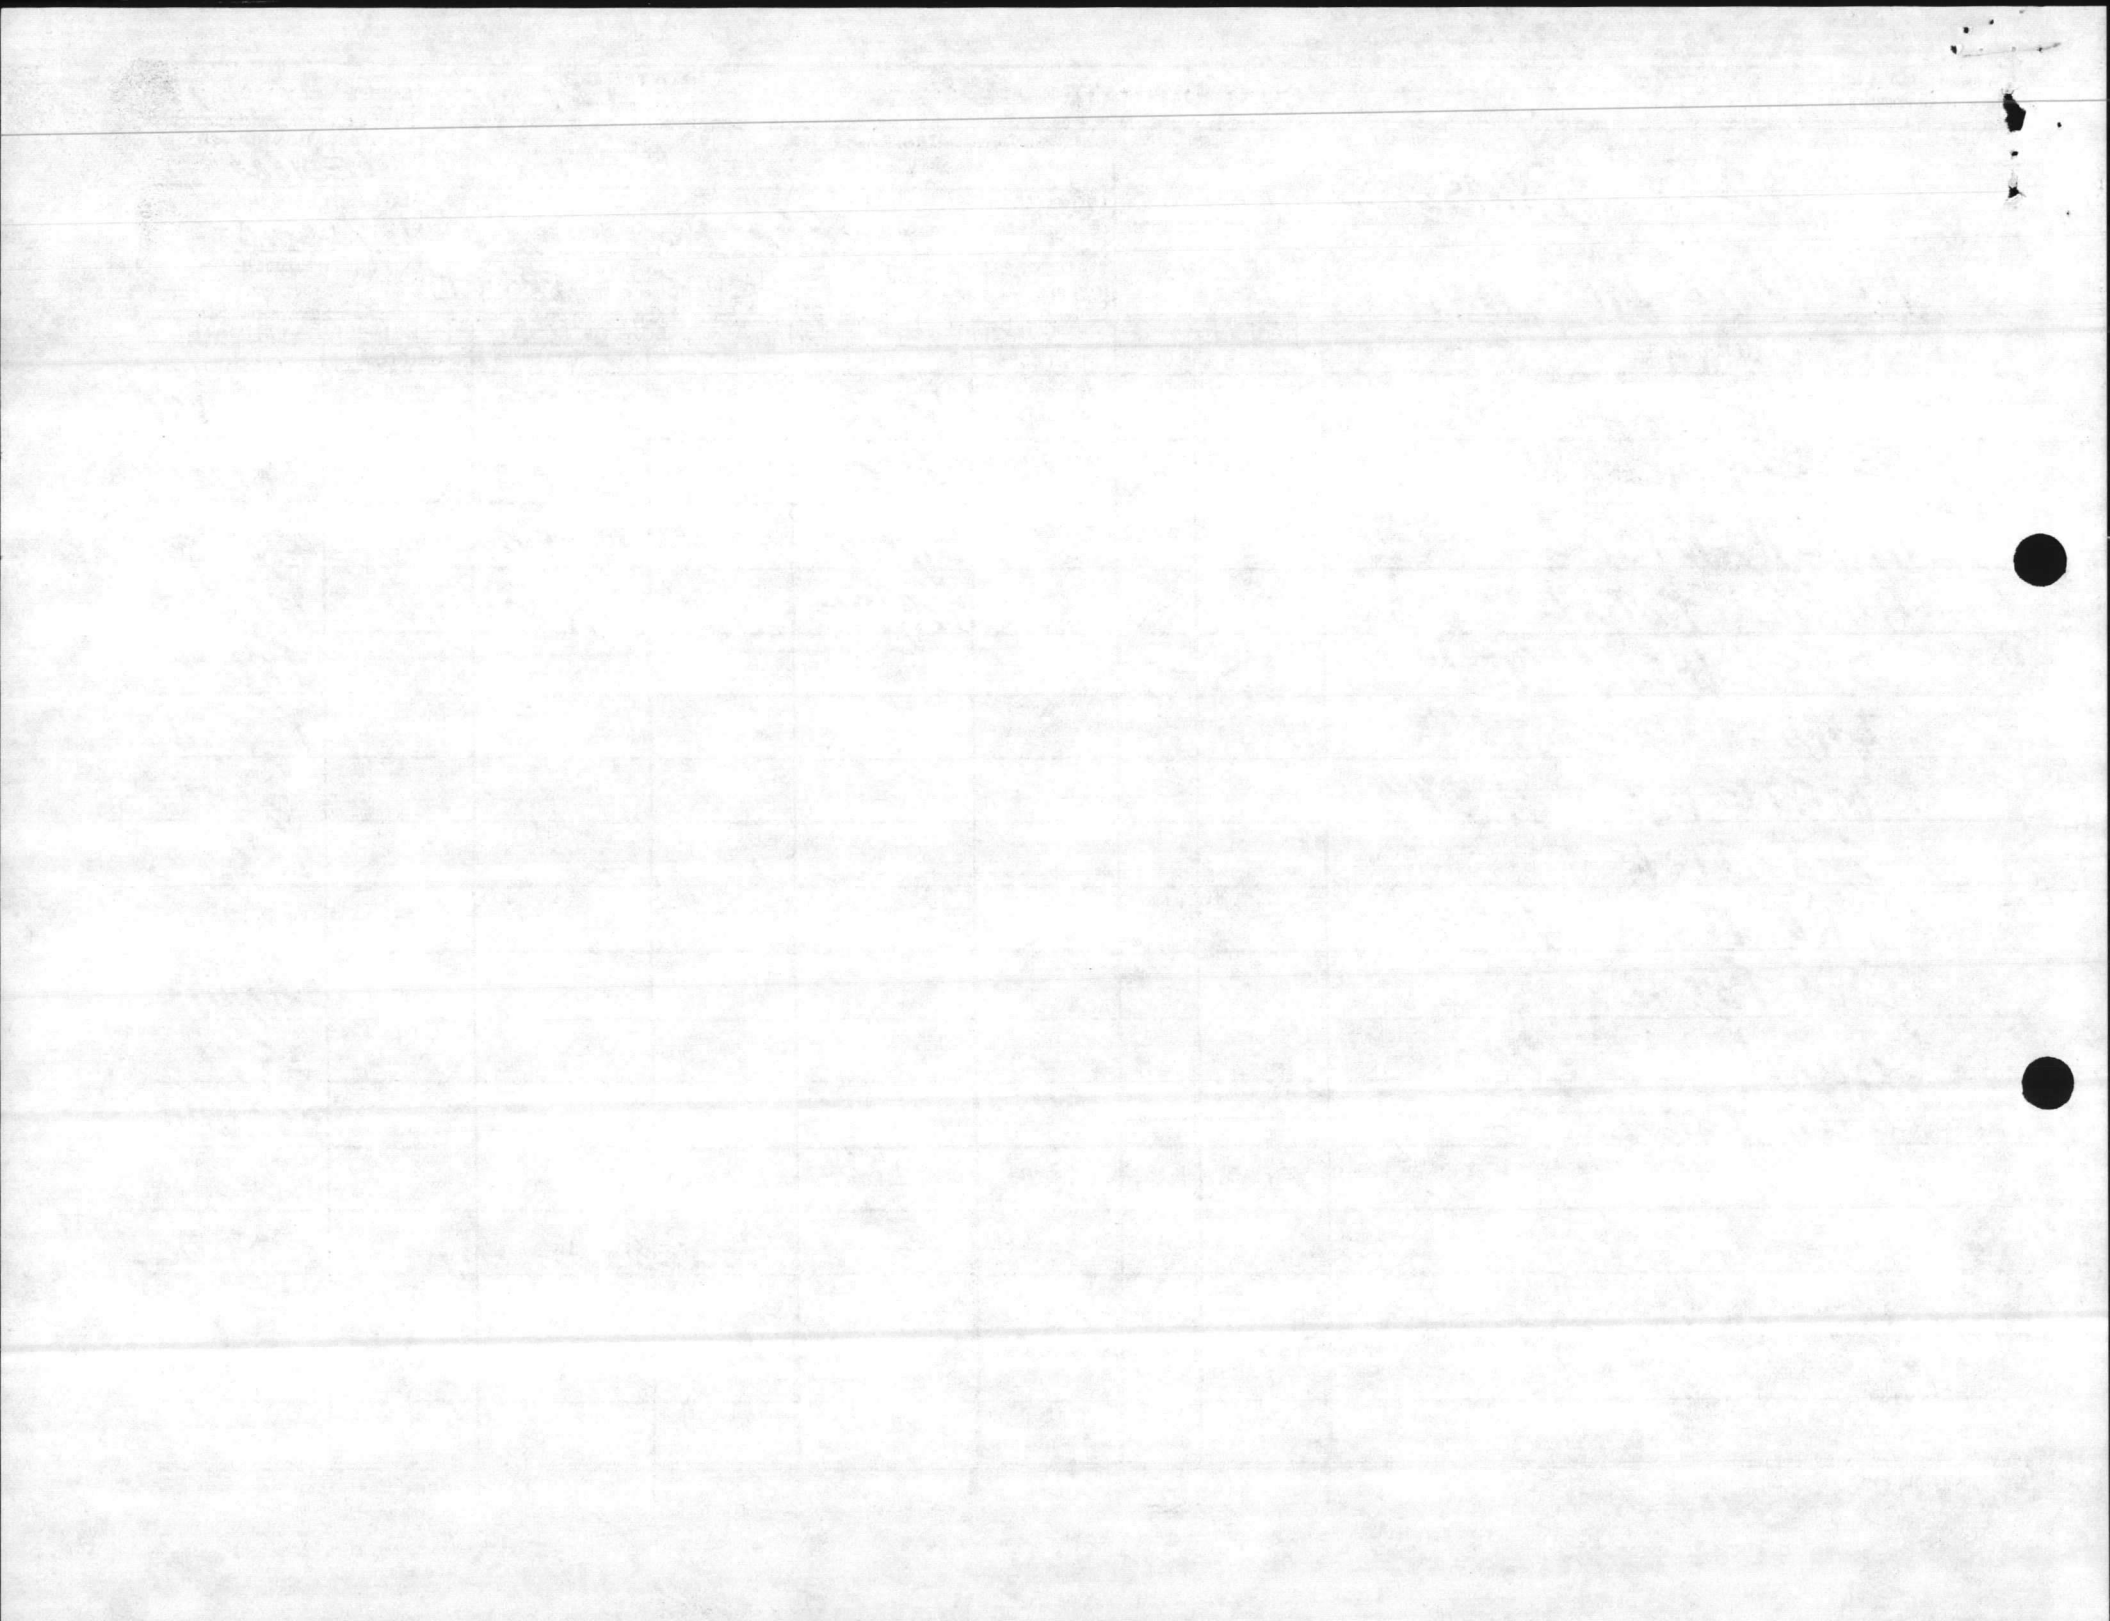

COST ESTIMATE

DATE PREPARED

SHEET OF

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO

IDENTIFICATION NUMBER

508

ESTIMATED BY

HUFFMAN

CATEGORY CODE NUMBER

PROJECT TITLE


RENOVATE MESS HALLS

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify)

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
STRUCTURAL				22,914		14,174		37,090
BASIC TOTAL				22,914		14,174		37,090
OVER HEAD 15%								5,564
LABOR 18%								2,551
MATERIAL 4.5%								1,031
SUB TOTAL								46,236
PROFIT 10%								4,624
SUB TOTAL								50,860
BOND 1%								509
SUB TOTAL								51,369
							Rounded	51,400

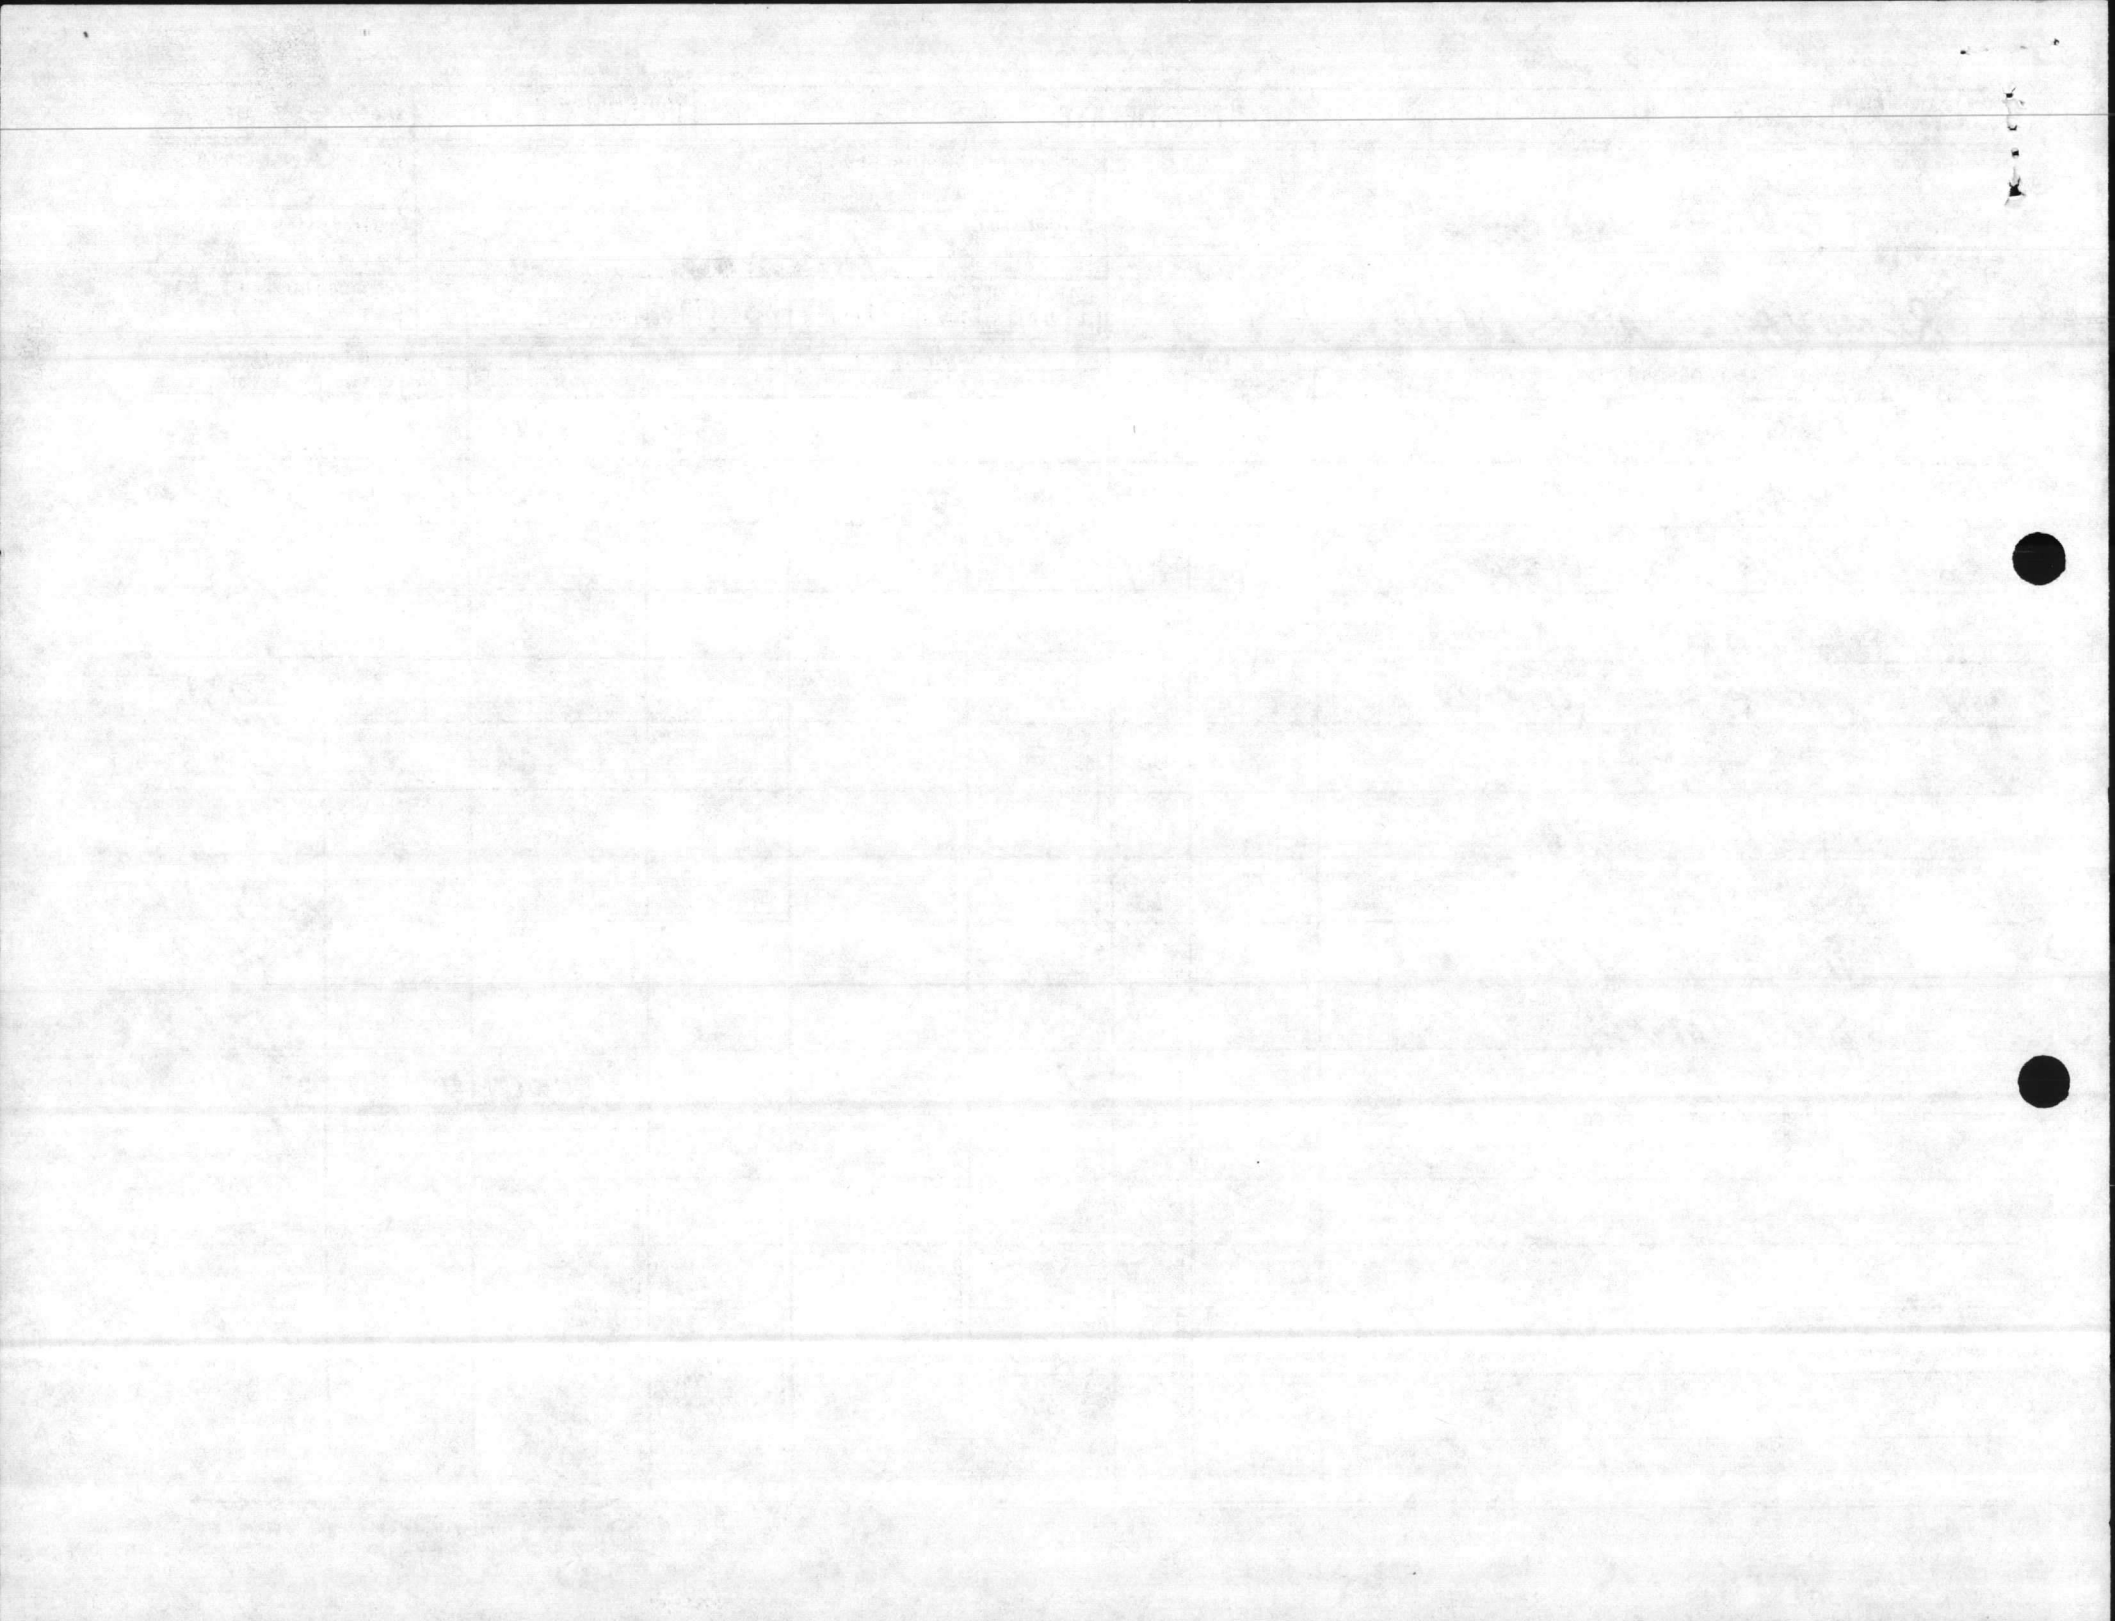

COST ESTIMATE

DATE PREPARED
3.21.86

SHEET **1** OF **3**

ACTIVITY AND LOCATION
BLDG. 508 PHASE #1

PROJECT TITLE
RENOVATE MESSHALLS.

CONSTRUCTION CONTRACT NO.

ESTIMATED BY
SAWYER


STATUS OF DESIGN
 PED 30% 100% FINAL Other (Specify) **PROBT**

IDENTIFICATION NUMBER
LE810M

CATEGORY CODE NUMBER
722-10

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
1 DEMO & REPL WINDOWS w/ MODERN STATE OF THE ART THERMO PANE WINDOWS.	140	EA	130	18200	76	10640	208	28840
2- DEMO & REPL ENTRANCE STOOPS (CONC)	2	EA	900	1800	300	600	1200	2400
3 DEMO & REPL BUILT UP ROOF w/ 1 PLV NEOPRENE, INSUL. & GRAVEL STOP	5.5	SQ	280	1540	120	660	400	2200
4 WATER BLAST & REFINISH EXT. CONC SURFACES w/ REFINIZIT CONC FINISH	2800	SF	.12	336	.48	1344	.60	1680
5 PREP FACIES & SOFFIT, INSTALL VINYL.	1368	SF	.76	1040	.68	930	1.44	1970
TOTAL				22,916		14,174		37,090

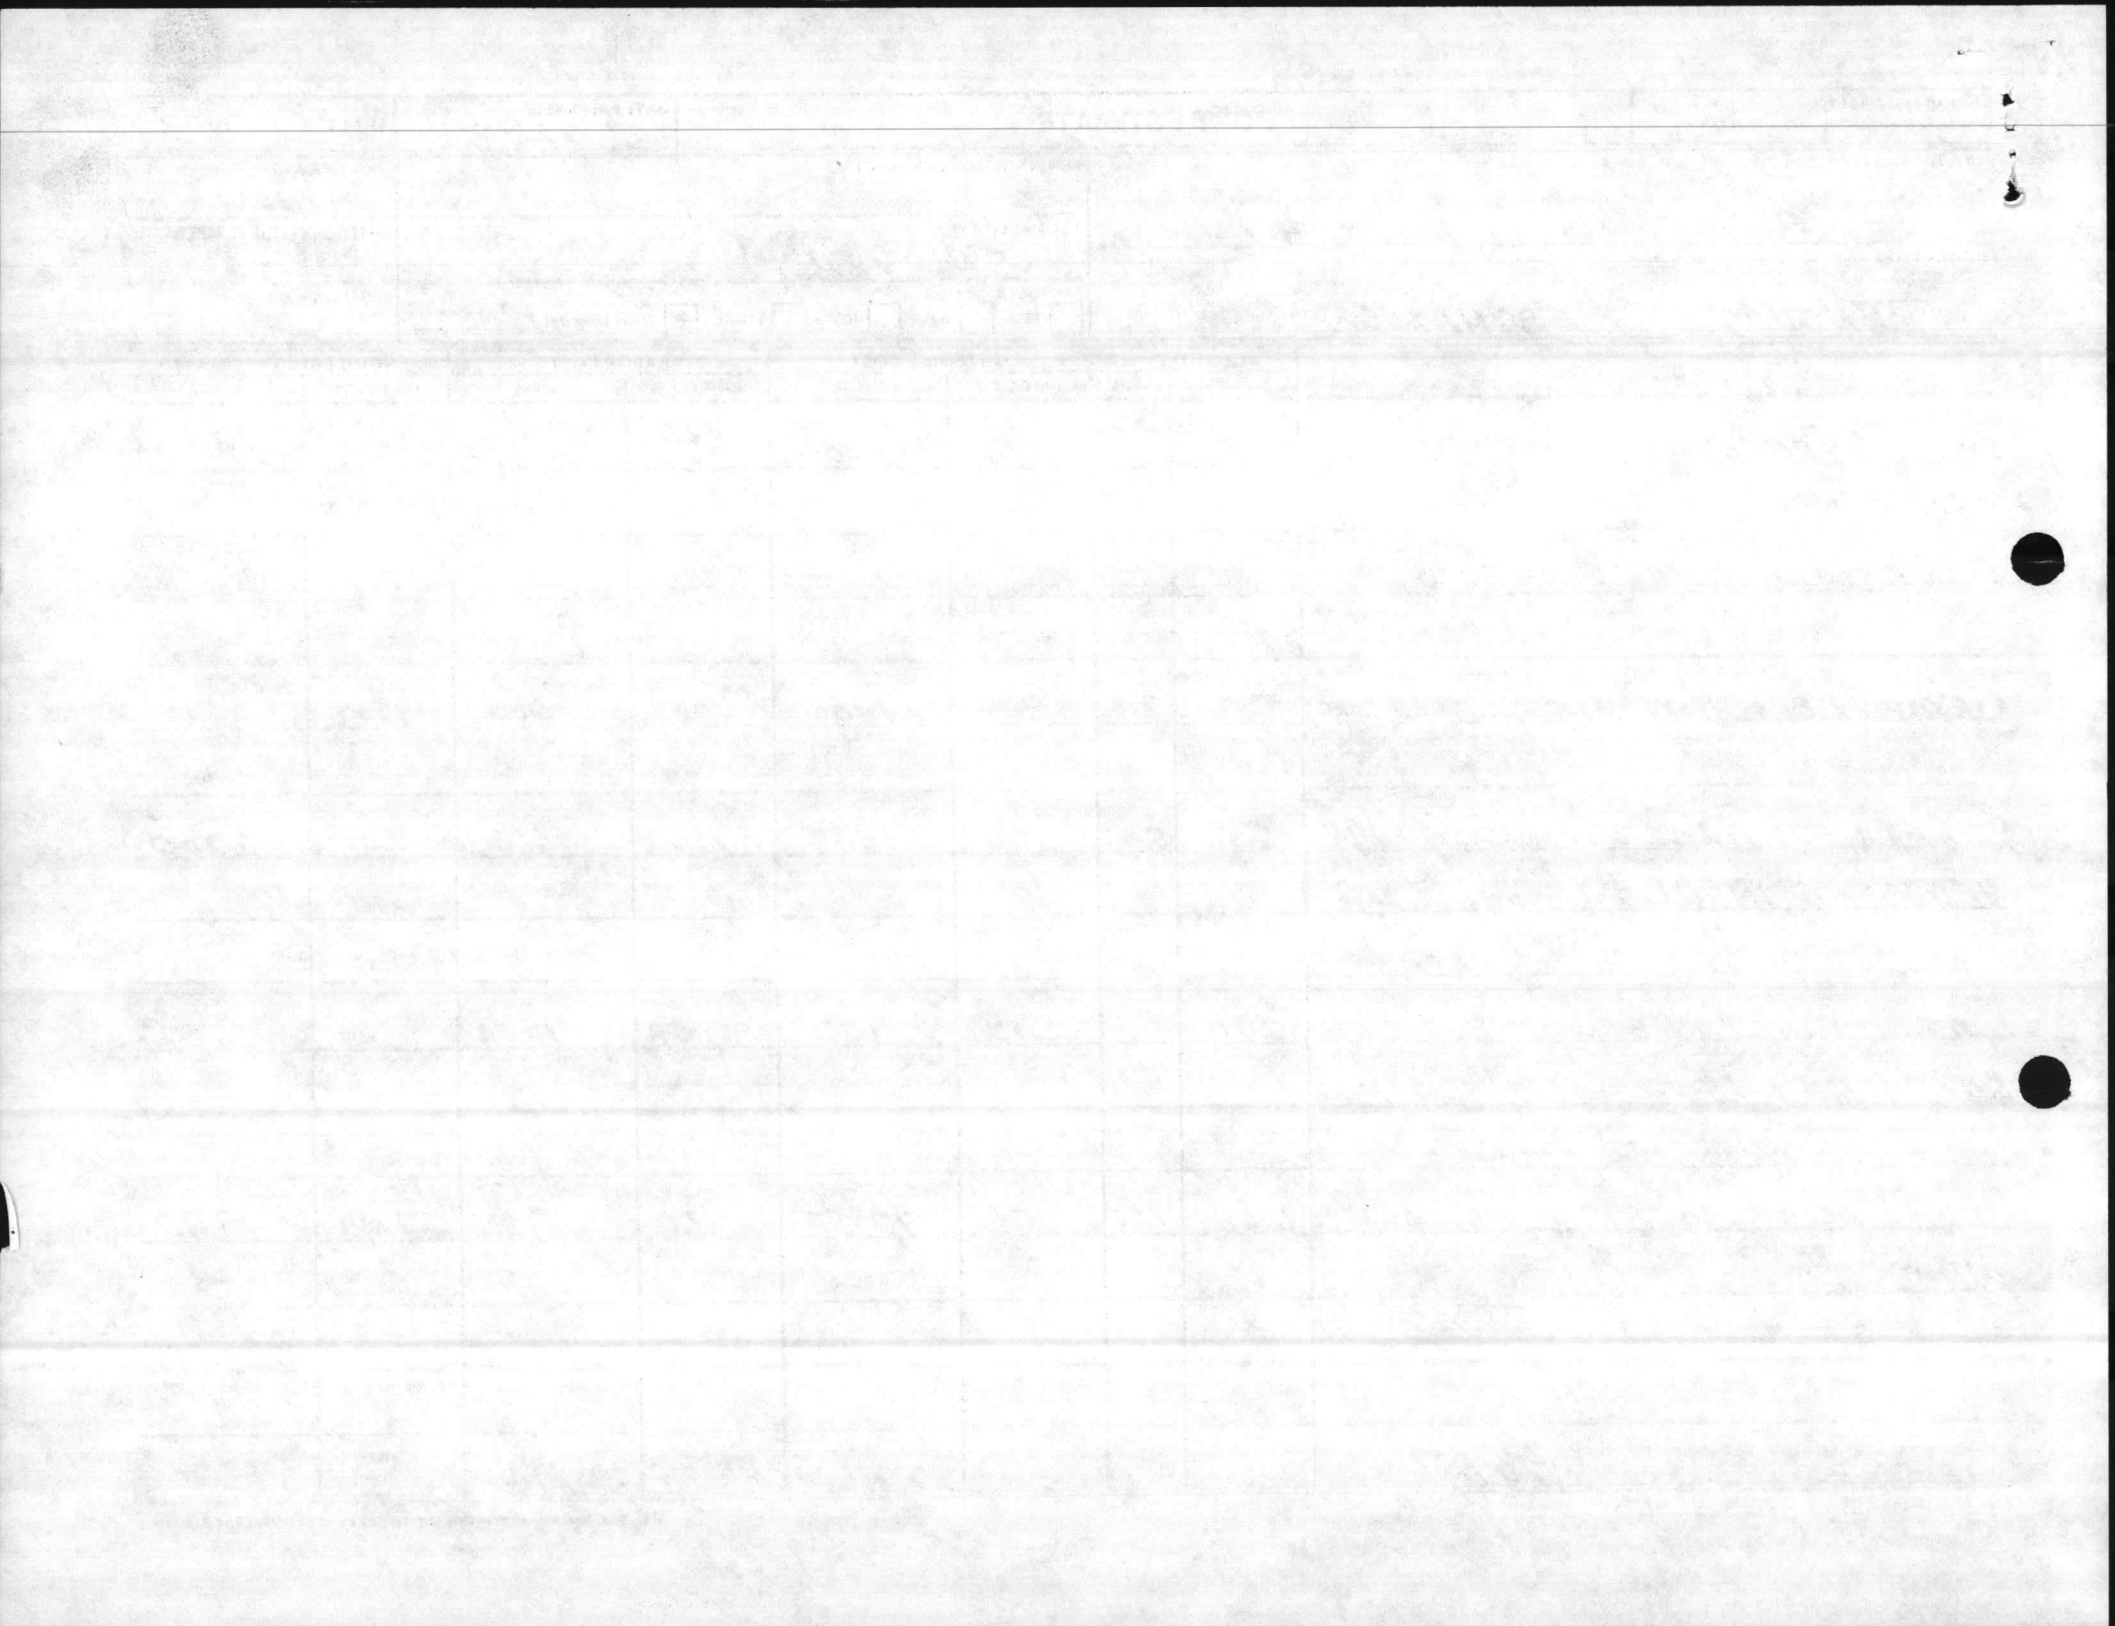

COST ESTIMATE

DATE PREPARED
3-21-86

SHEET 2 OF 3

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

BLDG 508 PHASE 1

ESTIMATED BY

LE810M

PROJECT TITLE

CATEGORY CODE NUMBER

RENOVATE MESS HALLS

STATUS OF DESIGN


HUFFMAN

722-10


PED 30% 100% FINAL Other (Specify) PROJECT

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
STRUCTURAL				22,914		14,174		37,090
BASIC TOTAL				22,914		14,174		37,090
OVER HEAD 15%								5,564
LABOR 18%								2,551
MATERIAL 4.5%								1,031
SUB TOTAL								46,236
PROFIT 10%								4,624
SUB TOTAL								50,860
BOND 1%								509
SUB TOTAL								51,369
						ROUNDED		51,400

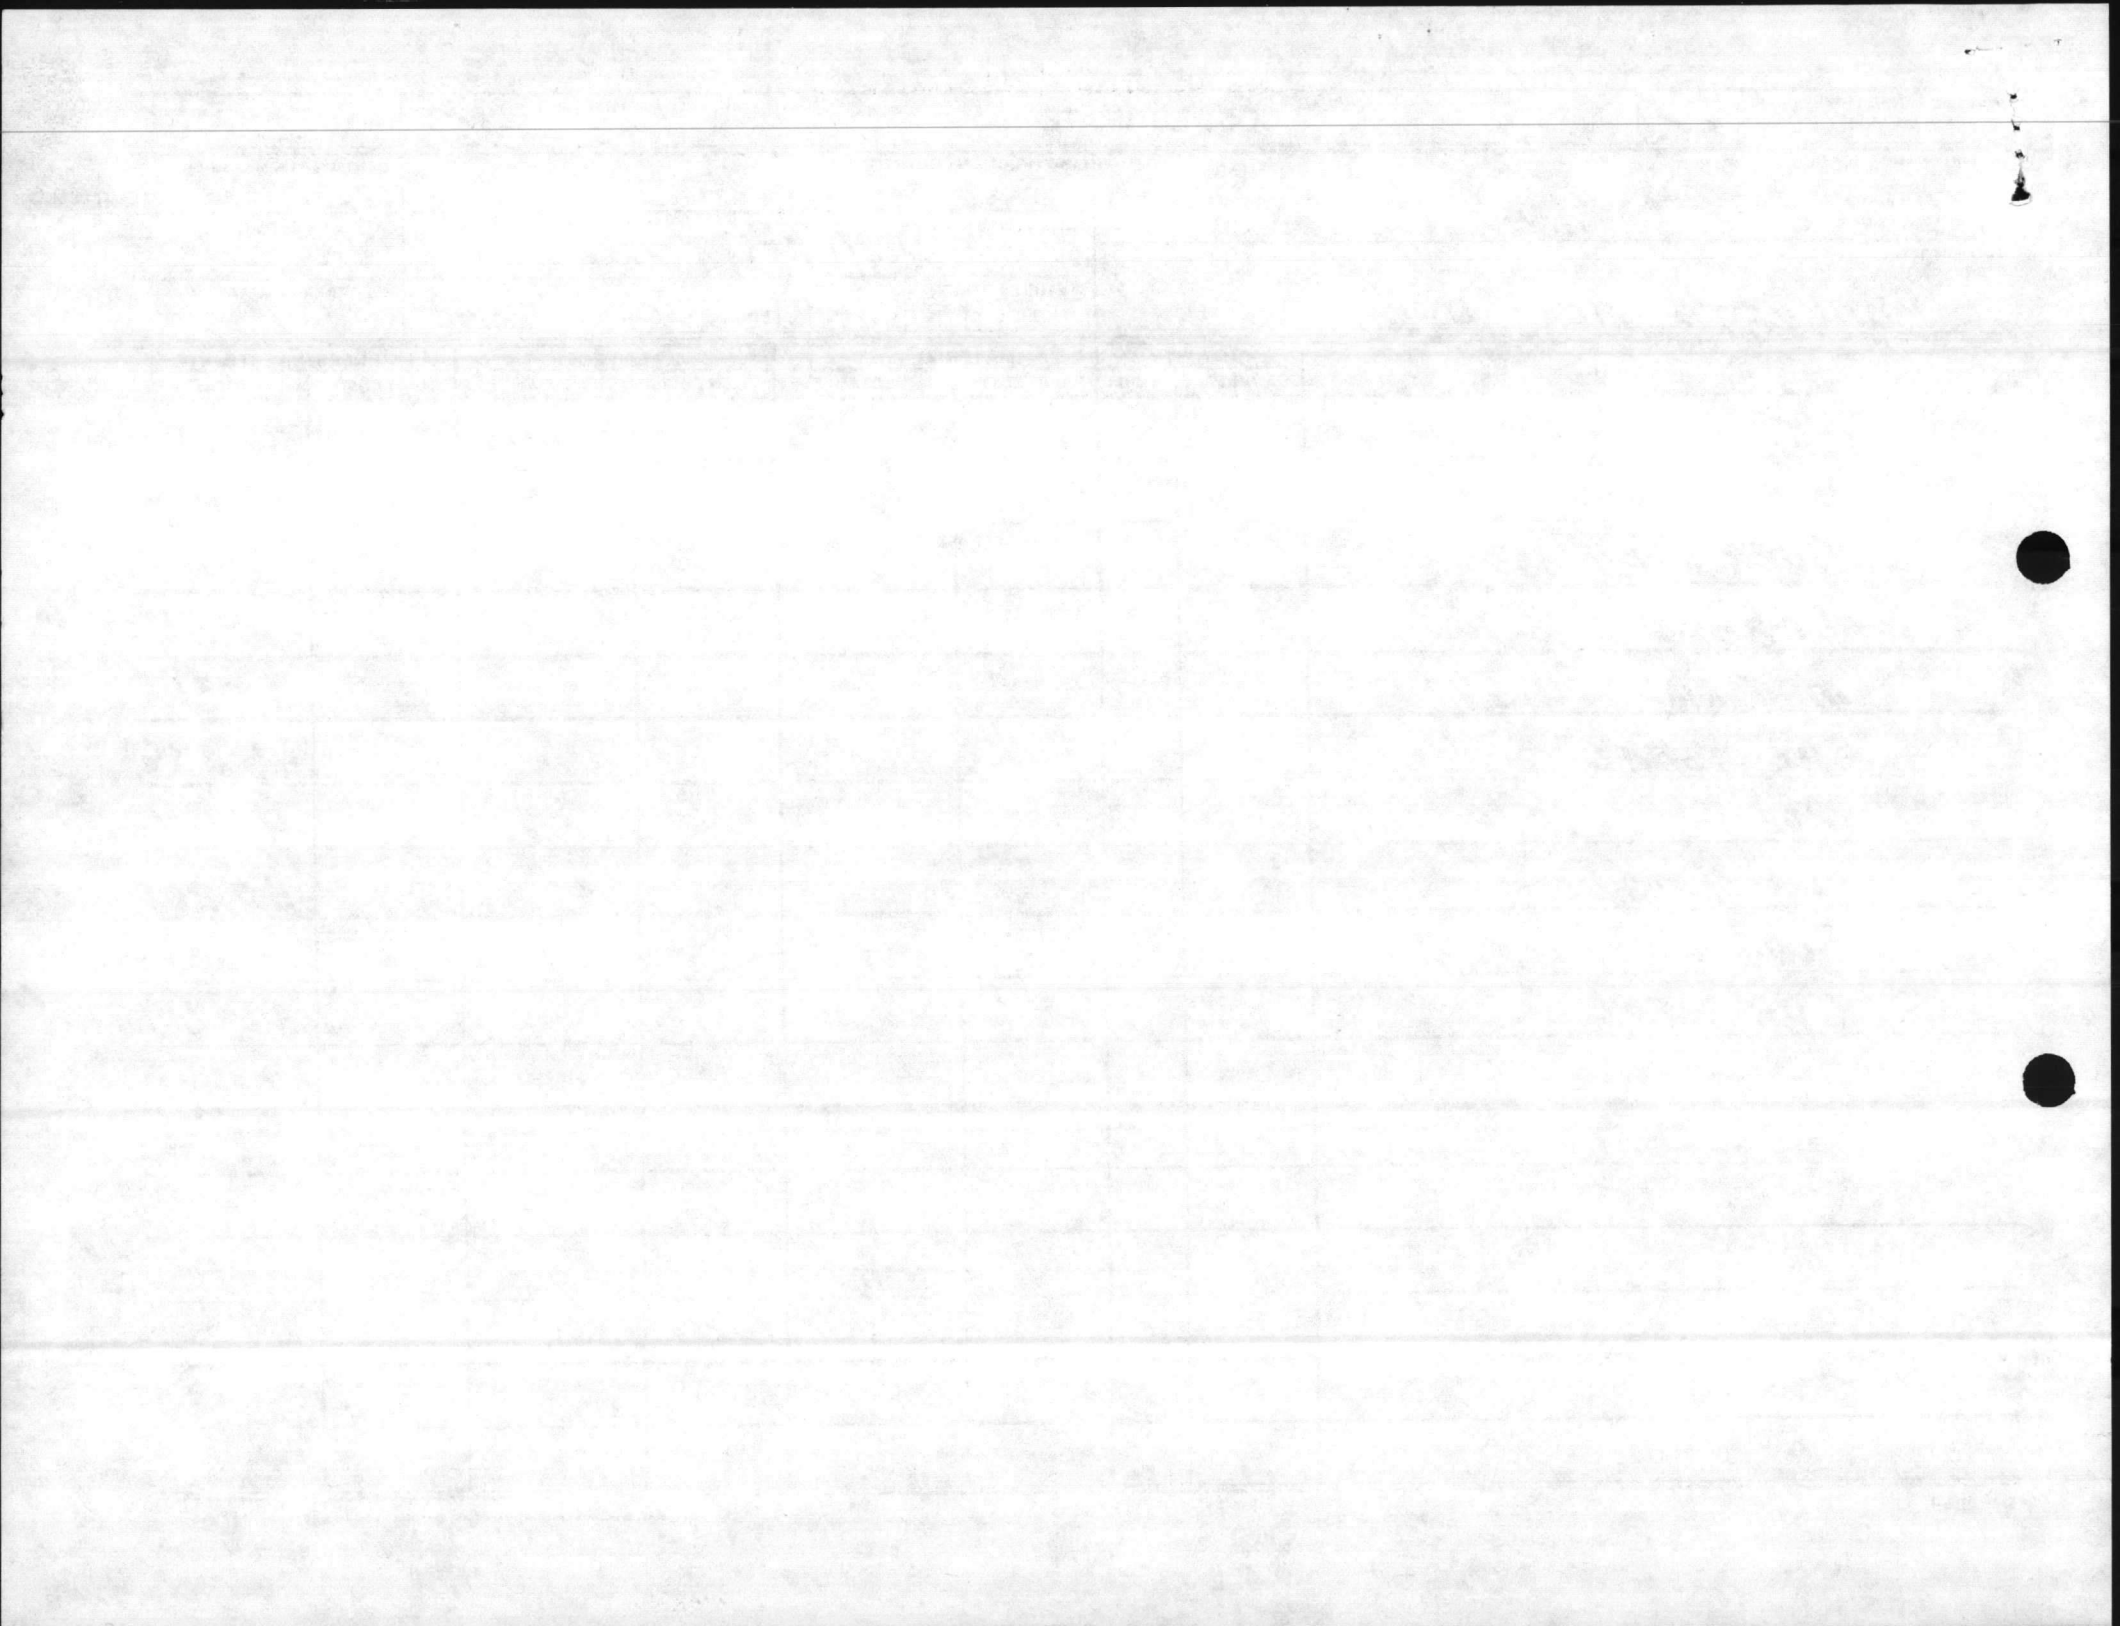

CONSULT COST EST. FOR DESIRED WORK AT EA. NUMBERED LOCATION
LEBION 722-10

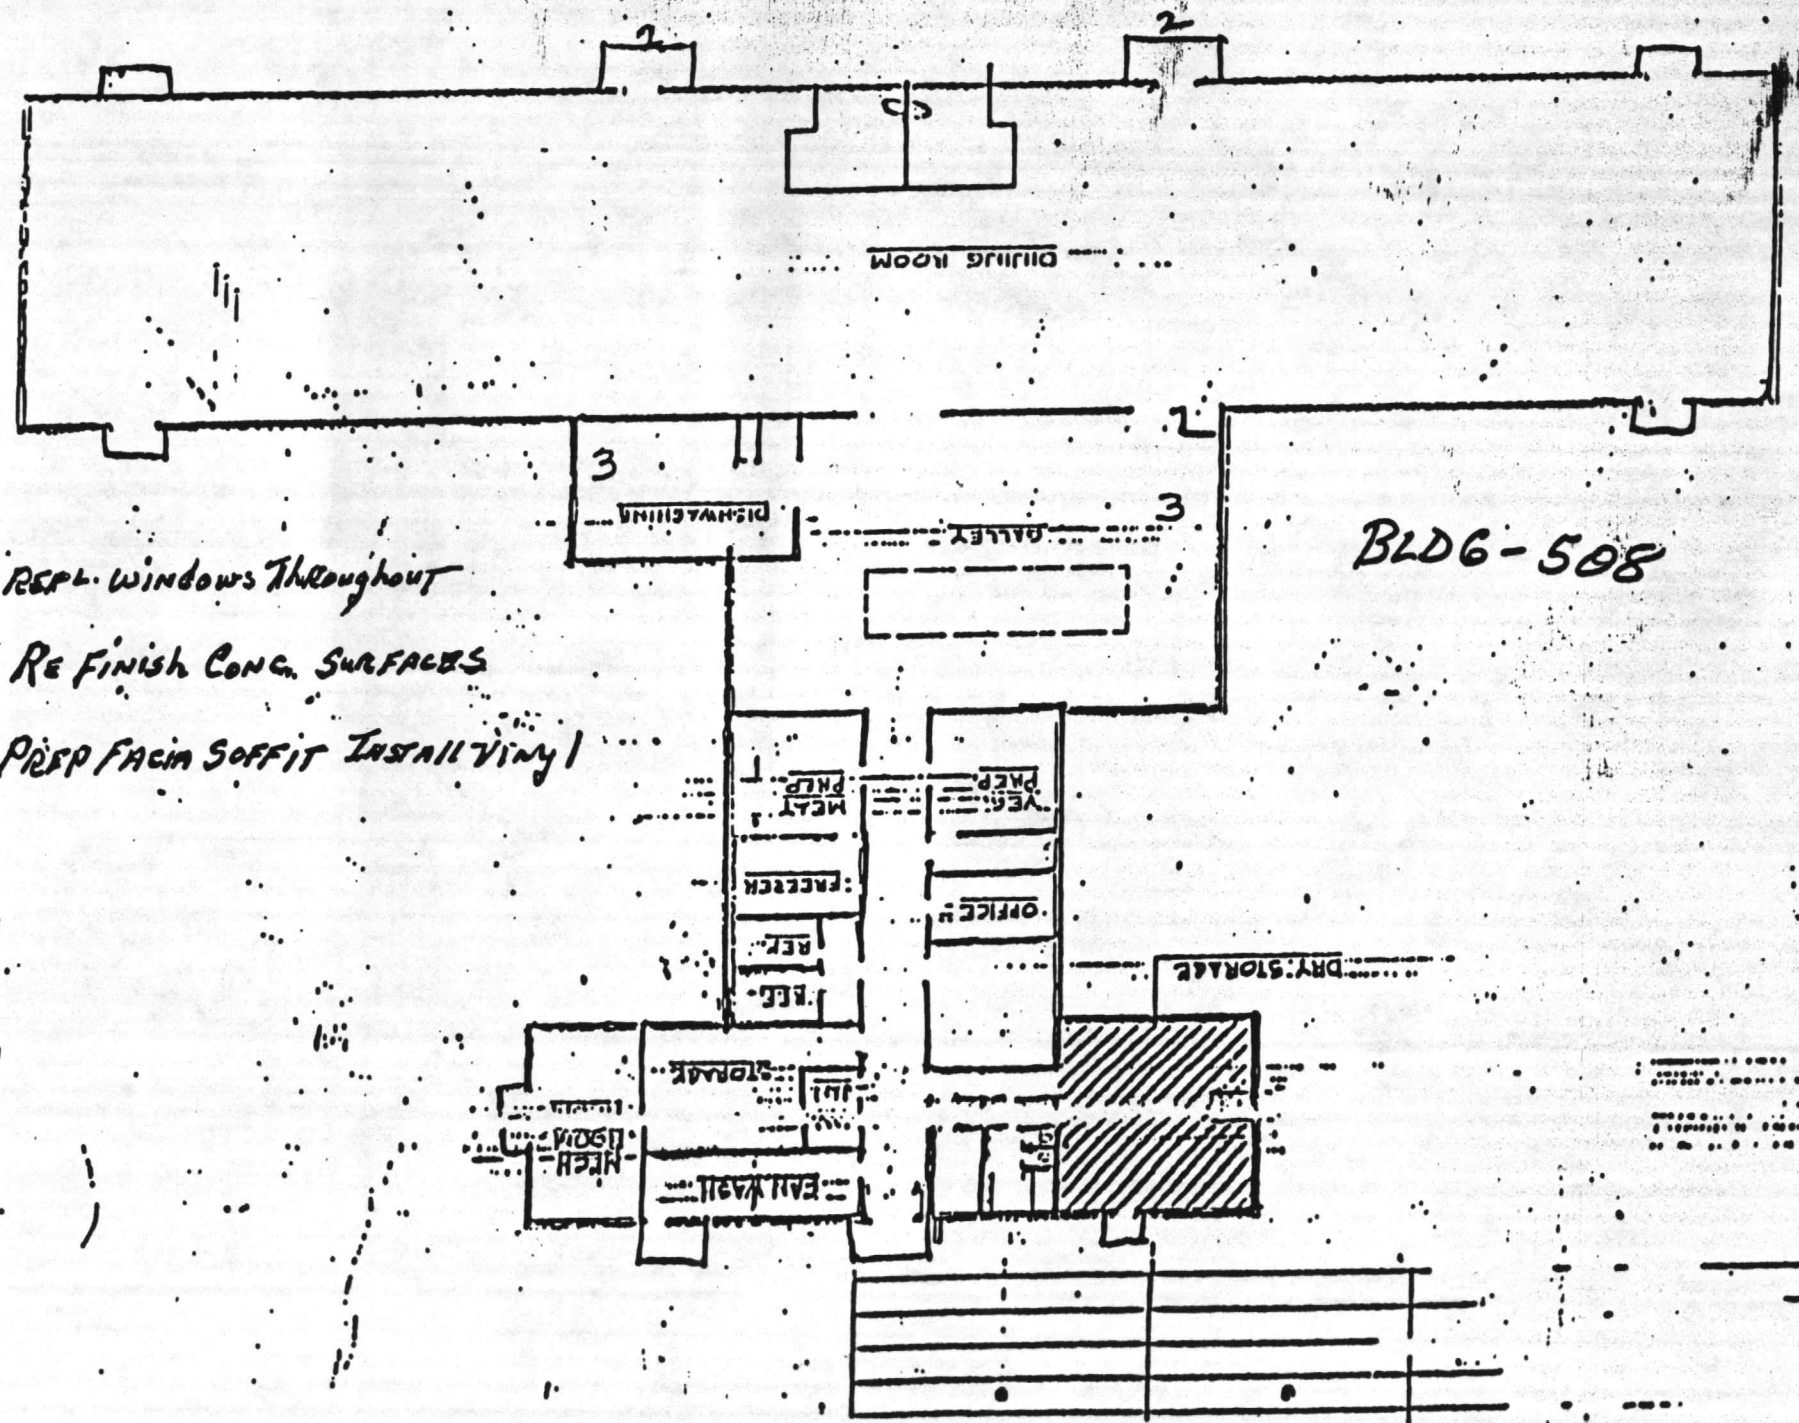

- 1- REPL. WINDOWS THROUGHOUT
- 4- RE FINISH CONC. SURFACES
- 5- PREP FACIA SOFFIT INSTALL VINYL

11

