

**COST ESTIMATE**

DATE PREPARED  
**3-20-87**

SHEET OF

ACTIVITY AND LOCATION

**425**

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

*Huffman*

CATEGORY CODE NUMBER

STATUS OF DESIGN


PED  30%  100%  FINAL  Other (Specify) \_\_\_\_\_

JOB ORDER NUMBER

PROJECT TITLE

**RPR'S TO HTG, AC, PLBB, PIPING**

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
DEMO ASBESTOS PIPING				18,000		36,500		54,500
INSULATION AND CONTAMINATED								
INSULATION, STEAM, CONDENSATE,								
POTABLE WATER, OLD FIRE								
LINES AND PIPING THROUGH								
AND UNDER BUILDING AND STEAM								
PIT, STEAM PRU'S AND ABANDON								
PIPING. REPLACE AND RE-								
INSULATE AS REQUIRED, REPLACE								
(IN PIT) CONDENSATE AND SUMP								
PUMP AND STEAM PRU STATION								
REPLACE EXTERIOR WALL HYDRANTS.								

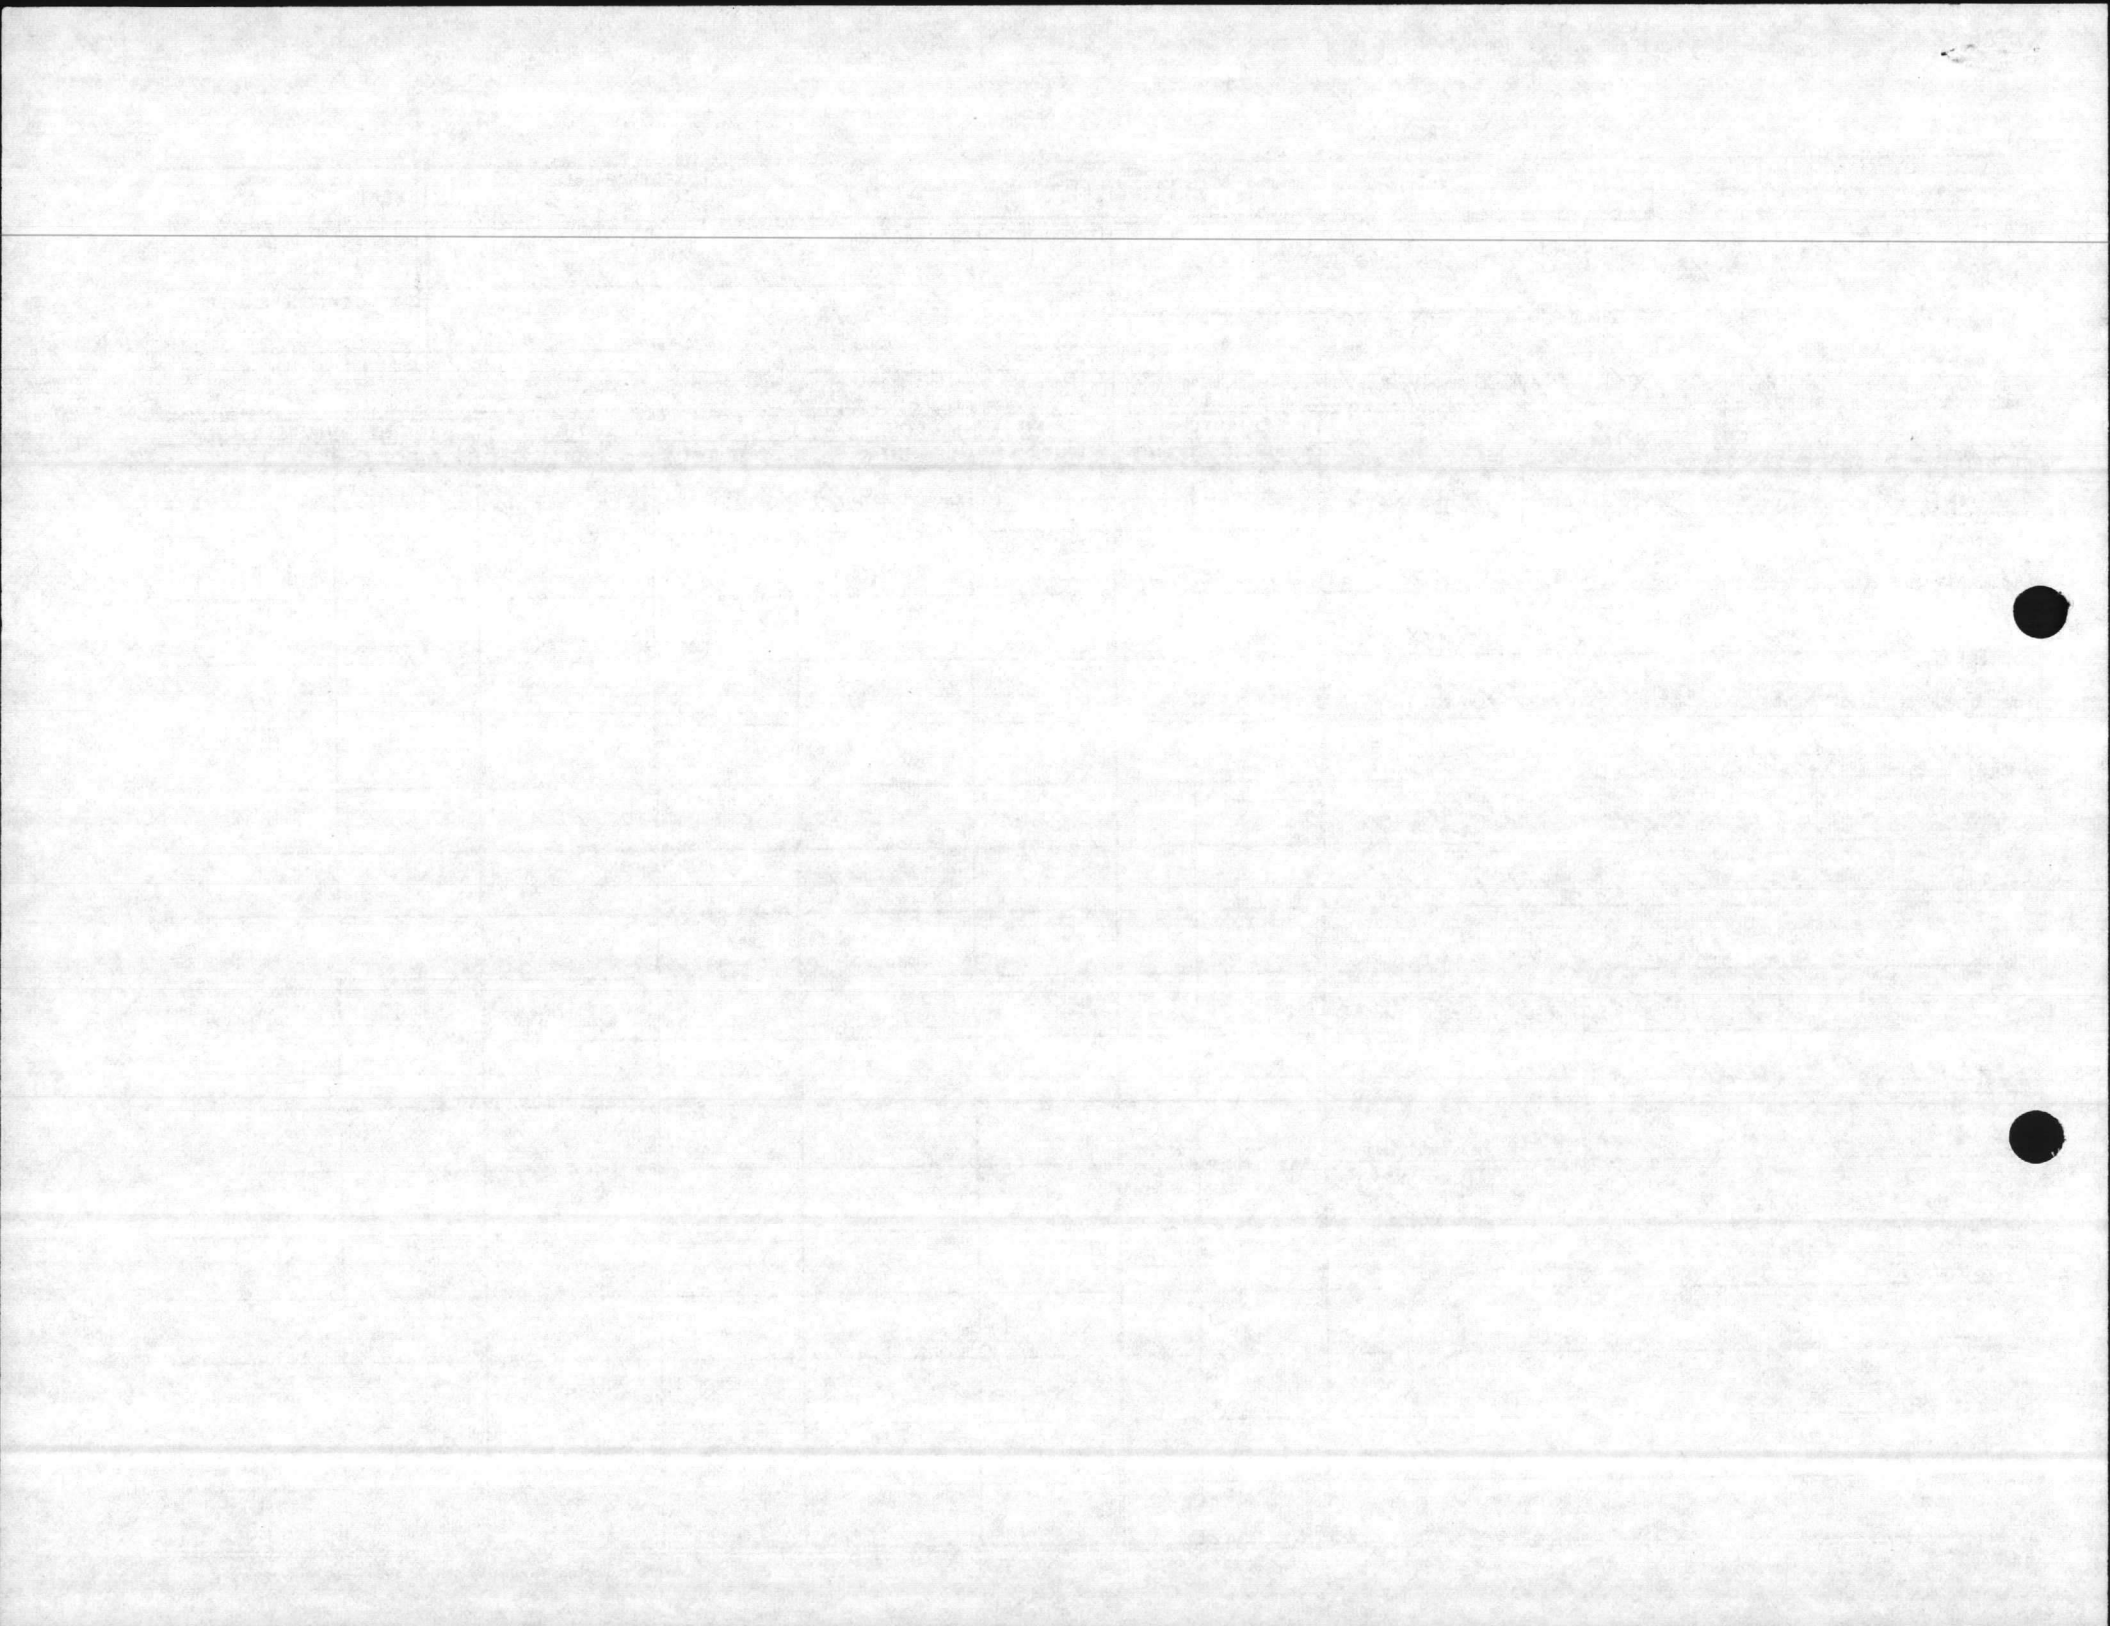

**COST ESTIMATE**

DATE PREPARED  
*3-20-87*

SHEET OF

ACTIVITY AND LOCATION

*425*

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

*Huffman*

CATEGORY CODE NUMBER

STATUS OF DESIGN


PED  30%  100%  FINAL  Other (Specify) \_\_\_\_\_

JOB ORDER NUMBER

PROJECT TITLE

*RPRS TO HTG, AC, PLBG, PIPING*

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
<i>MECH ROOM - DEMO AND REPLACE ALL STEAM, CONDENSATE, POTABLE WATER, CHILL WATER PIPING, VALVES, STEAM PRU STATION STEAM AND AC COILS, AIR HANDLER, ALL HTG + AC CONTROLS (TEMP, ZONE, ECT) EXPANSION TANK, CIRCULATING PUMPS, REINSULATE ALL EXPOSED DUCT. REMOVE ABANDON CHILLER,</i>				<i>28,400</i>		<i>21,000</i>		<i>49,400</i>
<i>ROOF TOP - REPLACE AC, SELF CONTAINED PACKAGE UNIT.</i>				<i>8000</i>		<i>1500</i>		<i>9,500</i>

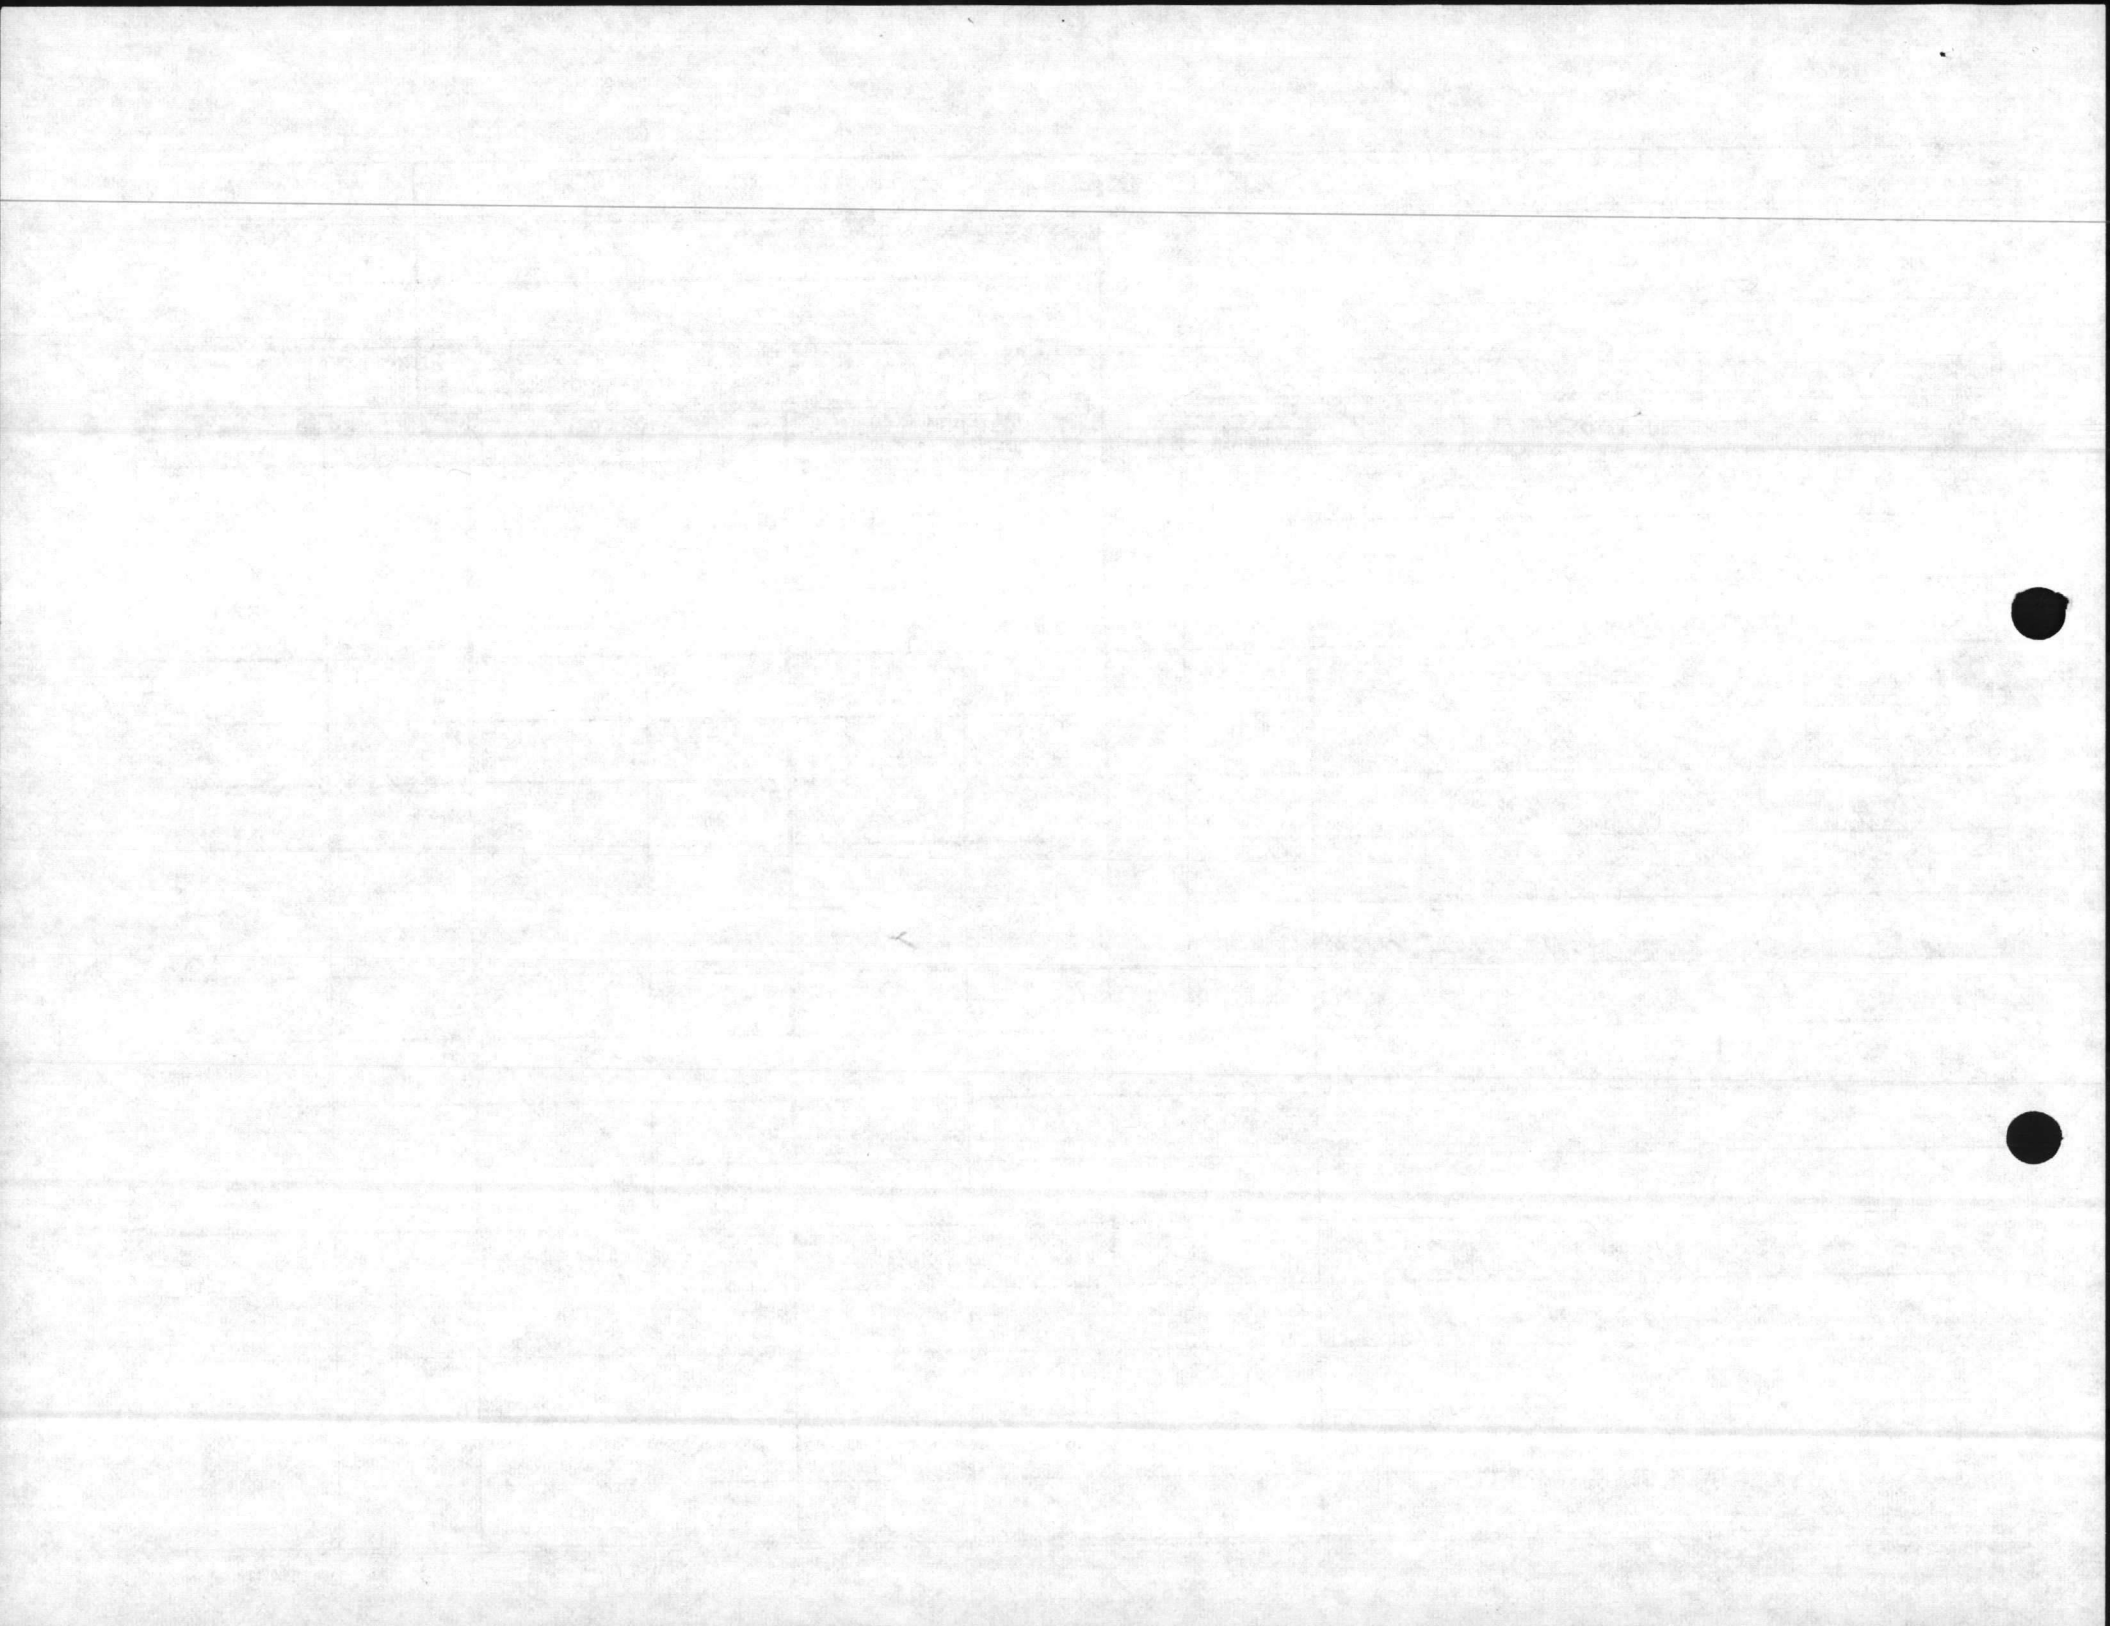

**COST ESTIMATE**

DATE PREPARED  
3-20-87

SHEET OF

ACTIVITY AND LOCATION

425

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

*Huffman*

CATEGORY CODE NUMBER

STATUS OF DESIGN


PED  30%  100%  FINAL  Other (Specify) \_\_\_\_\_

JOB ORDER NUMBER

PROJECT TITLE

RPRS TO Htg, AC, PLBG, PIPING.

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
HEADS, OFFICES REPLACE				2,000		3700		4,700
ALL UNIT HEATERS, RADIATORS, OUTSIDE AIR HEATING COIL IN DUCT WITH STATE OF THE ART DESIGN.								
NC, O SIDE OF BUILDING, LOBBY, 2ND FLOOR (VOID SNOO SIDE)				1,000		700		1,700
MODIFY DUCT TO ACCOMMODATE NEW DROP CIELINGS, REPLACE GRILLS AND REGISTERS.								

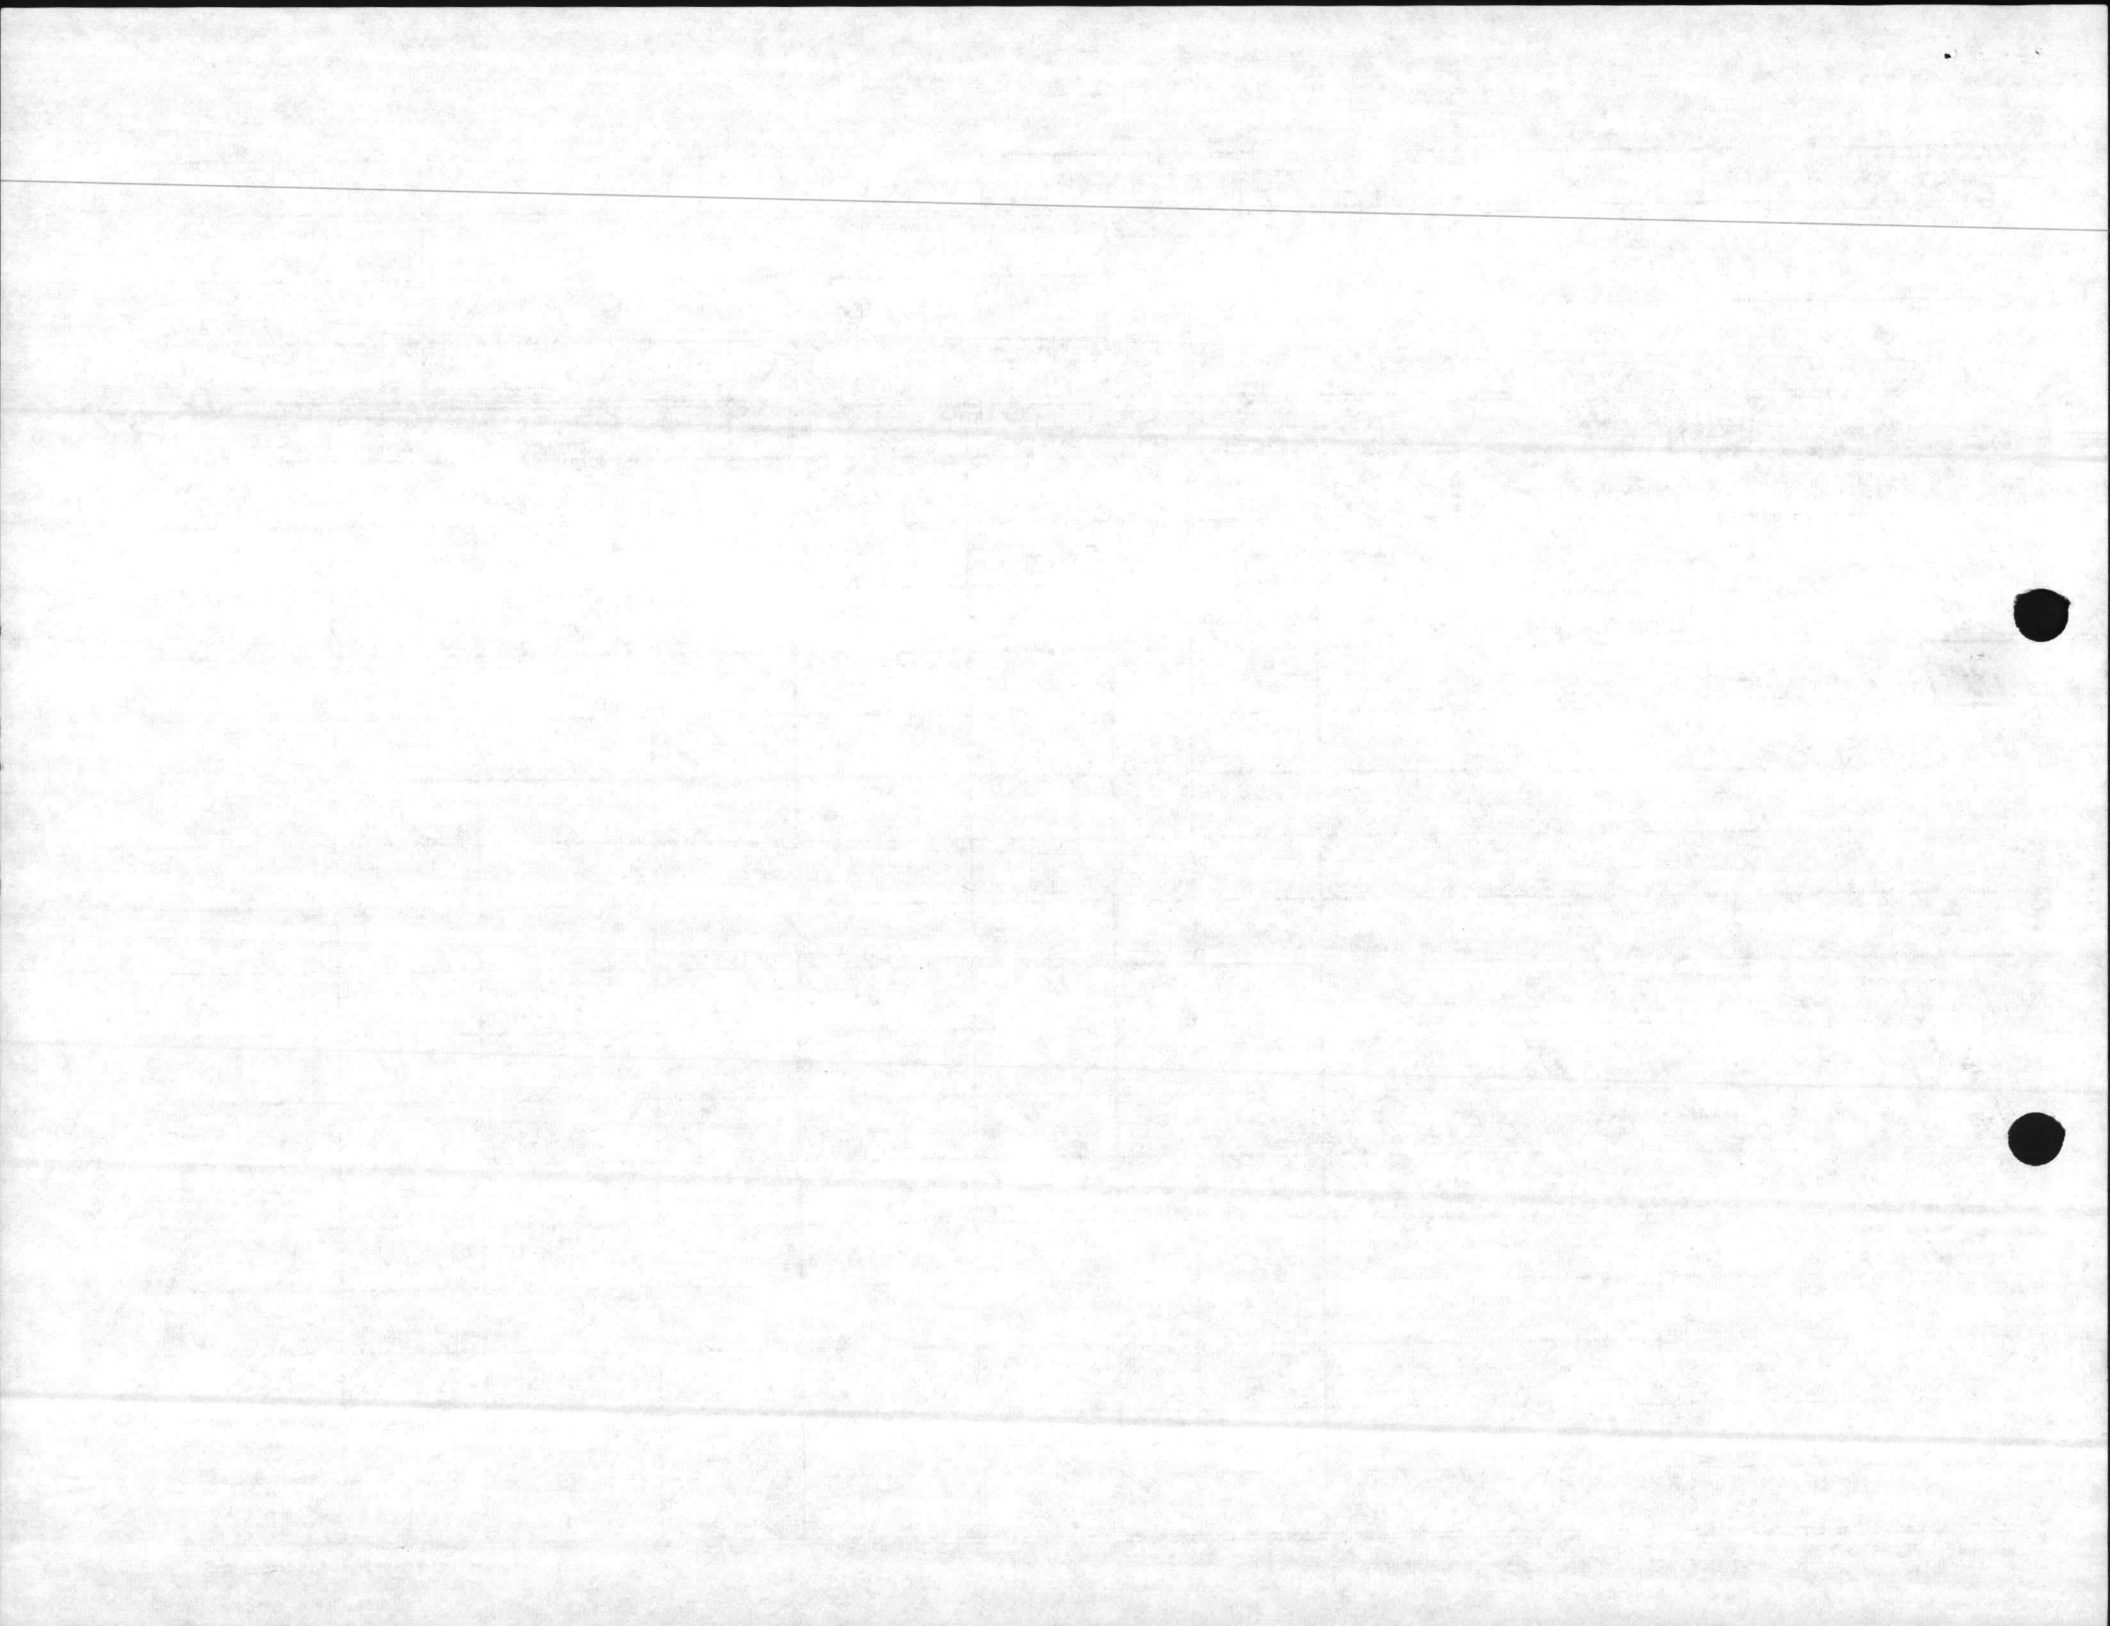

**COST ESTIMATE**

DATE PREPARED

SHEET OF

ACTIVITY AND LOCATION

425

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

Huffman

CATEGORY CODE NUMBER

STATUS OF DESIGN

PED  30%  100%  FINAL  Other (Specify) \_\_\_\_\_

JOB ORDER NUMBER

PROJECT TITLE

RR'S TO HTG, AC, PHBG, PIPING

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
THROUGH OUT BUILDING - REPLACE ALL PLUMBING FIXTURES, MOP SINKS, VALVES AND TRIM WITH STATE OF THE ART AS PER N.P.C. MODIFY ALL PIPING AS REQUIRED FOR CERAMIC TILE FLOORS AND WALLS (VOID MENUS AND WOMENS HEAD IN LOBBY AREA, THIS IS TO BE ACCOMPLISHED ON PROJECT # 7C38)				950		6,300		7250
TOTAL				584 00		68,700		127,100

