

①

NAVFAC 11012/7 (1-78)  
Supersedes NAVDOCKS 2417 and 2417A

### COST ESTIMATE

DATE PREPARED  
2-27-87

SHEET OF

ACTIVITY AND LOCATION

43

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

Huffman

CATEGORY CODE NUMBER

STATUS OF DESIGN


PED  30%  100%  FINAL  Other (Specify)

JOB ORDER NUMBER

PROJECT TITLE

REPAIR/RENO HTC, AC, PLBG, PIPING

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
REMOVE ALL ASBESTOS INSULATION ON STEAM, CONDENSATE, POTABLE WATER PIPING AND PIPING THROUGH OUT BUILDING AND PIT IN BUILDING				800		7,000		7,800
REMOVE EXISTING RADIATORS AND WINDOW AC, AND STEAM PRV STATIONS.						300		300
COBBLER SHOP - PROVIDE AC, TO BE INSTALLED IN EXISTING HEATING DUCT SYSTEM, MODIFY EXISTING DUCT TO ACCOMADATE DROP CHANG, REPLACE ALL GRILLS AND REGISTERS.				1200		1,800		3000

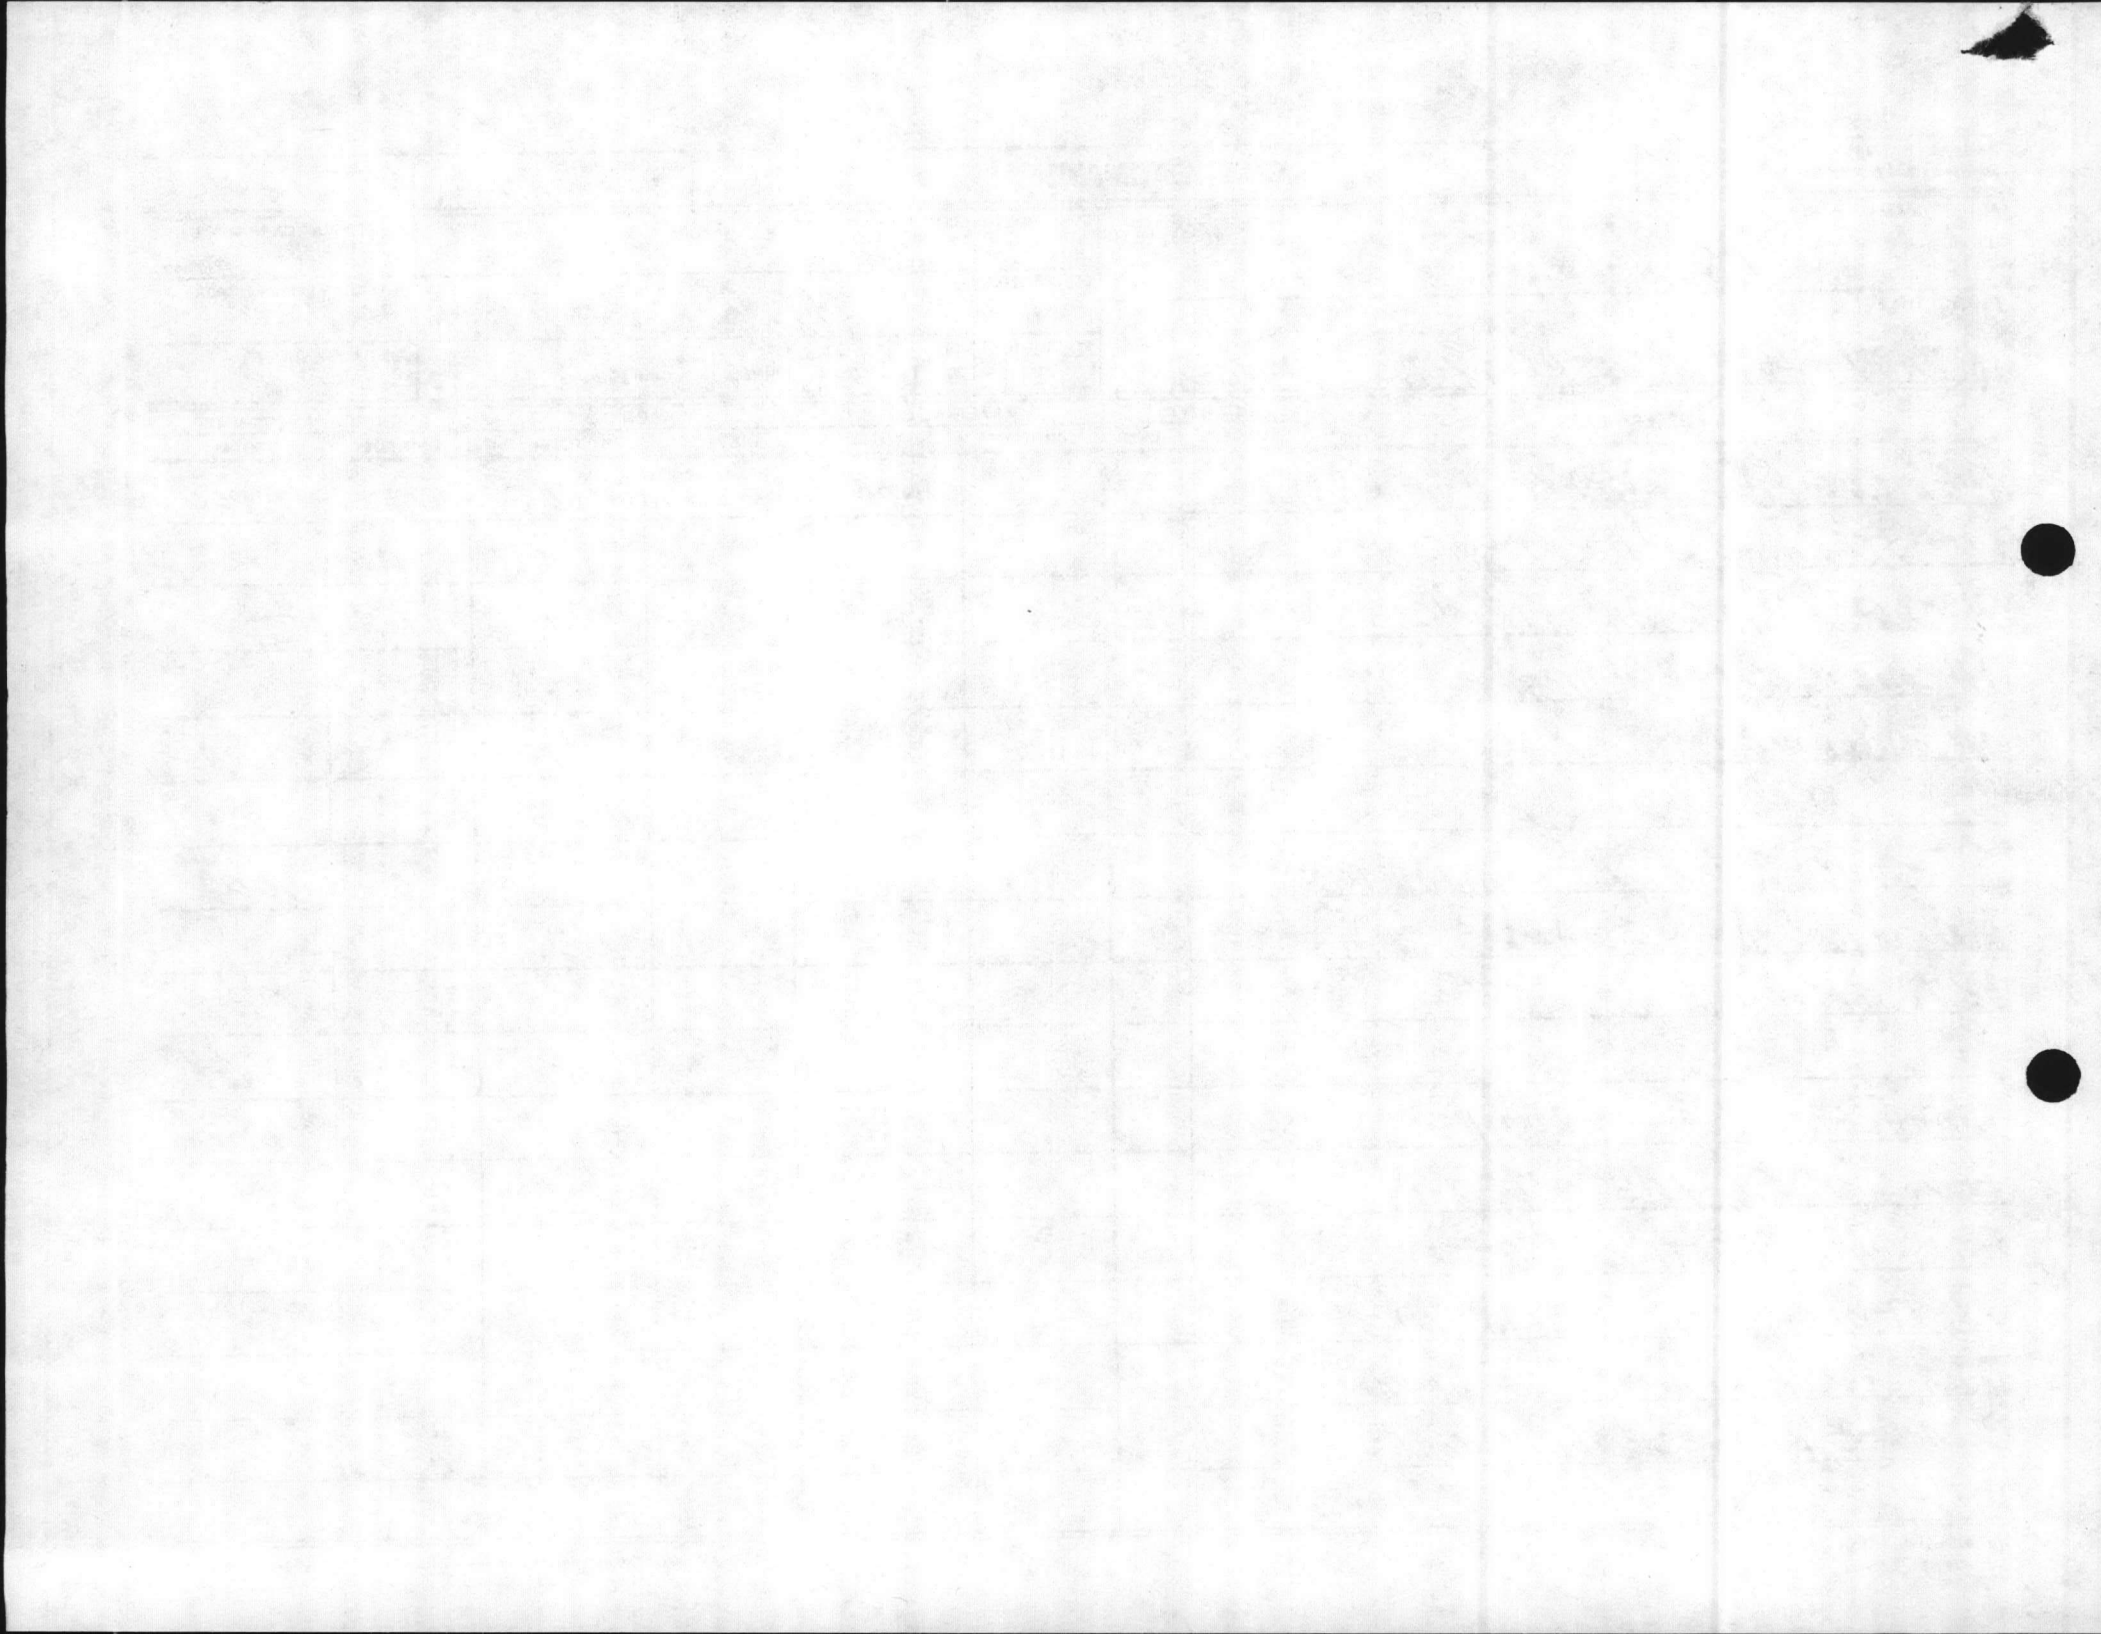

②

NAVFAC 11013/7 (1-78)  
Supersedes NAVDOCKS 2417 and 2417A

### COST ESTIMATE

DATE PREPARED  
2-27-87

SHEET OF

ACTIVITY AND LOCATION

43

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

*Huffman*

CATEGORY CODE NUMBER

STATUS OF DESIGN

PED  30%  100%  FINAL  Other (Specify) \_\_\_\_\_

JOB ORDER NUMBER

PROJECT TITLE

REPAIR/REN HTG, AC, PLBG, PIPING.

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
PMD "DISPATCHER" SIDE AND PMD "SWAT" SIDE OF BUILDING, PROVIDE CENTRAL HUAC WITH STEAM HEAT COILS, INSULATED DUCTS. PROVIDE SEPERATE ZONE AND/OR UNIT AND CONTROLS FOR EACH SIDE OF BUILDING. PROVIDE STEAM PIPING AND CONTROLS AS REQUIRED.				6,000		10,000		16,000
COBBLER SHOP - REPLACE ALL WATER PIPING, PLUMBING FIXTURES WALL HYDRANT, MODIFY WASTE AND DRAIN PIPING TO ACCOMADATE WALL AND FLOOR CERAMIC TILE.				650		750		1,400
<b>TOTAL</b>				<b>8,650</b>		<b>19,850</b>		<b>28,500</b>

