






CADBE

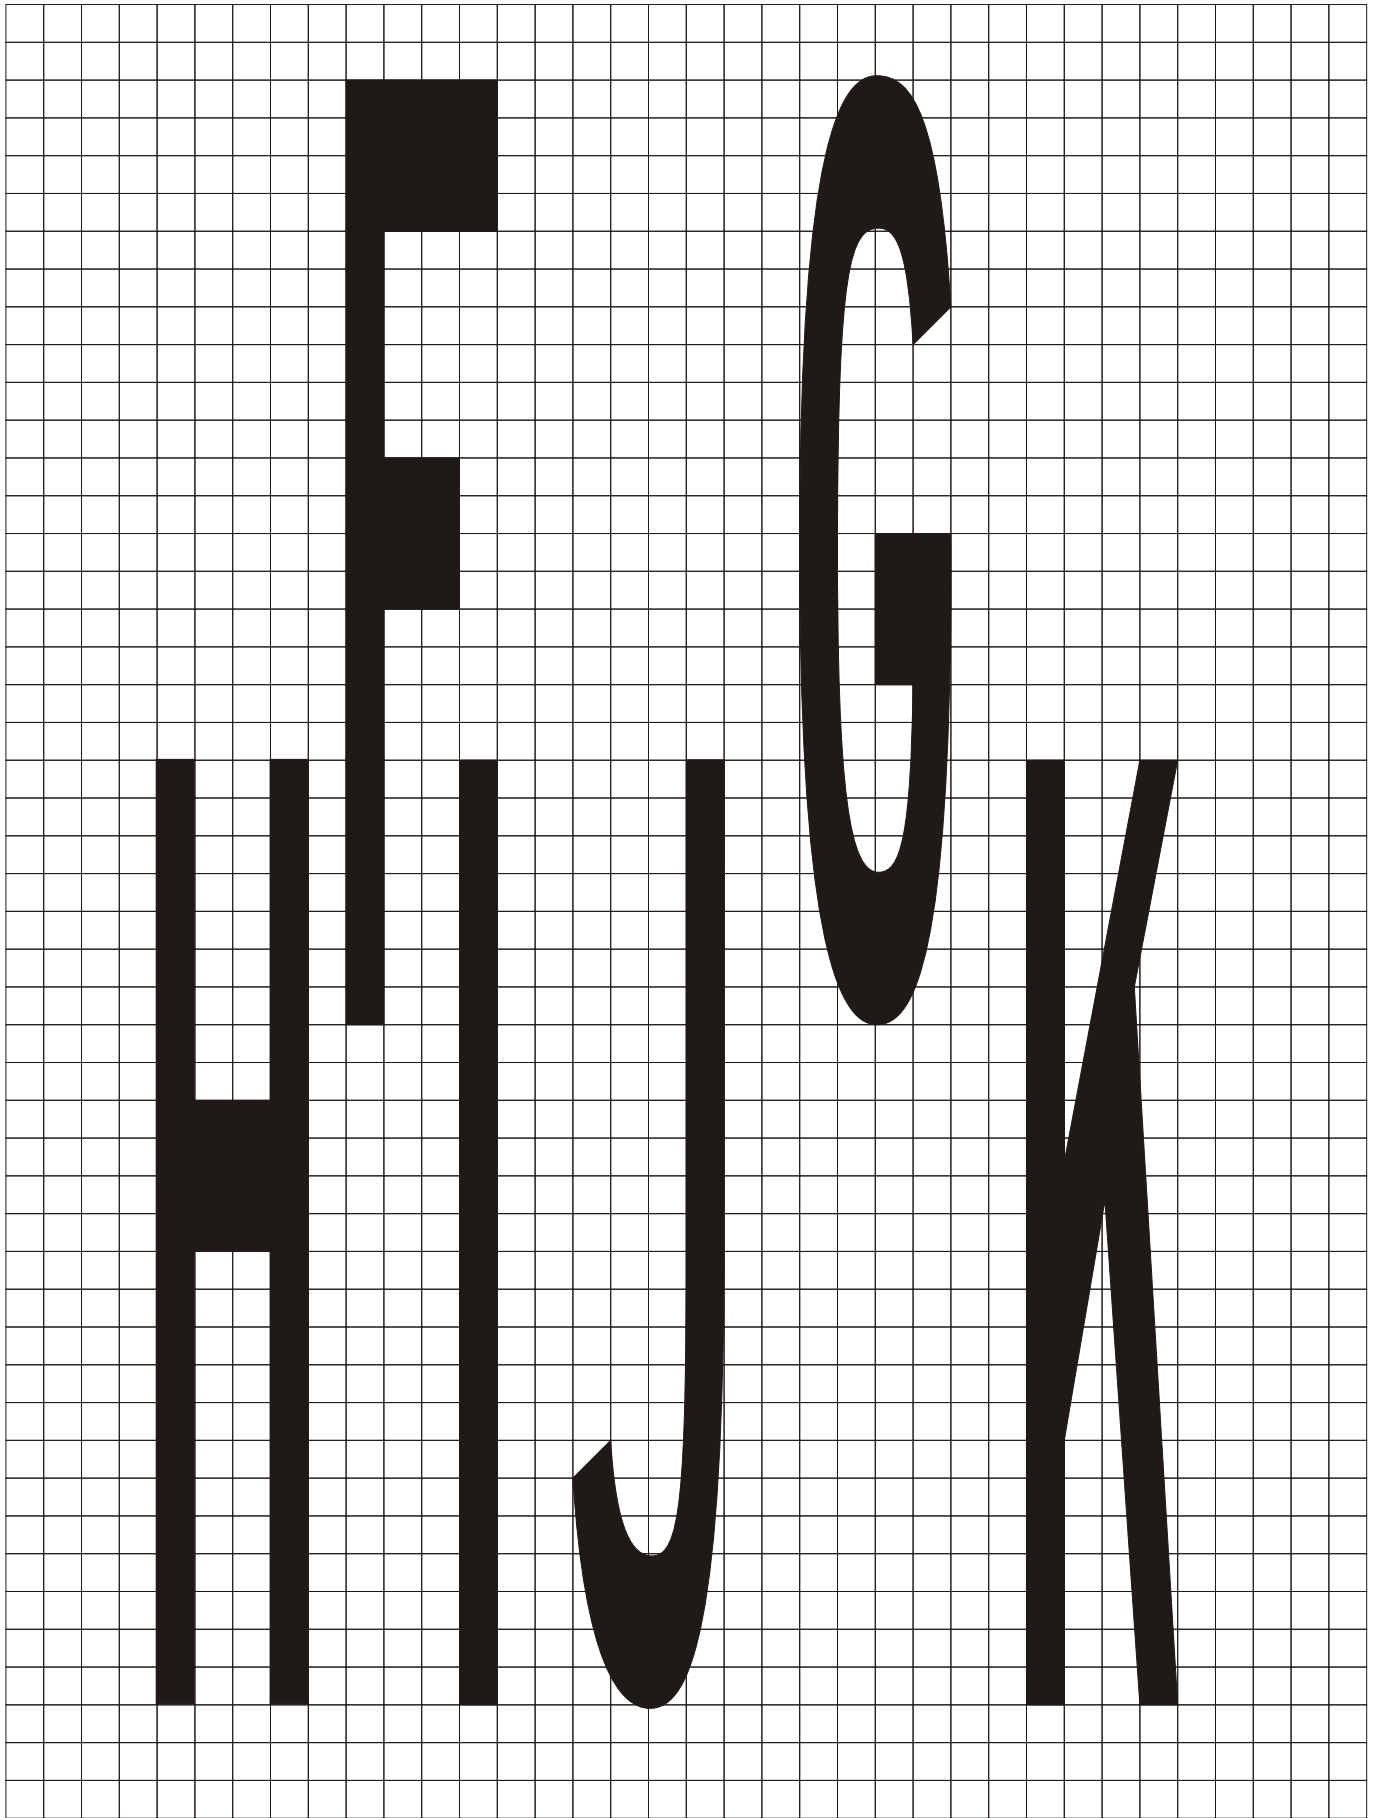


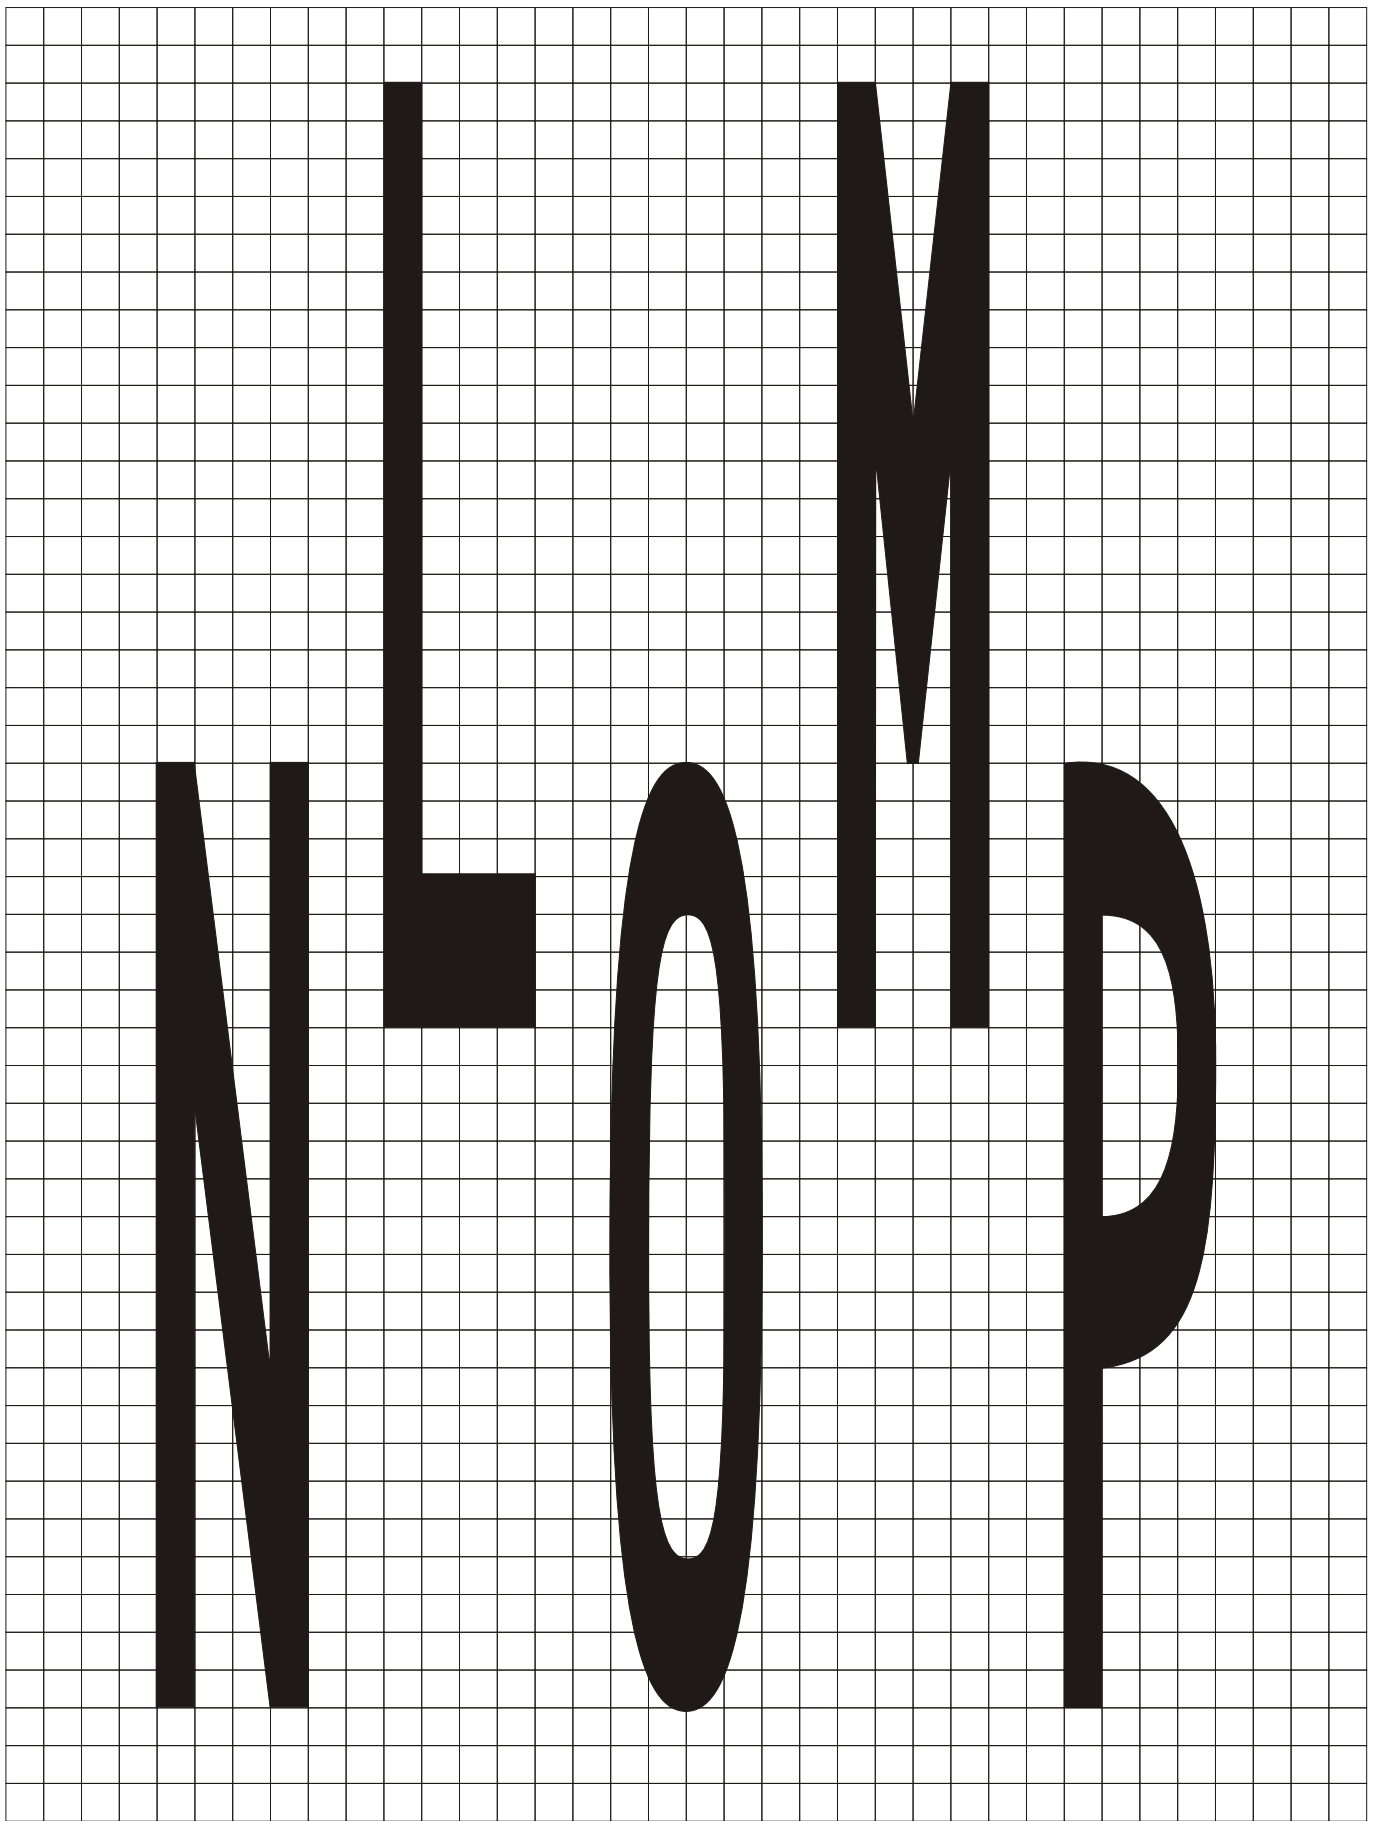


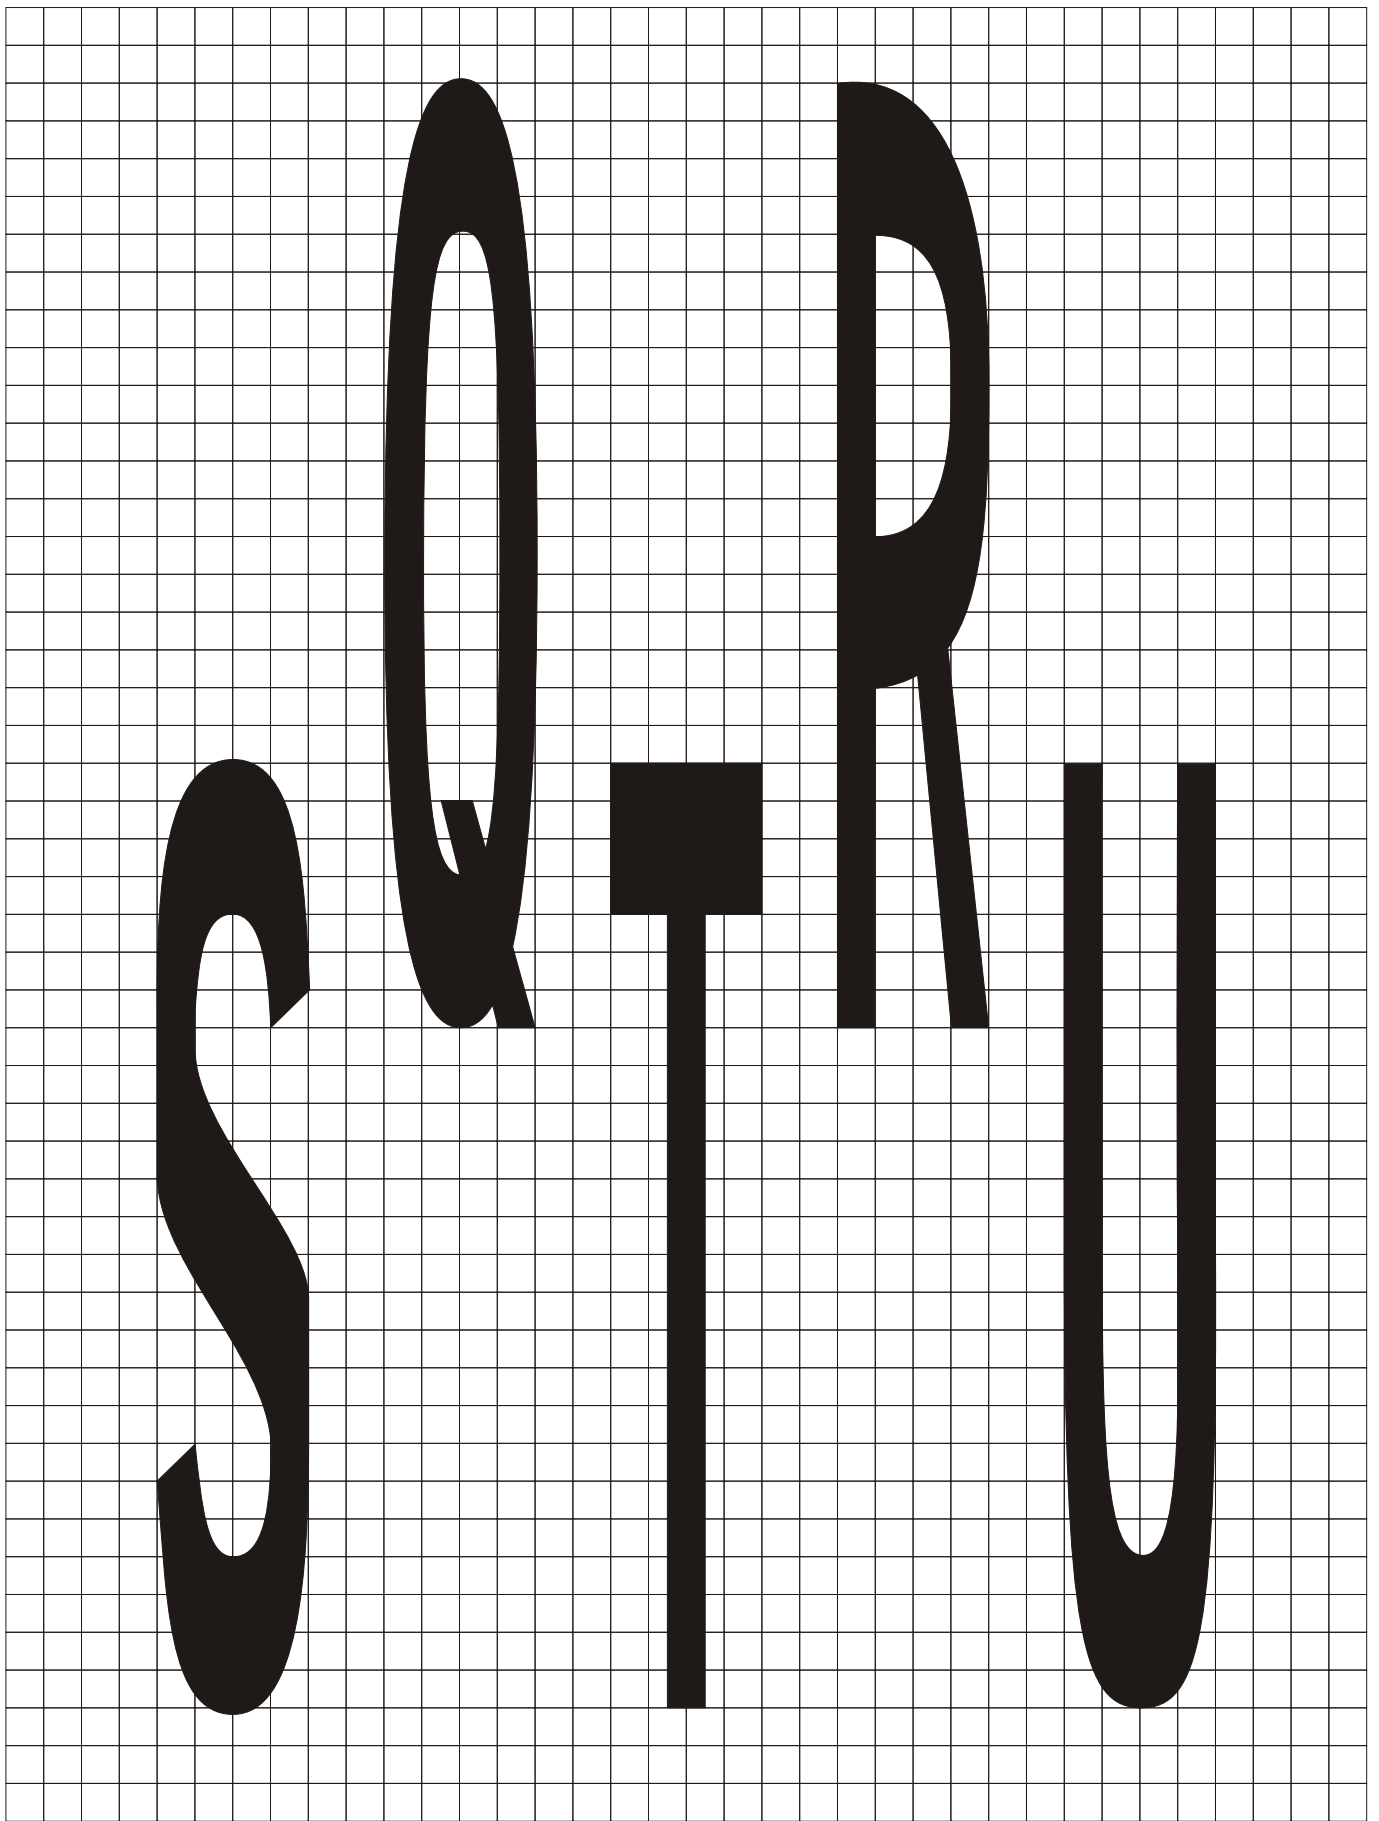


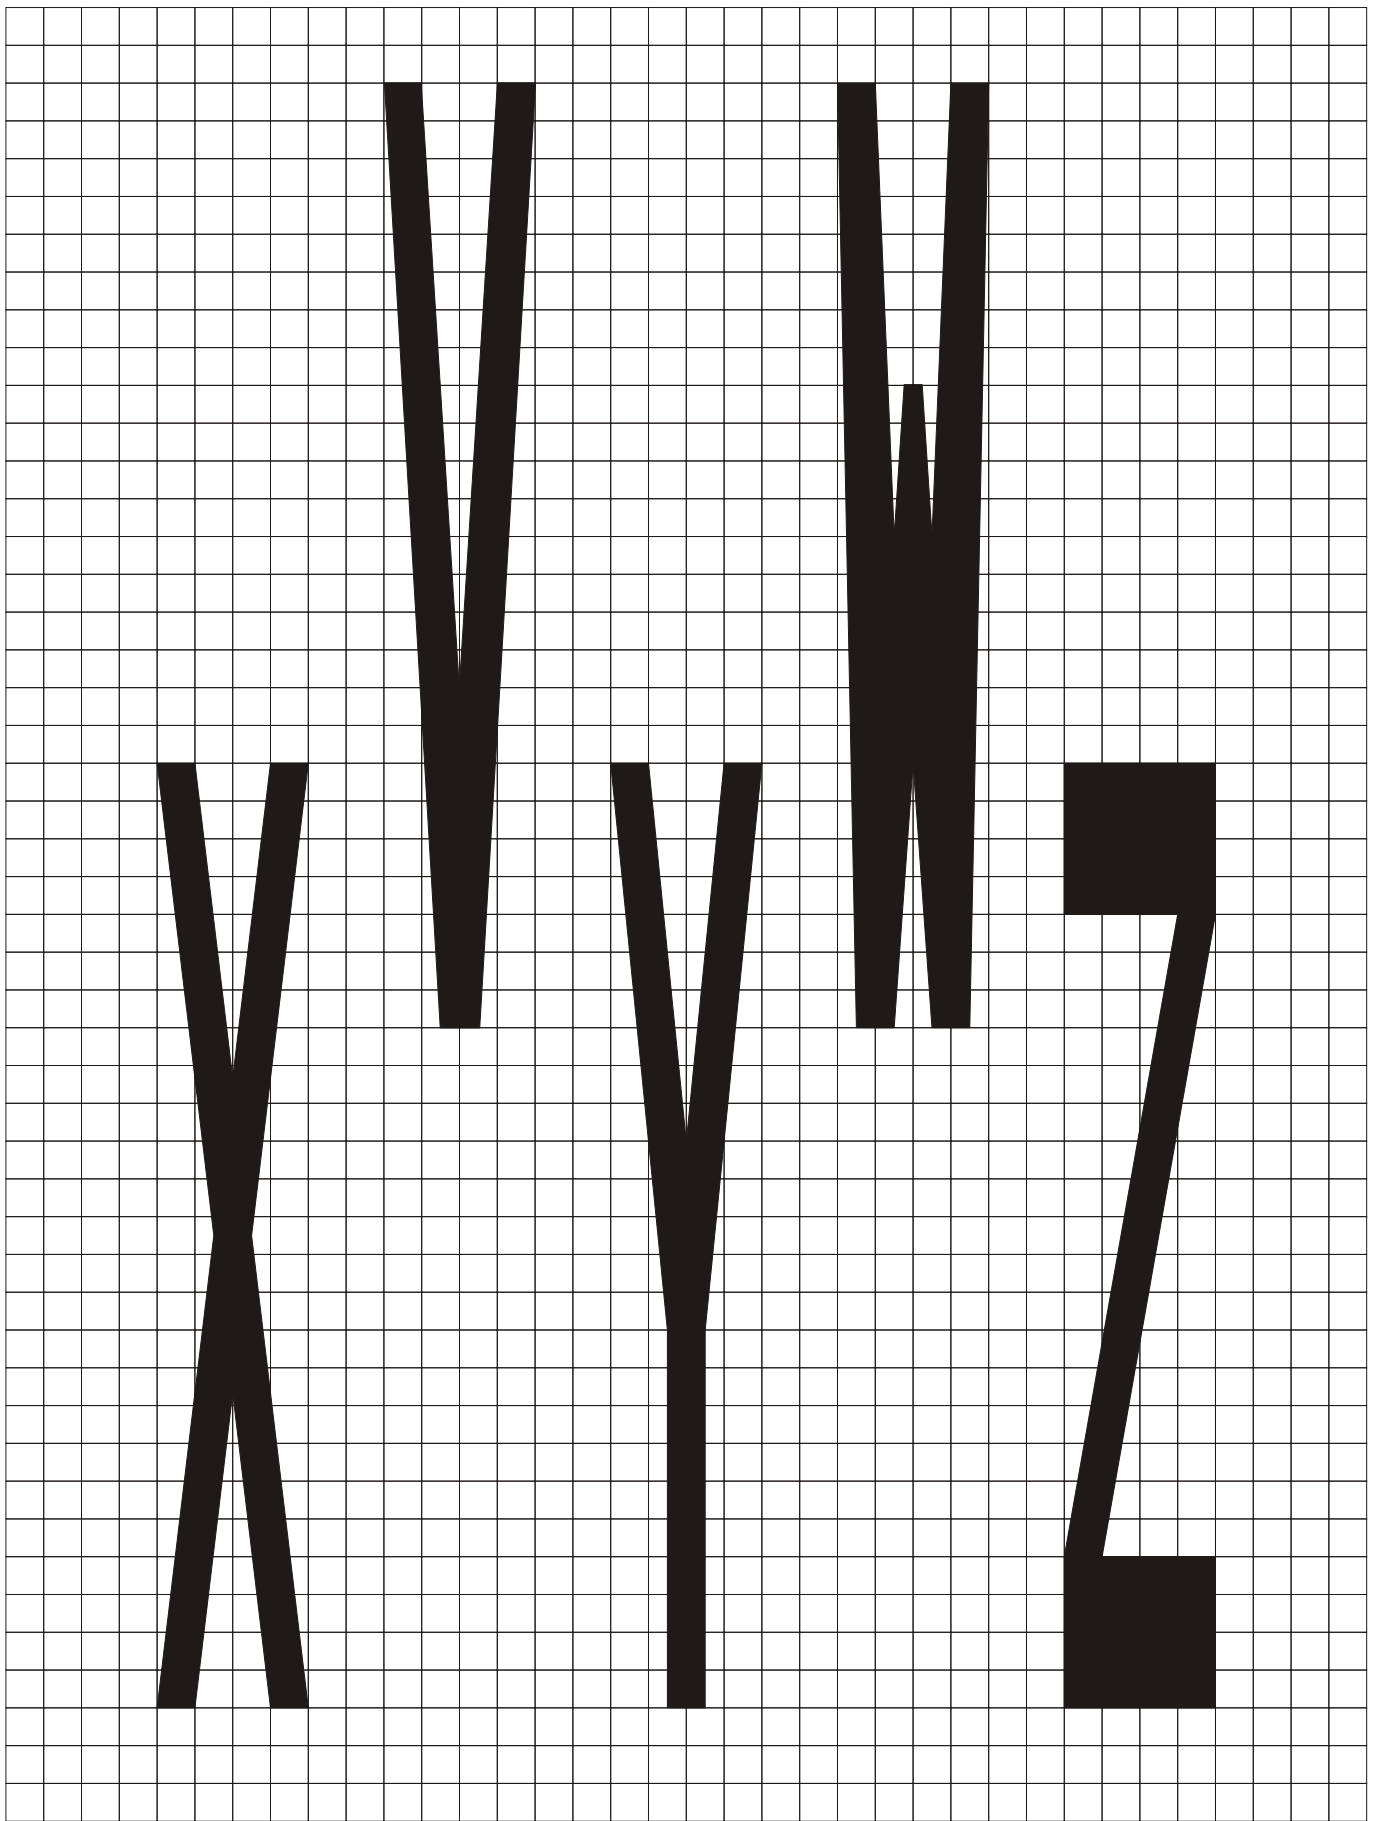


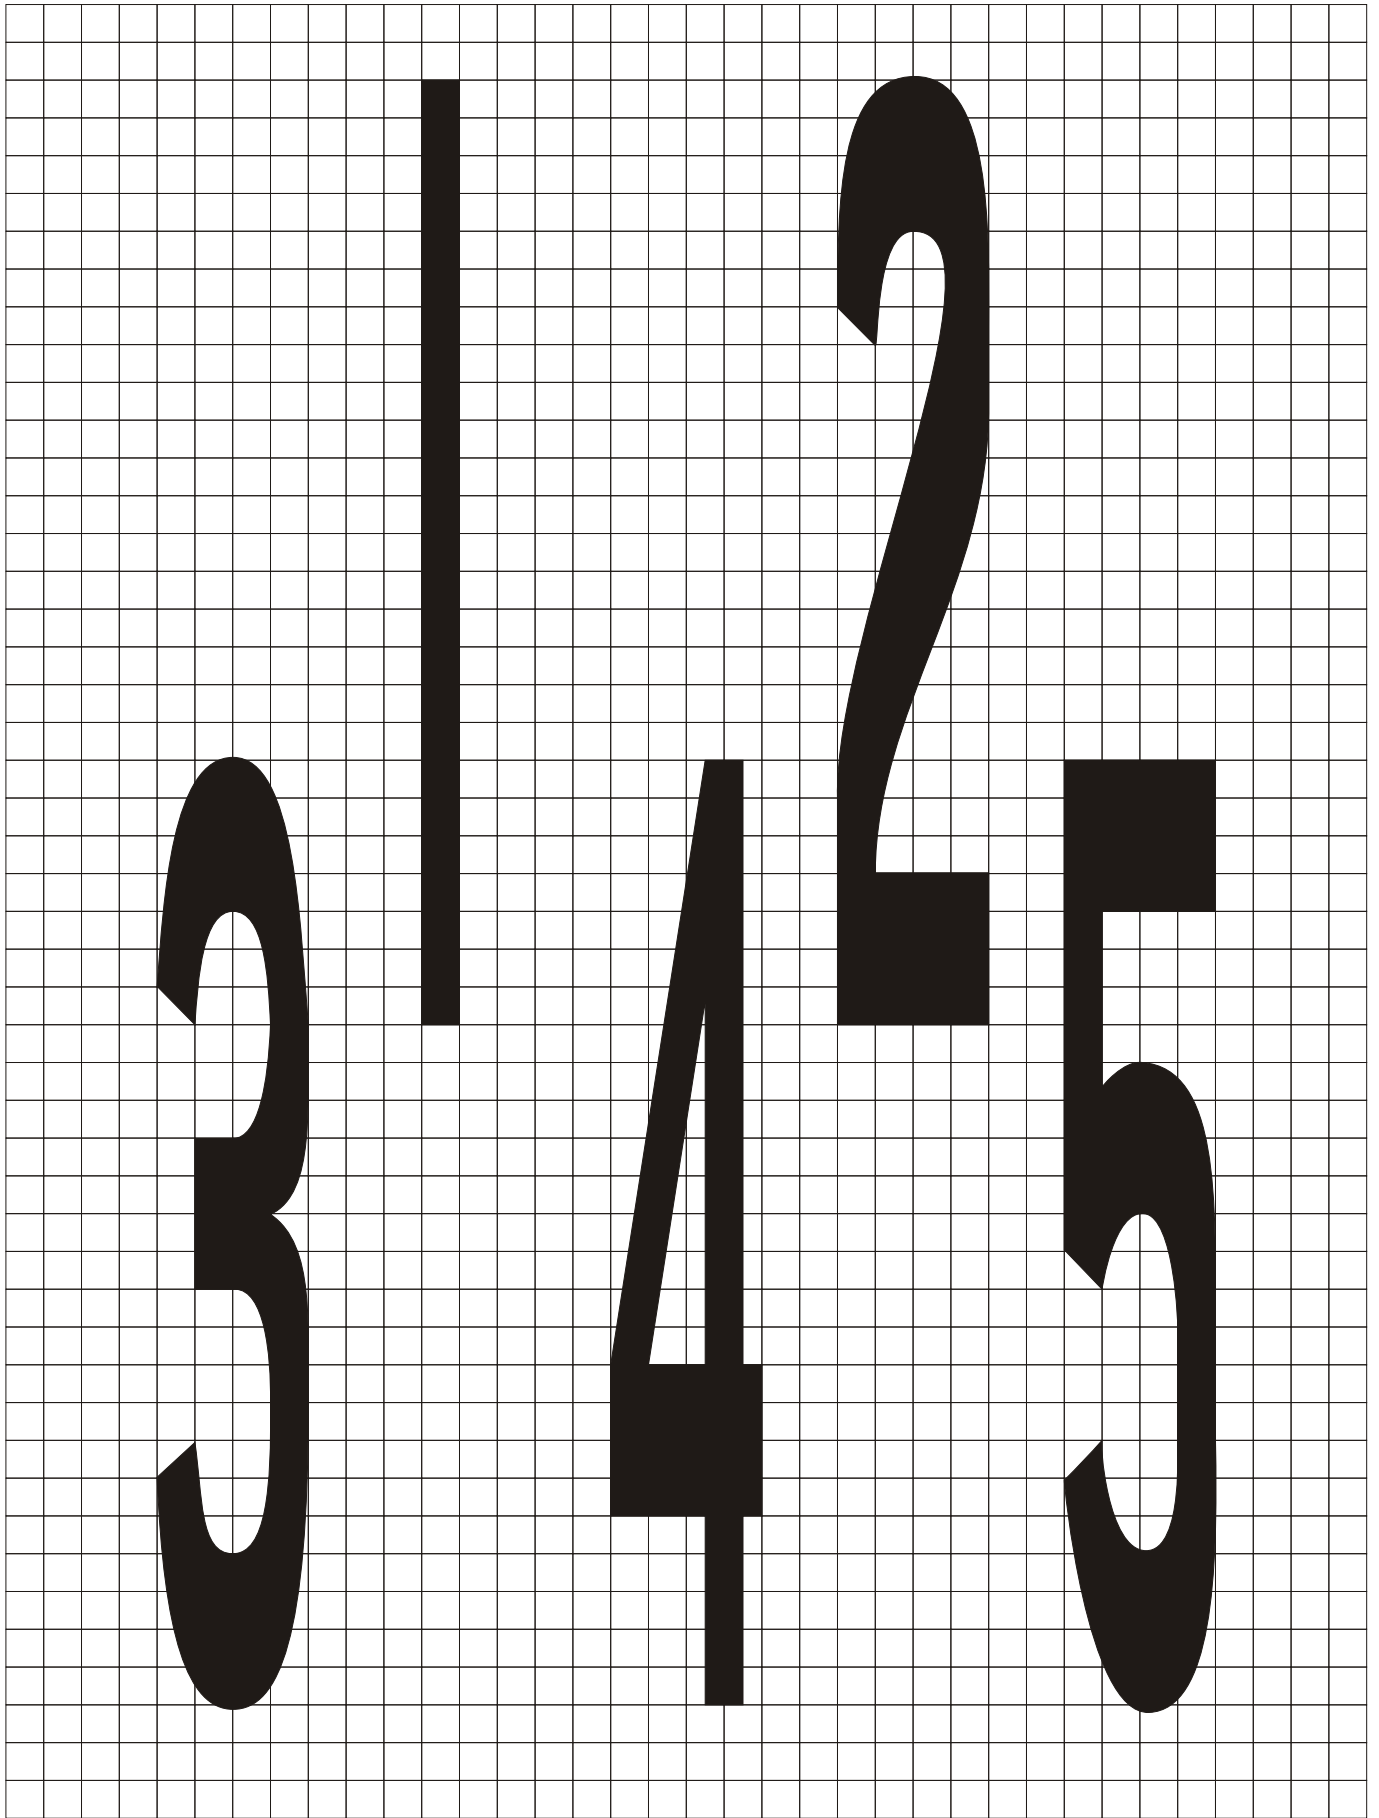

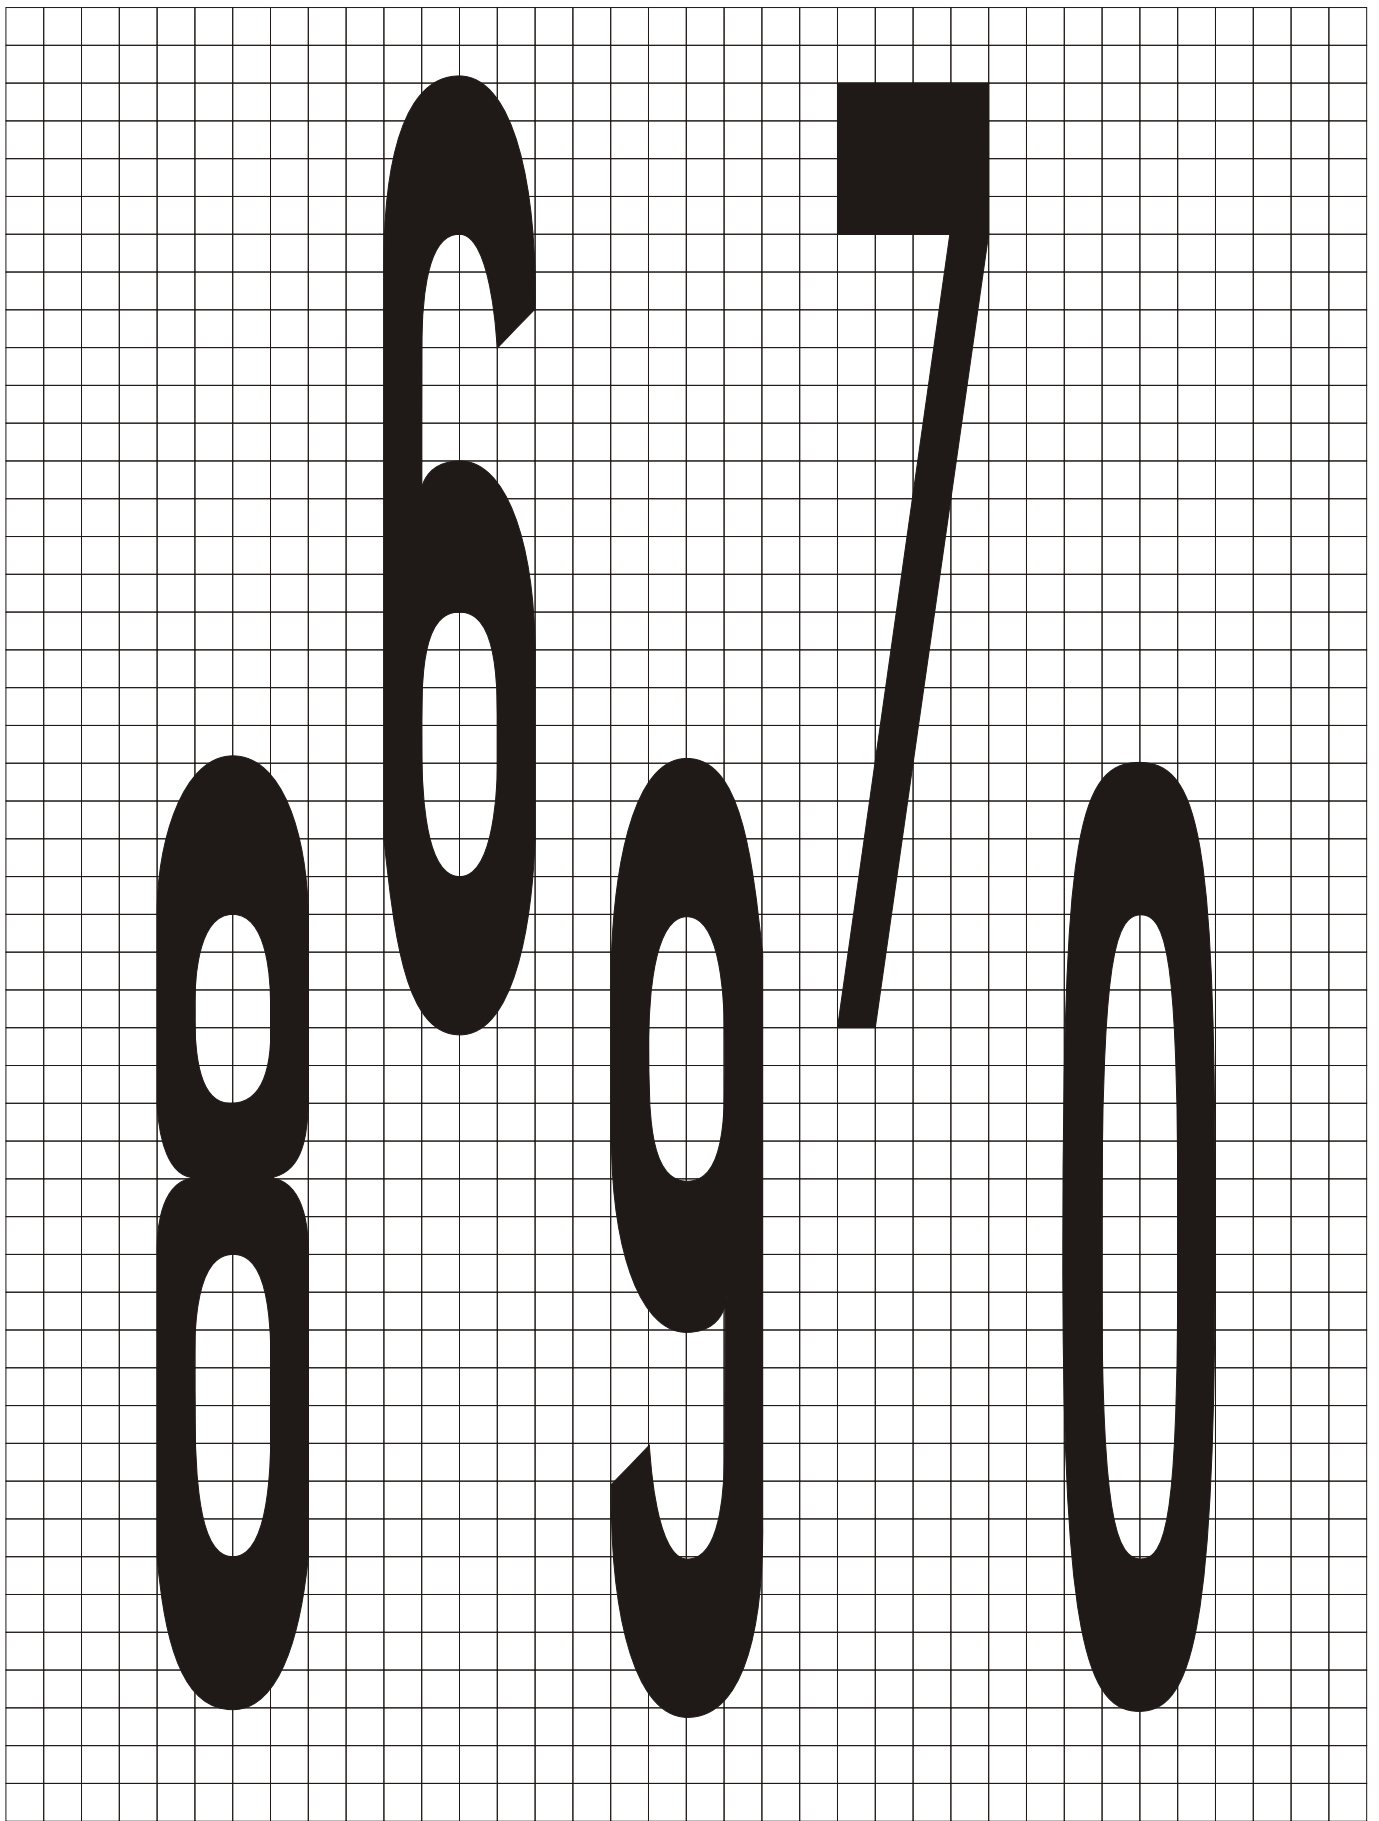


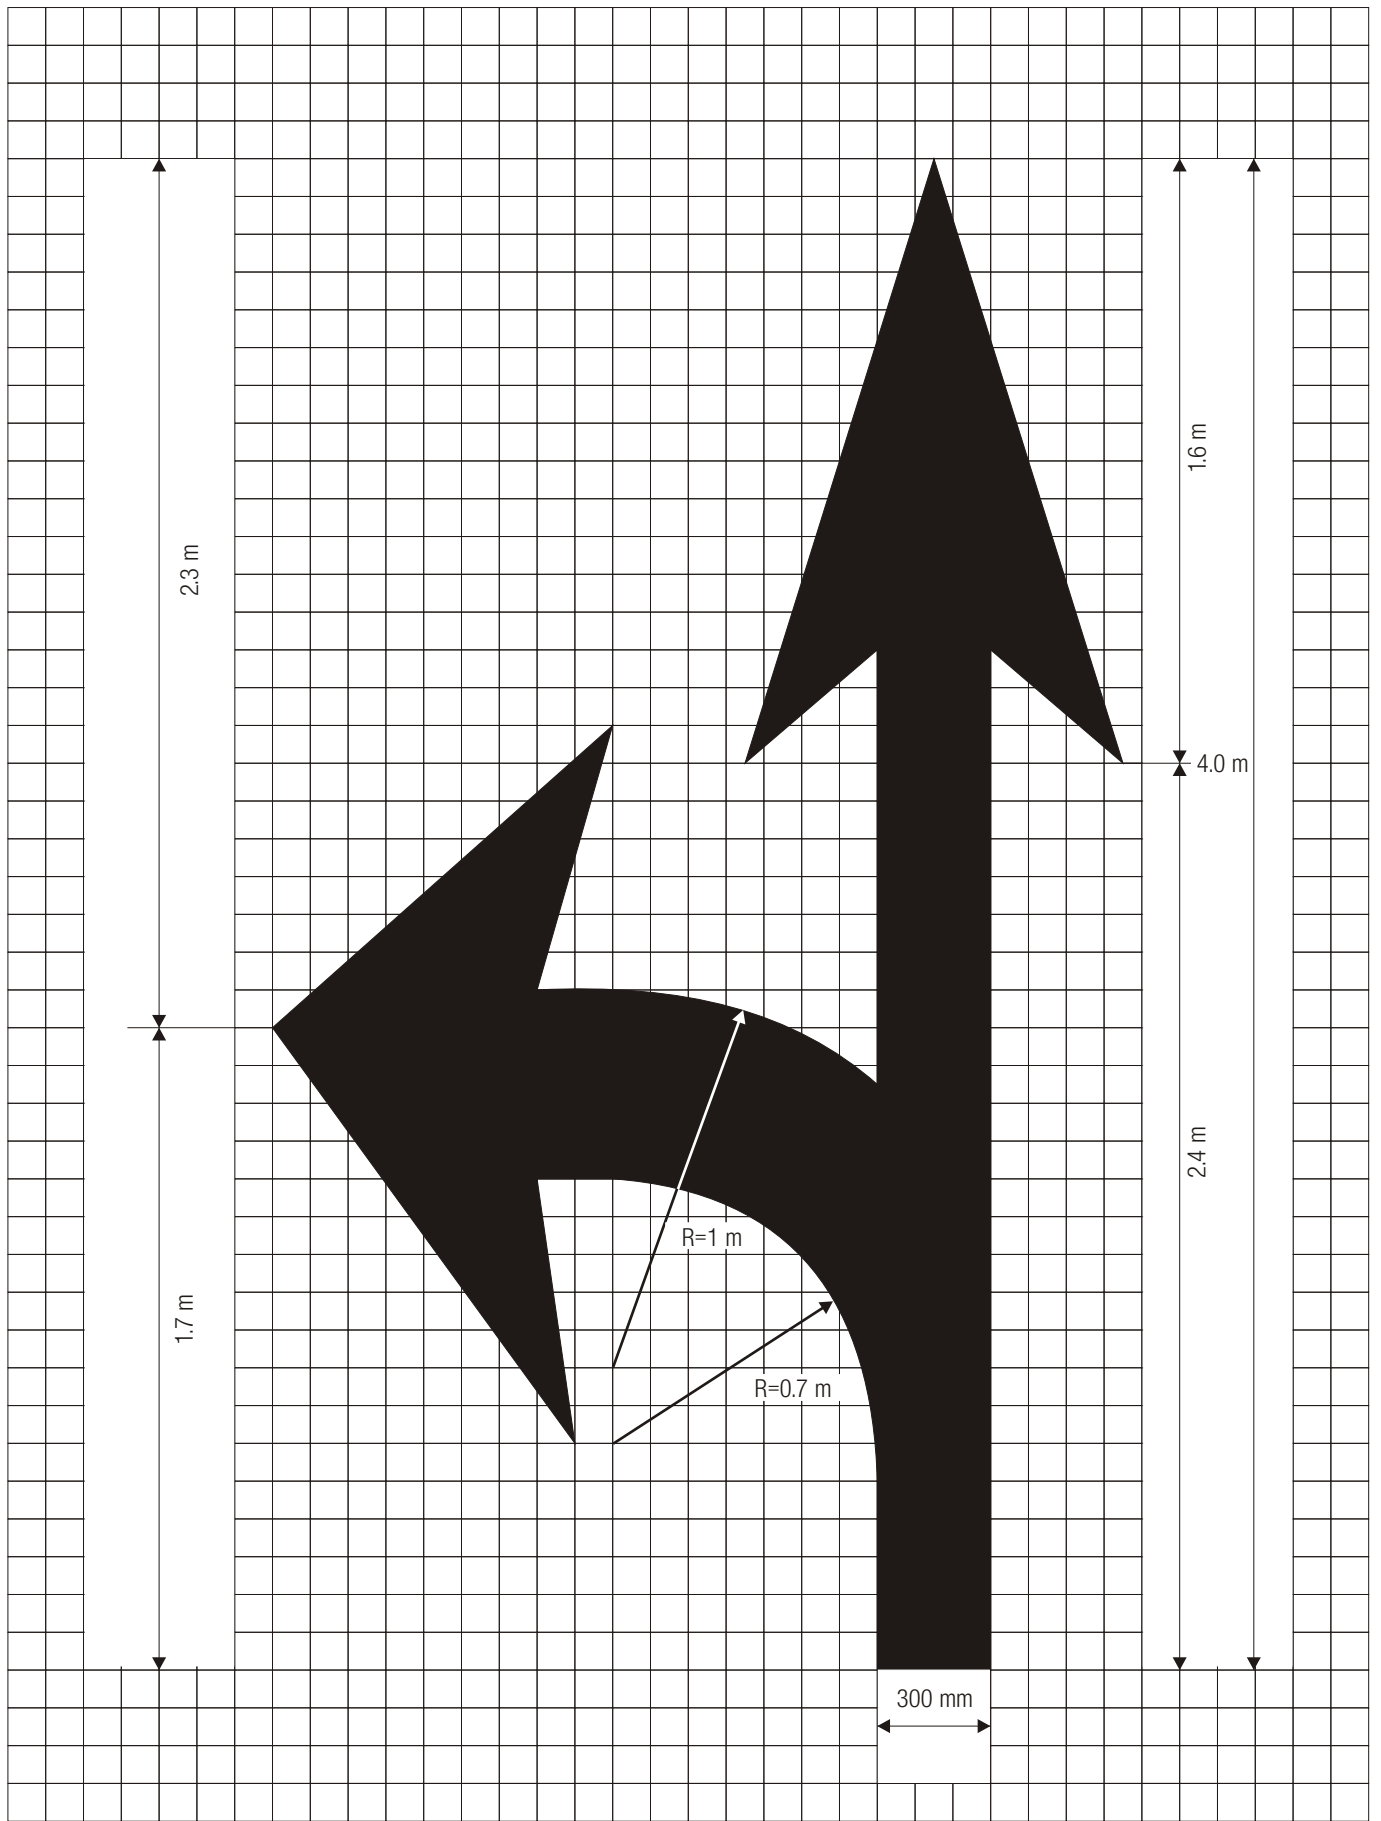

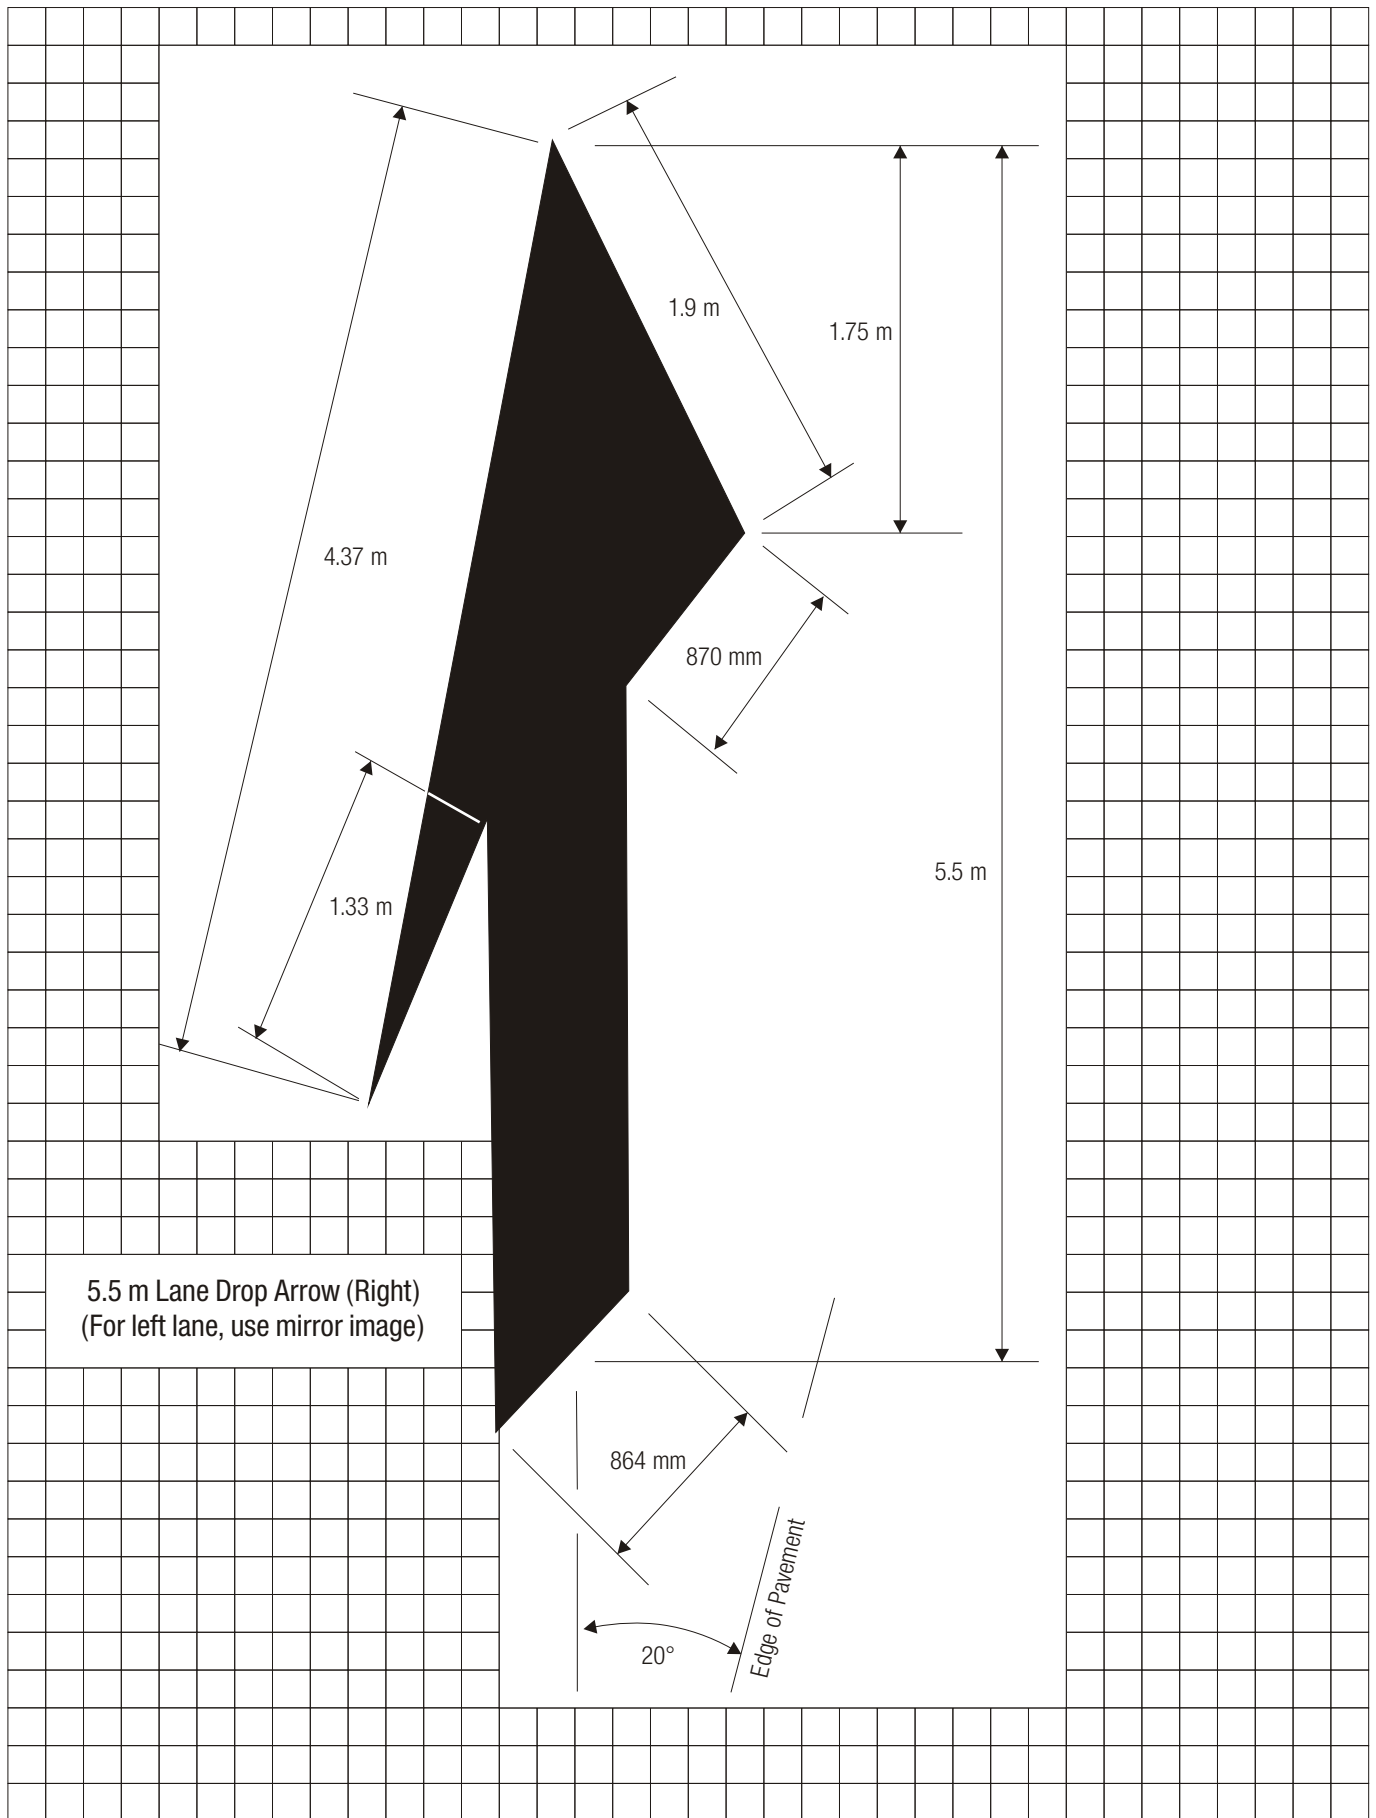


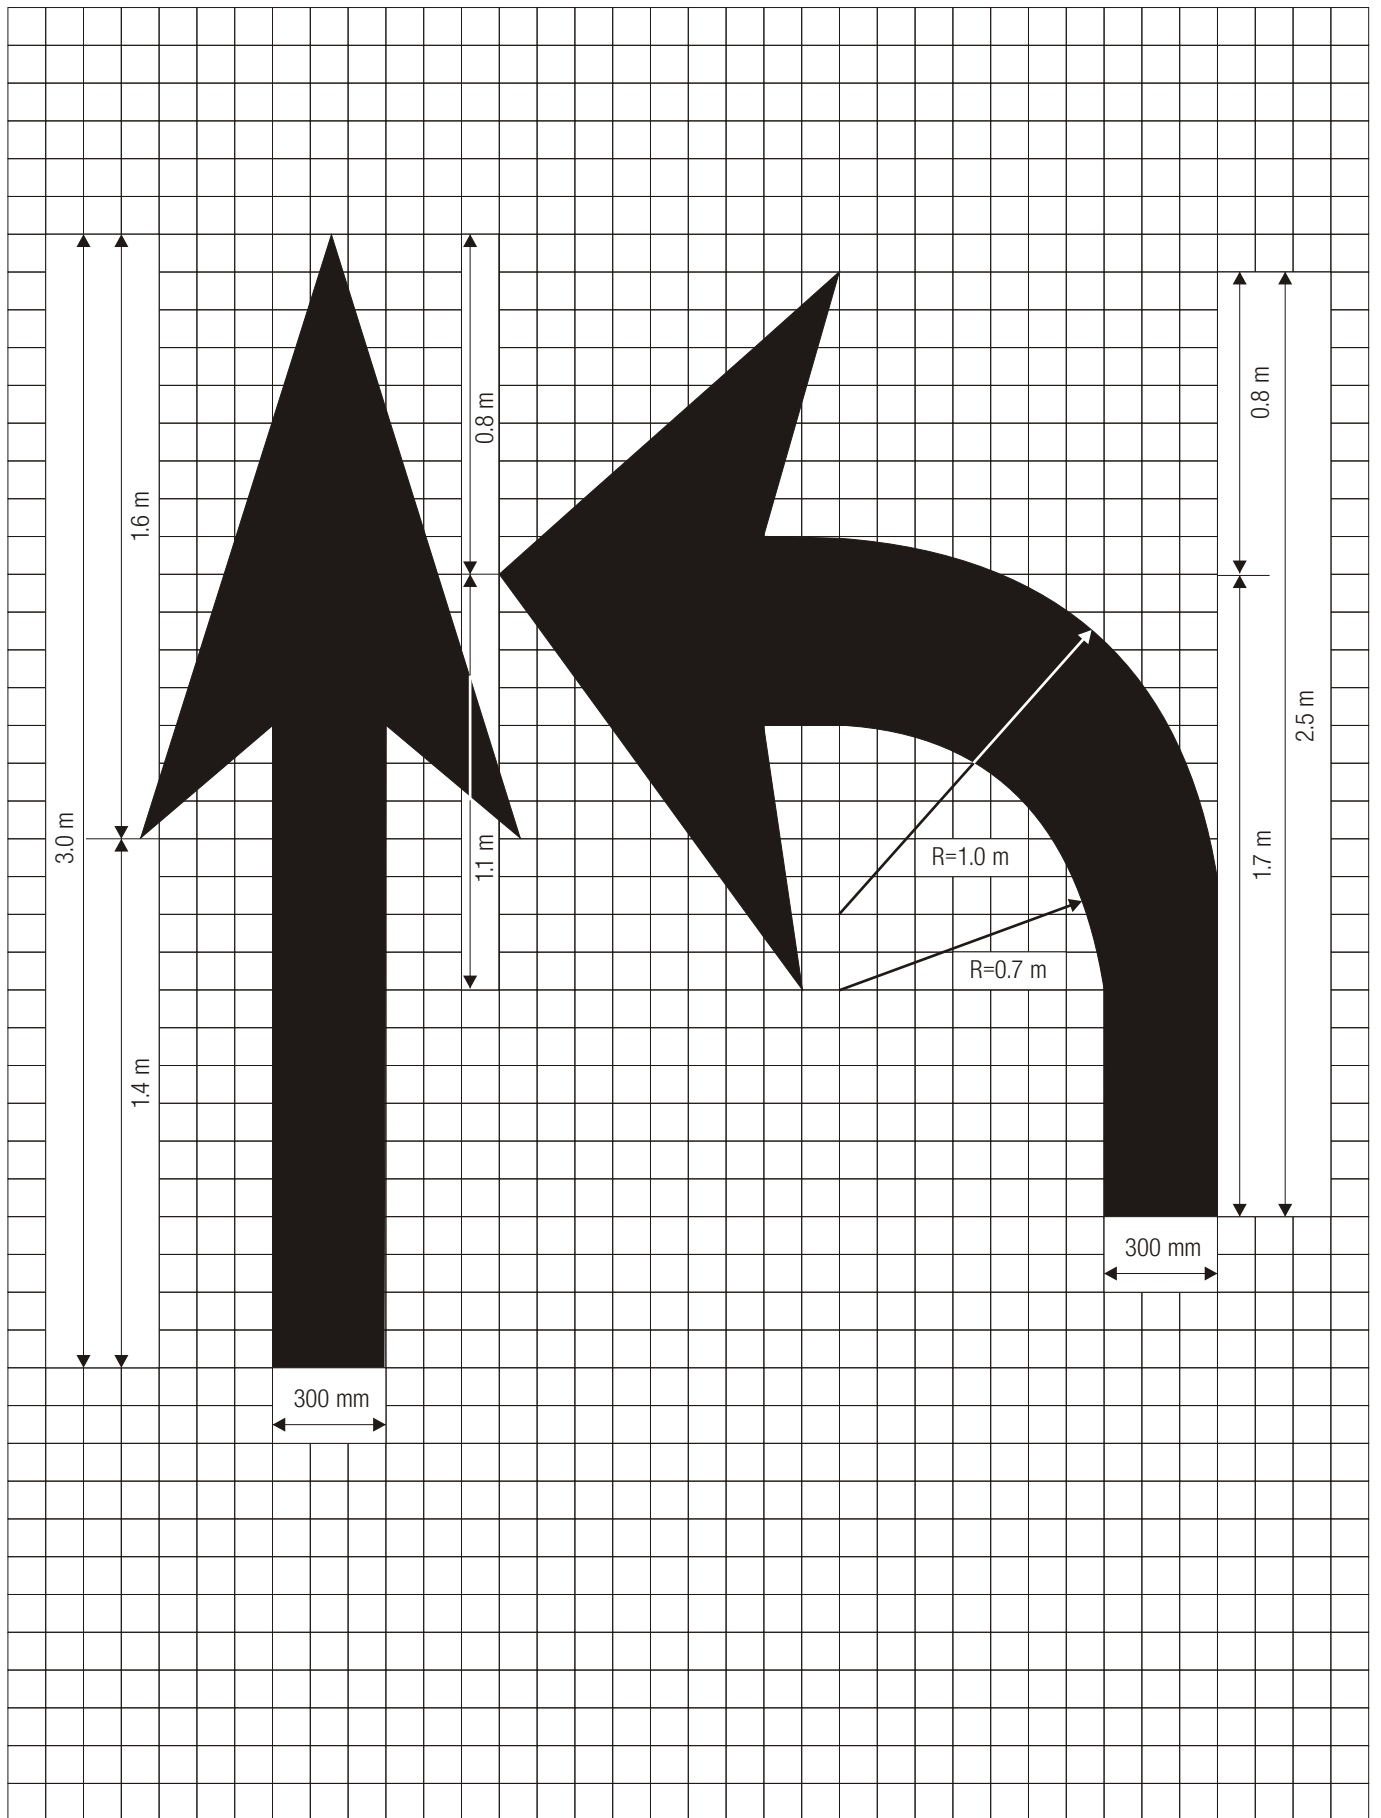


Optional Narrow Elongated Arrows

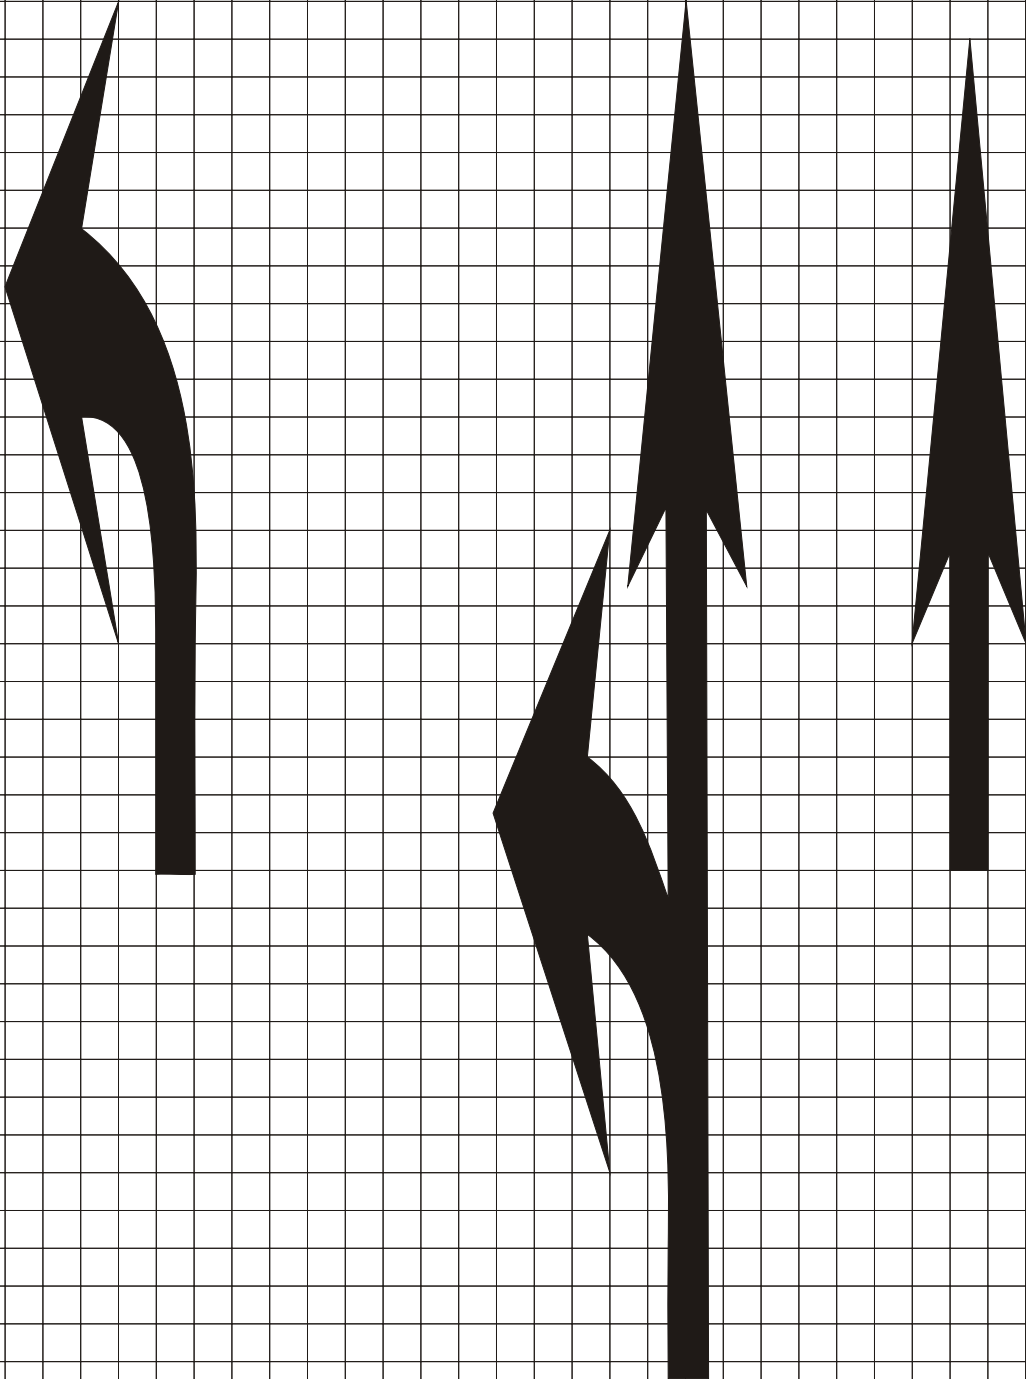


Freeway, Expressway and Ramp Pavement Arrow

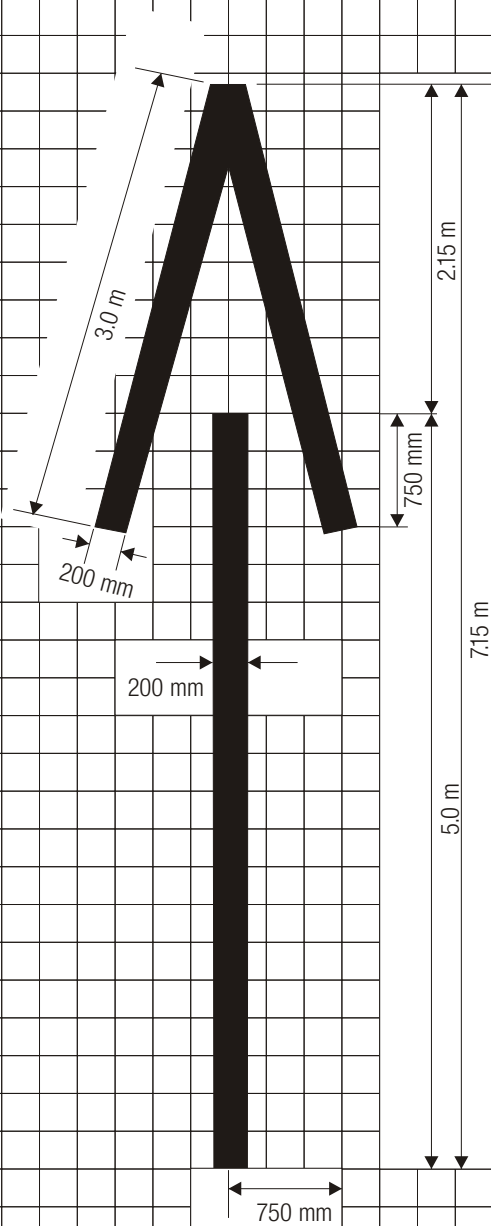



Preferential Lane Symbol

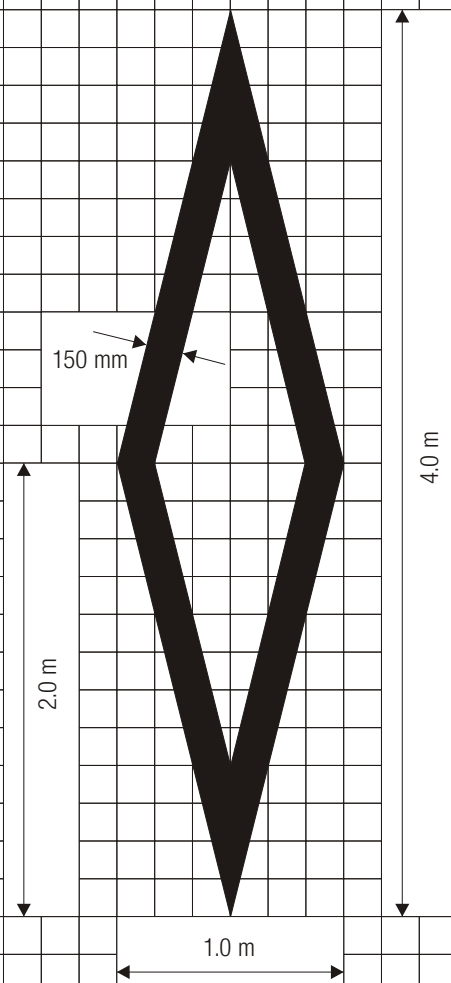


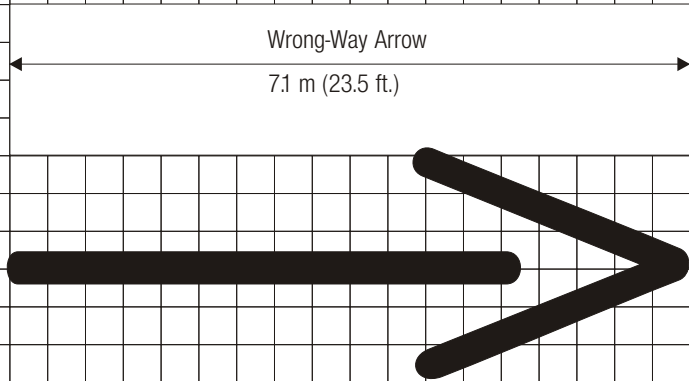


Wrong-Way Arrow Using Retroreflective Raised Pavement Markers

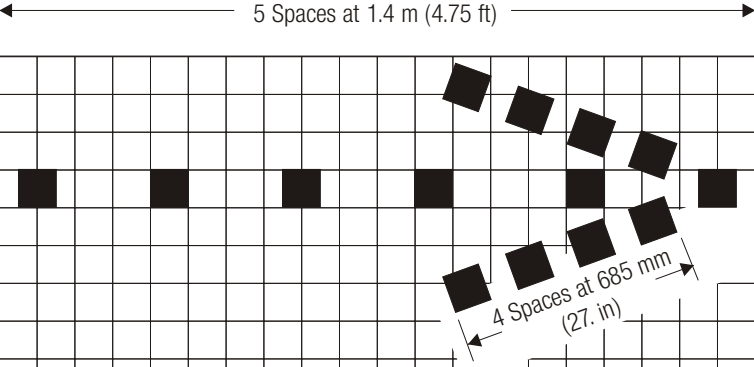

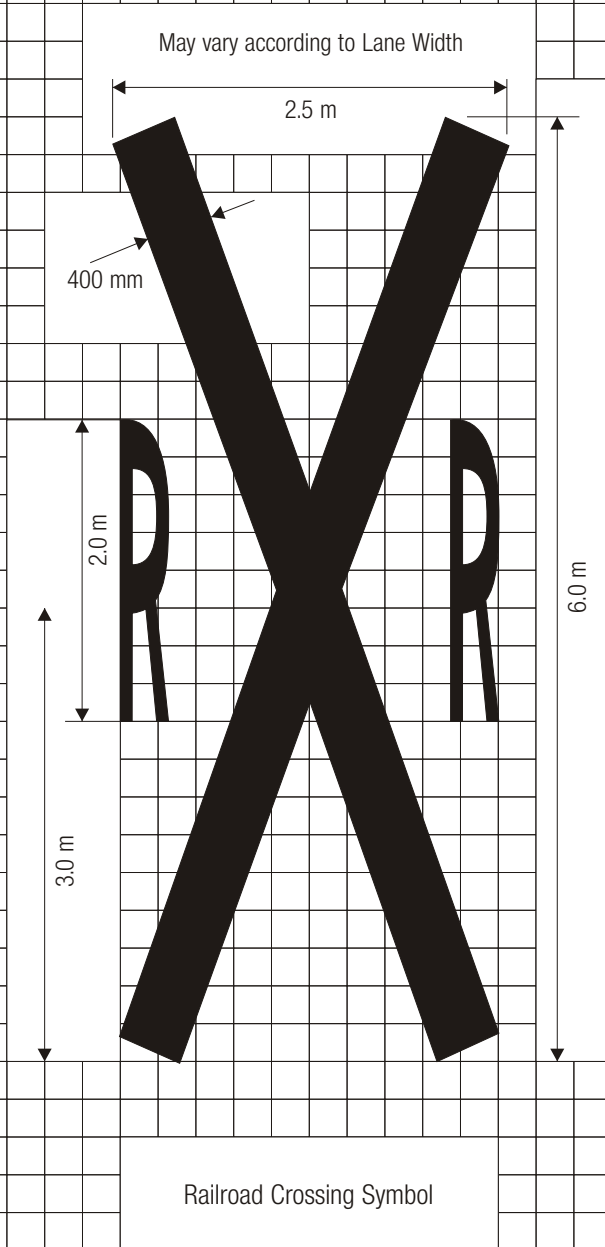


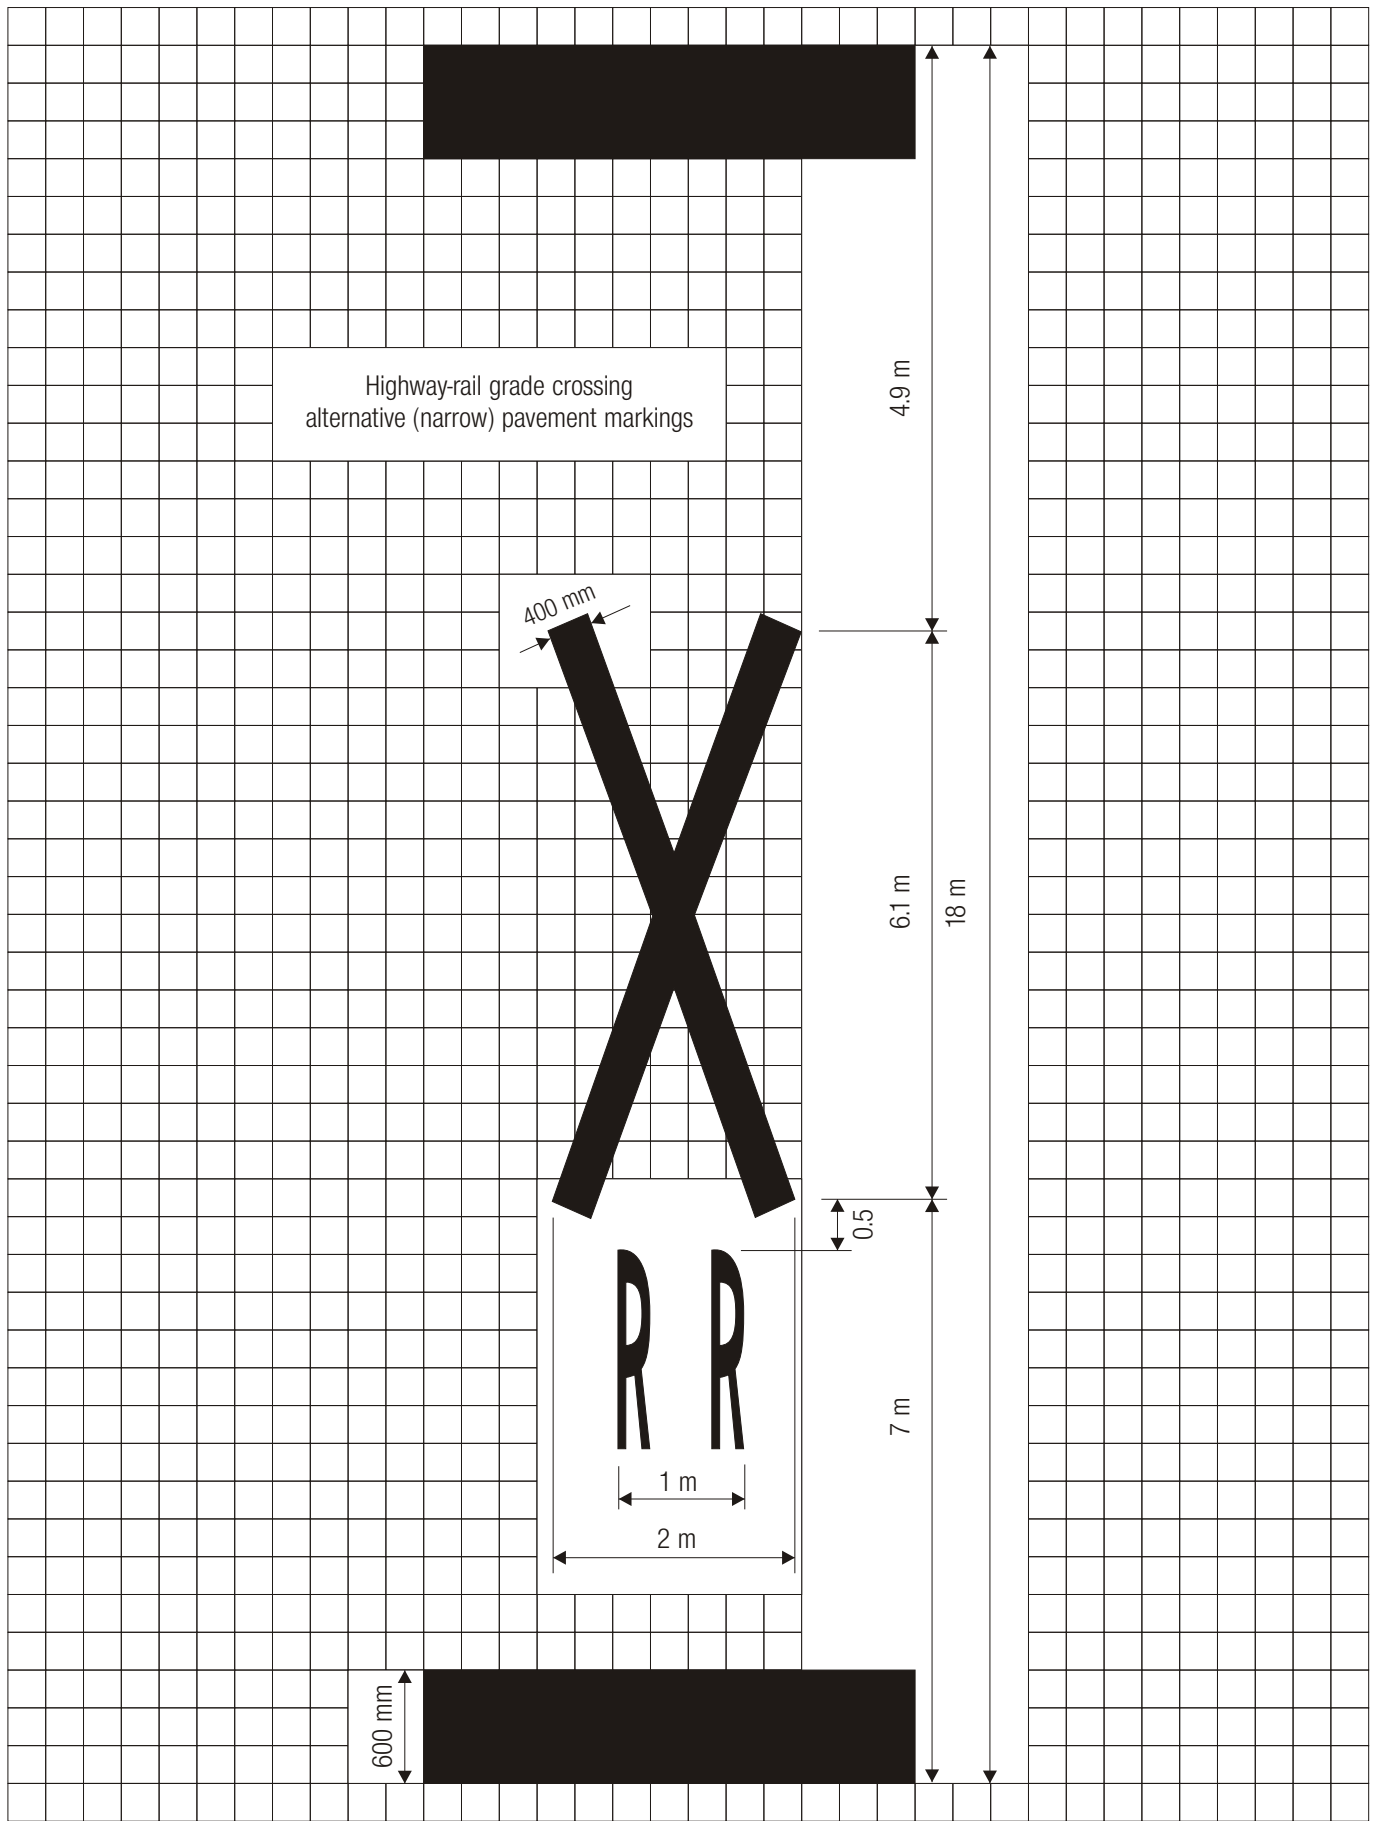


Bicycle Symbols

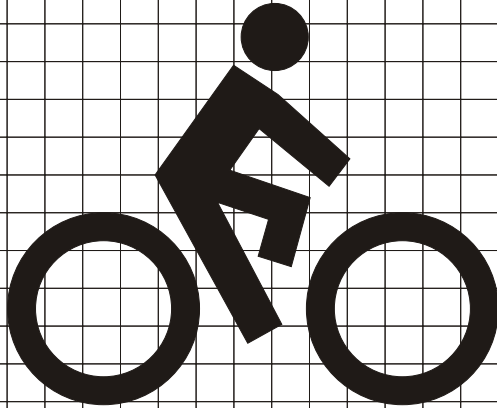

Bicycle Trail

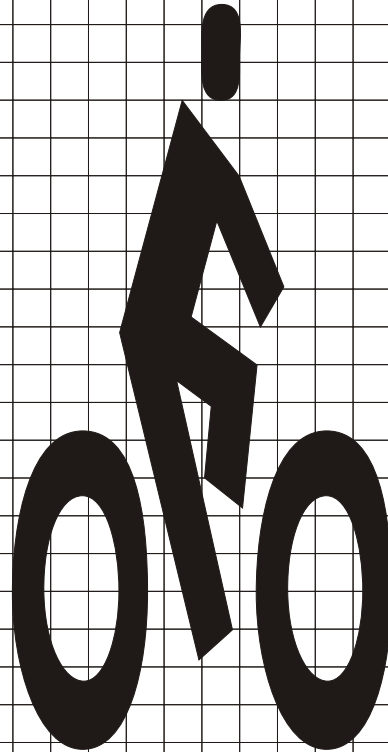



Designated Bicycle Lane

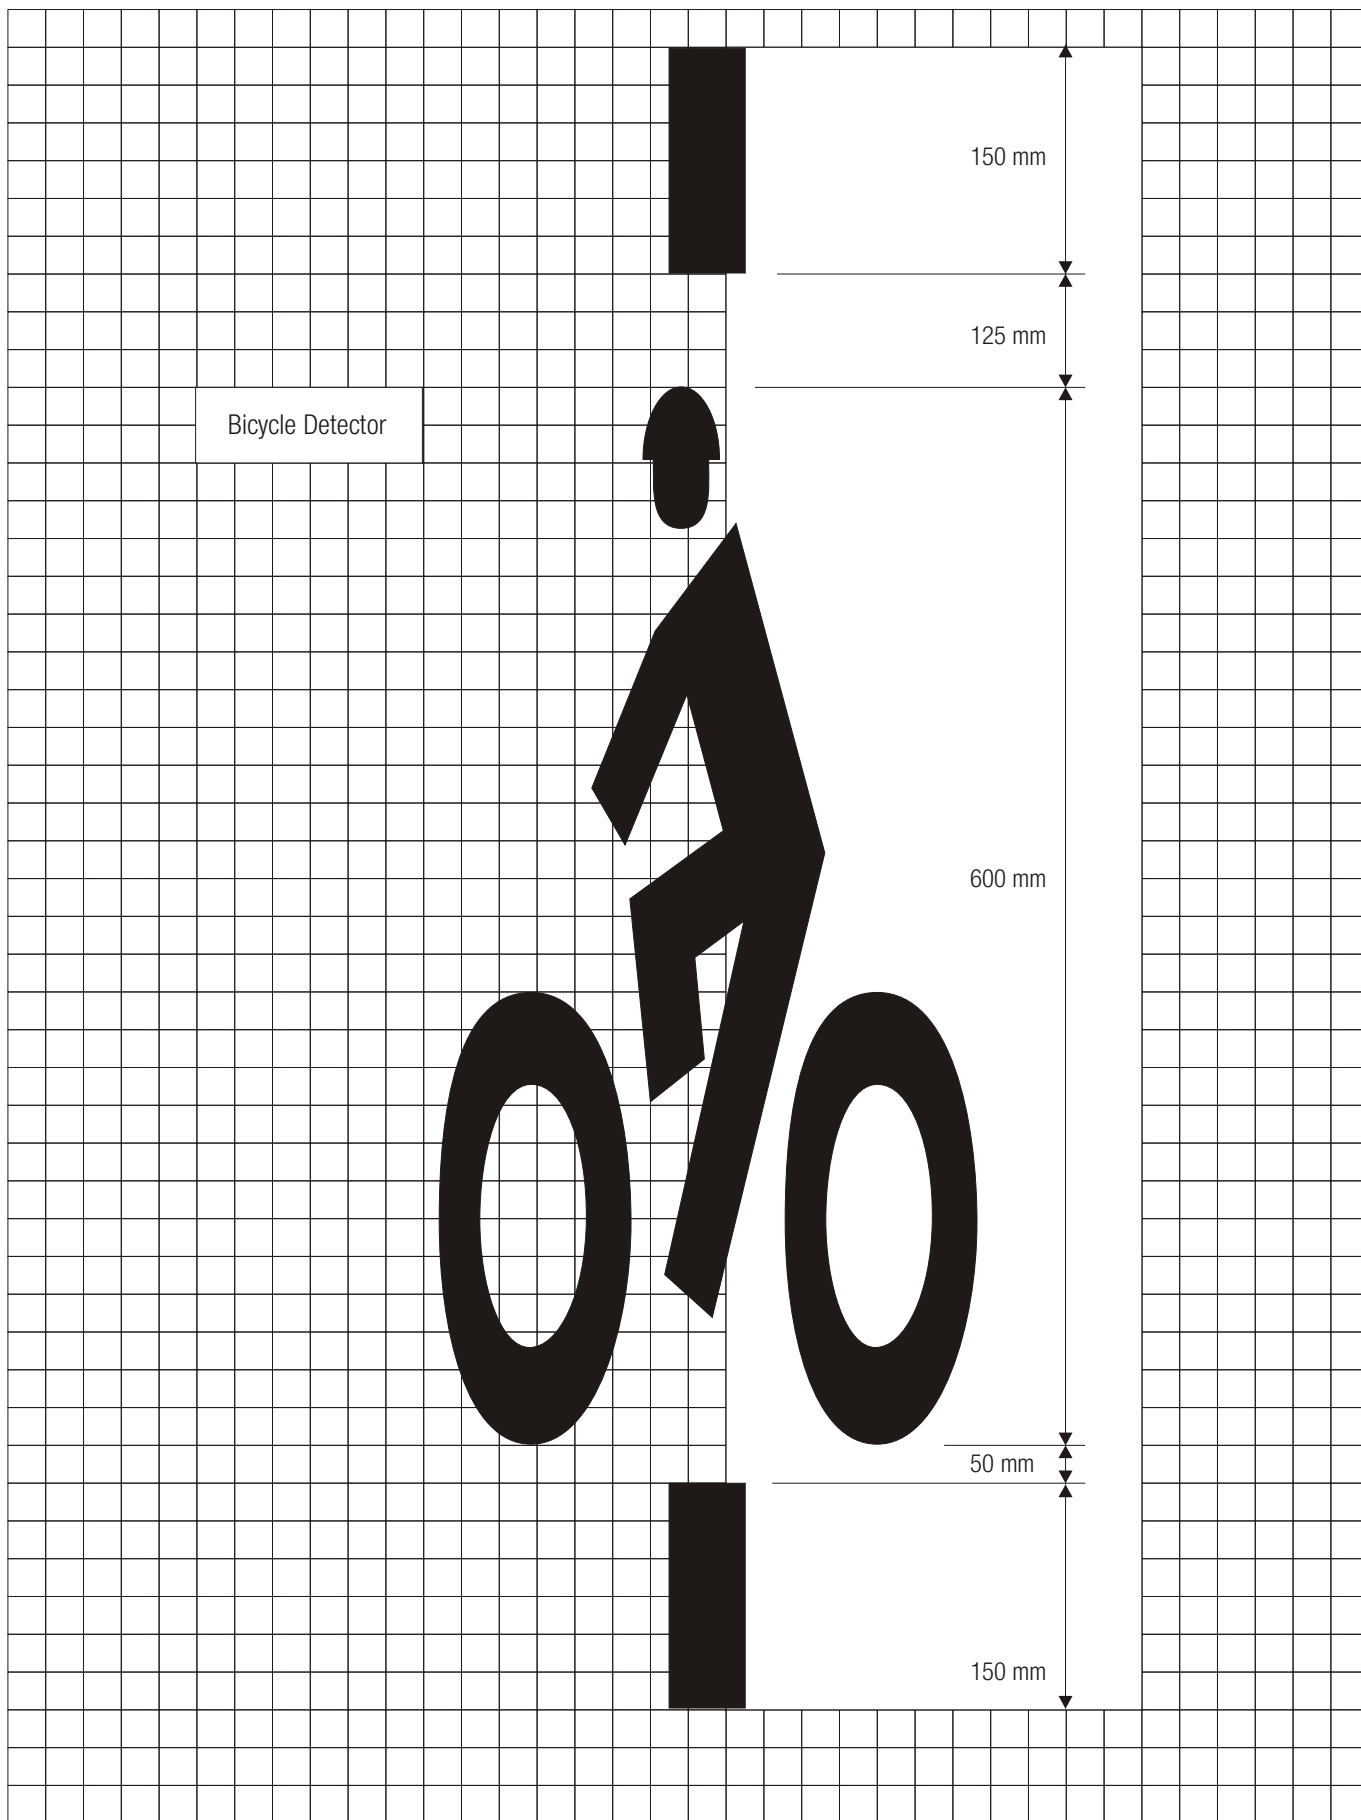


SCHOOL


3,480 mm

3,000 mm


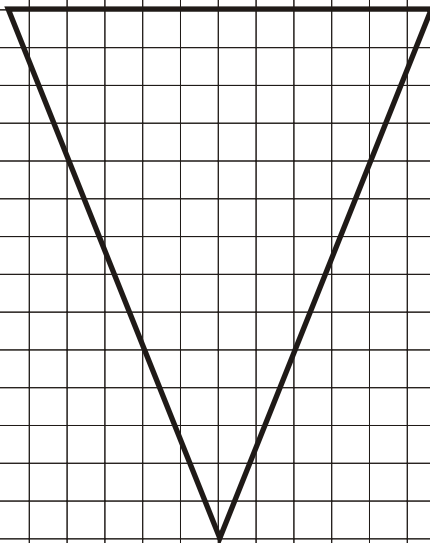
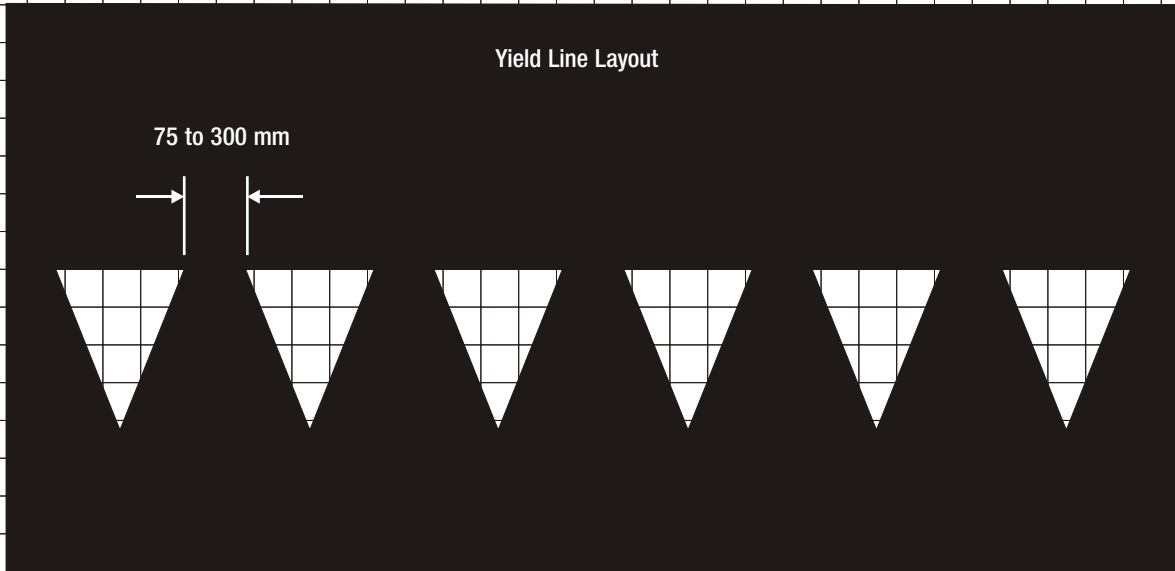


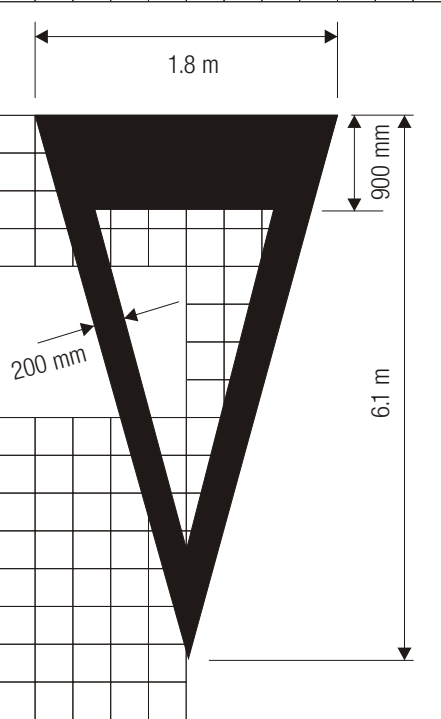


Yield Ahead Triangle

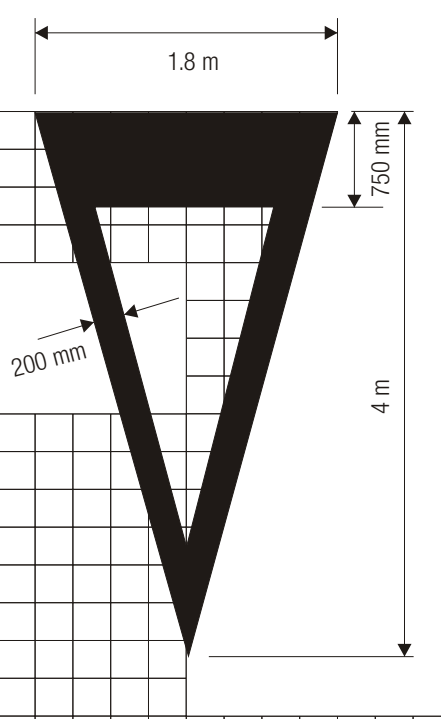

Speed Hump Markings

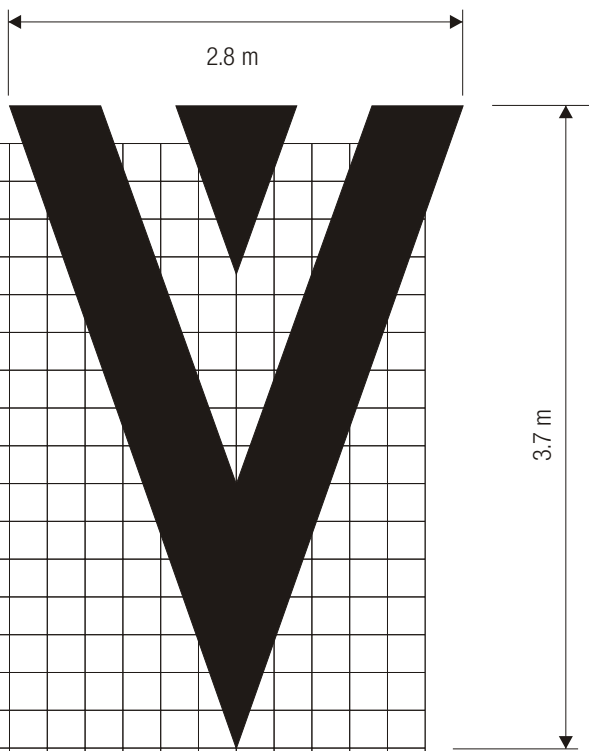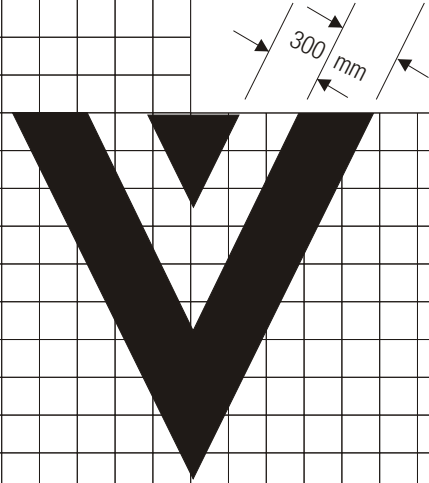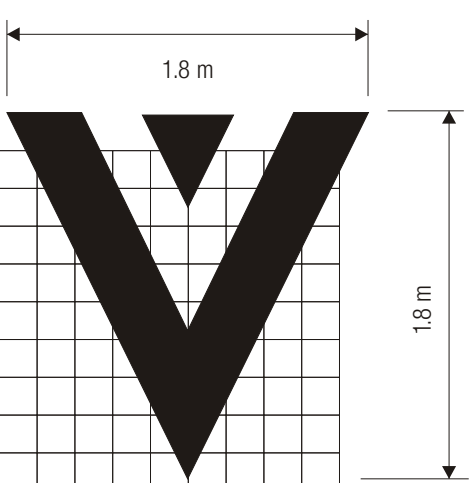

International Symbol of Accessibility Parking Space Marking
with Blue Background and White Border Options

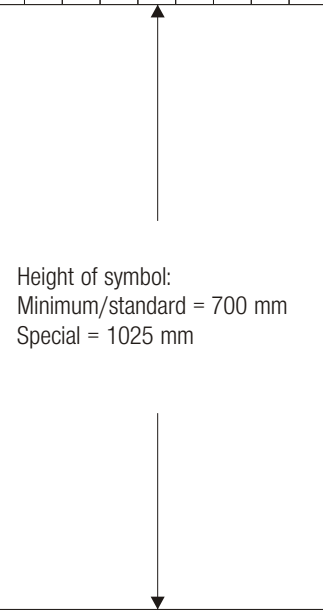

Height of symbol:
Minimum/standard = 700 mm
Special = 1025 mm



Width of symbol:
Minimum/standard = 600 mm
Special = 900 mm

*Stroke width:
Minimum/standard = 75 mm
Special = 100 mm

