


U.S. DEPARTMENT OF THE INTERIOR
U.S. GEOLOGICAL SURVEY

**BOREHOLE P- AND S-WAVE VELOCITY AT THIRTEEN STATIONS
IN SOUTHERN CALIFORNIA**

by

James F. Gibbs¹, David M. Boore¹, John C. Tinsley¹, and Charles S. Mueller²

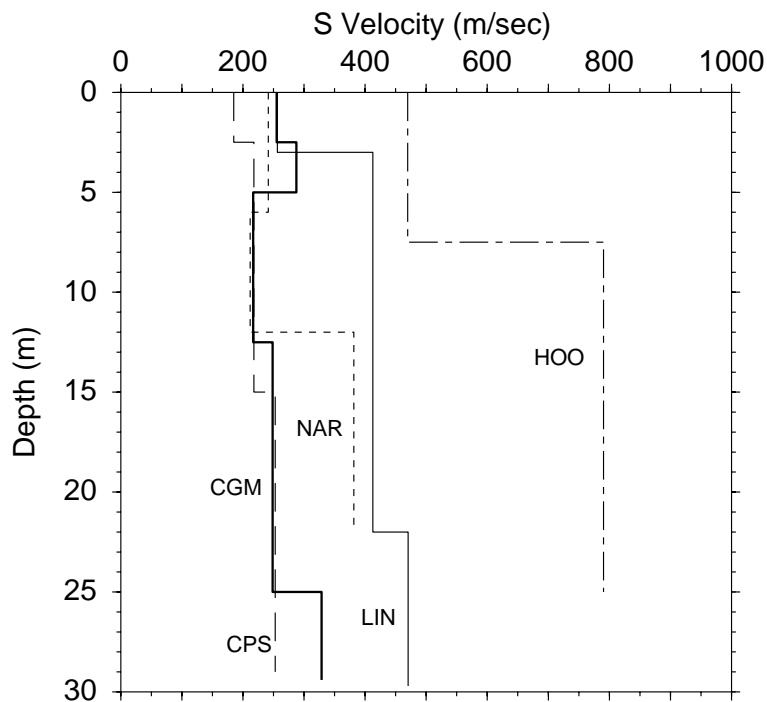

U.S. Geological Survey Open-File Report OF 01 - 506

This report is preliminary and has not been reviewed for conformity with U.S. Geological Survey editorial standards or with the North American Stratigraphic Code. Any use of trade, product, or firm names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

¹Menlo Park, CA 94025

²Denver, CO 80225

TABLE OF CONTENTS

	Page
Introduction	1
<i>P</i> - and <i>S</i> -Wave Travel-Time Data	4
Velocity Profiles	4
Summary Velocity Profiles	6
Acknowledgments	13
References	13
 Appendix A–Detailed Results:	
Cerritos College Gymnasium	14
Cerritos College Physical Science Bldg.	21
Cerritos College Police Bldg.	28
Corps of Engineer Station	35
Hoover School	42
Lincoln School	49
Lincoln School Whittier	56
Los Alisos Adult School	63
Olive Junior High School	70
San Bernadino Fire Station	77
Santa Anita Golf Course	84
South Western Academy	91
St. Paul High School	98
 Appendix B–Poisson’s Ratios:	
Cerritos College Gymnasium	105
Cerritos College Physical Science Bldg.	106
Cerritos College Police Bldg.	107
Corps of Engineer Station	108
Hoover School	109
Lincoln School	110
Lincoln School Whittier	111
Los Alisos Adult School	112
Olive Junior High School	113
San Bernadino Fire Station	114
Santa Anita Golf Course	115
South Western Academy	116
St. Paul High School	117

BOREHOLE P- AND S-WAVE VELOCITY AT THIRTEEN SITES IN SOUTHERN CALIFORNIA

by

James F. Gibbs, David M. Boore, John C. Tinsley, and Charles S. Mueller

INTRODUCTION

The U.S. Geological Survey (USGS), as part of a program to acquire seismic velocity data at locations of strong-ground motion in earthquakes (e.g. Gibbs, et al., 2000), has investigated thirteen additional sites in the Southern California region. Of the thirteen sites, twelve are in the vicinity of Whittier, California and one is located in San Bernardino, California.

Several deployments of temporary seismographs were made after the Whittier Narrows, California earthquake of 1 October 1987 (Mueller et al., 1988). A deployment, between 2 October and 9 November 1987, was the motivation for selection of six of the drill sites. Temporary portable seismographs at Hoover School (HOO), Lincoln School (LIN), Corps of Engineers Station (NAR), Olive Junior High School (OLV), Santa Anita Golf Course (SAG) and Southwestern Academy (SWA), recorded significant aftershock data. These portable sites with the exception of Santa Anita Golf Course were co-sited with strong-motion recorders.

Stations at HOO, Lincoln School Whittier (WLB), Saint Paul High School (STP), Alisos Adult School (EXC), Cerritos College Gymnasium (CGM), Cerritos College Physical Science Building (CPS), and Cerritos College Police Building (CPB) were part of an array of digital strong-motion stations deployed from “bedrock” in Whittier to near the deepest part of the Los Angeles basin in Norwalk. Although development and siting of this new array (partially installed at the time of this writing) was generally motivated by the Whittier Narrows earthquake, these new sites (with the exception of HOO) were not part of any Whittier Narrows aftershock deployments. A similar new digital strong-motion site was installed at the San Bernardino Fire Station during the same time frame.

Velocity data were obtained to depths of about 90 meters at two sites, 30 meters at seven sites, and 18 to 25 meters at four sites. Lithology data from the analysis of cuttings and samples, was obtained from the two 90-meter deep holes and from five of the shallower holes to supplement the velocity interpretation. The two 90-meter boreholes (SB1, CPB) have been instrumented with borehole seismometers for continuous monitoring of earthquake activity (Rogers, et al., 1998). No drill samples or cuttings were obtained from the other six sites but driller’s logs were scanned for major changes noted there. The velocity models at those sites were interpreted using only the measured data and major changes in the driller’s log as noted above.

The sites are shown in Figure 1 and listed in Table 1, which gives references to information regarding the strong-motion data. Several hundred strong-motion records of the main-shock were written by this moderate size earthquake ($M_L = 5.9$) making it important from a scientific and engineering prospective (Brady et al., 1988, Shakal et al., 1988).

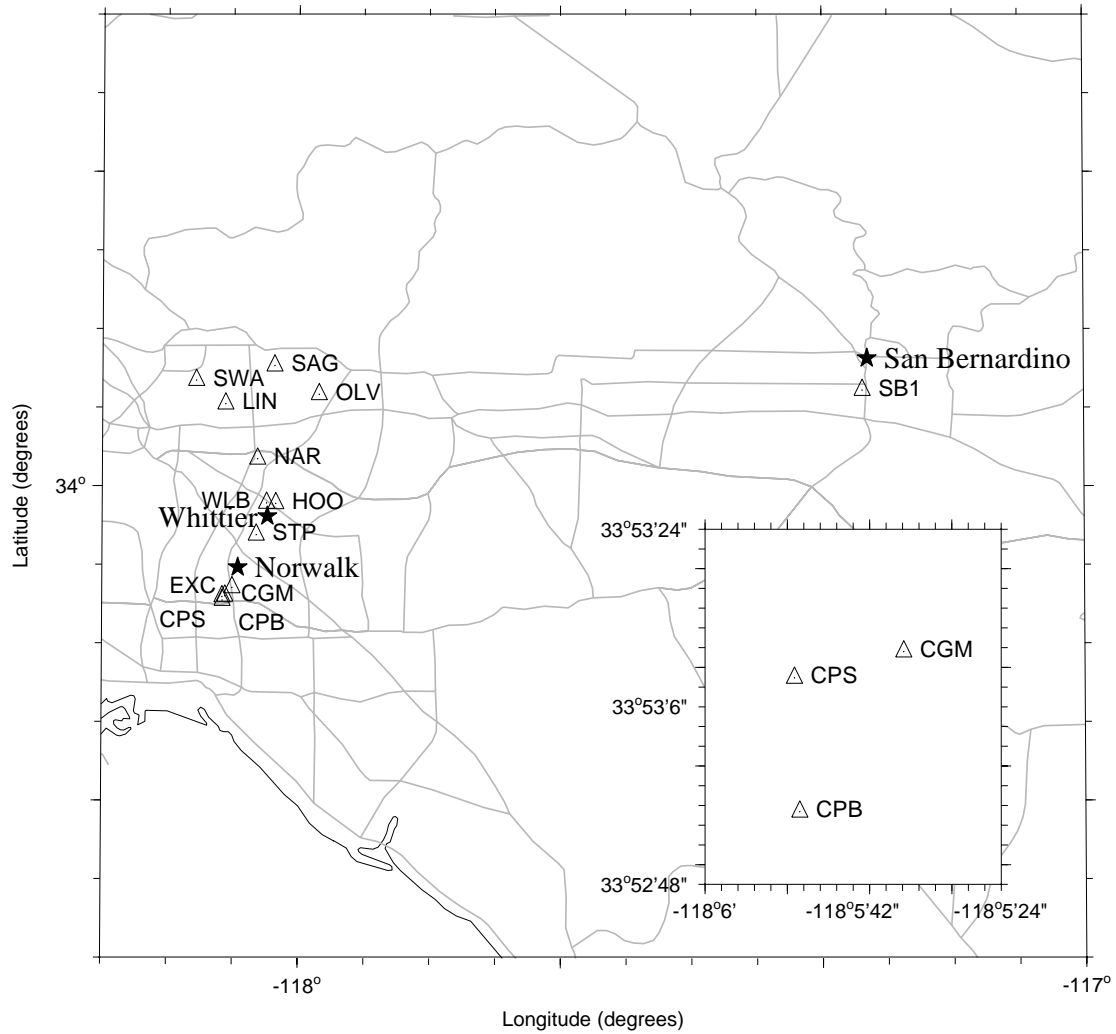


Figure 1. Regional map showing the locations of boreholes (triangles) included in this report. Inset shows the locations of the Cerritos College boreholes at an expanded scale. Locations of roads and cities are approximate.

Table 1. Site names, three letter codes, and coordinates using the North American Datums of 1927 (NAD27) and 1983 (NAD83).

Station	StaCode	Lat:NAD27	Long:NAD27	Lat:NAD83	Long:NAD83
Cerritos College Gymnasium	CGM	33.88663	-118.09329	33.88664	-118.09419
Cerritos College Physical Sci. Bldg.	CPS	33.88589	-118.09698	33.88590	-118.09788
Cerritos College Police Bldg.	CPB	33.88212	-118.09680	33.88213	-118.09770
Corps of Engineers Station *	NAR	34.03219	-118.05225	34.03220	-118.05315
Hoover School *	HOO	33.98491	-118.02889	33.98492	-118.02979
Lincoln School *	LIN	34.09043	-118.09305	34.09044	-118.09395
Lincoln School Whittier	WLB	33.98535	-118.04061	33.98536	-118.04151
Los Alisos Adult School	EXC	33.89559	-118.08428	33.89560	-118.08518
Olive Junior High School *	OLV	34.10073	-117.97409	34.10074	-117.97499
San Bernardino Fire Station	SB1	34.10534	-117.28201	34.10535	-117.28289
Santa Anita Golf Course	SAG	34.13096	-118.03074	34.13097	-118.03164
South Western Academy *	SWA	34.11533	-118.13046	34.11534	-118.13136
St. Paul High School	STP	33.95158	-118.05369	33.95159	-118.05459

* Strong-motion accelerograph located near borehole (see location maps in Appendix A).

P- AND *S*-WAVE TRAVEL-TIME DATA

Shear waves were generated at the ground surface by an air-powered horizontal ram (Liu, *et al.*, 1988) striking an anvil at either end of an aluminum channel 2.3 meters long. The ram was driven first in one direction and then in the other to generate pulses of opposite polarity. A switch attached to the shear source triggered the recorder and established the reference for the timing of arrivals. *P*-waves were generated by striking a steel plate with a sledge hammer. The recorder was triggered by a switch attached to the handle of the sledge hammer. *P*- and *S*-wave sources were offset from the borehole (same horizontal distance but different locations) to minimize the effect of waves traveling down the grout surrounding the casing. The source offsets varied from 2 to 4 meters depending on available space and depth of the borehole. Shallow holes (30 meters or less) were offset 2 or 3 meters.

Downhole measurements were made at 2.5-meter intervals at ten locations and at 2-meter spacing at three of the shallower boreholes. The measurements were made by moving a three-component geophone to each depth and clamping it to the casing by an electrically-activated lever arm. A second three-component geophone was placed on the surface near the shear source used to verify timing of the triggered recorder. The data were recorded on diskettes using a 12-channel recording system.

VELOCITY PROFILES

The procedure for determining velocities is summarized in Figure 2. Because the orientation of the downhole geophone could not be controlled when moving from one depth to the next, the azimuth of the horizontal geophones relative to the source was unknown and changed with depth. To minimize the effects of those changes, the horizontal components were rotated to the direction that maximized the integral square amplitude within a time interval containing the shear wave (Boatwright *et al.*, 1986). *P*- and *S*-wave first-arrival times were determined from the time series displayed at each depth on a 20-inch computer screen. The *P*-wave arrival-time was obtained from the vertical trace, and the *S*-wave arrival-times were obtained from the average of the rotated horizontal traces for ram strikes in opposite directions. The arrivals were timed to the nearest millisecond, probably a realistic precision for clear arrivals uncontaminated by noise.

A trial set of layer boundaries was chosen for the *S*-wave model, based on the lithologic descriptions and geophysical logs at the two sites (CBP, SB1) where geologic information was available. At five sites (CGM, CPS, EXC, STP, WLB) simplified lithology, determined from drill cuttings, was used to supplement the velocity determinations. At the remaining six sites (NAR, HOO, LIN, OLV, SAG, SWA) the velocity models were determined without the benefit of lithology or electric logs. The travel-time data were fit in a least-squares sense by a model made up of constant velocity layers, taking into account refraction across the interfaces between layers. The travel times were weighted by the inverse of an assigned normalized variance. A normalized standard deviation of 1 was assigned to the clear arrivals and values up to 5 were assigned to the others. The residuals were examined, and layer boundaries were added, if necessary, to reduce large residuals or to remove systematic trends in the residuals. The *P*-wave travel time data were analyzed initially with the set of layer boundaries finally determined for the *S*-wave data. Layer boundaries were then added if needed to fit the data and deleted if not needed. Commonly, an additional layer

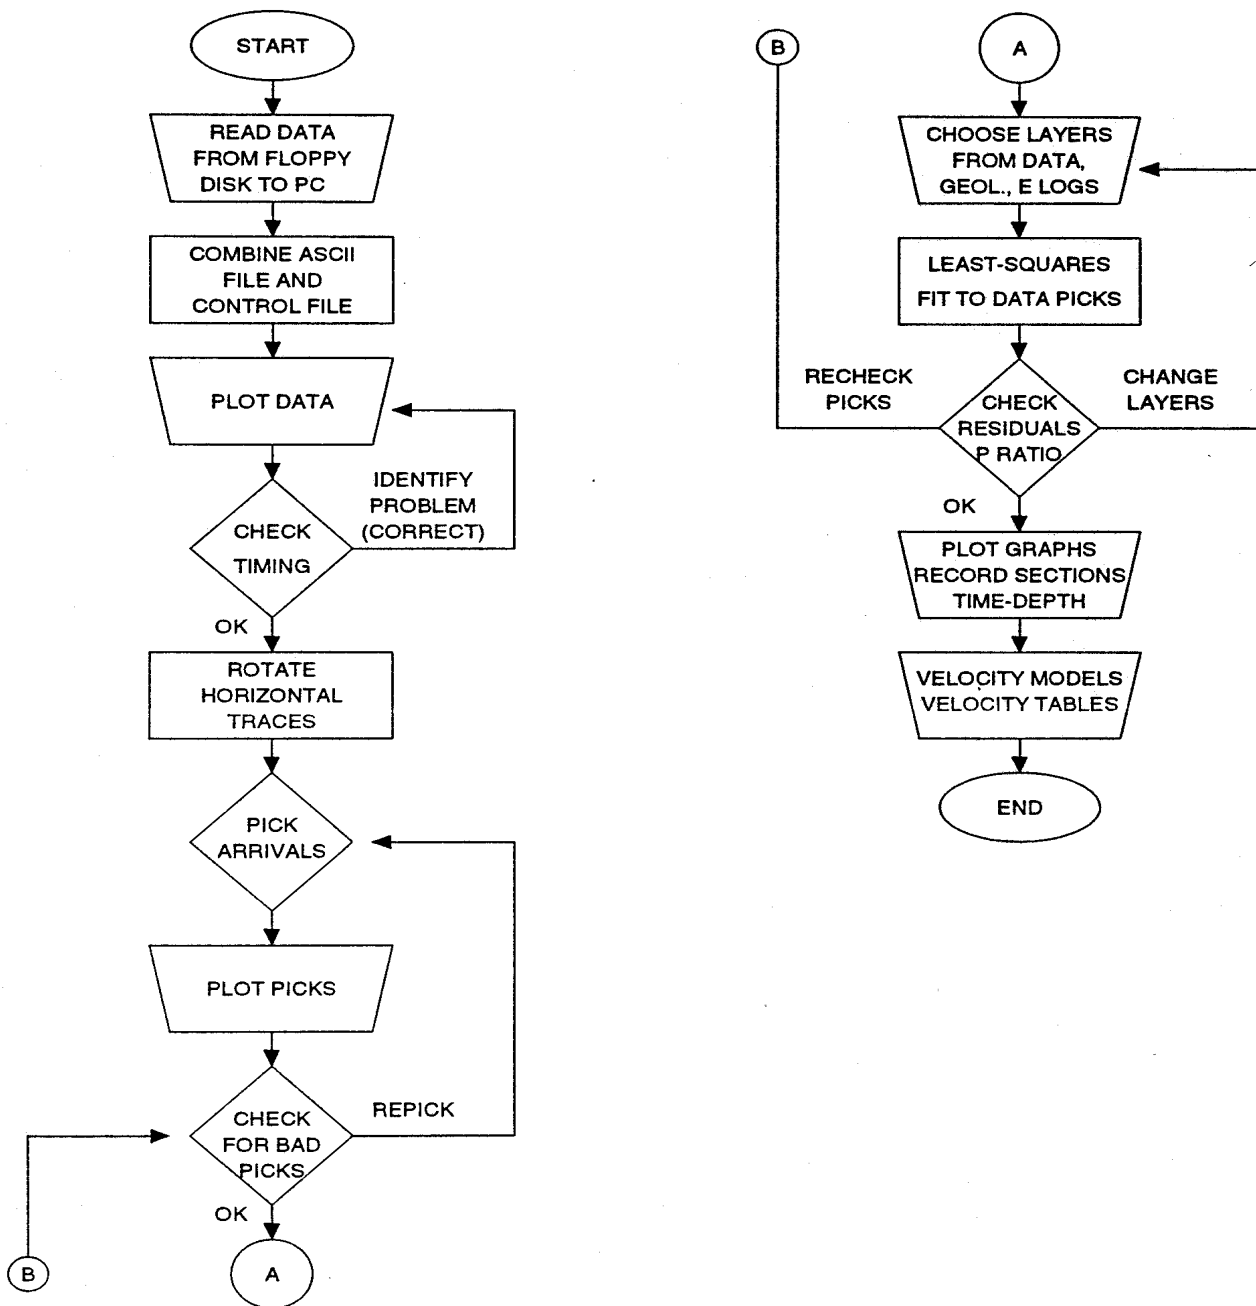


Figure 2. Flow-chart outlining the data processing and steps in the interpretation.

boundary corresponding to the top of the zone of water saturation was needed to fit the *P*-wave data.

Some of the dynamic Poisson's ratios σ , calculated with initial velocity models, resulted in ratios that were out of the accepted range of values (0.0–0.5). To obtain a value in the acceptable range we made minor adjustments to the velocities using one or more of the following procedures: repicking shallow arrivals (usually P arrivals because small changes in P travel-times have greater effect on σ), adding a shallow layer, and/or adjusting layer thickness to ensure that Poisson's ratio was in the range 0.0–0.5. In most cases the small changes were made in the P-wave velocities at shallow depths (for more details see, Gibbs, et al., 1999). Overall, the changes in velocity required to produce acceptable values of σ were small and were only in a few layers.

For example, at San Bernardino Fire Station several velocity models were tried to get Poisson's ratio into the accepted range. We were forced to average the P-wave velocity over the top 8.5 meters to get the ratio from a negative value to a value of 0.04. The preferred model in which the S-velocity follows the lithology (in general, the S-wave velocity is a better indicator of lithology than P-wave velocity) is included in Appendix A.

SUMMARY VELOCITY PROFILES

Figures 3-5 show the *S*-wave velocity profiles determined from the borehole measurements at the thirteen sites. The velocity profiles are plotted at the same scale for ease of comparison. Figures 6-8 show the *P*-wave velocity profiles for the same sites as Figures 3-5, respectively.

DESCRIPTION OF APPENDICES

Appendix A contains for each site: a location map, *S*- and *P*-wave time-series records, a time-depth plot, and tables giving arrival times and velocity values. The upper and lower bounds on the velocity plots show approximate 68 percent confidence limits. The bounds are not symmetrical because they are based on the inverse velocities in the layers. Appendix B contains tables of P- and S-wave velocity models and the Poisson's ratios obtained from those models.

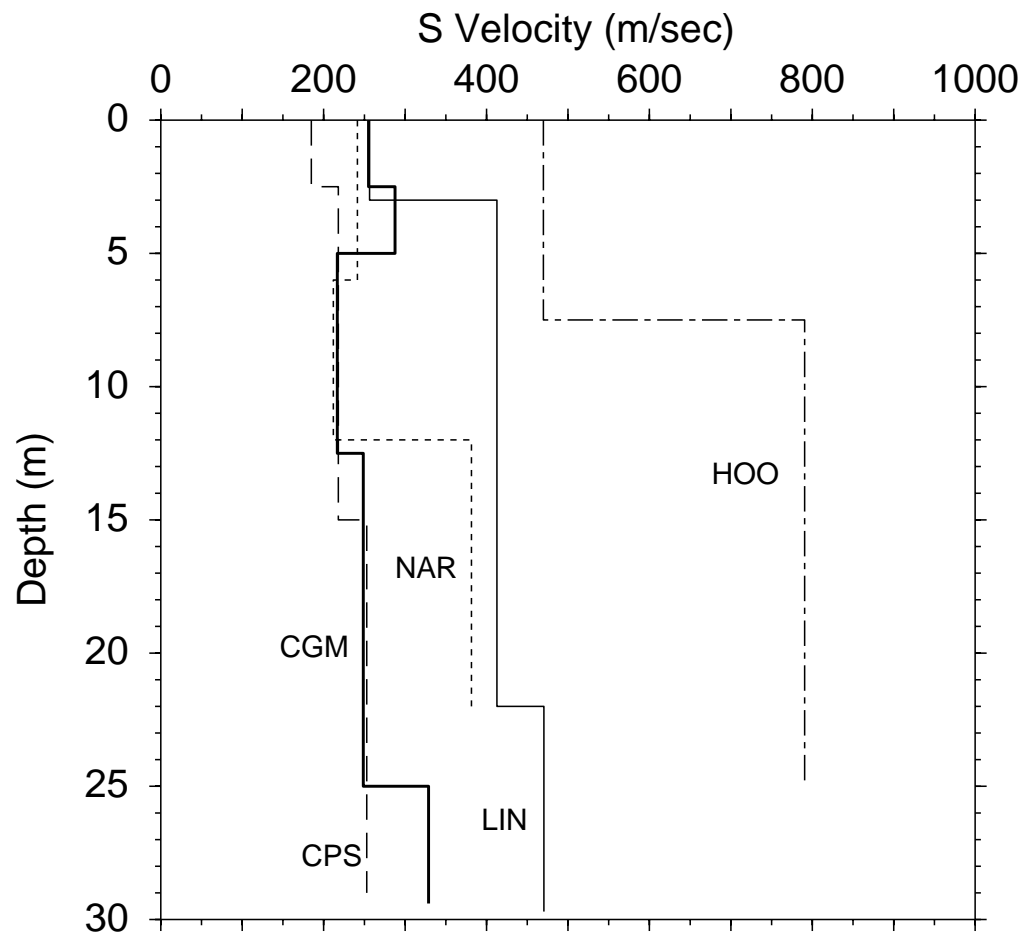


Figure 3. S-wave velocity models shown on the same figure for comparison.

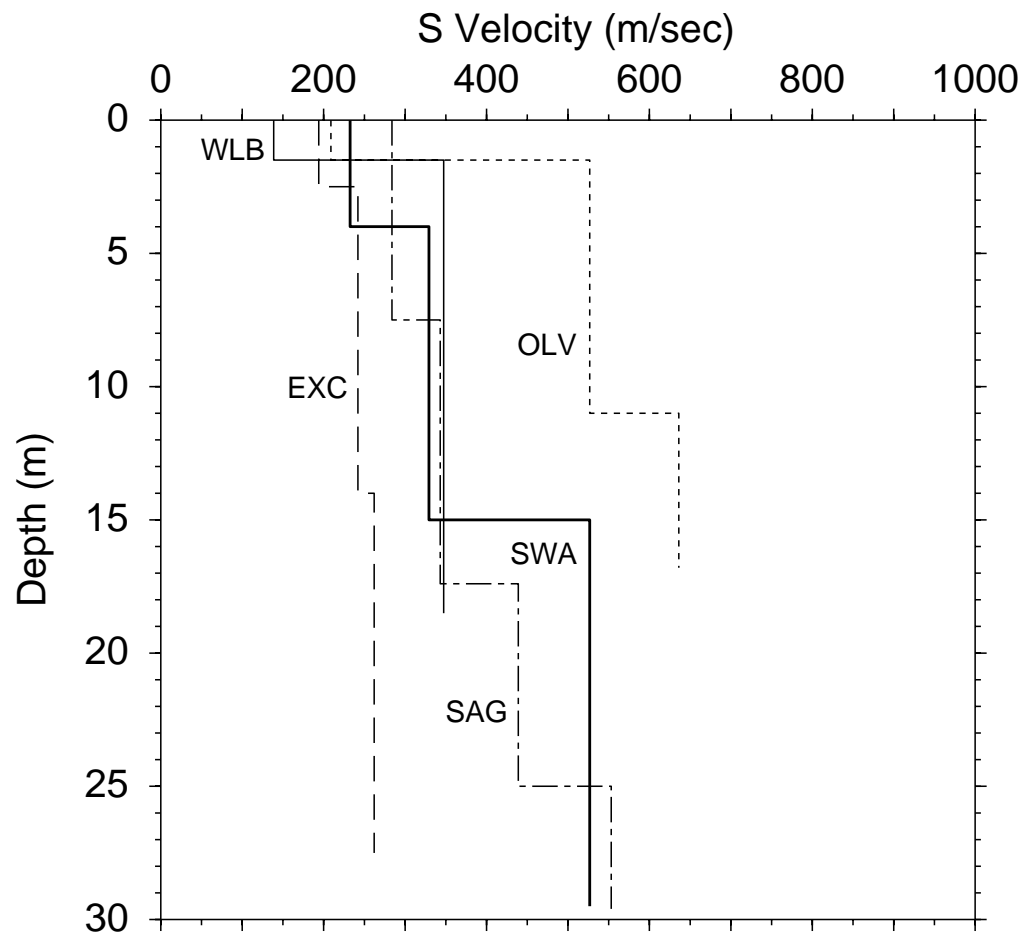


Figure 4. S-wave velocity models shown on the same figure for comparison.

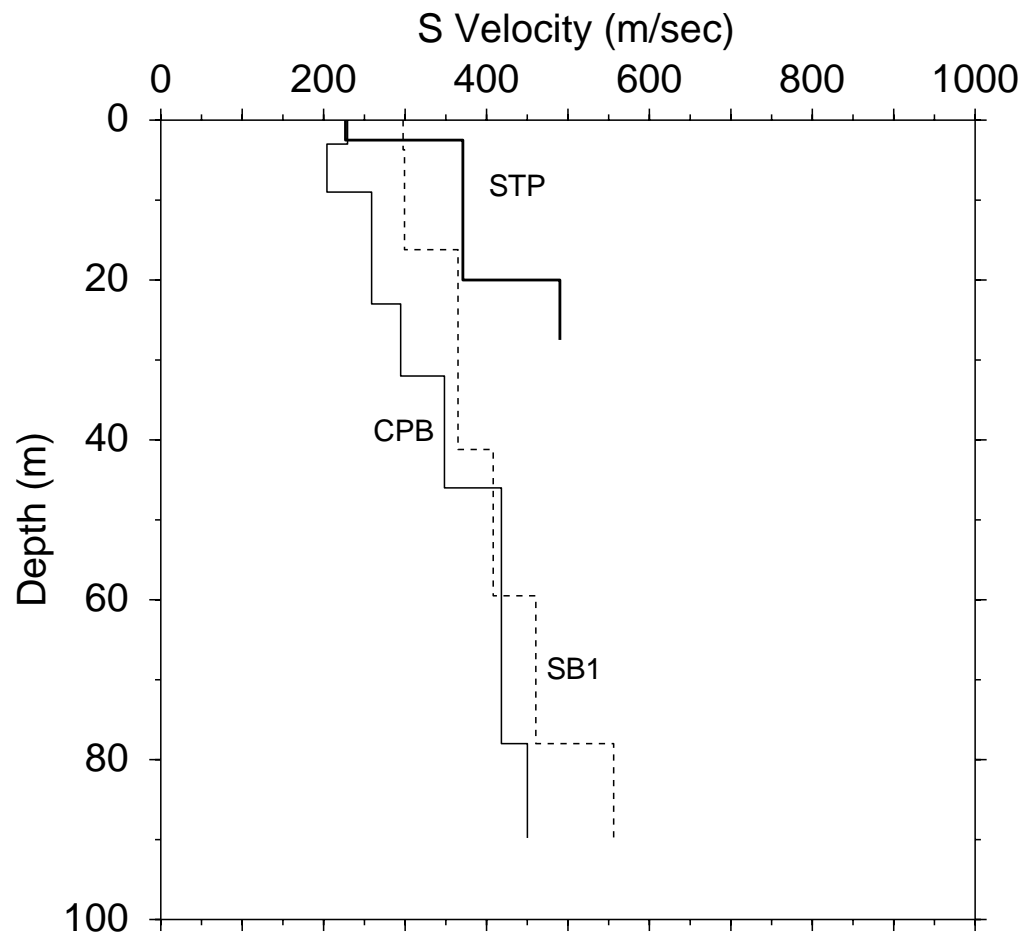


Figure 5. S-wave velocity models shown on same figure for comparison.

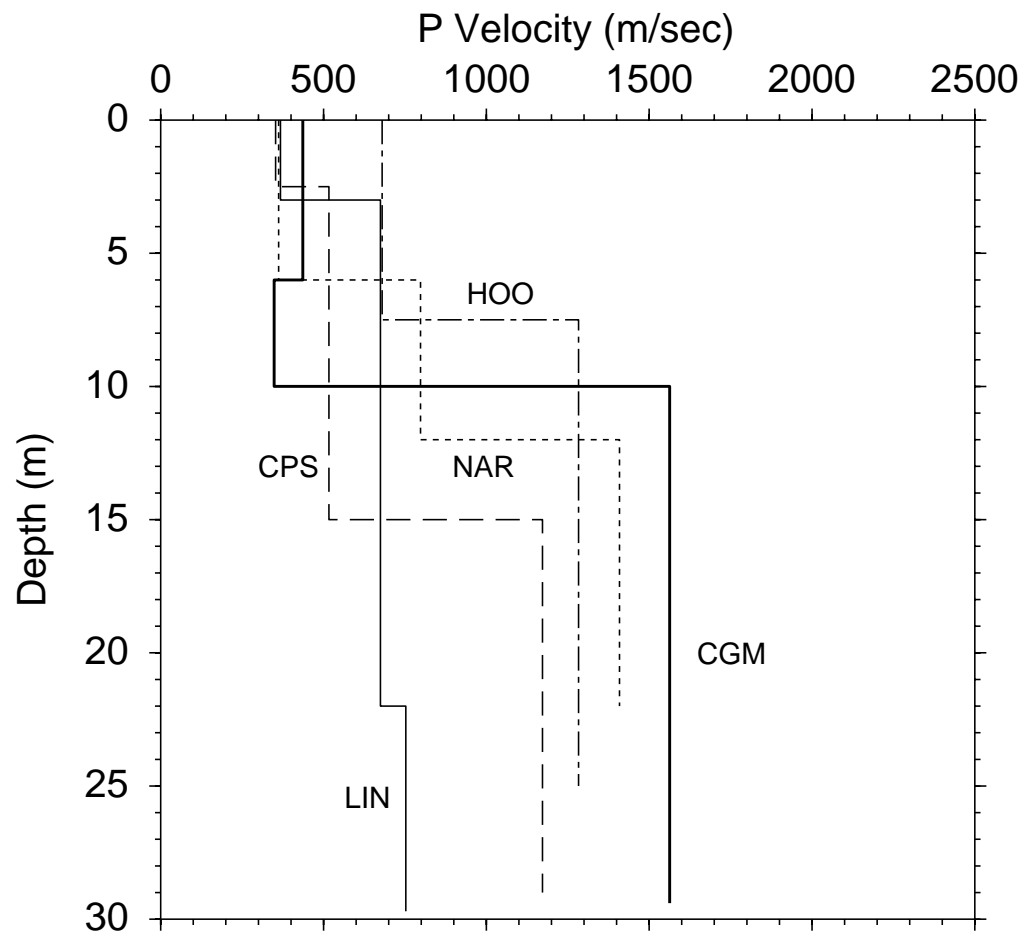


Figure 6. P-wave velocity models shown on the same figure for comparison.

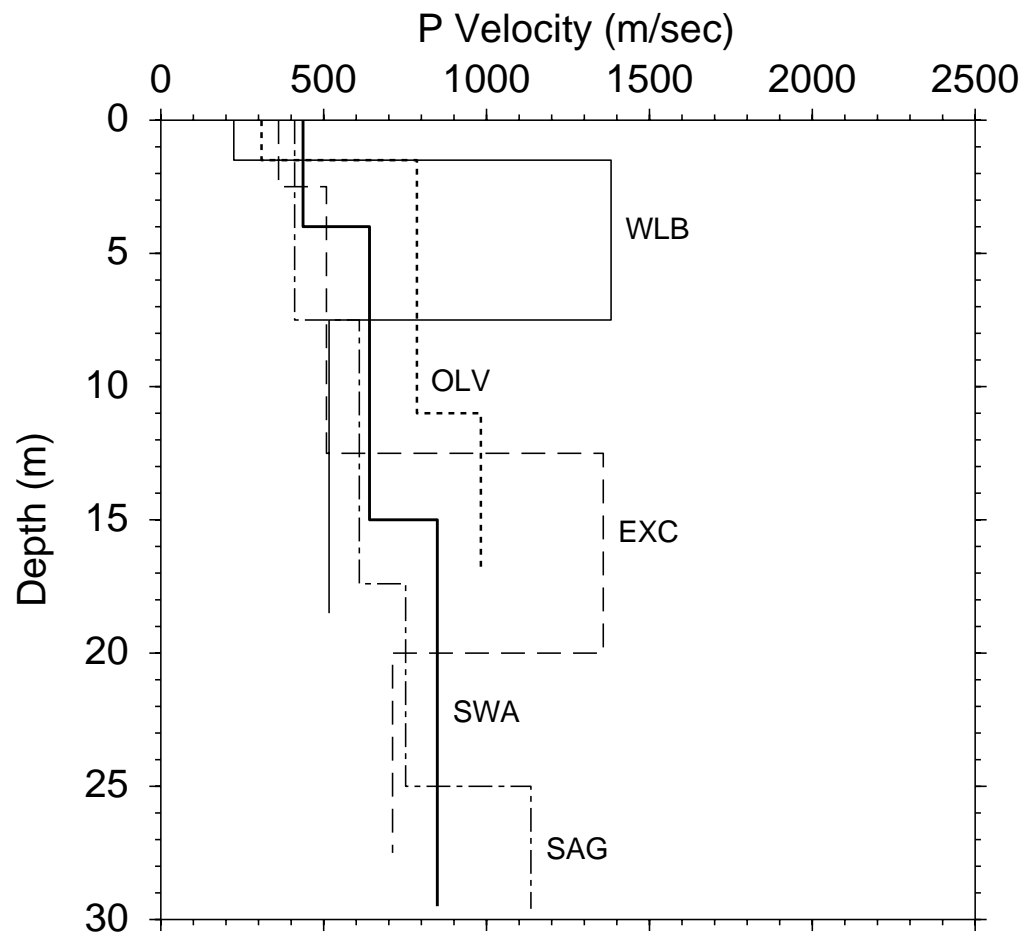


Figure 7. P-wave velocity models shown on the same figure for comparison.

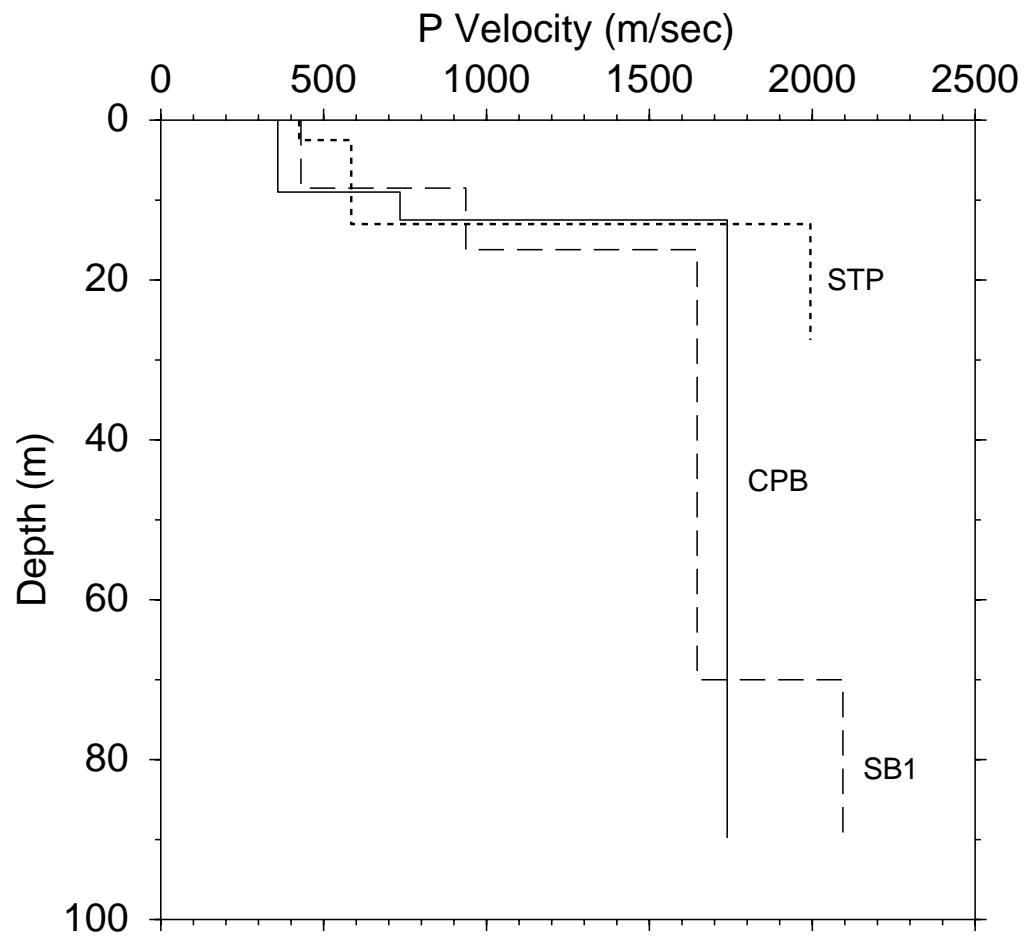


Figure 8. P-wave velocity models shown on the same figure for comparison.

ACKNOWLEDGMENTS

We could not have completed these studies without the assistance of many individuals who helped us to gain access to the sites, assisted with utilities clearances and granted permission to conduct the studies. These people include Michael Sebak at Cerritos College; Warren Thomas at Corps of Engineers Station; Margie Leon and Ray Rodriguez at Hoover School; Jack Feldman at Lincoln School; Stephen Finkle at Lincoln School Whittier; Mr. Hengler at Los Alisos Adult School; Daniel at Olive Junior High School; Richard McGreevy at San Bernardino Fire Station; Dave Cuellar, Terry Moeller, and Tom Dittmar at Santa Anita Golf Course; Charles Craig at South Western Academy; Father Robert Gallagher at St. Paul High School. We also thank Allen Foss of the U.S. Geological Survey for his help with the P- and S-wave logging.

REFERENCES

- Boatwright, John, Porcella, R., Fumal, T., Liu, Hsi-Ping, (1986), Direct estimates of shear wave amplification from a borehole near Coalinga, California: *Earthquake Notes*, v. 57, p. 8.
- Brady, A. G., Etheredge, E. C., and Porcella, R. L. (1988), The Whittier Narrows, California Earthquake of October 1, 1987, Preliminary assessment of strong ground motion records: *Earthquake Spectra*, v.4, no.1, p. 55-74.
- Gibbs, James F., Tinsley, John C., Boore, David M., and Joyner, William B., 1999, Seismic velocities and geological conditions at twelve sites subjected to strong ground motion in the 1994 Northridge, California, earthquake: a revision of OFR 96-740, U.S. Geological Survey, Open-File Report 99-446, 142p.
- Gibbs, James F., Tinsley, John C., Boore, David M., and Joyner, William B., 2000, Borehole velocity measurements and geological conditions at thirteen sites in the Los Angeles, California region: U.S. Geological Survey, Open-File Report OF 00-470, 118p.
- Liu, Hsi-Ping, Warrick, Richard E., Westerlund, Robert E., Fletcher, Jon B. and Maxwell, Gary L., 1988, An air-powered impulsive shear-wave source with repeatable signals: *Bull. Seism. Soc. Am.* v. 78, p. 355-369.
- Mueller, C., Dietel, C., Glassmoyer, G., Noce, T., Sembera, E., Spudich, P., and Watson, J., Digital Recordings of Aftershocks of the 1 October 1987 Whittier Narrows, California, Earthquake: U.S. Geological Survey, Open-File Report 88-688, 40p.
- Rogers, A., Mueller, C., Tinsley, J., and Koesterer, C., (1998), Instrumentation and geotechnical characteristics at two vertical strong motion arrays at Cerritos College, Norwalk, and downtown San Bernardino, California: U.S. Geological Survey, Open-File Report 98-346, 58p.
- Shakal, A., Huang, M. J., and Cao, T. Q. (1988), The Whittier Narrows, California Earthquake of October 1, 1987, CSMIP strong motion data: *Earthquake spectra*, v.4, no.1, p. 75-100.

APPENDIX—A
Detailed Results



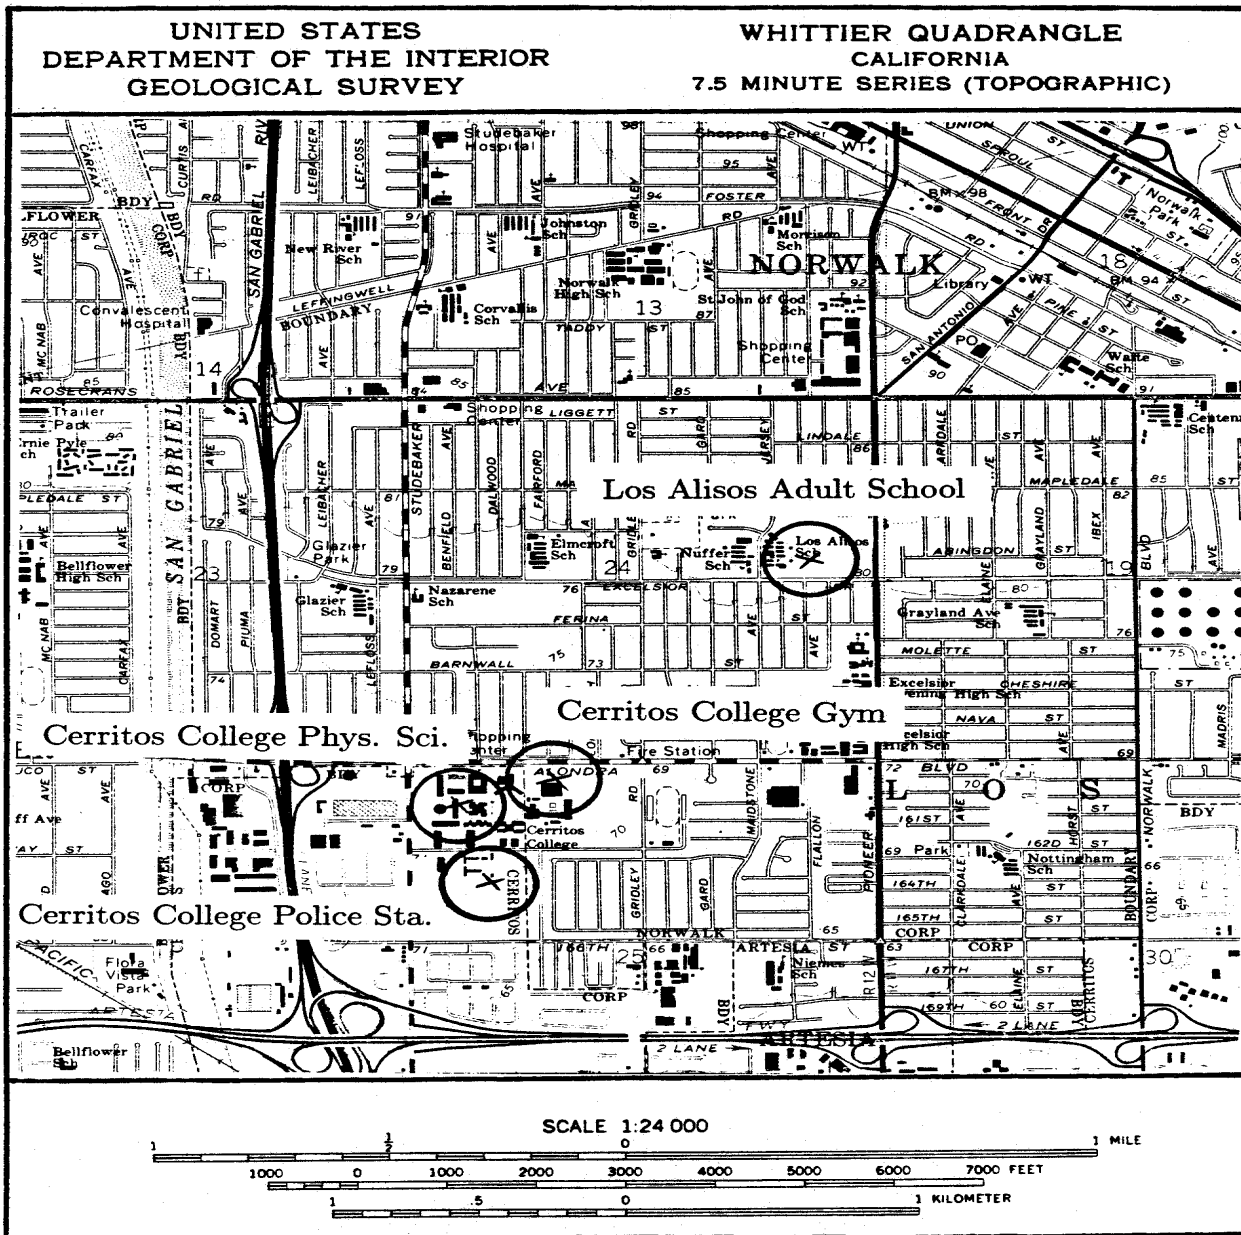


Figure A-1. Site location map for the borehole at Cerritos College Gymnasium.

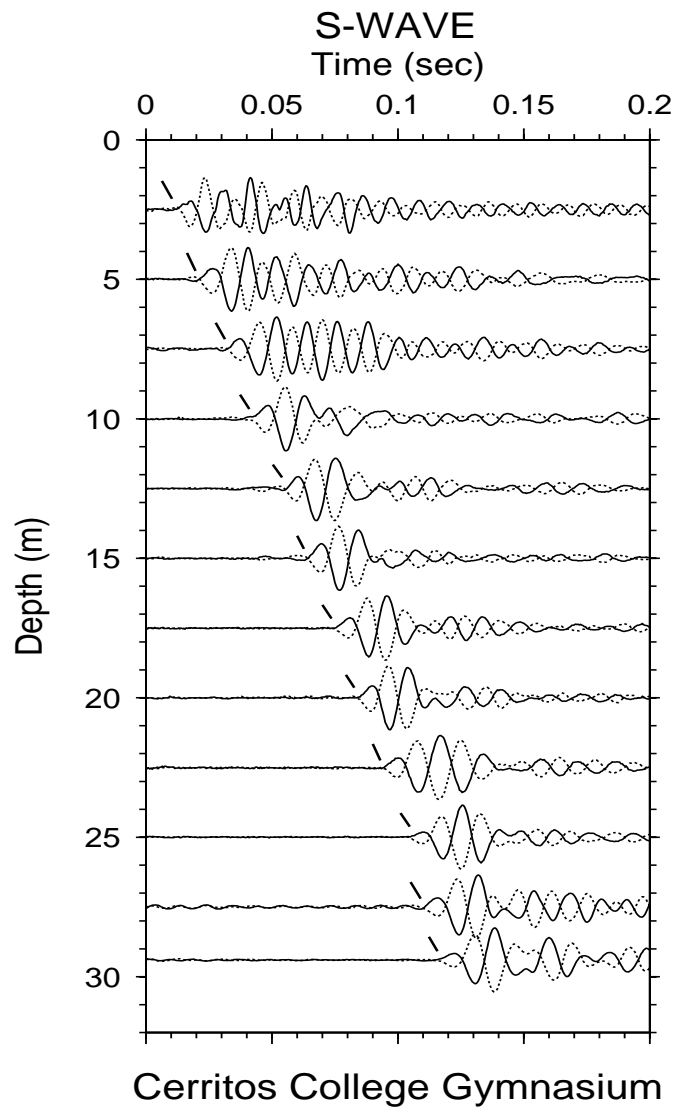

Oct 23, 2001
 F:\CGM\CGMT.DT
 F:\CGM\CGMT2.GRA

Figure A-2. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

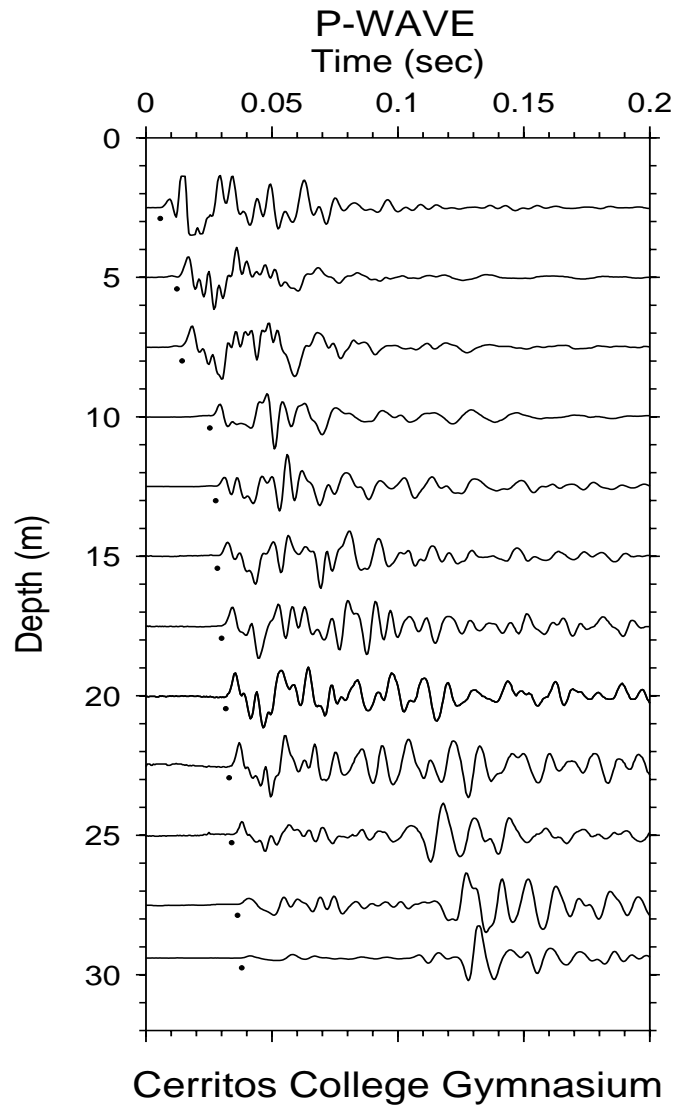

Oct 23, 2001
 F:\CGM\CGMPWAVE.DT
 F:\CGM\CGMPWAVE.GRA

Figure A-3. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

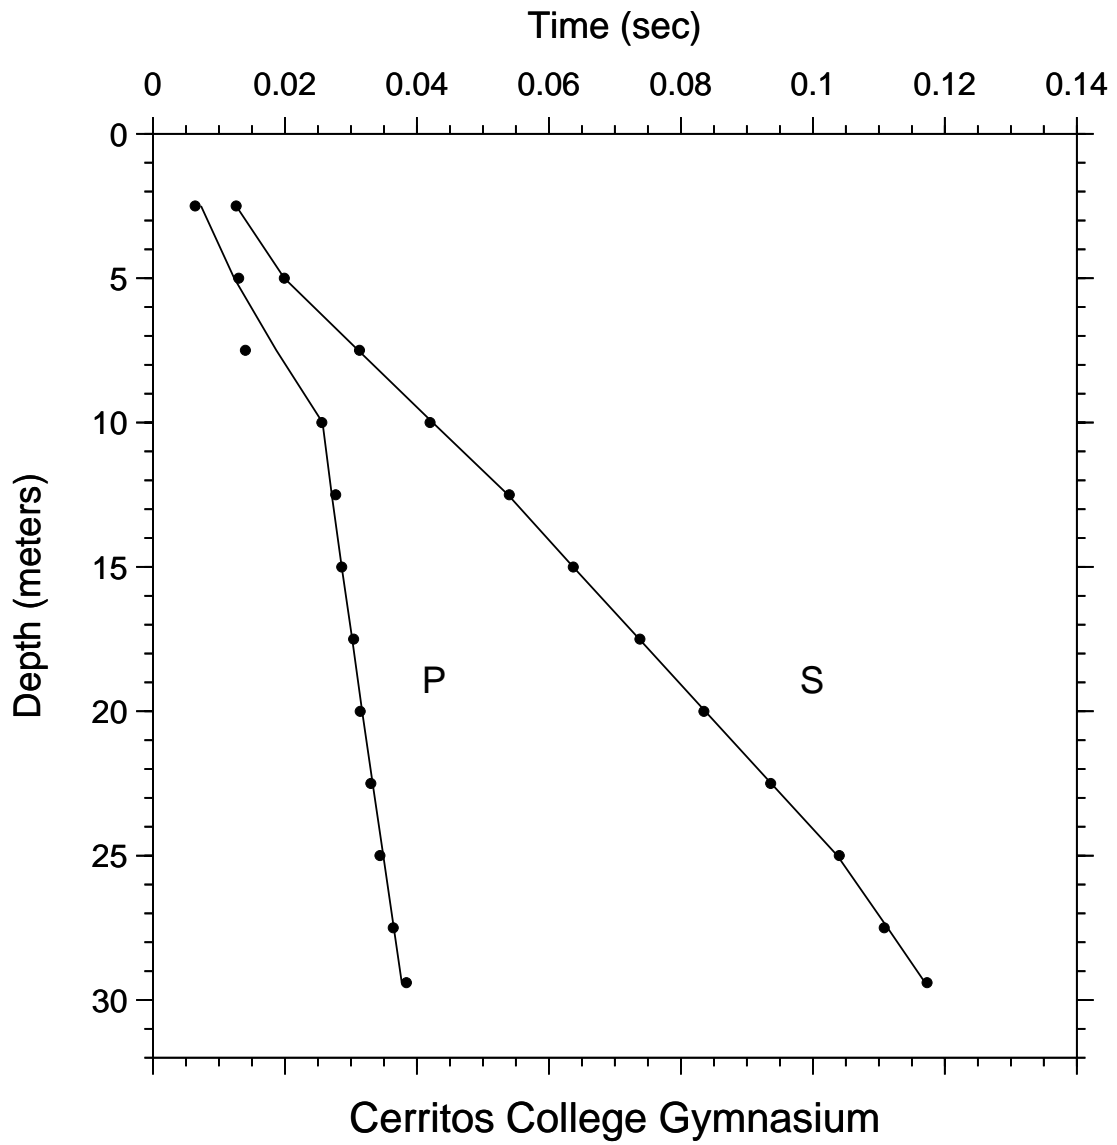


Figure A-4. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

Cerritos College Gymnasium

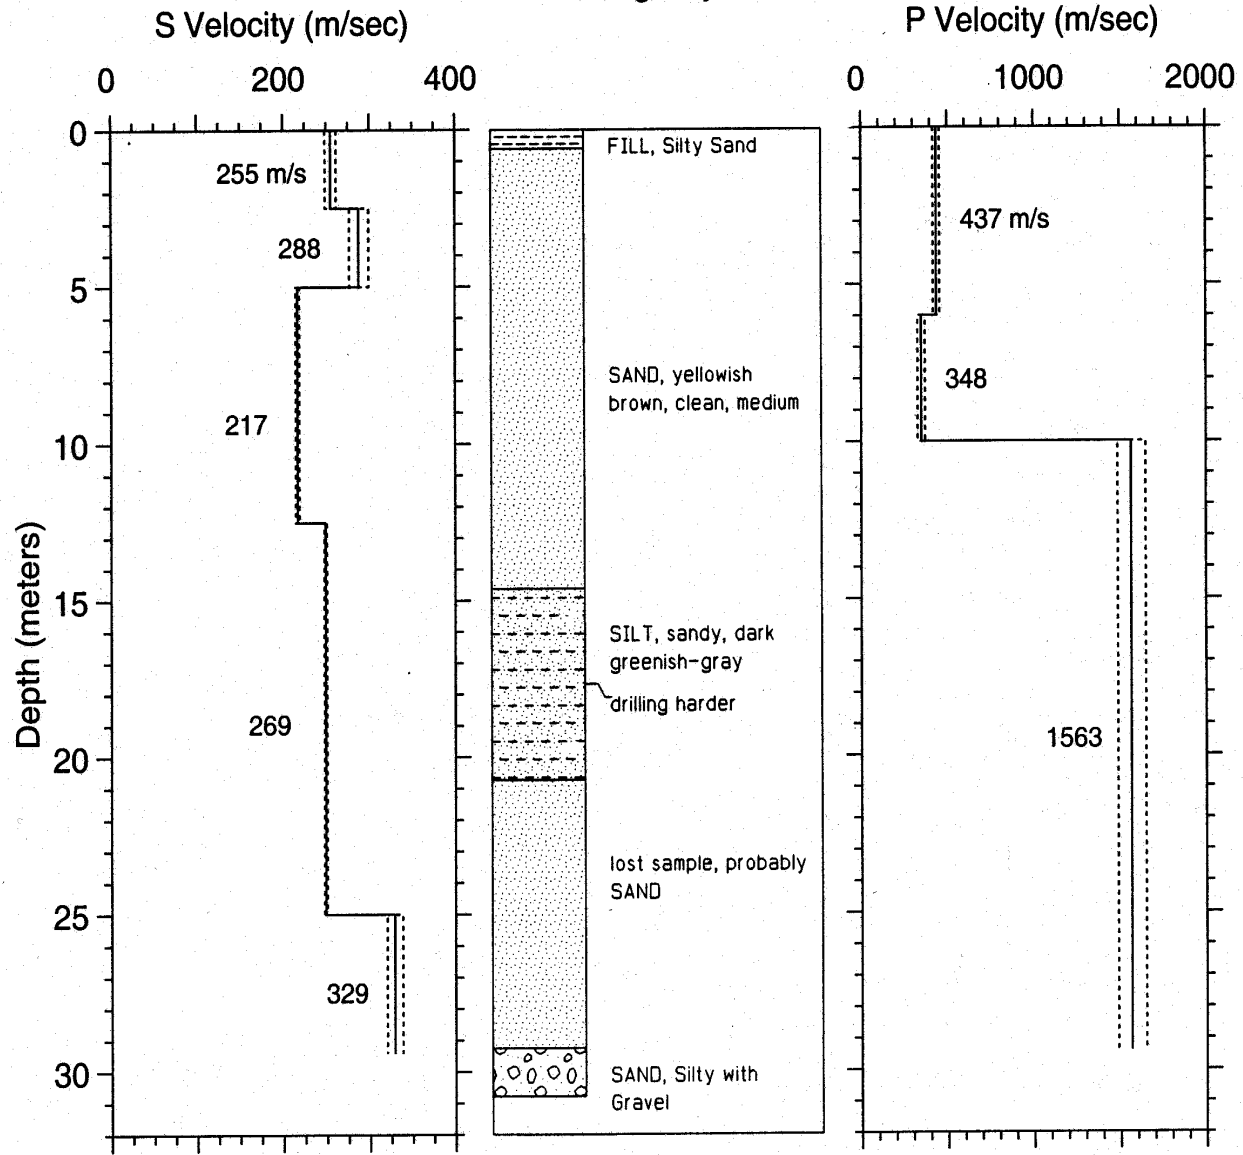


Figure A-5. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

ABLE A-1. S-wave arrival times and velocity summaries.

Location: Cerritos College Gymnasium: S Coordinates: 33.88663 -118.09329 Hole_Code: 296
 hoffset = 2.00 travel-time file: F:\CGM\CGMS.TT

nlayers = 5

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0126	0.0098	255	1	0.0000	2.5	2.5	255	249	262	8.2	8.2	837	817	858
5.0	16.4	0.0199	0.0185	270	1	0.0000	5.0	2.5	288	277	299	16.4	8.2	943	908	981
7.5	24.6	0.0313	0.0300	250	1	0.0002	12.5	7.5	217	215	219	41.0	24.6	711	704	718
10.0	32.8	0.0420	0.0415	241	1	-0.0004	25.0	12.5	249	247	250	82.0	41.0	816	811	822
12.5	41.0	0.0540	0.0530	236	1	0.0002	29.4	4.4	329	320	338	96.5	14.4	1079	1050	1109
15.0	49.2	0.0637	0.0631	238	1	0.0000										
17.5	57.4	0.0738	0.0731	239	1	0.0001										
20.0	65.6	0.0835	0.0832	240	1	-0.0002										
22.5	73.8	0.0936	0.0932	241	1	-0.0001										
25.0	82.0	0.1040	0.1032	242	1	0.0003										
27.5	90.2	0.1108	0.1108	248	1	-0.0005										
29.4	96.5	0.1173	0.1166	252	1	0.0003										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

TABLE A-2. P-wave arrival times and velocity summaries.

Location: Cerritos College Gymnasium: P Coordinates: 33.88663 -118.09329 Hole_Code: 296
 hoffset = 2.00 travel-time file: F:\CGM\CGMP.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0064	0.0057	437	1	-0.0009	6.0	6.0	437	418	456	19.7	19.7	1432	1372	1497
5.0	16.4	0.0130	0.0114	437	1	0.0007	10.0	4.0	348	328	371	32.8	13.1	1142	1075	1219
7.5	24.6	0.0140	0.0180	416	5	-0.0047	29.4	19.4	1563	1486	1648	96.5	63.6	5128	4877	5407
10.0	32.8	0.0256	0.0252	396	1	-0.0001										
12.5	41.0	0.0277	0.0268	466	1	0.0006										
15.0	49.2	0.0286	0.0284	528	1	-0.0001										
17.5	57.4	0.0304	0.0300	583	1	0.0002										
20.0	65.6	0.0314	0.0316	632	1	-0.0004										
22.5	73.8	0.0330	0.0332	677	1	-0.0003										
25.0	82.0	0.0344	0.0348	718	1	-0.0005										
27.5	90.2	0.0364	0.0364	755	1	-0.0001										
29.4	96.5	0.0384	0.0376	781	1	0.0007										

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model
- vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- dtb(m) = depth to bottom of layer in meters
- thk(m) = thickness of layer in meters
- v(m/s) = velocity of layer in meters per second
- vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- vu(m/s) = upper limit of velocity in meters per second
- dtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- v(ft/s) = velocity of layer in feet per second
- vl(ft/s) = lower limit of velocity in feet per second
- vu(ft/s) = upper limit of velocity in feet per second

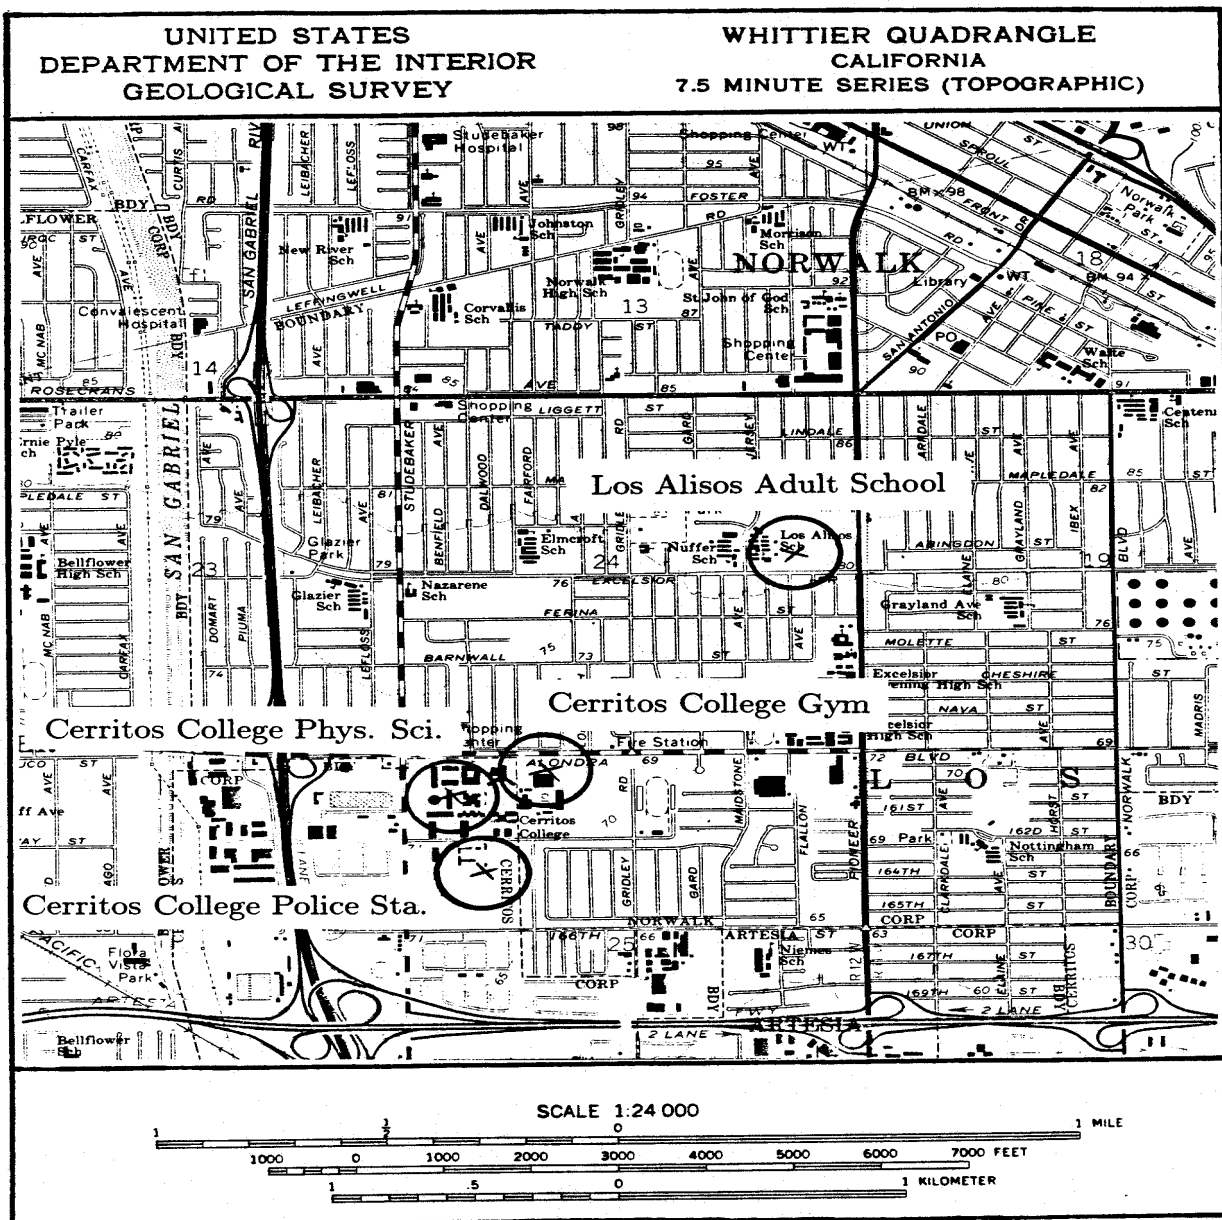


Figure A-6. Site location map for the borehole at Cerritos College Physical Science Building.

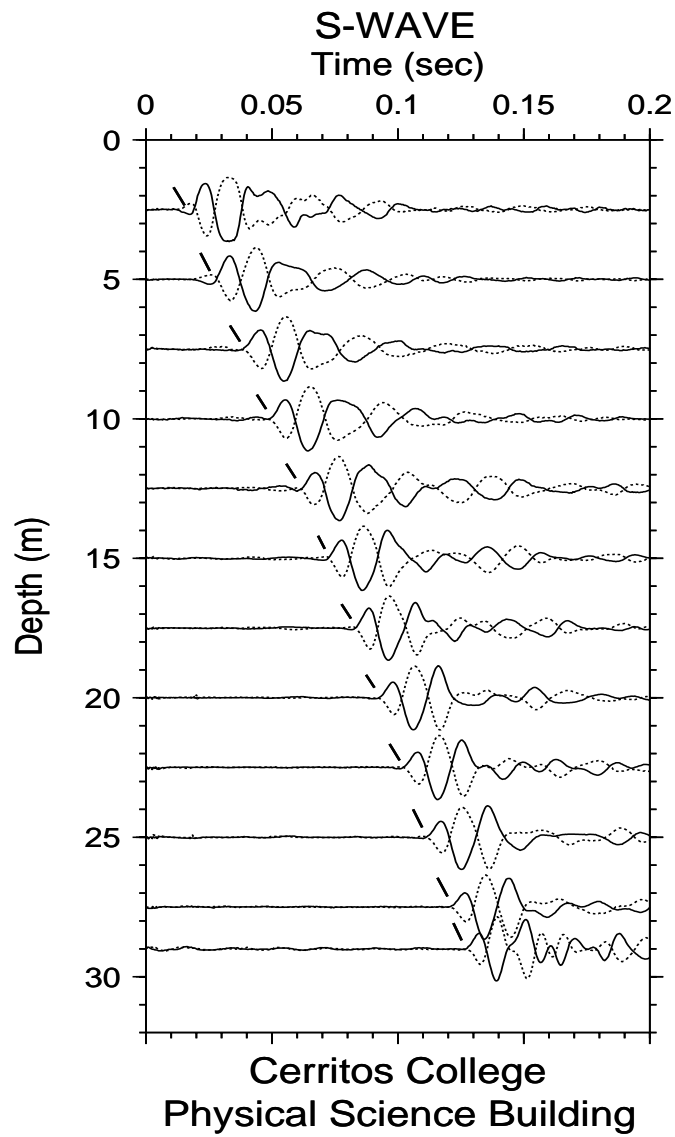


Figure A-7. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

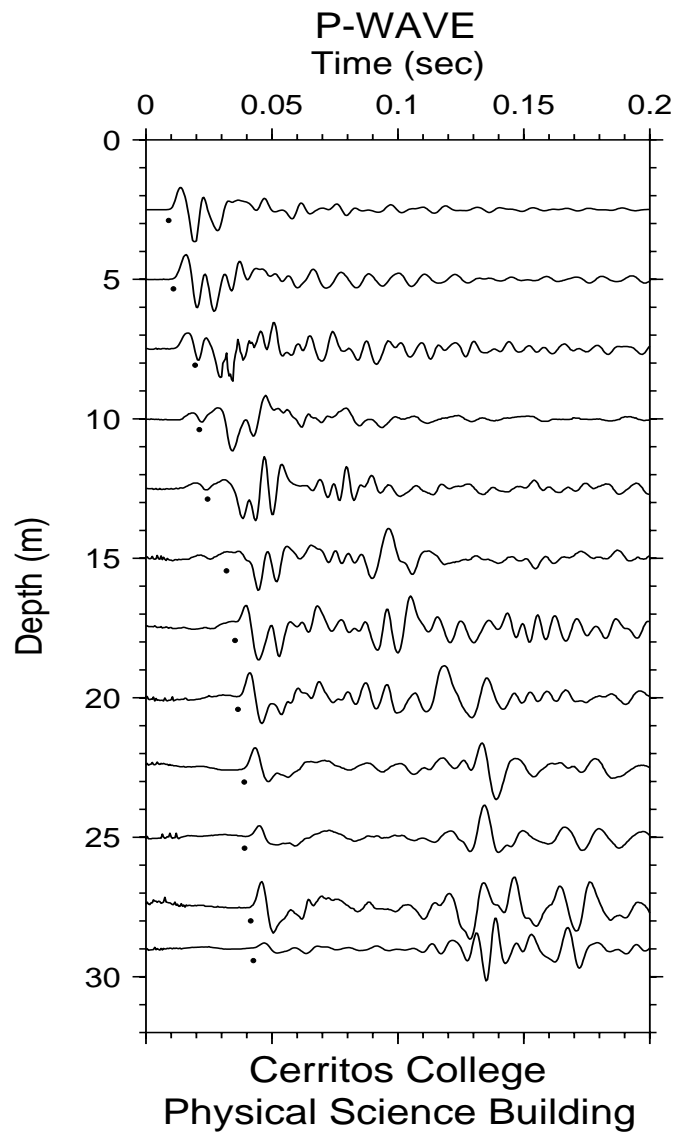


Figure A-8. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

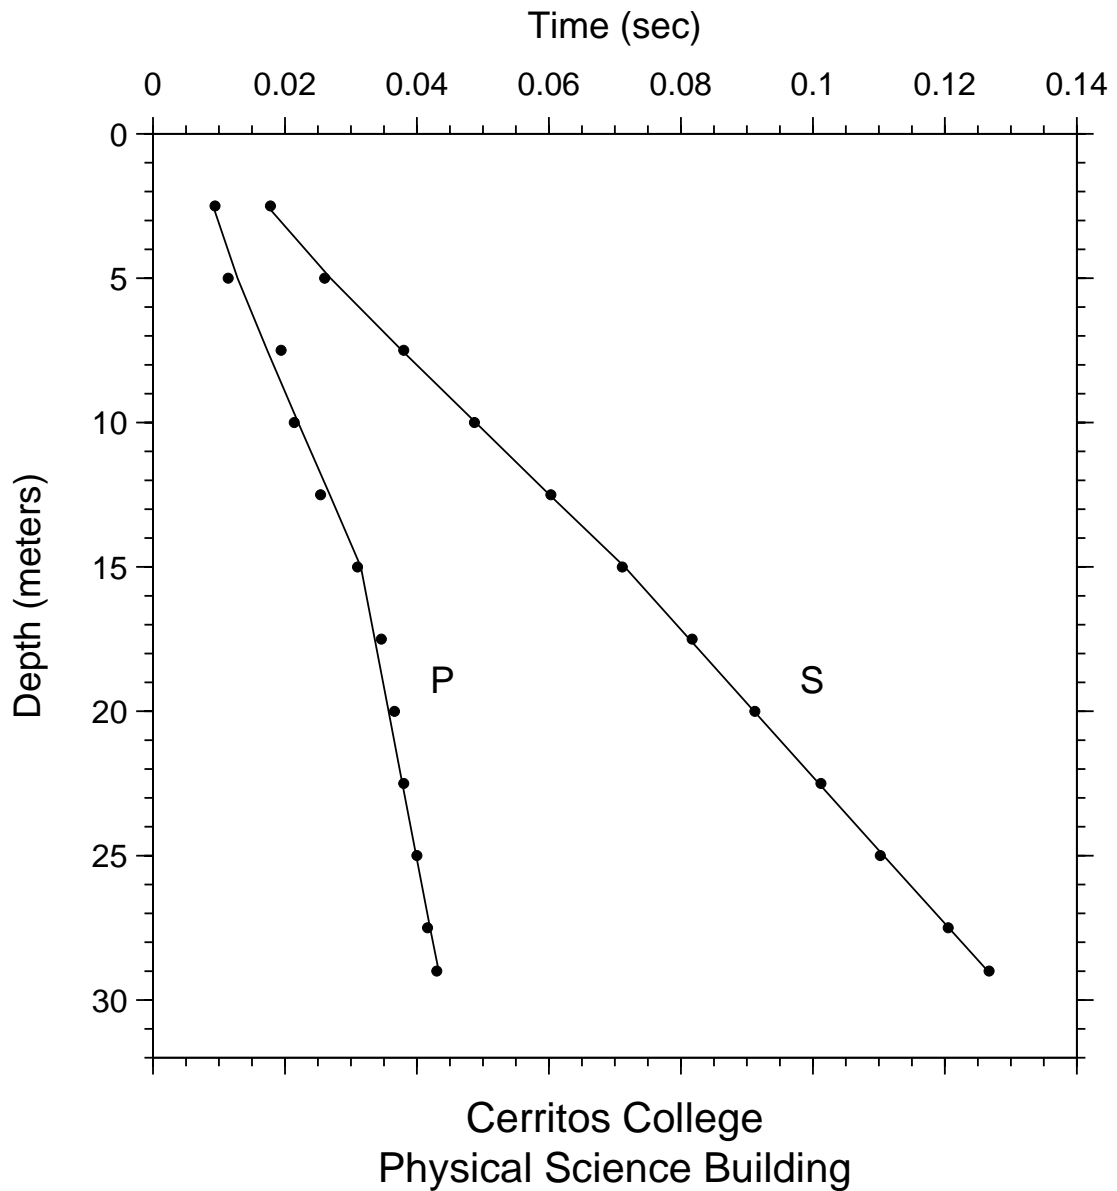


Figure A-9. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

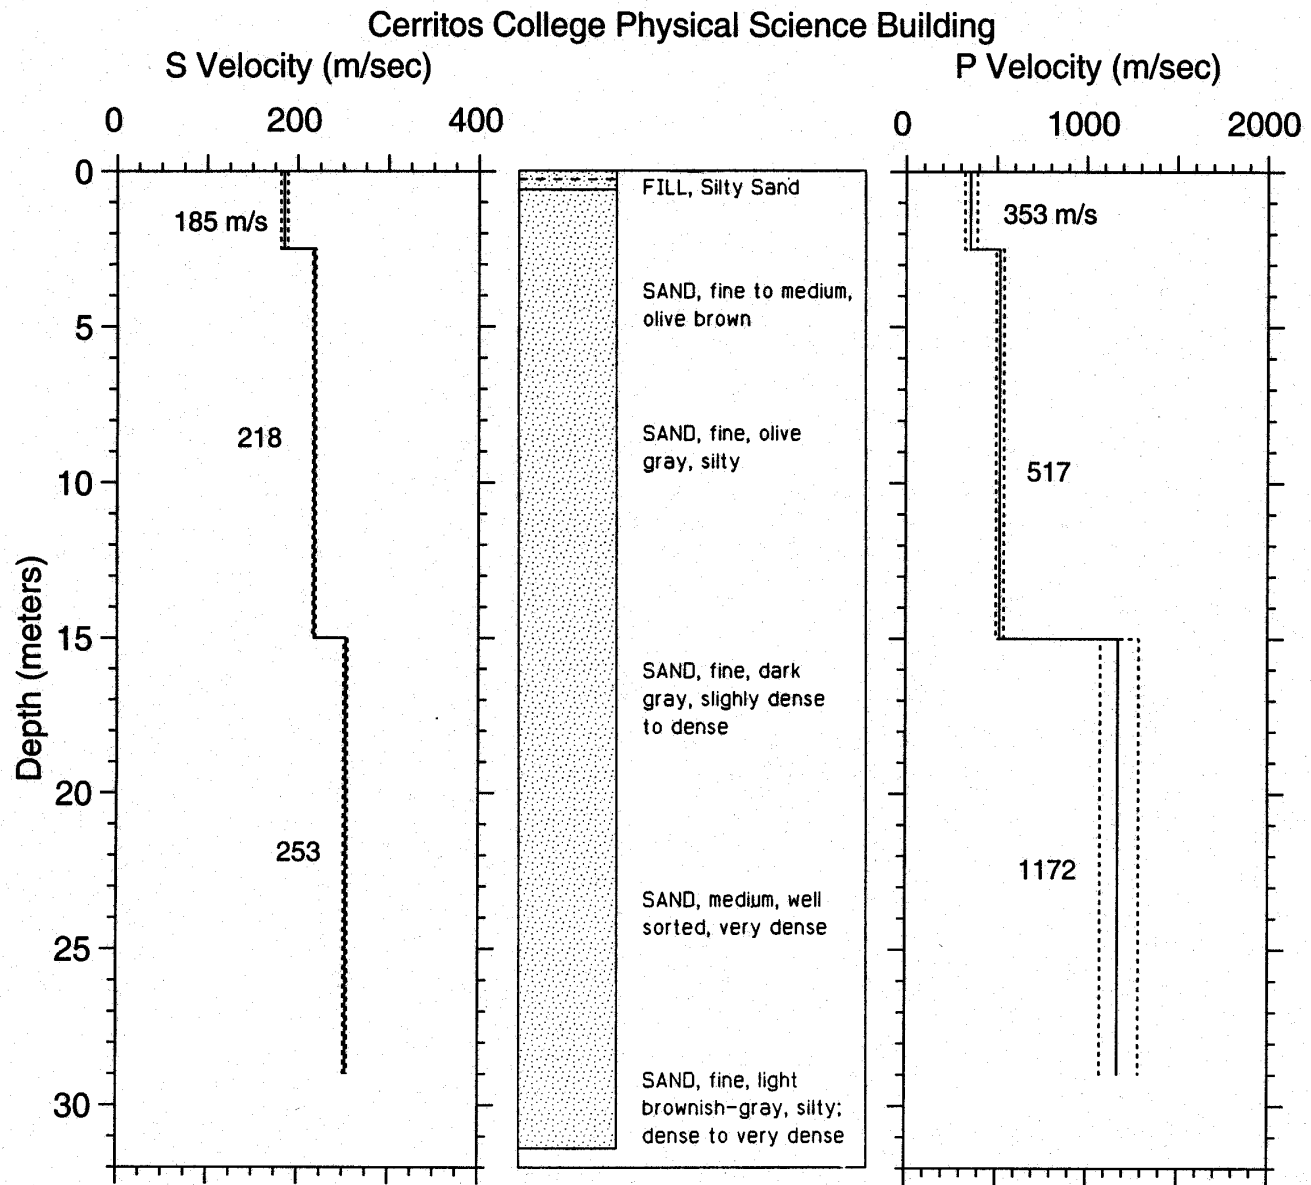


Figure A-10. S- and P-wave velocity profiles with generalized geologic log. Dashed lines represent plus and minus one standard deviation.

ABLE A-3. S-wave arrival times and velocity summaries.

Location: Physical Sciences Building: S Coordinates: 33.88589 -118.09700 Hole_Code: 297
 hoffset = 2.00 travel-time file: F:\CPS\CPSS.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0178	0.0135	185	1	0.0005	2.5	2.5	185	181	189	8.2	8.2	607	594	620
5.0	16.4	0.0260	0.0250	200	1	-0.0009	15.0	12.5	218	216	220	49.2	41.0	715	710	721
7.5	24.6	0.0380	0.0364	206	1	0.0003	29.0	14.0	253	251	255	95.1	45.9	830	823	836
10.0	32.8	0.0487	0.0479	209	1	-0.0002										
12.5	41.0	0.0603	0.0594	210	1	0.0002										
15.0	49.2	0.0711	0.0709	212	1	-0.0004										
17.5	57.4	0.0817	0.0807	217	1	0.0004										
20.0	65.6	0.0912	0.0906	221	1	0.0001										
22.5	73.8	0.1012	0.1005	224	1	0.0003										
25.0	82.0	0.1102	0.1104	226	1	-0.0005										
27.5	90.2	0.1205	0.1203	229	1	-0.0001										
29.0	95.1	0.1267	0.1262	230	1	0.0002										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

ABLE A-4. P-wave arrival times and velocity summaries.

Location: Physical Sciences Building: P Coordinates: 33.88589 -118.09700 Hole_Code: 297
 hoffset = 2.00 travel-time file: F:\CPS\CPS.P.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0094	0.0071	353	1	0.0003	2.5	2.5	353	322	390	8.2	8.2	1158	1057	1280
5.0	16.4	0.0114	0.0119	420	1	-0.0014	15.0	12.5	517	495	540	49.2	41.0	1695	1626	1771
7.5	24.6	0.0194	0.0168	448	1	0.0021	29.0	14.0	1172	1076	1287	95.1	45.9	3845	3530	4223
10.0	32.8	0.0214	0.0216	463	1	-0.0006										
12.5	41.0	0.0254	0.0264	473	1	-0.0014										
15.0	49.2	0.0310	0.0313	480	1	-0.0005										
17.5	57.4	0.0346	0.0334	524	1	0.0010										
20.0	65.6	0.0366	0.0355	563	1	0.0009										
22.5	73.8	0.0380	0.0377	597	1	0.0002										
25.0	82.0	0.0400	0.0398	628	1	0.0001										
27.5	90.2	0.0416	0.0419	656	1	-0.0004										
29.0	95.1	0.0430	0.0432	671	1	-0.0003										

Explanation:
 d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second



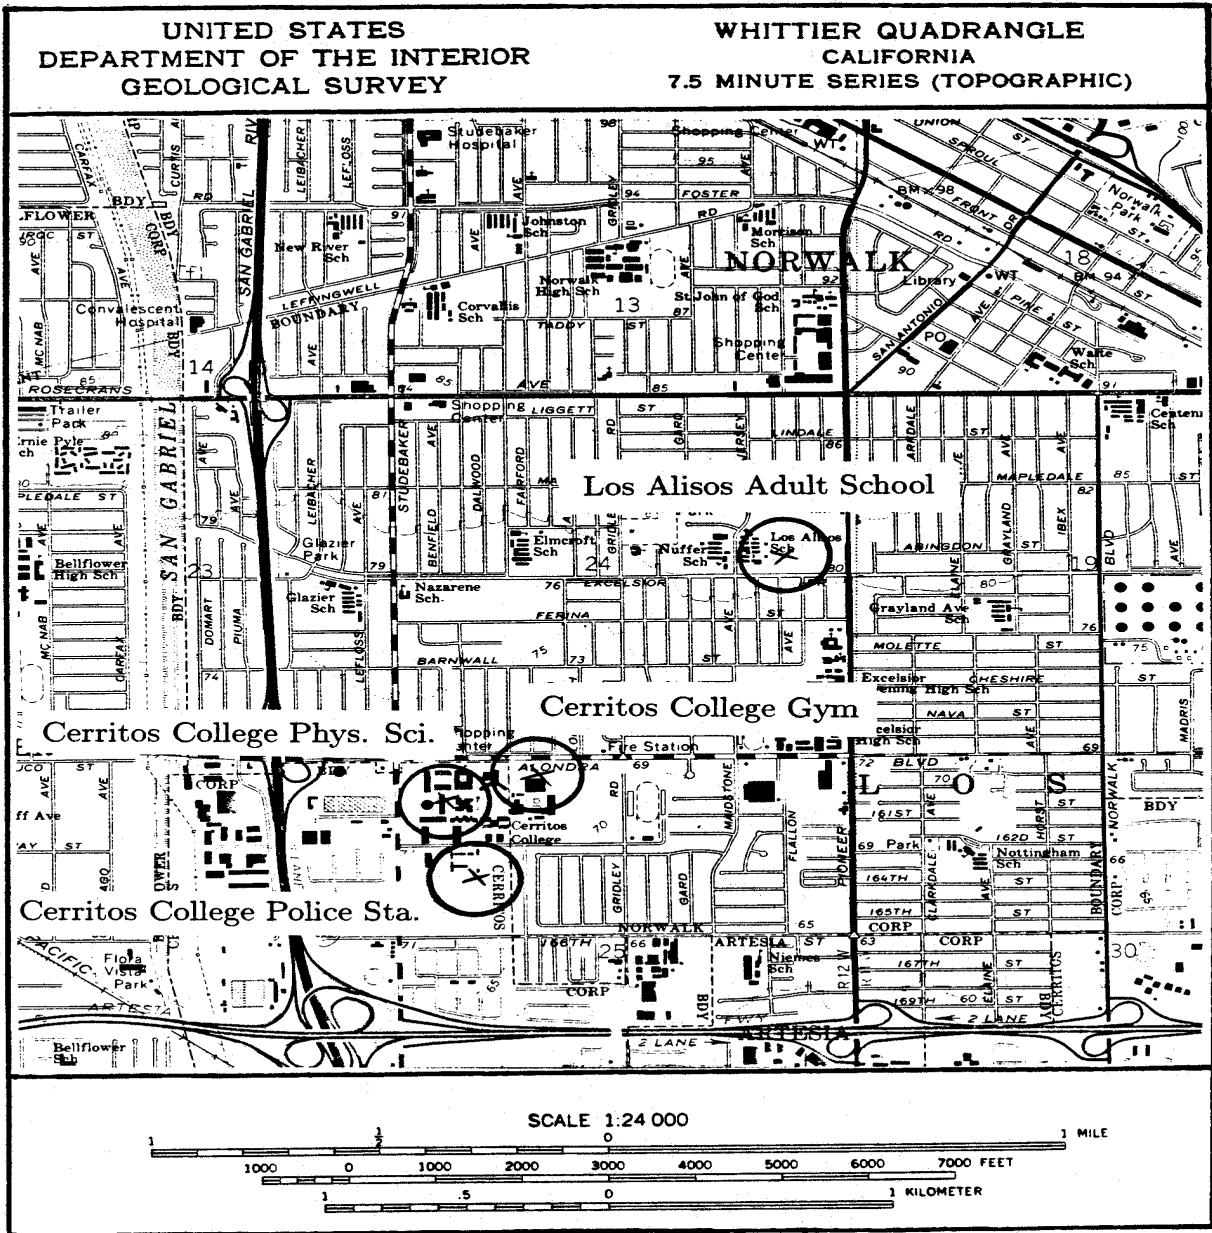


Figure A-11. Site location map for the borehole at Cerritos College Police Building.

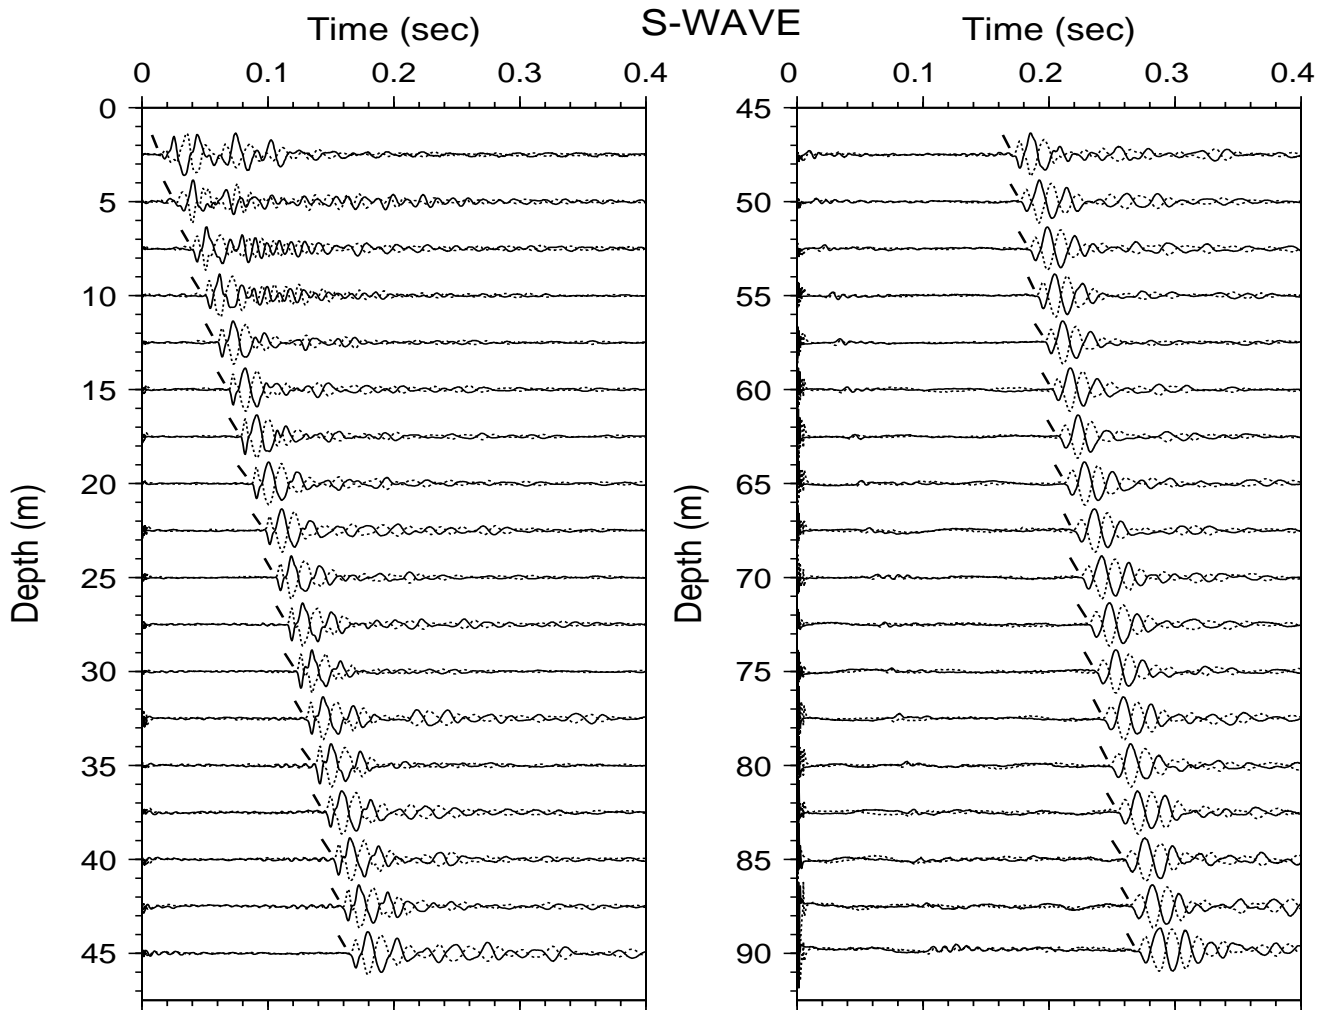

Cerritos College Police Station

Figure A-12. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

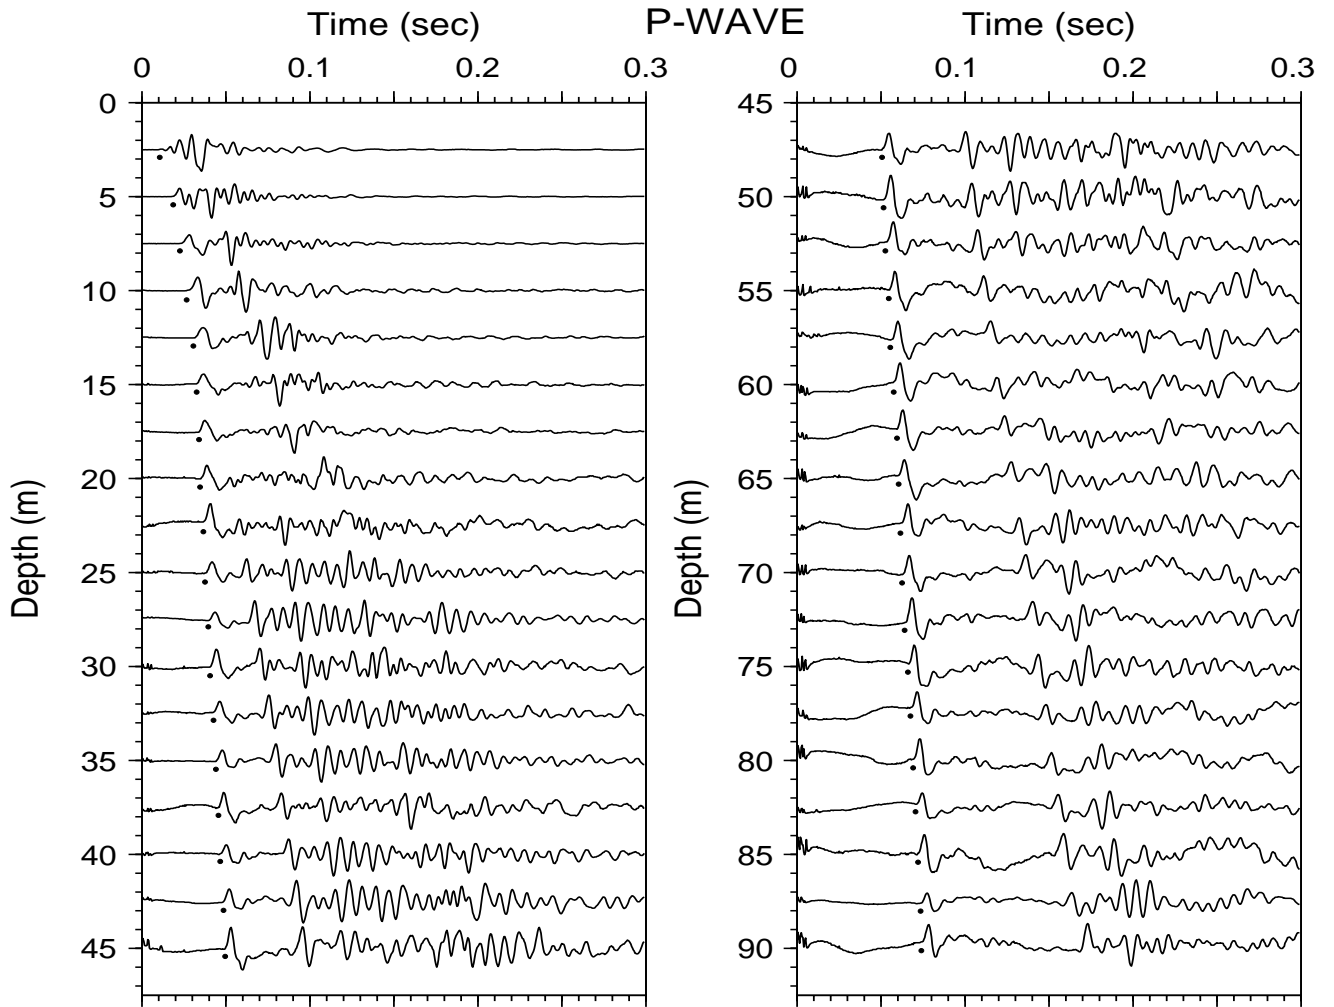

Cerritos College Police Station

Figure A-13. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

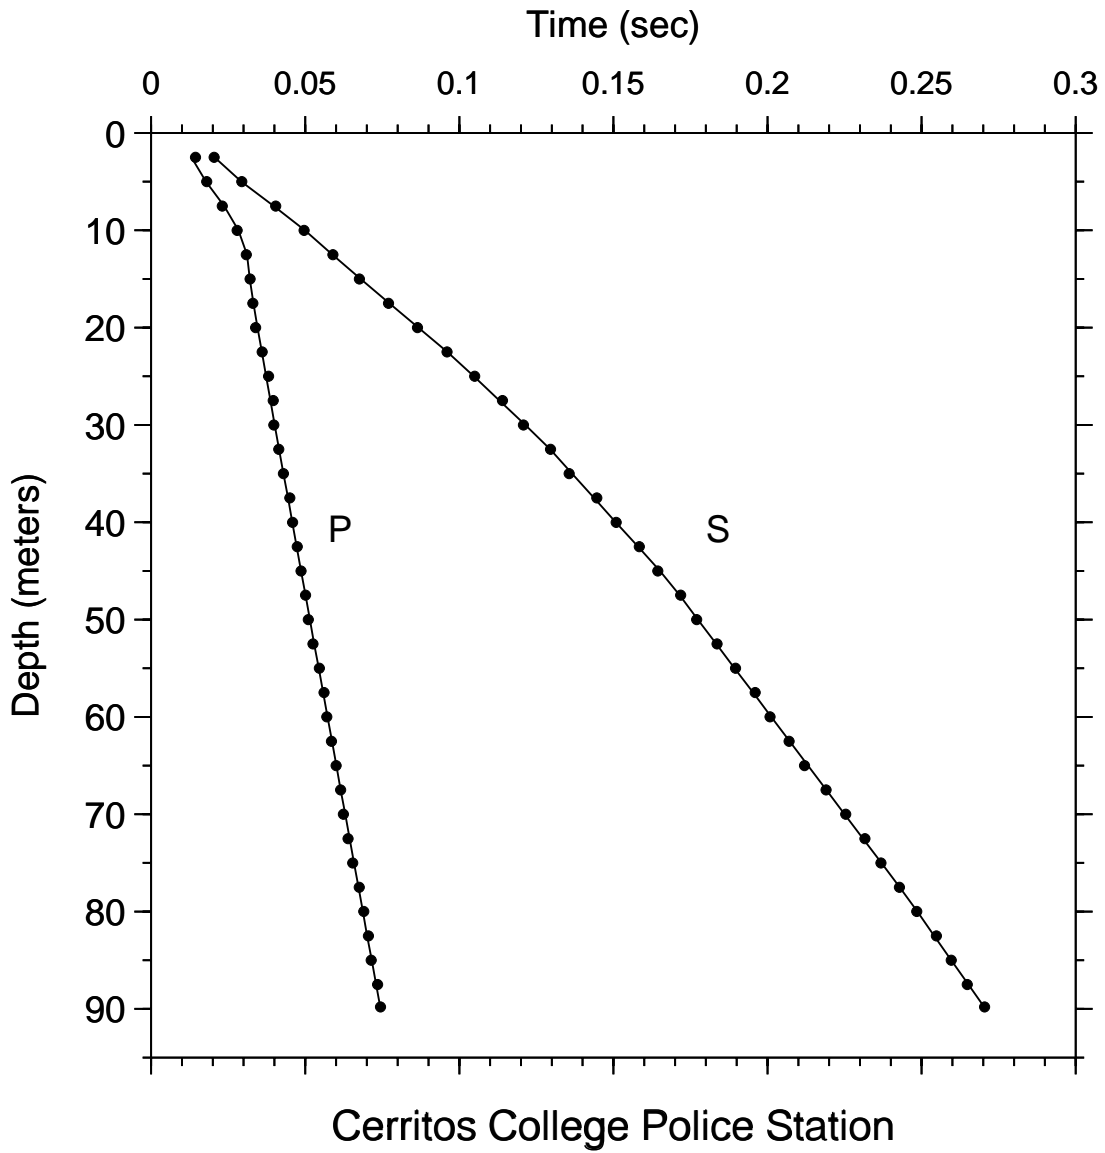


Figure A-14. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

Cerritos College Police Station

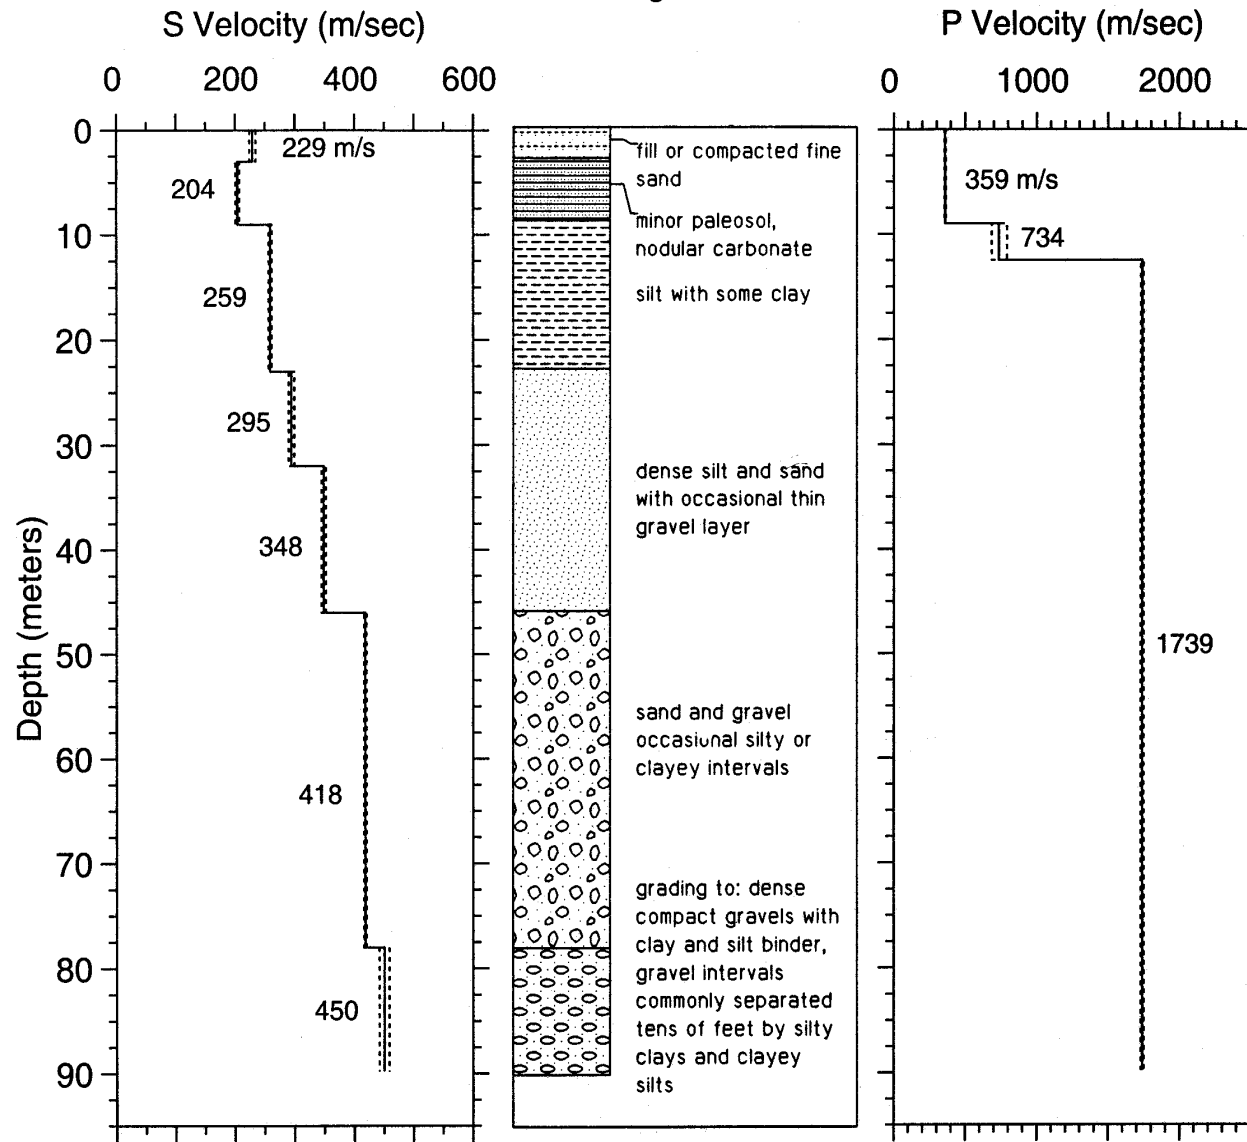


Figure A-15. Velocity profiles for the borehole at Cerritos College Police Building. Generalized geology is shown for correlation with velocities. Dashed lines are one standard deviation.

ABLE A-5. S-wave arrival times and velocity summaries.

Location: Cerritos Police Building: S Coordinates: 33.88212 -118.09680 Hole_Code: 283
 hoffset = 4.00 travel-time file: F:\CPB\CPBS.TT

nlayers = 7

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0204	0.0109	229	1	-0.0002	3.0	3.0	229	224	235	9.8	9.8	752	735	770
5.0	16.4	0.0294	0.0229	218	1	0.0001	9.0	6.0	204	201	207	29.5	19.7	669	658	680
7.5	24.6	0.0404	0.0352	213	1	0.0006	23.0	14.0	259	256	262	75.5	45.9	849	841	858
10.0	32.8	0.0496	0.0464	216	1	-0.0003	32.0	9.0	295	290	299	105.0	29.5	966	951	982
12.5	41.0	0.0590	0.0560	223	1	0.0002	46.0	14.0	348	345	352	150.9	45.9	1143	1131	1156
15.0	49.2	0.0676	0.0657	228	1	-0.0004	78.0	32.0	418	416	420	255.9	105.0	1372	1365	1380
17.5	57.4	0.0770	0.0753	232	1	-0.0003	89.8	11.8	450	442	459	294.6	38.7	1477	1450	1505
20.0	65.6	0.0864	0.0850	235	1	-0.0003										
22.5	73.8	0.0960	0.0946	238	1	-0.0001										
25.0	82.0	0.1050	0.1033	242	1	0.0003										
27.5	90.2	0.1140	0.1118	246	1	0.0010										
30.0	98.4	0.1208	0.1203	249	1	-0.0006										
32.5	106.6	0.1296	0.1285	253	1	0.0001										
35.0	114.8	0.1356	0.1357	258	1	-0.0010										
37.5	123.0	0.1446	0.1429	262	1	0.0009										
40.0	131.2	0.1509	0.1501	267	1	0.0001										
42.5	139.4	0.1584	0.1572	270	1	0.0004										
45.0	147.6	0.1644	0.1644	274	1	-0.0007										
47.5	155.8	0.1718	0.1709	278	1	0.0003										
50.0	164.0	0.1770	0.1769	283	1	-0.0004										
52.5	172.2	0.1836	0.1829	287	1	0.0002										
55.0	180.4	0.1896	0.1888	291	1	0.0003										
57.5	188.6	0.1960	0.1948	295	1	0.0007										
60.0	196.9	0.2008	0.2008	299	1	-0.0004										
62.5	205.1	0.2070	0.2068	302	1	-0.0002										
65.0	213.3	0.2120	0.2128	306	1	-0.0011										
67.5	221.5	0.2190	0.2187	309	1	-0.0001										
70.0	229.7	0.2254	0.2247	311	1	0.0004										
72.5	237.9	0.2316	0.2307	314	1	0.0006										
75.0	246.1	0.2368	0.2367	317	1	-0.0002										
77.5	254.3	0.2428	0.2427	319	1	-0.0001										
80.0	262.5	0.2484	0.2483	322	1	-0.0002										
82.5	270.7	0.2548	0.2539	325	1	0.0007										
85.0	278.9	0.2596	0.2594	328	1	0.0000										
87.5	287.1	0.2648	0.2650	330	1	-0.0004										
89.8	294.6	0.2704	0.2701	332	1	0.0001										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

ABLE A-6. P-wave arrival times and velocity summaries.

Location: Cerritos Police Building: P Coordinates: 33.88212 -118.09680 Hole_Code: 283
 hoffset = 4.00 travel-time file: F:\CPB\CPBP.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0144	0.0070	359	1	0.0013	9.0	9.0	359	355	364	29.5	29.5	1179	1164	1193
5.0	16.4	0.0180	0.0139	359	1	0.0002	12.5	3.5	734	685	792	41.0	11.5	2410	2247	2598
7.5	24.6	0.0231	0.0209	359	1	-0.0006	89.8	77.3	1739	1729	1749	294.6	253.6	5705	5671	5738
10.0	32.8	0.0279	0.0264	378	1	-0.0004										
12.5	41.0	0.0309	0.0298	419	1	-0.0002										
15.0	49.2	0.0321	0.0313	480	1	0.0001										
17.5	57.4	0.0330	0.0327	535	1	-0.0002										
20.0	65.6	0.0339	0.0342	586	1	-0.0006										
22.5	73.8	0.0360	0.0356	632	1	0.0001										
25.0	82.0	0.0381	0.0370	675	1	0.0008										
27.5	90.2	0.0396	0.0385	715	1	0.0009										
30.0	98.4	0.0398	0.0399	752	1	-0.0003										
32.5	106.6	0.0414	0.0413	786	1	-0.0001										
35.0	114.8	0.0429	0.0428	818	1	0.0000										
37.5	123.0	0.0450	0.0442	848	1	0.0006										
40.0	131.2	0.0459	0.0457	876	1	0.0001										
42.5	139.4	0.0474	0.0471	903	1	0.0002										
45.0	147.6	0.0486	0.0485	927	1	0.0000										
47.5	155.8	0.0501	0.0500	951	1	0.0000										
50.0	164.0	0.0510	0.0514	973	1	-0.0005										
52.5	172.2	0.0525	0.0528	994	1	-0.0004										
55.0	180.4	0.0546	0.0543	1013	1	0.0002										
57.5	188.6	0.0561	0.0557	1032	1	0.0003										
60.0	196.9	0.0570	0.0572	1050	1	-0.0002										
62.5	205.1	0.0585	0.0586	1067	1	-0.0002										
65.0	213.3	0.0600	0.0600	1083	1	-0.0001										
67.5	221.5	0.0615	0.0615	1098	1	0.0000										
70.0	229.7	0.0624	0.0629	1113	1	-0.0006										
72.5	237.9	0.0639	0.0643	1127	1	-0.0005										
75.0	246.1	0.0654	0.0658	1140	1	-0.0004										
77.5	254.3	0.0675	0.0672	1153	1	0.0002										
80.0	262.5	0.0690	0.0687	1165	1	0.0003										
82.5	270.7	0.0705	0.0701	1177	1	0.0004										
85.0	278.9	0.0714	0.0715	1188	1	-0.0002										
87.5	287.1	0.0735	0.0730	1199	1	0.0005										
89.8	294.6	0.0744	0.0743	1209	1	0.0001										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

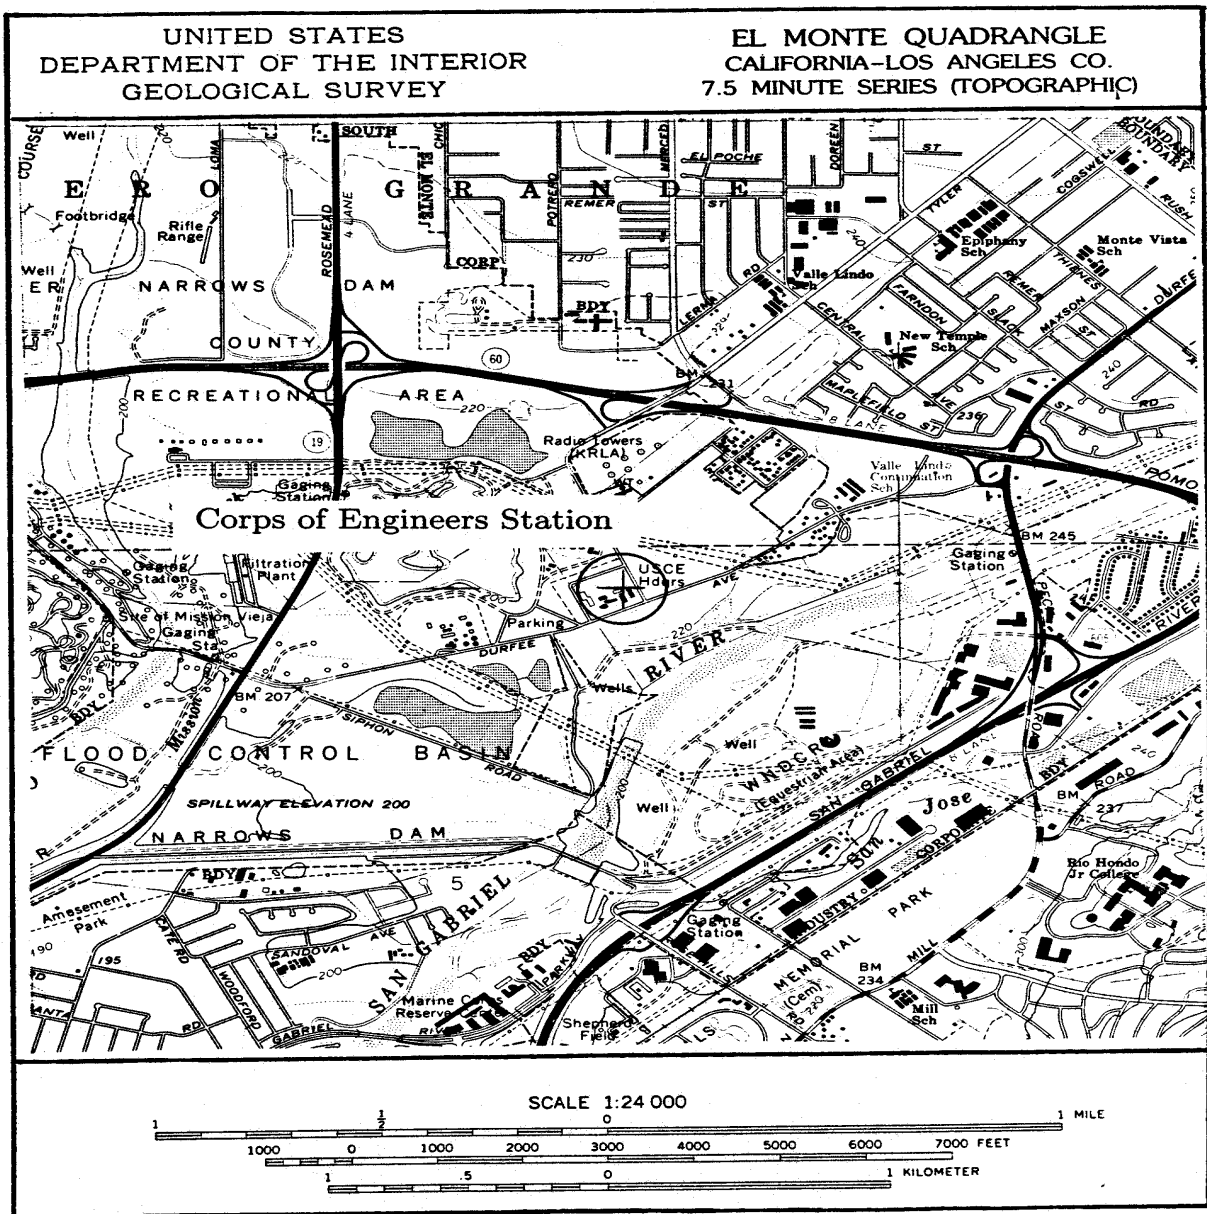


Figure A-16. Site location map for the borehole at Corps of Engineers Station. The accelerograph is located approximately 45 meters from the borehole.

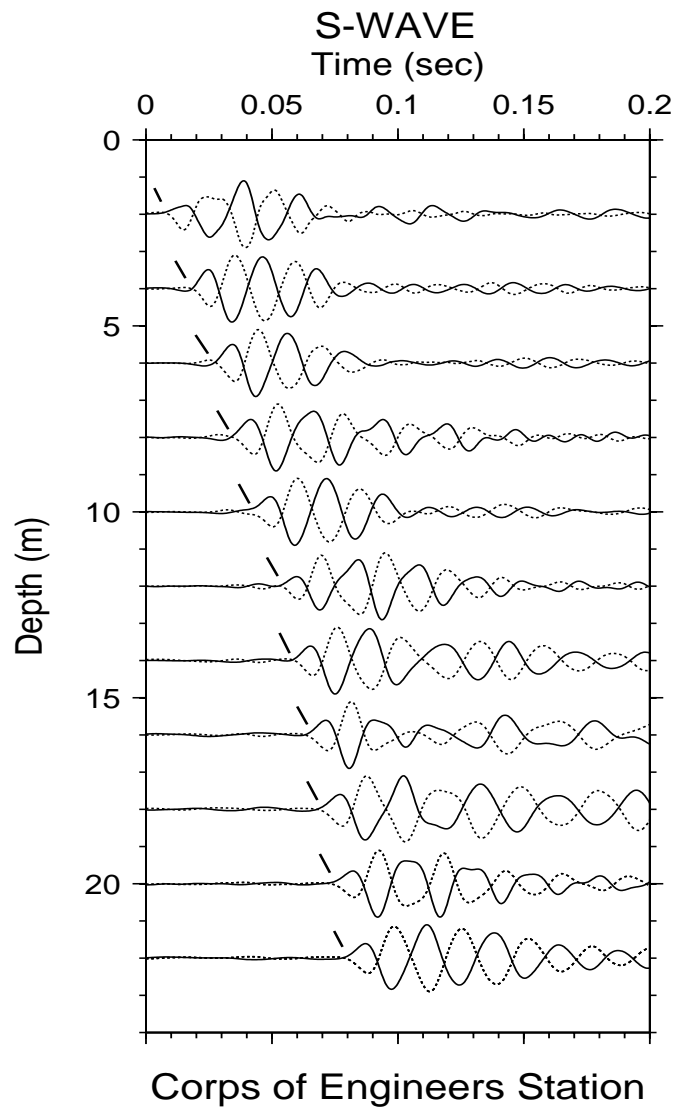


Figure A-17. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

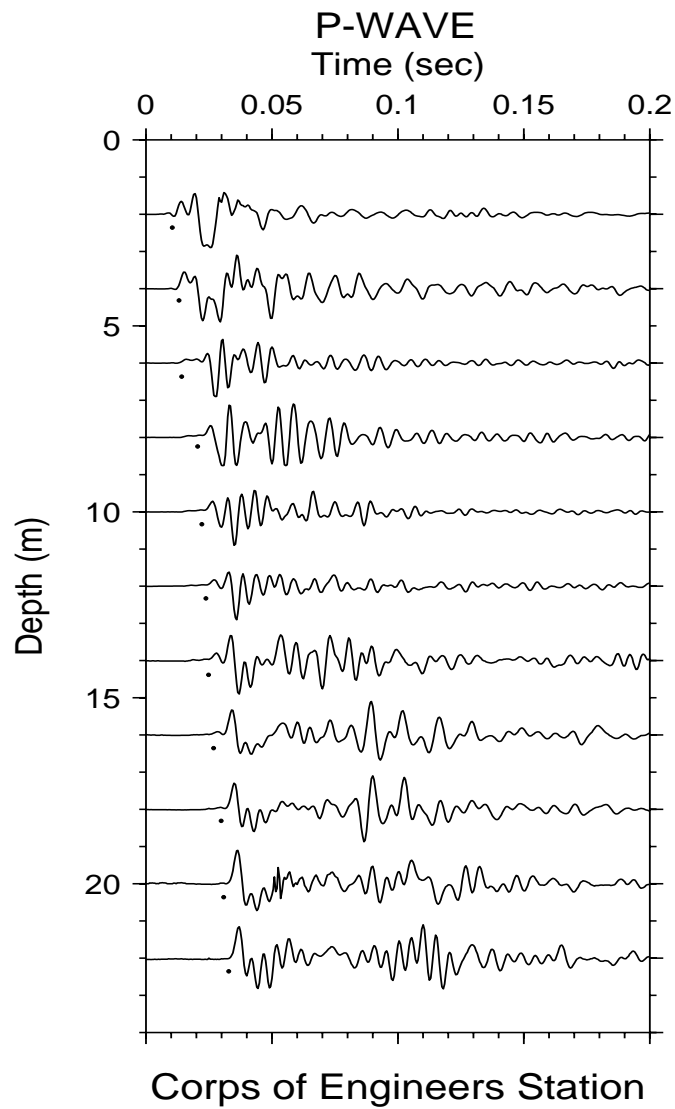


Figure A-18. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

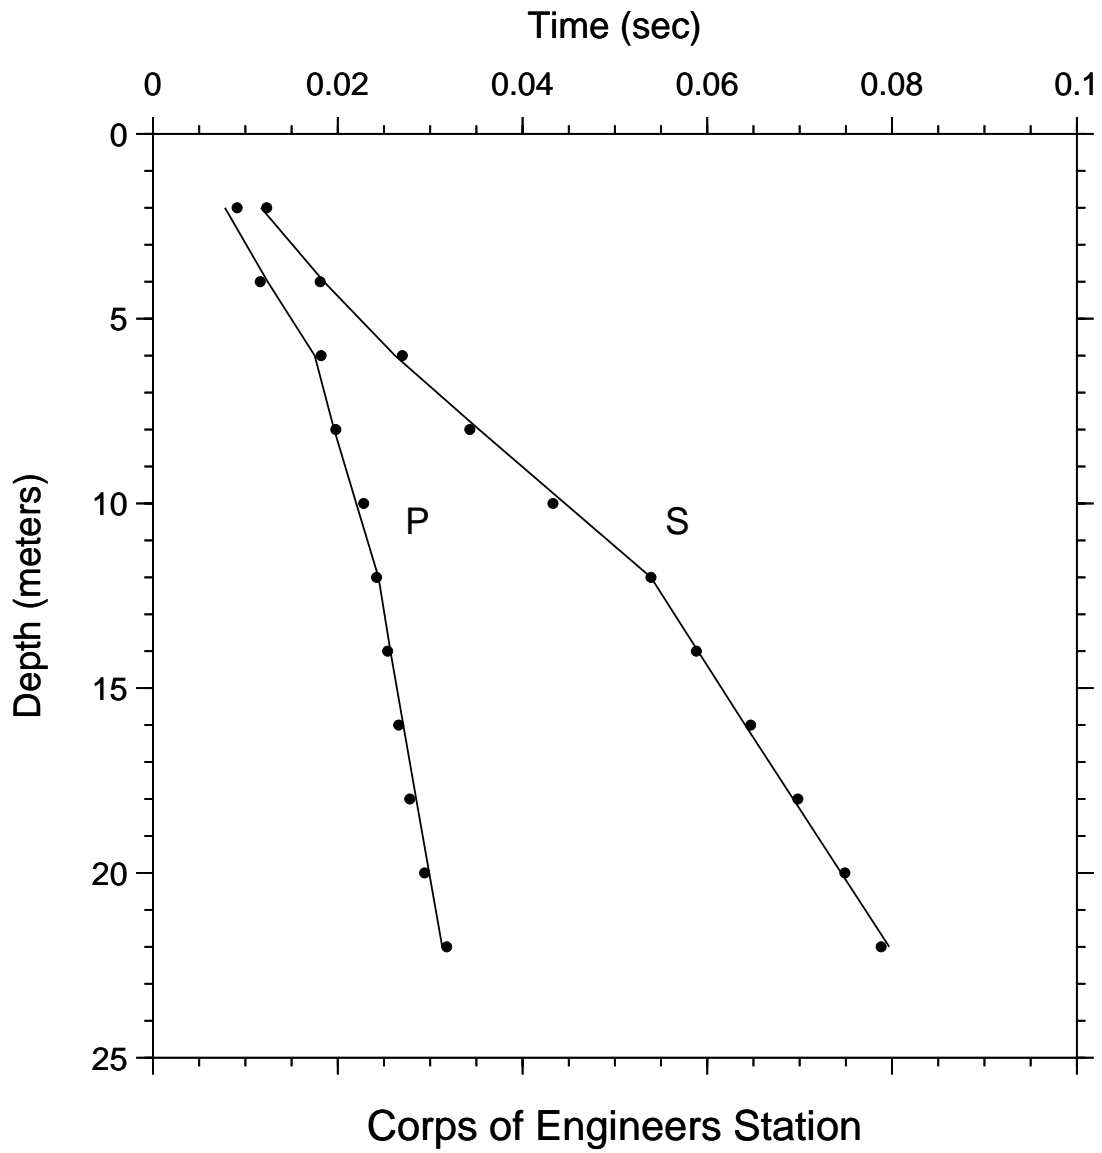


Figure A-19. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

Corps of Engineers Station

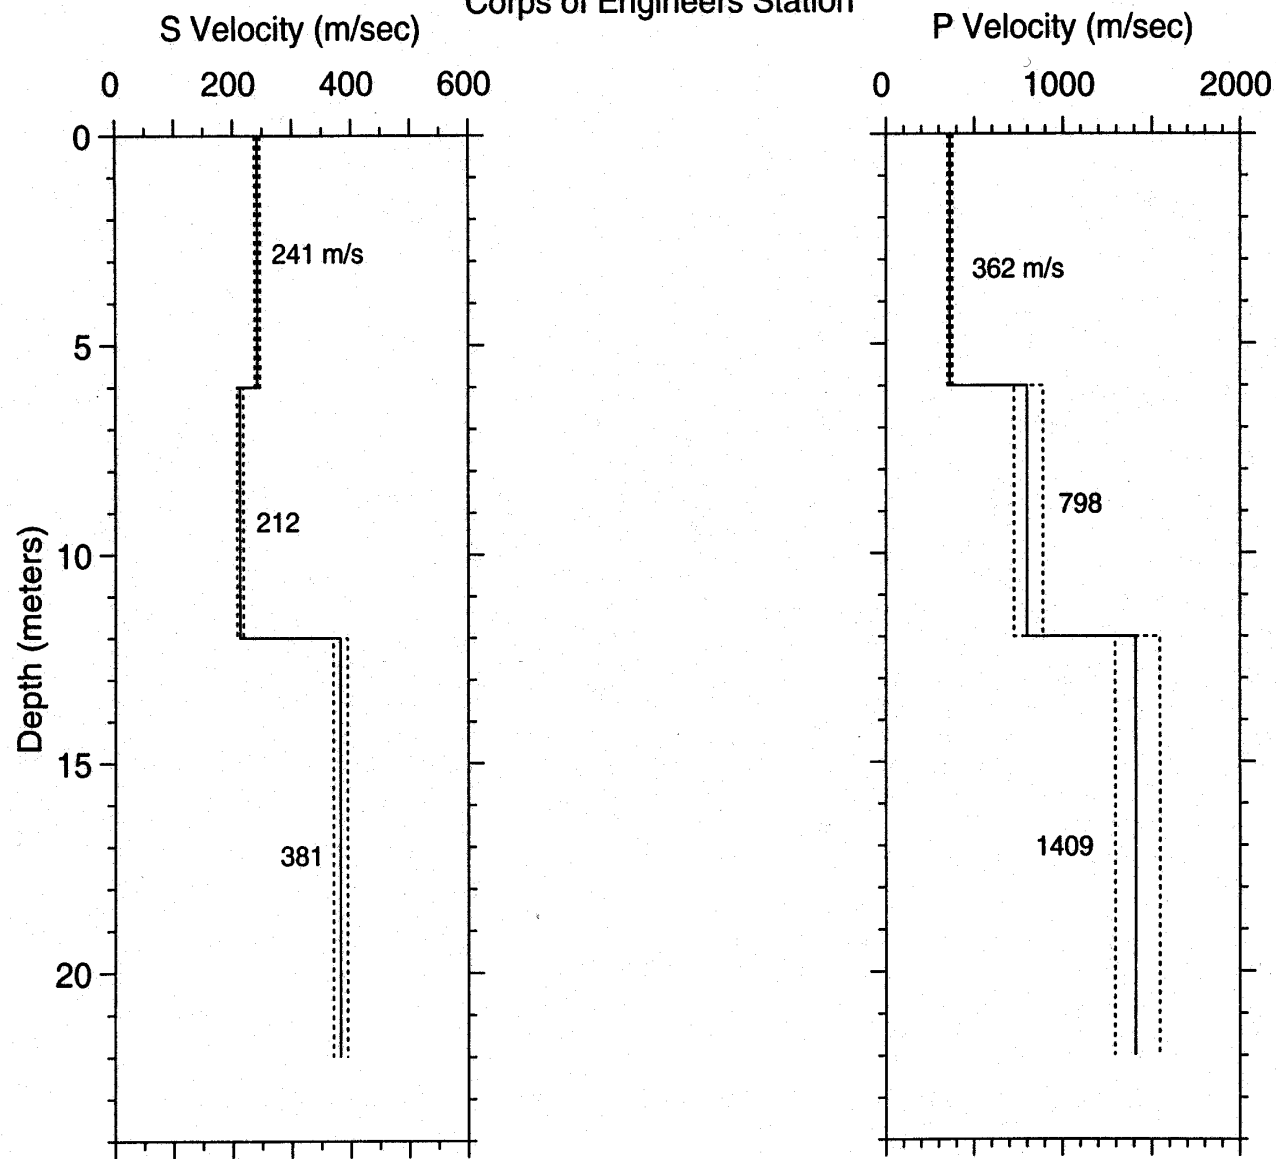


Figure A-20. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is not available from this borehole.

ABLE A-7. S-wave arrival times and velocity summaries.

Location: Corps of Engineers Station: S Coordinates: 34.03219 -118.05225 Hole_Code: 298
 hoffset = 2.00 travel-time file: F:\NAR\NARS.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.0	6.6	0.0123	0.0083	241	1	0.0006	6.0	6.0	241	237	246	19.7	19.7	792	778	808
4.0	13.1	0.0181	0.0166	241	1	-0.0004	12.0	6.0	212	207	217	39.4	19.7	695	678	714
6.0	19.7	0.0270	0.0249	241	1	0.0008	22.0	10.0	381	370	394	72.2	32.8	1252	1214	1292
8.0	26.2	0.0343	0.0343	233	1	-0.0010										
10.0	32.8	0.0433	0.0438	228	2	-0.0012										
12.0	39.4	0.0539	0.0532	226	1	0.0000										
14.0	45.9	0.0588	0.0584	240	1	-0.0002										
16.0	52.5	0.0647	0.0637	251	1	0.0006										
18.0	59.1	0.0698	0.0689	261	1	0.0005										
20.0	65.6	0.0749	0.0742	270	1	0.0004										
22.0	72.2	0.0788	0.0794	277	1	-0.0009										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

ABLE A-8. P-wave arrival times and velocity summaries.

Location: Corps of Engineers Station: P Coordinates: 34.03219 -118.05225 Hole_Code: 298
 hoffset = 2.00 travel-time file: F:\NAR\NARP.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.0	6.6	0.0091	0.0055	362	2	0.0012	6.0	6.0	362	349	376	19.7	19.7	1188	1146	1233
4.0	13.1	0.0116	0.0110	362	1	-0.0007	12.0	6.0	798	724	889	39.4	19.7	2618	2375	2915
6.0	19.7	0.0182	0.0166	362	3	0.0008	22.0	10.0	1409	1294	1545	72.2	32.8	4622	4246	5070
8.0	26.2	0.0198	0.0191	419	3	0.0002										
10.0	32.8	0.0228	0.0216	463	1	0.0009										
12.0	39.4	0.0242	0.0241	498	1	-0.0001										
14.0	45.9	0.0254	0.0255	549	1	-0.0004										
16.0	52.5	0.0266	0.0269	594	3	-0.0005										
18.0	59.1	0.0278	0.0284	635	2	-0.0007										
20.0	65.6	0.0294	0.0298	672	1	-0.0004										
22.0	72.2	0.0318	0.0312	705	1	0.0005										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

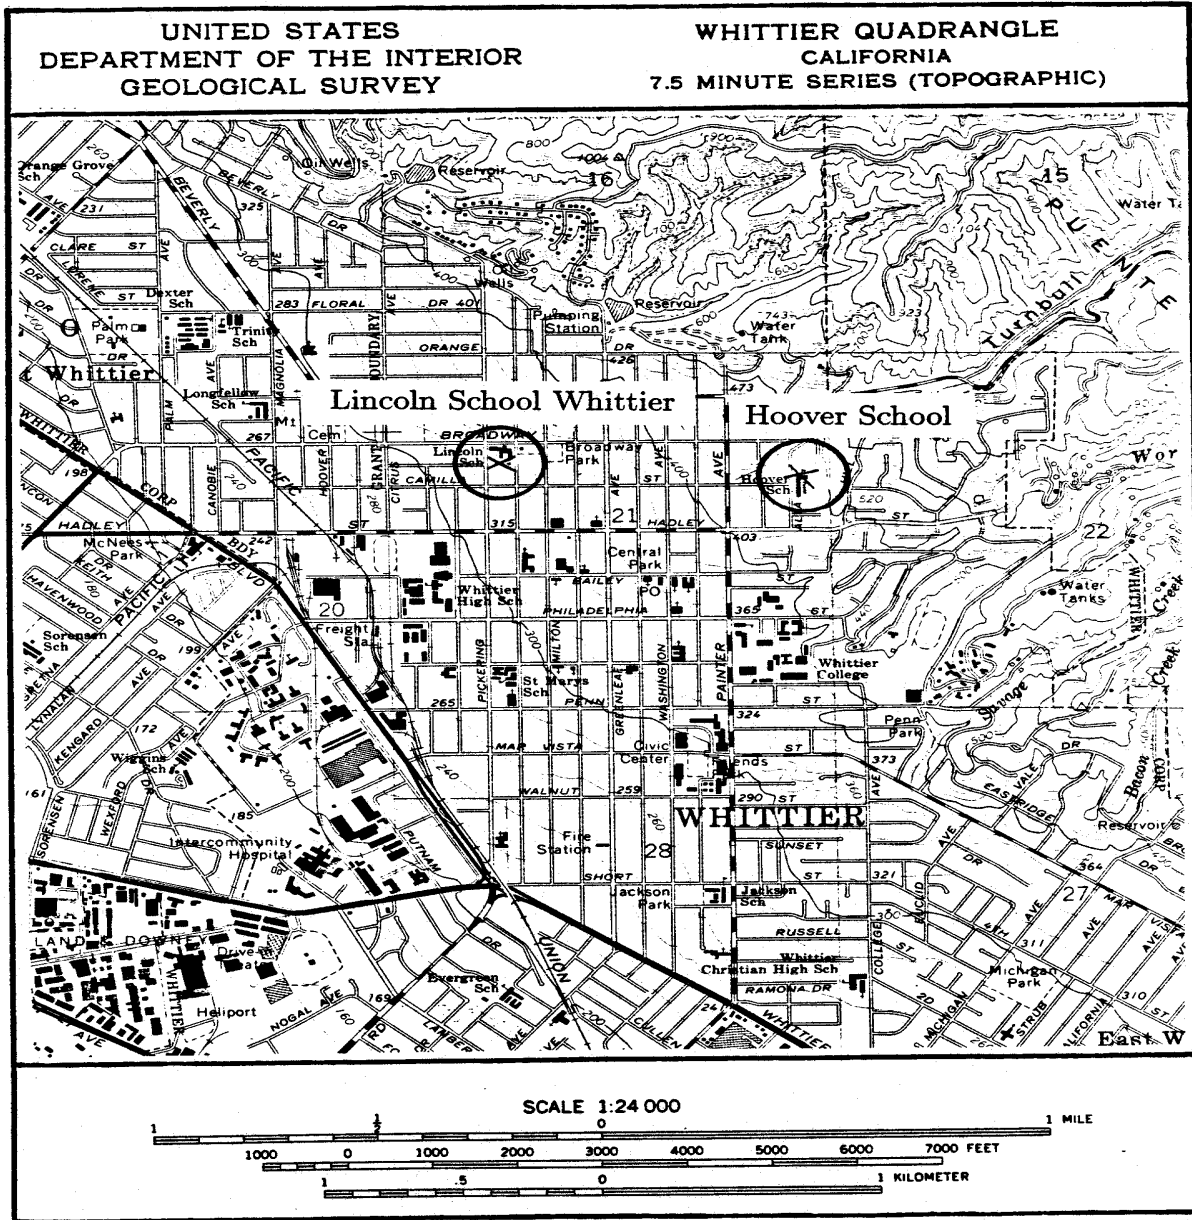


Figure A-21. Site location map for the borehole at Hoover School. The accelerograph is located approximately 30 meters from the borehole.

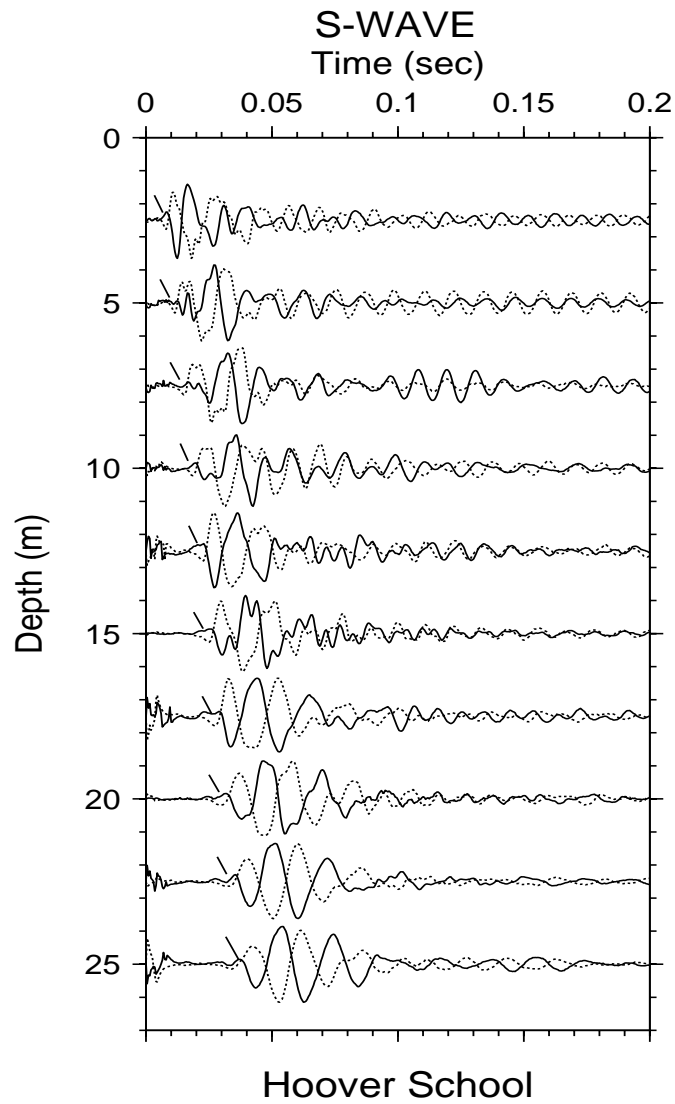


Figure A-22. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

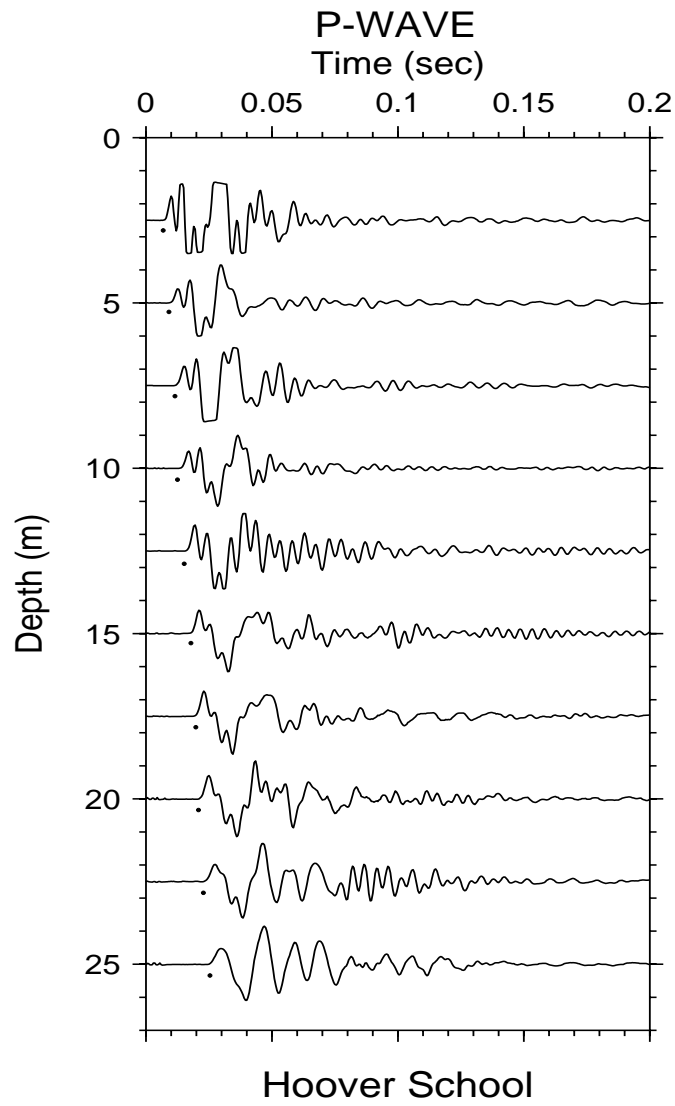


Figure A-23. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

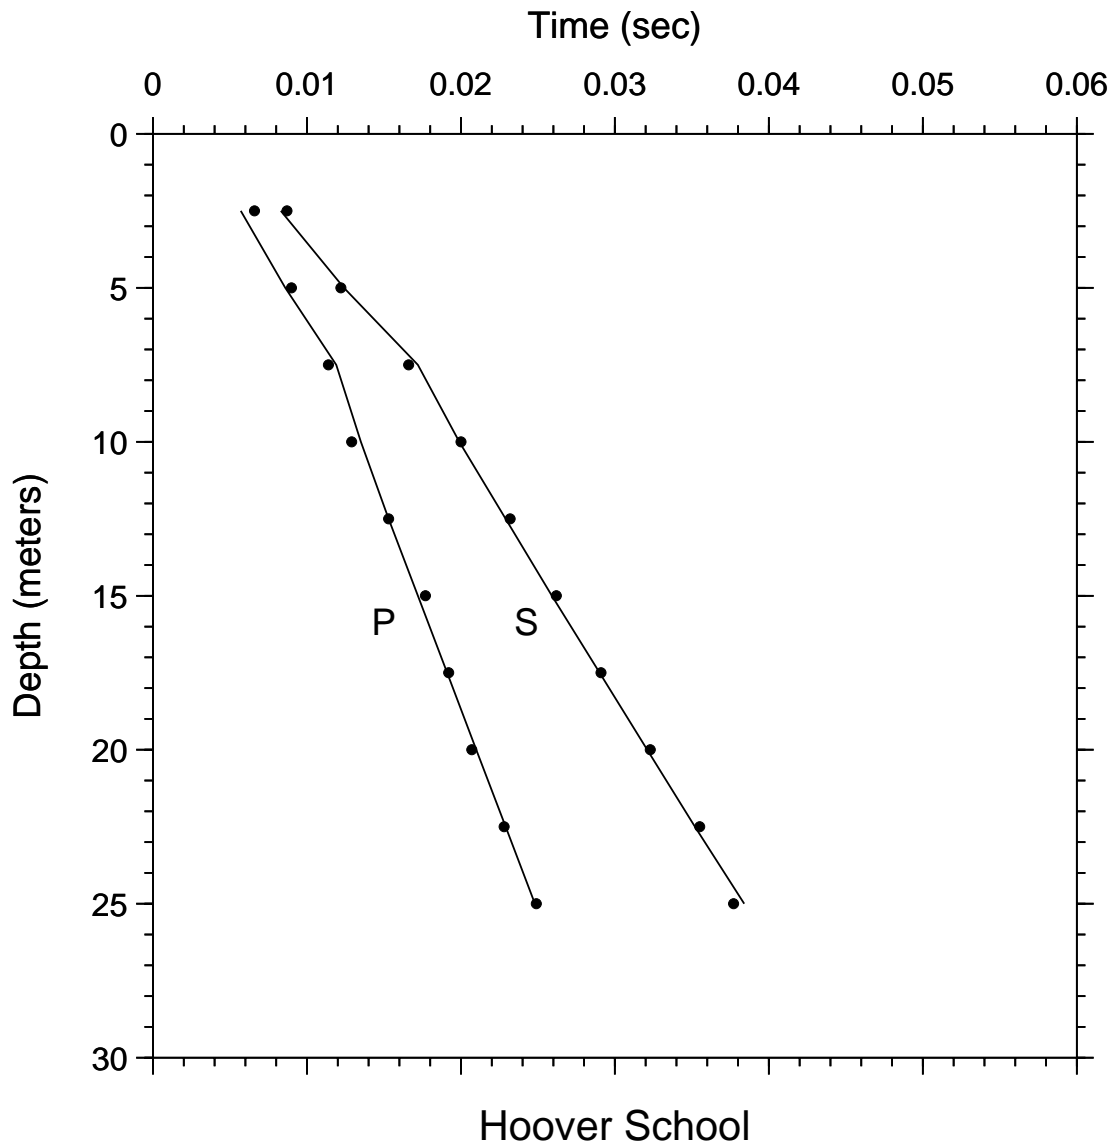


Figure A-24. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

Hoover School

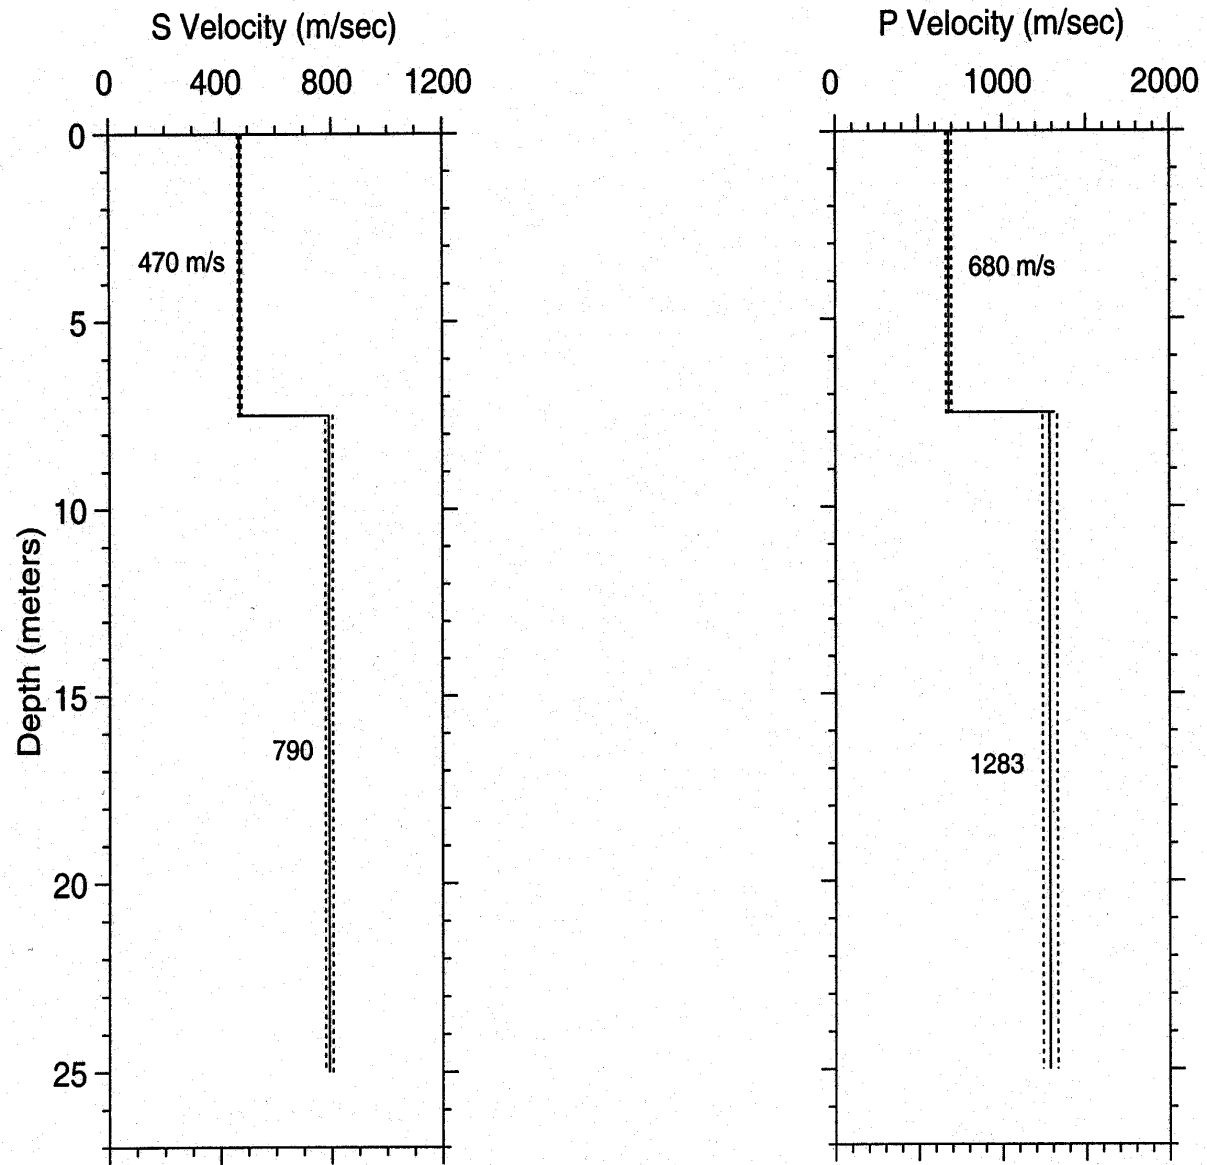


Figure A-25. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is not available from this borehole.

ABLE A-9. S-wave arrival times and velocity summaries.

Location: Hoover School: S Coordinates: 33.98491 -118.02890 Hole_Code: 299
 hoffset = 3.00 travel-time file: F:\H00\H00S2.TT

nlayers = 2

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0087	0.0053	470	1	0.0004	7.5	7.5	470	464	476	24.6	24.6	1542	1521	1563
5.0	16.4	0.0122	0.0106	470	1	-0.0002	25.0	17.5	790	777	804	82.0	57.4	2593	2549	2639
7.5	24.6	0.0166	0.0160	470	1	-0.0006										
10.0	32.8	0.0200	0.0191	523	1	0.0001										
12.5	41.0	0.0232	0.0223	561	1	0.0003										
15.0	49.2	0.0262	0.0255	589	1	0.0003										
17.5	57.4	0.0291	0.0286	612	1	0.0001										
20.0	65.6	0.0323	0.0318	629	1	0.0002										
22.5	73.8	0.0355	0.0349	644	1	0.0003										
25.0	82.0	0.0377	0.0381	656	1	-0.0007										

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model
- vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- dtb(m) = depth to bottom of layer in meters
- thk(m) = thickness of layer in meters
- v(m/s) = velocity of layer in meters per second
- vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- vu(m/s) = upper limit of velocity in meters per second
- dtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- v(ft/s) = velocity of layer in feet per second
- vl(ft/s) = lower limit of velocity in feet per second
- vu(ft/s) = upper limit of velocity in feet per second

ABLE A-10. P-wave arrival times and velocity summaries.

Location: Hoover School: P Coordinates: 33.98491 -118.02890 Hole_Code: 299
 hoffset = 3.00 travel-time file: F:\H00\H00P2.TT

nlayers = 2

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0066	0.0037	680	1	0.0009	7.5	7.5	680	664	697	24.6	24.6	2231	2179	2286
5.0	16.4	0.0090	0.0074	680	1	0.0004	25.0	17.5	1283	1241	1328	82.0	57.4	4211	4072	4359
7.5	24.6	0.0114	0.0110	680	1	-0.0005										
10.0	32.8	0.0129	0.0130	771	1	-0.0006										
12.5	41.0	0.0153	0.0149	837	1	0.0000										
15.0	49.2	0.0177	0.0169	889	1	0.0005										
17.5	57.4	0.0192	0.0188	930	1	0.0001										
20.0	65.6	0.0207	0.0208	963	1	-0.0003										
22.5	73.8	0.0228	0.0227	990	1	-0.0001										
25.0	82.0	0.0249	0.0247	1013	1	0.0001										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

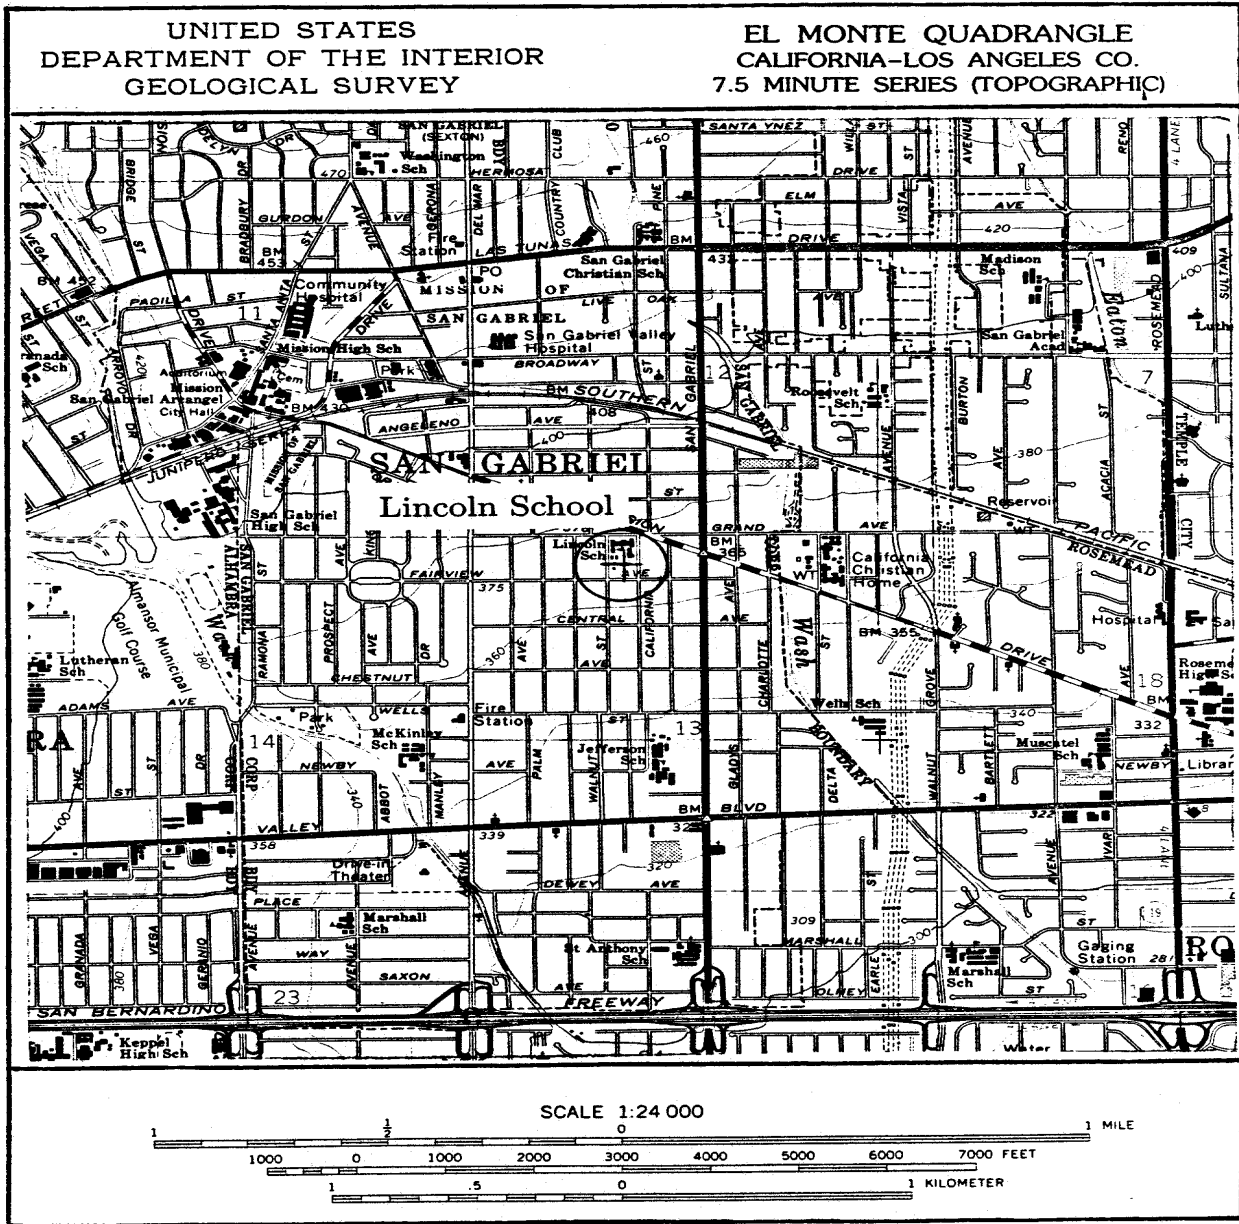


Figure A-26. Site location map for the borehole at Lincoln School. The accelerograph is located approximately 91 meters from the borehole.

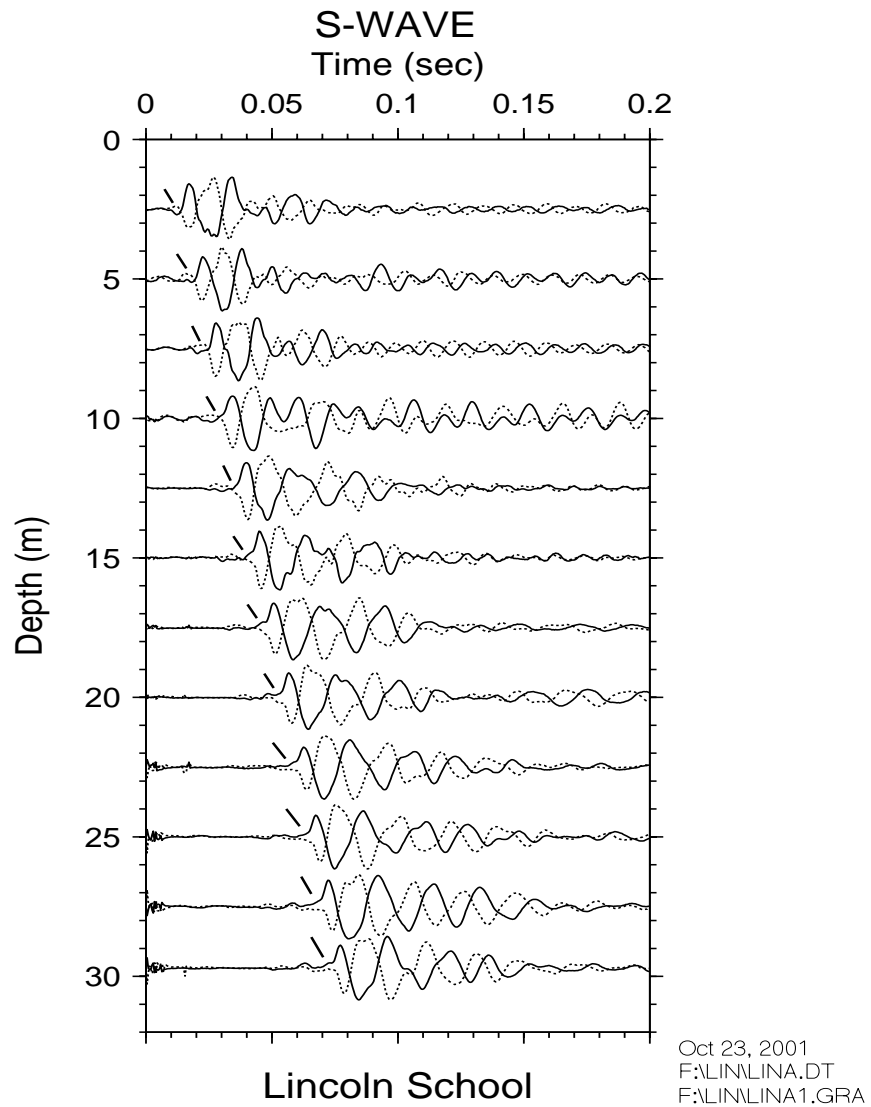


Figure A-27. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.


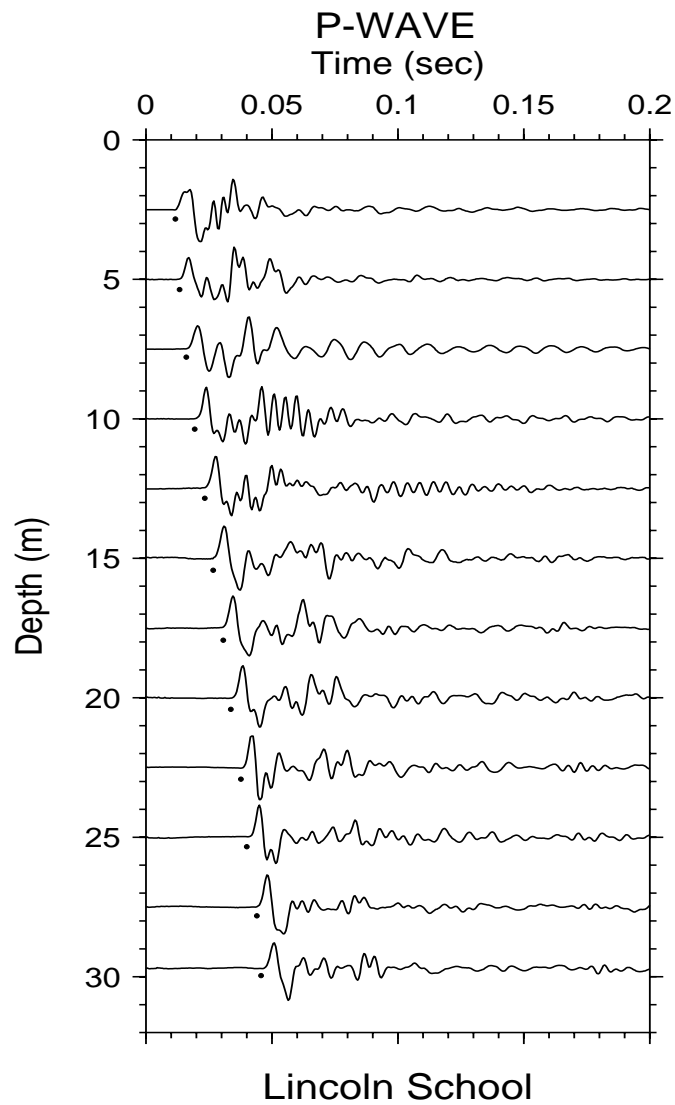


Figure A-28. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

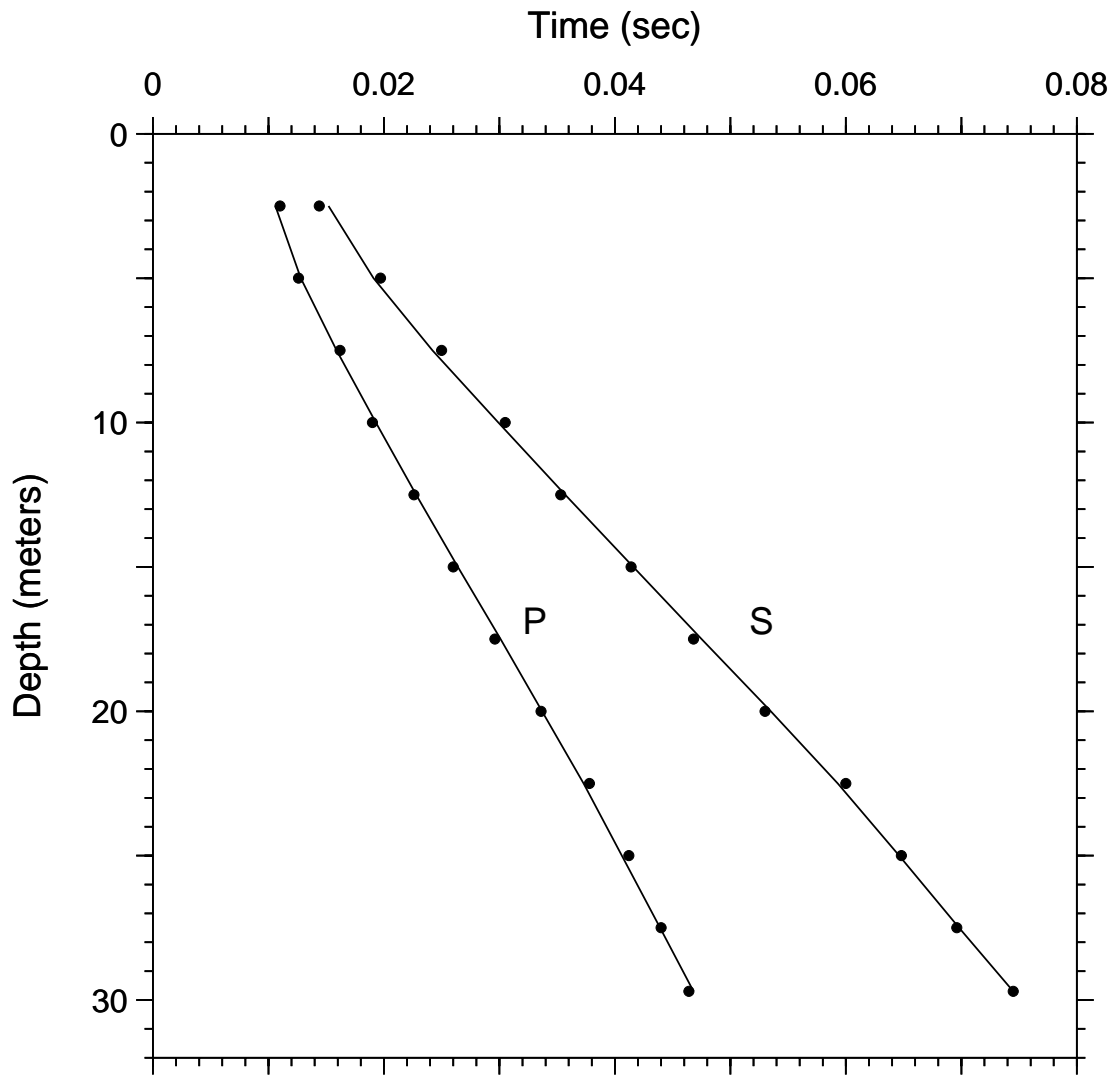

Lincoln School

Oct 23, 2001
 F:\LIN\LINP.DT
 F:\LIN\LINPTIME.GRA

Figure A-29. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

Lincoln School

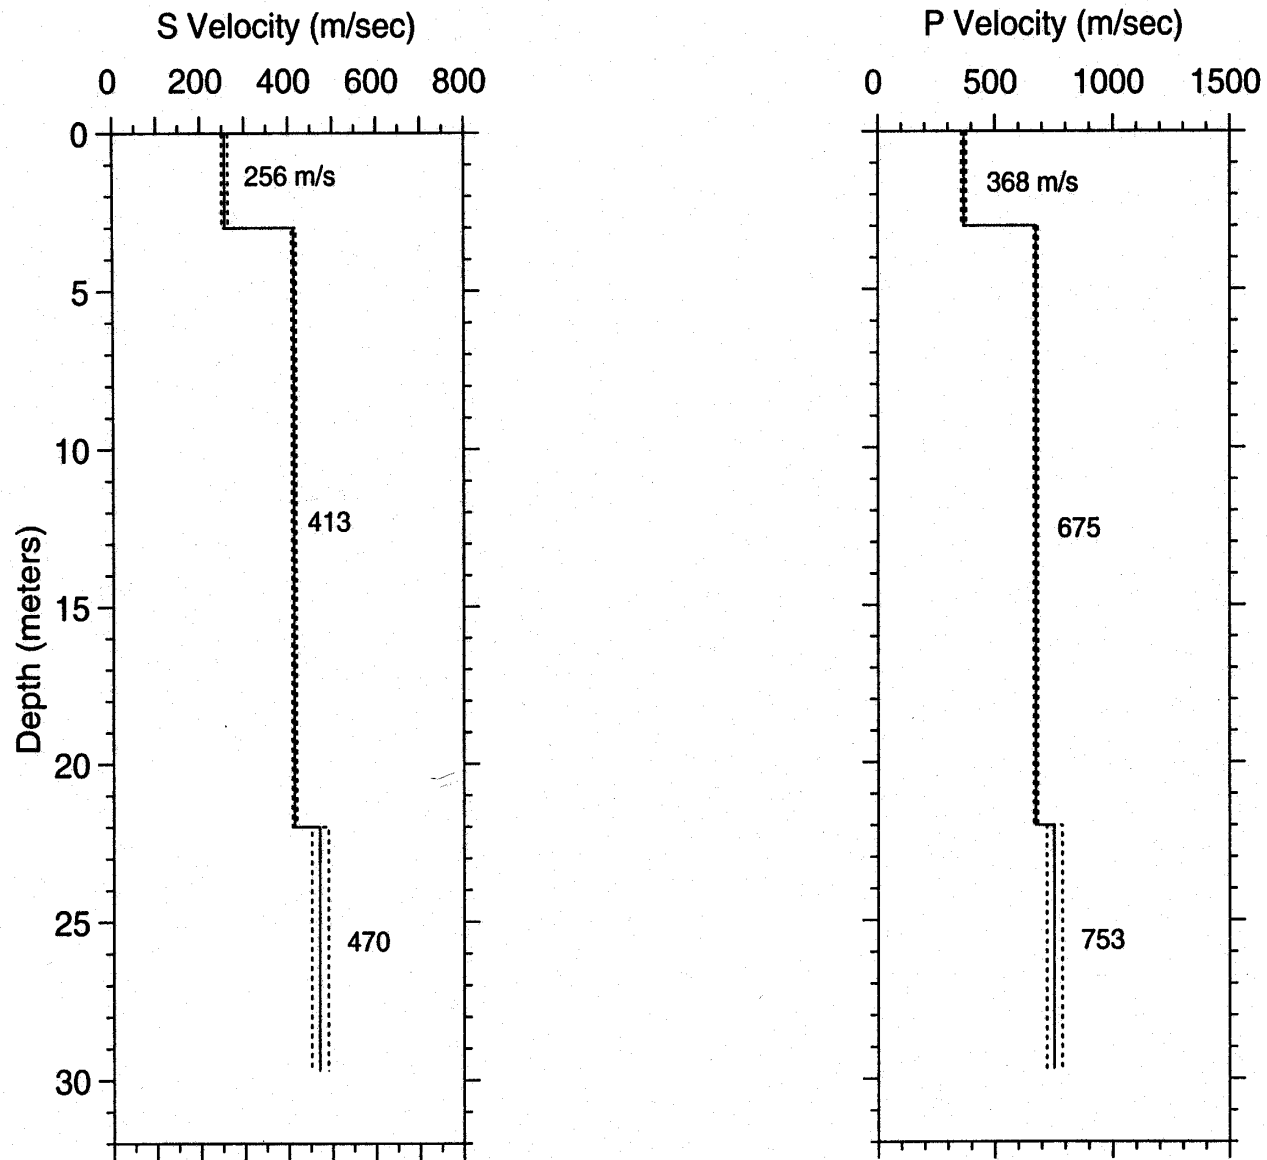


Figure A-30. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is not available from this borehole.

ABLE A-11. S-wave arrival times and velocity summaries.

Location: Lincoln School: S Coordinates: 34.09043 -118.09300 Hole_Code: 300
 hoffset = 3.00 travel-time file: F:\LIN\LINS2.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0144	0.0098	256	1	-0.0008	3.0	3.0	256	249	264	9.8	9.8	841	818	865
5.0	16.4	0.0197	0.0166	302	1	0.0006	22.0	19.0	413	408	418	72.2	62.3	1354	1338	1371
7.5	24.6	0.0250	0.0226	332	1	0.0008	29.7	7.7	470	452	490	97.4	25.3	1544	1484	1609
10.0	32.8	0.0305	0.0287	349	1	0.0006										
12.5	41.0	0.0353	0.0347	360	1	-0.0004										
15.0	49.2	0.0414	0.0408	368	1	-0.0002										
17.5	57.4	0.0468	0.0468	374	1	-0.0007										
20.0	65.6	0.0530	0.0529	378	1	-0.0005										
22.5	73.8	0.0600	0.0588	383	1	0.0007										
25.0	82.0	0.0648	0.0641	390	1	0.0002										
27.5	90.2	0.0696	0.0694	396	1	-0.0002										
29.7	97.4	0.0745	0.0741	401	1	0.0000										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

ABLE A-12. P-wave arrival times and velocity summaries.

Location: Lincoln School: P Coordinates: 34.09044 -118.09306 Hole_Code: 300
 hoffset = 3.00 travel-time file: F:\LIN\LINP.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0110	0.0068	368	1	0.0004	3.0	3.0	368	358	378	9.8	9.8	1207	1175	1241
5.0	16.4	0.0126	0.0111	450	1	-0.0002	22.0	19.0	675	666	684	72.2	62.3	2213	2184	2243
7.5	24.6	0.0162	0.0148	506	1	0.0003	29.7	7.7	753	722	787	97.4	25.3	2470	2367	2582
10.0	32.8	0.0190	0.0185	540	1	-0.0003										
12.5	41.0	0.0226	0.0222	562	1	-0.0002										
15.0	49.2	0.0260	0.0259	578	1	-0.0004										
17.5	57.4	0.0296	0.0296	591	1	-0.0004										
20.0	65.6	0.0336	0.0333	600	1	-0.0001										
22.5	73.8	0.0378	0.0370	609	1	0.0005										
25.0	82.0	0.0412	0.0403	621	1	0.0006										
27.5	90.2	0.0440	0.0436	631	1	0.0001										
29.7	97.4	0.0464	0.0465	638	1	-0.0003										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

WHITTIER QUADRANGLE
CALIFORNIA
7.5 MINUTE SERIES (TOPOGRAPHIC)

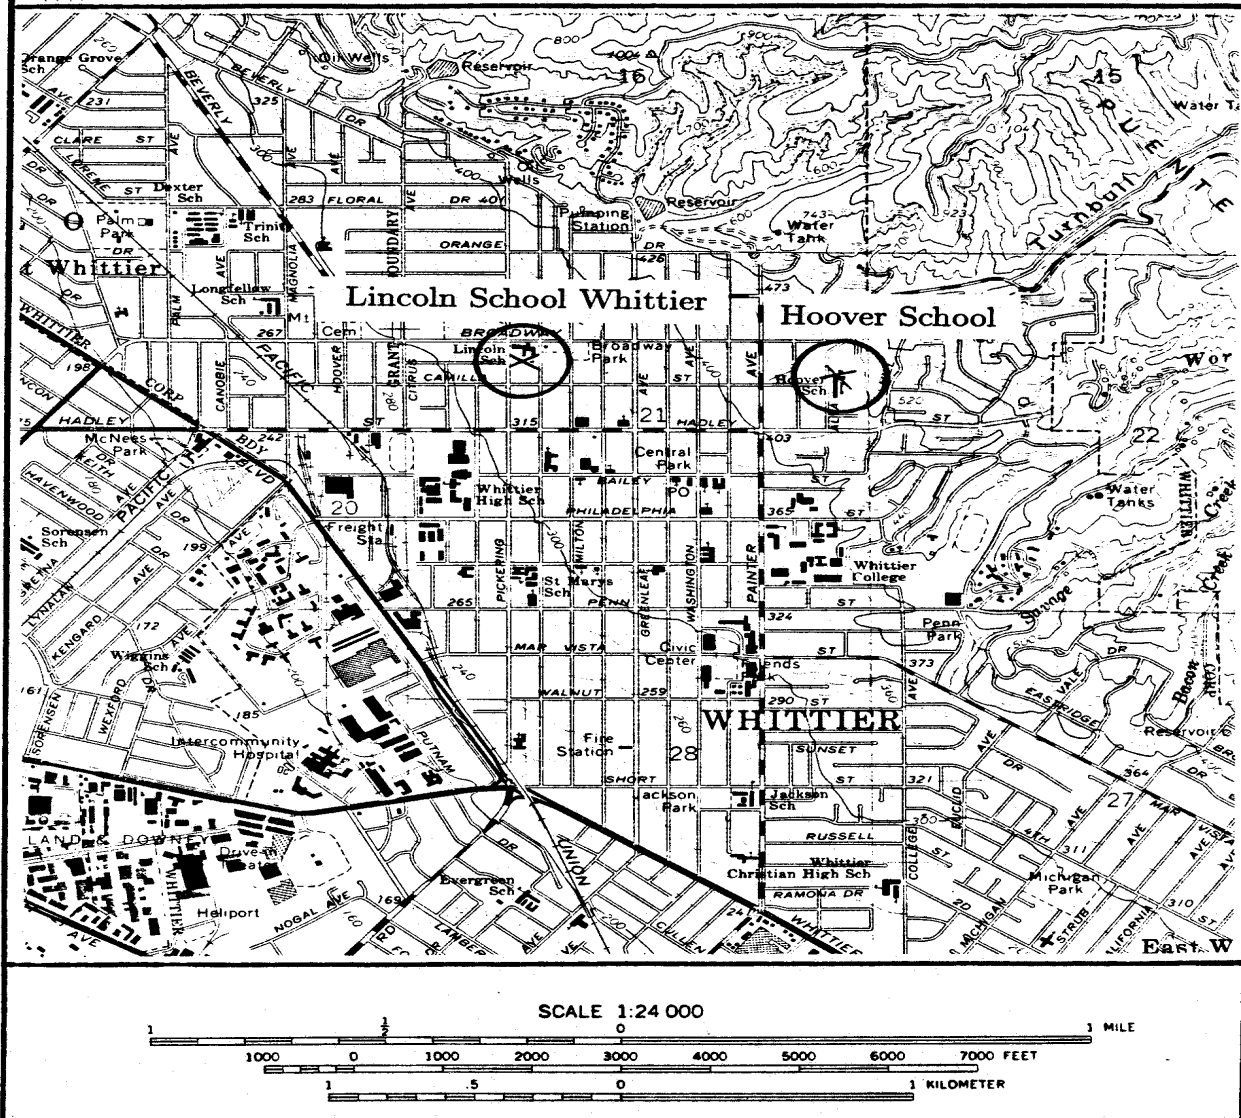


Figure A-31. Site location map for the borehole at Lincoln School Whittier.

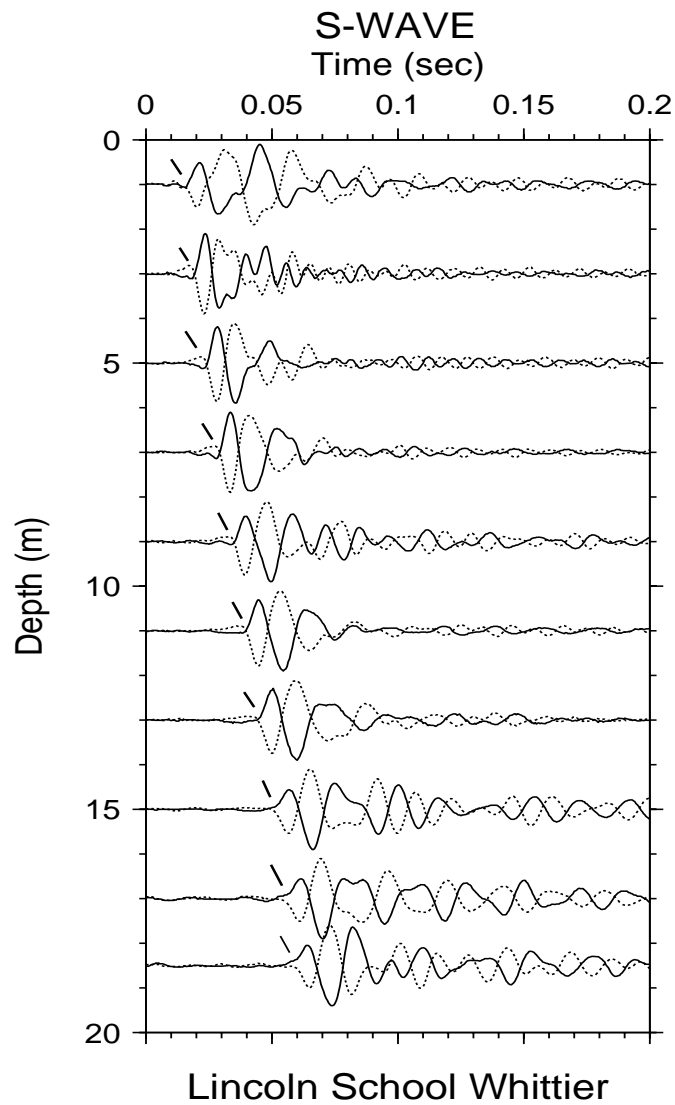


Figure A-32. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.


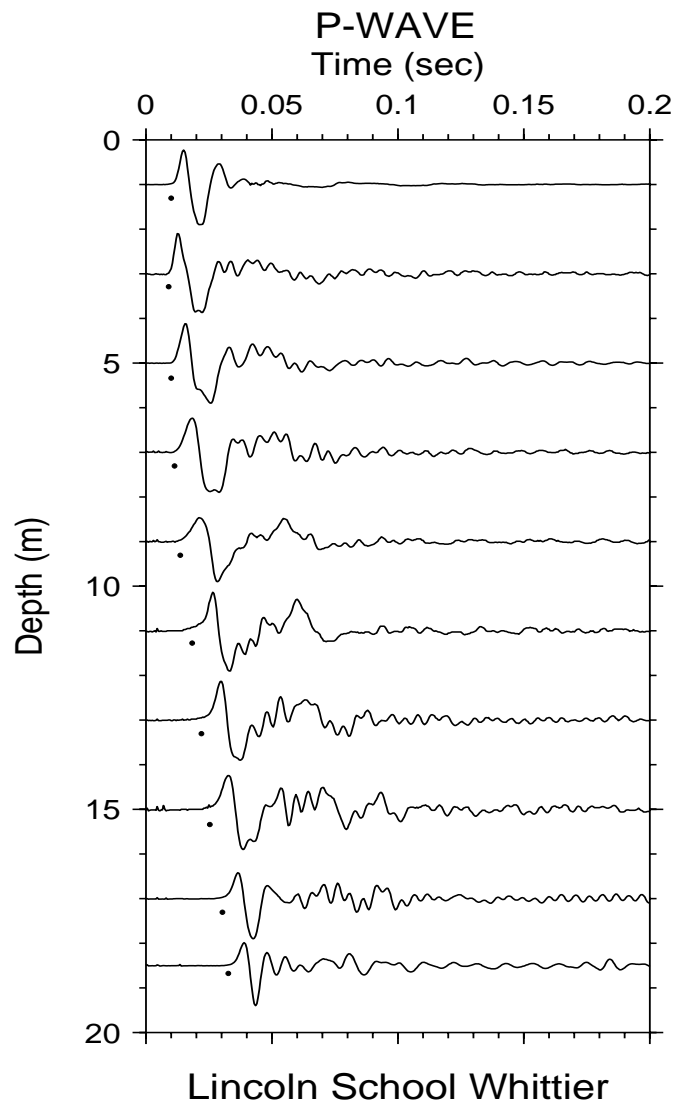


Figure A-33. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

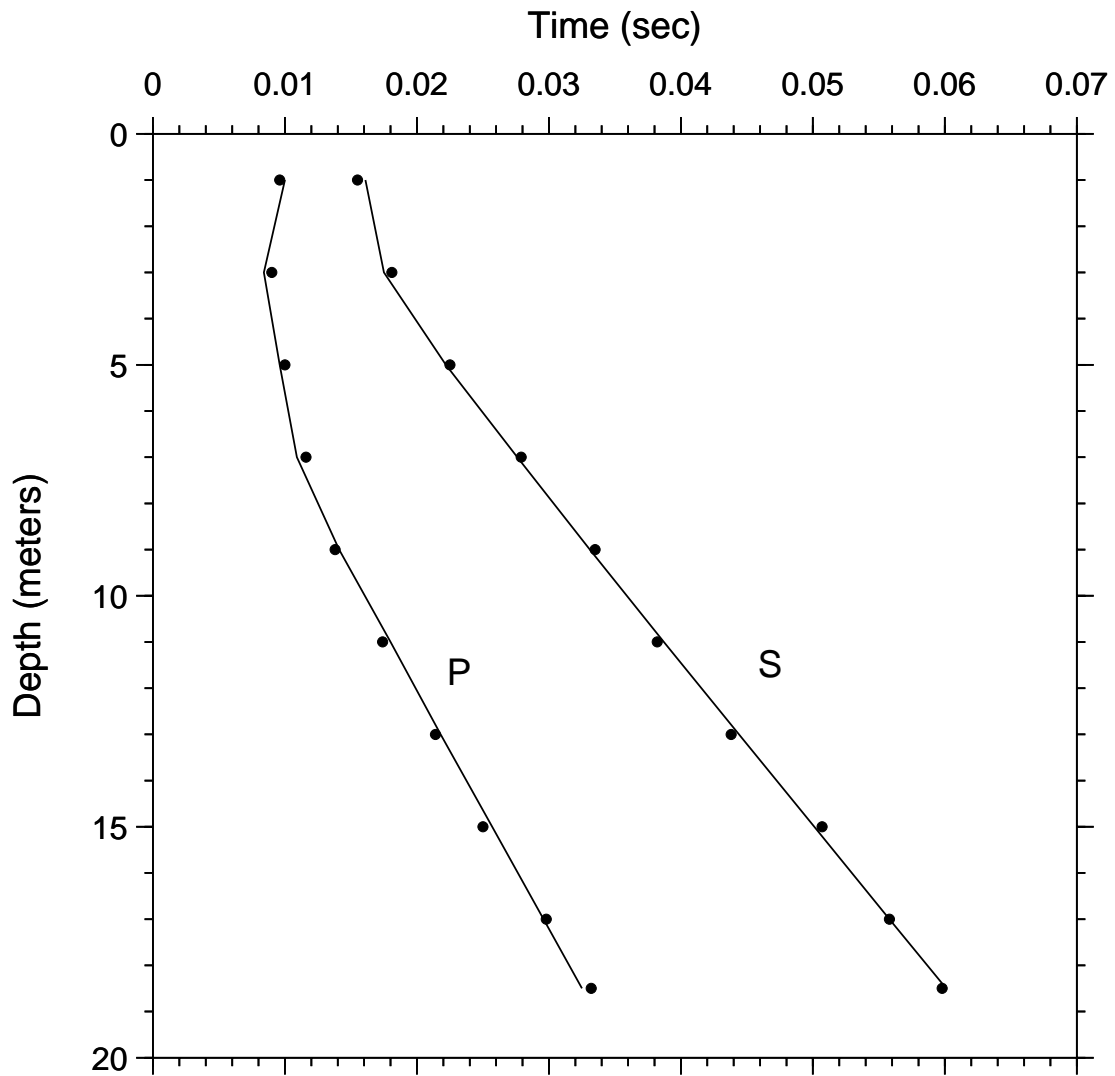

Lincoln School Whittier

Oct 24, 2001
 F:\WLB\WLBSTIME.GRA
 F:\WLB\WLBS.DT

Figure A-34. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

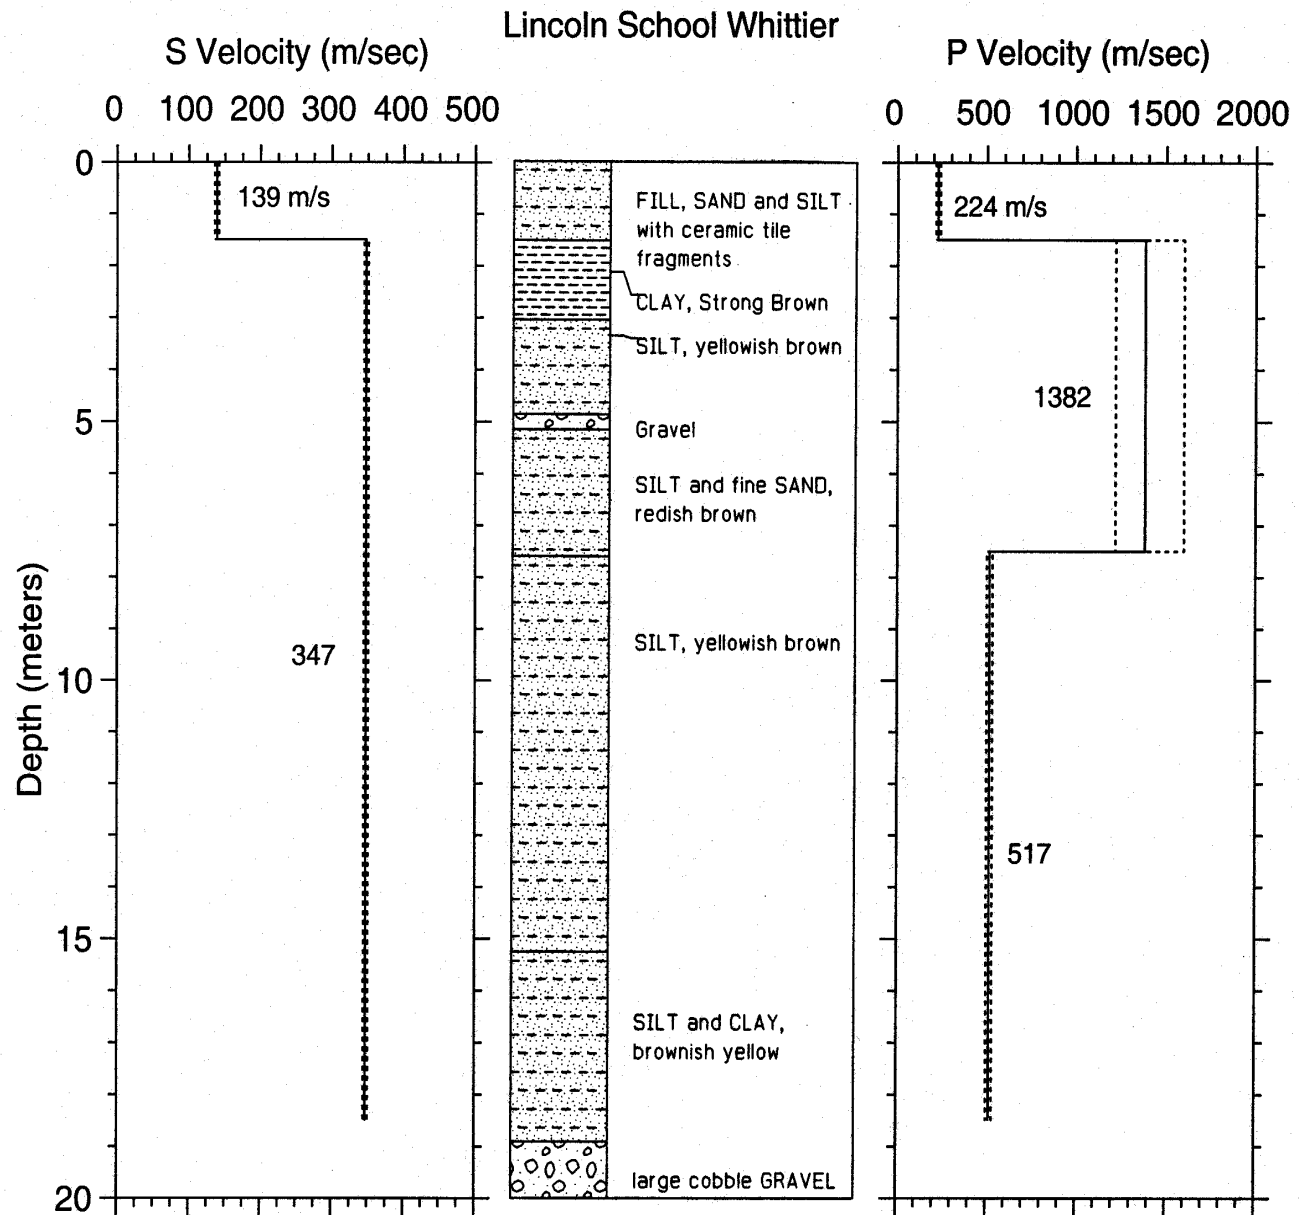


Figure A-35. S- and P-wave velocity profiles. Dashed lines represent one standard deviation. Lithology is shown for correlation with velocities.

ABLE A-13. S-wave arrival times and velocity summaries.

Location: Lincoln School - Whittier: S Coordinates: 33.98535 -118.04060 Hole_Code: 301
 hoffset = 2.00 travel-time file: F:\WLB\WLBS.TT

nlayers = 2

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
1.0	3.3	0.0155	0.0072	139	1	-0.0006	1.5	1.5	139	135	142	4.9	4.9	455	444	466
3.0	9.8	0.0181	0.0151	198	1	0.0006	18.5	17.0	347	344	351	60.7	55.8	1140	1130	1150
5.0	16.4	0.0225	0.0209	239	1	0.0003										
7.0	23.0	0.0279	0.0266	263	1	0.0003										
9.0	29.5	0.0335	0.0324	278	1	0.0004										
11.0	36.1	0.0382	0.0382	288	1	-0.0005										
13.0	42.7	0.0438	0.0439	296	1	-0.0006										
15.0	49.2	0.0507	0.0497	302	1	0.0007										
17.0	55.8	0.0558	0.0555	307	1	0.0000										
18.5	60.7	0.0598	0.0598	309	1	-0.0002										

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model
- vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- dtb(m) = depth to bottom of layer in meters
- thk(m) = thickness of layer in meters
- v(m/s) = velocity of layer in meters per second
- vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- vu(m/s) = upper limit of velocity in meters per second
- dtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- v(ft/s) = velocity of layer in feet per second
- vl(ft/s) = lower limit of velocity in feet per second
- vu(ft/s) = upper limit of velocity in feet per second

ABLE A-14. S-wave arrival times and velocity summaries.

Location: Lincoln School Whittier: P Coordinates: 33.98535 -118.04060 Hole_Code: 301
 hoffset = 2.00 travel-time file: F:\WLB\WLBVERT.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
1.0	3.3	0.0096	0.0045	224	1	-0.0004	1.5	1.5	224	212	238	4.9	4.9	736	695	782
3.0	9.8	0.0090	0.0078	386	1	0.0006	7.5	6.0	1382	1217	1599	24.6	19.7	4535	3994	5245
5.0	16.4	0.0100	0.0092	542	1	0.0004	18.5	11.0	517	501	533	60.7	36.1	1695	1644	1749
7.0	23.0	0.0116	0.0107	656	1	0.0007										
9.0	29.5	0.0138	0.0139	646	1	-0.0003										
11.0	36.1	0.0174	0.0178	618	1	-0.0006										
13.0	42.7	0.0214	0.0217	600	1	-0.0004										
15.0	49.2	0.0250	0.0255	587	1	-0.0007										
17.0	55.8	0.0298	0.0294	578	1	0.0002										
18.5	60.7	0.0332	0.0323	572	1	0.0007										

Explanation:
 d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

WHITTIER QUADRANGLE
CALIFORNIA
7.5 MINUTE SERIES (TOPOGRAPHIC)

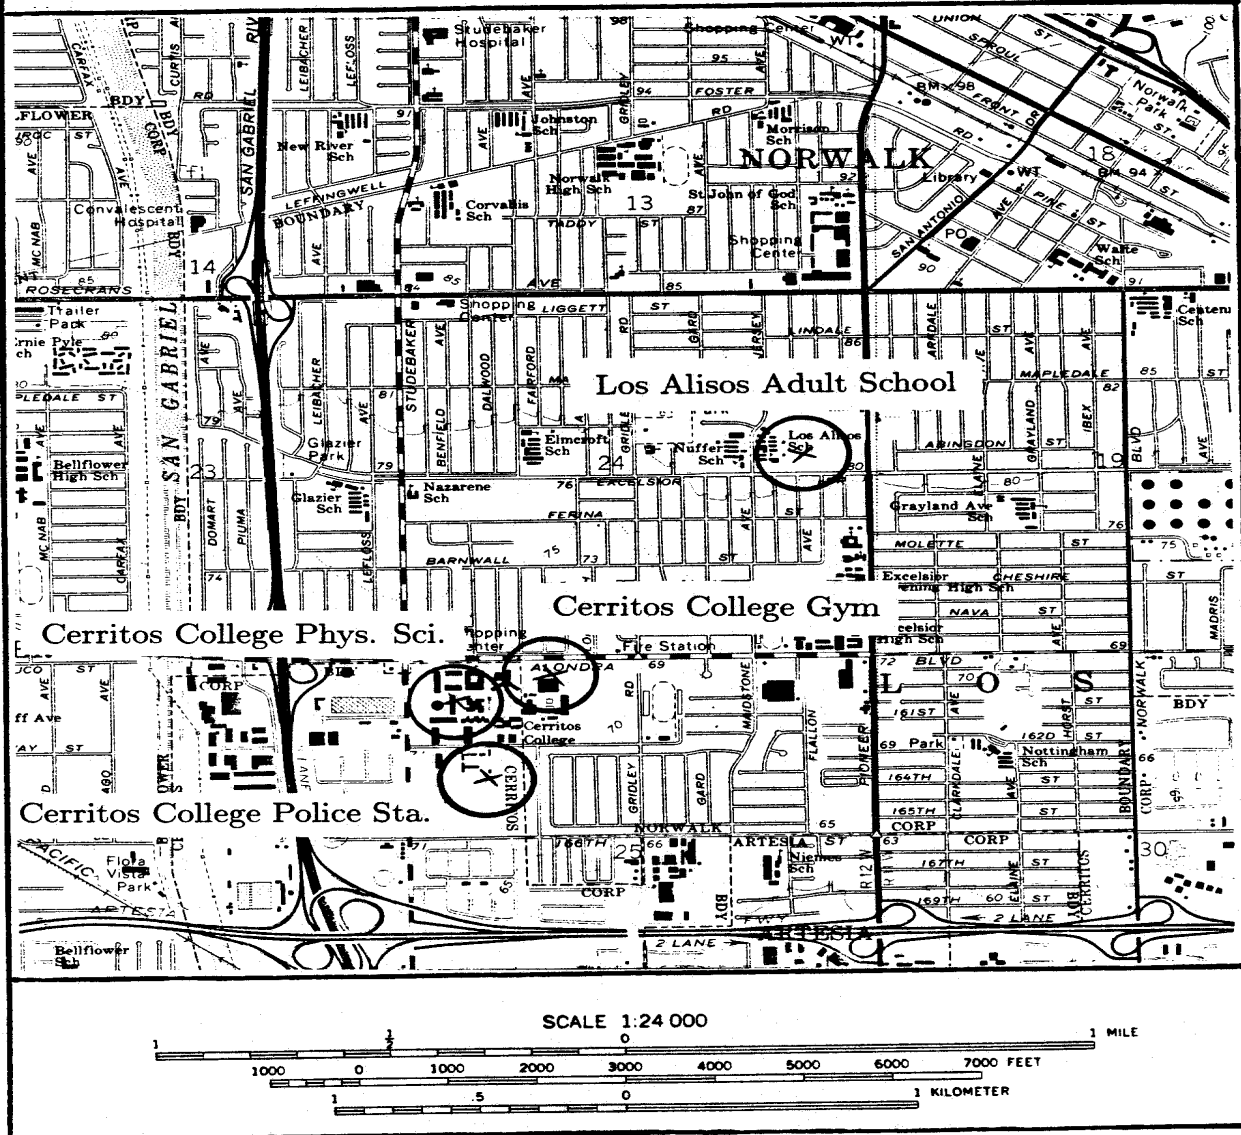


Figure A-36. Site location map for the borehole at Los Alisos Adult School.

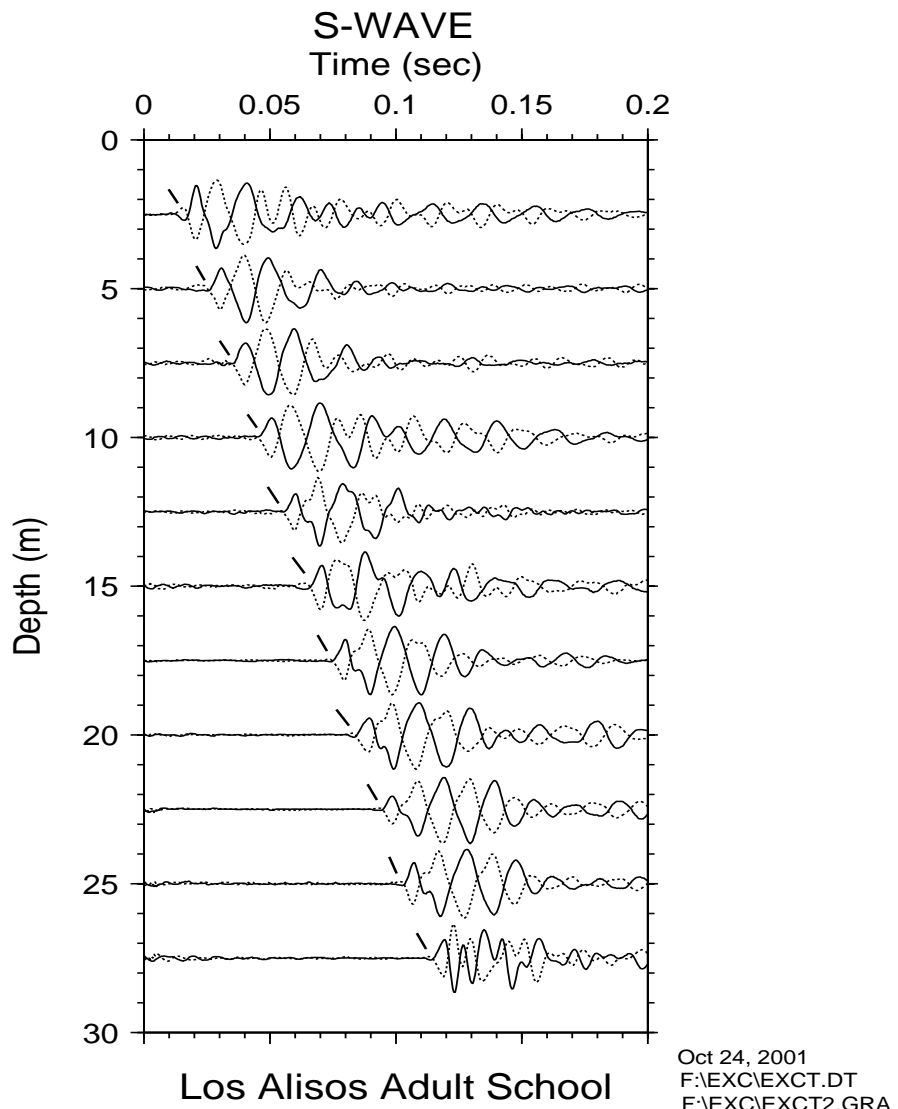


Figure A-37. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.


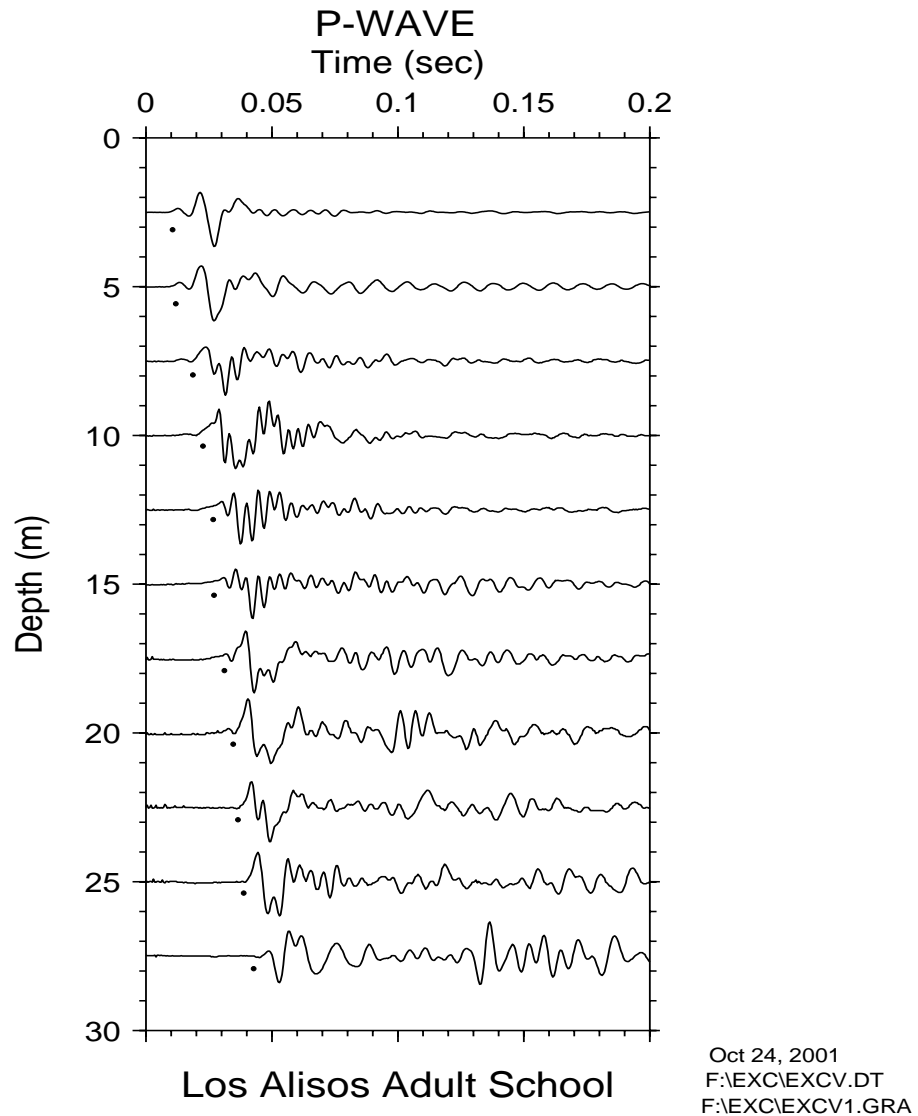


Figure A-38. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

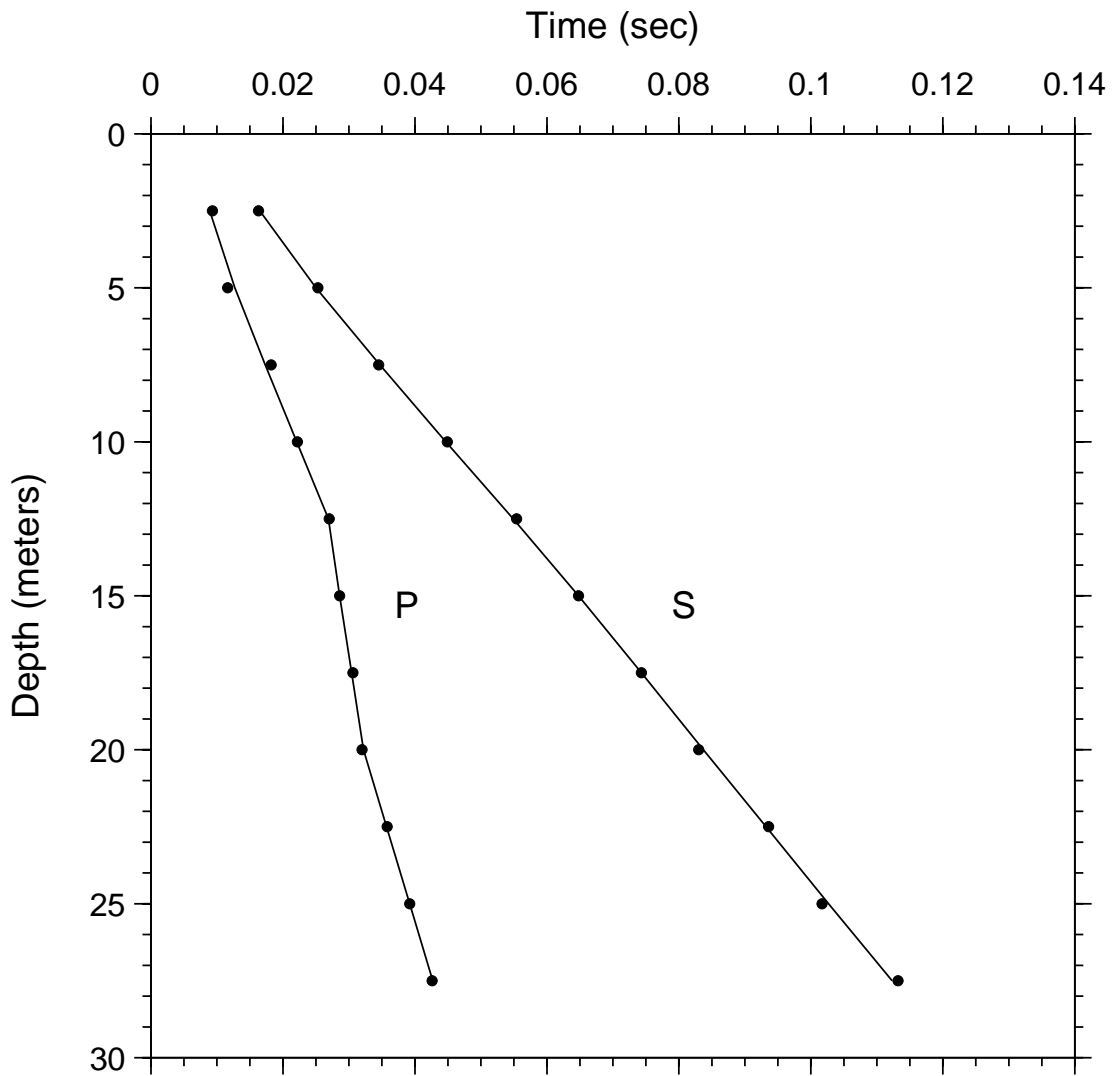

Los Alisos Adult School

Oct 15, 2001
 F:\EXC\EXCP.DT
 F:\EXC\EXCPTIME.G

Figure A-39. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by hoffset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

Los Alisos Adult School

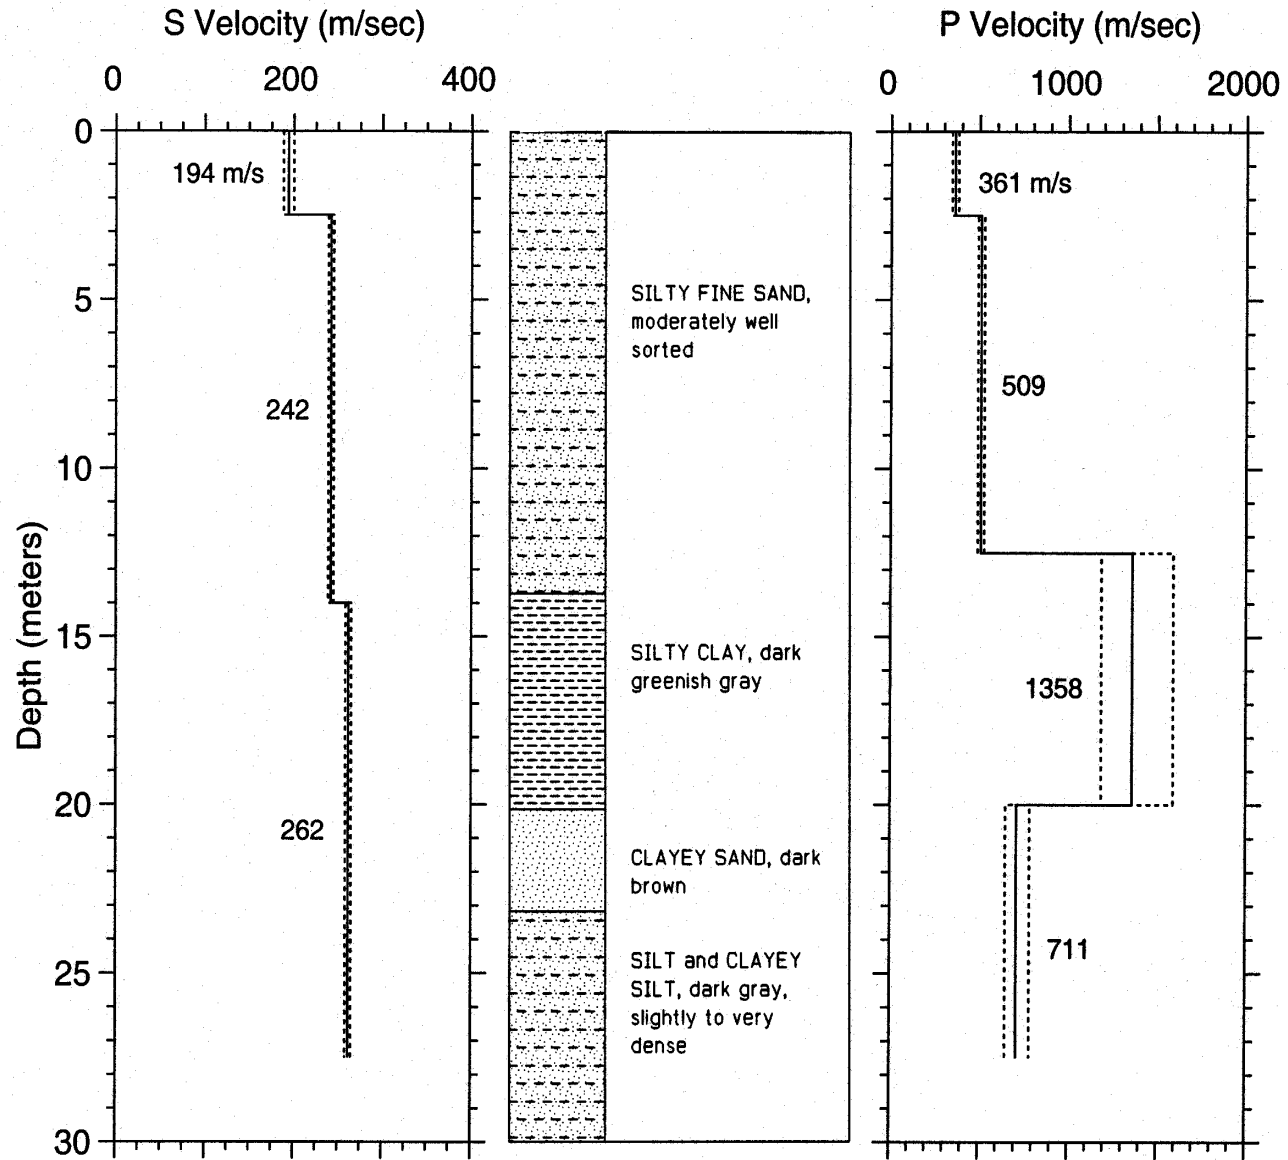


Figure A-40. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is shown for correlation with velocities.

ABLE A-15. S-wave arrival times and velocity summaries.

Location: Los Alisos: S Coordinates: 33.89560 -118.08427 Hole_Code: 302
 hoffset = 2.00 travel-time file: F:\EXC\EXCS.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0163	0.0129	194	1	-0.0002	2.5	2.5	194	188	200	8.2	8.2	636	618	656
5.0	16.4	0.0253	0.0232	215	1	0.0003	14.0	11.5	242	239	245	45.9	37.7	794	784	804
7.5	24.6	0.0345	0.0335	224	1	-0.0003	27.5	13.5	262	259	265	90.2	44.3	859	849	870
10.0	32.8	0.0449	0.0439	228	1	0.0001										
12.5	41.0	0.0554	0.0542	231	1	0.0005										
15.0	49.2	0.0648	0.0642	234	1	0.0000										
17.5	57.4	0.0743	0.0738	237	1	0.0000										
20.0	65.6	0.0830	0.0833	240	1	-0.0007										
22.5	73.8	0.0936	0.0929	242	1	0.0003										
25.0	82.0	0.1017	0.1024	244	1	-0.0010										
27.5	90.2	0.1132	0.1119	246	1	0.0009										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

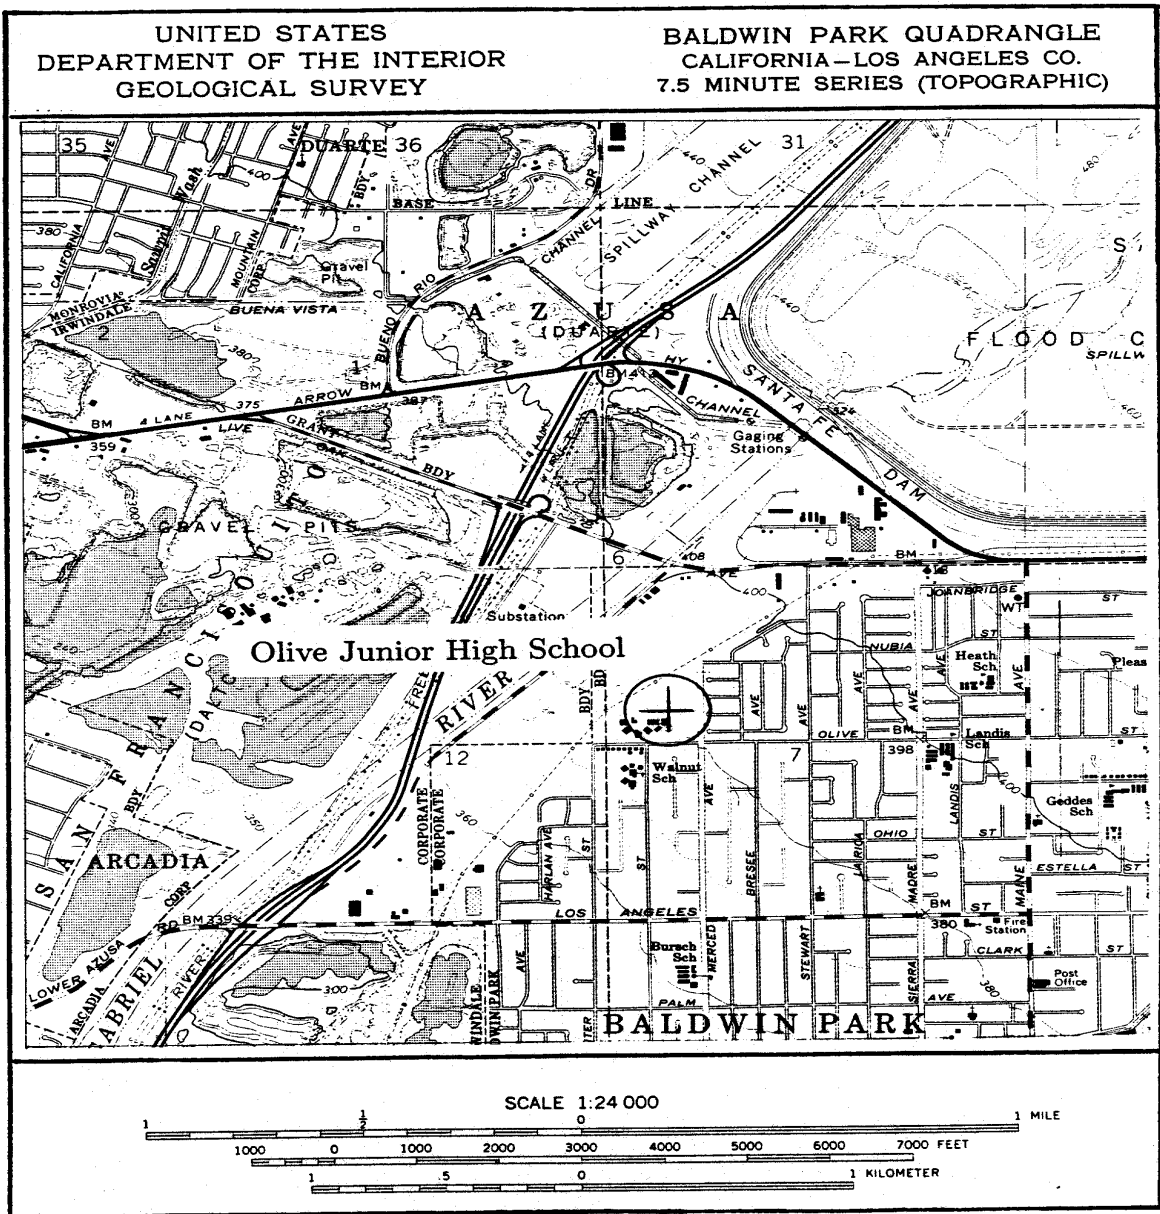


Figure A-41. Site location map for the borehole at Olive Junior High School. The accelerograph is located approximately 46 meters from the borehole.

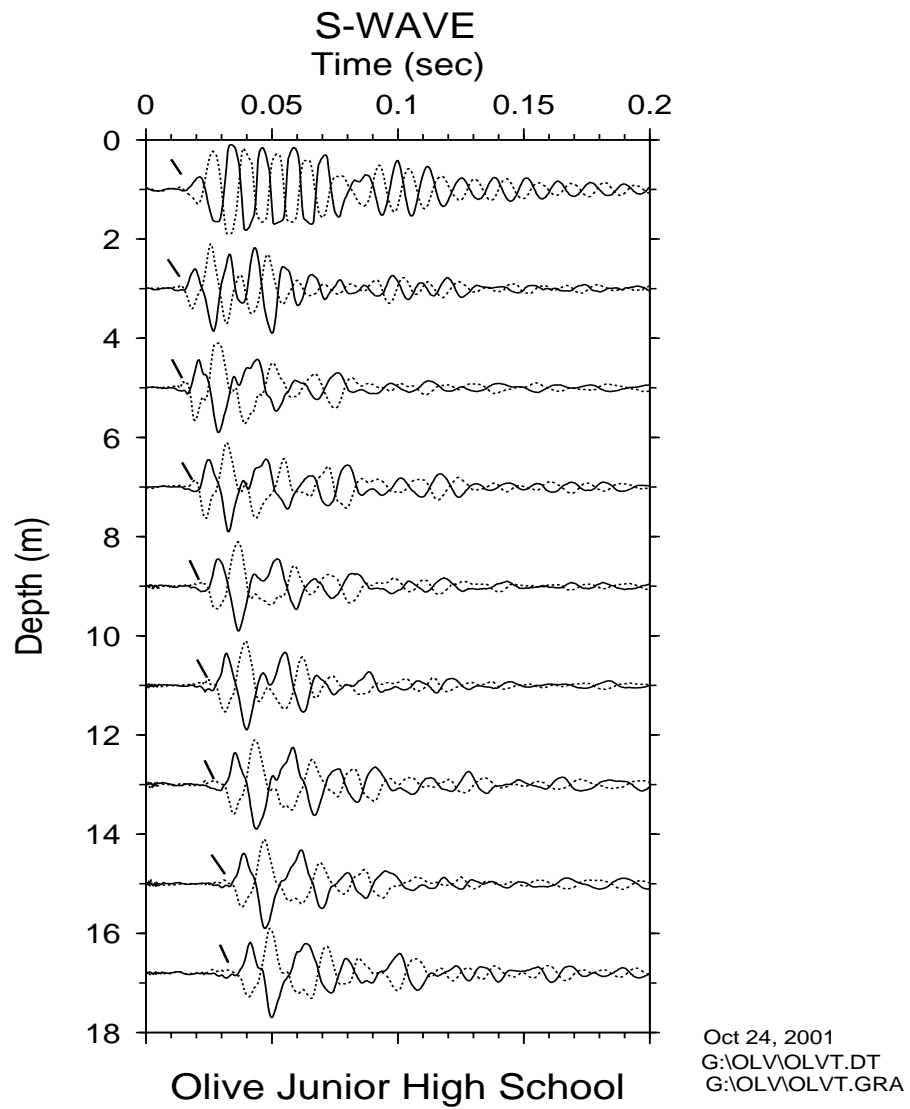


Figure A-42. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

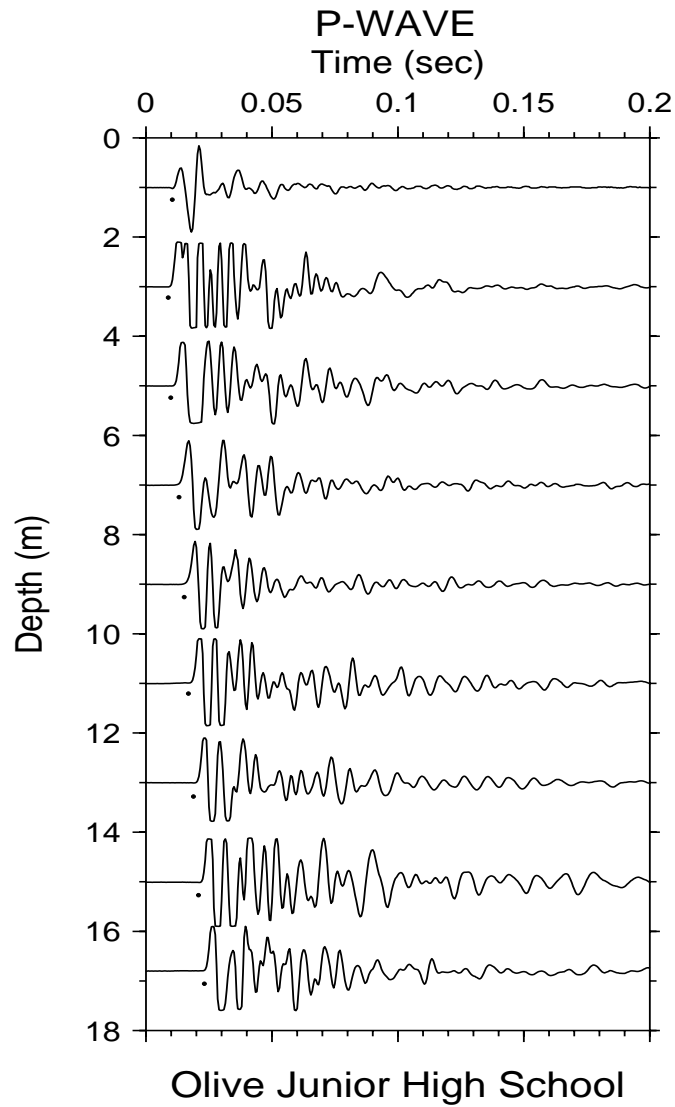


Figure A-43. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

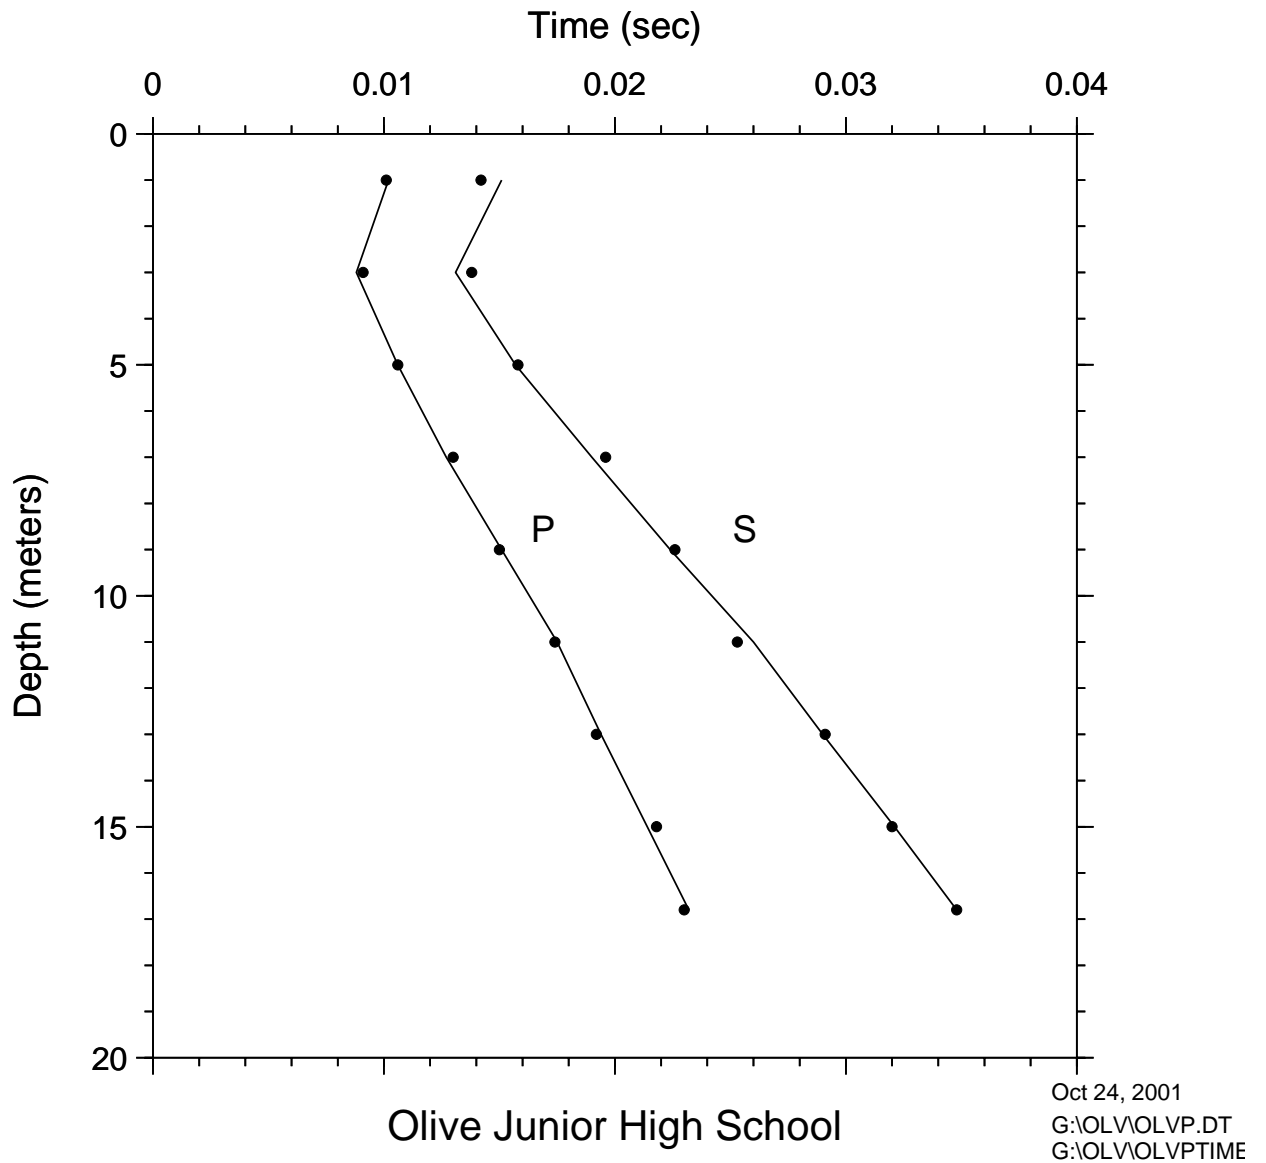


Figure A-44. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

Olive Junior High School

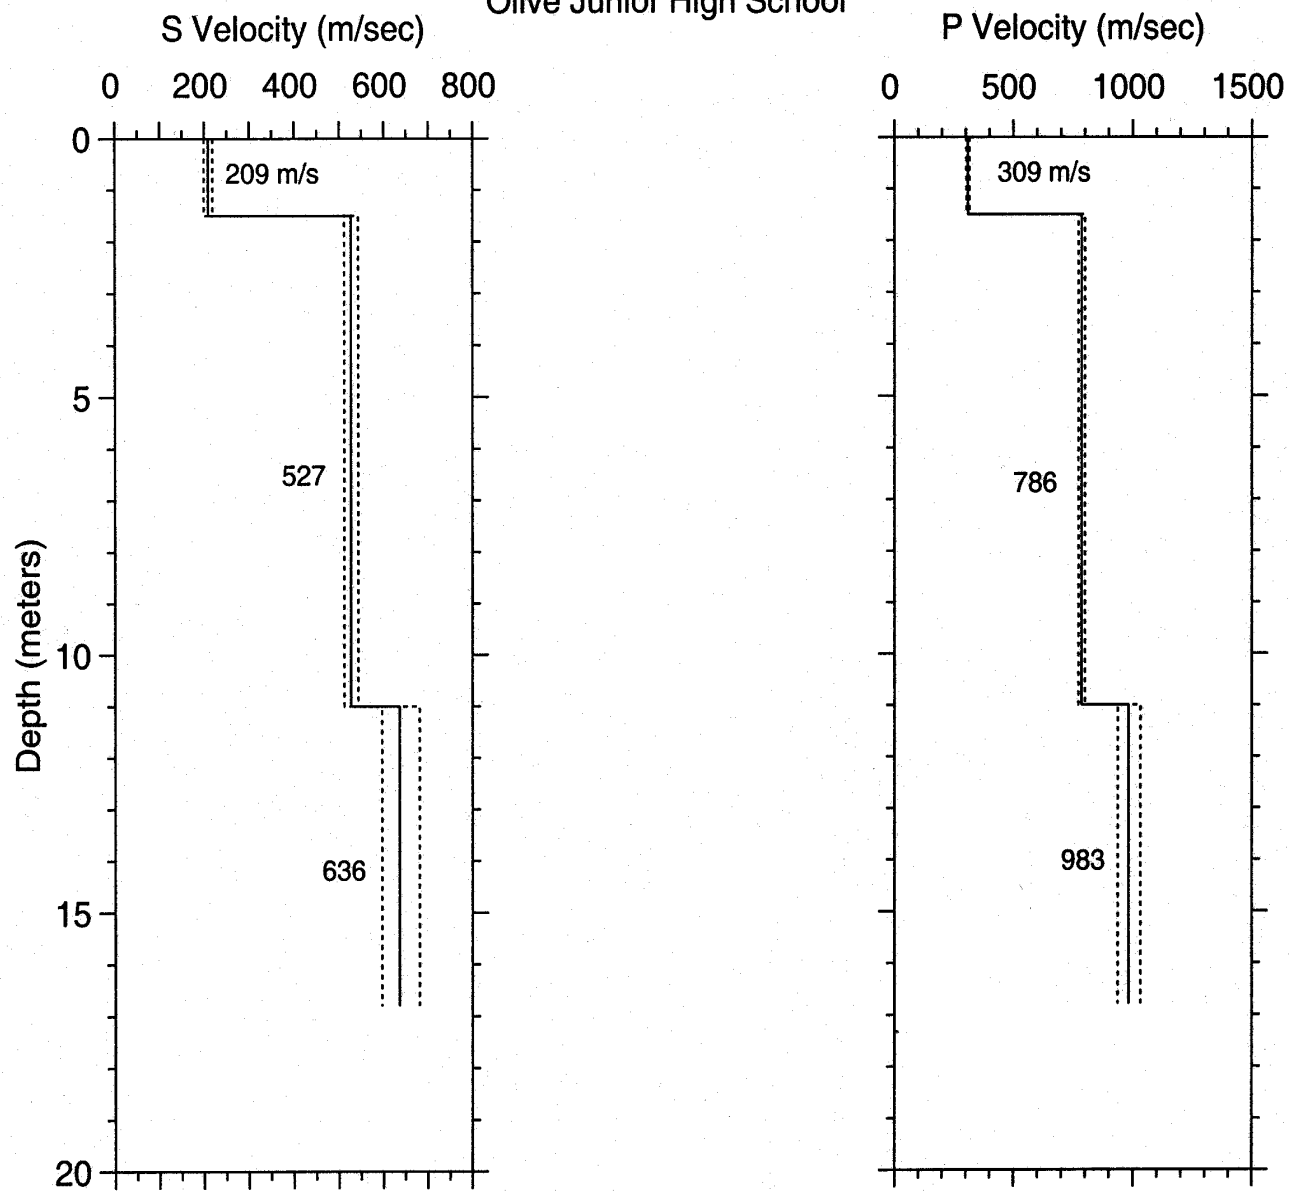


Figure A-45. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is not available from this borehole.

ABLE A-17. S-wave arrival times and velocity summaries.

Location: Olive Jr. High School: S Coordinates: 34.10073 -117.97409 Hole_Code: 303
 hoffset = 3.00 travel-time file: C:\OLV\OLVS.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
1.0	3.3	0.0142	0.0048	209	2	-0.0009	1.5	1.5	209	200	219	4.9	4.9	685	655	718
3.0	9.8	0.0138	0.0100	299	1	0.0007	11.0	9.5	527	512	543	36.1	31.2	1728	1679	1781
5.0	16.4	0.0158	0.0138	362	1	0.0001	16.8	5.8	636	597	681	55.1	19.0	2087	1957	2235
7.0	23.0	0.0196	0.0176	397	1	0.0006										
9.0	29.5	0.0226	0.0214	420	1	0.0001										
11.0	36.1	0.0253	0.0252	436	1	-0.0008										
13.0	42.7	0.0291	0.0283	459	1	0.0001										
15.0	49.2	0.0320	0.0315	476	1	0.0000										
16.8	55.1	0.0348	0.0343	489	1	0.0000										

Explanation:
 d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

ABLE A-18. P-wave arrival times and velocity summaries.

Location: Olive Jr. High School: P Coordinates: 34.10073 -117.97409 Hole_Code: 303
 hoffset = 3.00 travel-time file: C:\OLV\OLVP.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
1.0	3.3	0.0101	0.0032	309	1	-0.0001	1.5	1.5	309	302	316	4.9	4.9	1013	990	1038
3.0	9.8	0.0091	0.0068	444	1	0.0002	11.0	9.5	786	772	800	36.1	31.2	2579	2534	2625
5.0	16.4	0.0106	0.0093	537	1	0.0000	16.8	5.8	983	937	1032	55.1	19.0	3223	3075	3386
7.0	23.0	0.0130	0.0119	591	1	0.0002										
9.0	29.5	0.0150	0.0144	625	1	-0.0001										
11.0	36.1	0.0174	0.0169	649	1	-0.0001										
13.0	42.7	0.0192	0.0190	685	1	-0.0002										
15.0	49.2	0.0218	0.0210	714	1	0.0004										
16.8	55.1	0.0230	0.0228	736	1	-0.0002										

Explanation:
 d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second



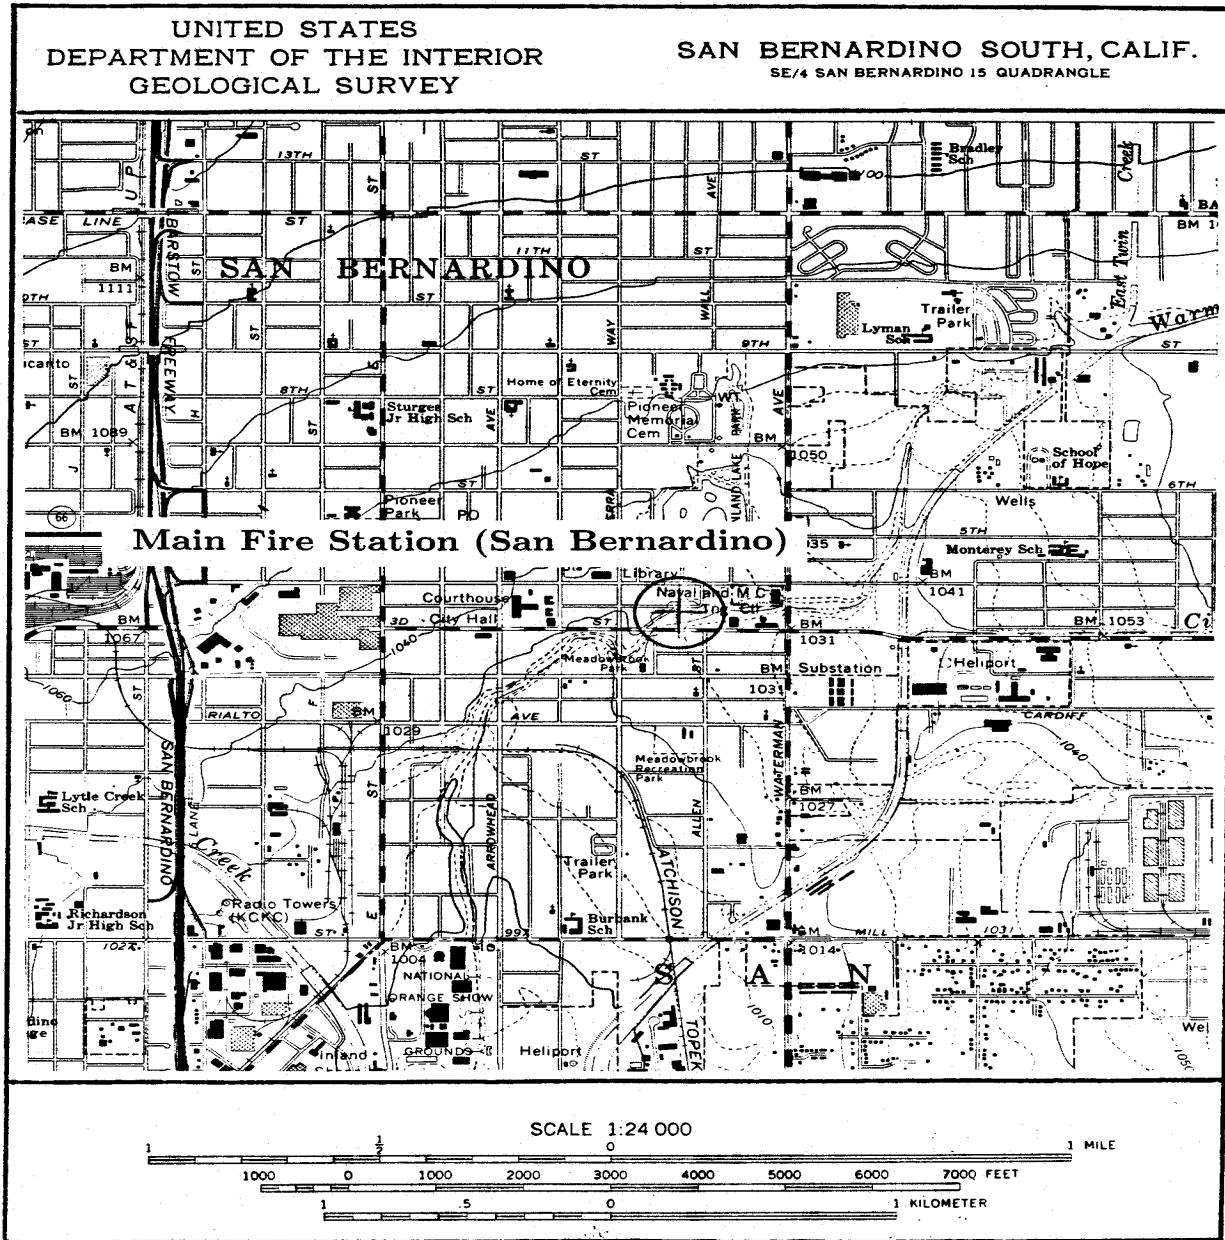


Figure A-46. Site location map for the borehole at San Bernardino Main Fire Station.

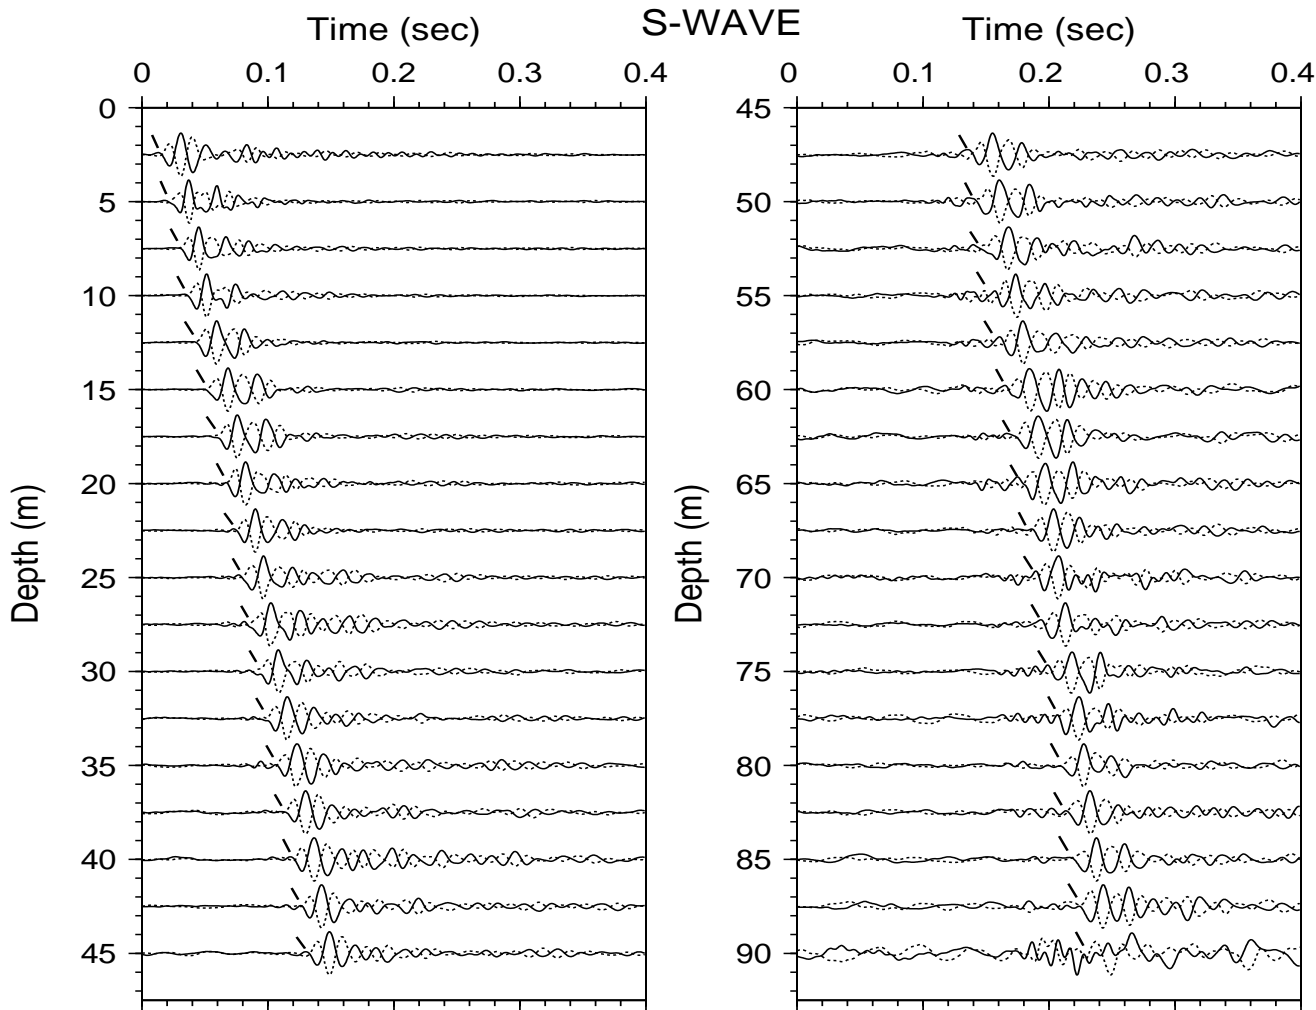

San Bernardino Main Fire Station

Figure A-47. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

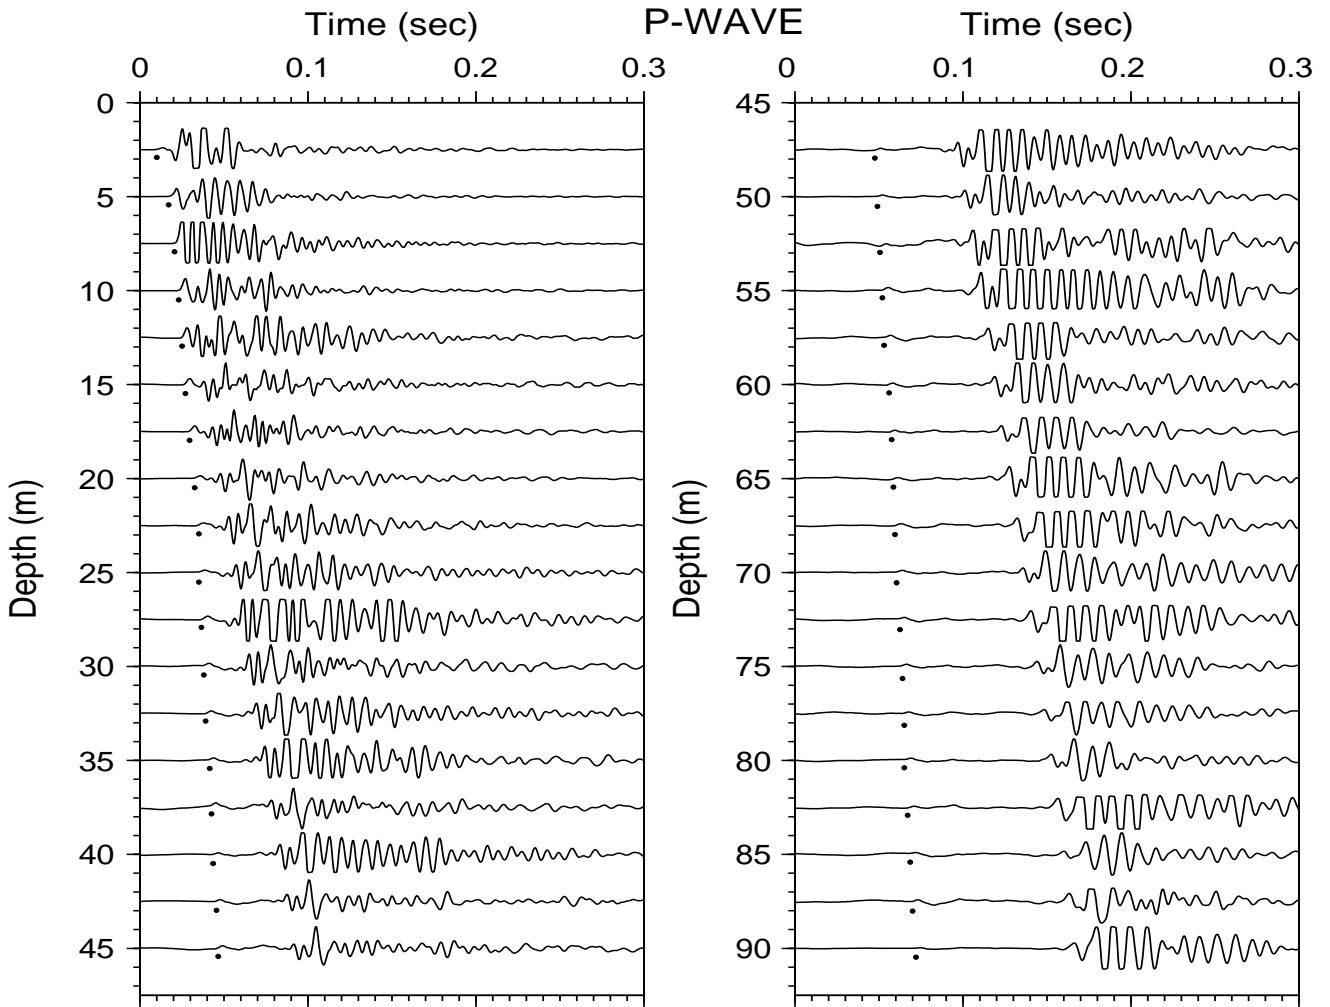


Oct 24, 2001
 F:\SB1\SB1VERT.DT
 F:\SB1\SB1V45.GRA

San Bernardino Main Fire Station

Oct 24, 2001
 F:\SB1\SB1V.DT
 F:\SB1\SB1V4.GR

Figure A-48. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

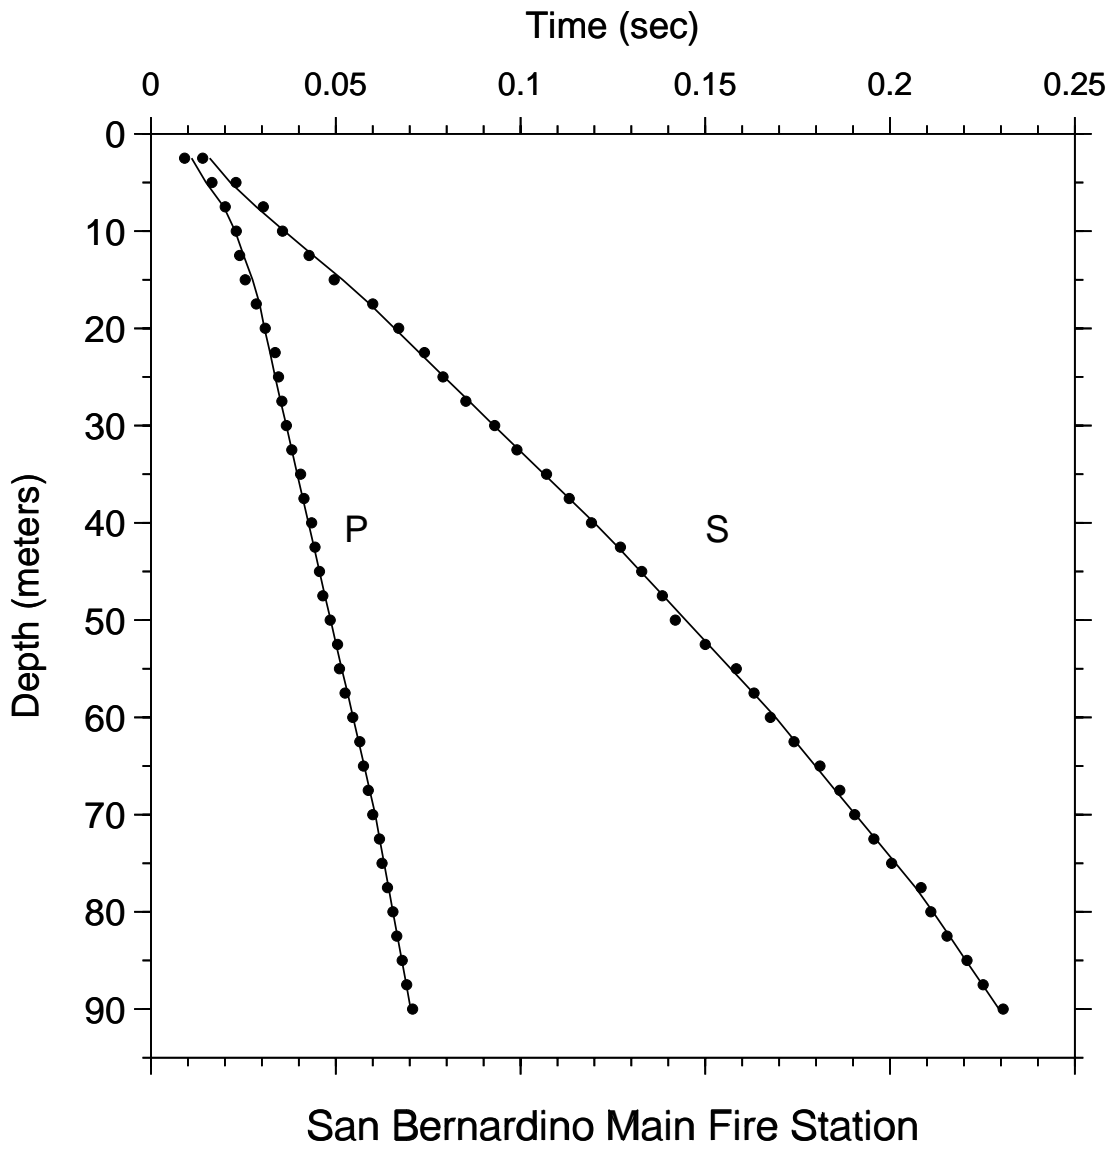

- d_obs
- d_obs

Figure A-49. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by $\text{offset} / \text{velocity}$ in the uppermost layer (see accompanying tables of velocities for specific values).

San Bernardino Main Fire Station

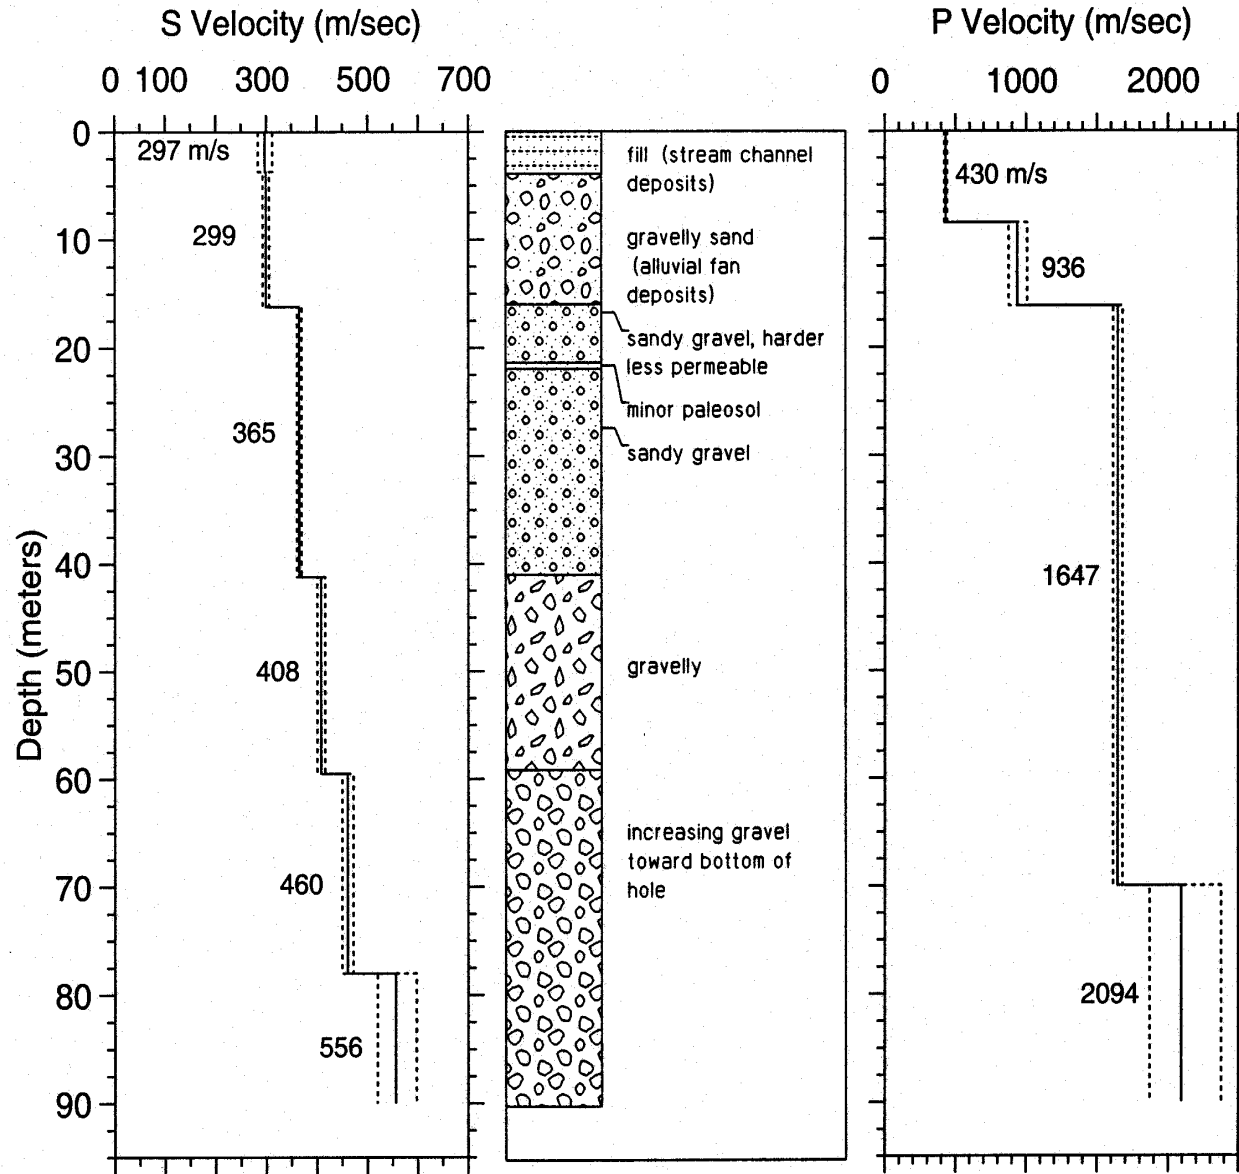


Figure A-50. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is shown for correlation with velocities.

ABLE A-19. S-wave arrival times and velocity summaries.

Location: San Bernardino Fire Station: S Coordinates: 34.10534 -117.28201 Hole_Code: 305
 hoffset = 4.00 travel-time file: F:\SB1\SB1S.TT

nlayers = 6

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0140	0.0084	297	1	-0.0019	3.7	3.7	297	284	312	12.1	12.1	976	932	1024
5.0	16.4	0.0230	0.0168	298	1	0.0015	16.2	12.5	299	293	306	53.1	41.0	982	962	1004
7.5	24.6	0.0304	0.0252	298	1	0.0019	41.2	25.0	365	360	370	135.2	82.0	1197	1182	1213
10.0	32.8	0.0356	0.0335	298	1	-0.0005	59.5	18.3	408	401	416	195.2	60.0	1339	1314	1365
12.5	41.0	0.0428	0.0419	298	1	-0.0011	78.0	18.5	460	450	472	255.9	60.7	1511	1475	1548
15.0	49.2	0.0496	0.0503	299	1	-0.0024	90.0	12.0	556	520	597	295.3	39.4	1824	1706	1960
17.5	57.4	0.0600	0.0578	303	1	0.0008										
20.0	65.6	0.0670	0.0647	309	1	0.0011										
22.5	73.8	0.0740	0.0715	315	1	0.0015										
25.0	82.0	0.0790	0.0784	319	1	-0.0003										
27.5	90.2	0.0852	0.0852	323	2	-0.0009										
30.0	98.4	0.0930	0.0921	326	1	0.0002										
32.5	106.6	0.0990	0.0989	329	1	-0.0006										
35.0	114.8	0.1070	0.1058	331	1	0.0006										
37.5	123.0	0.1132	0.1126	333	1	0.0000										
40.0	131.2	0.1192	0.1195	335	1	-0.0008										
42.5	139.4	0.1270	0.1259	337	1	0.0005										
45.0	147.6	0.1328	0.1321	341	1	0.0003										
47.5	155.8	0.1384	0.1382	344	1	-0.0002										
50.0	164.0	0.1419	0.1443	346	2	-0.0028										
52.5	172.2	0.1500	0.1505	349	2	-0.0008										
55.0	180.4	0.1584	0.1566	351	1	0.0015										
57.5	188.6	0.1632	0.1627	353	1	0.0002										
60.0	196.9	0.1676	0.1687	356	1	-0.0014										
62.5	205.1	0.1740	0.1741	359	1	-0.0004										
65.0	213.3	0.1810	0.1796	362	1	0.0012										
67.5	221.5	0.1864	0.1850	365	1	0.0012										
70.0	229.7	0.1904	0.1904	368	1	-0.0002										
72.5	237.9	0.1956	0.1959	370	1	-0.0005										
75.0	246.1	0.2004	0.2013	373	1	-0.0011										
77.5	254.3	0.2084	0.2067	375	1	0.0015										
80.0	262.5	0.2110	0.2114	378	1	-0.0006										
82.5	270.7	0.2154	0.2159	382	1	-0.0007										
85.0	278.9	0.2208	0.2204	386	2	0.0003										
87.5	287.1	0.2252	0.2249	389	1	0.0002										
90.0	295.3	0.2306	0.2294	392	3	0.0011										

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model
- vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- dtb(m) = depth to bottom of layer in meters
- thk(m) = thickness of layer in meters
- v(m/s) = velocity of layer in meters per second
- vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- vu(m/s) = upper limit of velocity in meters per second
- dtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- v(ft/s) = velocity of layer in feet per second
- vl(ft/s) = lower limit of velocity in feet per second
- vu(ft/s) = upper limit of velocity in feet per second

ABLE A-20. P-wave arrival times and velocity summaries.

Location: San Bernardino Fire Station: P Coordinates: 34.10534 -117.28201 Hole_Code: 305
 hoffset = 4.00 travel-time file: F:\SB1\SB1P.TT

nlayers = 4

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0091	0.0058	430	1	-0.0019	8.5	8.5	430	421	441	27.9	27.9	1412	1381	1445
5.0	16.4	0.0165	0.0116	430	1	0.0016	16.2	7.7	936	876	1006	53.1	25.3	3072	2873	3301
7.5	24.6	0.0201	0.0174	430	1	0.0003	70.0	53.8	1647	1614	1680	229.7	176.5	5402	5295	5513
10.0	32.8	0.0231	0.0214	468	1	0.0002	90.0	20.0	2094	1870	2378	295.3	65.6	6870	6136	7803
12.5	41.0	0.0240	0.0240	520	1	-0.0010										
15.0	49.2	0.0255	0.0267	562	1	-0.0020										
17.5	57.4	0.0285	0.0288	608	1	-0.0008										
20.0	65.6	0.0309	0.0303	660	1	0.0002										
22.5	73.8	0.0336	0.0318	707	1	0.0015										
25.0	82.0	0.0345	0.0333	750	1	0.0009										
27.5	90.2	0.0354	0.0349	789	1	0.0003										
30.0	98.4	0.0366	0.0364	825	1	0.0000										
32.5	106.6	0.0381	0.0379	858	1	0.0000										
35.0	114.8	0.0405	0.0394	888	1	0.0009										
37.5	123.0	0.0414	0.0409	916	1	0.0004										
40.0	131.2	0.0435	0.0424	942	3	0.0009										
42.5	139.4	0.0444	0.0440	967	1	0.0003										
45.0	147.6	0.0456	0.0455	989	1	0.0000										
47.5	155.8	0.0465	0.0470	1011	3	-0.0006										
50.0	164.0	0.0485	0.0485	1031	4	-0.0001										
52.5	172.2	0.0505	0.0500	1049	3	0.0003										
55.0	180.4	0.0510	0.0516	1067	1	-0.0006										
57.5	188.6	0.0525	0.0531	1083	2	-0.0006										
60.0	196.9	0.0546	0.0546	1099	3	0.0000										
62.5	205.1	0.0565	0.0561	1114	2	0.0003										
65.0	213.3	0.0575	0.0576	1128	2	-0.0002										
67.5	221.5	0.0588	0.0591	1141	2	-0.0004										
70.0	229.7	0.0600	0.0607	1154	2	-0.0007										
72.5	237.9	0.0618	0.0619	1172	2	-0.0001										
75.0	246.1	0.0625	0.0630	1190	2	-0.0006										
77.5	254.3	0.0640	0.0642	1206	2	-0.0003										
80.0	262.5	0.0655	0.0654	1223	2	0.0000										
82.5	270.7	0.0665	0.0666	1238	2	-0.0002										
85.0	278.9	0.0680	0.0678	1253	2	0.0001										
87.5	287.1	0.0692	0.0690	1268	2	0.0001										
90.0	295.3	0.0708	0.0702	1282	3	0.0005										

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model
- vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- dtb(m) = depth to bottom of layer in meters
- thk(m) = thickness of layer in meters
- v(m/s) = velocity of layer in meters per second
- vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- vu(m/s) = upper limit of velocity in meters per second
- dtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- v(ft/s) = velocity of layer in feet per second
- vl(ft/s) = lower limit of velocity in feet per second
- vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

MOUNT WILSON QUADRANGLE
CALIFORNIA-LOS ANGELES CO.
7.5-MINUTE SERIES (TOPOGRAPHIC)

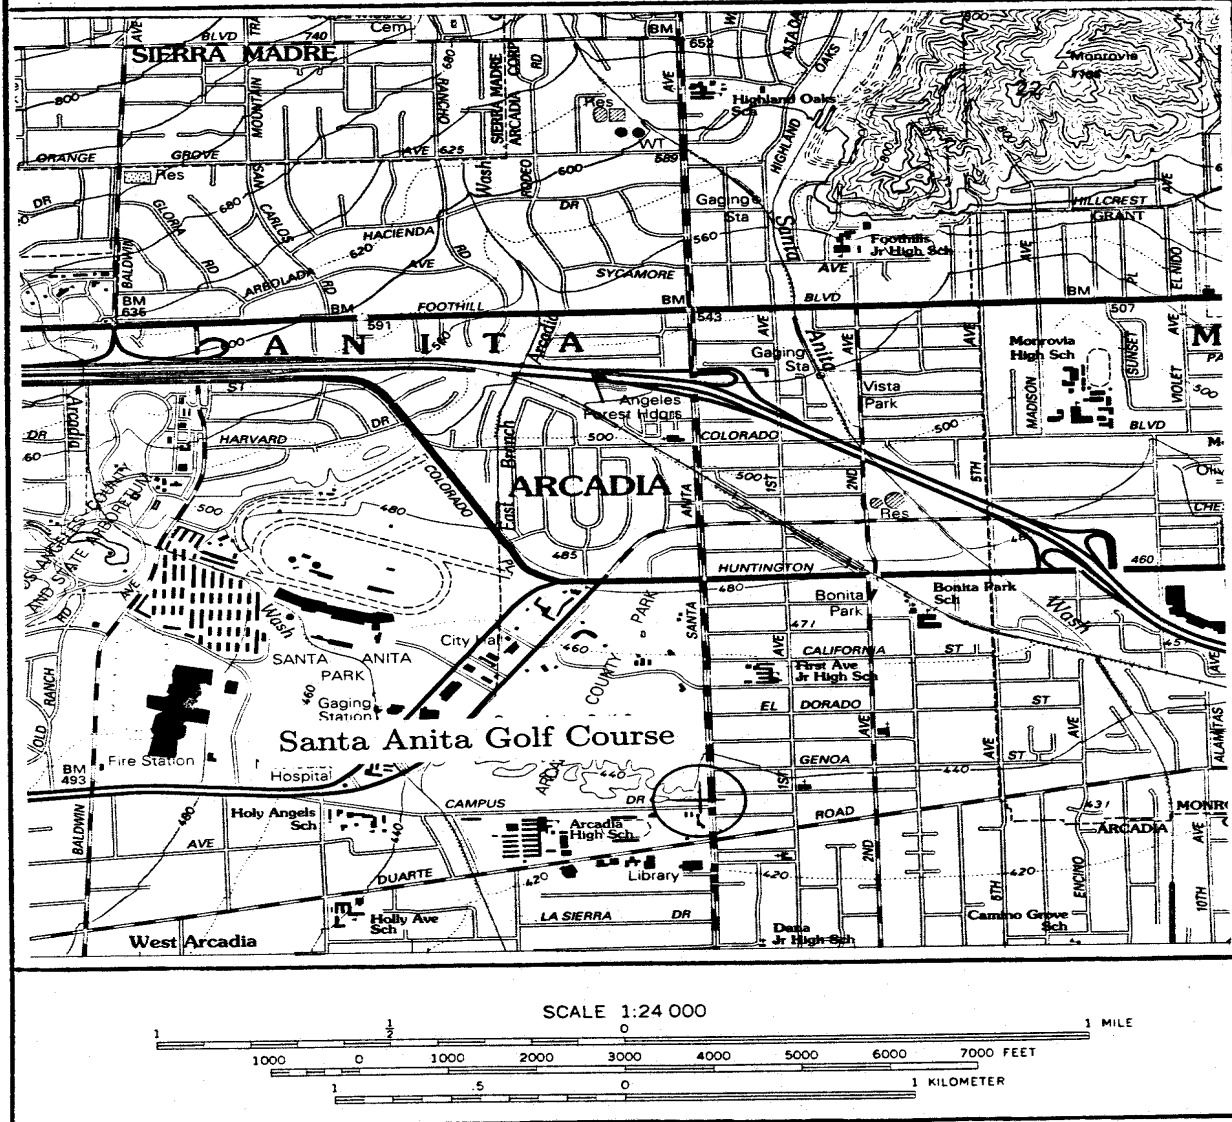


Figure A-51. Site location map for the borehole at Santa Anita Golf Course.

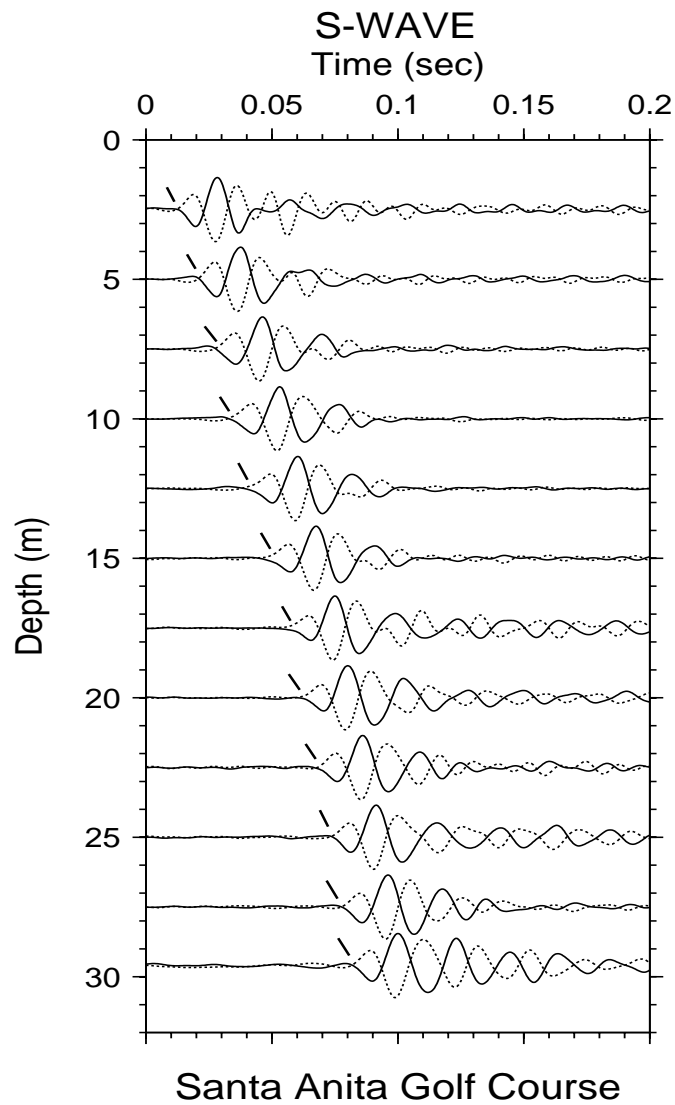


Figure A-52. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

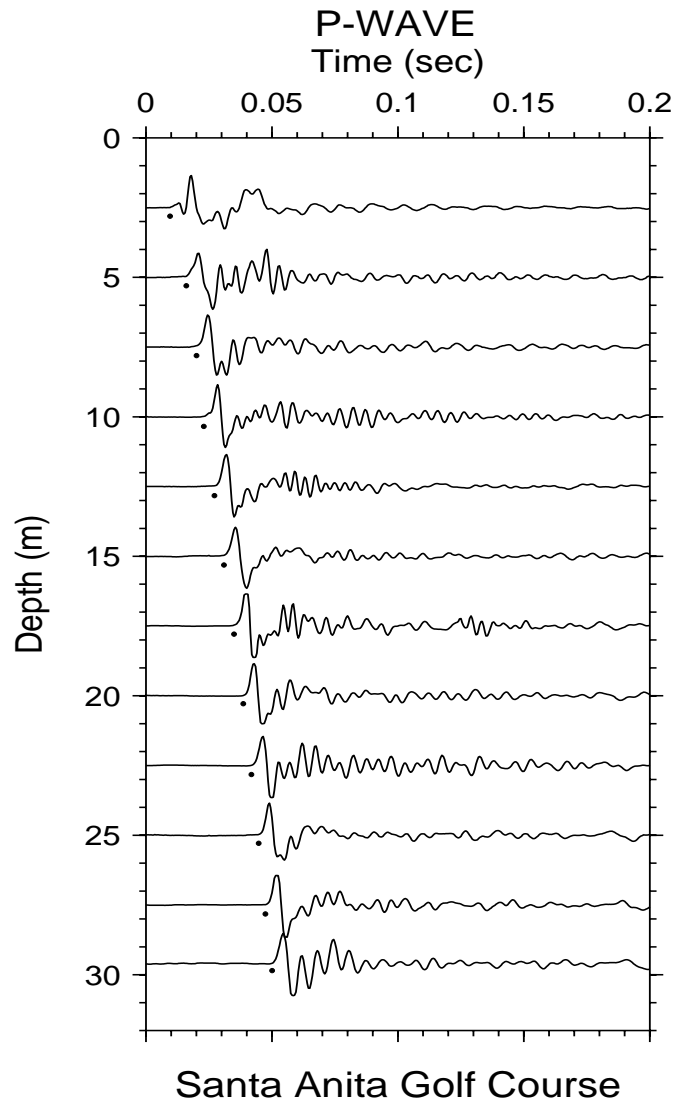


Figure A-53. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

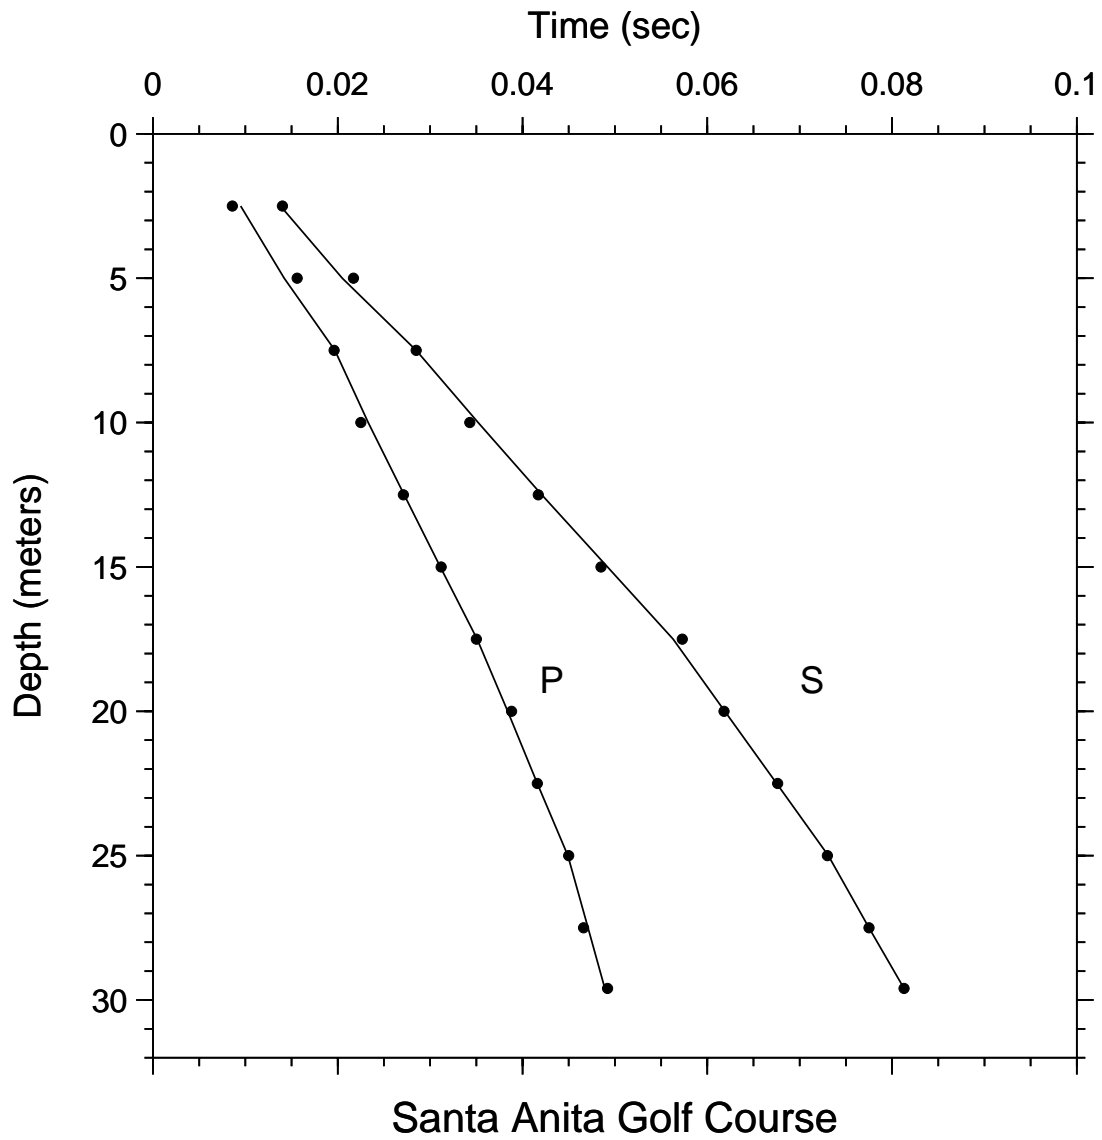


Figure A-54. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

Santa Anita Golf Course

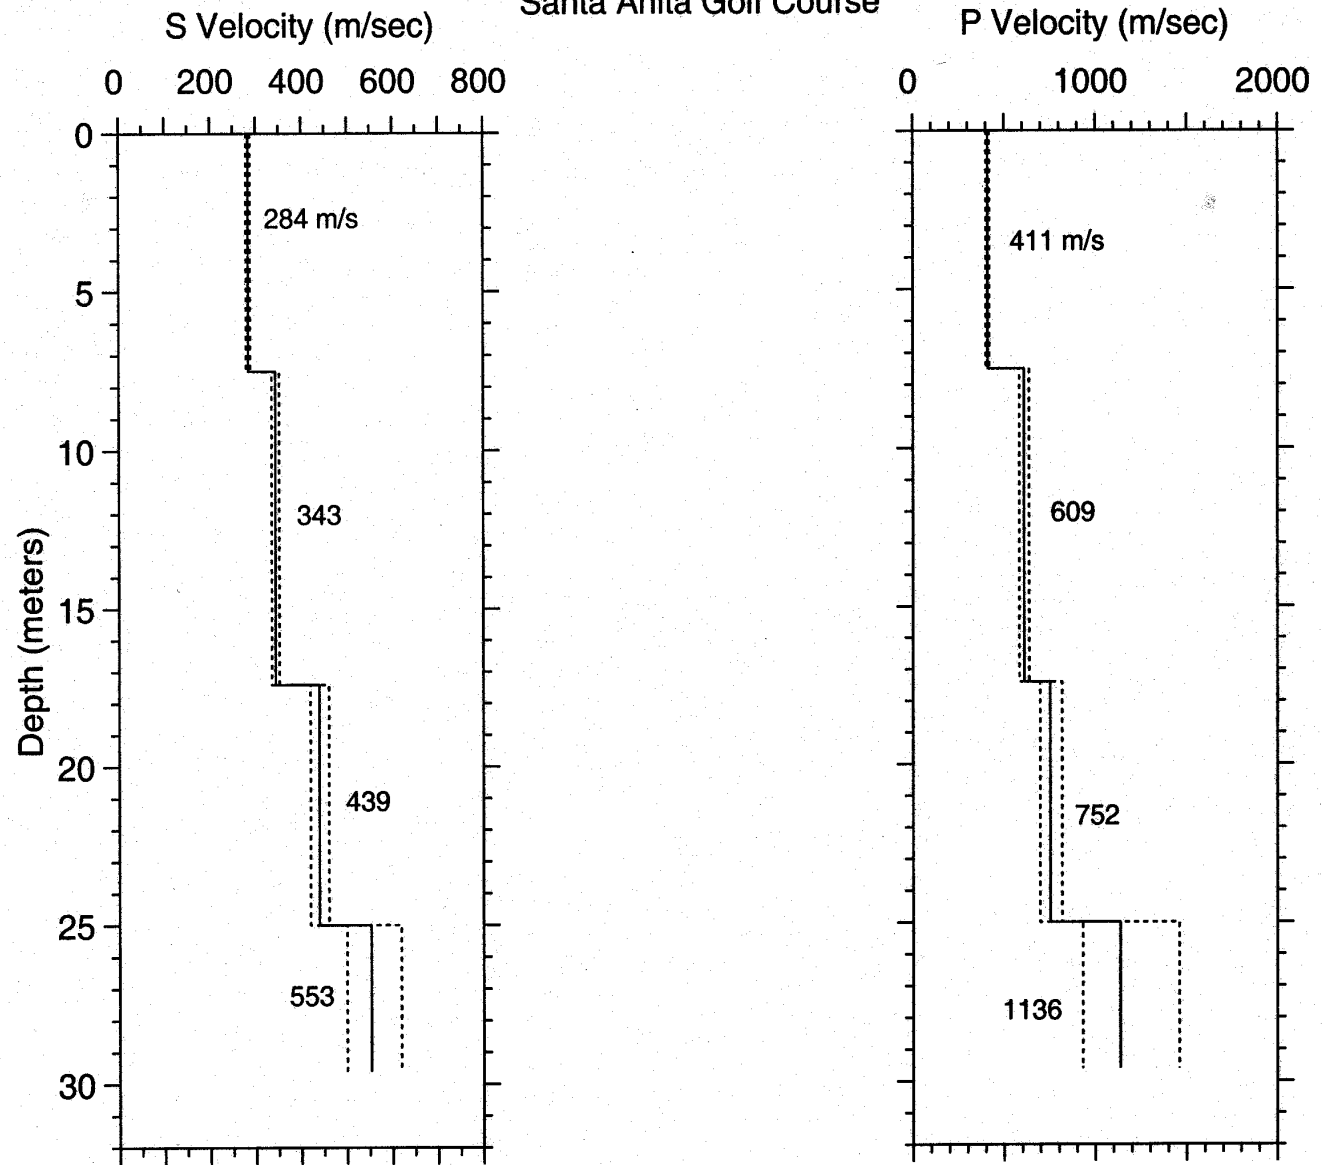


Figure A-55. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is not available from this borehole.

ABLE A-21. S-wave arrival times and velocity summaries.

Location: Santa Anita Golf Course: S Coordinates: 34.13096 -118.03070 Hole_Code: 304
 hoffset = 3.00 travel-time file: F:\SAG\SAGS_RE.TT

nlayers = 4

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0140	0.0088	284	1	0.0002	7.5	7.5	284	279	288	24.6	24.6	931	917	946
5.0	16.4	0.0217	0.0176	284	1	0.0012	17.4	9.9	343	335	352	57.1	32.5	1126	1099	1154
7.5	24.6	0.0285	0.0264	284	1	0.0000	25.0	7.6	439	420	460	82.0	24.9	1441	1377	1510
10.0	32.8	0.0343	0.0337	297	1	-0.0009	29.6	4.6	553	500	619	97.1	15.1	1814	1640	2031
12.5	41.0	0.0417	0.0410	305	1	-0.0004										
15.0	49.2	0.0485	0.0483	311	1	-0.0007										
17.5	57.4	0.0573	0.0555	315	1	0.0010										
20.0	65.6	0.0618	0.0612	327	1	-0.0001										
22.5	73.8	0.0676	0.0669	336	1	0.0001										
25.0	82.0	0.0730	0.0726	344	1	-0.0001										
27.5	90.2	0.0775	0.0771	357	1	0.0000										
29.6	97.1	0.0813	0.0809	366	1	0.0000										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

ABLE A22. P-wave arrival times and velocity summaries.

Location: Santa Anita Golf Course: P Coordinates: 34.13096 -118.03075 Hole_Code: 304
 hoffset = 3.00 travel-time file: F:\SAG\SAGP.TT

nlayers = 4

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0086	0.0061	411	1	-0.0009	7.5	7.5	411	401	421	24.6	24.6	1348	1317	1381
5.0	16.4	0.0156	0.0122	411	1	0.0014	17.4	9.9	609	584	637	57.1	32.5	1999	1915	2091
7.5	24.6	0.0196	0.0182	411	1	-0.0001	25.0	7.6	752	696	817	82.0	24.9	2466	2285	2679
10.0	32.8	0.0225	0.0224	447	1	-0.0008	29.6	4.6	1136	930	1459	97.1	15.1	3727	3052	4785
12.5	41.0	0.0271	0.0265	472	1	0.0000										
15.0	49.2	0.0312	0.0306	491	1	0.0001										
17.5	57.4	0.0350	0.0346	505	1	-0.0001										
20.0	65.6	0.0388	0.0380	527	1	0.0005										
22.5	73.8	0.0416	0.0413	545	1	-0.0001										
25.0	82.0	0.0450	0.0446	560	1	0.0001										
27.5	90.2	0.0466	0.0468	587	1	-0.0005										
29.6	97.1	0.0492	0.0487	608	1	0.0003										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

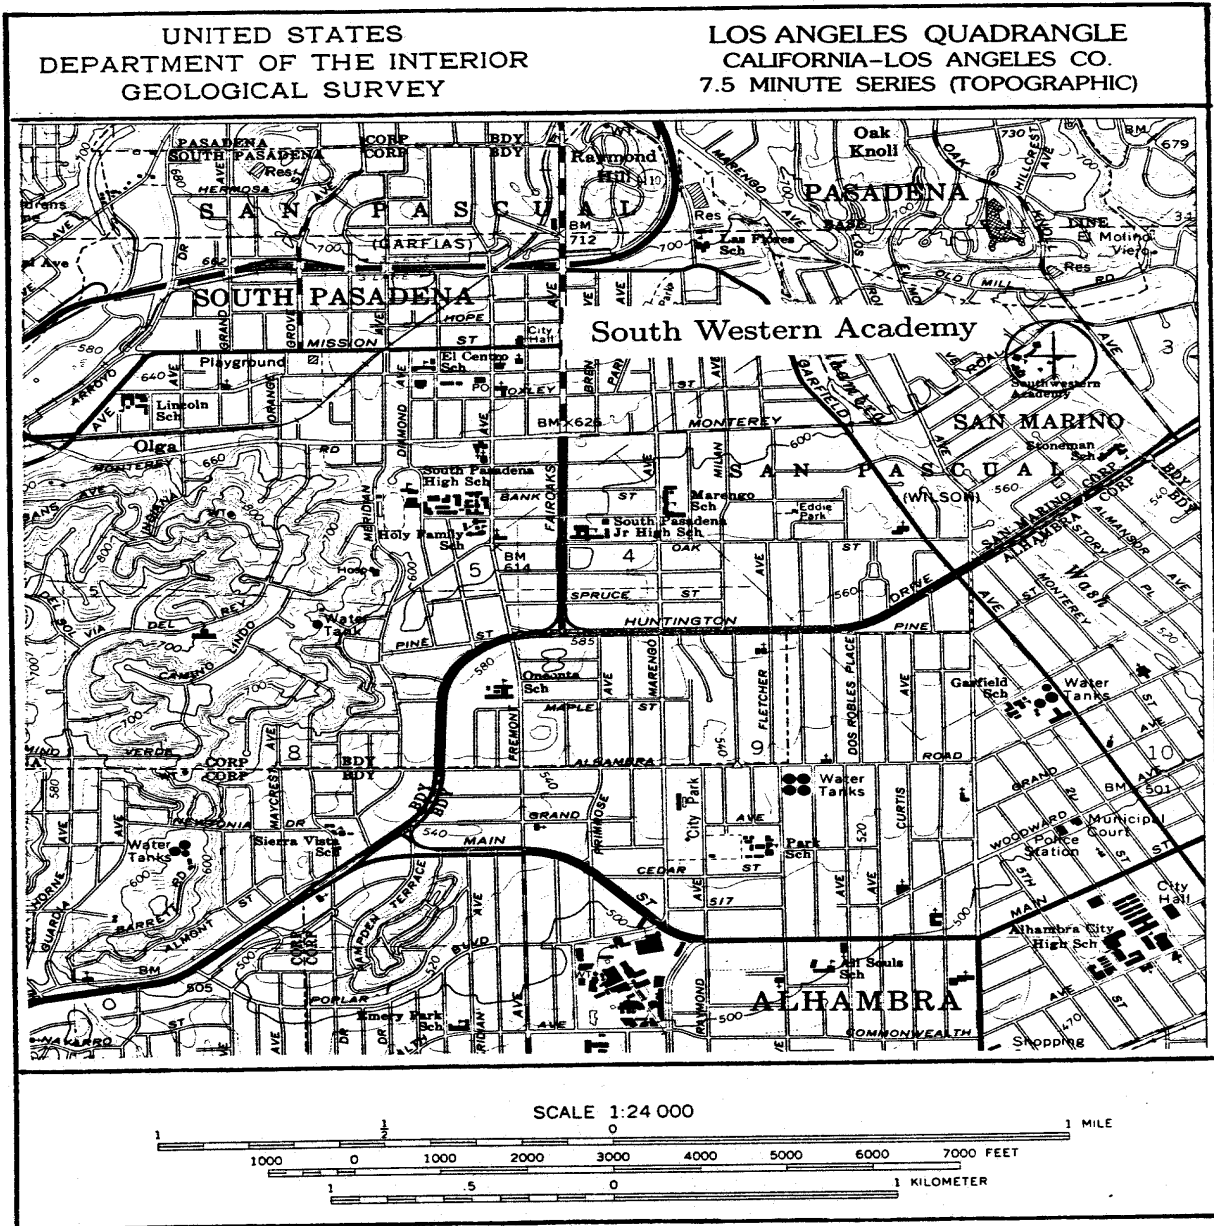


Figure A-56. Site location map for the borehole at South Western Academy. The accelerometer is located approximately 10 meters from the borehole.

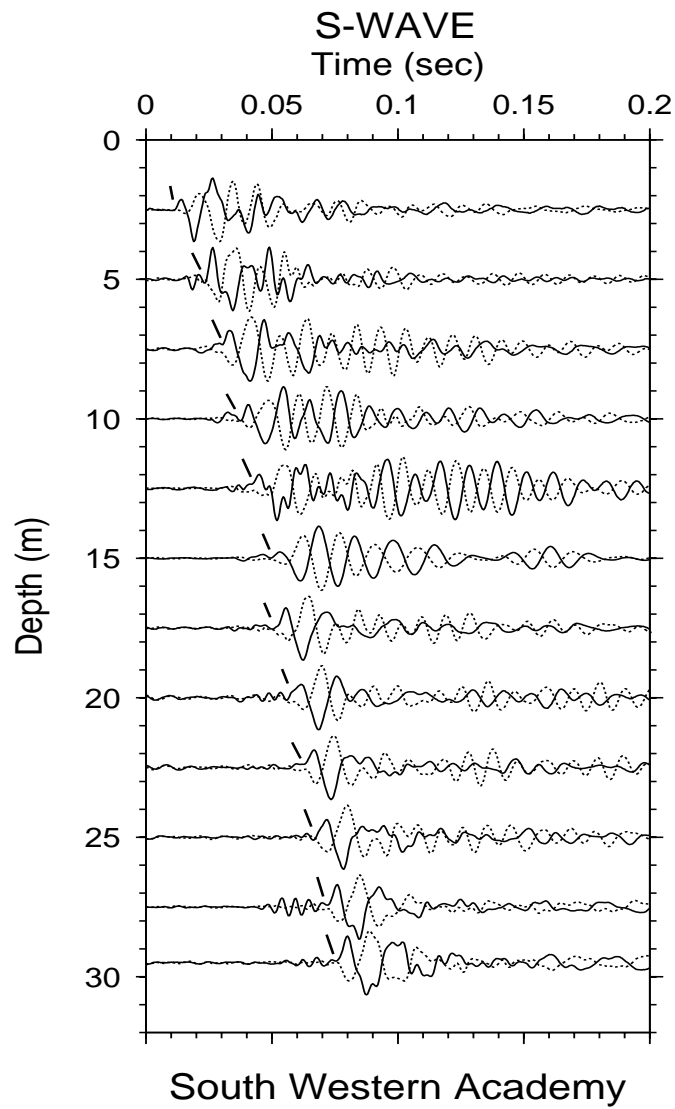


Figure A-57. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

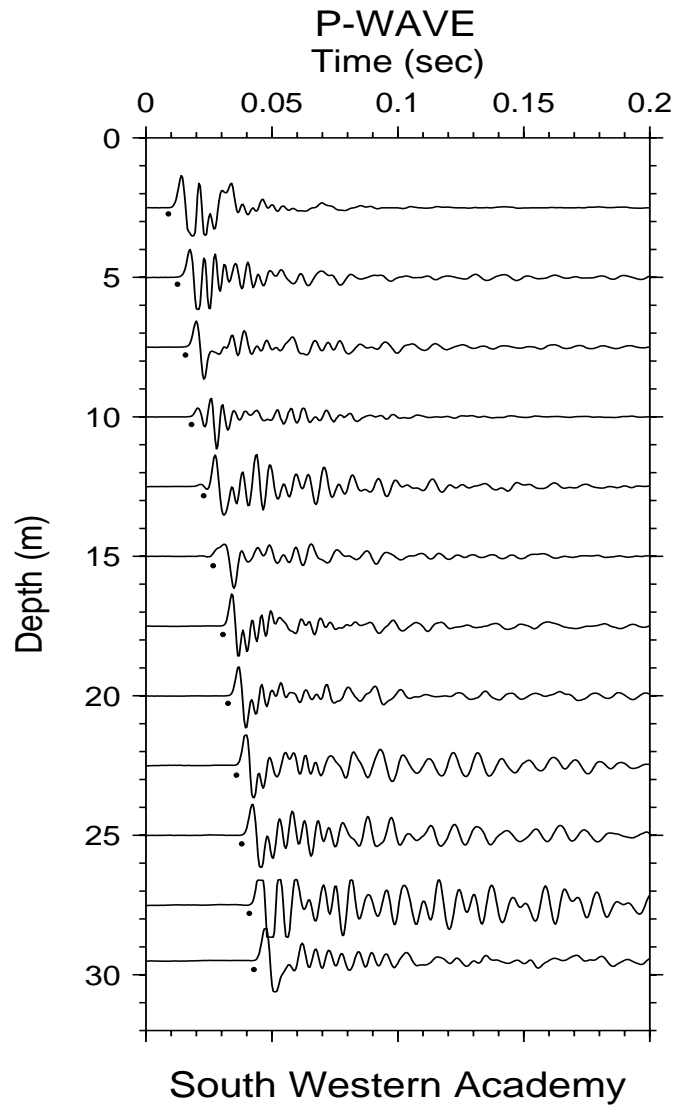


Figure A-58. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

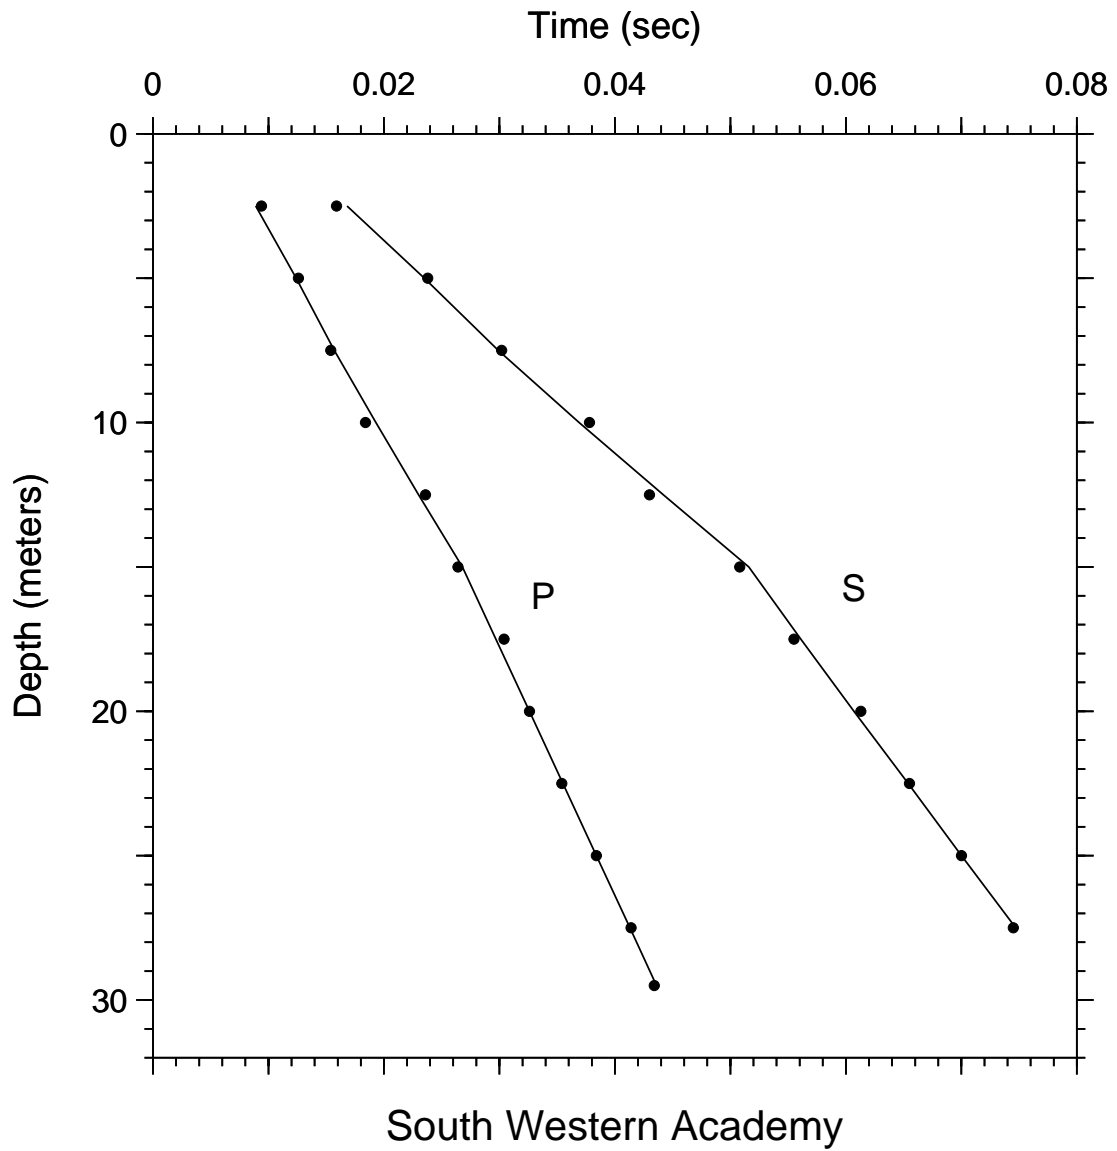


Figure A-59. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

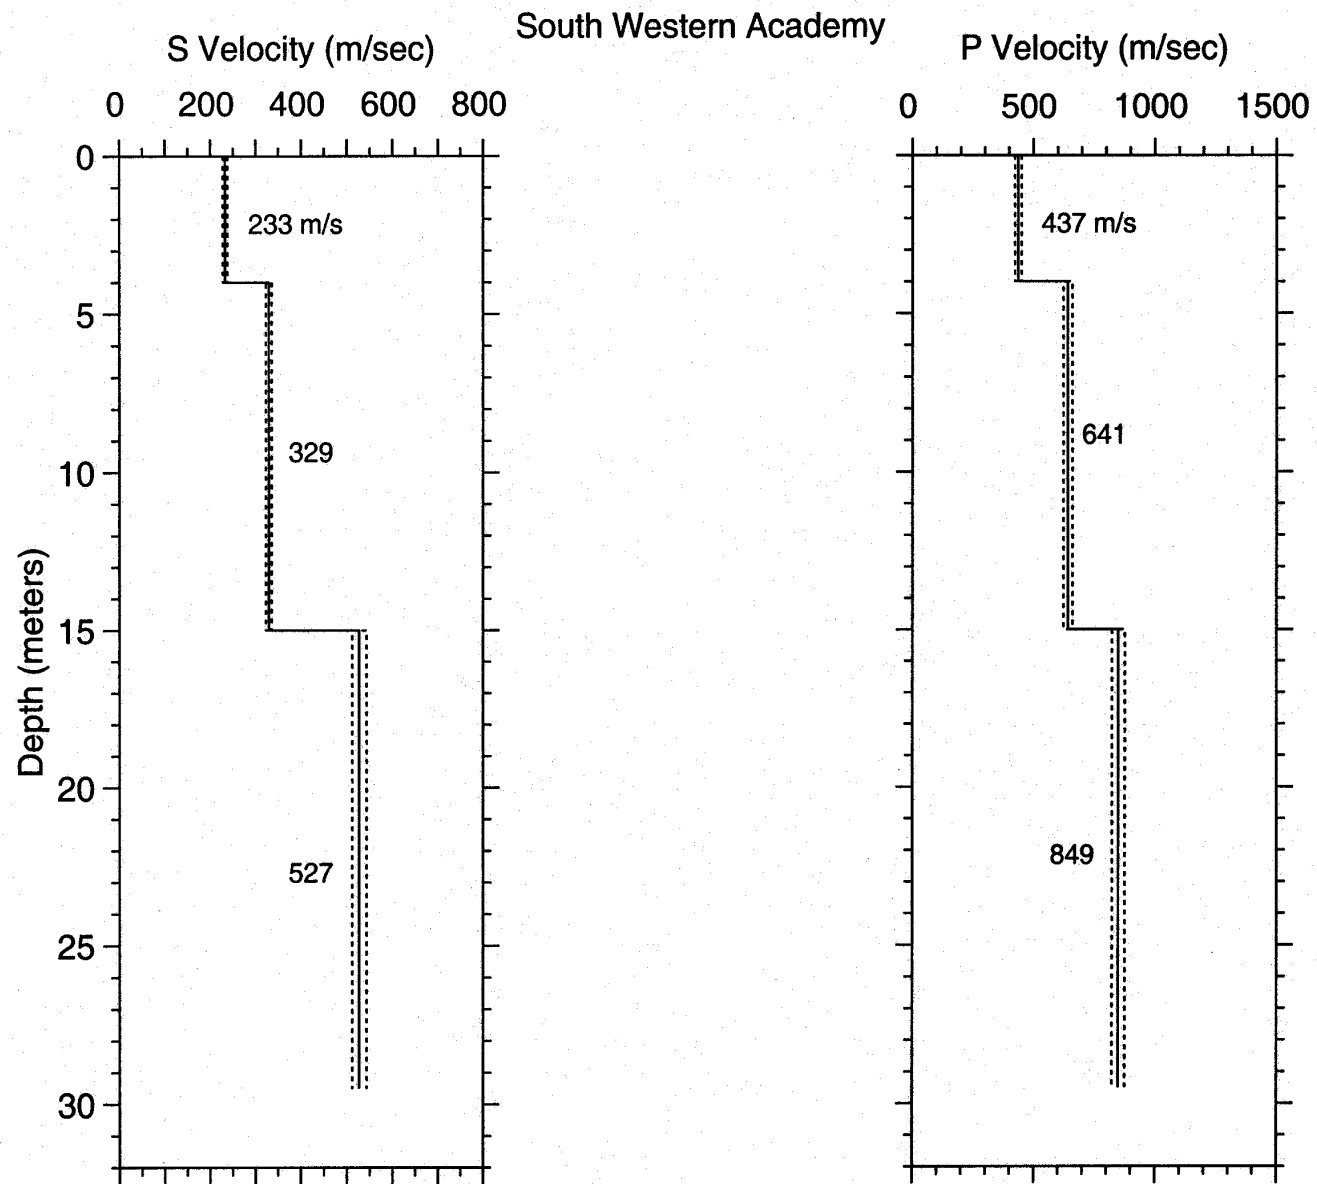


Figure A-60. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is not available from this borehole.

ABLE A23. S-wave arrival times and velocity summaries.

Location: South Western Academy: S Coordinates: 34.11533 -118.13050 Hole_Code: 306
 hoffset = 3.00 travel-time file: F:\SWA\SWAS_RE.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0159	0.0107	233	1	-0.0009	4.0	4.0	233	227	238	13.1	13.1	763	746	781
5.0	16.4	0.0238	0.0202	247	1	0.0003	15.0	11.0	329	323	336	49.2	36.1	1080	1059	1102
7.5	24.6	0.0302	0.0278	270	1	0.0003	29.5	14.5	527	511	543	96.8	47.6	1728	1678	1781
10.0	32.8	0.0378	0.0354	282	1	0.0009										
12.5	41.0	0.0430	0.0430	291	3	-0.0012										
15.0	49.2	0.0508	0.0506	296	1	-0.0008										
17.5	57.4	0.0555	0.0553	316	2	-0.0006										
20.0	65.6	0.0613	0.0601	333	1	0.0006										
22.5	73.8	0.0655	0.0648	347	1	0.0001										
25.0	82.0	0.0700	0.0696	359	1	0.0000										
27.5	90.2	0.0745	0.0743	370	1	-0.0002										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

ABLE A-24. P-wave arrival times and velocity summaries.

Location: South Western Academy: P Coordinates: 34.11533 -118.13050 Hole_Code: 306
 hoffset = 3.00 travel-time file: F:\SWA\SWAP.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0094	0.0057	437	1	0.0005	4.0	4.0	437	423	451	13.1	13.1	1432	1388	1479
5.0	16.4	0.0126	0.0107	467	1	0.0002	15.0	11.0	641	623	660	49.2	36.1	2102	2042	2165
7.5	24.6	0.0154	0.0146	513	1	-0.0003	29.5	14.5	849	823	876	96.8	47.6	2785	2701	2874
10.0	32.8	0.0184	0.0185	540	1	-0.0009										
12.5	41.0	0.0236	0.0224	558	2	0.0006										
15.0	49.2	0.0264	0.0263	570	2	-0.0004										
17.5	57.4	0.0304	0.0293	598	1	0.0007										
20.0	65.6	0.0326	0.0322	621	1	0.0000										
22.5	73.8	0.0354	0.0351	640	1	-0.0001										
25.0	82.0	0.0384	0.0381	656	1	0.0000										
27.5	90.2	0.0414	0.0410	670	1	0.0001										
29.5	96.8	0.0434	0.0434	680	1	-0.0002										

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model
- vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- dtb(m) = depth to bottom of layer in meters
- thk(m) = thickness of layer in meters
- v(m/s) = velocity of layer in meters per second
- vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- vu(m/s) = upper limit of velocity in meters per second
- dtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- v(ft/s) = velocity of layer in feet per second
- vl(ft/s) = lower limit of velocity in feet per second
- vu(ft/s) = upper limit of velocity in feet per second

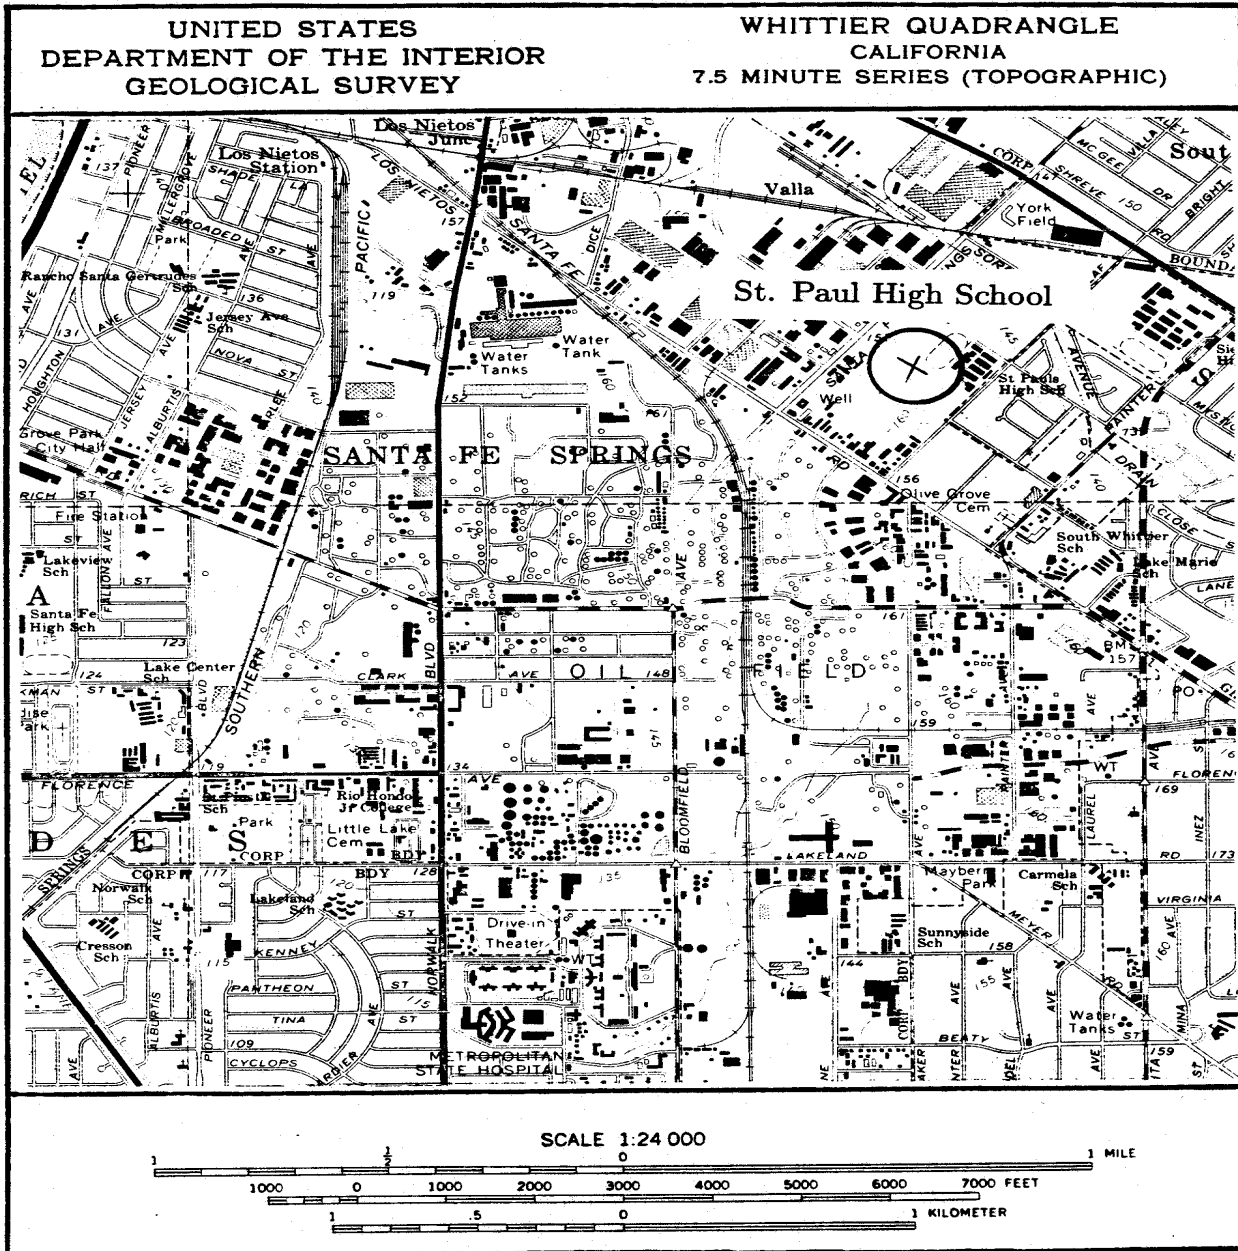


Figure A-61. Site location map for the borehole at St. Paul High School.

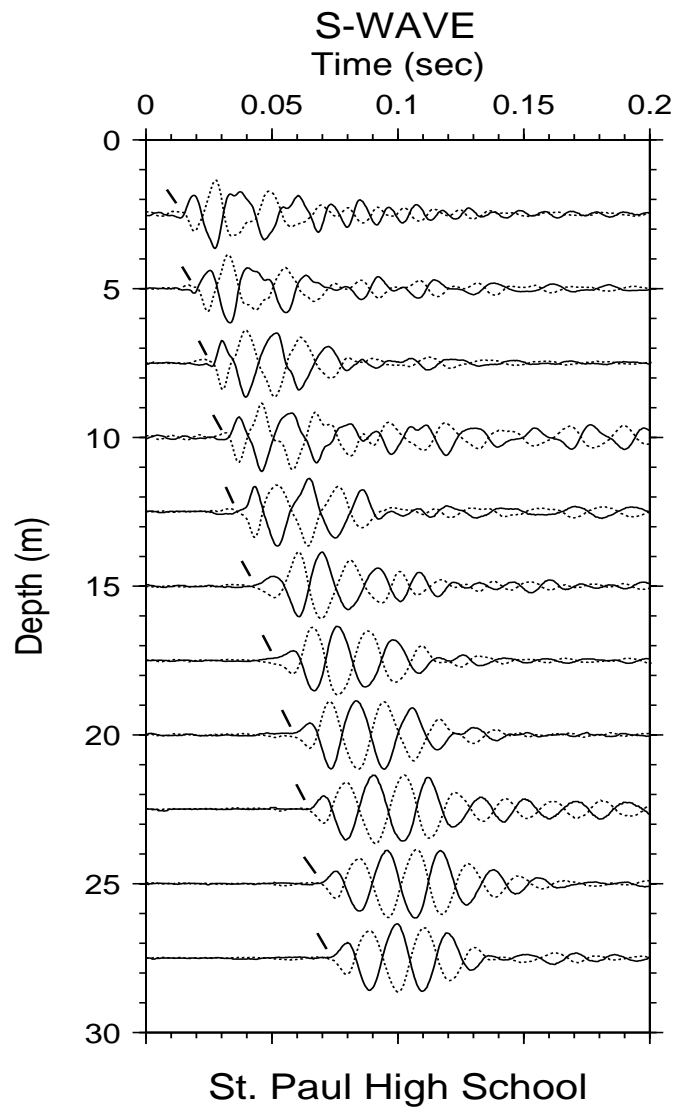


Figure A-62. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the hatch marks.

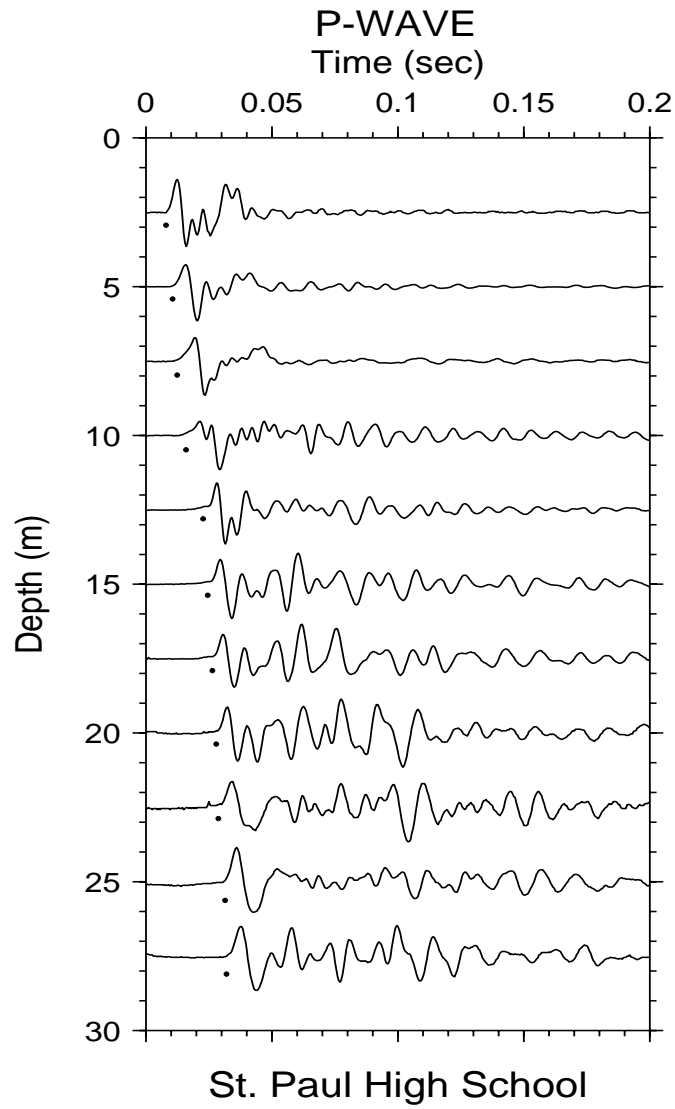


Figure A-63. Vertical component record section. Approximate P-wave arrivals are indicated by the dots.

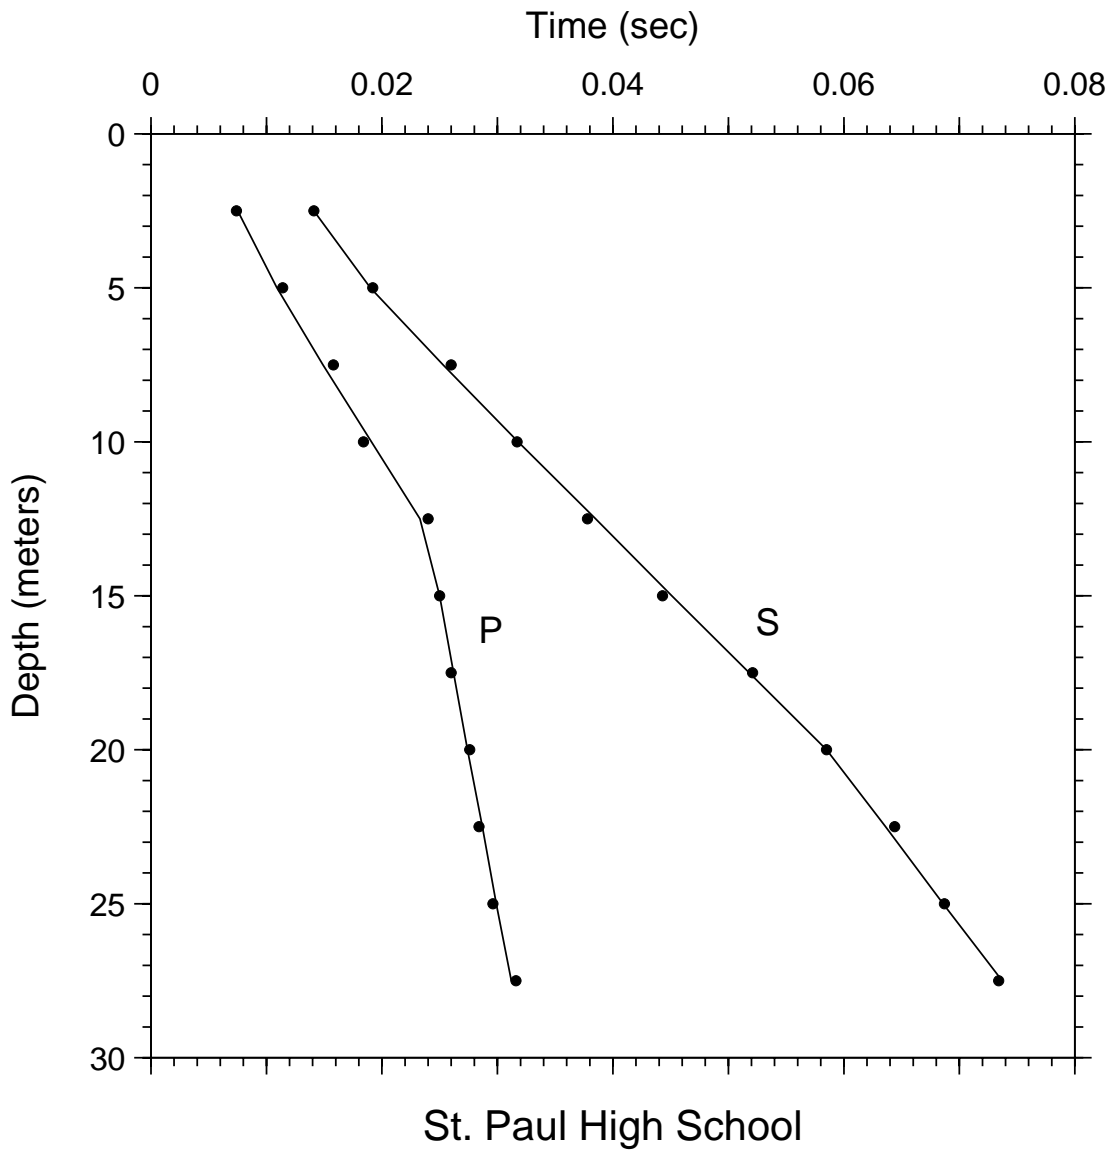


Figure A-64. Time-depth graph of P-wave and S-wave picks. Line segments are straightline interpolations of model predictions at the observation depths. The times for zero depth, not shown, are given by offset divided by the velocity in the uppermost layer (see accompanying tables of velocities for specific values).

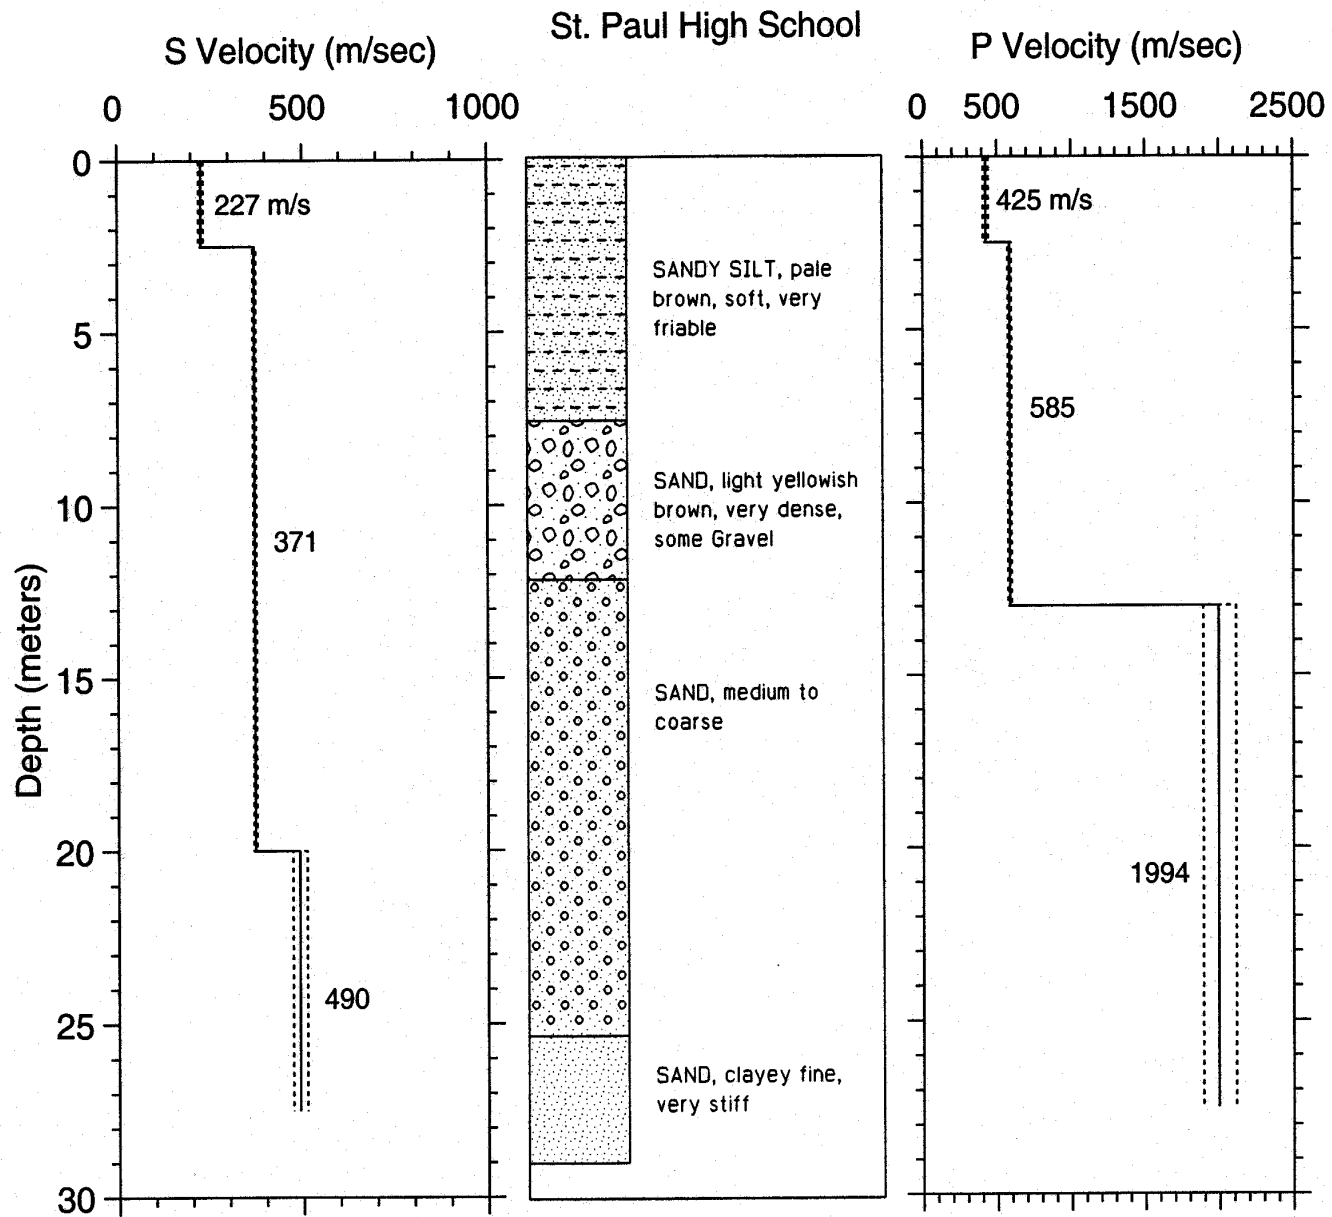


Figure A-65. S- and P-wave velocity profiles with dashed lines representing one standard deviation. Lithology is shown for correlation with velocities.

ABLE A-25. S-wave arrival times and velocity summaries.

Location: St. Paul High School: S Coordinates: 33.95158 -118.05369 Hole_Code: 307
 hoffset = 2.00 travel-time file: F:\STP\STPS.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0141	0.0110	227	1	0.0000	2.5	2.5	227	221	233	8.2	8.2	744	723	766
5.0	16.4	0.0192	0.0178	282	1	0.0001	20.0	17.5	371	367	375	65.6	57.4	1216	1203	1230
7.5	24.6	0.0260	0.0245	306	1	0.0007	27.5	7.5	490	471	510	90.2	24.6	1608	1546	1674
10.0	32.8	0.0317	0.0312	320	1	-0.0001										
12.5	41.0	0.0378	0.0380	329	1	-0.0007										
15.0	49.2	0.0443	0.0447	336	1	-0.0008										
17.5	57.4	0.0521	0.0514	340	1	0.0003										
20.0	65.6	0.0585	0.0582	344	1	0.0000										
22.5	73.8	0.0644	0.0633	356	1	0.0008										
25.0	82.0	0.0687	0.0684	366	1	0.0001										
27.5	90.2	0.0734	0.0735	374	1	-0.0003										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

ABLE A-26. P-wave arrival times and velocity summaries.

Location: St. Paul High School: P Coordinates: 33.95158 -118.05369 Hole_Code: 307
 hoffset = 2.00 travel-time file: F:\STP\STPP.TT

nlayers = 3

d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.5	8.2	0.0074	0.0059	425	1	-0.0001	2.5	2.5	425	408	442	8.2	8.2	1394	1340	1452
5.0	16.4	0.0114	0.0102	492	2	0.0005	13.0	10.5	585	574	597	42.7	34.4	1919	1882	1958
7.5	24.6	0.0158	0.0144	520	3	0.0009	27.5	14.5	1994	1890	2111	90.2	47.6	6543	6200	6927
10.0	32.8	0.0184	0.0187	535	3	-0.0007										
12.5	41.0	0.0240	0.0230	544	2	0.0007										
15.0	49.2	0.0250	0.0248	604	1	0.0000										
17.5	57.4	0.0260	0.0261	671	1	-0.0002										
20.0	65.6	0.0276	0.0273	731	1	0.0002										
22.5	73.8	0.0284	0.0286	787	1	-0.0003										
25.0	82.0	0.0296	0.0298	838	1	-0.0003										
27.5	90.2	0.0316	0.0311	884	1	0.0004										

Explanation:

d(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver, along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $avg_vel = d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

APPENDIX—B
Poisson's Ratios

Table B-1. Poisson's ratio calculated from P- and S-wave velocity models for the Cerritos College Gymnasium site.

P wave - d2bot, pvel, for file: CGMP.VEL

6.00000	437.000
10.0000	348.000
29.4000	1563.00

S wave - d2bot, svel, for file: CGMS.VEL

2.50000	255.000
5.00000	288.000
12.5000	217.000
25.0000	249.000
29.4000	329.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
6.000E+00	2.500E+00	2.500E+00	2.500E+00	4.370E+02	2.550E+02	0.24
6.000E+00	5.000E+00	5.000E+00	2.500E+00	4.370E+02	2.880E+02	0.12
6.000E+00	1.250E+01	6.000E+00	1.000E+00	4.370E+02	2.170E+02	0.34
1.000E+01	1.250E+01	1.000E+01	4.000E+00	3.480E+02	2.170E+02	0.18
2.940E+01	1.250E+01	1.250E+01	2.500E+00	1.563E+03	2.170E+02	0.49
2.940E+01	2.500E+01	2.500E+01	1.250E+01	1.563E+03	2.490E+02	0.49
2.940E+01	2.940E+01	2.940E+01	4.400E+00	1.563E+03	3.290E+02	0.48

Table B-2. Poisson's ratio calculated from P- and S-wave velocity models for the Cerritos College Physical Sciences Building site.

P wave - d2bot, pvel, for file: CPSP.VEL

2.50000	353.000
15.0000	517.000
29.0000	1172.00

S wave - d2bot, svel, for file: CPSS.VEL

2.50000	185.000
15.0000	218.000
29.0000	253.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
2.500E+00	2.500E+00	2.500E+00	2.500E+00	3.530E+02	1.850E+02	0.31
1.500E+01	1.500E+01	1.500E+01	1.250E+01	5.170E+02	2.180E+02	0.39
2.900E+01	2.900E+01	2.900E+01	1.400E+01	1.172E+03	2.530E+02	0.48

Table B-3. Poisson's ratio calculated from P- and S-wave velocity models for the Cerritos College Police Building site.

P wave - d2bot, pvel, for file: CPBP.VEL
 9.00000 359.000
 12.5000 734.000
 89.8000 1739.00

S wave - d2bot, svel, for file: CPBS.VEL
 3.00000 229.000
 9.00000 204.000
 23.0000 259.000
 32.0000 295.000
 46.0000 348.000
 78.0000 418.000
 89.8000 450.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
9.000E+00	3.000E+00	3.000E+00	3.000E+00	3.590E+02	2.290E+02	0.16
9.000E+00	9.000E+00	9.000E+00	6.000E+00	3.590E+02	2.040E+02	0.26
1.250E+01	2.300E+01	1.250E+01	3.500E+00	7.340E+02	2.590E+02	0.43
8.980E+01	2.300E+01	2.300E+01	1.050E+01	1.739E+03	2.590E+02	0.49
8.980E+01	3.200E+01	3.200E+01	9.000E+00	1.739E+03	2.950E+02	0.49
8.980E+01	4.600E+01	4.600E+01	1.400E+01	1.739E+03	3.480E+02	0.48
8.980E+01	7.800E+01	7.800E+01	3.200E+01	1.739E+03	4.180E+02	0.47
8.980E+01	8.980E+01	8.980E+01	1.180E+01	1.739E+03	4.500E+02	0.46

Table B-4. Poisson's ratio calculated from the P- and S-wave velocity models for the Corps of Engineer's site.

P wave - d2bot, pvel, for file: NARP.VEL
 6.00000 362.000
 12.0000 798.000
 22.0000 1409.00

S wave - d2bot, svel, for file: NARS.VEL
 6.00000 241.000
 12.0000 212.000
 22.0000 381.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
6.000E+00	6.000E+00	6.000E+00	6.000E+00	3.620E+02	2.410E+02	0.10
1.200E+01	1.200E+01	1.200E+01	6.000E+00	7.980E+02	2.120E+02	0.46
2.200E+01	2.200E+01	2.200E+01	1.000E+01	1.409E+03	3.810E+02	0.46

Table B-5. Poisson's ratio calculated from P- and S-wave velocity models for the Hoover School site.

P wave - d2bot, pvel, for file: HOOP2.VEL
 7.50000 680.000
 25.0000 1283.00

S wave - d2bot, svel, for file: HOOS2.VEL
 7.50000 470.000
 25.0000 790.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
7.500E+00	7.500E+00	7.500E+00	7.500E+00	6.800E+02	4.700E+02	0.04
2.500E+01	2.500E+01	2.500E+01	1.750E+01	1.283E+03	7.900E+02	0.19

Table B-6. Poisson's ratio calculated from P- and S-wave velocity models for the Lincoln School site.

P wave - d2bot, pvel, for file: LIMP.VEL
 3.00000 368.000
 22.0000 675.000
 29.7000 753.000

S wave - d2bot, svel, for file: LINS2.VEL
 3.00000 256.000
 22.0000 413.000
 29.7000 470.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
3.000E+00	3.000E+00	3.000E+00	3.000E+00	3.680E+02	2.560E+02	0.03
2.200E+01	2.200E+01	2.200E+01	1.900E+01	6.750E+02	4.130E+02	0.20
2.970E+01	2.970E+01	2.970E+01	7.700E+00	7.530E+02	4.700E+02	0.18

Table B-7. Poisson's ratio calculated from P- and S-wave velocity models for the Lincoln School Whittier site.

P wave - d2bot, pvel, for file: WLBVERT.VEL
 1.50000 224.000
 7.50000 1382.00
 18.5000 517.000

S wave - d2bot, svel, for file: WLBS.VEL
 1.50000 139.000
 18.5000 347.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
1.500E+00	1.500E+00	1.500E+00	1.500E+00	2.240E+02	1.390E+02	0.19
7.500E+00	1.850E+01	7.500E+00	6.000E+00	1.382E+03	3.470E+02	0.47
1.850E+01	1.850E+01	1.850E+01	1.100E+01	5.170E+02	3.470E+02	0.09

Table B-8. Poisson's ratio calculated from P- and S-wave velocity models for the Los Alisos Adult School site.

P wave - d2bot, pvel, for file: EXCP.VEL

2.50000	361.000
12.5000	509.000
20.0000	1358.00
27.5000	711.000

S wave - d2bot, svel, for file: EXCS.VEL

2.50000	194.000
14.0000	242.000
27.5000	262.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
2.500E+00	2.500E+00	2.500E+00	2.500E+00	3.610E+02	1.940E+02	0.30
1.250E+01	1.400E+01	1.250E+01	1.000E+01	5.090E+02	2.420E+02	0.35
2.000E+01	1.400E+01	1.400E+01	1.500E+00	1.358E+03	2.420E+02	0.48
2.000E+01	2.750E+01	2.000E+01	6.000E+00	1.358E+03	2.620E+02	0.48
2.750E+01	2.750E+01	2.750E+01	7.500E+00	7.110E+02	2.620E+02	0.42

Table B-9. Poisson's ratio calculated from P- and S-wave velocity models for the Olive Junior High School site.

P wave - d2bot, pvel, for file: OLVP.VEL
 1.50000 309.000
 11.0000 786.000
 16.8000 983.000

S wave - d2bot, svel, for file: OLVS.VEL
 1.50000 209.000
 11.0000 527.000
 16.8000 636.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
1.500E+00	1.500E+00	1.500E+00	1.500E+00	3.090E+02	2.090E+02	0.08
1.100E+01	1.100E+01	1.100E+01	9.500E+00	7.860E+02	5.270E+02	0.09
1.680E+01	1.680E+01	1.680E+01	5.800E+00	9.830E+02	6.360E+02	0.14

Table B-10. Poisson's ratio calculated from P- and S-wave velocity models for the San Bernardino Fire Station site.

P wave - d2bot, pvel, for file: SB1P.VEL
 8.50000 430.000
 16.2000 936.000
 70.0000 1647.00
 90.0000 2094.00

S wave - d2bot, svel, for file: SB1S.VEL
 3.70000 297.000
 16.2000 299.000
 41.2000 365.000
 59.5000 408.000
 78.0000 460.000
 90.0000 556.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
8.500E+00	3.700E+00	3.700E+00	3.700E+00	4.300E+02	2.970E+02	0.04
8.500E+00	1.620E+01	8.500E+00	4.800E+00	4.300E+02	2.990E+02	0.03
1.620E+01	1.620E+01	1.620E+01	7.700E+00	9.360E+02	2.990E+02	0.44
7.000E+01	4.120E+01	4.120E+01	2.500E+01	1.647E+03	3.650E+02	0.47
7.000E+01	5.950E+01	5.950E+01	1.830E+01	1.647E+03	4.080E+02	0.47
7.000E+01	7.800E+01	7.000E+01	1.050E+01	1.647E+03	4.600E+02	0.46
9.000E+01	7.800E+01	7.800E+01	8.000E+00	2.094E+03	4.600E+02	0.47
9.000E+01	9.000E+01	9.000E+01	1.200E+01	2.094E+03	5.560E+02	0.46

Table B-11. Poisson's ratio calculated from the P- and S-wave velocity model for the Santa Anita Golf Course site.

P wave - d2bot, pvel, for file: SAGP.VEL
 7.50000 411.000
 17.4000 609.000
 25.0000 752.000
 29.6000 1136.00

S wave - d2bot, svel, for file: SAGS_RE.VEL
 7.50000 284.000
 17.4000 343.000
 25.0000 439.000
 29.6000 553.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
7.500E+00	7.500E+00	7.500E+00	7.500E+00	4.110E+02	2.840E+02	0.04
1.740E+01	1.740E+01	1.740E+01	9.900E+00	6.090E+02	3.430E+02	0.27
2.500E+01	2.500E+01	2.500E+01	7.600E+00	7.520E+02	4.390E+02	0.24
2.960E+01	2.960E+01	2.960E+01	4.600E+00	1.136E+03	5.530E+02	0.34

Table B-12. Poisson's ratio calculated from P- and S-wave velocity models for the South Western Academy site.

P wave - d2bot, pvel, for file: SWAP.VEL

4.00000	437.000
15.0000	641.000
29.5000	849.000

S wave - d2bot, svel, for file: SWAS_RE.VEL

4.00000	233.000
15.0000	329.000
29.5000	527.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
4.000E+00	4.000E+00	4.000E+00	4.000E+00	4.370E+02	2.330E+02	0.30
1.500E+01	1.500E+01	1.500E+01	1.100E+01	6.410E+02	3.290E+02	0.32
2.950E+01	2.950E+01	2.950E+01	1.450E+01	8.490E+02	5.270E+02	0.19

Table B-13. Poisson's ratio calculated from P- and S-wave velocity models for the St. Paul High School site.

P wave - d2bot, pvel, for file: STPP.VEL

2.50000	425.000
13.0000	585.000
27.5000	1994.00

S wave - d2bot, svel, for file: STPS.VEL

2.50000	227.000
20.0000	371.000
27.5000	490.000

d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
2.500E+00	2.500E+00	2.500E+00	2.500E+00	4.250E+02	2.270E+02	0.30
1.300E+01	2.000E+01	1.300E+01	1.050E+01	5.850E+02	3.710E+02	0.16
2.750E+01	2.000E+01	2.000E+01	7.000E+00	1.994E+03	3.710E+02	0.48
2.750E+01	2.750E+01	2.750E+01	7.500E+00	1.994E+03	4.900E+02	0.47