

REPORT

01-0572

SDMS 43577

Pre-Design Investigation Report for the Lyman Street Area Removal Action

Volume II of III

**General Electric Company
Pittsfield, Massachusetts**

April 2003

BBL[®]
BLASLAND, BOUCK & LEE, INC.
engineers & scientists

Table of Contents

VOLUME I – REPORT (Bound Separately)

VOLUME II – APPENDICES

Appendices

- A Soil Boring Logs
- B Soil Analytical Results

VOLUME III – APPENDICES (Bound Separately)

- B Soil Analytical Results – Continued
- C Soil Sampling Data Validation Report



Appendix A

Soil Boring Logs

Date Start/Finish: 8/15/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Hand Driven
 Sample Method: 2' Macrocore

Northing: 531920.3
 Easting: 129853.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 980.2
 Descriptions By: JJB

Boring ID: RAA12-AA4
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.8		Brown fine to medium SAND, little Organic material.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1'; PCBs.

Date Start/Finish: 9/5/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 533198.9
 Easting: 130966.6
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.6
 Descriptions By: JJB

Boring ID: RAA12-A26
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.1		Dark to light brown fine SAND, some Silt, trace Grass, Roots, and Pebbles.	 Borehole backfilled with Bentonite.
980	5							
975	10							
970	15							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.
 Duplicate sample ID: RAA12-DUP-19 (PCBs, 0-1').

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 533207.1
 Easting: 131054.5
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.1
 Descriptions By: JJB

Boring ID: RAA12-A28
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Light brown fine SAND, trace fine Gravel and Organic material.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDDs/PCDFs.

Date Start/Finish: 9/5/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 533163.8
 Easting: 130924.3
 Casing Elevation: NA



Borehole Depth: 1' below grade
 Surface Elevation: 985.2

Descriptions By: JJB

Boring ID: RAA12-B25

Client: General Electric Company

Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.8	0.0		Brown to light brown fine SAND, some Silt and fine Gravel, trace Grass and Roots.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							












Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/3/02
 Drilling Company: BBL
 Driller's Name: JJB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 533158.4
 Easting: 130955.3
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.4
 Descriptions By: RJP

Boring ID: RAA12-B26
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
		1	0-1		0.6		Light brown fine SAND, trace fine Gravel and Organic material.	 Borehole backfilled with Bentonite.
		2	1-4	2.4	0.9		Light brown fine SAND, trace fine Gravel, Brick, and Porcelain.	
980		3	4-6		0.3		Gray fine SAND, some Silt, moist.	
		4	6-8	3.3	0.1		Wet at 6.2' bgs.	
975		5	8-10		0.0		Gray to olive-brown fine SAND and SILT, saturated.	
		6	10-12	3.5	0.0			
		7	12-15	3.0	0.0		Olive-brown and gray fine SAND and SILT, saturated.	
970							Coarse Sand at 14.8' bgs.	



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs. Duplicate sample ID: RAA12-DUP-26 (PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, 6-10').

Date Start/Finish: 9/3/02 Drilling Company: BBL Driller's Name: GAR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 533158.1 Easting: 131055.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 986.8 Descriptions By: JJB	Boring ID: RAA12-B28 Client: General Electric Company Location: Lyman Street Area
--	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	985	1	0-1	1.0	0.0	Geologic Column	Brown SILT. Gray fine SAND.	Borehole backfilled with Bentonite.
		2	1-4	2.3	0.0		Groundwater at 4.5' bgs.	
5		3	4-6	2.0	0.0		Gray-brown fine SAND, wet.	
	980	4	6-8	2.0	0.0			
		5	8-10	2.0	0.0			
10		6	10-12	2.0	0.0			
	975	7	12-15	3.0	0.0		Light brown fine to medium SAND, wet.	
15								

<h1 style="margin: 0;">BBL</h1> <p style="margin: 0;">BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	<p>Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.</p>
--	--

Date Start/Finish: 9/5/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 533157.5
 Easting: 131104.1
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.8
 Descriptions By: JJB



Boring ID: RAA12-B29
 Client: General Electric Company
 Location: Lyman Street Area

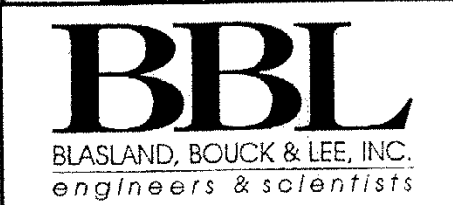
DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	0.9	0.2		Dark brown fine to medium SAND, trace Asphalt and small Pebbles.	Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: A = Not Applicable/Available.
 Analyses: 0-1': PCBs.
 MS/MSD collected (PCBs, 0-1').

Date Start/Finish: 8/27/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 533107.2 Easting: 130955.2 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.5 Descriptions By: JJB	Boring ID: RAA12-C26 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.0		Dark brown fine SAND, trace Silt, fine Gravel, and Organic material.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 533107.4
 Easting: 131004.5
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.0
 Descriptions By: JJB

Boring ID: RAA12-C27
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Dark brown fine SAND, little Silt, trace Organic material.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDDs/PCDFs.

Date Start/Finish: 8/27/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 533057.7 Easting: 131004.2 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.4 Descriptions By: JJB	Boring ID: RAA12-D27 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.0		Brown fine SAND, trace fine Gravel, trace Organic material.	Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/3/02
 Drilling Company: BBL
 Driller's Name: JJB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 533057.3
 Easting: 131054.5
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 979.7
 Descriptions By: RJP

Boring ID: RAA12-D28
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980	0	1	0-1	2.9			Dark brown fine SAND, some Silt, trace Organic material.	Borehole backfilled with Bentonite.
		2	1-4	2.6	1.7		Brown fine SAND, some Silt, Coal, and Ash, moist.	
975	5	3	4-6	0.3			Olive-brown fine SAND and SILT, moist.	
		4	6-8	2.5	0.1		Gray-brown fine to medium SAND, trace coarse Sand, moist.	
		5	8-10	0.0			Gray-brown coarse SAND, trace fine Sand, wet at 8.1' bgs.	
970	10	6	10-12	3.9	0.1		Light brown coarse SAND, trace fine Sand and fine Gravel.	
		7	12-15	3.0	0.1			
965	15							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs; 10-15': PCBs, VOCs, SVOC, Inorganic, PCDD/PCDF.
 MS/MSD collected (PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, 10-15').



Date Start/Finish: 9/5/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 533058.1 Easting: 131151.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 981.7 Descriptions By: JJB	Boring ID: RAA12-D30 Client: General Electric Company Location: Lyman Street Area
--	--	--


DEPTH	ELEVATION	Sample Run Number	Sample In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
		1	0-1		0.4		Dark brown very fine SAND, some Silt, trace Roots and Wood.	 Borehole backfilled with Bentonite.
980		2	1-4	3.4	0.0		Light brown fine SAND and fine to medium GRAVEL, trace Silt.	
		3	4-6		0.1			
5		4	6-8	3.2	0.0		Brown fine to coarse SAND and fine to medium GRAVEL, trace Silt.	
975		5	8-10		0.0			
		6	10-12	3.2	0.0		Brown to gray coarse SAND, some fine Gravel, wet at 10.6' bgs.	
10		7	12-15	3.0	0.1		Gray coarse SAND, trace fine Gravel, saturated.	
970								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs.


Date Start/Finish: 9/4/02 Drilling Company: BBL Driller's Name: RJP/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532982.9 Easting: 130900.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.2 Descriptions By: SLL	Boring ID: RAA12-E25 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND and SILT, trace fine Gravel, trace Pebbles, Roots, and Wood.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/27/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 533007.8 Easting: 131103.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 987.6 Descriptions By: JJB	Boring ID: RAA12-E28 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, trace Silt, trace Organic material.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 533007.6
 Easting: 131103.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 987.5
 Descriptions By: JJB



Boring ID: RAA12-E29
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, trace fine Gravel, trace Organic material, trace Slag. [FILL]	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDDs/PCDFs.

Date Start/Finish: 8/27/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 533005.4 Easting: 131152.2 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 987.8 Descriptions By: JJB	Boring ID: RAA12-E30 Client: General Electric Company Location: Lyman Street Area
---	---	--



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	P/D Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, little Silt, trace Organic material, trace Slag. [FILL]	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 9/4/02
 Drilling Company: BBL
 Driller's Name: RJP/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532940.7
 Easting: 130823.4
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.6
 Descriptions By: SLL









Boring ID: RAA12-F23
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	1.0	0.1		Dark brown to brown fine SAND, some Silt, trace fine Gravel, Roots and Leaves.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/4/02 Drilling Company: BBL Driller's Name: RJP/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532957.0 Easting: 130853.4 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 984.1 Descriptions By: SLL	Boring ID: RAA12-F24 Client: General Electric Company Location: Lyman Street Area
--	--	--


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.1		Brown fine SAND and SILT, trace Asphalt and fine Gravel.	 Borehole backfilled with Bentonite.
		2	1-3	3.2	0.0		Brown fine to medium SAND, some fine to medium Gravel and Silt, trace gray fine Sand.	
980		3	3-5		0.0		Olive-brown fine SAND and SILT, trace fine Gravel, very moist.	
5		4	6-8	3.0	0.2			
		5	8-10		0.1		Gray-brown to reddish-brown fine SAND, some Silt, trace fine Gravel.	
10		6	10-12		0.0		Saturated at 11.2' bgs.	
		7	12-15	3.0	0.0		Olive brown fine SAND and SILT, saturated.	
970								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs;
 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs;
 10-15': PCBs.


Date Start/Finish: 8/9/02 Drilling Company: BBL Driller's Name: JTG/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532957.1 Easting: 130953.8 Casing Elevation: NA Borehole Depth: 12' below grade Surface Elevation: 986.8 Descriptions By: SLL	Boring ID: RAA12-F26 Client: General Electric Company Location: Lyman Street Area
--	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
		1	0-1		0.6		Brown fine to medium SAND, some coarse Sand, trace fine Gravel, dry.	
	985	2	1-3	2.3	0.2		Dark brown fine SAND, trace coarse Sand and fine Gravel, dry.	
								Borehole backfilled with Bentonite.
5		3	3-6		0.8		Dark brown fine SAND, little medium to coarse Sand, trace fine Gravel, moist.	
	980	4	6-8	2.4	0.3			
		5	8-10		0.9		Wet at 9.1' bgs.	
10		6	10-12	2.2	1.8			
	975						No recovery after three attempts due to refusal.	
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs; 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 3-6': PCBs; 6-10': PCBs; 10-12': PCBs; Duplicate sample ID: RAA12-Dup-8 (PCBs, 6-10'); MS/MSD collected (PCBs, 3-6').
--	---

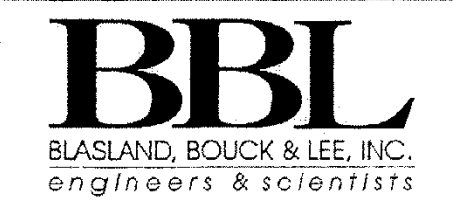
Date Start/Finish: 8/8/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2'Macrocore	Northing: 532957.1 Easting: 131003.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 988.0 Descriptions By: SLL	Boring ID: RAA12-F27 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.9	1.4		Brown fine SAND, little coarse to medium Sand, trace fine to coarse Gravel, dry.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs; MS/MSD collected (PCBs, 0-1).
--	--

Date Start/Finish: 8/30/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2" Macrocore	Northing: 532957.0 Easting: 131054.4 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 988.0 Descriptions By: JJB	Boring ID: RAA12-F28 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.7			Brown fine SAND, some Wood, trace Silt.	 Borehole backfilled with Bentonite.
		2	1-4	2.8	0.2		Brown fine SAND, trace Silt and fine Gravel.	
985								
		3	4-6	2.4	0.1		Brown to light brown fine SAND and fine GRAVEL, trace Slag.	
5		4	6-8	0.6				
980		5	8-10	3.1	1.1			
		6	10-12	0.3			Brown to dark brown fine to medium SAND, SILT, fine GRAVEL, and SLAG, trace Brick.	
		7	12-15	2.8	0.1		Dark brown fine to medium SAND, some coarse Sand and Slag present, wet at 12.6' bgs.	
975								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs;
 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532956.9
 Easting: 131103.4
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 987.9
 Descriptions By: JJB

Boring ID: RAA12-F29
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, trace Silt, trace fine Gravel, trace Slag. [FILL]	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532957.4
 Easting: 131203.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 988.1
 Descriptions By: JJB













Boring ID: RAA12-F31
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, little Silt, trace Organic material.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/3/02 Drilling Company: BBL Driller's Name: JJB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532957.4 Easting: 131253.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 987.6 Descriptions By: RJP	Boring ID: RAA12-F32 Client: General Electric Company Location: Lyman Street Area
--	--	--



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1		0.2		Brown fine SAND, some Wood, trace Silt.	 Borehole backfilled with Bentonite.
				2.2			Reddish-brown fine to medium SAND, trace fine Gravel and Slag.	
985		2	1-4		0.9			
5		3	4-6		0.4			
				2.3			Reddish-brown to brown fine to medium SAND, some Brick, trace Silt.	
980		4	6-8		1.3			
							Reddish-brown medium to coarse SAND and BRICK, trace Slag. [FILL]	
10		5	8-10		1.1			
				2.1				
		6	10-12		0.7			
							Olive-brown to gray fine SAND and SILT, moist.	
975		7	12-15	3.0	0.2			
							Wet at 14.1' bgs.	
15								

<h1>BBL</h1> <p>BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.
--	---

Date Start/Finish: 8/5/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532899.1
 Easting: 130753.7
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 985.4
 Descriptions By: JTB

Boring ID: RAA12-G22
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.7	0.0		Brown fine SAND, trace coarse Sand and fine Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 MS/MSD collected (PCBs, 0-1').

Date Start/Finish: 8/5/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532907.1
 Easting: 130803.5
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.7
 Descriptions By: JTB

Boring ID: RAA12-G23
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.8	0.3		Brown fine SAND, little coarse to medium Sand and fine Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 Duplicate Sample ID: RAA12-DUP-1 (PCBs, 0-1').

Date Start/Finish: 9/4/02
 Drilling Company: BBL
 Driller's Name: RJP/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532907.07
 Easting: 130853.79
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: NA
 Descriptions By: SLL

Boring ID: RAA12-G24
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	0	1	0-1	0.9	0.0		Brown fine to medium SAND, trace Silt and fine Gravel, trace Roots, Wood, and Leaves.	 Borehole backfilled with Bentonite.
5	-5							
10	-10							
15	-15							





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/21/02
 Drilling Company: BBL
 Driller's Name: JJB/JAB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532907.5
 Easting: 130904.6
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.6
 Descriptions By: JJB

Boring ID: RAA12-G25
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, trace fine Gravel and Roots.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 MS/MSD collected (PCBs, 0-1').

Date Start/Finish: 8/8/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532907.1
 Easting: 130953.7
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 986.8
 Descriptions By: SLL

Boring ID: RAA12-G26
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0		1	0-1	0.6	1.3		Dark brown fine SAND, little coarse to medium Sand, dry.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 Duplicate Sample ID: RAA12-Dup-6 (PCBs, 0-1').

Date Start/Finish: 8/9/02
 Drilling Company: BBL
 Driller's Name: JTG/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532907.0
 Easting: 131003.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 988.0
 Descriptions By: SLL

Boring ID: RAA12-G27
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.9	0.5		Dark brown fine SAND, little medium to coarse Sand and fine Gravel, trace Slag and Brick, dry.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 8/8/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532907.1
 Easting: 131053.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 988.7
 Descriptions By: SLL

Boring ID: RAA12-G28
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.8	1.2		Dark brown fine SAND, little coarse to medium Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532907.0
 Easting: 131103.6
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 988.2
 Descriptions By: JJB




Boring ID: RAA12-G29
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, some Silt, trace Organics.	Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDDs/PCDFs.

Date Start/Finish: 8/30/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532906.8 Easting: 131203.9 Casing Elevation: NA Borehole Depth: 6' below grade Surface Elevation: 988.1 Descriptions By: JJB	Boring ID: RAA12-G31 Client: General Electric Company Location: Lyman Street Area
---	---	--



DEPTH	ELEVATION	Sample Run Number	Sample/IntType	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.9	0.2		Brown to dark brown fine SAND, some Wood, trace Silt and fine Gravel.	 Borehole backfilled with Bentonite.
							No stratigraphic information available.	
985		2	3-6	2.6	0.1		Brown to orange-brown fine to medium SAND, some fine Gravel, trace Slag and Brick.	
5								
980								
10								
975								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF. 3-6': VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	--

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532907.3
 Easting: 131254.0
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 987.4
 Descriptions By: JJB



Boring ID: RAA12-G32
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, little Silt, trace Organic material.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 MS/MSD collected (PCBs, 0-1').

Date Start/Finish: 8/5/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532857.2 Easting: 130703.5 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.4 Descriptions By: JTB	Boring ID: RAA12-H21 Client: General Electric Company Location: Lyman Street Area
--	---	--



DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.6	1.4		Brown fine SAND, little coarse to medium Sand and fine to coarse Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/5/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532857.2
 Easting: 130754.1
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.8
 Descriptions By: JTB

Boring ID: RAA12-H22
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction	
0	985								
		1	0-1		0.0		Brown fine SAND, little medium to coarse Sand and fine Gravel.		
							Brown very fine SAND, little Silt, moist.		
		2	1-3	3.5	0.0				
5	980	3	3-6		0.8				
				3.0					
		4	6-8		0.0				
		5	8-10		0.1				
10	975				2.5				
		6	10-12		0.0				
		7	12-15	2.8	0.1		Gray fine to medium SAND, some coarse Sand, little fine Gravel, wet.		
							Gray fine SAND, trace medium to coarse Sand and fine Gravel, wet.		
15	970								

Borehole backfilled with Bentonite.





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 8/5/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532857.2
 Easting: 130803.7
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.1
 Descriptions By: JTB

Boring ID: RAA12-H23
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.7	0.0		Brown very fine SAND, trace Silt and coarse Sand, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

















Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/4/02
 Drilling Company: BBL
 Driller's Name: RJP/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532856.6
 Easting: 130853.6
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 982.7
 Descriptions By: SLL

Boring ID: RAA12-H24
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.5		Brown fine to medium SAND, trace fine Gravel, moist.	 Borehole backfilled with Bentonite.
				3.1			Light brown fine SAND, trace fine Gravel, Wood and Silt, moist.	
980		2	1-3		0.3			
							Reddish-brown to gray fine SAND, some fine to medium Gravel, moist.	
5		3	3-5		0.0			
								
		4	6-8		0.0			
975							Gray fine SAND, trace fine Gravel, moist.	
		5	8-10		0.1			
10								
		6	10-12		0.0		Saturated at 11.8' bgs.	
							Brown coarse SAND and medium GRAVEL, trace fine Sand, saturated throughout.	
970		7	12-15	2.8	0.0			
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF;
 - 10-15': PCBs.

Date Start/Finish: 8/9/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532857.0
 Easting: 130953.7
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 986.4
 Descriptions By: SLL

Boring ID: RAA12-H26
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
985		1	0-1	2.8	0.5		Brown fine SAND, little medium to coarse Sand and fine Gravel, trace coarse Gravel, dry.	 Borehole backfilled with Bentonite.
							Dark brown fine SAND, trace coarse Sand and fine Gravel, dry.	
		2	1-3		0.6		Dark gray fine SAND, trace fine Gravel.	
5							Dark gray to brown fine to coarse SAND, little Brick, trace Slag, moist.	
		3	3-5	2.6	32.7		Brown fine SAND, trace coarse Sand, Brick, moist.	
980		4	6-8		7.9			
							Brown fine SAND, little medium to coarse Sand and fine to coarse Gravel, moist.	
10		5	8-10	3.2	0.9		Dark gray fine SAND, little Silt, medium to coarse Sand, and fine to coarse Gravel, wet, slight odor.	
975		6	10-12		0.9			
							Brown SILT and PEAT, wet.	
15		7	12-15	3.0	4.4		Brownish-gray fine SAND, wet.	
















Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 8/9/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532857.1
 Easting: 131053.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 988.5
 Descriptions By: SLL

Boring ID: RAA12-H28
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	3.0	15.1		Brown fine SAND, some medium to coarse Sand and fine Gravel, dry.	
							Dark reddish-brown fine SAND, some medium to coarse Sand, dry.	
		2	1-3	1.5			Pulverized CONCRETE.	
985							Dark brown fine SAND, little medium to coarse Sand, moist.	
5		3	3-5	3.1	2.3		Brown fine SAND, little medium to coarse Sand, little fine Gravel and Slag, dry.	
		4	6-8	21.9				
								
980		5	8-10	0.2			Brown fine to coarse SAND, little fine Gravel, trace Slag and scrap Steel, moist.	
10							Dark brown very fine SAND, little medium to coarse Sand, fine Gravel, and Slag.	
		6	10-12	2.2			Wet at 10.4' bgs.	
								
975		7	12-15	3.0	2.2		Dark gray fine to coarse SAND, ASH, BRICK, and SLAG, wet. [FILL]	
15								

Borehole backfilled with Bentonite.







Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs;
 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs.

Date Start/Finish: 9/9/02
 Drilling Company: BBL
 Driller's Name: SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532856.2
 Easting: 131153.0
 Casing Elevation: NA
 Borehole Depth: 10' below grade
 Surface Elevation: 988.8
 Descriptions By: JJB

Boring ID: RAA12-H30
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, little medium to coarse Sand and fine to coarse Gravel, dry.	 Borehole backfilled with Bentonite.
							No stratigraphic description available.	
985								
5		2	6-8	2.0	0.1		Dark brown fine SAND, little medium to coarse Sand, trace fine Gravel, Slag, moist.	
980		3	8-10	1.0	0.3			
10								
975								
15								











Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 6-10': VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb.
 MS/MSD collected (6-10', Pest/Herb).
 Duplicate sample ID: RAA12-DUP-20 (6-10', Pest/Herb).

Date Start/Finish: 8/30/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532857.3
 Easting: 131254.0
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 987.3
 Descriptions By: JJB

Boring ID: RAA12-H32
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1		0.2		Brown fine SAND, trace Silt and fine to medium Gravel.	 Borehole backfilled with Bentonite.
		2	1-4	2.6	0.5		Brown fine to medium SAND, trace Silt, fine Gravel and Siag.	
		3	4-6		0.3			
		4	6-8	2.8	0.2		Brown to light brown fine SAND, trace Silt and fine to medium Gravel.	
		5	8-10		1.1		Light brown to orangish-brown fine SAND, trace Silt.	
		6	10-12	2.4	0.7		Orangish-brown fine SAND, some Silt, trace fine Gravel.	
		7	12-15	2.9	0.1		Brown to olive-brown SILT, trace fine Sand, wet at 12.1' bgs.	
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 3-6': PCBs; 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb.

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532856.8
 Easting: 131304.1
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 986.5
 Descriptions By: JJB

Boring ID: RAA12-H33
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0		1	0-1	1.0	0.0		Dark brown fine SAND, trace Silt, trace Organic material.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								







Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 Duplicate sample ID: RAA12-DUP-15 (PCBs, 0-1').

Date Start/Finish: 8/30/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 533314.7
 Easting: 131285.6
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 987.1
 Descriptions By: JJB

Boring ID: RAA12-H34
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0							No stratigraphic information available.	Borehole backfilled with Bentonite.
985								
5								
980		1	6-8	2.1			Dark brown fine to medium SAND, trace fine Gravel and Slag.	
				2.2				
10		2	8-10	1.2			Dark brown to black medium SAND and SLAG.	
		3	10-12	1.4	0.4		Moist at 11.9' bgs. Brown to olive-brown fine SAND and SILT, moist.	
975							Wet at 12.7' bgs.	
		4	12-15	1.9	0.0			
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 12/3/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532799.8
 Easting: 130309.4
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.7
 Descriptions By: RJP

Boring ID: RAA12-I13
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	0.9	0.1		Dark brown to brown fine SAND, some Silt and fine Gravel, trace weathered Rock.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBS.

Date Start/Finish: 12/5/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2'Macrocore

Northing: 532806.9
 Easting: 130353.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 985.0
 Descriptions By: JBD



Boring ID: RAA12-114
 Client: 2' Macrocore
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.1		Brown fine to medium SAND, some Pebbles and black Ash, trace Slag.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1'; PCBS.


Date Start/Finish: 8/5/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532798.5 Easting: 130666.4 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.8 Descriptions By: JTB	Boring ID: RAA12-120 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.8	1.2		Brown fine SAND, some medium to coarse Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/5/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 562806.7 Easting: 130704.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.6 Descriptions By: JTB	Boring ID: RAA12-I21 Client: General Electric Company Location: Lyman Street Area
--	---	--



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.9	0.6		Brown fine SAND, little medium to coarse Sand, trace fine to coarse Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/5/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532806.9
 Easting: 130753.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 985.6
 Descriptions By: JTB



Boring ID: RAA12-I22
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.8	0.7		Brown fine SAND, some medium to coarse Sand and fine Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.


Date Start/Finish: 9/4/02 Drilling Company: BBL Driller's Name: RJP/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532806.8 Easting: 130853.6 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.9 Descriptions By: SLL	Boring ID: RAA12-I24 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.1		Brown fine SAND, trace fine Gravel and Silt.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs; Duplicate sample ID: RAA12-Dup-18 (PCBs, 0-1').
--	--

Date Start/Finish: 8/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532807.1 Easting: 130904.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.4 Descriptions By: GAR	Boring ID: RAA12-I25 Client: General Electric Company Location: Lyman Street Area
---	---	--



DEPTH	ELEVATION	Sample Run Number	Sampler/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.8		Brown fine SAND, some medium to coarse Sand and gray Cinders.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/21/02
 Drilling Company: BBL
 Driller's Name: JJB/JAB
 Drilling Method: Direct Push
 Auger Size: 2' Macrocore
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2'Macrocore

Northing: 532807.1
 Easting: 130953.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: NA
 Descriptions By: JJB

Boring ID: RAA12-126
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0 0	1	0-1	1.0	0.0		Light brown fine SAND, little fine Gravel.	 Borehole backfilled with Bentonite.
-5 -5							
-10 -10							
-15 -15							



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/8/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore



Northing: 532807.1
 Easting: 131004.0
 Casing Elevation: NA

Boring ID: RAA12-I27
 Client: General Electric Company

Borehole Depth: 1' below grade
 Surface Elevation: 987.4

Location: Lyman Street Area

Descriptions By: SLL

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.9	0.8		Brown fine SAND, little coarse to medium Sand and fine Gravel, trace Glass and Brick, dry.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/8/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532807.0
 Easting: 131103.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 988.7
 Descriptions By: SLL

Boring ID: RAA12-I29
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.9	6.3		Dark brown fine SAND, little medium to coarse Sand and fine to medium Gravel, trace Slag.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/27/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532807.5 Easting: 131203.4 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 993.2 Descriptions By: JJB	Boring ID: RAA12-I31 Client: General Electric Company Location: Lyman Street Area
---	---	--




DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, trace Silt, trace Organic material.	Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	---

Date Start/Finish: 8/30/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532807.4
 Easting: 131254.4
 Casing Elevation: NA
 Borehole Depth: 6' below grade
 Surface Elevation: 987.5
 Descriptions By: JJB



Boring ID: RAA12-I32
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.8	0.8		Dark brown fine SAND, some Silt, Wood, trace Roots and Organic material.	 Borehole backfilled with Bentonite.
							No stratigraphic information available.	
985		2	3-6	2.4	1.6		Dark brown fine to medium SAND, Brick, trace fine to medium Gravel.	
5								
980								
10								
975								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 3-6': VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 8/27/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532807.5 Easting: 131354.3 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.6 Descriptions By: JJB	Boring ID: RAA12-I34 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.0		Brown fine SAND, trace Silt, trace Organic material.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDDs/PCDFs.

Date Start/Finish: 12/6/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532751.1
 Easting: 130207.3
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.5
 Descriptions By: TJM

Boring ID: RAA12-J11
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
		1	0-1	0.9	0.0		Dark brown fine SAND, some fine Gravel.	 Borehole backfilled with Bentonite.
980								
975								
970								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/4/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532756.3 Easting: 130253.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 984.5 Descriptions By: RJP	Boring ID: RAA12-J12 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985	0	1	0-1	0.1			Brown to light brown fine SAND and fine to medium GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
		2	1-4	3.4	0.0		Reddish-brown to olive-brown fine SAND and SILT, moist.	
980	5	3	4-6	3.8	0.0		Reddish-brown to light brown fine SAND and SILT, saturated at 4.6' bgs.	
		4	6-8	0.0			Light brown fine SAND and SILT. Brown coarse SAND at 7.2' bgs.	
975	10	5	8-10	3.8	0.6		Brown coarse SAND.	
		6	10-12	0.0			Wet at 12.2' bgs.	
970	15	7	12-15	3.0	0.2			

BBL
 BLASLAND, BOUCK & LEE, INC.
engineers & scientists

Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532757.3
 Easting: 130303.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.7
 Descriptions By: RJP

Boring ID: RAA12-J13
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	1.0	0.0		Light brown fine SAND and fine GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/4/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532757.2
 Easting: 130353.7
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.9
 Descriptions By: RJP

Boring ID: RAA12-J14
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sampler/Int/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1		0.1		ASPHALT.	Borehole backfilled with Bentonite.
		2	1-4	3.4	0.4		Brown to light brown fine SAND, some Silt and fine Gravel, trace tiny Pebbles, moist.	
		3	4-6		3.1		Brown fine to medium SAND, trace Silt. Coal layer at 5.2' bgs.	
5	980	4	6-8		0.9		Brown fine SAND and SILT, trace fine Gravel. Wet at 7.8' bgs.	
		5	8-10		0.2		Brown medium to coarse SAND, trace fine Gravel.	
10	975	6	10-12		0.5		Dark gray medium to coarse SAND, slight odor.	
		7	12-15	2.4	4.9			
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBS, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBS, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBS;
 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs.

Date Start/Finish: 12/3/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532749.7
 Easting: 130390.0
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 985.0
 Descriptions By: RJP

Boring ID: RAA12-J15
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.0		Brown to light brown fine to medium SAND, some fine to medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532743.8
 Easting: 130461.0
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 985.1
 Descriptions By: RJP

Boring ID: RAA12-J16
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1		0.0		Brown to light brown fine SAND and fine to medium GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
		2	1-4	3.1	0.4		Light brown to brown fine to medium SAND and fine to medium GRAVEL, trace Silt. Some Brick, Ash, and Slag from 3.1' - 4.0' bgs.	
5	980	3	4-6		0.1		Brown fine SAND and white ASH, trace fine Gravel, Coal, and Silt. [FILL]	
		4	6-8	2.8	0.0		Brown fine SAND and fine to medium GRAVEL, some white Ash and Brick, trace Silt.	
		5	8-10		0.2		Brown to olive-brown fine SAND and SILT, trace fine Gravel and Ash.	
10	975	6	10-12	3.2	0.0		Dark gray fine SAND and SILT, moist.	
		7	12-15	3.0	0.1		Gray SILT and fine SAND, very cohesive, trace Organics, Roots, and Wood, swamp odor, wet at 12.3' bgs.	
15	970							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs (0.8'), SVOCs, Inorganics, PCDD/PCDF; 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532757.4
 Easting: 130503.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.7
 Descriptions By: RJP

Boring ID: RAA12-J17
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/IntType	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.2		Dark brown fine to medium SAND and fine to medium GRAVEL, some Silt, trace Ash.	Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs (0.5'), SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 12/9/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532751.3
 Easting: 130547.5
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.4
 Descriptions By: SLL



Boring ID: RAA12-J18
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985	0							
		1	0-1		0.1		Brown fine to medium SAND and fine to medium GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
		2	1-4	3.0	0.3		Dark brown to black medium SAND, some fine to medium Gravel, Ash, Brick, Slag, trace Silt.	
980	5	3	4-6		0.7			
		4	6-8	2.2	0.0		Brown fine to medium SAND, some fine Gravel, weathered Rock, trace Ash and Brick.	
		5	8-10		0.0		Brown very fine to fine SAND.	
975	10	6	10-12	2.3	5.1			
		7	12-15	3.0	9.7		Brown to gray brown fine SAND to dark gray fine SAND and SILT, wet at 12.3' bgs. Petroleum odor at 13.7' bgs.	
970	15							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs.
 MS/MSD collected (PCBs, 3-6').
 Duplicate sample ID: RAA12-DUP-27 (PCBs, 6-10').


Date Start/Finish: 8/5/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532758.2 Easting: 130604.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.9 Descriptions By: JTB	Boring ID: RAA12-J19 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.7	0.0		Dark brown fine SAND, little Silt, trace coarse Sand and fine Gravel, moist.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/5/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532756.9 Easting: 130703.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 985.1 Descriptions By: JTB	Boring ID: RAA12-J21 Client: General Electric Company Location: Lyman Street Area
--	---	--












DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.8	0.5		Brown fine SAND, little medium to coarse Sand and fine to medium Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1'; PCBs.
--	---

Date Start/Finish: 9/4/02
 Drilling Company: BBL
 Driller's Name: RJP/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532756.8
 Easting: 130754.0
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 985.8
 Descriptions By: SLL

Boring ID: RAA12-J22
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	985	1	0-1		0.7		Brown medium to coarse SAND, trace fine to medium Gravel, Wood, and Silt.	
				3.2			Reddish-brown fine SAND, some medium Sand, Silt, and trace fine Gravel.	
		2	1-3		0.1			
5								
	980	3	3-5		0.0			
				3.0			Brown to light brown medium to coarse SAND, some medium Gravel.	
		4	6-8		0.4			
		5	8-10		0.2		Gray fine to light brown fine SAND, trace fine Gravel.	
10								
	975	6	10-12		0.0			
				3.6				
		7	12-15	3.0	0.1		Grayish-brown coarse SAND, medium Gravel, wet.	
15								
	970							

Borehole backfilled with Bentonite.





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs;
 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs.

Date Start/Finish: 9/4/02
 Drilling Company: BBL
 Driller's Name: RJP/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532757.1
 Easting: 130804.1
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 986.0
 Descriptions By: SLL

Boring ID: RAA12-J23
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	985	1	0-1	0.9	0.1		Brown fine SAND, trace Silt, Roots and Gravel.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1'; PCBs.

Date Start/Finish: 8/21/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532757.1
 Easting: 130903.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 985.3
 Descriptions By: JJB

Boring ID: RAA12-J25
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.0		Light brown fine SAND, little fine Gravel.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							











Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 8/12/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4'Macrocore

Northing: 532757.1
 Easting: 130953.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 986.0
 Descriptions By: GAR

Boring ID: RAA12-J26
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	P/D Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
985		1	0-1		0.2		Light brown fine SAND.	 Borehole backfilled with Bentonite.
		2	1-3	4.8	0.1		Dark brown fine SAND and SILT, some Brick and Concrete debris.	
5		3	3-6		0.5			
980		4	6-8	1.4	0.7		Dark brown CINDERS, ASH, SLAG, and fine SAND. [FILL]	
		5	8-10	1.3	0.5			
10		6	10-12	1.3	0.7			
975		7	12-15	2.8	3.0		Black fine SAND and CINDERS, wet, groundwater at 12' bgs.	
15								
870								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs;
 3-6': PCBs, VOCs (4-6'), SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 8/8/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532757.1
 Easting: 131003.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 987.2
 Descriptions By: SLL

Boring ID: RAA12-J27
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.9	1.2		Brown fine SAND, some medium to coarse Sand, little fine to medium Gravel, trace Brick and Slag, dry.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								













Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 Duplicate Sample ID: RAA12-Dup-7 (VOCs, SVOCs, Inorganics, PCDD/PCDF, 0-1).

Date Start/Finish: 8/12/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532757.0
 Easting: 131053.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 987.9
 Descriptions By: GAR

Boring ID: RAA12-J28
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1		0.0		Brown to light brown fine SAND, some medium Sand.	 Borehole backfilled with Bentonite.
		2	1-3		0.1		Dark brown fine SAND and CINDERS. [FILL]	
985				4.2			Dark brown CINDERS, ASH, SLAG, and fine SAND, some Glass, Brick and Concrete debris. [FILL]	
5		3	3-6		0.0			
		4	6-8	1.8	0.3			
980		5	8-10	1.2	0.7			
10		6	10-12	1.2	0.1			
975		7	12-15	1.5	0.3		Dark brown SILTY CLAY.	
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 1-3': PCBs, VOCs (4-6'), SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 8/8/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532757.0
 Easting: 131103.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 988.6
 Descriptions By: SLL

Boring ID: RAA12-J29
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.7	6.7		Brown fine SAND, some medium to coarse Sand, little fine Gravel, trace Brick and Cinders, dry.	Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1'; PCBs.

Date Start/Finish: 9/9/02
 Drilling Company: BBL
 Driller's Name: SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532757.0
 Easting: 131153.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 988.5
 Descriptions By: JJB

Boring ID: RAA12-J30
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, little medium to coarse Sand, trace fine to coarse Gravel, trace red Brick, moist.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 9/9/02
 Drilling Company: BBL
 Driller's Name: SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532757.0
 Easting: 131203.6
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 993.2
 Descriptions By: JJB

Boring ID: RAA12-J31
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
995								
0		1	0-1	1.0	0.1		Dark brown fine SAND, little medium to coarse Sand, trace fine to coarse Gravel, trace Silt, trace Roots.	 Borehole backfilled with Bentonite.
990								
5								
985								
10								
980								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532698.9
 Easting: 130111.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 982.8
 Descriptions By: RJP

Boring ID: RAA12-K9
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Brown fine to medium SAND, some fine Gravel and Silt, trace Ash and Wood.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.0
 Easting: 130153.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.0
 Descriptions By: RJP

Boring ID: RAA12-K10
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.1		Dark brown to light brown fine SAND, some Silt, trace Grass and Roots.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/11/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532657.0
 Easting: 130103.7
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.1
 Descriptions By: RJP

Boring ID: RAA12-K11
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Brown fine SAND, some Silt and fine Gravel, trace Ash, Brick, and Slag.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.1
 Easting: 130253.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.5
 Descriptions By: RJP

Boring ID: RAA12-K12
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
	985							
	0	1	0-1	1.0	0.2		Brown to light brown fine SAND and fine GRAVEL, trace Brick and Silt.	Borehole backfilled with Bentonite.
	980							
5								
	975							
10								
	970							
15								





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/6/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.1
 Easting: 130361.5
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.7
 Descriptions By: TJM

Boring ID: RAA12-K14
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	0.8	0.0		Dark brown coarse SAND, some fine Gravel.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/6/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.0
 Easting: 130404.0
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.8
 Descriptions By: TJM

Boring ID: RAA12-K15
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	0.9	0.0		Light brown medium SAND and fine to medium GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCS, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.1
 Easting: 130453.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.8
 Descriptions By: RJP

Boring ID: RAA12-K16
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	1.0	0.0		Brown and reddish-brown fine SAND, some fine Gravel and Silt.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/11/02
 Drilling Company: BBL
 Driller's Name: NJR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532708.4
 Easting: 130504.3
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.4
 Descriptions By: SLL



Boring ID: RAA12-K17
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, trace fine to medium Gravel.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/11/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532710.0 Easting: 130554.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.6 Descriptions By: SLL	Boring ID: RAA12-K18 Client: General Electric Company Location: Lyman Street Area
---	---	--



DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985	0							
		1	0-1	1.0	0.0		Brown fine SAND, some fine to medium Gravel, trace Brick.	 Borehole backfilled with Bentonite.
980	5							
975	10							
970	15							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 9/11/02
 Drilling Company: BBL
 Driller's Name: NJR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532703.4
 Easting: 130597.5
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.7
 Descriptions By: SLL

Boring ID: RAA12-K19
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.0		Brown fine SAND, some fine to medium Gravel.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/9/02
 Drilling Company: BBL
 Driller's Name: SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532706.9
 Easting: 130652.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.6
 Descriptions By: JJB

Boring ID: RAA12-K20
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
		1	0-1		0.1		Brown fine SAND, trace medium to coarse Sand, fine Gravel, and Silt, moist.	 Borehole backfilled with Bentonite.
		2	1-3	3.0	0.0		Brown fine SAND, some Silt, little fine Gravel, moist.	
980								
975								
970								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 9/9/02
 Drilling Company: BBL
 Driller's Name: SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.1
 Easting: 130753.7
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 987.6
 Descriptions By: JJB

Boring ID: RAA12-K22
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	1.0	0.0		Dark brown fine SAND, trace medium to coarse Sand, slightly moist.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 8/21/02
 Drilling Company: BBL
 Driller's Name: JJB/JAB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.1
 Easting: 130803.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.9
 Descriptions By: JJB



Boring ID: RAA12-K23
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	1.0	0.0		Light brown fine SAND, some Silt, trace fine Gravel.	Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/21/02 Drilling Company: BBL Driller's Name: JJB/JAB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532707.1 Easting: 130853.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: NA Descriptions By: JJB	Boring ID: RAA12-K24 Client: General Electric Company Location: Lyman Street Area
---	--	--



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	P/D Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	0	1	0-1	1.0	0.0		Light brown fine SAND, little fine Gravel.	 Borehole backfilled with Bentonite.
5	-5							
10	-10							
15	-15							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/9/02
 Drilling Company: BBL
 Driller's Name: JTG/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.1
 Easting: 130903.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.9
 Descriptions By: SLL

Boring ID: RAA12-K25
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample (in)/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.9		Brown fine SAND, little medium to coarse Sand and fine Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/9/02
 Drilling Company: BBL
 Driller's Name: JTG/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532707.1
 Easting: 130953.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 985.7
 Descriptions By: SLL



Boring ID: RAA12-K26
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	985	1	0-1	1.0	0.8		Brown fine SAND, little medium to coarse Sand and fine Gravel, trace medium Gravel. dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/8/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532707.0 Easting: 131053.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 987.8 Descriptions By: SLL	Boring ID: RAA12-K28 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.8	0.9		Brown fine SAND, little coarse to medium Sand, trace fine Gravel and Brick, dry.	 Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/8/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532707.0 Easting: 131103.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 988.2 Descriptions By: SLL	Boring ID: RAA12-K29 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0		1	0-1	0.8	1.8		Brown fine SAND, some medium Sand, little coarse Sand and fine to medium Gravel, dry.	Borehole backfilled with Bentonite.
985								
5								
980								
10								
975								
15								

	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532635.5
 Easting: 130009.6
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 981.8
 Descriptions By: RJP

Boring ID: RAA12-L7
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0		1	0-1	1.0	0.0		Dark brown fine to medium SAND and fine GRAVEL, trace Ash and Silt.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								











Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/11/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532657.0
 Easting: 130053.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 983.0
 Descriptions By: RJP

Boring ID: RAA12-L8
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/T/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.3		Dark brown fine SAND, some Silt, trace fine Gravel and Roots.	 Borehole backfilled with Bentonite.
		2	1-4	3.6	0.1		Light brown to brown fine SAND, some fine Gravel and Concrete.	
980								
		3	4-6		0.0		Brown fine SAND and fine to medium Gravel, some Concrete, trace Brick.	
5								
		4	6-8	2.5	0.2			
		5	8-10		0.1		Brown coarse SAND, trace fine Gravel.	
975								
		6	10-12	3.0	0.0		Brown to gray coarse SAND, trace fine Sand and Gravel, moist.	
10								
		7	12-15	3.0	0.0		Brown to gray coarse SAND, wet at 12.3' bgs.	
970								
15								





Remarks: NA = Not Applicable/Available; bgs = below ground surface.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 12/11/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532657.0
 Easting: 130103.7
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.1
 Descriptions By: RJP

Boring ID: RAA12-L9
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine to medium SAND, some Ash, Slag, Concrete and fine Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.
 MS/MSD collected (PCBs, 0-1').

Date Start/Finish: 12/11/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532657.0
 Easting: 130153.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 982.9
 Descriptions By: RJP

Boring ID: RAA12-L10
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
		1	0-1		0.1		Dark brown medium SAND, some Silt and fine to medium Gravel.	
		2	1-4	2.2	0.7		Dark brown to brown fine to medium SAND and fine to medium GRAVEL, ASH, COAL, and SLAG, trace Silt.	
980		3	4-6		0.3		Olive brown to brown fine SAND and SILT, trace fine Gravel, moist.	
		4	6-8	2.4	0.0		Reddish-brown fine SAND and SILT, to medium to coarse gray SAND, trace fine Gravel.	
975		5	8-10		0.0		Gray coarse SAND, trace fine Gravel.	
		6	10-12	3.2	0.0		Moist at 12' bgs. Wet at 12.3' bgs.	
		7	12-15	3.0	0.0			
15								

Borehole backfilled with Bentonite.



Remarks: NA = Not Applicable/Available; bgs = below ground surface.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs; 10-15': PCBs; Duplicate Sample ID: RAA12-Dup-32
 (PCBs, 0-1'); MS/MSD collected(PCBs, VOCs, SVOCs, Inorganic,
 PCDD/PCDF, 3-6'); VOCs collected at 0.6' and 4.6' bgs.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532657.0
 Easting: 130203.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.2
 Descriptions By: RJP









Boring ID: RAA12-L11
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.0		Brown fine SAND and fine GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/11/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532657.0 Easting: 130253.9 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 983.6 Descriptions By: RJP	Boring ID: RAA12-L12 Client: General Electric Company Location: Lyman Street Area
--	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.2		Dark brown medium SAND, some medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
		2	1-4	2.6	0.8		Brown fine to orange-brown fine to medium SAND and fine to medium GRAVEL, some Pebbles, trace Silt.	
5		3	4-6		0.4		Dark brown to black medium to coarse SAND, SLAG, and ASH, trace Brick.	
		4	6-8	2.3	0.1			
975		5	8-10		0.1		Brown fine to medium SAND, some Slag, Brick and fine to medium Gravel, trace Ash and Silt.	
10		6	10-12		0.0		Dark brown fine SAND, some Silt, Brick and fine Gravel.	
		7	12-15	3.0	0.0		Brown: gray medium to coarse SAND, wet at 12.8' bgs.	
15								



BBL
 BLASLAND, BOUCK & LEE, INC.
 engineers & scientists

Remarks: NA = Not Applicable/Available; bgs = below ground surface.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs. Duplicate Sample ID: RAA12-Dup-30
 (PCBs, 10-15'); MS/MSD collected (PCBs, 3-6'). VOCs
 collected at 0.7' and 2.8' bgs.

Date Start/Finish: 12/13/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532657.0
 Easting: 130303.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.0
 Descriptions By: RJP

Boring ID: RAA12-L13
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Light brown fine SAND, some fine Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								










Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/4/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532657.1
 Easting: 130353.9
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.3
 Descriptions By: RJP



Boring ID: RAA12-L14
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.4		ASPHALT. Dark brown fine to medium SAND, some fine to medium Gravel.	Borehole backfilled with Bentonite.
		2	1-4	3.2	8.1		Brown fine to medium SAND, some coarse Sand, fine to medium Gravel, Ash, Brick, and Slag, trace Silt. [FILL]	
980		3	4-6		3.4		Dark brown to black medium SAND, some Ash, Brick, Slag, and Glass, trace Silt. [FILL]	
5		4	6-8	2.2	2.9			
		5	8-10		0.3		Brown fine SAND, some Silt, trace Brick.	
10		6	10-12	2.5	6.0		Brown fine SAND and SILT, trace tiny Pebbles. Moist at 11.8' bgs.	
		7	12-15	1.8	0.0		Dark brown fine SAND and SILT, slight sewage odor. Wet at 12.7' bgs.	
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 12/6/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532657.3 Easting: 130404.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.3 Descriptions By: TJM	Boring ID: RAA12-L15 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Dark brown coarse SAND and SILT, some fine Gravel and Brick.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 9/11/02
 Drilling Company: BBL
 Driller's Name: NJR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532658.1
 Easting: 130456.0
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.4
 Descriptions By: SLL

Boring ID: RAA12-L16
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
		1	0-1	0.0		[Stippled Pattern]	Brown fine SAND, trace fine to medium Gravel.	Borehole backfilled with Bentonite.
		2	1-3	3.1	1.2	[Cross-hatch Pattern]	Brown fine SAND, COAL, and ASH, trace Brick. [FILL]	
		3	3-4		1.6	[Cross-hatch Pattern]		
980		4	4-6		0.0	[Cross-hatch Pattern]	Brown fine SAND, some fine to medium Gravel, trace coarse Sand.	
		5	6-8		0.0	[Cross-hatch Pattern]		
		6	8-10		0.0	[Cross-hatch Pattern]	Brown-gray fine SAND, some fine to medium Gravel, trace Coal and Ash, moist. [FILL]	
		7	10-12		0.0	[Cross-hatch Pattern]		
		8	12-15		0.0	[Cross-hatch Pattern]	Brown fine SAND, little fine to medium Gravel, trace Coal and Ash, moist. [FILL] Brown fine SAND, some Silt, trace Peat, moist.	
970								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs;
 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 9/11/02
 Drilling Company: BBL
 Driller's Name: NJR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532658.5
 Easting: 130506.3
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.0
 Descriptions By: SLL

Boring ID: RAA12-L17
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		ASPHALT. Brown fine SAND, little fine to medium Gravel, trace Brick.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/11/02
 Drilling Company: BBL
 Driller's Name: NJR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532659.9
 Easting: 130544.4
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.6
 Descriptions By: SLL

Boring ID: RAA12-L18
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985	0							
		1	0-1	0.0			Brown fine SAND, some fine to coarse Gravel.	Borehole backfilled with Bentonite.
		2	1-3	3.2	0.0		Brown fine SAND, some fine to medium Gravel, moist.	
		3	3-4	0.0			Brown fine SAND, little Silt, some fine to medium Gravel, moist.	
980	5	4	4-6	0.0			Brown fine SAND, some Ash and Coal, moist. [FILL]	
		5	6-8	3.0	0.0			
		6	8-10	0.0			Gray-brown fine SAND and SILT, wet.	
975	10	7	10-12	3.7	0.0			
		8	12-15	3.0	0.0		Gray-brown fine SAND, little fine to medium Gravel, wet.	
970	15						Brown fine SAND, little fine to medium Gravel, wet.	





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs;
 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs.

Date Start/Finish: 9/11/02
 Drilling Company: BBL
 Driller's Name: NJR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532660.0
 Easting: 130602.1
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.2
 Descriptions By: SLL

Boring ID: RAA12-L19
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, some fine to medium Gravel.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								











Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 9/4/02
 Drilling Company: BBL
 Driller's Name: RJP/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532662.3
 Easting: 130663.5
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 985.0
 Descriptions By: SLL

Boring ID: RAA12-L20
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	3.6	0.1		Brown fine SAND, trace Wood, Silt and Grass.	 Borehole backfilled with Bentonite.
		2	1-3	0.0	0.0		Light brown fine to reddish-brown fine to medium SAND.	
5	980	3	3-5	0.0	0.0		Light brown medium to coarse SAND, trace fine Gravel.	
		4	6-8	0.2	0.2			
		5	8-10	0.0	0.0		Brown to olive-brown fine SAND, some Silt, moist.	
10	975	6	10-12	0.1	0.1		Gray to brown medium to coarse SAND, some fine to medium Gravel.	
		7	12-15	2.8	0.0		Brown coarse SAND, medium Gravel, wet at 12.2' bgs.	
15	970							












Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs; Duplicate Sample ID: RAA12-Dup-17
 (PCBs, 6-10'); MS/MSD collected (PCBs, 10-15').

Date Start/Finish: 9/20/02
 Drilling Company: BBL
 Driller's Name: NJR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532657.0
 Easting: 130753.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.3
 Descriptions By: SLL






Boring ID: RAA12-L22
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.0		ASPHALT.	 Borehole backfilled with Bentonite.
		2	1-3	3.0	0.0		Red-brown fine SAND, trace fine Gravel.	
		3	3-4		0.0			
980		4	4-6		0.0		Gray-brown SAND, trace fine Sand and Silt, little fine to medium Gravel, moist.	
5		5	6-8	3.8	0.0			
		6	8-10		0.0			
975		7	10-12	2.5	0.0			
10		8	12-15	3.0	8.0		Gray-brown coarse SAND, little fine to medium Gravel, trace fine Sand, wet.	
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.



Date Start/Finish: 8/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532657.1 Easting: 130853.8 Casing Elevation: NA Borehole Depth: 8' below grade Surface Elevation: 984.6 Descriptions By: GAR	Boring ID: RAA12-L24 Client: General Electric Company Location: Lyman Street Area
---	---	--


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985	0							
		1	0-1		0.7		Brown to gray brown fine SAND, some medium to coarse Sand.	
		2	1-3	4.3	1.3		Dark brown to gray CINDERS, ASH, and SLAG. [FILL]	
980	5	3	3-6		15.1		Dark brown fine SAND, CINDERS, ASH, and SLAG, some Metal debris, Bricks, and Cement. [FILL]	
		4	6-8	1.2	17.3			
							Refusal at 8.0' bgs.	
975	10							
970	15							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses:
 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 3-6': PCBs;
 6-8': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 Duplicate sample ID: RAA12-DUP-9 (PCBs, 3-6').

Date Start/Finish: 8/9/02 Drilling Company: BBL Driller's Name: JTG/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532657.1 Easting: 130903.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.6 Descriptions By: SLL	Boring ID: RAA12-L25 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.5	0.6		Brown fine SAND, little medium to coarse Sand and fine to coarse Gravel, dry.	 Borehole backfilled with Bentonite.
980	5							
975	10							
970	15							



 BLASLAND, BOUCK & LEE, INC. engineers & scientists	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 8/12/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532657.1 Easting: 130953.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 984.8 Descriptions By: GAR	Boring ID: RAA12-L26 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
	985							
		1	0-1	0.6			Brown fine SAND, some medium to coarse Sand.	Borehole backfilled with Bentonite.
		2	1-3	0.4			Gray-brown fine SAND with brown Peat, Concrete, and Asphalt debris. [FILL]	
				4.5				
5	980	3	3-6	0.4			Gray-brown fine SAND, CINDERS, ASH, and CONCRETE. [FILL]	
		4	6-8	1.2	2.4		Gray-brown fine SAND, BRICK, CINDERS, and ASH. [FILL]	
		5	8-10		32.8		Black stained fine to coarse SAND and SILT.	
10	975	6	10-12		35.9			
		7	12-15	NA	72		Black fine SAND and SILT, oil saturated, groundwater at 12' bgs.	
15	970							










 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF; 1-3': VOCs, SVOCs, Inorganics, PCDD/PCDF; 3-6': PCBs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb; 4-6': VOCs; 6-10': PCBs; 10-15': PCBs, Inorganics, Pest/Herb.
---	--


Date Start/Finish: 8/9/02 Drilling Company: BBL Driller's Name: JTG/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532657.1 Easting: 131003.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 986.0 Descriptions By: SLL	Boring ID: RAA12-L27 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	985	1	0-1	1.0	0.2		Brown fine SAND, little medium to coarse Sand and fine Gravel, trace coarse Gravel.	 Borehole backfilled with Bentonite.
5								
	980							
10								
	975							
15								
	970							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/26/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532657.2 Easting: 131053.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 986.6 Descriptions By: Jay Boland	Boring ID: RAA12-L28 Client: General Electric Company Location: Lyman Street Area
--	---	---








DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	985	1	0-1		0.0		Light brown fine SAND, trace coarse Sand and fine to medium Gravel.	 Borehole backfilled with Bentonite.
		2	1-3	2.9	0.0		Black coarse SAND, COAL, and SLAG, slight petroleum odor. [FILL]	
		3	3-4		0.0			
5		4	4-6		0.0			
	980	5	6-8	2.4	0.0			
		6	8-10		0.0			
10		7	10-12	2.0	0.0		Brown fine SAND, some Silt, moist.	
	975	8	12-15	3.0	0.0		Gray fine SAND, wet.	
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 1-3': PCBs; 3-6': PCBs; 6-10': PCBs, VOCs, Inorganics, PCDD/PCDF; 10-15': PCBs.
--	--

Date Start/Finish: 8/26/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532671.1
 Easting: 131145.4
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 987.3
 Descriptions By: Jay Boland



Boring ID: RAA12-L30
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
990								
0							Pre-probe to 3.0' bgs.	Borehole backfilled with Bentonite.
985		NA	0-3	NA	NA			
		1	3-4	0.8	0.0		Dark brown fine SAND, some Coal Slag.	
5		2	4-6		0.0		Grayish-brown COAL SLAG, trace fine Sand. [FILL]	
				2.1				
980		3	6-8		0.0			
		4	8-10		0.0			
10				2.4				
		5	10-12		0.0		Dark brown fine SAND, some Silt, moist.	
975							Grayish-brown COAL SLAG. [FILL]	
		6	12-15	2.6	0.0		Dark brown fine SAND, some Silt, moist.	
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs; 10-15': PCBs.


Date Start/Finish: 12/12/02 Drilling Company: BBL Driller's Name: RJP/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.1 Easting: 130003.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.2 Descriptions By: SLL	Boring ID: RAA12-M7 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/in/T type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Dark brown to brown fine SAND and fine to medium GRAVEL, trace Ash and Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 12/10/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.4 Easting: 130053.9 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 983.0 Descriptions By: JBD	Boring ID: RAA12-M8 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.1		Dark brown to brown medium SAND, some fine Gravel and Concrete, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 12/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.2 Easting: 130103.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.5 Descriptions By: RJP	Boring ID: RAA12-M9 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown to dark brown fine SAND and fine to medium GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 12/11/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.2 Easting: 130153.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.8 Descriptions By: RJP	Boring ID: RAA12-M10 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sampler/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.2		Brown fine to medium SAND, some fine Gravel, trace Silt. Layer of black ASH at 0.7' bgs.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available; bgs = below ground surface. Analyses: 0-1': PCBs. Duplicate Sample ID: RAA12-Dup-32 (PCBs, 0-1).
--	---


Date Start/Finish: 12/11/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.0 Easting: 130203.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.4 Descriptions By: RJP	Boring ID: RAA12-M11 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	00		Brown medium SAND, some Silt and fine to medium Gravel, trace Ash and Coal.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	---


Date Start/Finish: 12/11/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.3 Easting: 130253.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.9 Descriptions By: RJP	Boring ID: RAA12-M12 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown medium SAND and fine GRAVEL, trace Sil.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1'; PCBs.
--	---

Date Start/Finish: 12/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.1 Easting: 130303.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.3 Descriptions By: RJP	Boring ID: RAA12-M13 Client: General Electric Company Location: Lyman Street Area
---	---	---



DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown to light brown fine SAND and fine GRAVEL, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/4/02
 Drilling Company: BBL
 Driller's Name: JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532607.1
 Easting: 130353.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.1
 Descriptions By: RJP



Boring ID: RAA12-M14
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.9		Dark brown to brown fine to medium SAND, some Coal, Ash and Slag, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBS, VOCs, SVOCs, Inorganics, PCDD/PCDF.
 Duplicate sample ID: RAA12-DUP-25 (0-1').


Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.9 Easting: 130405.1 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.9 Descriptions By: SLL	Boring ID: RAA12-M15 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.3		Light brown to brown fine to medium SAND, some Brick, trace fine Gravel.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532608.1 Easting: 130456.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.7 Descriptions By: SLL	Boring ID: RAA12-M16 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.6	X X X X	Brown fine SAND and BRICK, trace Glass and fine Gravel. [FILL]	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. engineers & scientists	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.7 Easting: 130491.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.9 Descriptions By: SLL	Boring ID: RAA12-M17 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.6		Dark brown to brown fine SAND, some Brick, trace fine Gravel.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1'; PCBs.
--	---

Date Start/Finish: 9/11/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532609.3 Easting: 130610.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.8 Descriptions By: SLL	Boring ID: RAA12-M19 Client: General Electric Company Location: Lyman Street Area
--	---	---

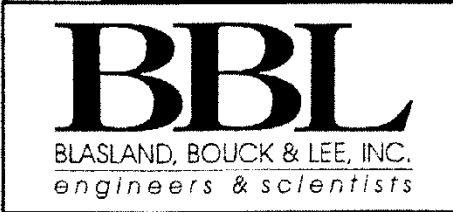
DEPTH	ELEVATION	Sample Run Number	Sampler/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Brown fine SAND, some fine to medium Gravel, trace Organic material.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.



Date Start/Finish: 9/11/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532601.2 Easting: 130651.1 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 984.3 Descriptions By: SLL	Boring ID: RAA12-M20 Client: General Electric Company Location: Lyman Street Area
---	--	--


DEPTH	ELEVATION	Sample Run Number	Sample/in/T/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.0		Brown fine SAND, little Coal and Ash, little fine to medium Gravel.	 Borehole backfilled with Bentonite.
		2	1-3	3.5	0.4		Orange-brown fine SAND.	
		3	3-4		0.2			
5		4	4-6		0.0		Brown-gray fine SAND, little fine to medium Gravel, moist.	
		5	6-8		0.0			
				3.8				
10		6	8-10		0.0		Brown-gray coarse SAND, trace fine Sand, some fine to medium Gravel, wet.	
		7	10-12		0.0			
		8	12-15	3.0	0.0	 Brown fine SAND and SILT, wet.		
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBS, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.


Date Start/Finish: 8/9/02 Drilling Company: BBL Driller's Name: JTG/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532606.9 Easting: 130703.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.1 Descriptions By: SLL	Boring ID: RAA12-M21 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.7	0.9		Brown fine SAND, little medium to coarse Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/9/02 Drilling Company: BBL Driller's Name: JTG/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.1 Easting: 130753.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.6 Descriptions By: SLL	Boring ID: RAA12-M22 Client: General Electric Company Location: Lyman Street Area
---	---	---



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	12		Brown fine SAND, little medium to coarse Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/9/02
 Drilling Company: BBL
 Driller's Name: JTG/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532607.1
 Easting: 130803.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.8
 Descriptions By: SLL



Boring ID: RAA12-M23
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.5	1.0		Brown fine SAND, little medium to coarse Sand, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1: PCBs.

Date Start/Finish: 8/9/02 Drilling Company: BBL Driller's Name: JTG/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.1 Easting: 130853.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.9 Descriptions By: SLL	Boring ID: RAA12-M24 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.7		Brown fine SAND, little medium to coarse Sand and fine Gravel, and trace coarse Gravel. dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---



Date Start/Finish: 8/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.1 Easting: 130903.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.0 Descriptions By: GAR	Boring ID: RAA12-M25 Client: General Electric Company Location: Lyman Street Area
--	---	---


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.9		Gray-brown fine SAND, some medium to coarse Sand.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								






Remarks: NA = Not Applicable/Available.
 Analyses: 0-1'; PCBs.
 MS/MSD collected: (PCBs, 0-1')

Date Start/Finish: 8/8/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.1 Easting: 130953.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.1 Descriptions By: SLL	Boring ID: RAA12-M26 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	3.6		Brown fine SAND, little coarse to medium Sand and fine to medium Gravel, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1'; PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; MS/MSD collected (VOCs, SVOCs, Inorganics, PCDD/PCDF).
--	---









Date Start/Finish: 8/21/02 Drilling Company: BBL Driller's Name: JJB/JAB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532607.0 Easting: 131003.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.6 Descriptions By: JJB	Boring ID: RAA12-M27 Client: General Electric Company Location: Lyman Street Area
---	---	--


DEPTH	ELEVATION	Sample Run Number	Sampler/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985							
		1	0-1	1.0	0.0		ASPHALT.	
							Brown fine SAND, little fine to medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.


Date Start/Finish: 12/16/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532551.3 Easting: 129861.0 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 982.0 Descriptions By: RJP	Boring ID: RAA12-N4 Client: General Electric Company Location: Lyman Street Area
--	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
		1	0-1		0.0		Brown fine to medium SAND, some Silt and fine Gravel.	 Borehole backfilled with Bentonite.
980		2	1-4	3.4	0.3		Brown fine to very fine SAND to gray fine SAND and SILT. Wet from 3.2' to 4.0' bgs.	
5		3	4-6		0.1		Gray fine SAND and SILT, very moist.	
				3.8			Reddish-brown coarse SAND, some fine Gravel.	
975		4	6-8		0.0		Reddish-brown to brown coarse SAND.	
		5	8-10		0.0		Brown to gray coarse SAND and fine GRAVEL.	
10		6	10-12	3.6	0.0		Wet at 11.8' bgs.	
970		7	12-15	3.0	0.0		Gray to dark gray coarse SAND, trace fine Gravel, saturated.	
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available; bgs = below ground surface. Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.
--	--


Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532557.0 Easting: 129903.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.8 Descriptions By: RJP	Boring ID: RAA12-N5 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine to medium SAND, some medium Gravel, Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
---	---

Date Start/Finish: 12/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532557.4 Easting: 130003.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.0 Descriptions By: RJP	Boring ID: RAA12-N7 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.1		Dark brown fine SAND and SILT, trace Grass and Roots.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/11/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 4" Macrocore

Northing: 532557.1
 Easting: 130053.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 983.1
 Descriptions By: RJP



Boring ID: RAA12-N8
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.2		Dark brown to brown fine to medium SAND, some fine to medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
		2	1-4	3.8	0.1		Brown medium SAND, ASH, BRICK, and SLAG, some fine to medium Gravel, trace Silt. (FILL)	
980		3	4-6		3.0		Dark brown to black fine SAND, some Ash, Brick Slag, and Silt.	
5		4	6-8	2.7	1.1			
		5	8-10		0.9		Brown medium to coarse SAND, trace fine Gravel.	
975		6	10-12	3.4	0.0		Reddish-brown medium to coarse SAND, some Silt, moist.	
		7	12-15	2.1	0.0		Brown to gray coarse SAND, wet at 12.4' bgs.	
970								
15								



Remarks: NA = Not Applicable/Available; bgs = below ground surface.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs.
 VOCs collected at 0.6', 2.2' and 5.4' bgs.

Date Start/Finish: 12/12/02 Drilling Company: BBL Driller's Name: RJP/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532557.0 Easting: 130104.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.4 Descriptions By: SLL	Boring ID: RAA12-N9 Client: General Electric Company Location: Lyman Street Area
--	---	---









DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Brown fine SAND and fine GRAVEL, trace crushed Stone and Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/12/02
 Drilling Company: BBL
 Driller's Name: JTG/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532565.7
 Easting: 130149.0
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 983.3
 Descriptions By: SLL



Boring ID: RAA12-N10
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	3.6	0.0		Brown to light brown fine to medium SAND, some fine Gravel, trace Silt.	 Borehole backfilled with Bentonite.
		2	1-4	3.6	0.3		Brown to dark brown fine SAND and SILT, to olive-brown fine Sand and Silt.	
980							Black Ash at 2.8' bgs. Very moist at 3.7' bgs.	
5		3	4-6	2.8	0.1		Olive-brown fine SAND and SILT to brown fine SAND, trace fine Gravel, dry.	
		4	6-8	2.8	0.0		Reddish-brown fine SAND, dry.	
975		5	8-10	3.3	0.0		Light brown fine SAND and SILT. Wet at 9.3' bgs.	
10		6	10-12	3.3	0.0		Light brown to gray fine SAND, some Silt, saturated.	
							Gray very fine SAND, trace Silt, saturated.	
970		7	12-15	3.0	0.0			
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs;
 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 12/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532557.3 Easting: 130203.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.2 Descriptions By: RJP	Boring ID: RAA12-N11 Client: General Electric Company Location: Lyman Street Area
---	---	---










DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.1		Light brown fine SAND, some fine Gravel and Ash, trace Wood, Coal, and Sill.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/12/02
 Drilling Company: BBL
 Driller's Name: JTG/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532557.1
 Easting: 130253.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 982.4
 Descriptions By: SLL

Boring ID: RAA12-N12
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.3		Brown medium to coarse SAND, some fine to medium Gravel, trace Ash and Silt.	 Borehole backfilled with Bentonite.
980		2	1-4	3.7	0.0		Brown to reddish-brown fine to medium SAND, some black Ash and Silt, trace Gravel.	
5		3	4-6		0.1		Brown fine SAND and SILT, some fine Gravel and Ash, trace Slag, moist.	
				2.8			Black fine SAND, ASH, and SLAG, trace Silt, dry. [FILL]	
975		4	6-8		2.1		Black fine SAND, ASH, SLAG, COAL, some Silt, slight odor. [FILL]	
		5	8-10		9.3		Wet at 8.7' bgs.	
10		6	10-12	3.1	0.8		Dark gray fine SAND and SILT, moist.	
970		7	12-15	3.0	0.3		Dark gray fine SAND and SILT, to gray coarse SAND, trace Roots, Wood and Organics, slight organic odor.	
25								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
 10-15': PCBs.

Date Start/Finish: 12/12/02 Drilling Company: BBL Driller's Name: RJP/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532557.4 Easting: 130304.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.7 Descriptions By: SLL	Boring ID: RAA12-N13 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/in/T type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown to light brown fine SAND and fine to medium GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
---	---

Date Start/Finish: 12/2/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532558.3
 Easting: 130404.2
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.3
 Descriptions By: SLL

Boring ID: RAA12-N15
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.8		Brown fine SAND, some Brick, Ash, and fine to medium Gravel, trace Concrete and Coal.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								











Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/10/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532559.9
 Easting: 130455.0
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 983.3
 Descriptions By: JBD

Boring ID: RAA12-N16
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
		1	0-1		0.0		Brown fine to medium SAND, some fine to medium Gravel, trace Silt and Asphalt.	
		2	1-4	3.2	0.6		Brown to light brown fine to medium SAND, fine GRAVEL, ASH, BRICK, and SLAG. [FILL]	
980		3	4-6		0.4		Brown to dark brown medium SAND, medium GRAVEL, ASH, BRICK, and SLAG. [FILL]	
		4	6-8	2.4	0.3			
		5	8-10		0.0		Brown to reddish-brown fine SAND, some Silt, trace fine Gravel.	
		6	10-12	2.9	0.0		Brown to olive-brown fine SAND and SILT.	
		7	12-15	3.0	4.1		Olive-brown fine SAND and SILT, trace Organics and Wood to 13' bgs, saturated.	
970								
15								

Borehole backfilled with Bentonite.



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 1-3': PCBs, VOCs, SVOCs, inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs, VOCs, SVOCs, Inorganic, PCDD/PCDF;
 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb.
 Duplicate sample ID: RAA12-DUP-29 (1-3')

Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532558.5 Easting: 130504.3 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.4 Descriptions By: SLL	Boring ID: RAA12-N17 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	1.2	X X X X	Dark brown to brown fine to medium SAND, some Brick, Ash, Coal, trace fine to medium Gravel.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



<h1 style="margin: 0;">BBL</h1> <p style="margin: 0;">BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	<p>Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.</p>
--	--


Date Start/Finish: 12/3/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532562.5 Easting: 130548.0 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 983.7 Descriptions By: RJP	Boring ID: RAA12-N18 Client: General Electric Company Location: Lyman Street Area
--	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
		1	0-1		0.2		Brown to light brown fine SAND, trace fine Gravel.	Borehole backfilled with Bentonite.
		2	1-4	2.3	0.3		Dark brown fine to medium SAND, some Coal, Ash, and fine to medium Gravel, trace Silt.	
980		3	4-6		0.1		Dark brown fine to medium SAND, some Ash, trace Brick and Silt.	
5		4	6-8	1.6	0.0		Some reddish-brown medium Sand at 7.2' bgs.	
		5	8-10		0.1		Reddish-brown medium to coarse SAND, some fine to medium Gravel, trace Glass and Silt.	
10		6	10-12	2.7	0.0		Dark brown SILT, some fine Sand.	
							Moist at 11.8' bgs.	
							Gray very fine SAND and SILT, moist.	
970		7	12-15	2.5	0.0			
15								



<h1>BBL</h1> <p>BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	<p>Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 6-10': PCBs; 10-15': PCBs. MS/MSD collected (3-6').</p>
--	---


Date Start/Finish: 9/9/02 Drilling Company: BBL Driller's Name: SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532572.9 Easting: 130601.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.9 Descriptions By: JJB	Boring ID: RAA12-N19 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Gray-brown fine SAND, trace Silt, medium to coarse Sand, fine Gravel, Organic material, moist.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 9/9/02 Drilling Company: BBL Driller's Name: SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532546.6 Easting: 130695.2 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.8 Descriptions By: JJB	Boring ID: RAA12-N21 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.2		Brown fine SAND, little medium to coarse Sand and fine Gravel, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532557.0 Easting: 130803.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.7 Descriptions By: GAR	Boring ID: RAA12-N23 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.7		Brown fine SAND, some medium to coarse Sand and Silt. Gray CINDERS and ASH. {FILL}	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	---


Date Start/Finish: 8/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532557.0 Easting: 130903.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.4 Descriptions By: GAR	Boring ID: RAA12-N25 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.9		Brown fine SAND, some medium to coarse Sand, Brick, Cement, and Ash.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



<h1 style="margin: 0;">BBL</h1> <p style="margin: 0;">BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	<p>Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.</p>
--	--


Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532507.0 Easting: 129784.2 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.4 Descriptions By: RJP	Boring ID: RAA12-O2 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, some Silt, trace fine Gravel.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/16/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532507.1 Easting: 129803.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.6 Descriptions By: RJP	Boring ID: RAA12-O3 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985							
0	1	0-1	1.0	0.0		Brown fine SAND and SILT, trace fine Gravel.	 Borehole backfilled with Bentonite.
980							
5							
975							
10							
970							
15							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs. MS/MSD collected (PCBs, 0-1).
--	--


Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532507.1 Easting: 129853.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.3 Descriptions By: RJP	Boring ID: RAA12-04 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, some Silt, trace fine Gravel.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 12/16/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532507.1 Easting: 129903.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.8 Descriptions By: RJP	Boring ID: RAA12-05 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Brown fine to medium SAND, some Silt and fine Gravel.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs; Duplicate Sample ID: RAA12-Dup-34 (PCBs, 0-1').
---	--


Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532498.0 Easting: 129945.3 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.1 Descriptions By: RJP	Boring ID: RAA12-06 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Dark brown to brown fine SAND, some fine Gravel and Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 12/12/02 Drilling Company: BBL Driller's Name: RJP/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532507.1 Easting: 130053.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.9 Descriptions By: SLL	Boring ID: RAA12-08 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.1		Brown fine SAND, fine Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1'; PCBs.
--	---

Date Start/Finish: 12/12/02 Drilling Company: BBL Driller's Name: RJP/SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532507.2 Easting: 130103.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.7 Descriptions By: SLL	Boring ID: RAA12-09 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown to light brown fine SAND, some fine Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1'; PCBs.
--	---

Date Start/Finish: 12/12/02
 Drilling Company: BBL
 Driller's Name: RJP/SLL
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532510.7
 Easting: 130208.9
 Casing Elevation: NA

Borehole Depth: 1' below grade
 Surface Elevation: 982.7

Descriptions By: SLL

Boring ID: RAA12-O11

Client: General Electric Company

Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	P/D Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.1		Dark brown to brown fine SAND and fine to medium GRAVEL, trace Silt.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.









Date Start/Finish: 12/5/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532507.1 Easting: 130253.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 983.1 Descriptions By: RJP	Boring ID: RAA12-O12 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.0	[Dotted pattern]	Light brown fine SAND, trace fine Gravel and Silt.	Borehole backfilled with Bentonite.
		2	1-4	2.9	0.1	[Dotted pattern]	Black fine to medium SAND, some Coal and Slag, trace Silt.	
980								
		3	4-6		0.9	[X pattern]	Black and dark brown medium SAND; ASH, SLAG, COAL, and GLASS, trace Silt. [FILL]	
5				2.3				
		4	6-8		0.7	[X pattern]		
		5	8-10		7.4	[X pattern]	Black fine to medium SAND, COAL, SLAG, WOOD, GLASS, and PORCELAIN, some fine Gravel and Silt, moist. [FILL]	
975								
		6	10-12		3.1	[Dotted pattern]	Dark brown to olive-brown fine SAND and SILT, slight odor, very moist.	
10				2.8				
		7	12-15		0.4	[Dotted pattern]	Gray very fine to medium SAND, trace Organics, Wood and Silt.	
970				3.0				
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6' PCBs;
 6-10': PCBs; 10-15': PCBs.











Date Start/Finish: 12/3/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532507.0 Easting: 130305.4 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 983.1 Descriptions By: RJP	Boring ID: RAA12-O13 Client: General Electric Company Location: Lyman Street Area
--	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	P/D Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		2.6		Black fine to medium SAND, some Slag and fine to medium Gravel.	 Borehole backfilled with Bentonite.
		2	1-4	2.7	0.7		Light brown to black fine to medium SAND, some Ash, trace Brick and Silt.	
980		3	4-6		1.4		Dark brown to black fine to medium SAND, some Ash, some Brick, trace Slag.	
5		4	6-8	2.3	1.9			
		5	8-10		3.7		Black ASH and medium SAND, some Slag, Brick and Porcelain, trace fine Sand. [FILL]	
10		6	10-12	2.6	4.2		Black medium to coarse SAND, ASH, BRICK and GLASS. [FILL]	
		7	12-15	2.1	5.3		Wet at 11.8' bgs.	
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs.
 Duplicate sample ID: RAA12-DUP-23 (PCBs, 6-10').

Date Start/Finish: 12/3/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532507.2 Easting: 130355.1 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 983.0 Descriptions By: RJP	Boring ID: RAA12-014 Client: General Electric Company Location: Lyman Street Area
--	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.2		Black to dark brown medium SAND, some fine Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980		2	1-4	2.6	4.1		Brown to black medium to coarse SAND, some fine to medium Gravel, Ash, and Brick, trace Silt.	
5		3	4-6		2.0			
		4	6-8	2.2	2.3			
975							Dark brown fine SAND and gray SILT.	
10		5	8-10	3.2	0.8		Gray SILT, some fine Sand.	
		6	10-12		0.0		Wet at 11.3 bgs.	
970							Gray fine SAND and SILT. to gray medium SAND, saturated.	
		7	12-15	3.0	0.1		Trace Peat at 14.4' bgs.	
15								




Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 12/4/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532508.4 Easting: 130405.2 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 983.1 Descriptions By: RJP	Boring ID: RAA12-O15 Client: General Electric Company Location: Lyman Street Area
--	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.3		Brown fine to medium SAND, some fine Gravel, trace weathered Stone.	Borehole backfilled with Bentonite.
		2	1-4	3.0	6.6		Black medium SAND, some Ash, Brick, and Coal, trace Glass. [FILL]	
980		3	4-6		5.3			
5		4	6-8	2.2	2.1	X X X X X X X X X X	Dark brown to reddish-brown medium SAND, COAL, SLAG, and BRICK, trace Ash and Silt. [FILL]	
		5	8-10		0.2		Brown to reddish-brown fine SAND and SILT, moist.	
10		6	10-12	3.1	0.0		Olive to gray fine to coarse SAND, trace Wood at 10.5' bgs.	
		7	12-15	3.0	0.0		Brown to gray fine SAND, wet at 12.5' bgs.	
970								
15								

<h1 style="margin: 0;">BBL</h1> <p style="margin: 0;">BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	<p>Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBS; 1-3': PCBS; 3-6': PCBS; 6-10': PCBS; 10-15': PCBS. MS/MSD collected (PCBs, 0-1'). Duplicate sample ID: (PCBs, 10-15').</p>
--	--

Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532509.5 Easting: 130454.5 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.4 Descriptions By: SLL	Boring ID: RAA12-O16 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	1.7	X : X : X : X : X	Brown fine to medium SAND, BRICK, ASH, CINDERS, and COAL, trace fine to medium Gravel. [FILL]	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 12/5/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532508.9
 Easting: 130504.1
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 983.8
 Descriptions By: JBD



Boring ID: RAA12-O17
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Light brown fine SAND, some fine Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBS.


Date Start/Finish: 8/7/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532498.8 Easting: 130744.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.2 Descriptions By: JTB	Boring ID: RAA12-O22 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.9		Brown fine SAND, little medium to coarse Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1'; PCBs.
--	---

Date Start/Finish: 8/21/02 Drilling Company: BBL Driller's Name: JJB/JAB Drilling Method: Direct Push Auger Size: NA Rig Type: Electric Jack Hammer Sample Method: 2' Macrocore	Northing: 532506.8 Easting: 130803.6 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.8 Descriptions By: JJB	Boring ID: RAA12-O23 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	6.8		Brown fine SAND, trace Silt and fine Gravel.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 9/9/02 Drilling Company: BBL Driller's Name: SLL Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532507.0 Easting: 130854.0 Casing Elevation: NA Borehole Depth: 6' below grade Surface Elevation: 983.7 Descriptions By: JJB	Boring ID: RAA12-O24 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, little medium to coarse Sand, little fine to coarse Gravel, dry.	 Borehole backfilled with Bentonite.
							No sample collected from 1' - 3' bgs.	
980		2	3-6	2.0	0.3		Gray very fine SAND, trace coarse Sand, trace Organics.	
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF. 3-6': VOCs, SVOCs, Inorganics, PCDD/PCDF.
---	--

Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532457.1 Easting: 129803.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.8 Descriptions By: RJP	Boring ID: RAA12-P3 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND and fine GRAVEL, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/16/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532457.1
 Easting: 129853.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.2
 Descriptions By: RJP

Boring ID: RAA12-P4
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.0			Dark brown to brown medium SAND, some fine to medium Gravel and Silt.	
		2	1-4	3.6	0.0		Brown to reddish-brown fine SAND, some fine Gravel.	
							Gray fine sand and silt at 2.7' bgs, moist.	
5	980	3	4-6	3.8	0.0		Gray fine SAND and SILT, very moist.	
		4	6-8	0.0			Reddish-brown medium to coarse SAND, some fine Gravel, dry.	
		5	8-10	3.4	0.0		Reddish-brown coarse SAND, trace fine Gravel.	
10	975	6	10-12	0.0			Reddish-brown coarse to gray coarse SAND, wet at 12.7' bgs.	
		7	12-15	3.0	0.1		Reddish-brown coarse to gray coarse SAND, wet at 12.7' bgs.	
15	970							



Remarks: NA = Not Applicable/Available; bgs = below ground surface.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
 VOCs collected at 0.6', 2.7', 7.4', 13.1' bgs.

Date Start/Finish: 12/16/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532457.3
 Easting: 129903.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.4
 Descriptions By: RJP

Boring ID: RAA12-P5
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine to medium SAND, some Silt, trace fine Gravel.	Borehole backfilled with Bentonite.
980								
975								
970								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/16/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532457.3 Easting: 129954.0 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 984.4 Descriptions By: RJP	Boring ID: RAA12-P6 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	P/D Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.0		Brown fine to medium SAND, some fine Gravel and Silt, trace Organic material.	
		2	1-4	2.9	0.0		Brown to light brown fine SAND, to gray fine SAND and SILT, trace fine Gravel. Moist at 2.6' to 3.0' bgs.	
980		3	4-6		0.0		Gray fine SAND and SILT, trace Organics (Roots), moist.	
5		4	6-8	3.9	0.0		Reddish-brown fine to medium SAND.	
		5	8-10		0.0		Reddish-brown medium to coarse SAND.	
975		6	10-12	3.4	0.0		Reddish-brown to gray coarse SAND, trace very fine Gravel.	
10		7	12-15	3.0	0.0		Brown to gray coarse SAND, wet at 12.6' bgs.	
970								
15								











Remarks: NA = Not Applicable/Available; bgs = below ground surface.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs; 10-15': PCBs.
 VOCs collected at 0.9' and 3.4' bgs.

Date Start/Finish: 12/11/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532457.1
 Easting: 130053.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.5
 Descriptions By: RJP



Boring ID: RAA12-P8
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
		1	0-1		0.0		Brown fine SAND and SILT, some fine Gravel, trace Roots and Grass.	
		2	1-4	3.5	0.1		Brown to olive brown fine SAND, some Silt and fine Gravel, trace Roots.	
980		3	4-6		0.0		Gray coarse SAND, some fine Gravel.	
		4	6-8	3.7	0.0		Gray coarse SAND to reddish-brown coarse Sand, some fine Gravel.	
		5	8-10		0.0		Reddish-brown medium to fine SAND, trace fine Gravel.	
975		6	10-12	3.2	0.0		Reddish-brown fine SAND, dry.	
		7	12-15	3.0	0.0		Reddish-brown to gray fine SAND, wet at 12.1' bgs.	
970								
15								










Remarks: NA = Not Applicable/Available; bgs = below ground surface.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 12/13/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532457.0 Easting: 130103.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.6 Descriptions By: RJP	Boring ID: RAA12-P9 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Brown to light brown fine to medium SAND and medium GRAVEL, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1'; PCBs.
---	---









Date Start/Finish: 12/10/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532457.7 Easting: 130254.5 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 981.6 Descriptions By: JDB	Boring ID: RAA12-P12 Client: General Electric Company Location: Lyman Street Area
---	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
980		1	0-1		0.3		Brown to light brown fine to medium SAND, some fine Gravel, trace crushed Rock.	Borehole backfilled with Bentonite.
		2	1-4	2.4	6.1		Brown medium SAND, some fine to medium Gravel, trace Silt. Slight odor at 3.6' bgs.	
5		3	4-6		10.4		Dark brown to black fine SAND, some Silt, trace fine Gravel and crushed Rock.	
975		4	6-8	1.8	2.1			
		5	8-10		1.9		Brown fine to dark brown medium SAND, some Silt, trace Organic material.	
10		6	10-12	2.4	0.2			
970		7	12-15	2.8	0.0		Brown to olive-brown fine SAND and SILT, trace Organic material.	
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs;
 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs; 10-15': PCBs.
 MS/MSD collected (3-6').

Date Start/Finish: 12/5/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532457.1 Easting: 130303.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 983.2 Descriptions By: RJP	Boring ID: RAA12-P13 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.3		Brown fine SAND, trace fine Gravel, Brck, and Silt.	 Borehole backfilled with Bentonite.
		2	1-4	2.3	3.1		Light brown to black fine to medium SAND, some Brick and Ash, trace Silt.	
5		3	4-6		2.4		Brown medium SAND, BRICK, ASH, fine to medium GRAVEL, trace Silt. [FILL]	
		4	6-8	2.6	2.7			
975		5	8-10		0.9		Brown fine to medium SAND, some fine Gravel, trace Brick and Silt, wet at 8.5' bgs.	
10		6	10-12	2.8	0.3		Black medium to coarse SAND, SLAG, COAL, ASH, and fine GRAVEL, trace Silt, moist. [FILL]	
		7	12-15	3.0	1.1		Dark brown fine SAND and SILT, sewage odor, saturated.	
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6' PCBs;
 6-10': PCBs; 10-15': PCBs.
 MS/MSD collected: (PCBs, 6-10').
 Duplicate sample ID: RAA12-DUP-26 (PCBs, 10-15').

Date Start/Finish: 12/5/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532468.5 Easting: 130354.6 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 982.9 Descriptions By: RJP	Boring ID: RAA12-P14 Client: General Electric Company Location: Lyman Street Area
--	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.2		Dark brown medium SAND and fine GRAVEL, trace Ash and Silt.	Borehole backfilled with Bentonite.
		2	1-4	2.8	2.1		Brown fine to medium SAND, ASH, BRICK, and SLAG, trace Silt. [FILL]	
980								
		3	4-6		2.3		Brown to black medium SAND, fine to medium GRAVEL, ASH, SLAG, COAL, trace Brick and Silt. [FILL]	
5								
		4	6-8	2.4	1.9			
975								
		5	8-10		2.1			
10								
		6	10-12	2.5	4.9		Black medium SAND, some Silt, medium Gravel, Slag, and Coal, trace Glass, very wet.	
970								
		7	12-15	2.4	4.5		Black fine to medium SAND, some Silt, Glass, Wood, sewage odor, saturated.	
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6' PCBs;
 6-10': PCBs; 10-15': PCBs.
 MS/MSD collected (PCBs, 3-6').


Date Start/Finish: 12/5/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532475.4 Easting: 130405.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 982.9 Descriptions By: RJP	Boring ID: RAA12-P15 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.6		Black to dark brown fine to medium SAND and fine GRAVEL, trace Slag and Silt.	 Borehole backfilled with Bentonite.
		2	1-4	2.5	1.1		Dark brown fine to medium SAND and fine GRAVEL, BRICK, SLAG, COAL, GLASS, trace Silt. [FILL]	
5		3	4-6		3.3			
		4	6-8	2.1	0.0			
975		5	8-10		0.0		Brown to olive-brown fine SAND, some Silt, moist.	
10		6	10-12	3.2	0.0		Gray fine SAND, some Silt, saturated at 10.4' bgs.	
		7	12-15	3.0	0.0		Gray fine to coarse SAND, wet.	
15								



<h1>BBL</h1> <p>BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs; 1-3': PCBs; 3-6' PCBs; 6-10': PCBs; 10-15': PCBs.
--	--


Date Start/Finish: 8/7/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532459.4 Easting: 130712.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 981.1 Descriptions By: JTB	Boring ID: RAA12-P21 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
980		1	0-1	1	0.9		Brown fine SAND, little Silt, medium to coarse Sand, and fine Gravel, trace Ash and Cinders, moist.	 Borehole backfilled with Bentonite.
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
---	---


Date Start/Finish: 8/7/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532451.5 Easting: 130799.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.2 Descriptions By: JTB	Boring ID: RAA12-P23 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.7		Brown fine SAND, little medium to coarse Sand, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532407.0 Easting: 129803.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.1 Descriptions By: RJP	Boring ID: RAA12-Q3 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine to medium SAND, some fine to medium Gravel and Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532407.1 Easting: 129853.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.0 Descriptions By: RJP	Boring ID: RAA12-Q4 Client: General Electric Company Location: Lyman Street Area
--	---	---



DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND and fine GRAVEL, and some Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/17/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532407.1
 Easting: 129903.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.3
 Descriptions By: RJP

Boring ID: RAA12-Q5
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND and fine GRAVEL, some medium Gravel and Silt, trace brown medium Sand.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 12/17/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532407.0
 Easting: 129953.7
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.6
 Descriptions By: RJP



Boring ID: RAA12-Q6
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	P/D Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine to medium SAND and fine to medium GRAVEL and some Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.


Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532406.7 Easting: 130004.5 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 984.5 Descriptions By: JTG	Boring ID: RAA12-Q7 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.1		Dark brown to brown fine SAND, some fine to medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
975								
970								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532407.8 Easting: 130054.1 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.7 Descriptions By: JTG	Boring ID: RAA12-Q8 Client: General Electric Company Location: Lyman Street Area
---	---	---



DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.0		Dark brown fine SAND, some fine Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 12/2/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532398.4
 Easting: 130210.1
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 982.8
 Descriptions By: JTG



Boring ID: RAA12-Q11
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.0		Light brown fine SAND, some fine to medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								












Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532407.6 Easting: 130254.3 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.0 Descriptions By: SLL	Boring ID: RAA12-Q12 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0		1	0-1	0.7	0.1		ASPHALT. Light brown fine SAND, some fine to medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---



Date Start/Finish: 12/5/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532410.0 Easting: 130280.9 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 982.2 Descriptions By: RJP	Boring ID: RAA12-Q13 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.2		Brown medium to coarse SAND, some Pebbles.	 Borehole backfilled with Bentonite.
980		2	1-4	2.9	0.9		Brown, dark brown, to black fine to coarse SAND, some Organic material (Roots and Slag), trace Silt, moist.	
5		3	4-6		0.5		Brown to black medium SAND, some Slag, Ash, and Coal, trace fine Gravel and Silt.	
				2.3			Brown medium SAND, some fine to medium Gravel, Ash, Slag, and Concrete, trace Silt.	
975		4	6-8		1.4		Dark brown fine SAND and SILT, some Organics (Roots), trace Wood.	
		5	8-10		0.1		Dark gray to gray fine SAND, trace Silt, moist.	
10		6	10-12	3.3	0.0		Gray fine SAND, wet.	
970		7	12-15	2.4	0.0			
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.



Date Start/Finish: 8/7/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532407.4 Easting: 130653.9 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 980.8 Descriptions By: JTB	Boring ID: RAA12-Q20 Client: General Electric Company Location: Lyman Street Area
--	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
980		1	0-1	1.0	0.6		Brown fine SAND, little medium Sand, trace coarse Sand, fine Gravel, Slag and Porcelain, dry.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.



Date Start/Finish: 8/7/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532407.0 Easting: 130703.6 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.6 Descriptions By: JTB	Boring ID: RAA12-Q21 Client: General Electric Company Location: Lyman Street Area
--	---	--


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	0.9	0.7		Brown fine SAND, little medium Sand, trace coarse Sand, Ash, Cinders, and Glass, dry.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 8/7/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532407.6 Easting: 130754.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 981.7 Descriptions By: JTB	Boring ID: RAA12-Q22 Client: General Electric Company Location: Lyman Street Area
--	---	--



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0		1	0-1	0.9	0.4		Brown fine SAND, little medium to coarse Sand, trace fine Gravel, Ash, Cinders and Coal.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	---

Date Start/Finish: 8/7/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532413.8
 Easting: 130837.2
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.7
 Descriptions By: JTB

Boring ID: RAA12-Q24
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.7	0.4		Brown fine SAND, little medium Sand, trace coarse Sand and fine Gravel, dry.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/17/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532370.6
 Easting: 129819.1
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.8
 Descriptions By: RJP

Boring ID: RAA12-R3
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Dark brown to brown fine SAND and fine GRAVEL, some Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/16/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532350.9
 Easting: 129848.5
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: NA
 Descriptions By: RJP

Boring ID: RAA12-R4
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	0							
		1	0-1		0.0		Brown fine to medium SAND and medium GRAVEL, some Silt.	
		2	1-4	3.2	0.0		Brown fine SAND, some reddish brown fine Sand and Silt, trace fine Gravel.	
		3	4-6		0.0		Gray to light brown fine SAND and SILT, trace fine Gravel, very moist.	
		4	6-8	3.8	0.0		Reddish-brown coarse SAND, trace fine Gravel, dry.	
		5	8-10		0.0		Reddish-brown fine to coarse SAND, dry.	
		6	10-12	3.7	0.0			
		7	12-15	3.0	0.0		Brown very coarse SAND, wet at 12.3' bgs.	
15	15							

Borehole backfilled with Bentonite.





Remarks: NA = Not Applicable/Available; bgs = below ground surface.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs.
 Duplicate Sample ID: RAA12-Dup-33 (PCBs, 3-6');
 MS/MSD collected (PCBs, 10-15).

Date Start/Finish: 12/17/02
 Drilling Company: BBL
 Driller's Name: RJP/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532371.6
 Easting: 129895.6
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 984.9
 Descriptions By: RJP

Boring ID: RAA12-R5
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	0.9	0.0		Dark brown to brown fine SAND, some fine to medium Gravel and Silt.	 Borehole backfilled with Bentonite.
5	980							
10	975							
15	970							





Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532357.1
 Easting: 130003.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.8
 Descriptions By: JJB

Boring ID: RAA12-R7
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, trace Silt, trace fine Gravel.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/10/02
 Drilling Company: BBL
 Driller's Name: RJP
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532357.8
 Easting: 130054.7
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 983.3
 Descriptions By: JDB

Boring ID: RAA12-R8
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.0		Brown medium to coarse SAND, many Pebbles, trace fine Gravel and Silt.	 Borehole backfilled with Bentonite.
		2	1-4	3.4	0.1		Brown to dark brown medium SAND, BRICK, ASH, SLAG, trace fine Sand and Silt. [FILL]	
980		3	4-6		0.0		Dark brown medium SAND, BRICK, ASH, COAL. [FILL]	
5		4	6-8	3.1	0.7		Reddish-brown fine SAND at 5.6' bgs. Brown to reddish-brown fine SAND, some Silt, trace Ash.	
		5	8-10		0.0		Reddish-brown fine SAND, some Silt.	
		6	10-12	3.6	0.0		Wet at 9.8' bgs. Reddish-brown fine SAND, dry.	
975		7	12-15	3.0	0.0		Reddish-brown to gray very fine SAND and SILT, very wet throughout.	
10								
970								
15								











Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs;
 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs.

Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532358.3 Easting: 130104.1 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.7 Descriptions By: JTG	Boring ID: RAA12-R9 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.1		Light brown fine SAND, some Coal, Ash, and fine to medium Gravel, trace Silt.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BBL BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---



Date Start/Finish: 12/10/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532357.3 Easting: 130153.5 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 982.6 Descriptions By: JDB	Boring ID: RAA12-R10 Client: General Electric Company Location: Lyman Street Area
--	--	--


DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.2		ASPHALT. Brown fine to medium SAND, some fine to medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980		2	1-4	2.6	0.1		Brown fine to medium SAND, some Pebbles, Brck, gray coarse Sand, Ash, and Slag, trace Silt.	
5		3	4-6		1.3			
				1.8			Brown medium SAND, some fine Gravel and Slag, trace Brck, Ash, and Silt.	
		4	6-8		0.9			
975								
		5	8-10		3.2		Brown coarse SAND, some Pebbles, some dark brown to black fine Sand and Silt, some Organic material, swamp odor, wet at 6.3' bgs.	
10				2.4			Black to brown fine SAND and SILT, trace Organic material, slight swamp odor.	
		6	10-12		2.1			
							Brown fine SAND and SILT, moist.	
970								
		7	12-15	2.1	1.7			
15								

BBL
 BLASLAND, BOUCK & LEE, INC.
 engineers & scientists

Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 12/2/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532357.3 Easting: 130204.5 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 981.5 Descriptions By: JTG	Boring ID: RAA12-R11 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0		1	0-1	1.0	0.0		Brown to light brown fine SAND and SILT, trace fine Gravel.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs. MS/MSD collected (PCBs, 0-1').
--	---

Date Start/Finish: 12/9/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532357.5 Easting: 130254.1 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 980.8 Descriptions By: SLL	Boring ID: RAA12-R12 Client: General Electric Company Location: Lyman Street Area
---	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1		0.0		Brown to light brown fine to medium SAND and fine to medium GRAVEL, some crushed Rock.	Borehole backfilled with Bentonite.
		2	1-4	3.0	0.9		Dark brown medium SAND and fine to medium GRAVEL, some Ash, Brick, and Slag, trace Silt.	
5		3	4-6		1.2			
	975	4	6-8	2.3	6.4		Dark brown to black fine to medium SAND and fine GRAVEL, trace Brick, Ash, and Silt, slight organic odor.	
		5	8-10		0.2		Dark gray fine SAND and SILT.	
10		6	10-12	3.2	0.0		Brown very fine SAND, trace Silt.	
	970	7	12-15	3.0	0.0		Gray fine to medium SAND, some fine Gravel, trace Wood and Organic material, wet.	
15	965							

<h1>BBL</h1> <p>BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb; 3-6': PCBs, Inorganics; 6-10': PCBs, VOCs, SVOCs, Inorganic, PCDD/PCDF; 10-15': PCBs, VOCs, SVOCs, Inorganic, PCDD/PCDF, Pest/Herb. MS/MSD (10-15'). Duplicate ID: RAA12-DUP-28 (1-3)
--	--








Date Start/Finish: 12/9/02 Drilling Company: BBL Driller's Name: RJP Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532359.0 Easting: 130290.3 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 982.2 Descriptions By: SLL	Boring ID: RAA12-R13 Client: General Electric Company Location: Lyman Street Area
---	--	--


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1		0.0		Brown fine to medium SAND, some fine to medium Gravel, trace Silt.	 Borehole backfilled with Bentonite.
980		2	1-4	2.6	1.1		Brown to dark brown medium SAND and fine to medium GRAVEL, trace Ash, Brick, and Silt.	
5		3	4-6		0.2		Dark gray fine to medium SAND, some Brick, trace Silt and Slag.	
				2.4				
975		4	6-8		0.1		Dark gray fine to medium SAND, some Brick, trace Silt and Slag.	
		5	8-10		0.0		Gray fine SAND, trace Organics and fine Gravel, very moist.	
10				2.6				
		6	10-12		0.0		Gray to brown very fine SAND, trace Organic material.	
970								
		7	12-15	3.0	0.0		Gray fine to medium SAND, trace fine Gravel. Petroleum odor at 13.7' bgs.	
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.


Date Start/Finish: 8/8/03 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532360.6 Easting: 130463.9 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 981.1 Descriptions By: JTB	Boring ID: RAA12-R16 Client: General Electric Company Location: Lyman Street Area
--	--	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
980		1	0-3	2.8	NA		Brown fine SAND, little medium to coarse Sand and fine to medium Gravel, dry.	 Borehole backfilled with Bentonite.
5		2	3-6	1.4			Dark brown fine SAND, some Silt, little Organic material, moist.	
975				3.0			Dark brown fine SAND and SILT, some Organic material, moist.	
10		3	6-10	NA			Gray fine SAND, trace coarse Sand and fine Gravel.	
970		4	10-12	0.3			Wet below 10' bgs.	
15		5	12-15	1.6	3.0		Gray fine to coarse SAND and fine to medium GRAVEL, wet.	

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 3-6': SVOCs, Inorganics, PCDD/PCDF; 10-15': VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb; Duplicate Sample ID: RAA12-Dup-5 (Pest/Herb, 10-15'); MS/MSD collected (Pest/Herb, 10-15').
--	---


Date Start/Finish: 8/6/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532348.9 Easting: 130495.6 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 981.1 Descriptions By: JTB	Boring ID: RAA12-R17 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	980	1	0-1	0.9	0.1		Brown fine SAND, little medium to coarse Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
5								
	975							
10								
	970							
15								






 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	---

Date Start/Finish: 8/7/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532357.0 Easting: 130603.9 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 980.4 Descriptions By: JTB	Boring ID: RAA12-R19 Client: General Electric Company Location: Lyman Street Area
---	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	1.1		Brown fine SAND, trace coarse to medium Sand and fine Gravel, dry.	Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	---



Date Start/Finish: 8/7/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532357.2 Easting: 130703.6 Casing Elevation: NA Borehole Depth: 6' below grade Surface Elevation: 980.4 Descriptions By: JTB	Boring ID: RAA12-R21 Client: General Electric Company Location: Lyman Street Area
--	---	--


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1		1.3		Brown fine SAND, trace coarse Sand and fine Gravel, dry.	
		NA	NA	2.7	NA		Brown fine SAND, little medium to coarse Sand and fine Gravel, trace Wood, Ash, Brick and Cinders.	
							Brown fine SAND, trace coarse to medium Sand, dry.	
5	975	2	3-6	2.0	0.5		Brown fine SAND, trace Silt, dry.	
10	970							
15	965							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs;
 3-6': VOCs, SVOCs, Inorganics, PCDD/PCDF.


Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532307.0 Easting: 129803.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 983.4 Descriptions By: RJP	Boring ID: RAA12-S3 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown to light brown fine SAND and fine GRAVEL, some Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
---	---

Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532307.5 Easting: 129854.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.9 Descriptions By: RJP	Boring ID: RAA12-S4 Client: General Electric Company Location: Lyman Street Area
--	---	---



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Light brown fine and medium SAND and fine to medium GRAVEL, trace Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1: PCBs.
--	--

Date Start/Finish: 8/27/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532303.8
 Easting: 129904.6
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.6
 Descriptions By: JJB

Boring ID: RAA12-S5
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, trace Silt, trace fine Gravel, trace Organic material.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.


Date Start/Finish: 8/27/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532307.1 Easting: 129953.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.9 Descriptions By: JJB	Boring ID: RAA12-S6 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, trace Silt and fine to medium Gravel.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDDs/PCDFs.
---	---

Date Start/Finish: 8/27/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532307.0 Easting: 130004.2 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.2 Descriptions By: JJB	Boring ID: RAA12-S7 Client: General Electric Company Location: Lyman Street Area
---	---	---



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, some fine to medium Gravel, trace Silt.	Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDDs/PCDFs.
--	---

Date Start/Finish: 9/10/02
 Drilling Company: BBL
 Driller's Name: NJR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532308.3
 Easting: 130054.0
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 982.1
 Descriptions By: SLL



Boring ID: RAA12-S8
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.8	0.0		Brown fine SAND, trace coarse Sand, trace fine to coarse Gravel, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, Inorganics.



Date Start/Finish: 9/10/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532308.1 Easting: 130103.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 981.2 Descriptions By: SLL	Boring ID: RAA12-S9 Client: General Electric Company Location: Lyman Street Area
--	---	--


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0		1	0-1	0.9	0.0		Brown fine SAND, trace coarse Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.


Date Start/Finish: 9/10/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532307.9 Easting: 130153.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.3 Descriptions By: SLL	Boring ID: RAA12-S10 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Brown fine SAND, trace coarse Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 9/10/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532307.7 Easting: 130203.6 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.6 Descriptions By: SLL	Boring ID: RAA12-S11 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
		1	0-1	1.0	0.0		Dark brown fine SAND, little medium to coarse Sand, trace fine to medium Gravel, dry.	 Borehole backfilled with Bentonite.
975	5							
970	10							
965	15							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb.
--	--

Date Start/Finish: 9/10/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532307.5 Easting: 130253.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.1 Descriptions By: SLL	Boring ID: RAA12-S12 Client: General Electric Company Location: Lyman Street Area
---	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1	1.0	0.0		Dark brown fine SAND, little medium to coarse Sand, little fine to medium Gravel, trace Brick and Wood, moist.	 Borehole backfilled with Bentonite.
975								
5								
970								
10								
965								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/7/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532307.3
 Easting: 130303.9
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 981.6
 Descriptions By: JTB

Boring ID: RAA12-S13
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	980	1	0-1		0.6		Dark brown fine SAND, little medium to coarse Sand, trace fine to medium Gravel, dry.	
		2	1-3	2.4	1.1		Dark brown fine SAND, little medium to coarse Sand and fine to medium Gravel, trace Glass and Cinders, dry.	
		3	3-6		2.6		Dark brown fine SAND, little medium to coarse Sand and Silt, trace fine Gravel, Ash and Cinders.	
5				2.2			Dark brown fine SAND and SILT, trace medium to coarse Sand, Grass, and Organic material, slight petroleum odor, moist.	
	975	4	6-8		0.8		Dark brown SILT and PEAT, moist.	
		5	8-10		0.6		Gray very fine SAND, trace Organic material, moist.	
10		6	10-12	3.3	4.0		Wet at 12' bgs.	
	970						Gray fine to medium SAND, little coarse Sand, trace coarse Gravel, wet.	
		7	12-15	2.7	3.2			
15								

Borehole backfilled with Bentonite.



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs;
 Duplicate Sample ID: RAA12-Dup-4 (PCBs, 1-3');
 MS/MSD collected (PCBs, 3-6').

Date Start/Finish: 8/6/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532307.1
 Easting: 130353.9
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 981.9
 Descriptions By: JTB

Boring ID: RAA12-S14
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Inch Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
		1	0-1		0.4		Brown fine SAND, little medium to coarse Sand and fine Gravel, dry.	
							Dark brown fine to medium SAND, little coarse Sand and coarse Gravel, moist.	
980		2	1-3	2.8	4.5			
		3	3-6		1.1		Dark brown fine SAND, little medium to coarse Sand and fine to medium Gravel, trace Wood and Brick.	
5								
				3.4			Dark brown fine SAND and SILT, moist.	
975		4	6-8		1.1			
		5	8-10		0.4		Brown fine SAND and SILT, moist.	
10								
				4.0			Black SILT and fine SAND, slight petroleum odor, moist.	
		6	10-12		1.2		Dark brown SILT and PEAT, moist.	
970								
							Wet below 12' bgs.	
		7	12-15	3.0	1.1			
15								

Borehole backfilled with Bentonite.



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF,
 Pest/Herb; 6-10': PCBs; 10-15': PCBs; Duplicate Sample ID:
 RAA12-Dup-3 (VOCs, SVOCs, Inorganics, PCDD/PCDF, 0-1');
 MS/MSD collected (VOCs, SVOCs, Inorganics, PCDD/PCDF, 3-6).

Date Start/Finish: 8/6/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532306.9
 Easting: 130403.9
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 981.2
 Descriptions By: JTB

Boring ID: RAA12-S15
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
980		1	0-1		0.1		Brown fine SAND, little medium to coarse Sand and fine Gravel, dry.	
		2	1-3	3.2	0.4		Dark brown fine SAND, little medium to coarse Sand and fine Gravel, trace Cinders and Brick, dry.	
5		3	3-6		0.3		Dark brown fine SAND, little medium to coarse Sand, Silt, and fine Gravel, trace Wood and Brick, moist.	Borehole backfilled with Bentonite.
975		4	6-8	2.0	0.7		Dark brown fine SAND and SILT, trace Wood, moist.	
		5	8-10		0.8		Dark brown SILT, little very fine Sand, moist.	
10		6	10-12	2.4	0.5		Dark brown SILT, trace fine Sand and Peat, wet.	
970		7	12-15	1.8	0.4			
15								











Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs; Duplicate Sample ID: RAA12-Dup-2
 (PCBs, 6-10); MS/MSD collected (PCBs, 10-15').

Date Start/Finish: 8/6/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532306.7
 Easting: 130453.9
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 980.8
 Descriptions By: JTB

Boring ID: RAA12-S16
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
980		1	0-1		0.6		Brown fine SAND, little medium to coarse Sand, fine Gravel, dry.	 Borehole backfilled with Bentonite.
		2	1-3	3.4	0.2		Brown fine SAND, little medium to coarse Sand, trace Cinders and Glass, dry.	
							Brown fine SAND, trace Roots, dry.	
5		3	3-6		0.3			
975				4.0			Brown very fine SAND and SILT, moist.	
		4	6-8		0.4			
		5	8-10		0.4		Gray-brown very fine SAND, moist.	
10				3.7			Brown fine SAND, wet.	
970		6	10-12		0.2			
							Brown fine SAND, little medium to coarse Sand and fine Gravel, wet	
		7	12-15	2.7	0.5			
15								
965								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs; 6-10': PCBs;
 10-15': PCBs.

Date Start/Finish: 8/6/02
 Drilling Company: BBL
 Driller's Name: SLL/JTG
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532315.6
 Easting: 130553.5
 Casing Elevation: NA



Borehole Depth: 1' below grade
 Surface Elevation: 979.6

Descriptions By: JTB

Boring ID: RAA12-S18

Client: General Electric Company



Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
		1	0-1	0.8	0.1		Brown fine SAND, little medium to coarse Sand, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
975								
970								
965								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 12/17/02 Drilling Company: BBL Driller's Name: RJP/JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532263.8 Easting: 129806.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 982.2 Descriptions By: RJP	Boring ID: RAA12-T3 Client: General Electric Company Location: Lyman Street Area
--	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	0.9	0.0		Brown fine SAND, some fine Gravel and Silt.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 8/23/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532257.1 Easting: 129853.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 981.1 Descriptions By: JJB	Boring ID: RAA12-T4 Client: General Electric Company Location: Lyman Street Area
---	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
980		1	0-1		0.0		Brown fine SAND, trace Silt, little fine to medium Gravel, dry.	 Borehole backfilled with Bentonite.
		2	1-3	3.1	0.0		Dark brown fine SAND, little fine to medium Gravel, slight petroleum odor.	
							COAL and ASH. [FILL]	
		3	3-4		0.0		Dark brown fine SAND, little fine to medium Gravel, slight petroleum odor.	
							COAL and ASH. [FILL]	
5		4	4-6		4.2		Dark brown fine SAND, trace coarse Sand, some Coal and Ash, slight petroleum odor.	
975		5	6-8	2.5	2.2			
		6	8-10		8.0		Wet at 8.0' bgs.	
10		7	10-12	2.0	4.2			
970							Black fine GRAVEL, wet.	
		8	12-15	1.5	2.1			
15								

<h1>BBL</h1> <p>BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 1-3': PCBs; 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 6-10': PCBs; 10-15': PCBs.
--	---

Date Start/Finish: 8/26/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532257.2 Easting: 129903.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 981.4 Descriptions By: JJB	Boring ID: RAA12-T5 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0		1	0-1	1.0	0.0		Light brown fine SAND, trace fine Gravel, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/23/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532257.1 Easting: 129953.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 981.3 Descriptions By: JJB	Boring ID: RAA12-T6 Client: General Electric Company Location: Lyman Street Area
---	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	980	1	0-1		0.0		Brown fine SAND, little Silt, trace fine Gravel, dry.	
		2	1-3	2.8	0.0		Dark brown fine SAND, trace Silt, some Coal and Ash, dry. [FILL]	
		3	3-4		2.9			
5		4	4-6		10.2			
	975			3.4			Gray-brown fine SAND, some Silt, little fine Gravel, moist, slight petroleum odor.	
		5	6-8		17.1			
		6	8-10		10.8			
10				3.5			Dark brown fine SAND and SILT, slight petroleum odor, moist.	
	970	7	10-12		2.7		Brown fine SAND, some Silt, wet.	
		8	12-15	3.0	0.0		Gray-brown fine SAND, trace fine Gravel, wet.	
15								

<p>BLASLAND, BOUCK & LEE, INC. engineers & scientists</p>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	---

Date Start/Finish: 8/26/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532257.2 Easting: 130004.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.8 Descriptions By: Jay Boland	Boring ID: RAA12-T7 Client: General Electric Company Location: Lyman Street Area
---	--	---


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Medium brown fine SAND, little fine to medium Gravel, trace Silt, dry.	Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
Analyses: 0-1': PCBs.

Date Start/Finish: 8/23/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532257.1 Easting: 130053.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 980.7 Descriptions By: JJB	Boring ID: RAA12-T8 Client: General Electric Company Location: Lyman Street Area
---	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
980		1	0-1		0.0	[Dotted pattern]	Light brown fine SAND, trace fine to medium Gravel, trace Organic material, dry.	Borehole backfilled with Bentonite.
		2	1-3	3.1	0.0			
		3	3-4		0.0			
5		4	4-6		0.0	[Dotted pattern]	Dark brown fine SAND, trace coarse Sand, some fine to medium Gravel, Coal, and Ash. [FILL]	
975		5	6-8	2.0	2.2			
		6	8-10		2.7	[Dotted pattern]	Dark brown fine SAND, some Silt, little Wood, slight petroleum odor.	
10		7	10-12	2.1	19.2	[Dotted pattern]	Gray-brown coarse SAND, some fine to medium Gravel, little fine Sand, wet.	
970		8	12-15	1.9	0.0			
15								
965								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs; 1-3' PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.
--	--

Date Start/Finish: 9/10/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532258.5 Easting: 130104.0 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 979.8 Descriptions By: SLL	Boring ID: RAA12-T9 Client: General Electric Company Location: Lyman Street Area
---	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980							
		1	0-1	1.0	0.0		Brown fine SAND, trace coarse Sand and fine Gravel, dry.	 Borehole backfilled with Bentonite.
							No sample collected from 1' - 3' bgs.	
5	975	2	3-6	1.5	0.0		Dark brown fine SAND, little medium to coarse Sand and fine Gravel, trace Slag and Ash, moist.	
							No sample collected from 6' - 10' bgs.	
10	970	3	10-12	1.5	0.0		Gray fine SAND, trace coarse Sand and fine Gravel, moist.	
							Wet at 12' bgs.	
15	965	4	12-15	3.0	0.0			

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': VOCs, SVOCs, Inorganics, PCDD/PCDF; 3-6': VOCs, SVOCs, Inorganics, PCDD/PCDF; 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb. MS/MSD collected (3-6'). Duplicate sample ID: RAA12-DUP-21 (10-15').
---	---

Date Start/Finish: 9/10/02 Drilling Company: BBL Driller's Name: NJR Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532268.0 Easting: 130136.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 979.3 Descriptions By: SLL	Boring ID: RAA12-T10 Client: General Electric Company Location: Lyman Street Area
---	--	--



DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headpace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980	0							
		1	0-1	2.6	0.0		Dark brown fine SAND, little coarse Sand and Silt, trace fine Gravel and Organic material, moist.	
		2	1-3	0.0	Dark brown fine SAND, little medium to coarse Sand, Silt, and fine Gravel, trace Roots and Brick, moist.			
975	5	3	3-6	2.8	0.0		Light brown fine to coarse SAND and fine to coarse GRAVEL.	
					0.0		Dark brown SILT and Organics, trace gray fine Sand, moist.	
		4	6-8	0.0				
970	10	5	8-10	3.5	0.0			
		6	10-12	0.0				
		7	12-15	3.0	0.0		Dark brown fine SAND and SILT, little Organic material, wet.	
965	15						Brown fine SAND, little medium to coarse Sand, little Silt, trace coarse Gravel, wet.	

Borehole backfilled with Bentonite.



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs.
 MS/MSD collected (PCBs, 1-3').
 Duplicate sample ID: RAA12-DUP-22 (PCBs, 3-6').



Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532196.9 Easting: 129720.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.4 Descriptions By: JJB	Boring ID: RAA12-U1 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Light brown fine SAND, little fine to medium Gravel, trace Roots.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532207.1 Easting: 129753.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.2 Descriptions By: JJB	Boring ID: RAA12-U2 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Light brown fine SAND, little fine to medium Gravel, trace Organic material.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
 MS/MSd collected (0-1').



Date Start/Finish: 8/26/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532207.2 Easting: 129803.7 Casing Elevation: NA Borehole Depth: 6' below grade Surface Elevation: 980.3 Descriptions By: Jay Boland	Boring ID: RAA12-U3 Client: General Electric Company Location: Lyman Street Area
---	--	---


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1		0.0		Brown fine SAND, trace Silt, trace fine to medium Gravel, trace Organic material.	Borehole backfilled with Bentonite.
		2	1-3	3.4	0.0		Brown fine SAND, some Coal/Ash/Slag. [FILL]	
		3	3-4		0.4			
5	975	4	4-6	1.0	0.0			
10	970							
15	965							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': VOCs, SVOCs, Inorganics, PCDD/PCDF.


Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532207.1 Easting: 129853.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.9 Descriptions By: JJB	Boring ID: RAA12-U4 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Light brown fine SAND, little fine Gravel, dry.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532207.1 Easting: 129903.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.9 Descriptions By: JJB	Boring ID: RAA12-U5 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980							
		1	0-1	1.0	0.0		Light brown fine SAND, little fine to medium Gravel, dry.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF. Duplicate sample ID: RAA12-DUP-12 (0-1').
--	--


Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532207.1 Easting: 129953.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.7 Descriptions By: JJB	Boring ID: RAA12-U6 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980							
		1	0-1	1.0	0.0		Light brown fine SAND, little fine to medium Gravel, dry.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							

 BLASLAND, BOUCK & LEE, INC. engineers & scientists	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/26/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532207.1 Easting: 130003.7 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.8 Descriptions By: Jay Boland	Boring ID: RAA12-U7 Client: General Electric Company Location: Lyman Street Area
---	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/in/T/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980							
		1	0-1	1.0	0.0		Light brown fine SAND, trace fine Gravel, trace Organic material, dry.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs; Duplicate Sample ID: RAA12-DUP-14 (PCBs, 0-1').
--	--

Date Start/Finish: 8/21/02 Drilling Company: BBL Driller's Name: SLL/JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Electric Jack Hammer Sample Method: 4' Macrocore	Northing: 532207.2 Easting: 130053.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 979.1 Descriptions By: SLL	Boring ID: RAA12-U8 Client: General Electric Company Location: Lyman Street Area
--	--	---



DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1		0.0		Light brown fine SAND, trace fine Gravel and Roots, dry.	 Borehole backfilled with Bentonite.
		2	1-3	2.7	0.0		Brown fine SAND, trace fine Gravel.	
		3	3-4		0.0			
975		4	4-6		0.0		Brown fine SAND, some Silt, moist.	
5		5	6-8	3.4	0.0		Brown fine SAND, some Wood, moist.	
		6	8-10		0.0			
970		7	10-12	2.1	0.0			
10		8	12-15	1.7	0.0		Gray-brown fine SAND, some fine to medium Gravel, wet.	
965								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF; 1-3': VOCs, SVOCs, Inorganics, PCDD/PCDF; 3-6': VOCs, SVOCs, Inorganics, PCDD/PCDF; 6-10': VOCs, SVOCs, Inorganics, PCDD/PCDF; 10-15': VOCs, SVOCs, Inorganics, PCDD/PCDF.
---	--

Date Start/Finish: 8/22/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532157.4
 Easting: 129703.9
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 979.2
 Descriptions By: JJB

Boring ID: RAA12-V1
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1	1.0	0.0		Brown fine SAND, some fine Gravel, dry.	 Borehole backfilled with Bentonite.
975								
5								
970								
10								
965								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/22/02
 Drilling Company: BBL
 Driller's Name: JAB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532157.1
 Easting: 129753.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 979.8
 Descriptions By: JJB

Boring ID: RAA12-V2
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980							
		1	0-1	0.0			Light brown fine SAND, trace Silt, trace fine to medium Gravel, dry.	Borehole backfilled with Bentonite.
		2	1-3	3.5	1.2		Dark brown fine SAND, trace fine to medium Gravel, moist.	
		3	3-4		1.6	x x x x x x x x x	COAL and ASH. [FILL]	
5	975	4	4-6		7.2		Brown fine SAND, some Silt, slight odor, moist.	
		5	6-8	2.0	1.7		Brown fine SAND and SILT, slight odor, moist.	
		6	8-10		4.6		Dark brown fine SAND and SILT, slight odor, moist.	
10	970	7	10-12	3.2	8.1		Wet below 12' bgs.	
15	965	8	12-15	3.0	6.0		Light brown to gray fine SAND, some fine to medium Gravel, wet.	



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 3-6': PCBs; 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 10-15': PCBs. MS/MSD collected (1-3').
 Duplicate sample ID: RAA12-DUP-11 (6-10').

Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532157.2 Easting: 129803.6 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.1 Descriptions By: JJB	Boring ID: RAA12-V3 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Light brown fine SAND, little fine to medium Gravel, trace Organic material.	Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
---	---

Date Start/Finish: 8/22/02
 Drilling Company: BBL
 Driller's Name: JAB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532157.0
 Easting: 129853.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 978.8
 Descriptions By: JJB

Boring ID: RAA12-V4
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1		0.0		Brown fine SAND, some fine to medium Gravel, dry.	
							Brown fine SAND, Coal/Ash, moist [FILL]	
		2	1-3	2.8	4.6			
975		3	3-4		5.2			
		4	4-6		8.8		Brown fine SAND, some Silt, moist.	
		5	6-8	3.1	7.1		Dark brown fine SAND and SILT, moist.	
970		6	8-10		3.2		Gray-brown fine SAND and SILT, moist.	
		7	10-12	3.8	0.0		Gray fine SAND, wet.	
		8	12-15	3.0	0.0	Dark brown fine SAND, little coarse Sand, little fine to medium Gravel, wet.		
965								
15								

Borehole backfilled with Bentonite.








Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 8/26/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4" Macrocore

Northing: 532157.1
 Easting: 129903.8
 Casing Elevation: NA
 Borehole Depth: 6' below grade
 Surface Elevation: 979.1
 Descriptions By: Jay Boland

Boring ID: RAA12-V5
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1		0.0		Light brown fine SAND, little fine to medium Gravel, dry.	 Borehole backfilled with Bentonite.
		2	1-3	3.7	0.0		Dark brown fine SAND, some Coal/Ash. [FILL]	
		3	3-4		0.0		Dark brown fine SAND and SILT, moist.	
5		4	4-5	2.0	0.0			
970								
10								
965								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 3-6': Pest/Herb.

Date Start/Finish: 8/23/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532157.1
 Easting: 129953.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 978.8
 Descriptions By: JJB



Boring ID: RAA12-V6
 Client: General Electric Company
 Location: Lyman Street Area


DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction	
980									
0		1	0-1		0.0		Dark brown fine SAND, trace fine Gravel, trace Organic material, moist.		Borehole backfilled with Bentonite.
		2	1-3	3.2	0.0		COAL and ASH, trace white fine substance throughout. [FILL]		
975		3	3-4		0.0		COAL and ASH, little brown fine Sand, trace fine Gravel. [FILL]		
5		4	4-6		4.7				
		5	6-8	2.2	10.2				
970		6	8-10		17.6		Black fine SAND, trace coarse Sand, some fine to coarse Gravel, strong odor.		
10		7	10-12		42.8				
965		8	12-15	1.6	33.1		Gray-brown fine SAND, trace coarse Sand and fine to medium Gravel.		
15									





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, 1-3': PCBs;
 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 10-15': PCBs, VOCs, SVOCs, Inorganic, PCDD/PCDF, Pest/Herb;
 MS/MSD (PCBs, 6-10). Duplicate ID: RAA12-DUP-13 (PCBs, 10-15)

Date Start/Finish: 8/14/02 Drilling Company: BBL Driller's Name: GAR Drilling Method: Direct Push Auger Size: NA Rig Type: Hand Driven Sample Method: 2' Macrocore	Northing: 532107.0 Easting: 129703.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.8 Descriptions By: RJP	Boring ID: RAA12-W1 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980							
		1	0-1	0.6	0.5		Brown fine to medium SAND.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---



Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Hand Driven Sample Method: 2' Macrocore	Northing: 532107.0 Easting: 129753.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.5 Descriptions By: JJB	Boring ID: RAA12-W2 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1	1.0	0.0		Light brown fine SAND, trace fine Gravel, trace Organic material, dry.	 Borehole backfilled with Bentonite.
975								
5								
970								
10								
965								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.



Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: TJM Drilling Method: Direct Push Auger Size: NA Rig Type: Hand Driven Sample Method: 2' Macrocore	Northing: 532107.0 Easting: 129803.6 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.1 Descriptions By: JJB	Boring ID: RAA12-W3 Client: General Electric Company Location: Lyman Street Area
---	---	---


DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Light brown fine SAND, trace Silt, trace Organic material.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.


Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532106.6 Easting: 129853.9 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 980.3 Descriptions By: JJB	Boring ID: RAA12-W4 Client: General Electric Company Location: Lyman Street Area
---	---	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	980	1	0-1	1.0	0.0		Brown fine SAND, some fine Gravel, trace Organic material, dry.	 Borehole backfilled with Bentonite.
5	975							
10	970							
15	965							



 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---


Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: KJD Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532107.0 Easting: 129903.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 978.7 Descriptions By: JJB	Boring ID: RAA12-W5 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1	1.0	0.0		Dark brown fine SAND, some fine to medium Gravel, little Organic material.	 Borehole backfilled with Bentonite.
975								
5								
970								
10								
965								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.
--	---

Date Start/Finish: 8/14/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532057.1 Easting: 129903.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 977.8 Descriptions By: GAR	Boring ID: RAA12-W6 Client: General Electric Company Location: Lyman Street Area
---	---	---









DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	P/D Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
	975	1	0-1	1.0	0.4		Gray-brown SILT, some fine Sand and Gravel.	 Borehole backfilled with Bentonite.
5								
	970							
10								
	965							
15								
	960							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb.
--	---

Date Start/Finish: 8/22/02
 Drilling Company: BBL
 Driller's Name: JAB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532057.2
 Easting: 129753.8
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 978.8
 Descriptions By: JJB

Boring ID: RAA12-X2
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1		0.0		Light brown fine SAND, little fine to medium Gravel, trace Roots, dry.	Borehole backfilled with Bentonite.
		2	1-3	3.0	0.0		Light brown fine SAND, some Coal, Ash, and Slag, dry. [FILL]	
975		3	3-4		0.8			
5		4	4-6		1.2		Dark brown fine SAND and SILT, slight odor, moist.	
		5	6-8	2.8	8.0			
970		6	8-10		1.4		Gray-brown fine SAND, trace Silt, slight odor, wet.	
10		7	10-12	3.1	0.0			
965		8	12-15	2.4	0.0		Fine to medium GRAVEL, little fine Sand, trace coarse Sand, wet.	
15								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs; 3-6': PCBs; 6-10': PCBs;
 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF.

Date Start/Finish: 8/22/02
 Drilling Company: BBL
 Driller's Name: KJD
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Hand Driven
 Sample Method: 2' Macrocore

Northing: 532057.2
 Easting: 129803.7
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 983.2
 Descriptions By: JJB

Boring ID: RAA12-X3
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
985								
0		1	0-1	1.0	0.0		Brown fine SAND, trace Organic material, dry.	 Borehole backfilled with Bentonite.
980								
5								
975								
10								
970								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/22/02 Drilling Company: BBL Driller's Name: JAB Drilling Method: Direct Push Auger Size: NA Rig Type: Tractor-mounted Power Probe Sample Method: 4' Macrocore	Northing: 532057.0 Easting: 129853.8 Casing Elevation: NA Borehole Depth: 15' below grade Surface Elevation: 979.6 Descriptions By: JJB	Boring ID: RAA12-X4 Client: General Electric Company Location: Lyman Street Area
---	--	---

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
		1	0-1		0.0		Light brown fine SAND, little fine to medium Gravel, trace Roots, dry.	Borehole backfilled with Bentonite.
		2	1-3	3.2	0.0		Light brown fine SAND, some Coal and Ash, dry. [FILL]	
		3	3-4		0.0			
975		4	4-5		0.0		Dark brown fine SAND and SILT, moist.	
		5	6-8	3.0	0.0		Light brown fine SAND, some Silt, moist.	
		6	8-10		0.0			
970		7	10-12	3.6	0.0		Light brown to orange fine SAND, trace Silt, moist.	
		8	12-15	3.0	0.0		Light brown fine SAND, wet. Fine to medium GRAVEL, some fine Sand, trace coarse Sand, wet.	
965								





Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 1-3': PCBs; 3-6': PCBs; 6-10': PCBs; 10-15': PCBs.

Date Start/Finish: 8/14/02
 Drilling Company: BBL
 Driller's Name: JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Truck-mounted Power Probe
 Sample Method: 2' Macrocore

Northing: 532057.1
 Easting: 129903.8
 Casing Elevation: NA
 Borehole Depth: 1' below grade
 Surface Elevation: 977.8
 Descriptions By: GAR

Boring ID: RAA12-X5
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1	0.8	1.0		Brown SILT, some fine Gravel.	 Borehole backfilled with Bentonite.
975								
5								
970								
10								
965								
15								



Remarks: NA = Not Applicable/Available.
 Analyses: 0-1': PCBs.

Date Start/Finish: 8/20/02
 Drilling Company: BBL
 Driller's Name: JJB/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Electric Jack Hammer
 Sample Method: 4' Macrocore

Northing: 532067.0
 Easting: 129938.1
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 977.0
 Descriptions By: JJB

Boring ID: RAA12-X6
 Client: General Electric Company
 Location: Lyman Street Area



DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0								
							Brown fine SAND, trace fine to medium Gravel and Roots.	
							Brown fine SAND, some Coal/Ash. [FILL]	
975		1	3-4	0.6	0.0			
							Brown SAND.	
5		2	4-6		0.0		Dark brown fine SAND, some Silt.	
				2.6				
970		3	6-8		0.0			
							Brown fine SAND, little Silt.	
		4	8-10		0.0		Dark brown fine SAND and SILT, moist.	
10				2.3			Brown SAND, little fine to medium Gravel, trace Wood, moist.	
		5	10-12		0.0			
965							Brown fine SAND, wet.	
							Brown fine SAND and fine to medium GRAVEL, wet.	
		6	12-15	1.5	0.0		Gray-brown fine SAND, trace fine to medium Gravel, wet.	
15								


Borehole backfilled with Bentonite.




Remarks: NA = Not Applicable/Available.
 Analyses: 0-3': No samples collected;
 3-6': PCBs; 6-10': PCBs; 10-15': PCBs;
 Duplicate Sample ID: RAA12-Dup-9 (PCBs, 3-6');
 MS/MSD collected (PCBs, 10-15').


Date Start/Finish: 8/14/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532007.7 Easting: 129754.0 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.2 Descriptions By: GAR	Boring ID: RAA12-Y2 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1	0.9	0.8		Gray-brown SILT.	 Borehole backfilled with Bentonite.
975								
970								
965								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/14/02 Drilling Company: BBL Driller's Name: JDB Drilling Method: Direct Push Auger Size: NA Rig Type: Truck-mounted Power Probe Sample Method: 2' Macrocore	Northing: 532006.9 Easting: 129803.8 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 978.6 Descriptions By: GAR	Boring ID: RAA12-Y3 Client: General Electric Company Location: Lyman Street Area
--	---	--





DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1	0.7	1.0	X X	Brown SILT, some fine Gravel. Orange-brown CINDERS, ASH, and SLAG. (FILL)	 Borehole backfilled with Bentonite.
975								
5								
970								
10								
965								
15								

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: NA = Not Applicable/Available. Analyses: 0-1': PCBs.
--	---

Date Start/Finish: 8/21/02
 Drilling Company: BBL
 Driller's Name: JTB/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 532007.0
 Easting: 129853.9
 Casing Elevation: NA
 Borehole Depth: 3' below grade
 Surface Elevation: 977.9
 Descriptions By: JTB

Boring ID: RAA12-Y4
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1		0.0		Light brown fine SAND, trace Roots and Glass, dry.	
		2	1-3	2.3	0.0		COAL/ASH. (FILL)	
975					0.0		Dark brown fine SAND, some Silt, moist.	
5								
970								
10								
965								
15								



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses:
 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 1-3': VOCs, SVOCs, Inorganics, PCDD/PCDF;
 Duplicate Sample ID: RAA12-Dup-10 (VOCs, SVOCs, Inorganics, PCDD/PCDF, 1-3').

Date Start/Finish: 8/15/02 Drilling Company: BBL Driller's Name: JTG Drilling Method: Direct Push Auger Size: NA Rig Type: Hand Driven Sample Method: 2' Macrocore	Northing: 531957.5 Easting: 129805.2 Casing Elevation: NA Borehole Depth: 1' below grade Surface Elevation: 979.4 Descriptions By: JJB	Boring ID: RAA12-Z3 Client: General Electric Company Location: Lyman Street Area
--	---	--

DEPTH	ELEVATION	Sample Run Number	Sample/In/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1	0.7	0.1		Gray-brown fine SAND, trace Silt, trace Ash. [FILL]	Borehole backfilled with Bentonite.
975	5							
970	10							
965	15							

 BLASLAND, BOUCK & LEE, INC. <i>engineers & scientists</i>	Remarks: bgs = below ground surface; NA = Not Applicable/Available. Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDDs/PCDFs.
---	---

Date Start/Finish: 8/21/02
 Drilling Company: BBL
 Driller's Name: JTB/JDB
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 531957.3
 Easting: 129853.7
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 978.7
 Descriptions By: JTB

Boring ID: RAA12-Z4
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
980								
0		1	0-1		0.0		Light brown fine SAND, some Coal/Ash, trace Silt, dry. [FILL]	
		2	1-3	2.2	0.0		COAL/ASH. [FILL]	
975		3	3-4		0.0			
		4	4-6		0.0		Orange-brown SAND, little fine to medium Gravel, dry.	
5							Brown fine SAND, some Silt, moist.	
		5	6-8		0.0		Dark brown fine SAND and SILT, moist.	
970		6	8-10		0.0			
10		7	10-12		0.0		Dark brown fine SAND, some Silt, moist.	
								Borehole backfilled with Bentonite.
		8	12-15		0.0		Brown SAND, some fine to medium Gravel, trace coarse Sand, wet.	
965								
15								











Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 1-3': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 3-6': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF;
 6-10': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb;
 10-15': PCBs, VOCs, SVOCs, Inorganics, PCDD/PCDF, Pest/Herb.

Date Start/Finish: 9/3/02
 Drilling Company: BBL
 Driller's Name: GAR
 Drilling Method: Direct Push
 Auger Size: NA
 Rig Type: Tractor-mounted Power Probe
 Sample Method: 4' Macrocore

Northing: 533240.5
 Easting: 131052.1
 Casing Elevation: NA
 Borehole Depth: 15' below grade
 Surface Elevation: 984.9
 Descriptions By: JJB

Boring ID: RAA12-ZZ28
 Client: General Electric Company
 Location: Lyman Street Area

DEPTH	ELEVATION	Sample Run Number	Sample/in/Type	Recovery (feet)	PID Headspace (ppm)	Geologic Column	Stratigraphic Description	Boring Construction
0	985	1	0-1	1.0	0.0		Brown SILT.	 Borehole backfilled with Bentonite.
		2	1-4	2.2	0.0		Light brown fine SAND.	
5	980	3	4-6	1.6	0.0		Gray-brown fine to medium SAND.	
		4	6-8	1.6	0.0			
		5	8-10	2.0	0.0		Light brown fine SAND, wet. (Groundwater at 8.0' bgs)	
10	975	6	10-12	2.0	0.0			
		7	12-15	1.6	0.0			
15	970							



Remarks: bgs = below ground surface; NA = Not Applicable/Available.
 Analyses: 0-1': PCBs; 1-3': PCBs; 3-6': PCBs;
 6-10': PCBs; 10-15': PCBs.