

**Model Documentation Report:
Residential Sector Demand Module of the
National Energy Modeling System**

March 2006

Office of Integrated Analysis and Forecasting
Energy Information Administration
U.S. Department of Energy
Washington, DC

This report was prepared by the Energy Information Administration, the independent statistical agency within the Department of Energy. The information contained herein should not be construed as advocating or reflecting any policy position of the Department of Energy or any other organization.

Update Information

This is the eleventh edition of the *Model Documentation Report: Residential Sector Demand Module of the National Energy Modeling System (NEMS)*. It reflects changes made to the module over the past year for the *Annual Energy Outlook 2006*. These changes include:

- A new lighting sub-module that includes stock-accounting methodology and separates lighting use into hourly bins by type (general use, torchiere, fluorescent).
- Incorporating shell efficiency coefficients for new construction based on results from using new building simulation software (REM-Design).
- Incorporating new efficiency standards and tax credits from the Energy Policy Act of 2005.
- Extend the model time horizon to 2030.
- Updates to the heating shares and square footage based on new Census Bureau data.

Table of Contents

Table of Contents.....	i
Tables	i
Figures	ii
1. Introduction	1
Purpose of this Report	1
Model Summary	1
Report Organization	4
2. Model Purpose	6
Module Objectives.....	6
Module Input and Output	7
Relationship to Other Models	10
3. Model Rationale	11
Theoretical Approach.....	11
General Model Assumptions.....	12
Area Specific Model Assumptions	14
4. Model Structure.....	18
Structural Overview.....	18
Flow Diagrams	21
FORTRAN Subroutine Descriptions	29
Appendix A: Model Abstract	A-1
Appendix B: Detailed Mathematical Description	B-1
Appendix C: Key Computations and Equations	C-1
Appendix D: Data Sources and Input Parameters	D-1
Appendix E: Data Quality.....	E-1
Appendix F: Bibliography.....	E-1

Tables

Table 1. Services and Equipment in the NEMS Residential Sector Demand Module	19
Table 2. Primary NEMS Residential Sector Demand Module Subroutines	34

Figures

Figure 1. NEMS Residential Sector Demand Module Basic Structure	21
Figure 2. Housing Stock Component Flow	23
Figure 3. Technology Choice Component Flow	24
Figure 4. Appliance Stock Component Flow	25
Figure 5. Building Shell Integrity Component Flow.....	26
Figure 6. Distributed Generation Component Flow	27
Figure 7. Consumption and UEC Component Flow	28

1. Introduction

Purpose of this Report

This report documents the objectives, analytical approach, and structure of the National Energy Modeling System (NEMS) Residential Sector Demand Module. The report catalogues and describes the model assumptions, computational methodology, parameter estimation techniques, and FORTRAN source code.

This document serves three purposes. First, it is a reference document that provides a detailed description for energy analysts, other users, and the public. Second, this report meets the legal requirement of the Energy Information Administration (EIA) to provide adequate documentation in support of its reports according to Public Law 93-275, section 57(b)(1). Third, it facilitates continuity in model development by providing documentation from which energy analysts can undertake model enhancements, data updates, and parameter refinements.

Model Summary

The NEMS Residential Sector Demand Module is currently used in developing long-term projections and energy policy analysis over the time horizon of 2001 through 2030. The model generates projections of energy demand, which is used interchangeably with the concept of energy consumption in this document, for the residential sector by end-use service, fuel type, and Census Division. If the user defines alternative input and parameter assumptions, the policy impacts that result from the introduction of new technologies, market incentives, and regulatory changes can be estimated using the module.

The Residential Sector Demand Module uses inputs from the NEMS system to generate outputs needed in the NEMS integration process. The inputs required by the Residential Sector Demand Module from the NEMS system include energy prices and macroeconomic indicators. These inputs are used by the module to generate energy consumption by fuel type and Census Division in the residential sector. The NEMS system uses these projections to compute equilibrium energy prices and quantities.

The Residential Sector Demand Module is an analytic tool to address current and proposed legislation, private sector initiatives, and technological developments that affect the residential sector. Examples of policy analyses include assessing the potential impacts of the following:

- New end-use technologies
- Changes in fuel prices due to tax policies
- Changes in equipment energy efficiency standards
- Financial incentives for energy efficiency investments
- Financial incentives for renewable energy investments

Archival Media

The Residential Sector Demand Module has been archived as part of the NEMS production runs that generate the *Annual Energy Outlook 2006 (AEO2006)* on a compact disc.

Model Contact

John H. Cymbalsky
Office of Integrated Analysis and Forecasting
Demand and Integration Division
Phone: (202) 586 - 4815

NEMS Residential Sector Demand Module Structure

The residential sector encompasses residential housing units classified as single-family, multifamily, and mobile homes. Energy consumed in residential buildings is the sum of energy required to provide specific end-use energy services, such as space heating, space cooling, lighting, and cooking, which use selected technologies with varying levels of energy efficiency and in different building structures reflecting different thermal envelopes. The Residential Sector Demand Module projects energy demand following a sequence of six steps. The first step is to project housing stock. The second step is to select specific technologies to meet the demand for each energy service. The third step is to project appliance stocks. The fourth step is to project changes in building shell integrity. The fifth step is to project the amount of distributed generation equipment. The sixth step is to calculate the energy consumed by the equipment chosen to meet the demand for energy services.

Housing Stock Component

The Housing Stock Component projects the number of occupied households by housing type and Census Division. Projected housing starts are input from the NEMS Macroeconomic Activity Module (MAM). The housing stock is assumed to retire based on set proportions consistent with available housing demolition data. The housing stock retirement assumptions are presented in the General Model Assumptions section of this report.

Technology Choice Component

The Technology Choice Component simulates the behavior of residential consumers based on the relative importance of life-cycle costs, capital costs, and operating costs of competing technologies within a service. New and replacement equipment decisions reflect additional factors beyond the traditional life-cycle cost methodology, including main space heating fuel choice and previous equipment choices. The Technology Choice Component allocates end-use services based upon a defined equipment menu of the various technologies and fuels that compete in the market. The Technology Choice Component also establishes the criteria upon which consumers base their equipment choices. In addition, the component allows for price induced technology change, which advances the year of availability of efficient technologies if fuel prices increase and remain high over a multi-year period.

Appliance Stock Component

The Appliance Stock Component projects the number of appliances required by each end-use service. A piecewise linear decay function retires equipment based on minimum and maximum life expectancies. The accounting system in the Appliance Stock Component keeps track of new and replacement equipment purchases by type of equipment.

Shell Integrity Component

The Residential Sector Demand Module monitors changes in building shell integrity for space conditioning services. The Shell Integrity Component computes an index that incorporates increases in existing building shell efficiency based upon responses to fuel price changes from the base year. Building shell efficiency in new housing is a function of capital and operating costs of both the equipment and shell characteristics for several levels of efficiency.

Distributed Generation Component

The Distributed Generation Component allows fuel cells and solar photovoltaic systems to compete for on-site electricity generation. The penetration rates of these systems are computed through the use of a cash-flow formulation. If feasible, the electricity generated from these systems is deducted from total household use, or sold back to the grid.

Consumption and Unit Energy Consumption Component

The Consumption and Unit Energy Consumption Component tracks the composition of residential energy use over time as technological advances in residential equipment are introduced to the market. The component includes price elasticities that allow the user to specify consumer responses to changes in real fuel prices. Unit Energy Consumption (UEC) values are adjusted according to heating and cooling degree-day factors and household size.

A concept called the rebound effect⁶ accounts for the fact that increasing equipment efficiency for a particular equipment class causes a corresponding change (normally, a decrease) in the price elasticity for the class.

Report Organization

Chapter 2 of this report discusses the purpose of the Residential Sector Demand Module, with specific details on the objectives, primary inputs and outputs, and relationship of the module to other

modules in the NEMS system. Chapter 3 describes the rationale behind the design, fundamental assumptions regarding consumer behavior, module structure, and alternative modeling approaches.

Appendices to this report document the variables and equations contained in the FORTRAN source code. Appendix A consists of a model abstract. Appendix B provides support to the mathematical representation of the source code equations. Appendix C contains the key computations and equations for the model. Appendix D catalogues the input data used to generate projections in list and cross-tabular formats. Appendix E discusses the data quality issues. Appendix F is a bibliography of reference materials used in the development process.

2. Model Purpose

Module Objectives

The NEMS Residential Sector Demand Module has three fundamental objectives. First, the module generates disaggregated projections of energy demand in the residential sector for the period of 2001 through 2030 by housing and fuel type, Census Division, and end-use service. Second, it is a policy analysis tool that can assess the impacts of changes in energy markets, building and equipment technologies, and regulatory initiatives that affect the residential sector. Third, the module is an integral component of the NEMS system, it provides inputs to the Electricity Market Module, Natural Gas Transmission and Distribution Module, and Petroleum Market Module of NEMS, and contributes to the calculation of the overall energy supply and demand balance.

The Residential Sector Demand Module projects residential sector energy demands in six sequential steps. These steps produce information on housing stocks, technology choices, appliance stocks, building shell integrity, distributed generation, and energy consumption. The module uses a stock-vintaging approach that allows the user to monitor equipment stock and equipment efficiency over time.

The module design allows the user to conduct a variety of policy analyses. Technological advancement in equipment design and efficiency, as well as first-cost incentive programs (such as rebates used in demand-side management programs), can be modified at the equipment level. Housing stock attrition and equipment retirement assumptions can be modified to reflect varying equipment decay rates. Building shell characteristics can be modified to reflect varying policy options for building codes or the impact of energy-efficient mortgages.

Projected residential fuel demands generated by the Residential Sector Demand Module are used by the NEMS system in the calculation of the demand and supply equilibrium state. In addition, the NEMS supply modules use the residential sector outputs to determine the patterns of consumption and the resulting prices for energy delivered to the residential sector.

Module Input and Output

Inputs

The primary module inputs include fuel prices, housing stock characteristics, housing starts, population, and technology characteristics. The technology characteristics used in the module include installed capital costs, equipment efficiency, and expected equipment lifetimes. The major inputs by module component are as follows:

Housing Stock Component

- Housing starts
- Existing housing stock for 2001 (based on RECS 2001 data)
- Housing stock attrition rates
- Housing floor area trends (new and existing)

Technology Choice Component

- Equipment capital cost
- Equipment energy efficiency
- Market share of new appliances
- Efficiency of retiring equipment
- Appliance penetration factors

Appliance Stock Component

- Expected equipment minimum and maximum lifetimes
- Base year appliance market shares
- Equipment saturation level

Building Shell Component

- Maximum level of shell integrity
- Price elasticity of shell integrity
- Rate of improvement in existing housing shell integrity
- Cost and efficiency of various building shell measures for new construction

Distributed Generation Component

- Equipment Cost

Equipment Efficiency
Solar Insolation Values
System Penetration Parameters

Energy Consumption Component

Unit energy consumption (UEC)
Heating and cooling degree-days
Expected fuel savings based upon the Energy Policy Act of 2005 (EPACT05)
Population
Personal disposable income

Outputs

The primary module output is projected residential sector energy consumption by fuel type, end-use service, and Census Division. The module also projects housing stock and energy consumption per household. In addition, the module can produce a disaggregated projection of appliance stock and efficiency for most of the major appliances used in a home. The types of appliances included in this projection are:

Heat pumps (electric air-source, natural gas, and ground-source)
Furnaces (electric, natural gas, LPG, and distillate)
Hydronic heating systems (natural gas, distillate, and kerosene)
Wood stoves
Air conditioners (central and room)
Dishwashers
Water heaters (electric, natural gas, distillate, LPG, and solar)
Ranges/Ovens (electric, natural gas, and LPG)
Clothes dryers (electric and natural gas)
Refrigerators
Freezers
Clothes Washers
Lighting (incandescent, fluorescent, torchiere)
Fuel Cells
Solar Photovoltaic Systems

Variable Classification

The NEMS modules are designed to provide and use system data at the nine Census Division level of aggregation. The input data available from the Residential Energy Consumption Survey (RECS) performed by EIA (which forms the basis for the Residential Sector Demand Module) and other sources are designed to be statistically significant at various levels, some of which are above the nine Census Division level. Another factor that drives the level of aggregation of the module variables is the technical constraints of the computing system required in order to run the NEMS model within a reasonable turnaround time. The key variables in the NEMS Residential Sector Demand Module have the following dimensions:

Census Divisions

- 1 New England
- 2 Middle Atlantic
- 3 East North Central
- 4 West North Central
- 5 South Atlantic
- 6 East South Central
- 7 West South Central
- 8 Mountain
- 9 Pacific

End-Use Services

- 1 Space Heating
- 2 Space Cooling
- 3 Clothes Washers
- 4 Dishwashers
- 5 Water Heating
- 6 Cooking
- 7 Clothes Drying
- 8 Refrigeration
- 9 Freezing
- 10 Lighting
- 11 Color TVs
- 12 Personal Computers
- 13 Furnace Fans
- 14 Other Appliances
- 15 Secondary Space Heating
- 16 Distributed Generation

Fuels

- 1 Distillate
- 2 LPG
- 3 Natural Gas
- 4 Electricity
- 5 Kerosene
- 6 Wood
- 7 Geothermal
- 8 Coal
- 9 Solar

Housing Types

- 1 Single-Family
- 2 Multifamily
- 3 Mobile Home

Relationship to Other Models

The Residential Sector Demand Module uses data from the Macroeconomic Activity Module (MAM) of the NEMS system. MAM provides projected population, personal disposable income, and housing starts by Census Division and housing type. The Residential Sector Demand Module uses fuel price projections generated by the NEMS supply modules previously listed as key drivers to calculate operating costs for technology selections, existing building shell integrity improvements, and short-term behavioral responses. The NEMS supply modules use the residential sector outputs to determine the fuel mix and the resulting prices for energy delivered to the residential sector.

3. Model Rationale

Theoretical Approach

The NEMS Residential Sector Demand Module is an integrated dynamic modeling system based on accounting principles and residential consumer behavior issues that generate projections of residential sector energy demand, appliance stocks, and market shares.

The Residential Sector Demand Module is a housing and equipment stock model. The stock of households and the corresponding energy consuming equipment are tracked for each year of the projection. The housing stock changes each projection year as houses are retired from the stock and new construction is added. The equipment stock changes each projection year as appliances fail and are replaced, through increases in the saturation of existing appliances, and as new technologies enter the market. A logistic function¹ is used to estimate the market shares of competing technologies within each service category. Market shares are determined for new construction equipment decisions as well as for replacement decisions. The Technology Choice Component of the module weights the relative installed capital and operating costs of each equipment type to allocate the relative market share of the technology within the service, region, and housing type. This approach is implemented in new housing for the services of space conditioning (heating, cooling, building shell), clothes washers, dishwashers, water heating, cooking, clothes drying, lighting, food refrigeration, and food freezing. It is also implemented for replacement equipment in single family housing for space heating, heat pump air conditioning, water heating, cooking, and clothes drying. Color televisions, furnace fans, personal computers, distributed generation, and miscellaneous equipment choices are modeled based upon alternative technology assumptions discussed below.

Base year information developed from the 2001 RECS data base forms the foundation of modeling changes to the equipment and housing stock over the projection period. Market share information from RECS is used to estimate the number and type of replacements and additions to the equipment stock. The choice between the capital cost and the first year's operating cost determines the market share within a given service. Market shares are also modeled as functions of the

¹This function is described in depth in Appendix B.

corresponding fuel prices, expected level of equipment usage, and equipment efficiency characteristics.

Building shell integrity is also considered in the projection of end-use consumption. Building shell integrity in existing homes is sensitive to real price increases over base year price levels for space conditioning fuels. Final residential sector energy consumption is determined as a function of the equipment and housing stock, average unit energy consumption, weighted equipment characteristics, and building shell integrity improvements.

General Model Assumptions

The Residential Sector Demand Module assumes that the residential energy marketplace has the following characteristics:

- Equipment lifetime is limited by a minimum and maximum number of years. All equipment is assumed to survive a minimum number of years, and no equipment is assumed to survive beyond the maximum number of years. The equipment retirement rate is defined by a linear decay function.
- The equipment contained in a retiring housing structure is assumed to retire when the structure is removed from the housing stock. Zero salvage value for equipment is assumed.
- Space heaters, heat pump air conditioners, water heaters, stoves, and clothes dryers may be replaced (up to an input percentage) with competing technologies in single-family homes. Switching is based on a technology choice component, retail cost of new equipment, switching cost, and lifecycle cost.
- New housing stock building shell efficiency is a function of the capital and operating cost of competing building shell packages.
- Life-cycle costs used in the technology cost calculations are computed over a 7-year time horizon with a discount rate of 20 percent.

- Two housing vintages are assumed: pre-2002 (existing housing) and post-2001 (new housing).
- The type of fuel used for water heating and cooking in new housing units is assumed to be a function of the main space heating fuel in most cases. For example, if natural gas is the main space heating fuel, then it is assumed that natural gas will be the water heating fuel. However, only 65 percent of those homes are assumed to use natural gas as the main cooking fuel. This is based on recent RECs data. If an oil or electric furnace is installed as the main space heating system, then electricity will be the water heating and cooking fuel.
- The type of fuel used for cooking and water heating when replacing retiring equipment in single-family homes is based on an input percentage of those who may switch and a technology choice-switching algorithm. Replacements are with the same technology in multifamily and mobile homes.
- Housing units are removed from the housing stock at a constant rate over time. The survival rates for housing stock types are assumed to be 99.7 percent for single-family homes, 99.8 percent for multifamily homes, and 97.5 percent for mobile homes. These rates are based on an analysis of historical household growth and housing starts.
- It is assumed that a constant 1.2 percent of existing housing units are renovated each year, increasing the square footage of the heated living area by about one-third.
- Projected new home heating fuel shares are based on the Census Bureau's new construction data and vary over time due to changes in life-cycle cost for each of the 11 heating system types.
- It is assumed that the volumetric size of new construction is larger than existing homes, which increases the heating and cooling loads in new construction, all else equal.

Area Specific Model Assumptions

Energy Policy Act of 2005 (EPACT05)

The passage of the EPACT05 in August 2005 provides additional minimum efficiency standards for residential equipment and provides tax credits to producers and purchasers of energy efficient equipment and builders of energy efficient homes. The standards contained in EPACT05 include: 190 watt maximum for torchiere lamps in 2006; Dehumidifier standards for 2007 and 2012; and ceiling fan light kit standards in 2007. For builders of homes that are built 30 percent better than the latest code, a \$1000 tax credit can be claimed in 2006 and 2007. Likewise, builders of homes that are 50 percent better than code can claim a \$2000 credit over the same period. Production tax credits are assumed to be passed through to the consumer in the form of lower purchase cost. EPACT05 includes production tax credits for energy efficient refrigerators, dishwashers, and clothes washers in 2006 and 2007, with dollar amounts varying by type of appliance and level of efficiency met, subject to annual caps. Consumers can claim a 10 percent tax credit in 2007 and 2007 for several types of appliances specified by EPACT05, including: Energy efficient gas, propane, or oil furnace or boiler, energy efficient central air conditioners, air and ground source heat pumps, hot water heaters, and windows. Lastly, consumers can claim a 30 percent tax credit in 2006 and 2007 for purchases of solar PV, solar water heaters, and fuel cells.

Technology Choice

The efficiency choices made for residential equipment are based on a log-linear function. The function assigns market shares for competing technologies based on the relative weights of capital (first cost) and discounted operating (annual fuel) costs. A time dependant function calculates the installed capital cost of equipment in new construction based also on a log-linear function. If fuel prices increase markedly and remain high over a multi-year period, more efficient appliances will be available earlier in the projection period than would have been otherwise.

Climate Adjustment

Space conditioning usage is adjusted across Census divisions by heating and cooling degree-day factors to account for potential deviations from Anormal@temperatures during the RECS 2001 survey performance period. The average of the last 30 years heating and cooling degree-days, which is a proxy for normal weather, is adjusted in the projection period based on shifts in state population.

Technology Switching

Space heaters, air conditioners (heat pumps and central air conditioners), water heaters, stoves, and clothes dryers may be replaced with competing technologies in single-family homes. It is assumed that 20 percent of the replacement market in single-family homes is eligible to switch fuels in any projection year. The technology choice is based on a log-linear function. The functional form is flexible to allow the user to specify parameters, such as weighted bias, retail equipment cost, and technology switching cost. Replacements are with the same technology in multifamily and mobile homes. A time dependant function calculates the retail cost of replacement equipment based on logistic shape parameters.

Space Cooling: Room and Central Air Conditioning Units

Room and central air conditioning units are disaggregated based on existing housing data. The market penetration of room and central air systems by Census Division and housing type, along with new housing construction data, are used to determine the number of new units of each type. The penetration rate for central air-conditioning is estimated by means of time series analysis of RECS survey data.

Water Heating: Solar Water Heaters

Market shares for solar water heaters are tabulated from the 2001 RECS database. The module currently assumes that solar energy provides 50 percent of the energy needed to satisfy hot water demand, and an electric back-up unit satisfies the remaining 50 percent in solar water heating systems.

Through-the-Door Refrigeration Units

Many residential food refrigerators have through-the-door access panels for ice and water. This added convenience results in greater energy use than conventional refrigerator models. The Residential Sector Demand Module assumes that about 30 percent of all post-2001 refrigerators incorporate the through-the-door access feature, based upon recent appliance shipment data.²

¹ Association of Home Appliances Manufacturers, "Refrigerators: Energy Efficiency and Consumption Trends," Washington, DC, May 23, 2003.

Clothes Dryer Saturation

The module currently assumes that clothes dryer market penetration increases over the projection period, with a terminal saturation level that is consistent with the market penetration of clothes washers. This assumption is based upon analysis of the RECS database.

Clothes Washers

The module links clothes washer choice to the water heating service. This is a vital link since many efficiency features for clothes washers act to cut the demand for hot water.

Lighting

The module partitions lighting into three main categories of use: general purpose, fluorescent, and halogen torchiere. Within the general use category, several hours of use bins further partition this category, allowing bulb choice to vary with the amount of time each fixture is used on an annual basis. The halogen torchiere and fluorescent categories assume an average hours of use for lamp choice purposes.

Color Televisions and Personal Computers

The module accounts for these fast growing electronic devices based on saturation data from RECS and assumptions about future growth, screen size, and monitor type in the respective categories.

Furnace Fans

The number of households that have fossil fuel-fired central forced-air heating determines furnace fan energy consumption. The relative size of heating and cooling degree-days also affects the amount of energy used for this service.

Other Appliances

The consumption of other appliances by Census Division is calculated by multiplying the sum of new and existing housing units by Unit Energy Consumption (UEC), housing type, and Census Division.

Secondary Heating

The share of total housing that uses a secondary heating fuel multiplied by the UEC, adjusted for the shell integrity determines the consumption of secondary heating fuels.

Distributed Generation

Fuel cells and solar photovoltaic systems compete in single-family housing to generate electricity on-site through a cash-flow formulation. The electricity generated from these systems is either used on-site or sold back to the grid.

4. Model Structure

Structural Overview

The NEMS Residential Sector Demand Module characterizes energy consumption using an algorithm that accounts for the stocks of housing and appliances, equipment market shares, and energy intensity. The module assesses the shifts of market shares between competing technologies based on assumptions about the behavior of residential consumers.

The NEMS Residential Sector Demand Module is a sequential structured system of algorithms, with succeeding computations using the results from previously executed components as inputs. The module is composed of six logical components: housing stock projection, technology choice, appliance stock projection, building shell integrity, distributed generation, and energy consumption.

Housing Stock Projection

The location and type of housing stock are the primary model drivers. The first component uses data from the NEMS Macroeconomic Activity Module to project new and existing housing for three dwelling types at the nine Census Division level. The three housing types are as follows:

1. Single-Family Homes
2. Multifamily Homes
3. Mobile Homes

Technology (Equipment) Choice

The Technology Choice Component simulates the behavior of consumers by projecting market shares for each available equipment type. New and replacement equipment decisions are modeled for each technology type. For new construction, the home heating fuel is determined by the relative life-cycle costs of all competing heating systems.

Relative weights are determined for each equipment type based on the existing market share, the installed capital cost, and the operating cost. These relative weights are then used to compute the market shares and composite average efficiencies for each service listed in Table 1. The

technologies are distinguished by the service demand that they satisfy, by the fuel that they consume, and by their efficiency.

Table 1. Services and Equipment in NEMS Residential Demand Module

Space Heating Equipment	Cookstoves
<i>Electric Furnace</i>	<i>Natural Gas</i>
<i>Electric Air-Source Heat Pump</i>	<i>LPG</i>
<i>Natural Gas Furnace</i>	<i>Electric</i>
<i>Natural Gas Other (Hydronic)</i>	
<i>Kerosene Furnace</i>	Clothes Dryers
<i>LPG Furnace</i>	<i>Natural Gas</i>
<i>Distillate Furnace</i>	<i>Electric</i>
<i>Distillate Other (Hydronic)</i>	
<i>Wood Stove</i>	Refrigerators
<i>Electric Ground-Source Heat Pump</i>	<i>18 cubic-foot Top Mounted Freezer</i>
<i>Natural Gas Heat Pump</i>	<i>24 cubic-foot Side-by-Side with Through-the-Door Features</i>
Space Cooling Equipment	Freezers
<i>Electric Room Air Conditioner</i>	<i>Chest Manual Defrost</i>
<i>Central Air Conditioner</i>	<i>Upright Manual Defrost</i>
<i>Electric Air-Source Heat Pump</i>	
<i>Electric Ground-Source Heat Pump</i>	Clothes Washers
<i>Natural Gas Heat Pump</i>	<i>Vertical Axis</i>
	<i>Horizontal Axis</i>
Water Heaters	
<i>Natural Gas</i>	Lighting
<i>Electric Resistance / Heat Pump</i>	<i>Incandescent</i>
<i>Distillate</i>	<i>Compact Fluorescent</i>
<i>LPG</i>	<i>Standard Fluorescent</i>
<i>Solar Thermal</i>	<i>Solid State</i>
	<i>Halogen Torchiere</i>
	Distributed Generation
	<i>Fuel Cells</i>
	<i>Solar Photovoltaic</i>

Appliance Stock Projection

The Appliance Stock Component projects the number of end-use appliances within all occupied households. This component tracks equipment additions and replacements. Equipment is required to meet the following services:

Space Heating	Space Cooling	Dishwashers	Water Heating	Cooking
Clothes Drying	Refrigeration	Freezers	Clothes Washers	Lighting

Building Shell Integrity

Building shell integrity is modeled for existing and new housing. The existing housing stock responds to rising prices of space conditioning fuels by improving shell integrity. Shell integrity improvements might range from relatively inexpensive measures (such as caulking and weatherstripping) to projects with substantial costs (such as window replacement).

New housing stock also incorporates shell integrity improvements. The shell integrity of new housing is a function of capital and operating costs for several levels of total system efficiency. These include homes that meet the 2000 International Energy Conservation Code (IECC), Energy Star Homes, and homes that meet the goals of the Partnership for the Advancement of Technology in Housing (PATH) program.

Distributed Generation Component

The Distributed Generation Component allows fuel cells and solar photovoltaic systems to compete for on-site electricity generation. Through the use of a cash-flow formulation, the penetration rates of these systems are computed. Electricity generated from these systems is deducted from total household use, or sold back to the grid, if feasible.

Energy Consumption

The Energy Consumption Component calculates end-use consumption for each service and fuel type. The consumption projections are constructed as the product of the number of units in the equipment stock and the average technology UEC. The average UEC changes as the composition of the equipment stock changes over time. In each year of the projection the following steps are performed to develop the projection of energy consumption:

1. A projection of housing stock is generated based on the retirement of existing housing stock and the addition of new construction as determined in the MAM.

2. Pre-2002 vintage equipment stock is estimated, accounting for housing demolitions and additions.
3. Market shares are determined for equipment types by service.
4. The previous year's equipment additions and replacements for both pre-2002 and post-2001 vintage are determined based on the current year market share.
5. Efficiencies weighted by market share are calculated.
6. Fuel consumption is calculated using UEC and the weighted efficiencies (shell integrities, personal disposable income, and household size, if applicable).


Flow Diagrams

This section includes flow diagrams that represent the structure of the NEMS Residential Sector Demand Module. Figure 1 presents the basic sequential structure. Figure 2 illustrates the Housing Stock Component flow. The Technology Choice Component flow is represented in Figure 3. Figure 4 provides the flow of the Appliance Stock Additions and Replacements Component, the Building Shell Integrity flow is shown in Figure 5, the Distributed Generation Component flow is presented in Figure 6, and the Consumption and UEC Component flow is provided in Figure 7.

The overall sequential structure as illustrated in Figure 1 details the six primary steps that calculate the final residential sector energy consumption. These six steps are discussed in the first chapter of this report.

Figure 2 illustrates the Housing Stock Component of the module. This component draws upon existing housing characteristics from the RECS

Figure 1 Residential Module Structure

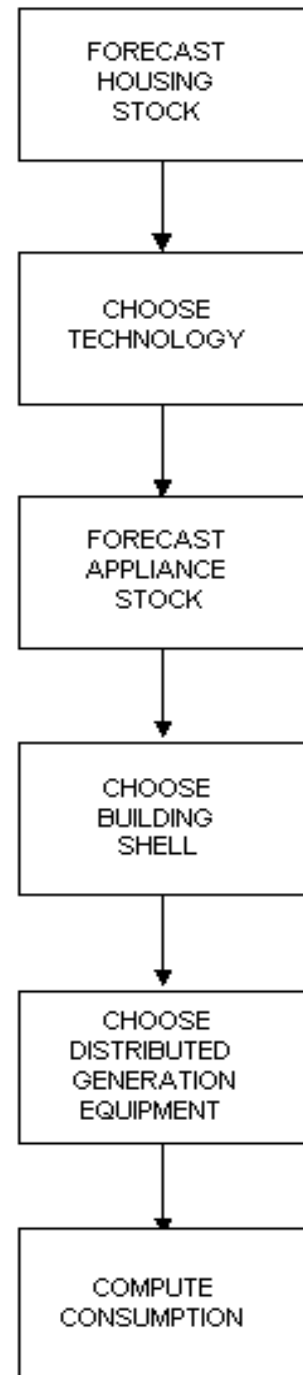

database and new housing characteristics from the MAM projection. The Housing Stock calculates housing stock additions, survival, and retirements in order to produce the total housing stock by vintage, type, and Census Division.

Figure 3 illustrates the Technology Choice Component of the module. The base year existing stock of major household appliances is derived from analysis of the 2001 RECS data. Appliance retirements are determined based upon the minimum and maximum equipment lifetime assumptions discussed in the Fundamental Assumptions section of this report. Additions to the appliance stock are calculated in this component, as is the surviving stock of equipment.

Figure 4 illustrates the Appliance Stock Component of the module. The existing, replacement, and new appliance stock characteristics are used by this component to determine the stock requirements. Technology characterization information input to this component determines the set of equipment from which the required choices are made. The consumer choice functions by decision type (new construction or replacement) determine the type, number, and equipment efficiency by end-use service.

Figure 5 illustrates the Building Shell Integrity Component, which calculates indices that reflect increasing building shell efficiencies over time, in response to increasing energy prices, EPCACT 92 window labeling standards, and technology improvement.

Figure 6 illustrates the Distributed Generation Component, which projects the type, number, and energy consequences of installing distributed generation equipment in the residential sector. There are two types of distributed generation equipment considered: solar photovoltaic and fuel cells.

Figure 7 illustrates the Consumption and UEC Component of the module. This component uses the base year UEC information developed from the RECS data, the technology selection information developed previously, building shell integrity, household size, and heating- and cooling-degree day effects to determine end-use consumption.

Figure 2. Housing Stock Component

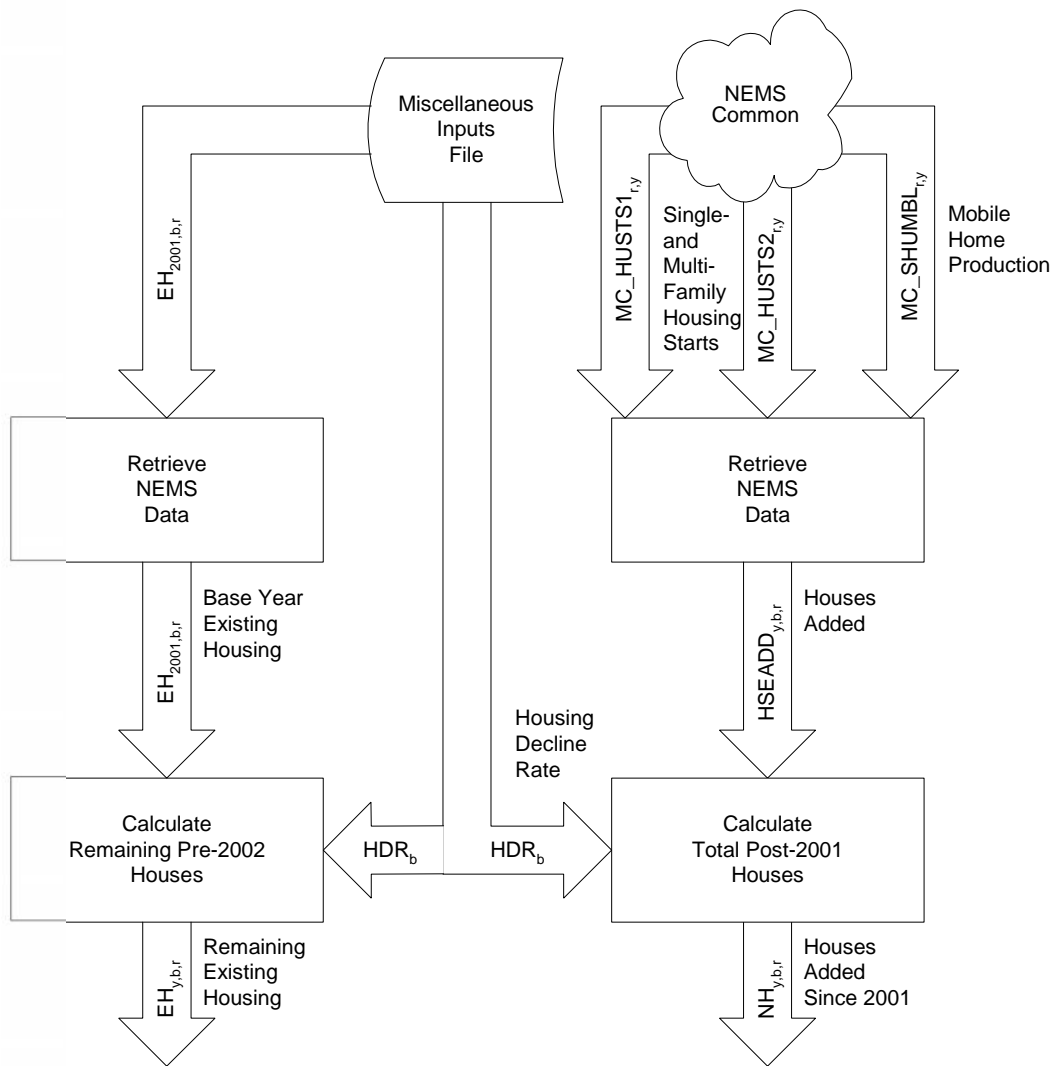


Figure 3. Technology Choice Component

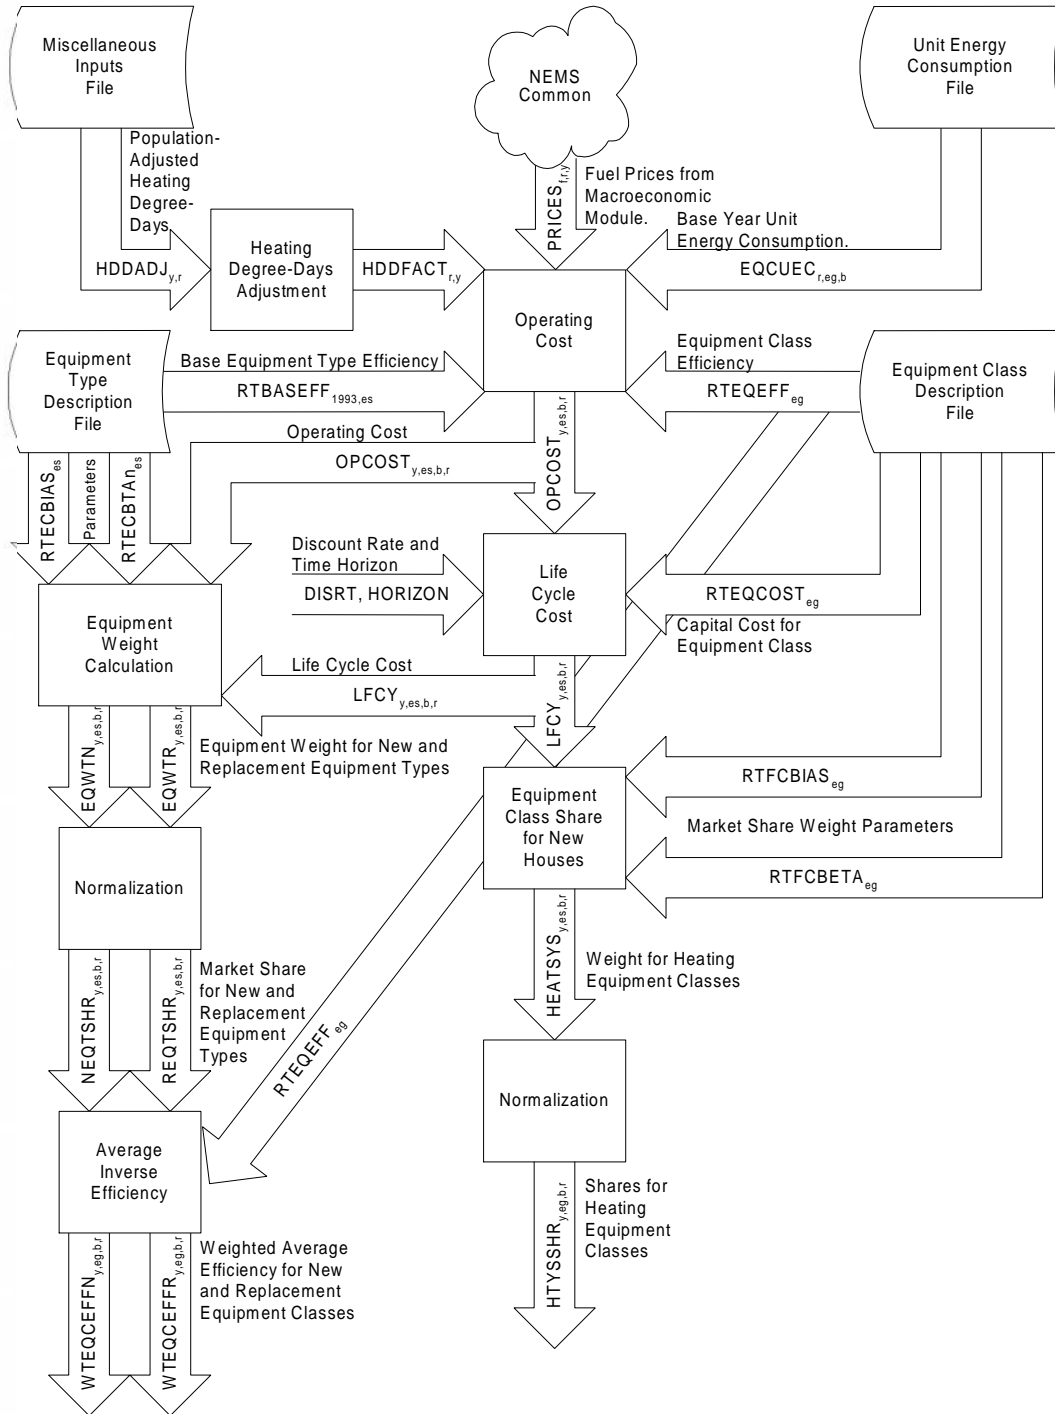


Figure 5. Building Shell Integrity Component

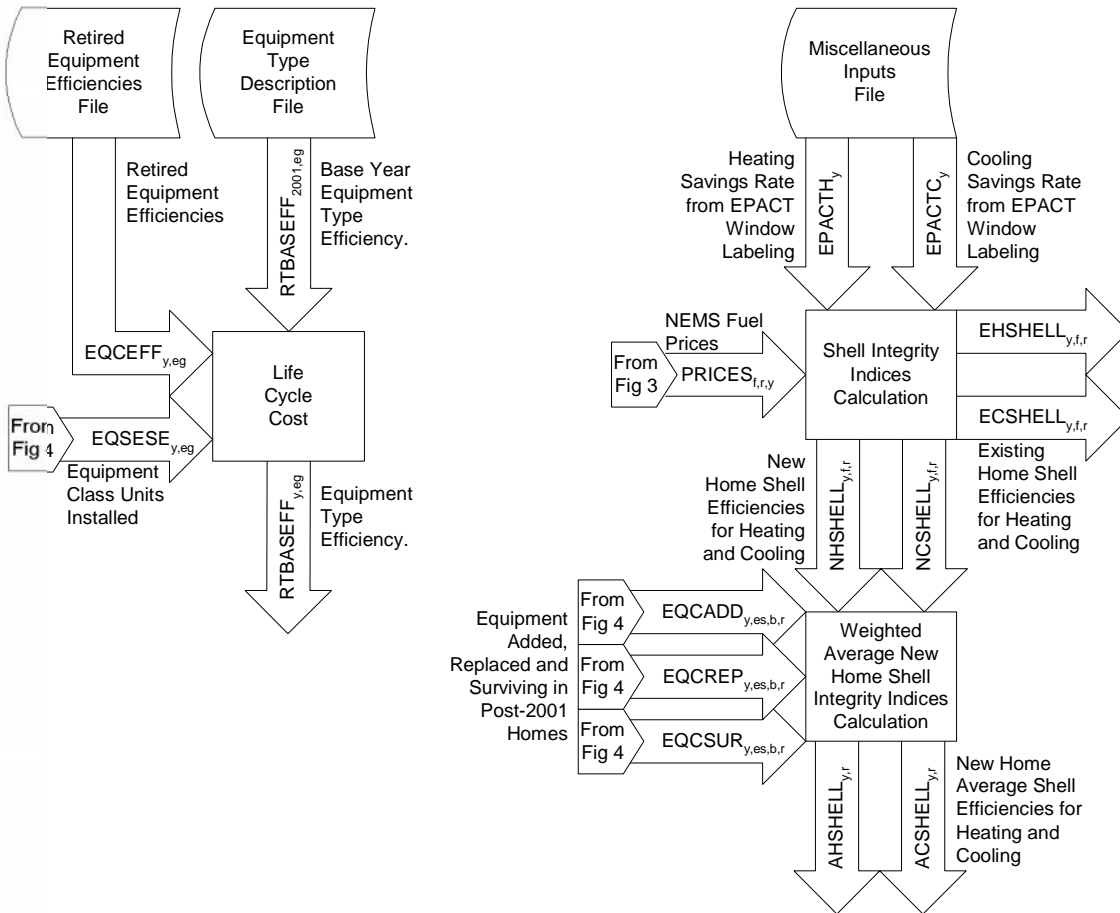


Figure 6. Distributed generation component


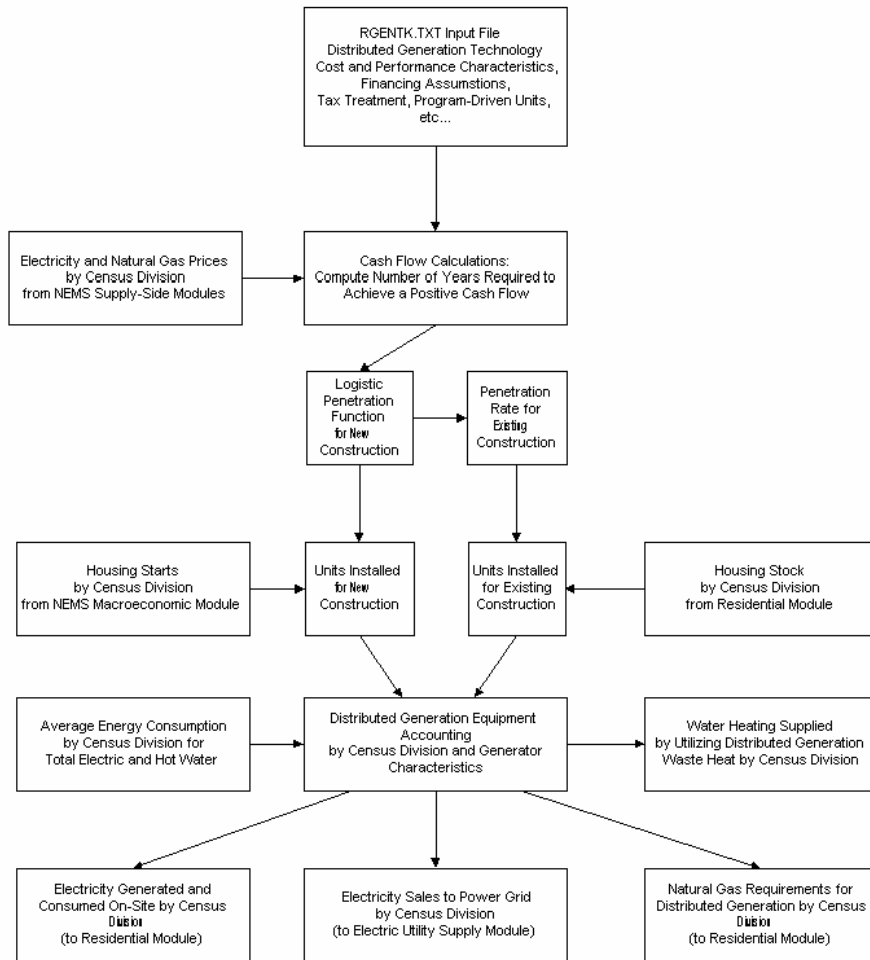


Figure 7. Consumption and UEC Component

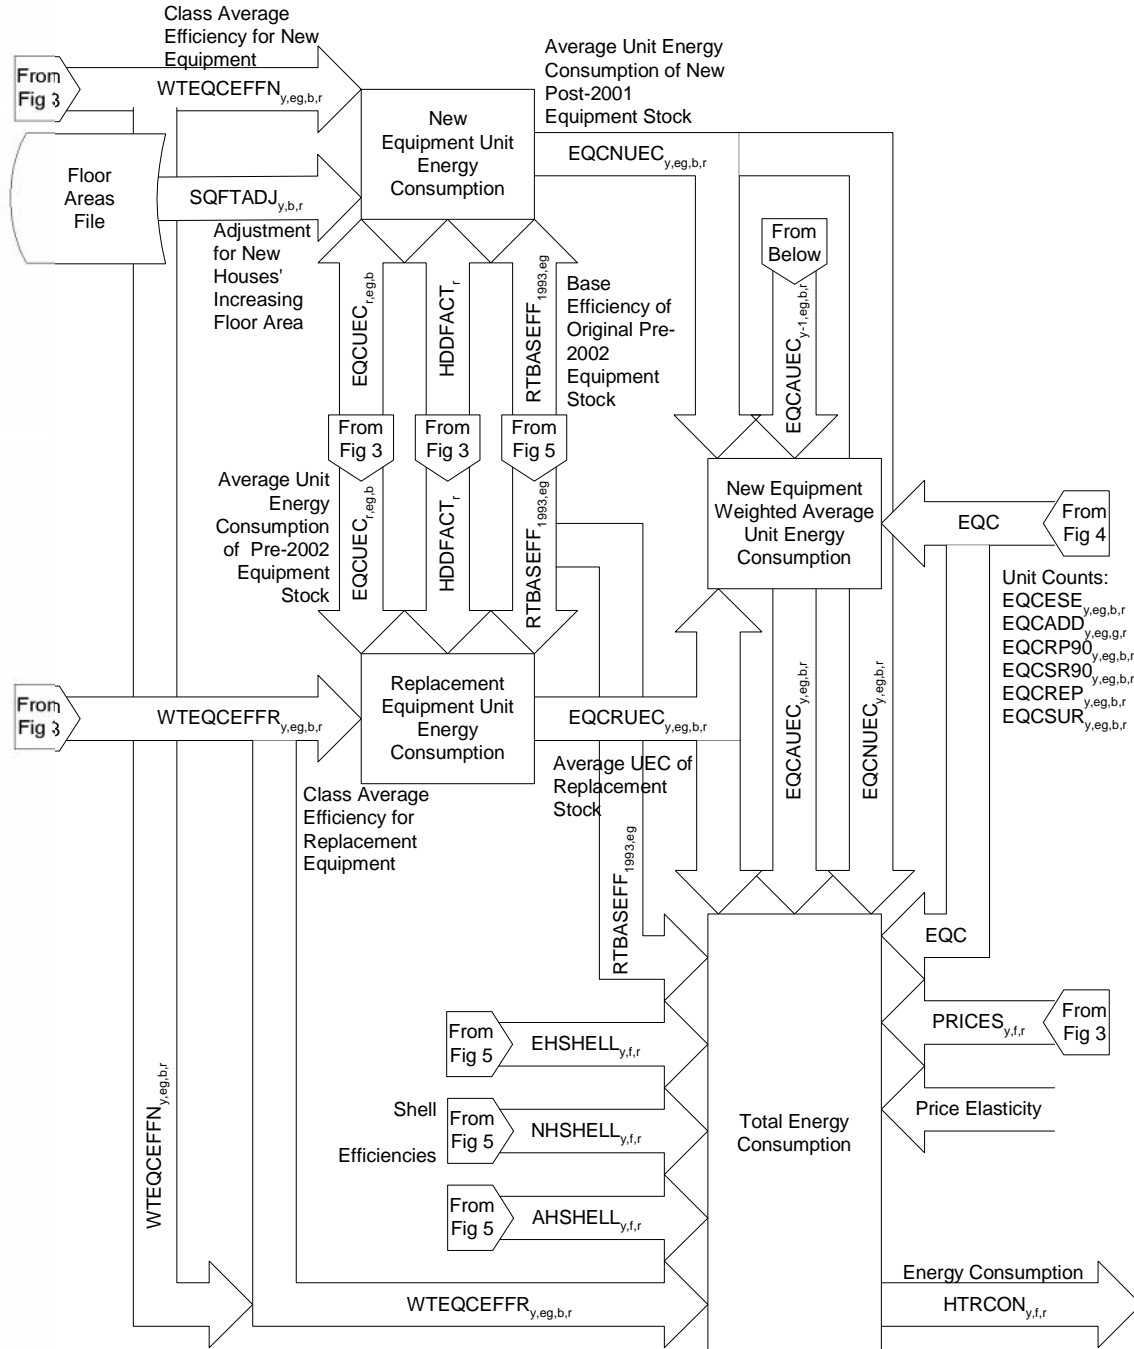

FORTRAN Subroutine Descriptions

The NEMS Residential Sector Demand Module FORTRAN source code consists of more than 50 subroutines sequentially called during the execution of the module. Table 2 lists the major subroutines and their corresponding descriptions. The subroutines can be grouped into the following categories according to their functions:

Fuel Price Subroutine

The code includes the following subroutine that reads fuel prices:

RDPR reads in fuel prices from the NEMS system.

Initialization Subroutines

The code includes the following subroutine for initialization purposes:

INTEQT initializes heating equipment market shares and applies the decay rate to the existing equipment.

Housing Subroutine

The code includes the following subroutine to assess housing stocks:

NEWHSE reads housing starts from NEMS Macroeconomic Activity Module and computes new housing stock

Existing Equipment

RDHTRTEC projects pre-2002 (existing) vintage equipment by service. In this subroutine, the following operations are performed:

1. The equipment market share is read from an exogenous data file by equipment type, housing type, and Census Division.
2. The base year equipment stock or the pre-2002 vintage stock is the product of the share and the amount of existing housing.

3. Project surviving equipment of the pre-2002 vintage using the equipment survival rate and the housing decay rate for every year in the projection.

Other Input Subroutines

These subroutines read other information from files:

RDEFF	reads efficiencies of retiring equipment
RDRET	reads equipment retirement rates
RTEKREAD	reads the detailed technology data
RMISCREAD	reads miscellaneous variables
RDSQFT	reads home floor areas
RDUECS	reads unit energy consumption data

Calculation Subroutines (3)

The model includes a subroutine identified as **EPACTWD** to estimate the EPACT 92 window labeling impact, **SQFTCALC** to calculate average home floor areas for new and existing houses and compute volume effects for new construction, and **PITC** to calculate the amount of price induced technology change based on fuel prices.

Technology Choice - TEC Subroutines (10)

The code includes ten technology choice subroutines that follow these general steps:

1. Initialize capital costs and equipment efficiencies.
2. Set discount rate, adjustment factors and present value horizon.
3. Compute operating costs of each equipment type.
4. Compute life cycle costs of each equipment type.
5. Compute technology share for new housing.
6. Calculate new and replacement equipment weights based on the bias, capital cost, and operating costs using a log-linear function.
7. Compute new market shares, ratio between equipment weights and total equipment weight.
8. Calculate efficiencies for new and replacement equipment types weighted by their respective market shares.

These subroutines are as follows:

RSHVAC	RSTVTEC	RFRZTEC
RHTRTEC	RDRYTEC	RCWTEC
RCLTEC	RREFTEC	RDWTEC
RWHTEC		

In addition to the TEC subroutines, the LTCNS, TVCNS, and PCCNS subroutines assign market shares to respective technologies within each class.

Replacements and Additions - ADD Subroutines (8)

The code contains eight equipment replacement and additions subroutines. (Water heaters and stoves use the same **ADD** subroutine.) **TEC** subroutines for each service are followed by **ADD** subroutines that calculate new and replacement equipment for the previous year based on the current year's market share. The following steps are implemented in these subroutines:

1. The post-2001 vintage equipment additions are determined by the share of new (post-2001) houses from the MAM that demand that service.
2. Compute the surviving post-2001 vintage equipment in pre-2002 vintage houses.
3. Compute total equipment required for pre-2002 vintage houses.
4. Compute the equipment replacements in pre-2002 vintage houses by subtracting the sum of surviving pre-2002 vintage equipment and surviving post-2001 vintage equipment in pre-2002 vintage houses from the total equipment demanded for pre-2002 vintage houses. Technology switching is allowed at replacement for space heaters, heat pump air conditioners, water heaters, stoves, and clothes dryers in single-family homes.
5. Compute the surviving post-2001 vintage equipment that was purchased as either additions or replacements for post-2001 houses.
6. Calculate the current year's replacements of post-2001 vintage equipment in post-2001 houses by subtracting the surviving replacements and equipment additions in post-2001 houses from the stock of surviving post-2001 houses. Technology switching is allowed at replacement for space heaters, heat pump air conditioners, water heaters, stoves, and clothes dryers in single-family homes. These subroutines are as follows:

RHTRADD	RDRYADD	RCWADD
RCLADD	RREFADD	RDWADD
REUADD	RFRZADD	

End-use Consumption - CON/CNS Subroutines (15)

The code contains 11 end-use consumption subroutines defined by service. The **ADD** subroutines are followed by consumption subroutines. Within each of these subroutines the new, replacement and average unit energy consumption values are calculated. These UECs are then multiplied by the equipment stock (and climate adjustment factor and shell integrity for space conditioning) to yield final fuel consumption. These subroutines, which follow, also include a price sensitivity expression that adjusts short-term demand for fuels:

RHTRCON	RREFCON	APPCNS
RCLCON	RFRZCON	RCWCON
RWHCON	LTCNS	RDWCON
RSTVCON	APCNS	TVCNS
RDRYCON	SHTCNS	PCCNS

Distributed Generation - RDISTGEN

Projects the number of households with distributed generation technologies and amount of electricity generated.

Overall Consumption - CN Subroutines (2)

The model includes the following two subroutines that calculate overall fuel consumption and list output NEMS consumption:

FUELCN	calculates fuel consumption
NEMSCN	Output NEMS consumption

Historical Consumption/Calibration Subroutines (2)

The code includes the following two subroutines to determine historical energy consumption:

EXCONS	calculate 2001 consumption
RSBENCH	calibrate consumption to 2001-2005 SEDS/STEO consumption.

Report Subroutines (2)

The following subroutines produce the output reports:

RESDRP, RESDRP2

Table 2. Primary NEMS Residential Sector Demand Module Subroutines

SUBROUTINE NAME	DESCRIPTION OF THE SUBROUTINE
RTEKREAD	READS TECHNOLOGICAL CHARACTERIZATIONS FOR ALL EQUIPMENT
RDSQFT	READS ANNUAL AVERAGE HOUSING FLOOR AREAS
RMISCREAD	READS MISCELLANEOUS DATA FOR THE MODULE
RDPR	READS PRICES
PITC	COMPUTES PRICE INDUCED TECHNOLOGY CHANGE
INTEQT	INITIALIZE HEATING EQUIPMENT MARKET SHARE
RDHTRTEC	PROJECT 2001 VINTAGE FOR ALL SERVICES
RDUECS	INITIALIZE EQUIPMENT UECs (SERVICE AGGREGATES)
RCONSFL	RATIONALIZE FUEL NUMBERING AMONG EQUIPMENT TYPES
EXCONS	CALCULATE 2001 CONSUMPTION
RDISTGEN	PROJECT DISTRIBUTED GENERATION PENETRATION
NEWHSE	CALCULATE NEW HOUSING.
EPACTWD	CALCULATE THE IMPACT OF EPACT 92 WINDOW LABELING
\$QFTCALC	CALCULATE AVERAGE FLOOR AREA OF HOUSING
RDEFF	READ IN EFFICIENCY OF RETIRING EQUIPMENT FROM 2001 STOCK
RDRET	READ IN PROPORTION OF RETIRING EQUIPMENT FROM 2001 STOCK
REPLACE	SHARES OUT REPLACEMENT EQUIPMENT SWITCHING AMONG COMPETING TECHNOLOGIES FOR SINGLE-FAMILY HOMES UP TO AN INPUT LIMIT
RCWTEC	CHOOSE CLOTHES WASHER EQUIPMENT
RCWADD	CALCULATE NEW AND REPLACEMENT CLOTHES WASHERS
RCWCON	CALCULATE CONSUMPTION FOR CLOTHES WASHERS
RDWTEC	CHOOSE DISHWASHER EQUIPMENT
RDWADD	CALCULATE NEW AND REPLACEMENT DISHWASHERS
RDWCON	CALCULATE CONSUMPTION FOR DISHWASHERS
PCCNS	CALCULATE PERSONAL COMPUTER CONSUMPTION
TVCNS	CALCULATE COLOR TELEVISION CONSUMPTION
RWHTEC	CHOOSE WATER HEATING EQUIPMENT
REUADD	CALCULATE NEW AND REPLACEMENT WATER HEATERS AND STOVES
RWHCON	CALCULATE CONSUMPTION FOR HOT WATER HEATING
RSTVTEC	CHOOSE COOKING EQUIPMENT
RSTVCON	CALCULATE CONSUMPTION FOR COOKING
RDRYTEC	CHOOSE DRYER EQUIPMENT
RDRYADD	CALCULATE NEW AND REPLACEMENT DRYERS
RDRYCON	CALCULATE CONSUMPTION FOR DRYERS
RSHVAC	CHOOSE HVAC EQUIPMENT AND SHELL CHARACTERISTICS FOR NEW HOMES
RHTRTEC	CHOOSE HEATING EQUIPMENT AND COMPUTE AVERAGE EFFICIENCIES
RHTRADD	CALCULATE NEW AND REPLACEMENT HEATING EQUIPMENT
RHTRCON	CALCULATE HEATING CONSUMPTION
RCLTEC	CHOOSE AIR-CONDITIONING EQUIPMENT
RCLADD	CALCULATE NEW AND REPLACEMENT COOLING EQUIPMENT
RCLCON	CALCULATE COOLING CONSUMPTION
RREFTEC	CHOOSE REFRIGERATION EQUIPMENT
RREFADD	CALCULATE NEW AND REPLACEMENT REFRIGERATORS
RREFCON	CALCULATE ENERGY CONSUMPTION FOR REFRIGERATORS
RFRZTEC	CHOOSE FREEZER EQUIPMENT
RFRZADD	CALCULATE NEW AND REPLACEMENT FREEZER EQUIPMENT
RFRZCON	CALCULATE CONSUMPTION BY FREEZERS
LTCNS	CALCULATE LIGHTING STOCK, EFFICIENCY, AND CONSUMPTION
APCNS	CALCULATE CONSUMPTION FOR ELECTRIC APPLIANCES
SHTCNS	CALCULATE CONSUMPTION FOR SECONDARY HEATING
APPCNS	CALCULATE APPLIANCE CONSUMPTION
FUELCON	CALCULATE FUEL CONSUMPTION
RSBENCH	CALIBRATE CONSUMPTION TO BENCHMARK VALUES
NEMSCN	CALCULATE AND REPORT NEMS OUTPUT VARIABLES
RESDRP	PREPARE DATA FOR REPORTING
RESDRP2	REPORT MODULE RESULTS

Appendix A: Model Abstract

Model Name:

NEMS Residential Sector Demand Module

Model Acronym:

None

Description:

The NEMS Residential Sector Demand Module is an integrated dynamic modeling system that projects residential energy demand by service, fuel, and Census Division. The modeling methodology is based on accounting principles and considers important issues related to consumer behavior. Housing and equipment stocks are tracked over the forecast period for seven major services. The major services considered are space heating, space cooling, clothes washing, dishwashing, water heating, cooking, clothes drying, refrigeration, freezers, and lighting. A logit function is used to estimate market shares of each equipment technology within each major service based on either the installed capital and operating costs or the life-cycle cost. Miscellaneous appliance consumption is calculated as a function of Unit Energy Consumption (UEC), a measure of energy intensity developed from the Residential Energy Consumption Survey (RECS) data base. Distributed generation technologies considered are fuel cells and photovoltaic equipment.

Purpose of the Model:

As a component of the National Energy Modeling System, the Residential Sector Demand Module generates mid-term forecasts of residential sector energy demand for the period 2001 through 2030. The model facilitates policy analysis of energy markets, technological development, and regulatory development.

Most Recent Model Update:

October 2005.

Component of Another Modeling System:

The Residential Sector Demand Module is designed, executed, and maintained as part of the National Energy Modeling System (NEMS).

Model Interfaces:

The NEMS Residential Sector Demand Module receives population and housing construction input data from the NEMS Macroeconomic Activity Module (MAM). Outputs in the form of quantities of fuel demanded in the residential sector are provided to the NEMS Integrating Module and the NEMS Supply Modules: Electricity Market Module, Petroleum Market Module, and Natural Gas Supply Module.

Office Model Representative:

John H. Cymbalsky
Office of Integrated Analysis and Forecasting
Energy Demand and Integration Branch
(202) 586-4815

Documentation:

Model Documentation Report: Residential Sector Demand Model of the National Energy Modeling System, April 2006.

Archive Media and Installation Manual:

The NEMS Residential Sector Demand Module has been archived as part of the NEMS production runs that generate the Annual Energy Outlook 2006 (AEO2006).

Energy System Described:

U.S. residential sector energy consumption.

Scope of Coverage:

- Geographic: Nine Census Divisions: New England, Middle Atlantic, East North Central, West North Central, South Atlantic, East South Central, West South Central, Mountain, and Pacific
- Time Unit/Frequency: Annual, 2001 through 2030 is the current mid-term horizon
- Products: Fuel consumption including: electricity, natural gas, distillate, liquefied petroleum gas, kerosene, geothermal, wood, solar thermal, and coal. Energy consumption per household. Equipment stock and efficiency.
- Economic Sectors: Domestic residential sector
- Services: Space heating, space cooling, clothes washers, dishwashers, water heating, cooking, clothes drying, refrigeration, freezers, lighting, other color televisions, furnace fans, personal computers, electric appliances, other appliances, and secondary space heating. Distributed generation technologies are also considered.
- Housing Types: Single-Family, Multifamily, and Mobile Homes

Model Features:

- Model Structure: Sequential algorithm composed of housing and equipment stock flow algorithms, technology choice algorithm, housing shell integrity algorithm, end-use consumption, and distributed generation.
- Modeling Technique: Housing and equipment stock turnover are modeled using linear decay functions. Market shares for each type of equipment choice are based on a logit function employing installed capital costs and operating costs. Unit energy consumption estimates, fuel prices, and equipment market shares are user inputs that drive the calculation of final end-use consumption.
- Special Features: Technology choice logit function has the ability to use installed capital, and operating costs or life-cycle costs to determine new market shares.

Non-DOE Input Sources:

American Home Appliance Manufacturers Association.

- Shipment-weighted efficiency ratings for refrigerators, freezers, and room air

conditioners.

U.S. Bureau of the Census, "Current Construction Reports-Series C25 Characteristics of New Housing: 2004," 2005.

- New housing and base year market shares for some services and equipment types.

Gas Appliance Manufacturers Association, "Consumers' Directory for Certified Efficiency Ratings," 1994.

Lawrence Berkeley Laboratory, "Energy Data Sourcebook for the U.S. Residential Sector," 1997

- Residential equipment technical characterization data.
- Expected minimum and maximum appliance lifetimes.
- Expected lifetimes of housing types.

The major data input sources are discussed in this Appendix. Appendix F provides additional bibliographic citations of data sources used in the Residential Sector Demand Module.

DOE Input Sources:

U.S. Department of Energy, Energy Information Administration, *Residential Energy Consumption Survey 2001*.

- Base year market shares for services and equipment types.
- Base year housing stock.
- Unit energy consumption values (UECs)

The major data input sources are discussed in this Appendix. Appendix F provides additional bibliographic citations of data sources used in the Residential Sector Demand Module.

Independent Expert Reviews Conducted:

Independent expert reviews of the *Residential Sector Component Design Report, May 28, 1992* were conducted by Inderjit Kundra, Office of Statistical Standards; Fred Joutz, Office of Statistical Standards; Ronald D. Sands, Batelle Pacific Northwest Laboratory, James E. McMahon, Lawrence Berkeley Laboratory; and Francis X. Johnson, Lawrence Berkeley

Laboratory. A comprehensive review of the model documentation was completed by Robert Trost and Inderjit Kundra, Office of Statistical Methods, February 2003.

Status of Evaluation Efforts by Sponsor:

None.

Appendix B: Detailed Mathematical Description

This appendix presents the detailed calculations used in each of the module components. Table 1 shows the correspondence between each of the subscripts in the documentation and the subscripts in the FORTRAN source code. Please note the following conventions:

- ! The table of subscripts includes all of the major usages. In some minor instances, additional subscripts are defined as needed.

- ! The equations follow the logic of the FORTRAN code very closely to facilitate an understanding of the code and its structure. In several instances, a variable appears on both sides of an equation. This is a FORTRAN programming device that allows a previous calculation to be updated (for example, multiplied by a factor) and re-stored under the same variable name (i.e., in the same memory location).

- ! The subscript, y , in the documentation refers to the year represented as 1990 through 2030. In the FORTRAN code, the subscript CURIYR represents array dimensions starting with an index of 1 to represent 1990, and CURCALYR in the calendar year.

- ! Some variables are documented having a Δy dimension when in fact they do not. The most common instances are for the variables, LFCY, OPCOST, SA, SHARES_N, and SHARES_R. These variables are calculated on an annual basis, but are retained only for the current year. The Δy dimension is used in the documentation to highlight 1) that the calculations do vary by year, and 2) to indicate the current year in formulas to avoid confusion.

- ! Summations over all relevant variables are usually written without upper and lower range limits on the summation signs.

- ! Unless otherwise stated, the range of y for an equation is 1990 through 2030.

Table 1-B. Definition of Subscripts

<u>Subscript in Documentation</u>	<u>Subscript in the FORTRAN Code</u>
r	R or D, refers to Census Division
t	Y, when Y is a year increment
f	F, fuel types
b	B, housing type
y	CURIYR or CURCALYR, the annual index
y-1	PREVYR, CURIYR-1, CURCALYR-1
eg	EQC, equipment class # within an end use (e.g., 1 - 11 for heat) RECCL, equipment class # from all end uses (currently 1 - 31)
egsw	EQCSW, equipment class # within an end use to switch to RECCLSW, equipment class # from all end uses to switch to
es	EQT, equipment type # within an end use RECTY, equipment type # from all end uses
v	Vintage of equipment

Classification

The RDM regards the residential sector as a consumer of energy. It has classified this consumption into a series of *end uses* that represent the various ways in which energy is used by households. The end uses are defined within the logic of the RDM, and determine the organization of the data found in the input data files discussed in this document. At present, the following end uses are covered, in the order shown:

- | | | |
|-----------------------|------------------------|----------------------------|
| 1. Space Heating | 6. Cooking | 14. Other Appliances |
| 2. Space Cooling | 7. Clothes Drying | 15. Secondary Heating |
| 3. Clothes Washers | 8. Food Refrigeration | 16. Distributed Generation |
| 4. Dishwashers | 9. Food Freezing | |
| 5. Water Heating | 10. Lighting | |
| 6. Cooking | 11. Furnace Fans | |
| 7. Clothes Drying | 12. Color Televisions | |
| 8. Food Refrigeration | 13. Personal Computers | |

Further, the RDM assumes that a series of broad *equipment classes* are available to satisfy the demands within the end uses. Using input data files, the user can modify the definitions of equipment classes available for each of the first nine end uses (Lighting and Other Appliances are at present handled by the logic of the RDM, as described later in this appendix). In general, the equipment classes are each used to satisfy a particular end use. However, there are a few cases where one class of equipment (heat pumps, for example) satisfies more than one end use, or where the availability of one class of equipment makes another class more likely (a gas furnace is frequently accompanied by a gas water heater and a gas cookstove). The file RTEKCL (Residential Technology Classes), which is outlined below, defines 31 equipment classes.

Each equipment class can be satisfied by a variety of specific *equipment types* that each have their own technological characteristics, such as efficiency, cost, and year when the technology is expected to become available or to become superannuated. Examples of equipment types would be the array of available gas furnaces, the more expensive of which tend to have higher efficiencies. The RDM does not attempt to represent all manufacturers=products, but rather defines broad types that are similar to one another in their technological characteristics. The user has the ability to define and modify the definitions of these equipment types, by modifying the file RTEKTY (Residential Technology Types), which is also outlined below.

Each equipment type can be assigned different characteristics during different ranges of years. Each of these time-related galaxies of characteristics is sometimes referred to as an equipment *model* of the given equipment type.

These concepts, of equipment classes that can be satisfied by a number of different equipment types that each contains several models, underlie the entire discussion of this manual. In earlier editions of the documentation, these two classifications were referred to as *general equipment type* (equipment class), and *specific equipment type* (equipment type). These names survive in the subscripts assigned to the two concepts throughout the document, *eg* and *es*, respectively. In order to reinforce the difference, we often add the modifier *specific* to the term *equipment type*, but we have avoided the use of the word *general* in relation to equipment classes.

Other RDM files define the characteristics of the mix of appliances that are in use in the base year,

including relative numbers installed, efficiencies, and the rates at which they are expected to be replaced.

RTEKCL.TXT: Technology Classes

Within the present structure of the Residential Demand Module, there are 30 defined technology classes. These are listed in Table 2-B. Here, Clothes Washers, Dishwashers, Refrigeration and Freezing each have a single technology class for all installed equipment. The list is not exhaustive, in that there do exist, for example, a few homes that heat their domestic water with wood; the vast majority of equipment used to satisfy the nine major end uses can be fitted into at least one class. Recall that, as mentioned above, Lighting and Other Appliances are handled separately within the logic of the RDM. Eighteen variables, described below, are read from the RTEKCL data file.

RTCLENDU_{eg}: End use number. Equipment classes having the same end use compete with one another. The RDM allocates equipment among them in the technology choice process. Matches *RTTYENDU_{es}* in the RTEKTY.TXT file.

- 1=Space Heating 2=Space Cooling
- 3=Clothes Washers 4=Dishwashers
- 5=Water Heating 6=Cooking
- 7=Clothes Drying 8=Food Refrigeration 9=Food Freezing

RTCLEQCL_{eg}: Equipment class number. Appears on all records. Matches *RTTYEQCL_{es}* in the RTEKTY.TXT (technology type) file for one or more equipment types: there are one or more equipment types in RTEKTY.TXT for each class in RTEKCL.TXT.

RTCLTYPT_{eg}: Required pointer from equipment class to a representative equipment type. This is the only pointer from RTEKCL.TXT to RTEKTY.TXT. Selects the equipment

Space Heating	Space Cooling	Dishwashers
Electric Furnaces	Room Air Conditioners	Clothes Washers
Electric Heat Pumps	Central Air	Cooking
Natural Gas Forced Air	Conditioning	Natural Gas
Natural Gas Radiators	Electric Heat Pumps	Electric
Kerosene Forced Air	Geothermal Heat Pumps	LPG
LPG Forced Air	Natural Gas Heat Pumps	Clothes Dryers
Distillate Forced Air	Water Heating	Natural Gas
Distillate Radiators	Natural Gas	Electric
Wood Heaters	Electric	Food Refrigeration
Geothermal Heat Pumps	Distillate Oil	Food Freezing
Natural Gas Heat Pumps	LPG	
	Solar Thermal	

type used in the log-linear formula for choice of equipment class for newly constructed housing units and replacements in single-family houses. Its value is the $RTEQTYPE_{es}$ in RTEKTY.TXT of the representative equipment.

$RTCLPNTR_{eg}$:

Class pointer. Required for end uses 1 through 3; zero otherwise.

If end use = 1: Required pointer from space heater class to associated water heater class linking water heater fuel choice to space heater fuel choice for newly constructed housing units.

If end use = 2: Required pointer from cooling heat pump class to same class of heating heat pump.

0 = Not a heat pump

Integer = Heater heat pump class number

If end use = 5: Required pointer from water heater class to matching cooking class linking cooking fuel choice to water heater fuel choice for newly constructed housing units. Also see $RTCLREPL_{es}$ end use 5 below; only natural gas water heaters may point to 2 types of cookstoves.

$RTCLREPL_{eg}$:

Replacement class. Required for end use 5; zero otherwise.

If end use = 5: Second pointer from natural gas water heater class to a cooking class. The model assumes that 65% of new homes with natural gas water heaters have natural gas stoves and 35% have electric stoves.

$RTFUEL_{eg}$:

Fuel used by this equipment.

1=Distillate

2=LPG

3=Natural Gas

4=Electricity (wood priced to electricity)

5=Kerosene

$RTMAJORF_{eg}$:

Major fuel flag. Used only for end use 1; zero otherwise. Space heater shares for systems using major fuels are calculated differently from space heater shares for systems using minor fuels. Set to 1 to indicate a major fuel. Set to 0 to indicate a minor fuel.

FAN_{eg} :

Indicates the need for a furnace fan with the appropriate heating system.

$RTBASEFF_{eg}$:

Base efficiency for this equipment class. Defined differently by end uses:

End uses 1,2,3,4,5,7: base efficiency for this equipment class.

	End uses 6,8,9: intensity for this equipment class.
$RTALPHA_{eg}$:	Equipment life expectancy function parameter.
$RTMINLIF_{eg}$:	Minimum life of this equipment class (years).
$RTMAXLIF_{eg}$:	Maximum life of this equipment class (years).
$RTFCBETA_{eg}$:	New home heating technology choice model log-linear parameter . Used only for end use 1; zero otherwise.
$RTFCBIAS_{eg}$:	New home heating technology choice model bias parameter. Used only for end use 1; zero otherwise.
$RTSWFACT_{eg}$:	Maximum fraction of single-family homes which may switch away from this equipment class on replacement.
$RTSWBETA_{eg}$:	Replacement technology choice model log-linear parameter . Used only for single-family homes.
$RTSWBIAS_{eg}$:	Replacement technology choice model bias parameter. Used only for single family homes.
$RTCLNAME_{eg}$:	Unique name for each equipment class.

RTEKTY: Technology Types

Within each of the equipment classes defined in the RTEKCL.TXT file, the Residential Demand Module accepts one or more types of equipment. The module chooses among the equipment types according to energy costs, equipment costs, and the relative efficiencies of the available types. The RTEKTY.TXT file contains the data used by the model for selecting which of the types are used. In general, the module does not exclusively select one of the alternatives available within a class, but rather changes the proportions of each type according to its evaluation of the equipment characteristics.

The characteristics of each equipment type can change over time, so the RTEKTY.TXT file allows more than one set of characteristics for each equipment type. These are called *models*, and are tagged with the starting and ending year to which they are applicable. Nineteen variables, described below, are read from the RTEKTY.TXT file:

$RTTYENDU_{es}$:	End Use number as in RTEKCL.TXT. Matches RTCLENDU in the RTEKCL.TXT file.
$RTTYEQCL_{es}$:	Equipment class for this equipment type. MUST match a class number,

	<i>RTCLEQCL_{eg}</i> , in the RTEKCL.TXT file.
<i>RTEQTYPE_{es}</i> :	Equipment type number. Each equipment class may include multiple types. Each equipment type may have up to one record for each year of the forecast period. DO NOT overlap years. The user may add equipment types to existing classes. When adding new types, update the type numbers for the rest of that end use; also, adjust the RTTYPNTR pointer for cooling and the RTCLTYPT pointer in the RTEKCL.TXT file for heating. If adding heat pump types, add same type to both space heating and space cooling and adjust pointers.
<i>RTINITYR_{es}</i> :	Initial calendar year for this model of this equipment type. The first <i>RTINITYR_{es}</i> for a model within a type should be the NEMS base year (2001); subsequent initial years for a model must be previous <i>RTLASYR_{es}</i> +1.
<i>RTLASYR_{es}</i> :	Last calendar year for this model of this equipment type. Must greater than or equal to <i>RTINITYR_{es}</i> for this model; final <i>RTLASYR_{es}</i> should be the last year of the forecast period (2030).
<i>HVACPT</i>	Pointer to identify the line number from RTEKTY.TXT to RTEKTYC.TXT.
<i>RTTYPNTR_{es}</i> :	Required pointer from cooling heat pump type to same type of heating heat pump. Also used as a flag to mark room air conditioners and central air conditioners. Used by end use 2 only; zero otherwise. Modify as follows only if heat pump types added: <ul style="list-style-type: none"> -1 = Room air conditioner 0 = Central air conditioner (not heat pump) Other Integer = Matching heater heat pump type number
<i>LOADADJ_{es}</i> :	For end uses 3 and 4, the amount of hot water load needed relative to the 2001 stock.
<i>RTEQEFF_{es}</i> :	Defined differently for different end uses: <ul style="list-style-type: none"> If end use = 1,2,3,4,5,7: Equipment type efficiency (AFUE, COP, etc.). If end use = 6,8,9: Energy consumption for typical models (e.g., annual Kwh consumption for 18 cu ft refrigerators).
<i>RTEQCOST_{es}</i> :	Installed wholesale capital cost in \$2004 per unit for new homes.
<i>RTRECCOST_{es}</i> :	Retail capital cost in \$2004 per unit for replacements.
<i>RTMATURE_{es}</i> :	Technology maturity description. <ul style="list-style-type: none"> ‘MATURE’ = No further cost reductions expected; use above constants for

installed wholesale and retail capital costs.

▷ADOLESCENT' = Main cost reductions occurred before base year (1996); function *EQCOST* reduces installed wholesale and retail capital cost with 1996 (or first year of availability) as the inflection point.

▷INFANT' = All cost reductions expected after first year of availability; function *EQCOST* reduces installed wholesale and retail capital cost with the inflection point in the future.

RTCOSTP1_{es}: If ▷MATURE' technology, not used.
If ▷ADOLESCENT' technology, representative year cost decline began (y_1 in code).
If ▷INFANT' technology, year of inflection of cost trend (y_0 in code).

RTCOSTP2_{es}: If ▷MATURE' technology, not used.
If ▷ADOLESCENT' or ▷INFANT' technology, logistic curve shape parameter (gamma in code).

RTCOSTP3_{es}: If ▷MATURE' technology, not used.
If ▷ADOLESCENT' technology, total possible proportional decline in equipment cost from y_0 onward (d in code).
If ▷INFANT' technology, total possible proportional decline in equipment cost from y_1 onward (d in code).

RTECBTA1_{es}: Efficiency choice model log-linear parameter α_1 , weights capital cost.

RTECBTA2_{es}: Efficiency choice model log-linear parameter α_2 , weights fuel cost.

RTECBTA3_{es}: Efficiency choice model log-linear parameter α_3 , weights life cycle cost.

RTECBIAS_{es}: Efficiency choice model, consumer preference log-linear parameter; fits current market shares to shipment data.

RTTYNAME_{es}: Unique name for each equipment type. Do not modify existing names. Add unique names for new types.

Equipment Survival, Housing Survival, and Housing Additions


SVRTE (Equipment Survival Function)

SVRTE is a function in the FORTRAN sense. It is a function that can be called with arguments and returns a single value as its result. The survival rate function is a simple piecewise linear decline, as shown in the picture. Its mathematical description is as follows:

where,

$$\begin{aligned}
 SVRTE_{t,L_{\min},L_{\max}} &= 1, \text{ if } t < L_{\min} \\
 SVRTE_{t,L_{\min},L_{\max}} &= 0, \text{ if } t > L_{\max} \\
 SVRTE_{t,L_{\min},L_{\max}} &= 1 - \frac{t - L_{\min}}{L_{\max} - L_{\min}}, \text{ otherwise}
 \end{aligned}$$

(B-1)



$SVRTE_{y-t,L_{\min},L_{\max}}$ is the proportion of surviving equipment after time t ,
 t is the age of the equipment in years,
 L_{\min} is the minimum equipment lifetime in years, and
 L_{\max} is the maximum equipment lifetime in years.

Note that function calls to SVRTE in the FORTRAN code include a "placeholder" as the first parameter. However, the first parameter is currently not used in the calculations. Since it is not used in the definition of the function in Equation Figure 1, it is not noted explicitly in the remainder of this documentation.

EXHSE (Existing Housing Demolition Rate Component)

Housing units are removed from the stock at a constant rate over time. The demolition rates for the household types (HDR_b) are as follows:

Single-Family Homes: $HDR_1 = 0.997$
 Multifamily Homes: $HDR_2 = 0.998$
 Mobile Homes: $HDR_3 = 0.975$

The surviving pre-2002 housing stock is defined by:

$$\begin{aligned}
 EH_{y,b,r} &= RECS \text{ data}, \text{ if } y = 2001 \\
 EH_{y,b,r} &= EH_{y-1,b,r} * HDR_b, \text{ if } y > 2001
 \end{aligned}$$

(B-2)

where,

$EH_{y,b,r}$ is the pre-2002 housing stock surviving in year y ,

HDR_b is the housing demolition rate, from the RMISC.TXT file.

NEWHSE (Calculate New Housing Component)

New houses are added to the stock each year, as defined by the NEMS Macroeconomic Module. The total number of new additions in a given year is defined as:

$$NH_{y,r} = MC_HUSPS1_{y,r} + MC_HUSPS2A_{y,r} + MC_HUSMFG_{y,r} \quad (B-3)$$

where,

- $NH_{y,r}$ is total new housing added by year and Census Division,
- $MC_HUSPS1_{y,r}$ is single-family housing added by year and Census Division,
- $MC_HUSPS2A_{y,r}$ is multifamily housing added by year and Census Division,
- $MC_HUSMFG_{y,r}$ is mobile home shipments added by year and Census Division,

EPACTWD (Calculate EPACT Window Labeling Impact Component)

First aggregate the housing stock to the national level,

$$OLDHSES_y = \sum_{b,r} EH_{y,b,r} \quad (B-4)$$

$$NEWHSES_y = \sum_{b,r} NH_{y,b,r} \quad (B-5)$$

where,

- $OLDHSES_y$ is the national total of remaining pre-2002 housing.
- $NEWHSES_y$ is the national total of remaining post-2001 housing additions.

Then, calculate the EPACT window labeling impacts for both heating and cooling, where,

$$EPACTH_y = EPWINPCT_y * EPSAVHT \quad (B-6)$$

$$EPACTC_y = EPWINPCT_y * EPSAVCL \quad (B-7)$$

$EPACTH_y$ is the national fractional heat savings to be expected from EPACT window labeling standards,

$EPACTC_y$ is the national fractional cooling savings to be expected from EPACT window labeling standards,

$EPWINPCT_y$ is the fraction of houses affected by window labeling standards, from the RMISC.TXT file,

$EPSAVHT$ is the fraction of heat input to houses expected to be saved by improved window labeling, set in the program to a constant value of .08, and

$EPSAVCL$ is the fraction of cooling input to houses expected to be saved by improved window labeling, set in the program to a constant value of .03.

RDSQFT (Read Floor Areas)

Read the historical and forecast data for average household area, $SQRFOOT_{y,b,r}$ from the RSSQRFT.TXT file, and calculate the ratios, $SQFTADJ_{y,b,r}$ between each area and the base year area, $SQRFOOT_{2001,b,r}$.

SQFTCALC (Calculate Average Floor Area Component)

Averages the floor areas of homes,

where,

$$SQFTAVG_{2001} = \frac{\sum_{b,r} (SQRFOOT_{2001,b,r} * EH_{2001,b,r})}{OLDHSES_{2001}} \quad (B-8)$$

$$SQFTAVG_y = \frac{\sum_{b,r} (SQRFOOT_{2001,b,r} * EH_{2001,b,r} + SQRFOOT_{y,b,r} * NH_{y,b,r})}{OLDHSES_{2001} + NWHSES_y} \quad (B-9)$$

$SQFTAVG_y$ is the average floor area of houses of all types, and $SQRFOOT_{y,b,r}$ is a table of historical and projected housing floor areas, from the RSSQRFT.TXT file, by year, housing type and Census Division.

RDHTREQC (Project 2001 Vintage Equipment for all End-Use Services)

This routine reads in the 2001 equipment stock for all services from external files, and then calculates surviving equipment in the pre-2002 housing stock for 2002 through the end of the forecast.

For $y > 2001$,

$$EQCESE_{y,eg,b,r} = EQCESE_{2001,eg,b,r} * HDR_b^{y-2001} * EQCRET_{y,eg} \quad (B-10)$$

where,

$EQCESE_{y,eg,b,r}$ is the amount of surviving pre-2002 vintage equipment in pre-2002 housing by housing type and Census Division,

HDR_b is the housing demolition rate by housing type, and

$EQCRET_{y,eg}$ are the annual equipment retirement fractions for the equipment classes, from file RSRET01.TXT.

Space Heating

Technology Choice Component

The Technology Choice Component uses a log-linear function to estimate technology market shares. The module is able to calculate market shares based on consumer behavior as a function of bias, capital costs, and operating costs or as a function of life-cycle costs.

The ten major services modeled are:

- Space Heating
- Space Cooling

Water Heating
 Cooking
 Clothes Drying
 Food Refrigeration
 Food Freezing
 Clothes Washers
 Dishwashers
 Lighting

Color televisions, personal computers, and other appliance decisions are modeled differently from the major services listed above.

New equipment operating costs are computed by the expression,

$$OPCOST_{y,es,b,r,v} = PRICES_{f,r,y} * EQCUEC_{y,eg,b} * HDDFACT_{r,y} * RTEFFAC_{eg,v} * HSELL_{y-1,r,v} \quad (B-11)$$

where,

- OPCOST_{y,es,b,r,v} is the operating cost for the specific equipment type by year, housing type, and Census Division, and vintage,
- PRICES_{f,r,y} is the fuel price for the equipment by fuel, by region and forecast year,
- EQCUEC_{r,eg,b} is the unit energy consumption by Census Division, equipment class and housing type,
- HDDFACT_{r,y} is a factor, the ratio between heating degree days in the current year and in the base year, for adjusting for abnormal weather in either the base year or in the current year,
- RTEFFAC_{eg,v} is the efficiency adjustment for the general equipment class and vintage, and,
- HSHELL_{y-1,r,v} is the shell efficiency adjustment to account for building shell improvements over time (which reduce heating loads).

For newly constructed homes, operating cost is a function of both the heating and cooling operating costs, with the shell efficiency also accounted for as shown:

$$\begin{aligned}
OPCOST_{y,es,b,r,hvac} = & PRICES_{f,r,y} * EQCUEC_{y,heating,b} * HDDFACT_{r,y} * RTEFFAC_{heating,v} * HTSHELL_{eg,r,b} + \\
& PRICES_{f,r,y} * EQCUEC_{y,cooling,b} * CDDFACT_{r,y} * RTEFFAC_{cooling,v} * CLSHELL_{eg,r,b}
\end{aligned}
\tag{B-12}$$

where,

HTSHELL_{eg,r,b} is the heating shell efficiency factor for the HVAC system,

CDDFACT_{r,y} is the cooling degree-day adjustment, and

CLSHELL_{eg,r,b} is the cooling shell efficiency factor for the HVAC system.

The consumer is allowed to choose among the various levels of cost and efficiency for a given class of equipment. Electric heat pumps are an example of an equipment class (denoted by eg). Equipment type (denoted by es) refers to the same class of equipment with different efficiency ratings (e.g., high vs low efficiency electric heat pumps).

EQCOST is a time-dependant function for computing the installed capital cost of equipment in new construction and the retail replacement cost of equipment in existing housing. It is called if the cost trend switch COSTTRSW = 1 in COMMON RTEK (which is the default). Its mathematical description is as follows:

$$\begin{aligned}
EQCOST_{es,y,CAP} &= RTEQCOST_{es}, \text{ if } RTMATURE_{es} = MATURE \\
EQCOST_{es,y,RET} &= RTRECCOST_{es}, \text{ if } RTMATURE_{es} = MATURE
\end{aligned}
\tag{B-13}$$

$$\begin{aligned}
EQCOST_{es,y,CAP} &= \frac{RTEQCOST_{es} * 2 * d}{1 + \left(\frac{y - y_1}{y_0 - y_1}\right)^y} + (1 - d) * RTEQCOST_{es}, \text{ if } RTMATURE_{es} = ADOLESCENT \\
EQCOST_{es,y,RET} &= \frac{RTRECCOST_{es} * 2 * d}{1 + \left(\frac{y - y_1}{y_0 - y_1}\right)^y} + (1 - d) * RTRECCOST_{es}, \text{ if } RTMATURE_{es} = ADOLESCENT
\end{aligned}
\tag{B-14}$$

$$EQCOST_{es,y,CAP} = \frac{RTEQCOST_{es} * d}{1 + \left(\frac{y - y_1}{y_0 - y_1}\right)^y} + (1 - d) * RTEQCOST_{es}, \text{ if } RTMATURE_{es} = INFANT$$

$$EQCOST_{es,y,RET} = \frac{RTRECCOST_{es} * d}{1 + \left(\frac{y - y_1}{y_0 - y_1}\right)^y} + (1 - d) * RTRECCOST_{es}, \text{ if } RTMATURE_{es} = INFANT$$
(B-15)

where,

- $EQCOST_{es,y,ctype}$ is time-dependant installed capital cost of equipment in new construction or the retail replacement cost of equipment in existing housing,
- $ctype$ tells function type of equipment cost to return,
 CAP = Return installed capital cost in new construction,
 RET = Return retail replacement cost in existing housing,
- $RTMATURE_{es}$ Technology maturity description,
 MATURE = No further equipment cost reductions expected,
 ADOLESCENT = Major cost reductions occurred before base year,
 INFANT = All cost reductions expected after first year available,
- $RTEQCOST_{es}$ Installed wholesale capital cost in \$2004 per unit for new homes, remains constant for MATURE technologies only (used when $ctype = CAP$),
- $RTRECCOST_{es}$ Retail capital cost in \$2004 per unit for replacements, remains constant for MATURE technologies only (used when $ctype = RET$),
- y_0 is the year of inflection of cost trend,
 $RTINITYR_{es}$ if ADOLESCENT,
 $RTCOSTP1_{es}$ if INFANT,
- y_1 is the year cost decline began,
 $RTCOSTP1_{es}$ if ADOLESCENT,
 $RTINITYR_{es}$ if INFANT,
- d is the total possible proportional decline in equipment cost, $RTCOSTP3_{es}$,
 from y_0 onward if ADOLESCENT,
 from y_1 onward if INFANT,
 is the logistic curve shape parameter, $RTCOSTP2_{es}$.

For newly constructed homes, the costs shown above also include the cooling system and shell

efficiency measures.

The concept of price induced technology change is also included in the formulation of equipment costs. This concept allows future technologies faster diffusion into the marketplace if fuel prices increase markedly and remain high over a multi-year period. First, compare the average fuel price for a given fuel over a three year period to the price observed in 2001:

$$PRICEDELTA_{y,f} = \frac{.334 * (PRICE_{y,f} + PRICE_{y-1,f} + PRICE_{y-2,f})}{PRICE_{2001}} \quad (B-16)$$

Under a *persistent* doubling of energy prices (defined in the models as three consecutive years, as note in (15) above), the most advanced technologies (i.e., those only available beginning in 2015 and beyond) will advance forward by 10 years to 2005 (as long as the doubling starts by 2002). Shifts from 0 to 10 years are allowed in the current model formulations. For nearer term technologies (e.g., 2005 projections) shifts are limited to a lesser number of years by the algorithm to ensure that *over-shifting* does not occur (i.e., future technologies can not become available before the persistent price change is projected to occur). The formulation only allows technologies potentially to shift toward earlier availability, and once shifted, they never shift back. This shift is represented as

$$SHIFTYEARS_t = \frac{(PRICEDELTA_{y,f} - 1.0)}{0.10} \quad (B-17)$$

subject to the constraints listed above. The technology data presented in equations (13) to (15) are adjusted according to the results obtained in equation (16).

The module includes the option to use life-cycle costing to calculate market share weights. The life cycle cost calculation is,

$$LFCY_{y,es,b,r,v} = CAPITAL_{es} + OPCOST_{y,es,b,r,v} * \left(\frac{1 - (1 + DISRT)^{-HORIZON}}{DISRT} \right) \quad (B-18)$$

where,

LFCY _{y,es,b,r,v}	is the life cycle cost of an equipment type by forecast year, housing type, and Census Division, and vintage,
CAPITAL _{es}	is the installed capital cost of an equipment type based on calling EQCOST with RTEQCOST _{1es} ,
HORIZON	is the number of years into the future that is used to compute the present value of future operating cost expenditures presently set to seven years, and
DISRT	is the discount rate applied to compute the present value of future operating costs presently at 20 percent.

A weight for each equipment class is calculated to estimate the market share for each of the 11 heating systems for new construction based on the cost factors computed above. The functional form is expressed as,

$$HEATSYS_{y,eg,b,r} = e^{(RTFCBIAS_{eg} + RTFCBETA_{eg} * LFCY_{y,eg,b,r,v})} \quad (B-19)$$

where,

HEATSYS _{y,eg,b,r}	is the equipment weight for a heating equipment class for new housing by year, housing type, and Census Division,
RTFCBIAS _{eg}	is a consumer preference parameter that fits the current market share to historical shipment data,
LFCY _{y,eg,b,r,v}	is the life cycle cost for the equipment class by year, housing type, and Census Division, and vintage, and
RTFCBETA _{eg}	is a parameter value of the log-linear function.

The sum over the heating equipment classes gives the total weight for all of the heating equipment:

$$SYSTOT_{y,b,r} = \sum_{eg=1}^{eg=11} HEATSYS_{y,eg,b,r} \quad (B-20)$$

where,

$SYSTOT_{y,b,r}$ is the sum of equipment class weights for the all equipment classes.

The equipment class fuel share is computed by

$$HTYSSHR_{y,eg,b,r} = \frac{HEATSYS_{y,eg,b,r}}{SYSTOT_{y,b,r}}, \text{ if } SYSTOT_{y,b,r} > 0 \quad (\text{B-21})$$

$$HTYSSHR_{y,eg,b,r} = 0, \text{ otherwise}$$

where,

$HTYSSHR_{y,eg,b,r}$ is the equipment class fuel share by year, building type, and Census Division.

For each equipment type within each class, a weight is calculated based on the cost factors computed above. The functional form is expressed as,

$$EQWNTN_{y,es,b,r} = e^{(RTECBTA1_{es} * CAPITAL_{es} + RTECBTA2_{es} * OPCOST_{y,es,b,r,1})} \quad (\text{B-22})$$

$$EQWTR_{y,es,b,r} = e^{(RTECBTA1_{es} * CAPITAL_{es} + RTECBTA2_{es} * OPCOST_{y,es,b,r,2})} \quad (\text{B-23})$$

where,

$EQWNTN_{y,es,b,r}$ is the equipment weight for new equipment type by year, housing type, and Census Division,

$EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment type by year, housing type, and Census Division,

$OPCOST_{y,es,b,r,v}$ is the operating cost for the equipment type by year, housing type, Census Division, and vintage (1=new, 2=existing)

$RTECBTA1_{es}$, are parameter values of the same fit.

$RTECBTA2_{es}$

Sums over the equipment types within each class give total weights for the equipment classes:

$$TOTEWTN_{y,eg,b,r} = \sum_{es=loweff}^{es=hieff} EQWTN_{y,es,b,r} \quad (B-24)$$

$$TOTEWTR_{y,eg,b,r} = \sum_{es=loweff}^{es=hieff} EQWTR_{y,es,b,r} \quad (B-25)$$

where,

$TOTEWTN_{y,eg,b,r}$ is the sum of weights for the new equipment types within equipment classes,

$TOTEWTR_{y,eg,b,r}$ is the sum of weights for the replacement equipment types within equipment classes.

The equipment type fuel share is computed by

$$EQFSHRN_{y,es,b,r} = \frac{EQWTN_{y,es,b,r}}{TOTEWTN_{y,eg,b,r}}, \text{ if } TOTEWTN_{y,eg,b,r} > 0$$

$$EQFSHRN_{y,es,b,r} = 0, \text{ otherwise} \quad (B-26)$$

$$EQFSHRR_{y,es,b,r} = \frac{EQWTR_{y,es,b,r}}{TOTEWTR_{y,eg,b,r}}, \text{ if } TOTEWTR_{y,eg,b,r} > 0$$

$$EQFSHRR_{y,es,b,r} = 0, \text{ otherwise} \quad (B-27)$$

where,

$EQFSHRN_{y,es,b,r}$ is the new equipment type fuel share by year, building type, and Census Division.

$EQFSHRR_{y,es,b,r}$ is the replacement equipment type fuel share by year, building type, and Census Division.

This value is multiplied by the market share of the equipment type to yield the new market share for the equipment type. The relationship is expressed as,

$$NEQTSHR_{y,es,b,r} = EQFSHRN_{y,es,b,r} \quad (B-28)$$

$$REQTSHR_{y,es,b,r} = EQFSHRR_{y,es,b,r} \quad (B-29)$$

where,

$NEQTSHR_{y,es,b,r}$ is the new market share for the new equipment type by year, housing type, and Census Division.

$REQTSHR_{y,es,b,r}$ is the new market share for the replacement equipment type by year, housing type, and Census Division.

The weighted average equipment efficiencies for the equipment types within each equipment class are then computed as,

$$WTEQCEFFN_{y,eg,b,r} = \frac{\sum_{es} \left[\frac{NEQTSHR_{y,es,b,r}}{RTEQEFF_{y,es}} \right]}{\sum_{es} NEQTSHR_{y,es,b,r}}, \text{ if } \sum_{es} NEQTSHR_{y,es,b,r} > 0 \quad (B-30)$$

$$WTEQCEFFN_{y,eg,b,r} = \frac{1}{RTBASEFF_{eg}}, \text{ otherwise}$$

$$WTEQCEFFR_{y,eg,b,r} = \frac{\sum_{es} \left[\frac{REQTSHR_{y,es,b,r}}{RTEQEFF_{y,es}} \right]}{\sum_{es} REQTSHR_{y,es,b,r}}, \text{ if } \sum_{es} REQTSHR_{y,es,b,r} > 0 \quad (B-31)$$

$$WTEQCEFFR_{y,eg,b,r} = \frac{1}{RTBASEFF_{eg}}, \text{ otherwise}$$

where,

$WTEQCEFFN_{y,eg,b,r}$ is the weighted average efficiency of new equipment type within each equipment class by year, housing type, and Census Division,

$RTEQEFF_{y,es}$ is the efficiency of the equipment type,

$RTBASEFF_{eg}$ is the 2001 stock-average efficiency of the equipment class, and

$WTEQCEFFR_{y,eg,b,r}$ is the weighted average efficiency of replacement equipment types within each equipment class by year, housing type, and Census Division.

Appliance Stock Component

The appliance stock component tracks the major energy-consuming equipment by housing vintage and equipment vintage for additions, replacements, and surviving equipment.

Table 3 depicts the equipment accounting methodology. For simplicity, this discussion omits the details of the variable subscripts, which is explained later. The equipment accounting system partitions equipment into two major categories, depending on the vintage of the housing unit: equipment installed in housing units built before 2002 (at the beginning of a model run) and equipment added to new housing units (those added during the model run). Equipment is further partitioned into three additional survival/replacement categories: equipment that survives, equipment purchased to replace other equipment, and equipment purchased for new construction. The categorization of equipment by housing vintage and surviving/replacement type results in seven categories of equipment that are tracked.

Table B-3. Heating Equipment, UEC and Housing Shell Accounting Scheme

Housing Units that Existed in 2001			Housing Units Added From 2002 through 2030		
Equipment	UEC	Shell	Equipment	UEC	Shell
EQCRP90RP	EQCNUEC	EHSHELL			
EQCRP90	EQCRUEC	EHSHELL			
EQCSR90	EQCAUEC	EHSHELL	EQCADD	EQCNUEC	NHSHELL
			EQCREP	EQCNUEC	AHSHELL
EQCESE	EQCSUEC	EHSHELL	EQCSUR	EQCAUEC	AHSHELL

The equipment categories for pre-2002 housing units are:

EQCESE denotes the surviving pre-2002 equipment stock in pre-2002 homes,
 EQCSR90 represents equipment stock in pre-2002 homes that has been replaced after
 2001 and that still survives, and

EQCRP90 is current-year replacement equipment for pre-2002 housing.

EQCRP90RP is current-year replacements for the EQCRP90 equipment.

Note: EQCND90 is the sum of EQCESE, EQCSR90, EQCRP90RP, and EQCRP90.

The equipment categories for post-2001 housing units are:

EQCSUR denotes equipment that has been modeled as added and still survives,
EQCREP is equipment that has been modeled as added and is in need of replacement in
the current year, and
EQCADD is equipment for housing units added in the current year.

Unit energy consumption (UEC) is tracked for equipment added by category of housing unit:

EQCUEC is the average UEC for the original 2001 equipment in housing units that existed in
2001,
EQCSUEC is the average UEC for surviving equipment in pre-2002 housing units,
EQCAUEC is the average UEC for surviving equipment in post-2002 housing units,
EQCRUEC is the UEC for all equipment added in the current year to replace pre-2002
equipment, and
EQCNUEC is the UEC for all equipment added in the current year, other than EQCRP90.

Shell indices are modeled for three categories of housing units:

EHSHELL is the shell index applicable to pre-2002 housing units,
AHSHELL is the shell index applicable to housing units added in all but the current year, and
NHSHELL is the shell index for housing units added in the current year.

For example, in accounting for the heating energy consumption of surviving equipment installed in pre-2002 housing units, the equipment stock, HTESE, would be multiplied by the unit energy consumption, HTUEC, and by the shell index EHSHELL. This explanation was designed to account for heating equipment, but the accounting principle is used throughout the residential module. For the pre-2002 housing example above, the appropriate space cooling variables would be CLESE, CLUEC and ECSHELL. The shell indices apply only to heating and cooling, thus, for example, for refrigeration the accounting requires only RFESE and RFUEC.

The housing decay rate is used in conjunction with the equipment survival rate to determine the number of equipment units that survive/retire each year in the forecast. A linear function is used

to model the retirement of equipment after a minimum age is reached up to its maximum age. The linear function is expressed by,

$$\begin{aligned}
 SVRTE_{y-t, L_{\min}, L_{\max}} &= 1.0 \\
 SVRTE_{y-t, L_{\min}, L_{\max}} &= \frac{L_{\max} - (y-t)}{L_{\max} - L_{\min}}, \text{ if } L_{\min} < y-t < L_{\max} \\
 SVRTE_{y-t, L_{\min}, L_{\max}} &= 0.0, \text{ if } y-t \geq L_{\max}
 \end{aligned}
 \tag{B-32}$$

where,

$SVRTE_{y-t, L_{\min}, L_{\max}}$ is the equipment survival function,
 $y-t$ is the age of the equipment,
 L_{\min} is the minimum equipment lifetime in years, and
 L_{\max} is the maximum equipment lifetime in years.

Equipment in post-2001 (new) houses is the product of the number of new houses and the market share of each equipment class. This is expressed as,

$$EQCADD_{y,t, eg, b, r} = HSEADD_{y, b, r} * SHARES_{y, eg, b, r} \tag{B-33}$$

where,

$EQCADD_{y,t, eg, b, r}$ is the number of post-2001 vintage equipment units added to new houses in year y , vintaged to year t , by housing type and Census Division,
 $HSEADD_{y, b, r}$ is the number of new housing units constructed in the forecast year by housing type and Census Division,
 $SHARES_{y, eg, b, r}$ is the current year market share for each equipment class by housing type and Census Division.

The number of replacements for the post-2001 equipment units in post-2001 houses is calculated as:

$$EQCREP_{y,t, eg, b, r} = \sum_{t=2002}^{t=y-1} (EQCADD_{t, eg, b, r} * HDR_b^{y-t} * (1 - SVRTE_{eg})) \tag{B-34}$$

where,

$EQCREP_{y,t, eg, b, r}$ is the number of equipment replacements of post-2001 equipment in post-

HDR_b is the housing survival rate by housing type, and
 $y-t$ represents the age of the equipment.

Post-2001 replacement units required for pre-2002 houses in the current year are calculated as,

$$EQCRP90_{y,t,eg,b,r} = EQCESE_{2001,eg,b,r} * EQCRET_{y,eg} * HDR_b \quad (B-35)$$

where,

$EQCRP90_{y,t,eg,b,r}$ is the number of replacement units required for pre-2002 homes in year y , vintaged to year t by housing type and Census Division,
 $EQCRET_{y,eg}$ is the equipment retirement rate for pre-2002 houses by forecast year,
 $EQCESE_{2001,eg,b,r}$ is the pre-2002 vintage stock of equipment in pre-2002 vintage houses in 2001 by housing type and Census Division.

Within the forecast period, some of the EQCRP90 will also need to be replaced. This is represented as,

$$EQCRP90RP_{y,t,eg,b,r} = \sum_{t=2002}^{t=y-1} (EQCRP90_{t,eg,b,r} + EQCRP90RP_{y,t,eg,b,r}) * (1 - SVRTE_{eg}) \quad (B-36)$$

where,

$EQCRP90RP_{y,t,eg,b,r}$ is the number of replacement units required to replace post-2001 equipment in pre-2002 houses by forecast year, housing type and Census Division.

Next, a series of calculations is made to determine the number of replacement units that switch to a different technology type. For each type of replacement (EQCRP90, EQCRP90RP, EQCREP), first calculate the number of eligible switches (single-family houses only).

$$ELIGIBLE_{y, eg, b, r} = \sum_{eg} (EQCRP90_{y, t, eg, b, r} + EQCRP90RP_{y, t, eg, b, r} + EQCREP_{y, t, eg, b, r}) * (SWFACT_{eg}) \quad (B-37)$$

where,

$ELIGIBLE_{y, eg, b, r}$ is the number of replacements eligible to switch technology types by housing type and Census Division, and
 $SWFACT_{eg}$ is the fraction who may switch from equipment class eg .

The $Aswitching@$ weight for each equipment type is calculated as,

$$RPWEIGHT_{y, egsw, b, r} = e^{(RTSWBIAS_{egsw} + RTSWBETA_{egsw} * (LFCY_{y, egsw, b, r, v} + RPINSCOST_{eg, egsw}))} \quad (B-38)$$

Summing over all equipment types,

$$TOTSH_{y, b, r} = \sum_{egsw=1}^{egsw=11} RPWEIGHT_{y, egsw, b, r} \quad (B-39)$$

allows for shares summing to 100 percent.

$$RPSHARE_{y, egsw, b, r} = \frac{RPWEIGHT_{y, egsw, b, r}}{TOTSH_{y, b, r}}, \text{ if } TOTSH_{y, b, r} > 0 \quad (B-40)$$

$$RPSHARE_{y, egsw, b, r} = 0, \text{ otherwise}$$

where,

$RPSHARE_{y, egsw, b, r}$ is the share that will switch to equipment class $egsw$ on replacement by year, housing type, and Census Division,
 $RPWEIGHT_{y, egsw, b, r}$ is the weight assigned to each equipment class $egsw$ by year, housing type, and Census Division,
 $RTSWBIAS_{egsw}$ is the consumer preference parameter for switching to this equipment class,
 $RTSWBETA_{egsw}$ is the parameter value for the same fit,
 $LFCY_{y, essw, b, r, v}$ is the lifecycle cost of the equipment type switching to ($essw$) by year, building type, region, and vintage,

RPINSCOST_{eg,egsw} is the cost of switching from equipment class eg to egsw on switching,
and

TOTSH_{y,b,r} is the sum of the switch weights.

The equipment classes are then reconciled by Afrom@ and Ato@ switching categories and redistributed to the correct equipment class.

The surviving post-2001 vintage equipment in pre-2002 houses is computed as,

$$EQCSR90_{y,t,eg,b,r} = \sum_{t=2002}^{t=y-1} \left(EQCRP90_{t,y,eg,b,r} + EQCRP90RP_{t,y,eg,b,r} \right) * SVRTE_{eg,y-t,L_{min},L_{max}} * HDR_b^{y-t} \quad (B-41)$$

where,

EQCSR90_{y,eg,b,r} is the equipment stock in pre-2002 homes that has been replaced

after 2001 and still survives by housing type and Census Division,

EQCRP90_{t,y,eg,b,r} is the number of replacement (post-2001 vintage) equipment units demanded each year in pre-2002 houses by housing type and Census Division,

EQCRP90RP_{t,y,eg,b,r} is the number of replacements of the EQCRP90 equipment units demanded each year by housing type and Census Division,

SVRTE_{eg,y-t,Lmin,Lmax} is the equipment survival function,

HDR_b is the housing survival rate by housing type, and

y-t represents the age of the equipment.

Surviving post-2001 equipment, originally purchased as additions or replacements in post-2001 houses, is calculated as,

$$EQCSUR_{y,eg,b,r} = \sum_{t=2002}^{t=y-1} \left(EQCADD_{t,eg,b,r} + EQCREP_{t,eg,b,r} \right) * SVRTE_{eg,y-t,L_{min},L_{max}} * HDR_b^{y-t} \quad (B-42)$$

where,

$EQCSUR_{y, eg, b, r}$	is the surviving post-2001 equipment purchased as additions or replacements in post-2001 houses by housing type and Census Division,
$EQCADD_{t, eg, b, r}$	is the quantity of post-2001 vintage equipment added to post-2001 houses by forecast year, housing type and Census Division,
$SVRTE_{eg, y-t, Lmin, Lmax}$	is the equipment survival function,
$EQCREP_{t, eg, b, r}$	is the number of equipment replacements of post-2001 equipment in post-2001 houses, and
$y-t$	represents the age of the equipment.

Shell Integrity Component

The shell integrity component uses three indices to capture the increases in the energy efficiency of building shells over time. One index corresponds to the pre-2002 housing stock, and two indices correspond to the post-2001 stock, one for housing constructed in the current year and the other for the average post-2001 stock. The existing shell index is adjusted each year to account for fuel price increases (decreases have no effect on shell integrity, i.e., shell efficiency increases as price increases) and technology improvements. The shell index for newly-constructed homes is based on the choice of HVAC system, which includes the shell characteristics represented as an index.

An important part of shell integrity is the quality of windows. In the Energy Policy Act, there are regulations that require that all new windows be labeled with an index that describes their insulation properties. These regulations will be phased in over a period of years, beginning in 1995. The residential module evaluates the impacts of these regulations by means of an annual input variable, $EPWINPCT_y$, that gives the proportion of existing houses expected to be subject to window labeling. This quantity, when multiplied by the fraction of heat savings expected to be afforded by labeled windows, currently set at .08, gives the expected savings rate due to window labeling, $EPACTH_y$.

The existing housing heating shell index is calculated as,

$$\begin{aligned}
EHSHELL_{y,f,r,b} &= EHSHELL_{y-1,f,r,b}, \text{ if } EHSHELL_{y,f,r,b} > EHSHELL_{y-1,f,r,b} \\
EHSHELL_{y,f,r,b} &= LIMIT, \text{ if } EHSHELL_{y,f,r,b} > LIMIT \\
EHSHELL_{y,f,r,b} &= EHSHELL_{RECSYEAR,f,r,b} * RSELAST_{y,f,r,\alpha2,ef1,ef2,ef3,RECSYEAR} * TECHG_{e,r,b} * (-EPACTH_y) \text{ otherwise}
\end{aligned}
\tag{B-43}$$

where,

- EHSHELL_{y,f,r,b} is the shell integrity index for existing housing by year, fuel, Census Division, and building type,
- LIMIT limits the maximum shell index efficiency to 0.3 (i.e., maximum shell efficiency is limited to a 70-percent improvement on the base year value), and
- TECHG_{1,d,b} is a parameter that represents the annual increase in existing shell integrity due to technology improvements,
- RSELAST is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and , the total short-term price elasticity, and
- EPACTH_y is the projected national fractional savings in heating energy consumption from the EPACT window labeling program in year y, from the RMISC file.

The new housing heating shell index is calculated as,

$$NHSHELL_{y,f,r,b} = \sum_{t=2002}^{t=y-1} (EQFSHRN_{y,es,b,r} * SHELLEFF_{y,es,b,r})
\tag{B-44}$$

where,

- NHSHELL_{y,f,r,b} is the new housing units shell integrity index by year, fuel, Census Division, and building type, and
- SHELLEFF_{y,es,b,r} is the shell integrity factor associated with each HVAC package available.

The average post-2001 housing heating shell index is calculated as,

$$AHSHELL_{y,f,r,b} = \frac{\sum_{eg} [NHSHELL_{y,r,r,b} * EQCADD_{y,eg,b,r} + AHSHELL_{y-1,f,r,b} * (EQCREP_{y,eg,b,r} + EQCSUR_{y,eg,b,r})]}{\sum_{eg} [EQCADD_{y,eg,b,r} + EQCREP_{y,eg,b,r} + EQCSUR_{y,eg,b,r}]}
\tag{B-45}$$

where,

AHSHELL _{y,f,r,b}	is the average post-2001 heating shell index by year, fuel, Census Division, and building type, equal to NHSHELL in 2002,
NHSHELL _{y,f,r,b}	is the new housing units shell integrity index by year, fuel, Census Division, and building type,
EQCADD _{y,eg,b,r}	is the number of equipment units installed in new construction by forecast year, housing type and Census Division,
EQCREP _{y,eg,b,r}	is the number of equipment replacements of post-2001 equipment in post-2001 houses, and
EQCSUR _{y,eg,b,r}	is the surviving post-2001 equipment purchased as additions or replacement in post-2001 houses by forecast year, housing type and Census Division.

In addition to the calculation shown above, the module places two additional restrictions upon AHSHELL_{y,f,r,b}: it may never increase, and it must not fall below LIMIT. If ever AHSHELL_{y,f,r,b} is calculated to increase, its value is set to the prior year's value; if it falls below LIMIT, it is set equal to LIMIT.

Consumption and UEC Component

Final end-use fuel consumption is determined by the fuels demanded by the equipment to provide households with the demanded services. For each equipment class, the UEC for new equipment, replacement equipment, and the average of all equipment is computed. New equipment UEC values are calculated as:

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFN_{y,eg,b,r} * RTBASEFF_{2001,eg} * \begin{cases} HDDFACT_{y,r} * SQFTADJ_{y,b,r}, & \text{if } WTEQCEFFN_{y,eg,b,r} > 0 \\ , & \text{otherwise} \end{cases} \quad (B-46)$$

where,

EQCNUEC _{y,eg,b,r}	is the unit energy consumption for new equipment by forecast year, housing type and Census Division,
WTEQCEFFN _{y,eg,b,r}	is the equipment class efficiency weighted by the market share of the specific equipment as computed in the logistic function in the technology choice component by housing type and Census Division,

$RTBASEFF_{2001, eg}$ is the 2001 stock-average efficiency of the equipment class,
 $EQCUEC_{r, eg, b}$ is unit energy consumption for original 2001 stock of the equipment class by Census Division and housing type,
 $HDDFACT_{y, r}$ is the heating degree day adjustment factor by Census Division to correct to normal weather relative to the RECS survey year, and
 $SQFTADJ_{y, b, r}$ is the adjustment for increasing floor area of new houses.

Replacement equipment UEC values are calculated as:

$$\begin{aligned}
 EQCRUEC_{y, eg, b, r} &= EQCUEC_{r, eg, b} * WTEQCEFFR_{y, eg, b, r} * RTBASEFF_{2001, eg} * \\
 &\quad HDDFACT_{y, r}, \text{ if } WTEQCEFFR_{y, eg, b, r} > 0 \\
 EQCRUEC_{y, eg, b, r} &= EQCUEC_{r, eg, b} * HDDFACT_{y, r}, \text{ otherwise}
 \end{aligned}
 \tag{B-477}$$

where,

$EQCRUEC_{y, eg, b, r}$ is the unit energy consumption for replacement equipment by housing type and Census Division,
 $RTBASEFF_{2001, eg}$ is the efficiency of the weighted average of retiring units from the 2001 existing stock, and
 $WTEQCEFFR_{y, eg, b, r}$ is the replacement equipment efficiency weighted by the market share of the specific equipment as computed in the logistic function in the technology choice component by housing type and Census Division.

And the UEC for the surviving stock must be adjusted, according to:

$$EQCSUEC_{r, eg, b, r} = EQCUEC_{r, eg, b} * HDDFACT_{y, r} * \frac{RTBASEFF_{2001, eg}}{RTBASEFF_{y, eg}}
 \tag{B-48}$$

where,

$EQCSUEC_{y, eg, b, r}$ is the average unit energy consumption of the original 2001 equipment stock that remains after the replacements have taken place.

The average UEC for all equipment is calculated as:

$$\begin{aligned}
EQCAUEC_{y, eg, b, r} &= EQCNUEC_{y, eg, b, r} * HDDFACT_{y, r}, \text{ if } y = 2001 \\
EQCAUEC_{y, eg, b, r} &= EQCNUEC_{y, eg, b, r}, \text{ if the equipment stock } \leq 0 \\
&\quad (EQCREP_{y, eg, b, r} + EQCADD_{y, eg, b, r} + EQCRP90RP_{y, eg, b, r}) * EQCNUEC_{y, eg, b, r} \\
&\quad + (EQCSR90_{y, eg, b, r} + EQCSUR_{y, eg, b, r}) * EQCAUEC_{y-1, eg, b, r} \\
EQCAUEC_{y, eg, b, r} &= \frac{EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r}}{EQCREP_{y, eg, b, r} + EQCADD_{y, eg, b, r} + EQCRP90RP_{y, eg, b, r} + EQCSR90_{y, eg, b, r} + EQCSUR_{y, eg, b, r} + EQCRP90_{y, eg, b, r}}, \text{ otherwise}
\end{aligned} \tag{B-49}$$

where:

$EQCAUEC_{y, eg, b, r}$ is the average unit energy consumption for all post-2001 equipment categories.

The final step of this algorithm is to calculate consumption for the service category. This is accomplished in two steps. The first year of the forecast is computed initially as,

$$HTRCON_{y=2002, f, r} = \sum_b \sum_{eg} \left[\begin{aligned} &EQCESE_{y, eg, b, r} * ECQCUEC_{eg, b, r} * EHSHELL_{y, f, r} \\ &+ EQCADD_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} * NHSHELL_{y, f, r} \\ &+ EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r} * EHSHELL_{y, f, r} \end{aligned} \right] * RSELAST_{f, r, \alpha, EF1, EF2, EF3, 2001} \tag{B-490}$$

and subsequent consumption as,

$$HTRCON_{y, f, r} = \sum_b \sum_{eg} \left[\begin{aligned} &EQCESE_{y, eg, b, r} * ECQCUEC_{eg, b, r} * EHSHELL_{y, f, r} \\ &+ EQCADD_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} * NHSHELL_{y, f, r} * RBN_{y, eg, b, r} \\ &+ EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r} * EHSHELL_{y, f, r} * RBR_{y, eg, b, r} \\ &+ EQCRP90RP_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} * EHSHELL_{y, f, r} * RBN_{y, eg, b, r} \\ &+ EQCSR90_{y, eg, b, r} * EQCAUEC_{y, eg, b, r} * EHSHELL_{y, f, r} * RBA_{y, eg, b, r} \\ &+ EQCREP_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} * AHSHELL_{y, f, r} * RBN_{y, eg, b, r} \\ &+ EQCSUR_{y, eg, b, r} * EQCAUEC_{y, eg, b, r} * AHSHELL_{y, f, r} * RBA_{y, eg, b, r} \end{aligned} \right] * RSELAST_{f, r, \alpha, EF1, EF2, EF3, 2001} \tag{B-50}$$

where,

$HTRCON_{y, f, r}$ is heating energy consumption by year, fuel type, and region,

$RSELAST$ is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and α , the total short-term price elasticity, and

the rebound effect associated with increasing equipment efficiency for a particular equipment class causes a corresponding change in the price elasticity for the class are represented as:

$$RBN_{r,eg,b,r} = WTEQCEFFN_{y,eg,b,r} * RTBASEFF_{2001,eg}^{\alpha_1} \quad (B-51)$$

$$RBR_{r,eg,b,r} = WTEQCEFFR_{y,eg,b,r} * RTBASEFF_{2001,eg}^{\alpha_1} \quad (B-52)$$

$$RBA_{r,eg,b,r} = WTEQCEFFA_{y,eg,b,r} * RTBASEFF_{2001,eg}^{\alpha_1} \quad (B-53)$$

where,

$RBA_{y,eg,b,r}$ is the rebound effect factor for surviving equipment,

$RBR_{y,eg,b,r}$ is the rebound effect factor for replacement equipment, and

$RBN_{y,eg,b,r}$ is the rebound effect factor for new equipment.

α_1 is the rebound effect elasticity, presently valued at -0.15.

Consumption by furnace fans, FANCON, is computed in a similar fashion for those systems that require them.

Space Cooling

RCLTEC (Air Conditioning Equipment Choice Component)

Space cooling equipment choice begins with the calculation of a factor that adjusts for biased temperatures in either the base year or in the year under consideration, in each region,

where,

$$CDDFACT_r = \left(\frac{CDDADJ_{y,r}}{CDDADJ_{2001,r}} \right)^{1.1} \quad (B-545)$$

$CDDFACT_r$ is a set of regional factors to be used in this year to adjust for abnormal temperatures either in this year or in the base year, and

$CDDADJ_{y,r}$ are regional population-adjusted cooling degree-days by Census division and historical year, with forecast years from the RMISC file.

Operating costs for cooling equipment are calculated like those for heating equipment, with the exception of the degree-days factor:

$$OPCOST_{y,es,b,r,v} = PRICES_{f,r,y} * EQCUEC_{y,eg,b} * CDDFACT_{r,y} * RTEFFAC_{eg,v} * CSHELL_{y-1,r,v} \quad (B-55)$$

where,

$OPCOST_{y,es,b,r,v}$ is the operating cost for the air conditioner equipment type by housing type, Census Division, and vintage in the forecast year,

$PRICES_{f,r,y}$ are the fuel prices by region and forecast year, from elsewhere in the NEMS system,

$EQCUEC_{r,b}$ is the electricity unit energy consumption of 2001 room air conditioning equipment by Census Division and housing type, and

$RTEFFAC_{eg,v}$ is the efficiency adjustment for the generic equipment type.

$CSHELL_{y-1,r,v}$ is the shell efficiency adjustment to account for building shell improvements over time (which reduce cooling loads).

The following variables are computed as in the equations indicated:

$LFCY_{y,es,b,r,v}$ is the room air conditioner type's life cycle cost by year, housing type and Census Division. It is computed as in (B-18) above.

$EQWTN_{y,es,b,r}$ is the equipment weight for new equipment types by housing type, Census Division and year. It is computed as in (B-22) above.

$EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment types by housing type, Census Division and year. It is computed as in (B-23) above.

$TOTEWTN_{y,eg,b,r}$ is the sum of equipment types' weights for the new equipment class. It is computed as in (B-24) above.

$TOTEWTR_{y,eg,b,r}$ is the sum of equipment types' weights for the replacement equipment class. It is computed as in (B-25) above.

Market shares for equipment types within the cooling equipment classes distinguish also between heat pumps, whose numbers have been determined in the heating choice component, and other cooling equipment. For heat pumps,

$$\begin{aligned} NEQTSHR_{y,es,b,r} &= NEQTSHR_{y,RTTYPNTR_{es,b,r}} \\ REQTSHR_{y,es,b,r} &= REQTSHR_{y,RTTYPNTR_{es,b,r}} \end{aligned} \quad (B-56)$$

and for other cooling equipment,

$$NEQTSHR_{y,es,b,r} = \frac{EQWTN_{y,es,b,r}}{TOTEWTN_{y,eg,b,r}} \quad (B-57)$$

$$REQTSHR_{y,es,b,r} = \frac{EQWTR_{y,es,b,r}}{TOTEWTR_{y,eg,b,r}} \quad (B-59)$$

where,

- $NEQTSHR_{y,es,b,r}$ is the new market share for the new air conditioner equipment type by year, housing type and Census Division,
- $REQTSHR_{y,es,b,r}$ is the new market share for the replacement air conditioner equipment type by year, housing type and Census Division,
- $TOTEWTN_{y,eg,b,r}$ is the sum of equipment type weights for the new equipment class,
- $TOTEWTR_{y,eg,b,r}$ is the sum of equipment type weights for the replacement equipment class,
- $EQWTN_{y,es,b,r}$ is the equipment weight for new equipment, and
- $EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment.

Weighted average inverse efficiencies of the types of cooling equipment into their classes are calculated exactly as in the heating component:

- $WTEQCEFFN_{y,eg,b,r}$ is the weighted average inverse efficiency of new equipment types within each equipment class by year, housing type, and Census Division, computed as in (B-30).

$WTEQCEFFR_{y,eg,b,r}$ is the weighted average inverse efficiency of replacement equipment types within each equipment class by year, housing type, and Census Division, computed as in (B-31).

RCLADD (Additions and Replacements of Cooling Equipment Component)

Given the complex dependencies between choices of heating and cooling equipment, the cooling additions logic begins very differently from that for heating. Central air conditioner additions are calculated from housing additions and a set of saturation levels:

$$EQCADD_{y,t,CAC,b,r} = HSEADD_{y,b,r} * CACSAT_{b,r} \quad (B-58)$$

where,

$EQCADD_{y,t,CAC,b,r}$ is the number of central air conditioners added to new (post-2001) housing units by year, housing type and Census Division,

$HSEADD_{y,b,r}$ is the amount of housing additions by year, housing type and Census Division, and

$CACSAT_{b,r}$ is the market penetration level or saturation of the market for central air conditioning equipment by housing type and Census Division, from the RMISC file.

For room air conditioners, there are similar saturation levels:

$$EQCADD_{y,t,RAC,b,r} = HSEADD_{y,b,r} * RACSAT_{b,r} \quad (B-59)$$

where,

$EQCADD_{y,t,RAC,b,r}$ is the number of room air conditioners added to new (post-2001) housing units by year, housing type and Census Division,

$HSEADD_{y,b,r}$ is the amount of housing additions by year, housing type and Census Division, and

$RACSAT_{b,r}$ is the market penetration level or saturation of the market for room air conditioning equipment by housing type and Census Division.

For heat pumps, however, additions are determined by the number of associated furnaces installed in the heating additions component:

$$EQCADD_{y,t,HP,b,r} = EQCADD_{y,t,RTCLPNTR_{eg}b,r} \quad (B-62)$$

where,

- $EQCADD_{y,t,eg,b,r}$ is the number of heat pumps used for space cooling added to new (post-2001) housing units by year, housing type and Census Division,
- $EQCADD_{y,t,HP,b,r}$ is the number of heat pumps used for space heating added to new housing units by year, housing type and Census Division, and
- $RTCLPNTR_{eg}$ is the pointer to the heating equipment class associated with the cooling equipment class.

The number of central air conditioners calculated from the saturation level in equation (62) included electric heat pumps. To convert that to non-heat pump central air conditioners, the component subtracts off electric heat pumps, but leaving ten percent, if heat pumps exceed total central air conditioners:

$$\begin{aligned} EQCADD_{y,t,CAC,b,r} &= 0.1 * EQCADD_{y,t,HP,b,r} \quad , \quad \text{if } EQCADD_{y,e,CAC,b,r} \leq EQCADD_{y,e,eg,b,r} \\ EQCADD_{y,t,CAC,b,r} &= EQCADD_{y,t,CAC,b,r} - EQCADD_{y,e,HP,b,r} \quad , \quad \text{otherwise} \end{aligned} \quad (B-60)$$

where,

- $EQCADD_{y,t,eg,b,r}$ is the number of central air conditioners in each equipment class added to new (post-2001) housing units by year, housing type and Census Division,
- eg is the space cooling equipment class where the RTEKCL file defines that 1=Room air conditioner, 2=Central air conditioner, 3=Electric heat pump, 4=Geothermal heat pump, and 5=Natural gas heat pump.

Surviving equipment follows the same dichotomy as the other calculations, between heat pumps and other equipment. For non heat pumps, it is computed as in (B-41) above. For heat pumps, the stock is equated to that calculated in the space heating subroutines:

$$EQCSR90_{y,eg,b,r} = EQCSR90_{y,RTCLPNTR,b,r} \quad (B-61)$$

where,

$EQCSR90_{y,eg,b,r}$ is the surviving post-2001 cooling equipment in pre-2002 housing units by year, housing type and Census Division, equated to the stock calculated in the space heating subroutines.

For centrally air-conditioned single-family houses, there is a penetration rate that describes new units added in pre-2002 houses:

$$EQCND90_{y,eg,b,r} = EQCND90_{y,eg,b,r} * CACPR_r * HDR_b \quad (B-62)$$

where,

$EQCND90_{y,eg,b,r}$ is the number of air conditioning units needed in pre-2002 housing each year by housing type and Census Division,

HDR_b is the housing demolition rate by housing type.

$CACPR_r$ are regional penetration rates for central air conditioners from the RMISC file.

The replacement equipment types, EQCRP90, EQCRP90RP, and EQCREP are computed as in (B-36), (B-37), and (B-35) respectively. The surviving new additions, EQCSUR is computed as in (B-42) above.

Since replacements for heat pumps in the cooling end use equal replacements for heat pumps in the heating end use, and switching was allowed on replacement of heat pump furnaces, switching on replacement of heat pumps in the cooling end use occurred in RHTRADD. No switching on replacement of central or room air conditioners is allowed since these numbers are based on

historical data. Therefore, Subroutine RCLADD does not call Subroutine REPLACE.

RCLCON (Cooling Energy Consumption Component)

Energy consumption for space cooling is calculated much like the comparable quantities for space heating. Space cooling equipment consumption begins with the calculation of a factor that adjusts for biased temperatures in either the base year or in the year under consideration, in each region, as computed in (B-56) above.

Unit energy consumption is calculated for each of the vintages of homes. For surviving equipment in pre-2002 vintage homes,

$$EQCSUEC_{r,eg,b,r} = EQCUEC_{r,eg,b} * CDDFACT_{y,r} * \frac{RTBASEFF_{2001,eg}}{RTBASEFF_{y,eg}} \quad (B-63)$$

where,

- $EQCSUEC_{y,eg,b,r}$ is the unit energy efficiency of surviving equipment in pre-2002 vintage homes, by year, equipment class, housing type and Census Division,
- $EQCUEC_{r,eg,b}$ is the unit energy efficiency of equipment in homes that existed in 2001, by Census Division, equipment class, and housing type,
- $CDDFACT_r$ are the regional heating degree-day adjustment factors, and
- $RTBASEFF_{y,eg}$ are the annual average efficiencies for the equipment classes.

For new equipment:

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFN_{y,eg,b,r} * RTBASEFF_{2001,eg} * CDDFACT_{y,r} * SQFTADJ_{y,b,r}, \text{ if } WTEQCEFFN_{y,eg,b,r} > 0 \quad (B-64)$$

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * CDDFACT_{y,r} * SQFTADJ_{y,b,r}, \text{ otherwise}$$

where,

- $EQCNUEC_{y,eg,b,r}$ is the unit energy consumption by year for new equipment by housing type and Census Division,
- $WTEQCEFFN_{y,eg,b,r}$ is the equipment inverse efficiency by year, equipment class, housing type and Census Division,

$RTBASEFF_{y,eg}$ is the average efficiency of the equipment class,
 $EQCUEC_{r,eg,b}$ is unit energy consumption for equipment in 2001 housing by Census Division, equipment class and housing type,
 $CDDFACT_r$ is the heating degree day adjustment factor by Census Division to correct for the unusually warm weather during the RECS survey year, and
 $SQFTADJ_{y,b,r}$ adjusts for the increasing average floor area of new homes, as compared with the RECS base year.

Replacement equipment UEC values are calculated in the same way as new equipment, but without the floor area adjustment:

$$\begin{aligned}
 EQCRUEC_{y,eg,b,r} &= EQCUEC_{r,eg,b} * WTEQCEFFR_{y,eg,b,r} * RTBASEFF_{2001,eg} * \\
 &\quad CDDFACT_{y,r}, \text{ if } WTEQCEFFN_{y,eg,b,r} > 0 \\
 EQCRUEC_{y,eg,b,r} &= EQCUEC_{r,eg,b} * CDDFACT_{y,r}, \text{ otherwise}
 \end{aligned}
 \tag{B-65}$$

where,

$EQCRUEC_{y,eg,b,r}$ is the unit energy consumption for replacement equipment by housing type and Census Division,
 $RTBASEFF_{2001,eg}$ is the efficiency of the weighted average of retiring units from the 2001 existing stock, and
 $WTEQCEFFR_{y,eg,b,r}$ is the replacement equipment inverse efficiency weighted by the market share of the equipment type as computed in the log-linear function in the technology choice component by housing type and Census Division.

The average UEC, EQCAUEC, for all cooling equipment is calculated as in (B-50) above.

Cooling shell efficiency is calculated similarly to heating shell efficiency computed in equations (B-43) through (B-46), substituting the EPACT cooling effects for the heating effects.

The final step of this component is to calculate consumption for the service category. This is accomplished in two steps. The first year of the forecast is computed as,

$$COOLCN_{y=2002,f,r} = \sum_b \sum_{eg} \left[\begin{aligned} &EQCESE_{y,eg,b,r} * ECQCUEC_{eg,b,r} * ECSHELL_{y,r} \\ &+ EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} * NCSHELL_{y,r} \\ &+ EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} * ECSHELL_{y,r} \end{aligned} \right] * RSELAST_{f,r,\alpha,EF1,EF2,EF3,2001} \quad (B-69)$$

and subsequent consumption as,

$$COOLCN_{y,f,r} = \sum_b \sum_{eg} \left[\begin{aligned} &EQCESE_{y,eg,b,r} * ECQCUEC_{eg,b,r} * ECSHELL_{y,r} \\ &+ EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} * NCSHELL_{y,r} * RBN_{y,eg,b,r} \\ &+ EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} * ECSHELL_{y,r} * RBR_{y,eg,b,r} \\ &+ EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} * ECSHELL_{y,r} * RBN_{y,eg,b,r} \\ &+ EQCSR90_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} * ECSHELL_{y,r} * RBA_{y,eg,b,r} \\ &+ EQCREP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} * ACSHELL_{y,r} * RBN_{y,eg,b,r} \\ &+ EQCSUR_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} * ACSHELL_{y,r} * RBA_{y,eg,b,r} \end{aligned} \right] * RSELAST_{f,r,\alpha,EF1,EF2,EF3,2001} \quad (B-660)$$

where,

RSELAST is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and , the total short-term price elasticity.

The “rebound effect” that was introduced in the space heating section is also represented in the space cooling consumption equation. The “rebound effect” is represented in equations (B-53) through (B-55).

Clothes Washers

RCWTEC (Clothes Washer Technology Choice Component)

Compute current year operating costs,

$$OPCOST_{y,es,b,r,v} = PRICES_{f,r,y} * EQCUEC_{y,eg,b} * \frac{RTBASEFF_{2001,eg}}{RTEQCEFF_{es}} \quad (B-67)$$

where,

OPCOST_{y,es,b,r,v} is the operating cost for the equipment type by year, housing type, Census

Division, and vintage,
 $PRICES_{f,r,y}$ is the fuel prices for the equipment from NEMS, by fuel, by region and forecast year,
 $EQCUEC_{r,eg,b}$ is the unit energy consumption by Census Division, equipment class and housing type,
 $RTEQEFF_{es}$ is the equipment efficiency,
 $RTBASEFF_{2001,eg}$ is the 2001 stock-average efficiency.

The following variables are computed as in the equations indicated:

$LFCY_{y,es,b,r,v}$ is the clothes washer's life cycle cost by year, housing type Census Division, and vintage. It is computed as in (B-18) above.
 $EQWTN_{y,es,b,r}$ is the equipment weight for new equipment type by housing type, Census Division, and year. It is computed as in (B-22) above.
 $EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment by housing type, Census Division, and year. It is computed as in (B-23) above.
 $TOTEWTN_{y,eg,b,r}$ is the sum of equipment weights for the new equipment class. It is computed as in (B-24) above.
 $TOTEWTR_{y,eg,b,r}$ is the sum of equipment weights for the replacement equipment class. It is computed as in (B-25) above.

Market shares for new and replacement clothes washers are next:

$$NEQTSHR_{y,es,b,r} = \frac{EQWT_{y,es,b,r}}{TOTEWT_{y,eg,b,r}} \quad (B-682)$$

where,

$NEQTSHR_{y,es,b,r}$ is the new market share of clothes washer equipment types by housing type and Census Division in the current year,
 $TOTEWT_{eg}$ is the sum of equipment weights for the new equipment class,
 $EQWT_{es}$ is the equipment weight for new equipment, and

Since efficiency improvements in clothes washers tend to affect the amount of hot water used in a

household, establishing a link between clothes washers and water heaters is essential. The impact of the load reduction with respect to installing more efficient clothes washers is calculated as follows:

$$TEMP = \sum_{es} EQWT_{y,es,b,r}$$

$$NCWLOAD_{y,eg,b,r} = \frac{\sum_{es} (EQWT_{y,es,b,r} * LOADADJ_{es})}{TEMP}, \text{ if } TEMP > 0 \quad (B-69)$$

$$NCWLOAD_{y,eg,b,r} = NCWLOAD_{y-1,eg,b,r}, \text{ otherwise}$$

where,

$NCWLOAD_{y,eg,b,r}$ is the weighted average load adjustment of new clothes washers with respect to water heating load in the current year by housing type and Census Division,

$EQWT_{y,es,b,r}$ is the equipment weight for each type of new equipment, and

$LOADADJ_{es}$ is the fraction of hot water needed to provide the same level of service, relative to the base year average.

RCWADD (Clothes Washer Additions Component)

New clothes washing equipment is calculated using a saturation level for newly-bought equipment

$$EQCADD_{y,t,eg,b,r} = HSEADD_{y,b,r} * \frac{WASHNEW_{b,r}}{100} \quad (B-70)$$

where,

$EQCADD_{y,t,eg,b,r}$ is the amount of new (post-2001 vintage) equipment added in new housing units in the current year by housing type and Census Division, vintaged to year t ,

$HSEADD_{y,b,r}$ is the number of new housing additions in the year by housing type and Census Division, and

$WASHNEW_{b,r}$ is the share of clothes washers in newly constructed houses by housing type

and Census Division in the current year.

The next step is to calculate the numbers of clothes washers of each vintage category. The following variables were computed as in the equations indicated:

$EQCSR90_{y,eg,b,r}$ is the surviving post-2001 vintage equipment in pre-2002 housing units in the current year by housing type and Census Division. It is computed as in (B-41) above.

$EQCSUR_{y,eg,b,r}$ is the surviving new (post-2001 vintage) equipment in the current year by housing type and Census Division. It is computed as in (B-42) above.

$EQCREP_{y,t,eg,b,r}$ is the number of replacement units (post-2001 vintage) equipment demanded in post-2001 vintage housing units by housing type and Census Division. It is computed as in (B-35) above.

$EQCRP90_{y,t,eg,b,r}$ is the number of replacement units demanded in pre-2002 housing units each year by housing type and Census Division. It is computed as in (B-36) above.

$EQCRP90RP_{y,t,eg,b,r}$ is the number of replacement units for the EQCRP90 units demanded each year by housing type and Census Division. It is computed as in (B-37) above.

RCWCON (Clothes Washer Energy Consumption Component)

To calculate the energy consumption attributable to clothes washers, first calculate the unit energy consumption for each vintage of home. These are calculated similarly as those presented in equations (B-47) through (B-50). Namely,

$EQCSUEC_{y,eg,b,r}$ is the UEC for surviving 2001 equipment in each equipment class, by housing type and Census Division,

$EQCNUEC_{y,eg,b,r}$ is the unit energy consumption by year for new equipment by housing type and Census Division,

$EQCRUEC_{y,eg,b,r}$ is the unit energy consumption by year for replacement equipment by housing type and Census Division, and

$EQCAUEC_{y,eg,b,r}$ is the average unit energy consumption for all equipment by housing type and Census Division.

Finally, the energy consumption calculation is simpler than most of the other end uses:

$$CSWCON_{y=2002,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \end{array} \right), \text{ if } y = 2002 \quad (\text{B-715})$$

$$CSWCON_{y,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSR90_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \\ + EQCREP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSUR_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \end{array} \right), \text{ if } y > 2002 \quad (\text{B-72})$$

Dishwashers

RDWTEC (Dishwasher Technology Choice Component)

The following variables are computed as in the equations indicated:

- $OPCOST_{y,es,b,r,v}$ is the operating cost for the equipment type by year, housing type, Census Division, and vintage. It is computed as in (B-72) above.
- $LFCY_{y,es,b,r,v}$ is the dishwasher's life cycle cost by year, housing type Census Division, and vintage. It is computed as in (B-18) above.
- $EQWTN_{y,es,b,r}$ is the equipment weight for new equipment type by housing type, Census Division, and year. It is computed as in (B-22) above.
- $EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment by housing type, Census Division, and year. It is computed as in (B-23) above.

$TOTEWTN_{y,eg,b,r}$ is the sum of equipment weights for the new equipment class. It is computed as in (B-24) above.

$TOTEWTR_{y,eg,b,r}$ is the sum of equipment weights for the replacement equipment class. It is computed as in (B-25) above.

Market shares for new and replacement dishwashers are next:

where,

$$NEQTSHR_{y,es,b,r} = \frac{EQTWT_{y,es,b,r}}{TOTEWT_{y,eg,b,r}} \quad (B-737)$$

$NEQTSHR_{y,es,b,r}$ is the new market share of dishwasher equipment types by housing type and Census Division in the current year,

$TOTEWT_{eg}$ is the sum of equipment weights for the new equipment class, and

$EQWT_{es}$ is the equipment weight for new equipment.

RDWADD (Dishwasher Additions Component)

New dishwashing equipment is calculated using a saturation level for newly-bought equipment

$$EQCADD_{y,t,eg,b,r} = HSEADD_{y,b,r} * \frac{DISHNEW_{b,r}}{100} \quad (B-748)$$

where,

$EQCADD_{y,t,eg,b,r}$ is the amount of new (post-2001 vintage) equipment added in new housing units in the current year by housing type and Census Division, vintaged to year t ,

$HSEADD_{y,b,r}$ is the number of new housing additions in the year by housing type and Census Division, and

$DISHNEW_{b,r}$ is the share of dishwashers in newly constructed houses by housing type and Census Division in the current year.

The next step is to calculate the numbers of dishwashers of each vintage category. The following

variables were computed as in the equations indicated:

$EQCSR90_{y,eg,b,r}$ is the surviving post-2001 vintage equipment in pre-2002 housing units in the current year by housing type and Census Division. It is computed as in (B-41) above.

$EQCSUR_{y,eg,b,r}$ is the surviving new (post-2001 vintage) equipment in the current year by housing type and Census Division. It is computed as in (B-42) above.

$EQCREP_{y,t,eg,b,r}$ is the number of replacement units (post-2001 vintage) equipment demanded in post-2001 vintage housing units by housing type and Census Division. It is computed as in (B-35) above.

$EQCRP90_{y,t,eg,b,r}$ is the number of replacement units demanded in pre-2002 housing units each year by housing type and Census Division. It is computed as in (B-36) above.

$EQCRP90RP_{y,t,eg,b,r}$ is the number of replacement units for the EQCRP90 units demanded each year by housing type and Census Division. It is computed as in (B-37) above.

RDWCON (Dishwasher Energy Consumption Component)

To calculate the energy consumption attributable to dishwashers, first calculate the unit energy consumption for each vintage of home. These are calculated similarly as those presented in equations (B-47) through (B-50). Namely,

$EQCSUEC_{y,eg,b,r}$ is the UEC for surviving 2001 equipment in each equipment class, by housing type and Census Division,

$EQCNUEC_{y,eg,b,r}$ is the unit energy consumption by year for new equipment by housing type and Census Division,

$EQCRUEC_{y,eg,b,r}$ is the unit energy consumption by year for replacement equipment by housing type and Census Division, and

$EQCAUEC_{y,eg,b,r}$ is the average unit energy consumption for all equipment by housing type and Census Division.

Finally, the energy consumption calculation is simpler than most of the other end uses:

$$DSWCON_{y=2002,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \end{array} \right), \text{ if } y = 2002 \quad (\text{B-79})$$

$$DSWCON_{y,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSR90_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \\ + EQCREP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSUR_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \end{array} \right), \text{ if } y > 2002 \quad (\text{B-750})$$

Water Heating

RWHTEC (Water Heater Equipment Choice Component)

New water heaters are assumed to be distributed in proportion to associated space heating equipment, where the association between water heating equipment and space heating equipment is specified by the user in the $RTCLPNTR_{eg}$ pointer for each water heating equipment class in the RTEKCL file. (Replacement water heaters are not so constrained in single-family housing.) The component first adds up the market shares of all space heating equipment,

$$TOTN_{b,r} = \sum_{eg} HSYSSHR_{y,eg,b,r} \quad (\text{B-761})$$

where,

$TOTN_{b,r}$ is the sum of the base year market shares for space heating equipment classes by housing type and Census Division, and

$HSYSSHR_{y,eg,b,r}$ is the current year market share for space heating equipment classes by housing type and Census Division.

New water heater market shares are therefore calculated by the sum of the market shares of the associated heating equipment,

$$NH2OSH_{y,eg,wh,b,r} = \frac{\sum_{eg} HSYSSHR_{y,RTCLEQCL_{SH}=RTCLPNTR_{WH,b,r}}}{TOTN_{b,r}} \quad (B-77)$$

where,

$NH2OSH_{y,eg,b,r}$ is the market share of each new water heater class by housing type and Census Division. There are four equipment classes for water heaters: natural gas, electric, distillate, and LPG.

$TOTN_{b,r}$ is the sum of the base year market shares for space heating equipment classes by housing type and Census Division,

$HSYSSHR_{y,eg,b,r}$ is the current year market share of the space heating equipment class by housing type and Census Division,

$RTCLEQCL_{SH}$ is the equipment class number for the space heater class, and

$RTCLPNTR_{WH}$ is the pointer to a space heater class from a water heater class.

The following variables are computed as in the equations indicated:

$OPCOST_{y,es,b,r,v}$ is the operating cost for the water heater equipment type by housing type, Census Division, vintage, and year. It is computed as in (B-72) above.

$LFCY_{y,es,b,r,v}$ is the water heater type's life cycle cost by year, housing type Census Division, and vintage. It is computed as in (B-18) above.

$EQWTN_{y,es,b,r}$ is the equipment weight for new equipment types by housing type, Census Division, and year. It is computed as in (B-22) above.

$EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment types by housing type, Census Division, and year. It is computed as in (B-23) above.

$TOTEWTN_{y,eg,b,r}$ is the sum of the equipment types' weights for the new equipment class. It is

computed as in (B-24) above.

$TOTEWTR_{y,eg,b,r}$ is the sum of the equipment types' weights for the replacement equipment class. It is computed as in (B-25) above.

$EQFSHRN_{y,f,b,r}$ is the fuel share of new equipment type by year, housing type and Census Division. It is computed as in (B-26) above.

$EQFSHRR_{y,f,b,r}$ is the fuel share of replacement equipment type by year, housing type and Census Division. It is computed as in (B-27) above.

The fuel shares are stored into their final places:

$$NEQTSHR_{y,f,b,r} = EQFSHRN_{y,es,b,r} \quad (\text{B-783})$$

$$REQTSHR_{y,f,b,r} = EQFSHRR_{y,es,b,r} \quad (\text{B-79})$$

where,

$NEQTSHR_{y,f,b,r}$ is the fuel shares of new water heaters by fuel, housing type and Census Division, and

$REQTSHR_{y,f,b,r}$ is the fuel shares of replacement water heaters by fuel, housing type and Census Division.

Weighted average class efficiencies by fuel can then be calculated from the individual equipment types for new and replacement equipment, using exactly the same formulas as for space heating equipment, as shown in equations (B-30) and (B-31):

$WTEQCEFFN_{y,eg,b,r}$ is the weighted average inverse efficiency for new water heating equipment classes by year, housing type and Census Division, and

$WTEQCEFFR_{y,eg,b,r}$ is the weighted average inverse efficiency for replacement water heating equipment classes by year, housing type and Census Division.

REUADD (Water Heating and Cooking Additions and Replacements Component)

There is only one component in the RDM for addition and replacement of water heating equipment and cooking equipment.

The first operation is to calculate the total equipment in pre-2002 housing,

$$\begin{aligned} EQCND90_{y,eg,b,r} &= EQCESE_{2001,eg,b,r} * HDR_b, \text{ if } y = 2002 \\ EQCND90_{y,eg,b,r} &= EQCESE_{y-1,eg,b,r} * HDR_b, \text{ if } y > 2002 \end{aligned} \quad (\text{B-805})$$

where,

$EQCND90_{y,eg,b,r}$ is the total equipment in pre-2002 housing each year by housing type and Census Division,

$EQCESE_{2001,eg,b,r}$ is the pre-2002 equipment stock in pre-2002 housing units in the base year by housing type and Census Division, and

HDR_b is the housing demolition rate by housing type.

Next, calculate purchases for new housing,

$$EQCND90_{y,eg,b,r} = HSEADD_{y,b,r} * SHARE \quad (\text{B-81})$$

where,

$EQCADD_{y,t,eg,b,r}$ is the number new units originally purchased for new housing additions by year, housing type and Census Division,

$HSEADD_{y,b,r}$ is the number of housing additions by year, housing type and Census Division, and

$SHARE$ is the share of the particular equipment for which the component has been called, $NH2OSH_{y,eg,b,r}$ or $NCKSH_{y,eg,b,r}$;

$NH2OSH_{y,eg,b,r}$ is the market penetration level or saturation of the market for water heaters by housing type and Census Division,

$NCKSH_{y,eg,b,r}$ is the market penetration level or saturation of the market for cookstoves by housing type and Census Division.

The following variables are computed as in the equations indicated:

$EQCSR90_{y,eg,b,r}$ is the surviving post-2001 vintage equipment in pre-2002 housing units by year, housing type and Census Division. It is calculated as in (B-41) above.

- $EQCSUR_{y,eg,b,r}$ is the surviving post-2001 vintage equipment in post-2001 housing by year, housing type and Census Division. It is computed as in (B-42) above.
- $EQCREP_{y,t,eg,b,r}$ is the number of equipment replacements of post-2001 equipment in post-2001 housing units by year, housing type and Census Division. It is computed as in (B-35) above.
- $EQCRP90_{y,t,eg,b,r}$ is the number of replacement units demanded in pre-2002 housing units by year, housing type and Census Division. It is computed as in (B-36) above.
- $EQCRP90RP_{y,t,eg,b,r}$ is the number of replacement units for the EQCRP90 units demanded each year by housing type and Census Division. It is computed as in (B-37) above.

RWHCON (Water Heater Energy Consumption Component)

Energy consumption for water heating is calculated much like the comparable quantities for space heating. Some of the most important determinants of the amount of hot water consumption in households are the number of inhabitants and the usage and efficiency of clothes washers. The component therefore calculates an average household size that will be used with an elasticity to account for this determinant,

$$HHSIZE_{y,r} = \frac{MC_NP16A_{r,y}}{\sum_b (EH_{y,b,r} + NH_{y,b,r})} \quad (\text{B-827})$$

where,

- $HHSIZE_{y,r}$ is the average number of persons over age 16 per household by year and region,
- $MC_NP16A_{r,y}$ is the number of persons over age 16 by year and region, from the NEMS Macroeconomic Module,
- $EH_{y,b,r}$ is the number of pre-2002 vintage homes existing in year y, from the RMISC.TXT file, and
- $NH_{y,b,r}$ is the number of post-2001 vintage homes remaining in year y, from the NEMS Macroeconomic Module, as shown in equation (B-3).

Unit energy consumption is calculated for the usual vintages. First, the surviving base-year homes,

$$EQCSUEC_{r,eg,b,r} = EQCUEC_{r,eg,b} * \left(\frac{HHSIZE_{y,r}}{HHSIZE_{2001,r}} \right)^{HSELAS} * \frac{RTBASEFF_{2001,eg}}{RTBASEFF_{y,eg}} \quad (B-838)$$

where,

- $EQCSUEC_{y,eg,b,r}$ is the unit energy efficiency of surviving water heating equipment in pre-2002 vintage homes, by year, equipment class, housing type and Census Division,
- $EQCUEC_{r,eg,b}$ is the unit energy efficiency of equipment in homes that existed in 2001, by Census Division, equipment class, and housing type,
- $HHSIZE_{y,r}$ is the average household size by year and Census Division,
- $HSELAS$ is an elasticity parameter for the increase in hot water intensity due to increases in household size, estimated at .315, and
- $RTBASEFF_{y,eg}$ are the annual average efficiencies for the equipment classes.

For new purchases in year 2002,

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFN_{y,eg,b,r} * RTBASEFF_{2001,eg} * \left(\frac{HHSIZE_{y,r}}{HHSIZE_{2001,r}} \right)^{HSELAS}, \text{ if } WTEQCEFFN_{y,eg,b,r} > 0 \quad (B-884)$$

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * \left(\frac{HHSIZE_{y,r}}{HHSIZE_{2001,r}} \right)^{HSELAS}, \text{ otherwise}$$

For purchases after 2002,

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFN_{y,eg,b,r} * RTBASEFF_{2001,eg} * EPACT * HDDFACT_{y,r} * \left(\frac{HHSIZE_{y,r}}{HHSIZE_{2001,r}} \right)^{HSELAS}, \text{ if } WTEQCEFFN_{y,eg,b,r} > 0 \quad (B-850)$$

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * HDDFACT_{y,r} * \left(\frac{HHSIZE_{y,r}}{HHSIZE_{2001,r}} \right)^{HSELAS} * EPACT, \text{ otherwise}$$

where,

- $EQCNUEC_{y,eg,b,r}$ is the unit energy consumption for new equipment by year, housing type and Census Division,
- $EQCUEC_{r,eg,b}$ is the unit energy consumption for the equipment class by housing type

and Census Division,
*WTEQCEFFN*_{y,eg,b,r} is the weighted average inverse efficiency for new water heating equipment types by year, class, housing type and Census Division,
EPACT is the fraction by which the UEC must be adjusted to reflect mandated low-flow shower head standards as part of the Energy Policy Act of 1993,
*HHSIZE*_{y,r} is the average household size by year and Census Division,
HHSELAS is an elasticity parameter for the increase in hot water intensity due to increases in household size, estimated at .315, and
*RTBASEFF*_{y,eg} is the efficiency of the water heating equipment classes.

For replacements in all years,

$$EQCRUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFR_{y,eg,b,r} * RTBASEFF_{2001,eg} * EPACT * \left(\frac{HHSIZE_{y,r}}{HHSIZE_{2001,r}} \right)^{HHSELAS}, \text{ if } WTEQCEFFN_{y,eg,b,r} > 0 \quad (\text{B-861})$$

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * \left(\frac{HHSIZE_{y,r}}{HHSIZE_{2001,r}} \right)^{HHSELAS} * EPACT, \text{ otherwise}$$

where,

*EQCRUEC*_{y,eg,b,r} is the unit energy consumption for replacement equipment by year, housing type and Census Division,
*WTEQCEFFR*_{y,eg,b,r} is the weighted average inverse efficiency for replacement water heating equipment classes by year, housing type and Census Division, and
*EQCUEC*_{r,eg,b} is the unit energy consumption for the equipment class by housing type and Census Division, and
*RTBASEFF*_{y,eg} is the efficiency of retiring equipment from the 2001 stock by year.

The average UEC for all equipment is calculated as:

$$EQCAUEC_{y,eg,b,r} = EQCNUEC_{y,eg,b,r}, \text{ if } y = 2001$$

$$EQCAUEC_{y,eg,b,r} = EQCNUEC_{y,eg,b,r}, \text{ if the equipment stock } \leq 0$$

$$EQCAUEC_{y,eg,b,r} = \frac{(EQCREP_{y,eg,b,r} + EQCADD_{y,eg,b,r} + EQCRP90RP_{y,eg,b,r}) * EQCNUEC_{y,eg,b,r} + (EQCSR90_{y,eg,b,r} + EQCSUR_{y,eg,b,r}) * EQCAUEC_{y-1,eg,b,r} + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r}}{EQCREP_{y,eg,b,r} + EQCADD_{y,eg,b,r} + EQCRP90RP_{y,eg,b,r} + EQCSR90_{y,eg,b,r} + EQCSUR_{y,eg,b,r} + EQCRP90_{y,eg,b,r}}, \text{ otherwise} \quad (\text{B-872})$$

where,

$EQCAUEC_{y,eg,b,r}$ is the average unit energy consumption for all post-2001 equipment.

Water heater efficiency is calculated next. If $y = 2002$ or denominator $= 0$,

$$WTEQCEFFA_{r,eg,b,r} = WTEQCEFFN_{r=2002,eg,b} \quad (\text{B-883})$$

If $y > 2002$ and denominator > 0 ,

$$WTEQCEFFA_{y,eg,b,r} = \frac{(EQCREP_{y,eg,b,r} + EQCADD_{y,eg,b,r} + EQCRP90RP_{y,eg,b,r}) * WTEQCEFFN_{y,eg,b,r} + (EQCSR90_{y,eg,b,r} + EQCSUR_{y,eg,b,r}) * WTEQCEFFA_{y-1,eg,b,r} + EQCRP90_{y,eg,b,r} * WTEQCEFFR_{y,eg,b,r}}{EQCREP_{y,eg,b,r} + EQCADD_{y,eg,b,r} + EQCRP90RP_{y,eg,b,r} + EQCSR90_{y,eg,b,r} + EQCSUR_{y,eg,b,r} + EQCRP90_{y,eg,b,r}}, \text{ otherwise} \quad (\text{B-894})$$

where,

$WTEQCEFFA_{y,eg,b,r}$ is the weighted average water heater efficiency by equipment class, housing type, Census Division, and year.

To account for changes in hot water demand over time, both the number and efficiency (with respect to hot water use) of clothes washers is very important. To resolve this issue, the water heating consumption subroutine relies on calculations that are generated in the clothes washer subroutine. First, the number of clothes washers must be shared to each of the competing fuel types for all vintages of equipment. Namely,

$$H2OSHRCW_{r,f,b,r,v} = H2OSHR_{y,f,b,r,v} * NUMCW_{r,b,r,v} \quad (\text{B-90})$$

where,

$H2OSHRCW_{y,f,b,r,v}$ is the number of clothes washers for each type of water heating fuel type by Census Division and building type for all vintages of equipment,

$H2OSHR_{y,f,b,r,v}$ is the share for each type of water heating fuel type by Census Division and building type for all vintages of equipment,

$NUMCW_{y,b,r,v}$ is the number of clothes washers by Census Division and building type for all vintages of equipment, and

Next, the consumption for water heating for homes with clothes washers is computed as follows:

$$H2OCONCW_{r,f,b,r,v} = H2OSHRCW_{y,f,b,r,v} * H2OUEC_{y,f,b,r,v} * LDADJWCW_{r,b,r} \quad (B-91)$$

where,

$H2OCONCW_{y,f,b,r,v}$ is the water heating consumption for homes with clothes washers for each type of water heating fuel type by Census Division and building type for all vintages of equipment,

$H2OUEC_{y,f,b,r,v}$ is the unit energy consumption for each type of water heating fuel type by Census Division and building type for all vintages of equipment, and

$LDADJWCW_{y,b,r}$ is the adjustment to the water heating UEC to account for the efficiency of clothes washers with respect to hot water load by Census Division and building type for all vintages of equipment.

Finally, energy consumption by fuel can be summed over the different housing types. If $y = 2002$,

$$H2OCON_{y=2002,f,r} = \sum_b \left(\left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCSUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \end{array} \right) + H2OCONCW_{y,f,b,r,v} \right) * RSELAST_{f,r,\alpha,EF1,EF2,EF3,2001} \quad \text{if } y = 2002 \quad (B-927)$$

If $y > 2002$,

$$H2OCON_{y,r} = \sum_b \left(\left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCSUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSR90_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \\ + EQCREP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSUR_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \end{array} \right) + H2OCONCW_{y,f,b,r,v} \right) * RSELAST_{f,r,\alpha,EF1,EF2,EF3,2003} \quad \text{if } y > 2002 \quad (B-938)$$

where,

$H2OCON_{y,f,r}$ is consumption for water heating by fuel, and
 $RSELAST$ is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and ϵ , the total short-term price elasticity.

Cooking Equipment

RSTVTEC (Choose Cooking Equipment Component)

The existing cooking equipment distribution is associated with the choice of water heaters. Homes that heat water with natural gas are allowed to have either gas or electric stoves; homes that heat with LPG cook with LPG; homes that heat water with distillate oil cook with electricity. (Replacement stoves in single-family homes are not so constrained.) These constraints are embodied in the technology choice by using the water heater equipment market shares for calculating the cooking equipment market shares:

$$\begin{aligned}
 NCKSHR_{y,eg,b,r} &= NH2OSH_{y,eg,b,r} * NGNGFACT, \text{ if } eg = \text{gas stove} \\
 NCKSHR_{y,eg,b,r} &= NH2OSHR_{y,eg,b,r}, \text{ if } eg = \text{LPG stove} \\
 NCKSHR_{y,eg,b,r} &= \sum (NH2OSH_{y,eg,b,r}) + NH2OSH_{y,ng,b,r} * (1 - NGNGFACT), \text{ if } eg = \text{electric stove}
 \end{aligned}
 \tag{B-99}$$

where,

$NCKSH_{y,eg,b,r}$ is the new market share for cooking equipment in the current year by housing type and Census Division,
 $NH2OSH_{y,eg,b,r}$ is the new market share for water heaters in the current year by equipment class, housing type and Census Division, and
 $NGNGFACT$ is a factor that defines the fraction of new homes having gas water heaters that have gas cookstoves.

In the formula, the summation over $eg = other$ refers to the market shares of all water heater classes other than natural gas and LPG: homes that heat water with any other equipment class than these, depending on which are defined in the RTEKCL.TXT file, are assumed to cook with electricity.

The following variables are computed as in the equations indicated:

- $OPCOST_{y,es,b,r,v}$ is the operating cost for the cooking equipment type by housing type, Census Division, vintage, and year. It is computed as in (B-72) above.
- $LFCY_{y,es,b,r,v}$ is the cooking equipment's life cycle cost by year, housing type Census Division, and vintage. It is computed as in (B-18) above.
- $EQWTN_{y,es,b,r}$ is the equipment weight for new equipment types by housing type, Census Division, and year. It is computed as in (B-22) above.
- $EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment types by housing type, Census Division, and year. It is computed as in (B-23) above.
- $TOTEWTN_{y,eg,b,r}$ is the sum of the equipment types' weights for the new equipment class. It is computed as in (B-24) above.
- $TOTEWTR_{y,eg,b,r}$ is the sum of the equipment types' weights for the replacement equipment class. It is computed as in (B-25) above.
- $EQFSHRN_{y,f,b,r}$ is the fuel share of new equipment type by year, housing type and Census Division. It is computed as in (B-26) above.
- $EQFSHRR_{y,f,b,r}$ is the fuel share of replacement equipment type by year, housing type and Census Division. It is computed as in (B-27) above.

The final shares for the equipment types are the products of the market shares and the equipment type shares,

$$\begin{aligned} NEQTSHRD_{y,eg,b,r} &= NCKSH_{y,eg,b,r} * EQFSHRN_{y,es,b,r} \\ REQTSHRD_{y,eg,b,r} &= NCKSH_{y,eg,b,r} * EQFSHRR_{y,es,b,r} \end{aligned} \quad (B-940)$$

where,

- $NEQTSHRD_{y,es,b,r}$ is the new equipment type share for stoves by equipment type, housing type and Census Division,
- $REQTSHRD_{y,es,b,r}$ is the replacement equipment type share for stoves by equipment type, housing type and Census Division,
- $NCKSH_{y,eg,b,r}$ is the new market share for cooking equipment in the current year by housing type and Census Division,
- $EQFSHRN_{y,es,b,r}$ is the new market share for stoves by equipment type, housing type and Census Division, and

$EQFSHRR_{y,es,b,r}$ is the replacement market share for stoves by equipment type, housing type and Census Division.

For cooking, the weighted average inverse efficiency of each equipment class is calculated differently from the foregoing end uses, because the RTEKTY file datum for $RTBASEFF_{es}$ is the usage, measured in kWh or MMBtu, of the equipment in the class:

$$WTEQCEFFA_{y,eg,b,r} = \frac{\sum_{es} (NEQTSHR_{y,es,b,r} * RTEQEFF_{es})}{\sum_{es} NEQTSHR_{y,es,b,r}}, \text{ if denominator} > 0 \quad (B-95)$$

$$WTEQCEFFA_{y,eg,b,r} = RTBASEFF_{2001,eg}$$

where,

$WTEQCEFFA_{y,eg,b,r}$ is the weighted average cooking equipment usage in the current year by housing type and Census Division, and
 $RTBASEFF_{2001,eg}$ is the 2001 base equipment efficiency.

REUADD (Water Heating and Cooking Additions and Replacements Component)

As mentioned earlier, the capabilities for adding and replacing cooking equipment have been merged into a single component called *REUADD*. This component was documented above on pages B-49 through B-51.

RSTVCON (Cooking Energy Consumption Component)

The unit energy consumption for the surviving equipment is calculated by,

$$EQCSUEC_{r,eg,b,r} = EQCUEC_{r,eg,b} * \frac{RTBASEFF_{2001,eg}}{RTBASEFF_{y,eg}} \quad (B-96)$$

where,

$EQCSUEC_{y,eg,b,r}$ is the unit energy consumption for surviving cooking equipment in the current year by housing type and Census Division,

$EQCUEC_{r,eg,b}$ is the unit energy consumption for cooking equipment in the current year by housing type and Census Division, and
 $RTBASEFF_{y,eg}$ are the annual average efficiencies for the equipment classes (represented as unit energy consumption for this service).

For new equipment,

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * \frac{WTEQCEFFN_{y,eg,b,r}}{RTBASEFF_{2001,eg}} \quad (B-97)$$

where,

$EQCNUEC_{y,eg,b,r}$ is the unit energy consumption for new cooking equipment in the current year by housing type and Census Division,
 $EQCUEC_{r,eg,b}$ is the unit energy consumption for cooking equipment by class, housing type and Census Division,
 $WTEQCEFFN_{y,eg,b,r}$ is the weighted average cooking usage for new equipment in the current year by housing type and Census Division, and
 $RTBASEFF_{2001,eg}$ is the 2001 efficiency of the cooking equipment class.

For replacement equipment,

$$EQCRUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * \frac{WTEQCEFFR_{y,eg,b,r}}{RTBASEFF_{2001,eg}} \quad (B-98)$$

where,

$EQCRUEC_{y,eg,b,r}$ is the unit energy consumption for replacement cooking equipment in the current year by housing type and Census Division,
 $EQCUEC_{r,eg,b}$ is the unit energy consumption for cooking equipment by class, housing type and Census Division,
 $WTEQCEFFR_{y,eg,b,r}$ is the weighted average cooking usage for replacement equipment in the current year by housing type and Census Division, and
 $RTBASEFF_{2001,eg}$ is the 2001 efficiency of the cooking equipment class.

For the average efficiency, the initial year level is set to the new equipment efficiency:

If $y = 2002$,

$$EQCAUEC_{y,eg,b,r} = EQCNUEC_{r,eg,b} \quad (B-99)$$

If $y > 2002$,

$$EQCAUEC_{y,eg,b,r} = \frac{(EQCREP_{y,eg,b,r} + EQCADD_{y,eg,b,r} + EQCRP90RP_{y,eg,b,r}) * EQCNUEC_{y,eg,b,r} + (EQCSR90_{y,eg,b,r} + EQCSUR_{y,eg,b,r}) * EQCAUEC_{y-1,eg,b,r} + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r}}{EQCREP_{y,eg,b,r} + EQCADD_{y,eg,b,r} + EQCRP90RP_{y,eg,b,r} + EQCSR90_{y,eg,b,r} + EQCSUR_{y,eg,b,r} + EQCRP90_{y,eg,b,r}} \quad (B-100)$$

And energy consumption is defined as:

$$CKCON_{y=2002,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \end{array} \right), \quad \text{if } y = 2002 \quad (B-101)$$

$$CKCON_{y,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSR90_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \\ + EQCREP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSUR_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \end{array} \right), \quad \text{if } y > 2002 \quad (B-102)$$

Clothes Drying

RDRYTEC (Clothes Dryer Technology Choice Component)

The following variables are computed as in the equations indicated:

- $OPCOST_{y,es,b,r,v}$ is the operating cost for the equipment type by year, housing type, Census Division, and vintage. It is computed as in (B-72) above.
- $LFCY_{y,es,b,r,v}$ is the clothes dryer-s life cycle cost by year, housing type Census Division, and vintage. It is computed as in (B-18) above.
- $EQWTN_{y,es,b,r}$ is the equipment weight for new equipment type by housing type, Census Division, and year. It is computed as in (B-22) above.
- $EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment by housing type, Census Division, and year. It is computed as in (B-23) above.
- $TOTEWTN_{y,eg,b,r}$ is the sum of equipment weights for the new equipment class. It is computed as in (B-24) above.
- $TOTEWTR_{y,eg,b,r}$ is the sum of equipment weights for the replacement equipment class. It is computed as in (B-25) above.

Market shares for new and replacement dryers are next:

$$NEQTSHR_{y,es,b,r} = \frac{EQWT_{y,es,b,r}}{TOTEWT_{y,eg,b,r}} \quad (\text{B-1039})$$

where,

- $NEQTSHR_{y,es,b,r}$ is the new market share of clothes dryer equipment types by housing type and Census Division in the current year,
- $TOTEWT_{eg}$ is the sum of equipment weights for the new equipment class,
- $EQWT_{es}$ is the equipment weight for new equipment, and

The class averages of equipment type efficiencies for clothes drying equipment are calculated as for other end uses:

$$TEMP = \sum_{es} EQWT_{y,es,b,r}$$

$$WTEQCEFFA_{y,eg,b,r} = \frac{\sum_{es} \left(\frac{EQWT_{y,es,b,r}}{RTEQEFF_{es}} \right)}{TEMP}, \text{ if } TEMP > 0 \quad (\text{B-1040})$$

$$WTEQCEFFA_{y,eg,b,r} = \frac{1}{RTBASEFF_{2001,eg}}, \text{ otherwise}$$

where,

$WTEQCEFFA_{y,es,b,r}$ is the weighted average usage of clothes dryer equipment classes in the current year by housing type and Census Division, and

$EQWT_{es}$ is the equipment weight for each type of new equipment.

DRYADD (Dryer Additions Component)

New clothes drying equipment is calculated using a saturation level for newly-bought equipment

$$EQCADD_{y,t,eg,b,r} = \sum_{es} \left(HSEADD_{y,b,r} * NEQTSHR_{y,es,b,r} * \frac{NEWDRYSAT_{b,r}}{100} \right) \quad (\text{B-105})$$

where,

$EQCADD_{y,t,eg,b,r}$ is the amount of new (post-2001 vintage) equipment added in new housing units in the current year by housing type and Census Division,

$HSEADD_{y,b,r}$ is the number of new housing additions in the year by housing type and Census Division,

$NEQTSHR_{y,es,b,r}$ is the market share of new clothes dryer equipment types by housing type and Census Division in the current year, and

$NEWDRYSAT_{b,r}$ is the level of market penetration of new clothes dryer equipment by housing type and Census Division, expressed as a percent, from the RMISC.TXT file.

The next step is to calculate the numbers of dryers of each vintage category. The following variables were computed as in the equations indicated:

$EQCSR90_{y,eg,b,r}$ is the surviving post-2001 vintage equipment in pre-2002 housing units in the

current year by housing type and Census Division. It is computed as in (B-41) above.

$EQCSUR_{y,eg,b,r}$ is the surviving new (post-2001 vintage) equipment in the current year by housing type and Census Division. It is computed as in (B-42) above.

$EQCREP_{y,t,eg,b,r}$ is the number of replacement units (post-2001 vintage) equipment demanded in multi-family or mobile post-2001 vintage housing units by housing type and Census Division, computed as in (B-35).

$EQCRP90_{y,t,eg,b,r}$ is the number of replacement units demanded in pre-2002 housing units each year by housing type and Census Division. It is computed as in (B-36) above.

$EQCRP90RP_{y,t,eg,b,r}$ is the number of replacement units for the EQCRP90 units demanded in the current year by housing type and Census Division. It is computed as in (B-37) above.

RDRYCON (Clothes Dryer Energy Consumption Component)

The unit energy consumption for surviving equipment is calculated as,

$$EQCSUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * \frac{RTBASEFF_{2001,eg}}{RTBASEFF_{y,eg}} \quad (B-106)$$

where,

$EQCSUEC_{y,eg,b,r}$ is the UEC for surviving 2001 equipment in each equipment class, by housing type and Census Division, and

$RTBASEFF_{y,eg}$ is the base efficiency of the same equipment in each year.

For new equipment,

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFN_{y,eg,b,r} * RTBASEFF_{y,eg,b,r} \quad (B-107)$$

where,

$EQCNUEC_{y,eg,b,r}$ is the unit energy consumption by year for new equipment by housing type and Census Division,

$WTEQCEFFN_{y,eg,b,r}$ is the new equipment efficiency by year, equipment class, housing type

and Census Division,
 $RTBASEFF_{y,eg}$ is the base year efficiency of the equipment class, and
 $EQCUEC_{r,eg,b}$ is unit energy consumption for equipment in 2001 housing by Census Division, equipment class and housing type.

For replacement equipment,

$$EQCRUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFR_{y,eg,b,r} * RTBASEFF_{y,eg,b,r} \quad (B-108)$$

where,

$EQCRUEC_{y,eg,b,r}$ is the unit energy consumption by year for replacement equipment by housing type and Census Division,

$WTEQCEFFR_{y,eg,b,r}$ is the replacement efficiency by year, equipment class, housing type and Census Division,

$RTBASEFF_{y,eg}$ is the base year efficiency of the equipment class, and

$EQCUEC_{r,eg,b}$ is unit energy consumption for equipment in 2001 housing by Census Division, equipment class and housing type.

The average of the two unit energy consumption variables is,

If $y = 2002$,

$$EQCAUEC_{y,eg,b,r} = EQCNUEC_{r,eg,b} \quad (B-115)$$

If $y > 2002$,

$$EQCAUEC_{y,eg,b,r} = \frac{(EQCREP_{y,eg,b,r} + EQCADD_{y,eg,b,r} + EQCRP_{90RP,y,eg,b,r}) * EQCNUEC_{y,eg,b,r} + (EQCSR_{90,y,eg,b,r} + EQCSUR_{y,eg,b,r}) * EQCAUEC_{y-1,eg,b,r} + EQCRP_{90,y,eg,b,r} * EQCRUEC_{y,eg,b,r}}{EQCREP_{y,eg,b,r} + EQCADD_{y,eg,b,r} + EQCRP_{90RP,y,eg,b,r} + EQCSR_{90,y,eg,b,r} + EQCSUR_{y,eg,b,r} + EQCRP_{90,y,eg,b,r}} \quad (B-109)$$

And energy consumption is defined as:

$$DRYCON_{y=2002,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \end{array} \right), \text{ if } y = 2002 \quad (B-110)$$

$$DRYCON_{y,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSR90_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \\ + EQCREP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSUR_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \end{array} \right), \text{ if } y > 2002 \quad (B-111)$$

Refrigeration

RREFTEC (Refrigerator Technology Choice Component)

Equipment operating cost for refrigerators is,

$$OPCOST_{y,es,b,r,v} = PRICES_{f,r,y} * RTEQEFF_{eg} * FACTOR \quad (B-11219)$$

where,

$OPCOST_{y,es,b,r,v}$ is the operating cost of the equipment type by housing type, Census Division, and vintage in the current year,

$PRICES_{f,r,y}$ is the fuel price in the current year by Census Division, from the NEMS Integrating Module,

$RTEQEFF_{es}$ is the efficiency (represented as unit energy consumption for this service) of the refrigerator types, and

$FACTOR$ is a factor, MMBtu/kWh, that converts the units of $RTEQEFF_{es}$, which is expressed in kWh for refrigerators and freezers.

The following variables are computed as in the equations indicated:

$LFCY_{es,r,v}$ is the life cycle cost for the type of equipment by Census Division and

vintage. It is computed as in (B-18) above.

$EQWTN_{es,b,r}$ is the equipment weight for new equipment type by housing type and Census Division. It is computed as in (B-22) above.

$EQWTR_{es,b,r}$ is the equipment weight for replacement equipment by housing type and Census Division. It is computed as in (B-23) above.

$TOTEWTN_{b,r}$ is the sum of the individual weights for each type of new equipment by housing type and Census Division. It is computed as in (B-24) above.

$TOTEWTR_{b,r}$ is the sum of the individual weights for each type of replacement equipment by housing type and Census Division. It is computed as in (B-25) above.

The two available classes of refrigerators, through-the-door and others, have market shares, distinguished by $TTDSHR$. For through-the-door refrigerators,

$$\begin{aligned} NEQTSHR_{y,es,b,r} &= TTDSHR \\ REQTSHR_{y,es,b,r} &= TTDSHR \end{aligned} \quad \text{(B-113)}$$

And for all others,

$$NEQTSHR_{y,es,b,r} = \frac{EQWTN_{es,b,r}}{TOTEWTN_{b,r}} * (1 - TTDSHR) \quad \text{(B-114)}$$

$$REQTSHR_{y,es,b,r} = \frac{EQWTR_{es,b,r}}{TOTEWTR_{b,r}} * (1 - TTDSHR) \quad \text{(B-115)}$$

where,

$NEQTSHR_{y,es,b,r}$ is the market share for new refrigerators of the equipment type in the current year by housing type and Census Division,

$REQTSHR_{y,es,b,r}$ is the market share for the replacements of equipment type in the current year by housing type and Census Division, and

$TTDSHR$ is the share of side-by-side refrigerators with through-the-door access features.

$$WTEQCEFFN_{y,eg,b,r} = \frac{\sum_{es} (NEQTSHR_{y,es,b,r} * RTEQEFF_{es})}{\sum_{es} NEQTSHR_{y,es,b,r}} \quad (B-1163)$$

$$WTEQCEFFR_{y,eg,b,r} = \frac{\sum_{es} (REQTSHR_{y,es,b,r} * RTEQEFF_{es})}{\sum_{es} REQTSHR_{y,es,b,r}} \quad (B-117)$$

where,

$WTEQCEFFN_{y,eg,b,r}$ is the weighted average usage of new refrigerator classes by housing type and Census Division,

$WTEQCEFFR_{y,eg,b,r}$ is the weighted average usage of replacement refrigerator classes by housing type and Census Division,

$RTEQEFF_{es}$ is the efficiency by refrigerator type, from the RTEKTY.TXT file,

$NEQTSHR_{y,es,b,r}$ is the new market share for the equipment types in the current year by housing type and Census Division,

$REQTSHR_{y,es,b,r}$ is the market share for the replacements of equipment types in the current year by housing type and Census Division.

RREFADD (Additions to the Refrigerator Stock Component)

Refrigerator additions allow for new single-family homes to have more than one refrigerator, as defined by RECS 2001. The additions are calculated as:

$$\begin{aligned} EQCADD_{y,t,eg,b,r} &= HSEADD_{y,b,r} * RFADDFAC, \text{ if } b = \text{single family} \\ EQCADD_{y,t,eg,b,r} &= HSEADD_{y,b,r}, \text{ otherwise} \end{aligned} \quad (B-118)$$

where,

$EQCADD_{y,t,eg,b,r}$ is the amount of new (post-2001 vintage) refrigerators added in new housing units in the current year by housing type and Census Division,

$HSEADD_{y,b,r}$ is the number of new housing units constructed in the current year by housing type and Census Division, and

RFADDFAC is the percent of new single-family housing units with two refrigerators.

The following variables are computed as in the equations indicated:

EQCSR90_{y,t,eg,b,r} is the surviving new (post-2001 vintage) equipment in old (pre-2002 vintage) housing units by housing type and Census Division. It is computed as in (B-41) above.

EQCRP90_{y,t,eg,b,r} is the number of replacement (post-2001 vintage) equipment in pre-2002 housing units in the current year by housing type and Census Division. It is computed as in (B-36) above.

EQCRP90RP_{y,t,eg,b,r} is the number of replacement units for the EQCRP90 units demanded in the current year by housing type and Census Division. It is computed as in (B-37) above.

EQCSUR_{y,eg,b,r} is the surviving new (post-2001 vintage) equipment in the current year by housing type and Census Division. It is computed as in (B-42) above.

EQCREP_{y,t,eg,b,r} is the number of replacement units (post-2001 vintage) equipment demanded in new (post-2001 vintage) housing units by housing type and Census Division. It is computed as in (B-35) above.

RREFCON (Refrigerator Energy Consumption Component)

The unit energy consumption calculations for surviving, new, and replacement equipment, and their averages, are calculated as:

$$EQCSUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * \frac{RTBASEFF_{y,eg}}{RTBASEFF_{2001,eg}} \quad (B-119)$$

where,

EQCSUEC_{y,eg,b,r} is the UEC for surviving 2001 equipment in each equipment class, by housing type and Census Division, and

EQCUEC_{r,eg,b} is the UEC for the original 2001 equipment in each equipment class, by housing type and Census Division, and

RTBASEFF_{y,eg} is the base efficiency (represented by unit energy consumption for this

service).

For new refrigerators,

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * \frac{WTEQCEFFN_{y,eg,b,r}}{RTBASEFF_{2001,eg}} \quad (\text{B-120})$$

where,

- $EQCNUEC_{y,eg,b,r}$ is the efficiency-weighted unit energy consumption for new refrigerators in the current year by housing type and Census Division,
- $EQCUEC_{r,eg,b}$ is the unit energy consumption for 2001 refrigerators by housing type and Census Division,
- $WTEQCEFFN_{y,eg,b,r}$ is the market share-weighted usage of new refrigerators in the current year by housing type and Census Division, and
- $RTBASEFF_{2001,eg}$ is the 2001 stock-average efficiency of refrigerators.

For replacement refrigerators,

$$EQCRUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * \frac{WTEQCEFFR_{y,eg,b,r}}{RTBASEFF_{2001,eg}} \quad (\text{B-121})$$

where,

- $EQCRUEC_{y,eg,b,r}$ is the efficiency weighted unit energy consumption for replacement refrigerators in the current year by housing type and Census Division,
- $WTEQCEFFR_{y,b,r}$ is the market share weighted usage of replacement refrigerators in the current year by housing type and Census Division,
- $RTBASEFF_{2001,eg}$ is the 2001 stock-average efficiency of refrigerators.

The weighted average of the three UEC sets is calculated here. In all of the calculations that follow, it is assumed that ten percent of refrigerators are second refrigerators in the home, running at the 2001 base UEC level. Thus, each expression calculates the consumption for .1 of the refrigerators at existing equipment rates, and .9 at current year new equipment rates. If $y = 2002$,

$$EQCAUEC_{y, eg, b, r} = EQCNUEC_{r, eg, b} \quad (B-12229)$$

If $y > 2002$,

$$EQCAUEC_{y, eg, b, r} = \frac{(EQCREP_{y, t, eg, b, r} + EQCADD_{y, t, eg, b, r} * 0.9 + EQCRP90RP_{y, t, eg, b, r}) * EQCNUEC_{y, eg, b, r} + (EQCSR90_{y, t, eg, b, r} + EQCSUR_{y, t, eg, b, r}) * EQCAUEC_{y-1, eg, b, r} + EQCRP90_{y, t, eg, b, r} * EQCRUEC_{y, t, eg, b, r} + EQCADD_{y, t, eg, b, r} * 0.1 * EQCUEC_{r, eg, b}}{EQCREP_{y, eg, b, r} + EQCADD_{y, eg, b, r} + EQCRP90RP_{y, eg, b, r} + EQCSR90_{y, eg, b, r} + EQCSUR_{y, eg, b, r} + EQCRP90_{y, eg, b, r}} \quad (B-1230)$$

where,

$EQCAUEC_{y, b, r}$ is the average unit energy consumption of refrigerators in the current year by housing type and Census Division.

The weighted average usage is now calculated.

$$WTEQCEFFA_{y, eg, b, r} = WTREFFN_{y, b, r}, \text{ if } y = 2002$$

$$WTEQCEFFA_{y, eg, b, r} = \frac{(EQCREP_{y, t, eg, b, r} + EQCADD_{y, t, eg, b, r} * 0.9 + EQCRP90RP_{y, t, eg, b, r}) * WTEQCEFFN_{y, eg, b, r} + (EQCSR90_{y, t, eg, b, r} + EQCSUR_{y, t, eg, b, r}) * WTEQCEFFA_{y-1, eg, b, r} + EQCRP90_{y, t, eg, b, r} * WTEQCEFFR_{y, eg, b, r} + EQCADD_{y, t, eg, b, r} * 0.1 * RTBASEFF_{2001, eg}}{EQCREP_{y, eg, b, r} + EQCADD_{y, eg, b, r} + EQCRP90RP_{y, eg, b, r} + EQCSR90_{y, eg, b, r} + EQCSUR_{y, eg, b, r} + EQCRP90_{y, eg, b, r}}, \text{ otherwise} \quad (B-124)$$

And energy consumption is defined as:

$$REFCON_{y=2002, r} = \sum_b \left(\begin{array}{l} EQCESE_{y, eg, b, r} * EQCUEC_{eg, b, r} \\ + EQCADD_{y, eg, b, r} * 0.9 * EQCNUEC_{y, eg, b, r} \\ + EQCADD_{y, eg, b, r} * 0.1 * EQCUEC_{eg, b, r} \\ + EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r} \\ + EQCRP90RP_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} \end{array} \right), \text{ if } y = 2002 \quad (B-125)$$

$$REFCON_{y,r} = \sum_b \left(\begin{array}{l} EQCESE_{y,eg,b,r} * EQCUEC_{eg,b,r} \\ + EQCADD_{y,eg,b,r} * 0.9 * EQCNUEC_{y,eg,b,r} \\ + EQCADD_{y,eg,b,r} * 0.1 * EQCUEC_{eg,b,r} \\ + EQCRP90_{y,eg,b,r} * EQCRUEC_{y,eg,b,r} \\ + EQCRP90RP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSR90_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \\ + EQCREP_{y,eg,b,r} * EQCNUEC_{y,eg,b,r} \\ + EQCSUR_{y,eg,b,r} * EQCAUEC_{y,eg,b,r} \end{array} \right), \text{ if } y > 2002 \quad (B-126)$$

where,

- $REFCON_{y,r}$ is energy consumption for refrigeration,
- $EQCESE_{y,b,r}$ is the surviving old (pre-2002 vintage) equipment in old (pre-2002 vintage) housing units in the current year by housing type and Census Division,
- $EQCADD_{y,t,b,r}$ is the amount of new (post-2001 vintage) refrigerators added in new housing units in the current year by housing type and Census Division,
- $EQCRP90_{y,t,b,r}$ is the number of replacement (post-2001 vintage) equipment in pre-2002 housing units in the current year by housing type and Census Division,
- $EQCRP90RP_{y,t,b,r}$ is the number of replacements for the EQCRP90 equipment in the current year by housing type and Census Division,
- $EQCRUEC_{y,b,r}$ is the efficiency weighted unit energy consumption for replacement refrigerators in the current year by housing type and Census Division, and
- $EQCNUEC_{y,b,r}$ is the efficiency weighted unit energy consumption for new refrigerators in the current year by housing type and Census Division.
- $EQCUEC_{r,b}$ is the unit energy consumption for refrigerators by housing type and Census Division.

Freezers

RFRZTEC (Freezer Technology Choice Component)

Again, the processing of the market share weights is like the other end uses. The following variables are computed as in the equations indicated:

- $OPCOST_{y,es,r,v}$ is the operating cost of freezers by housing type and Census Division in the

	current year. It is computed as for refrigerators in (B-119) above.
$LFCY_{es,r,v}$	is the life cycle cost for the type of equipment by Census Division. It is computed as in (B-18) above.
$EQWTN_{es,b,r}$	is the equipment weight for new equipment types by housing type and Census Division. It is computed as in (B-22) above.
$EQWTR_{es,b,r}$	is the equipment weight for replacement equipment by housing type and Census Division. It is computed as in (B-23) above.
$TOTEWTN_{b,r}$	is the sum of the individual weights for each type of new equipment by housing type and Census Division. It is computed as in (B-24) above.
$TOTEWTR_{b,r}$	is the sum of the individual weights for each type of replacement equipment by housing type and Census Division. It is computed as in (B-25) above.

Shares for equipment types, in normalized form, are calculated somewhat as usual:

$$\begin{aligned}
 NEQTSHR_{y,es,b,r} &= UPSHR, \text{ if } es = \text{upright freezer} \\
 NEQTSHR_{y,es,b,r} &= \frac{EQWTN_{es,b,r}}{TOTEWTN_{b,r}} * (1 - UPSHR), \text{ otherwise}
 \end{aligned}
 \tag{B-1274}$$

$$\begin{aligned}
 REQTSHR_{y,es,b,r} &= UPSHR, \text{ if } es = \text{upright freezer} \\
 REQTSHR_{y,es,b,r} &= \frac{EQWTR_{es,b,r}}{TOTEWTR_{b,r}} * (1 - UPSHR), \text{ otherwise}
 \end{aligned}
 \tag{B-128}$$

where,

$NEQTSHR_{y,es,b,r}$	is the new market share for the equipment type in the current year by housing type and Census Division,
$REQTSHR_{y,es,b,r}$	is the market share for replacement of equipment types in the current year by housing type and Census Division, and
$UPSHR$	is the market share for upright freezers.

The average efficiencies for new and replacement equipment are standard:

$$WTEQCEFFN_{y,eg,b,r} = \frac{\sum_{es} (NEQTSHR_{y,es,b,r} * RTEQEFF_{es})}{\sum_{es} NEQTSHR_{y,es,b,r}} \quad (B-129)$$

$$WTEQCEFFR_{y,eg,b,r} = \frac{\sum_{es} (REQTSHR_{y,es,b,r} * RTEQEFF_{es})}{\sum_{es} REQTSHR_{y,es,b,r}} \quad (B-130)$$

where,

$WTEQCEFFN_{y,eg,b,r}$ is the market share-weighted usage of new freezers in the current year by housing type and Census Division,

$WTEQCEFFR_{y,eg,b,r}$ is the market share-weighted usage of replacement freezers in the current year by housing type and Census Division,

$NEQTSHR_{y,es,b,r}$ is the new market share for the equipment type in the current year by housing type and Census Division, and

$REQTSHR_{y,es,b,r}$ is the market share for the replacements of equipment type in the current year by housing type and Census Division.

RFRZADD (Additions to the Freezer Stock Component)

Calculations of changes in the freezing equipment stock include all seven categories of vintages.

Additions post-2002:

$$EQCADD_{y,eg,b,r} = HSEADD_{y,b,r} * \left(\frac{FRZSAT_{b,r}}{100} \right) \quad (B-1318)$$

where,

$EQCADD_{y,eg,b,r}$ is the amount of new (post-2001 vintage) equipment added in new housing units in the year by housing type and Census Division,

$HSEADD_{y,b,r}$ is the number of new housing units constructed in the current year by housing type and Census Division, and

$FRZSAT_{b,r}$ is the market penetration level of freezers by housing type and Census Division, from the RMISC.TXT file, expressed as percents.

The following variables are computed as in the equations indicated:

- $EQCSR90_{y,b,r}$ is the surviving new (post-2001 vintage) equipment in old (pre-2002 vintage) housing units by housing type and Census Division. It is computed as in (B-41) above.
- $EQCRP90_{y,t,eg,b,r}$ is the number of replacement (post-2001 vintage) equipment in pre-2002 housing units in the current year by housing type and Census Division. It is computed as in (B-36) above.
- $EQCSUR_{y,b,r}$ is the amount of surviving new (post-2001 vintage) equipment in new (post-2001 vintage) housing units in the current year by housing type and Census Division. It is computed as in (B-42) above.
- $EQCREP_{y,b,r}$ is the number of replacements for the current year in new (post-2001 vintage) housing units by housing type and Census Division. It is computed as in (B-35) above.
- $EQCRP90RP_{y,t,b,r}$ is the number of replacements for the EQCRP90 equipment in the current year by housing type and Census Division. It is computed as in (B-37) above.

FRZCON (Freezer Energy Consumption Component)

The detailed unit energy consumption variables are computed exactly as for freezers:

- $EQCSUEC_{y,eg,b,r}$ is the UEC for surviving 2001 equipment in each equipment class, by housing type and Census Division, calculated as in equation (B-128),
- $EQCNUEC_{y,eg,b,r}$ is the efficiency-weighted unit energy consumption for new freezers in the current year by housing type and Census Division, calculated as in equation (B-129),
- $EQCRUEC_{y,eg,b,r}$ is the efficiency weighted unit energy consumption for replacement refrigerators in the current year by housing type and Census Division, calculated as in equation (B-130).

Average UEC's are different in that they do not include the offset for second refrigerators found in equation (B-131).

Weighted average usages are then calculated,

$$\begin{aligned}
 WTEQCEFFA_{y, eg, b, r} &= WTREFFN_{y, b, r}, \text{ if } y = 2002 \\
 &\quad (EQCREP_{y, t, eg, b, r} + EQCADD_{y, t, eg, b, r} + EQCRP90RP_{y, t, eg, b, r}) * WTEQCEFFN_{y, eg, b, r} \\
 &\quad + (EQCSR90_{y, t, eg, b, r} + EQCSUR_{y, t, eg, b, r}) * WTEQCEFFA_{y-1, eg, b, r} \\
 WTEQCEFFA_{y, eg, b, r} &= \frac{+ EQCRP90_{y, t, eg, b, r} * WTEQCEFFR_{y, eg, b, r}}{EQCREP_{y, eg, b, r} + EQCADD_{y, eg, b, r} + EQCRP90RP_{y, eg, b, r} + EQCSR90_{y, eg, b, r} + EQCSUR_{y, eg, b, r} + EQCRP90_{y, eg, b, r}}, \text{ otherwise}
 \end{aligned}
 \tag{B-13239}$$

And energy consumption is defined as:

$$FRZCON_{y=2002, r} = \sum_b \left(\begin{array}{l} EQCESE_{y, eg, b, r} * EQCUEC_{eg, b, r} \\ + EQCADD_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} \\ + EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r} \\ + EQCRP90RP_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} \end{array} \right), \text{ if } y = 2002
 \tag{B-1330}$$

$$FRZCON_{y, r} = \sum_b \left(\begin{array}{l} EQCESE_{y, eg, b, r} * EQCUEC_{eg, b, r} \\ + EQCADD_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} \\ + EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r} \\ + EQCRP90RP_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} \\ + EQCSR90_{y, eg, b, r} * EQCAUEC_{y, eg, b, r} \\ + EQCREP_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} \\ + EQCSUR_{y, eg, b, r} * EQCAUEC_{y, eg, b, r} \end{array} \right), \text{ if } y > 2002
 \tag{B-134}$$

where,

$WTEQCEFFA_{y, eg, b, r}$ is the market share weighted average usage of freezers in the current year by housing type and Census Division.

Finally, the energy consumption calculation follows the usual pattern:

Lighting

Lighting data is found in the RMISC.TXT file. For lighting, there is a single component, as shown in the following section.

LTCNS (Lighting Choice, Stock, and Energy Consumption Component)

The lighting end use is separated into three distinct segments: General use, torchiere, and standard

fluorescent. Within each segment, the level of detail varies based upon importance in the market and data availability. Since the general use segment is most important in terms of energy consumption in the sector, it has the most detailed accounting of the three segments. The equations below are generalized to represent both the general use and torchiere segments of the market. The only difference between the two segments is that the general use category is further partitioned into hours of use bins, which affects the economics in the operating and capital costs as documented below. The capital costs included in the RMISC.TXT file account for the fact that multiple bulbs are needed to satisfy the hours of use for a particular hourly bin.

Operating costs for lighting are defined as:

$$OPCOST_{y,es,b,r} = PRICES_{electricity,y,r} * WATTS_{es,y} * FACTOR * HOURS * 365 \quad (B-135)$$

where,

$OPCOST_{es}$ are the operating costs for specific lighting technologies,
 $PRICES_{y,r}$ are electricity prices by year and region,
 $WATTS_{es,y}$ are the watts of each particular bulb type,
 $FACTOR$ converts watts to Btu,
 $HOURS$ are the number of hours per day of bulb use, and
 365 are the number of days in a year.

Market shares for standard-use and torchiere lighting are computed as follows:

$$MKTSHR_{y,es,b,r} = \frac{e^{\beta_1 * EQCOST_{y,es} + \beta_2 * OPCOST_{es}}}{\sum_{es} e^{\beta_1 * EQCOST_{y,es} + \beta_2 * OPCOST_{es}}} \quad (B-136)$$

where,

$MKTSHR_{y,es,b,r}$ are annual market shares for standard lighting applications and
 $EQCOST_{y,es}$ are lighting equipment costs.

Next, weighted efficiency indices are computed for both standard and torchiere lighting classes.

Namely,

$$WTLEFF_{y,b,r} = \sum_{es} \left(\frac{1}{EFF_{es}} * MKTSHR_{y,es} \right), \text{ for } es = 1,2,3 \quad (\text{B-137})$$

where,

$WTLEFF_{y,b,d}$ are weighted-average usages for lighting, by year, housing type and Census Division,

EFF_{es} are efficiencies of the three classes of light bulbs (2 for torchiere lamps), from the table above, and

$MKTSHR_{y,es}$ are annual market shares for the lighting classes, from the table above.

Stock accounting of all bulbs are separated into new and replacement units as shown in equations B-35 to B-42. The number of bulbs needed for each hourly bin, are annualized, meaning some bins might need more than one bulb per year, based on hourly life expectancy and annual hourly usage.

Next, the component calculates unit energy consumption for standard and torchiere lighting,

$$LTNUEC_{y,r,b} = LTUEC_{r,b} * WTLEFF_{y,b,d} * BASEFF \quad (\text{B-138})$$

where,

$LTNUEC_{y,r,b}$ is the unit energy consumption for lighting by year, Census Division and housing type,

$LTUEC_{r,b}$ is base year unit energy consumption for lighting by Census Division and housing type, from the RSUEC10.TXT file,

$WTLEFF_{y,b,d}$ is the weighted-average usage for lighting calculated above, and

$BASEFF$ is the base efficiency for lighting equipment, set at present to 18 in the component.

For general use lighting, the UEC is calculated over the various hourly bins, but has not been shown in equation B-145. The final step of this component is to calculate consumption for the lighting service category. Namely,

$$LTCON_{y,r} = \sum_b \left(\left(\begin{aligned} & (EH_{y,b,r} + NH_{y,b,r} * SQFTLTS_{y,b,r}) * LTNUEC_{y,r,b} \\ & + (EH_{y,b,r} + NH_{y,b,r}) * TCHUEC_{y,b,r} \\ & + (EH_{y,b,r} * LTUEC_{fluorescent,b,r}) \end{aligned} \right) * RSELAST_{f,r,a,EF1,EF2,EF3,2001} \right) \quad (B-139)$$

where,

- $LTCON_{y,r}$ is the short-term price elasticity, presently valued at -0.25.
- $LTCON_{y,r}$ is the energy consumption for lighting by year and Census Division,
- $EH_{y,b,r}$ is the number of old (pre-2002) housing units in the current year by housing type and Census Division,
- $NH_{y,b,r}$ is the number of new (post-2001) housing units in the current year by housing type and Census Division,
- $LTNUEC_{y,r,b}$ is the unit energy consumption for general use lighting by year, Census Division and housing type,
- $SQFTLTS_{y,b,r}$ is the average floor area of homes, relative to 2001 floor areas, calculated from the floor areas given in the RSSQRFT.TXT file, used to adjust for increased lighted areas in future new homes,
- $TCHUEC_{y,b,r}$ is the unit energy consumption for torchiere lighting by year, Census Division, and housing type,
- $RSELAST$ is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and $LTCON$, the total short-term price elasticity, and
- $LTUEC_{fluorescent}$ is the UEC for standard fluorescent lamps.

PCCNS (Personal Computer Energy Consumption Component)

This submodule is similar in nature to the lighting submodule, however, market shares are assumed for the two efficiency levels for PCs. As an alternative approach, growth rates have been formulated offline in (roughly) five year increments. Using this approach, only the number of personal computers, the assumed level of efficiency, and the unit energy consumption (UEC), in addition to the aforementioned growth rates, are needed to calculate energy consumption. Specifically,

$$PCNUEC_{y,r,b} = PCUEC_{r,b} * PCPEN_y * PCEFF_y * \left(\frac{INCOME_{y,r}}{INCOME_{2001,r}} \right)^{0.1} \quad (B-140)$$

where,

- $PCNUEC_{y,r,b}$ is the unit energy consumption for personal computers by year, Census Division and housing type,
- $PCUEC_{r,b}$ is base year unit energy consumption for personal computers by Census Division and housing type, from the RSUEC10 file,
- $PCPEN_y$ is the estimated penetration of personal computers for future years,
- $INCOME_{y,r}$ is personal disposable income by year and region, and
- $PCEFF_y$ is the stock efficiency index for personal computers in year y.

Next, the component calculates the number of personal computers in the stock for future years. Since the growth rate is tied to the UEC, the saturation of personal computers will remain fixed. Therefore,

$$PCEQP_{y,r,b} = \left(\frac{PCSAT_{r,b}}{EH_{y=2001,r,b}} \right) * (EH_{y,b,r} + NH_{y,b,r}) \quad (B-141)$$

where,

- $PCEQP_{y,r,b}$ is the number of personal computers by year, Census Division and housing type, and
- $PCSAT_{r,b}$ is the number of households having PCs.

The final step of this component is to calculate consumption for personal computers. Namely,

$$PCCON_{y,r} = \sum_b \left(PCEQP_{y,b,r} * PCNUEC_{y,b,r} \right) * RSELAST_{f,r,\alpha,EF_1,EF_2,EF_3,2001} \quad (B-142)$$

where,

- $PCCON_{y,r}$ is the energy consumption for personal computers by year and Census Division, and
- $RSELAST$ is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and α , the total short-term price elasticity.

TVCNS (Color Television Energy Consumption Component)

This submodule is similar in nature to the personal computer submodule. Growth rates have been formulated offline in (roughly) five year increments. Using this approach, only the number of color televisions and the unit energy consumption (UEC), in addition to the aforementioned growth rates, are needed to calculate energy consumption. Specifically,

$$TVNUEC_{y,r,b} = TVUEC_{r,b} * SIZEADJ_y * TVEFF_y, \quad (B-143)$$

where,

- $TVNUEC_{y,r,b}$ is the unit energy consumption for color televisions by year, Census Division and housing type,
- $TVUEC_{r,b}$ is base year unit energy consumption for color televisions by Census Division and housing type, from the RSUEC10.TXT file,
- $SIZEADJ_y$ is the estimated energy adjustment for the increase in screen size over the projection period, and
- $TVEFF_y$ is the stock efficiency index for color televisions in year y .

Next, the component calculates the number of color televisions in the stock for future years. Since the growth rate is tied to the UEC, the number of color televisions per household will remain fixed. Therefore,

$$TVEQP_{y,r,b} = (EH_{y,b,r} * NH_{y,b,r}) * TVPEN_y \quad (B-144)$$

where,

- $TVPEN_y$ is the estimated penetration of color televisions for future years, and
- $TVEQP_{y,r,b}$ is the number of color televisions by year, Census Division and housing type.

The final step of this component is to calculate consumption for color televisions. Namely,

$$TVCON_{y,r} = \sum_b \left((TVEQP_{y,b,r} * TVNUEC_{y,b,r}) * RSELAST_{f,r,\alpha,EF_1,EF_2,EF_3,2001} \right) \quad (B-145)$$

where,

$TVCON_{y,r}$ is the energy consumption for color televisions by year and Census Division, and
 $RSELAST$ is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and ϵ , the total short-term price elasticity.

Other Electric Appliances

Other electrical appliances is a catch-all category that includes miscellaneous electrical uses such as small kitchen appliances, consumer electronics, and small motor devices that are used in homes, but do not fall into any of the other categories of equipment that have their own module components. The component distributes the residual electricity into three major categories, namely electronics, heating elements, and motors. Based on historical data, growth rates are estimated for each category, then applied to the unit energy consumption in the same manner as demonstrated in the color television subroutine.

APCNS (Electric Appliance Energy Consumption Component)

The three components of miscellaneous electric use are computed as follows:

$$ELTRCN_{y,r} = \sum_b \left((NH_{y,b,r} + EH_{y,b,r}) * ELTRUEC_{r,b} * ELTRPEN_y * ELTREFF_y * \left(\frac{INCOME_{y,r}}{INCOME_{2001,r}} \right)^{0.1} \right) \quad (B-146)$$

$$MOTRCN_{y,r} = \sum_b \left((NH_{y,b,r} + EH_{y,b,r}) * MOTRUEC_{r,b} * MOTRPEN_y * MOTREFF_y * \left(\frac{INCOME_{y,r}}{INCOME_{2001,r}} \right)^{0.1} \right) \quad (B-147)$$

$$COILCN_{y,r} = \sum_b \left((NH_{y,b,r} + EH_{y,b,r}) * COILUEC_{r,b} * COILPEN_y * COILEFF_y * \left(\frac{INCOME_{y,r}}{INCOME_{2001,r}} \right)^{0.1} \right) \quad (B-148)$$

where,

$ELTRCN_{y,r}$ is home electronics energy consumption,
 $MOTRCN_{y,r}$ is miscellaneous small motor energy consumption,
 $COILCN_{y,r}$ is miscellaneous heating elements energy consumption,
 $EH_{y,b,r}$ is the number of old (pre-2002) housing units in the current year by housing type and Census Division,
 $NH_{y,b,r}$ is the number of new (post-2001) housing units in the current year by housing

- type and Census Division,
- $ELTRUEC_{r,b}$ is base year unit energy consumption for home electronics by Census Division and housing type,
- $MOTRUEC_{r,b}$ is base year unit energy consumption for miscellaneous small motors by Census Division and housing type,
- $COILUEC_{r,b}$ is base year unit energy consumption for miscellaneous heating elements by Census Division and housing type,
- $ELTRPEN_y$ is the penetration rate for home electronics,
- $MOTRPEN_y$ is the penetration rate for miscellaneous small motors,
- $COILPEN_y$ is the penetration rate for miscellaneous heating elements,
- $ELTREFF_y$ is the stock efficiency index for home electronics in year y ,
- $INCOME_{y,r}$ is personal disposable income by year and region,
- $MOTREFF_y$ is the stock efficiency index for miscellaneous small motors in year y , and
- $COILEFF_y$ is the stock efficiency index for miscellaneous heating elements in year y .

Finally, the sum of these three components equals the total amount of electricity consumed for miscellaneous uses.

$$APCON_{y,r} = (ELTRCN_{y,r} + MOTRCN_{y,r} + COILCN_{y,r}) * RSELAST_{r,r,\alpha,EF_1,EF_2,EF_3,2001} \quad (B-149)$$

where,

- $APCON_{y,r}$ is total electric appliance energy consumption and
- $RSELAST$ is the short-term price elasticity function with distributed lag weights EF_1 , EF_2 , and EF_3 , and α , the total short-term price elasticity.

Secondary Space Heating

Secondary space heating refers to small supplemental heaters, normally portable, fired by electricity, kerosene or other fuels, that are used for spot heating or other occasional stopgaps.

SHTCNS (Secondary Heating Energy Consumption Component)

Energy consumption by secondary heaters is calculated directly from shares by fuel read into the model from a user file:

$$\begin{aligned}
 SHTCON_{y,f,r} &= \sum_b \left(SHTSHR_{r,f} * EH_{y,b,r} * SHTUEC_{r,f,b} * AHSHELL_{y,gas,r,b} * RSELAST_{f,r,\alpha,EF_1,EF_2,EF_3,2001} \right) \text{if } f = \text{coal} \\
 SHTCON_{y,f,r} &= \sum_b \left(SHTSHR_{r,f} * (NH_{y,b,r} + EH_{y,b,r}) * SHTUEC_{r,f,b} * AHSHELL_{y,f,r,b} * RSELAST_{f,r,\alpha,EF_1,EF_2,EF_3,2001} \right) \text{otherwise}
 \end{aligned}
 \tag{B-150}$$

where,

- $SHTCON_{y,f,r}$ is the consumption of energy by secondary space heating equipment by year, fuel and Census Division,
- $SHTSHR_{r,f}$ are shares of seven fuels for secondary space heating by Census Division,
- $EH_{y,b,r}$ is the number of old (pre-2002) housing units in the current year by housing type and Census Division,
- $NH_{y,b,r}$ is the number of new (post-2001) housing units in the current year by housing type and Census Division,
- $SHTUEC_{r,f,b}$ is base year unit energy consumption for secondary heating by Census Division, fuel, and housing type, from the RSUEC10.TXT file,
- $AHSHELL_{y,f,r,b}$ is the average post-2001 heating shell index by year, fuel, Census Division, and building type, and
- $RSELAST$ is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and α , the total short-term price elasticity.

Other Appliances

Other appliances refers to small appliances not covered in the other categories that do not use electricity as their primary fuel, such as backyard grills. Consumption alone is calculated.

APPCNS (Appliance Energy Consumption Component)

The formula is a simple calculation from housing stock and unit energy consumption:

$$APLCON_{y,f,r} = \sum_b \left((EH_{y,b,r} + NH_{y,b,r}) * APPUEC_{y,b,r} * RSELAST_{f,r,\alpha,EF_1,EF_2,EF_3,2001} \right) \tag{B-151}$$

where,

- $APLCON_{y,f,r}$ is the energy consumption by other appliances by year, fuel and Census Division,
- $EH_{y,b,r}$ is the number of old (pre-2002) housing units in the current year by housing type and Census Division,
- $NH_{y,b,r}$ is the number of new (post-2001) housing units in the current year by housing type and Census Division,
- $APPUEC_{r,f,b}$ are unit energy consumption estimates from the RSUEC10 file, by year, housing type, and Census Division, and
- RSELAST is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and ϵ , the total short-term price elasticity.

Distributed Generation Submodule

The residential model includes a submodule (subroutine rdistgen) with explicit characterizations and penetration estimates for distributed electric generation technologies. The model is structured to allow for three technologies and can be readily expanded to include more if needed. Two technologies are characterized: photovoltaics and fuel cells.

Overview of the Technology Input File

The technology input file contains the following general categories of input data. These are described in more detail below.

- \$ Cost and performance of specific technologies (system capacity, cost per kw, efficiencies, etc)
- \$ Tax credits, if any apply to a particular technology (this allows tax credit policies to be included in the economic considerations).
- \$ The technology window of availability B technologies are assumed to be available for a fixed interval of time after which a new technology characterization becomes operable. This window is flexible in the number of years it represents, and new technologies don't necessarily have to be different from the previous version.

- \$ Economic assumptions (tax rate, inflation rate for projecting results in the cashflow model, loan parameters).
- \$ Program driven penetrations of technologies by census division. These are viewed as non-economic, supplemental to any economic penetrations.

Overview of the Cashflow Calculations

Technology penetration rates for distributed generating technologies installed in new construction are determined by how quickly an investment in a technology is estimated to recoup its flow of costs. This penetration rate is allowed to be as high as 30% for distributed technologies (if the investment pays back in 1 year or less). That is up to 30% of new construction in any one year can potentially include a distributed generation resource. For retrofitting distributed generation into existing construction, penetration is capped by assumption at a much smaller rate. The cap is the lesser of 0.25% or the penetration rate into new construction divided by 50 (the cap is in effect if penetration into new construction exceeds 12.5%).

For new construction, penetration rates are a direct function of the number of years required to achieve a cumulative positive cash flow for the investment. This approach is related to, but different from calculating the estimated years to simple payback concept. Simple paybacks are merely the investment cost divided by estimated annual savings. The cumulative positive cash flow approach incorporates financing assumptions in the calculations and can yield payback estimates that are faster than what would be computed as the simple payback (it can also yield infinite paybacks if the cumulative cash flow never becomes positive). The working assumption is that for new construction, investment in distributed generation technologies is rolled-in with the mortgage. The calculations for new construction assume the financing of such investments under residential mortgage rates supplied by the NEMS Macroeconomic Activity Module. In addition to energy savings, the timing and magnitude of tax effects are included in this calculation, thus allowing the modeling of tax policies.

For each potential investment decision, a cashflow analysis covering 30 years from the date of investment is made. The calculations include the costs (down payments, loan payments, maintenance costs and fuel costs) and returns (tax deductions, tax credits and energy cost savings) from the investment. In any particular year, the net of costs and returns can either be positive or

negative. If the return is positive, then the cumulative net cashflow increases. For current technologies the purchase costs and investment returns are such that the first year's cash flow is negative. Thus, the technology starts out with a negative year 1 cash flow which will then either increase or decrease based on the net returns. Tax credits which are modeled as one-time payments back to the consumer in year 2 of the investment (this assumes that a wait on average of 1 year to receive any tax credits because of filings occur after year end) can have a major effect on increasing the cumulative net cash flow. For example, if an investment in photovoltaics costs \$25,000, but it is financed with a 10% down payment at an interest rate of 7% for a term of 30 years, then by the end of the first year the loan-related costs will be \$4,313 B the \$2500 downpayment plus an annual loan amortization payment of \$1813 (rounded). Against this negative cash flow will be balanced reductions in electricity costs and from the second year on, tax deductions for residential mortgage interest payments. If there is also a residential tax credit for the investment (assume it is also 10%), then the initial down payment is recouped in year 2, and the energy cost savings and interest savings only have to recoup the mortgage payments.

The Penetration Function

The penetration function for new construction has a *logistic* shape (slow initial penetration, followed by a period of more rapid growth, ending with a tapering off effect). The driving effect for this penetration is the number of years calculated until a positive cumulative cashflow is achieved (in many cases, this may never occur, and the number of years is set to 30). The result is that as economic returns improve, the period required to meet the positive cumulative cashflow requirement is shortened and penetration increases.

Outputs to Residential Main Module and NEMS

In terms of the NEMS projections, investments in distributed generation avoid purchases of electricity from the *supply-side* of NEMS. If the investment is photovoltaic, renewable energy replaces energy input to electric utilities for the self-generated amounts. If generated by fuel cells or other fuel-consuming technology, utility consumption of fuel is replaced by residential fuel consumption. Fuel consuming technologies also generate waste heat which is assumed to be

partially captured and used to offset residential water heating energy use. Depending on a fuel consuming technology's performance characteristics, the substitution of self-generation for utility generation could increase primary energy consumption. For photovoltaics, primary energy consumption is lower than what would otherwise be projected.

The following equations detail the distributed generation submodule in a representative fashion.

First, the annual payment made due to the investment in distributed generation is calculated as:

$$PAYMENT_y = (EQCOST_{y,e} - DOWNPMNT_e) \left(\frac{INTRATE_y}{1 - (1 + INTRATE_y)^{-TERM}} \right) \quad (B-152)$$

where,

- $PAYMENT_y$ is the annual payment for the distributed generation equipment by year and equipment type,
- $EQCOST_{y,e}$ is the first cost of the distributed generation equipment by year and equipment type,
- $DOWNPMNT_e$ is the down payment made when the time of purchase,
- $INTRATE_r$ is the interest rate for the loan to purchase the equipment, and
- $TERM$ is the length of the loan.

Learning cost effects are modeled for emerging distributed generation technologies. Learning effects reduce projected installed costs as an emerging technology gains maturity from increasing cumulative shipments over time. Such effects are often referred to as stemming from learning-by-doing.¹ There are currently two emerging residential distributed generation technologies for which learning effects are included, photovoltaics and fuel cells.

$$EQCOST_{y,e} = MINIMUM \left(MENUUCOST_{y,e,\alpha} * CUMSHIP_{y,e}^{\beta} \right) \quad (B-153)$$

where,

ALPHA and BETA are technology-specific learning cost parameters,
 MENUUCOST_{y,e} is the cost of the technology from the technology input file, and
 CUMSHIP_{y,e} represents cumulative shipments for residential and commercial buildings combined.

Operationally, distributed generation technology costs for emerging technologies are represented as the minimum of an input menucost and an endogenous cost that incorporates learning effects. In equation B-160, the first term inside the minimum function, menucost, is merely the relevant installed cost read from the distributed generation technology input file. The second term inside of the minimum function is the calculated learning cost which models an inverse relationship between cumulative shipments and installed cost. Given the inverse relationship between estimated learning costs and cumulative shipments, installed equipmentcost can be lower than the menucost depending upon the magnitude of cumulative shipments.

In the learning cost calculation, $\alpha * cumship^{-\beta}$, alpha represents the cost of the first unit, and beta, the learning parameter (assumed to be greater than zero and less than 1) is read as part of the menu data from the distributed generation input file. The cumship variable is calculated as cumulative shipments prior to the start of the current model year. Since first unit costs are generally unobservable, the learning functions calculate a value for first unit cost that calibrates to the current installed costs for the technology given current cumulative shipments and the assumed value of beta.

¹For a review of the literature on learning costs as well as empirical results for buildings equipment see Richard G. Newell, "Incorporation of Technological Learning into NEMS Buildings Modules," Energy Information Administration, Washington, DC, September 29, 2000.

To calculate when a positive cash flow for the investment is achieved, a series of energy-related computations must be made. The amount of electricity generated from solar photovoltaic systems is given by:

$$ANNUALKWH_y = ELEFF_{y,e} * SOLARINS_r * SQRFT * LOSSFCT * XKW \quad (B-154)$$

where,

$ANNUALKWH_y$ is the system kilowatt hour generation by year,
 $ELEFF_{y,e}$ is the electrical conversion efficiency by year and equipment type,
 $SOLARINS_r$ is the solar insolation for photovoltaic units by region,
 $SQRFT_r$ is the size of the solar collectors in square feet by region,
 $LOSSFCT$ is the unit conversion losses (due to current), and
 XKW is the system kilowatt hour generation.

For technologies other than photovoltaic systems, the electricity generated is defined as:

$$ANNUALKWH_y = OPHOURS_{y,e} * AVAIL * LOSSFCT * XKW \quad (B-155)$$

where,

$OPHOURS_{y,e}$ is the number of hours of operation in a given year by equipment type, and
 $AVAIL$ is the percent of time the system is available base on outage rates.

These technologies also need fuel input (usually natural gas) to run the system. The amount of fuel needed is represented by:

$$GASINPUT_y = .003412 * \left(\frac{OPHOURS_{y,e} * AVAIL}{ELEFF} \right) * XKW \quad (B-156)$$

where,

$GASINPUT_{y,e}$ is the annual fuel consumption to run the generation equipment by year and equipment type,

For these systems, the waste heat generated from the system can be used to supplant the hot water heating load for the house. The waste heat generated and used for hot water heating is given as:

$$WASTEHT_y = (GASINPUT_{y,e} - .003412 * ANNUALKWH_e) * WHRECOVER \quad (B-157)$$

where,

$WASTEHT_y$ is the amount of waste heat generated for hot water heating in a given year,
 $ANNUALKWH_e$ is the amount of electricity generated by the generation equipment in a given year, and
 $WHRECOVER$ is the waste heat recovery factor.

Once all of the energy and financial equations are computed, the number of distributed generation technologies purchased can be calculated. The penetration function for each of the distributed generation technologies is given by:

$$PENRATE_{y,e} = XMAXPEN_e - \left(\frac{1}{XMAXPEN_e * e^{(XALPHA_e * (YEAR - 9 - PAYBACK_e))}} \right) \quad (B-158)$$

where,

$PENRATE_{y,e}$ is the penetration rate of the distributing generation technology by year and equipment type,
 $XMAXPEN_e$ is the maximum penetration for the distributing generation technology in a given year by equipment type,
 $XALPHA_e$ is a parameter that defines the shape of the penetration function,
 $YEAR$ is the current year of the model run, and
 $PAYBACK_e$ is the number of years to a positive cashflow for the investment by equipment type.

Fuel Consumption Totals

FUELCN (Fuel Consumption Totals Component)

The total residential energy consumption for the nation is computed by summing end use service consumption by fuel for each Census Division. The division by a million converts units from million Btu per year to trillion Btu per year. The factor $LEAPYR$ in each equation takes on the value of 1 in all years but leap years, when it has the value 366/365.

Natural Gas

$$RSFLCN_{y,ng,r} = \frac{HTRCON_{y,ng,r} + H2OCON_{y,ng,r} + CKCON_{y,ng,b,r} + GASINPUT_{y,r} + DRYCON_{y,ng,r} + COOLCN_{y,ng,r} + SHTCON_{y,ng,r} + APLCON_{y,ng,r}}{1000000} * LEAPYR \quad (B-159)$$

Electricity

$$RSFLCN_{y,el,r} = \frac{HTRCON_{y,el,r} + H2OCON_{y,el,r} + CKCON_{y,el,b,r} + REFCON_{y,r} + DRYCON_{y,el,r} + COOLCN_{y,el,r} + SHTCON_{y,el,r} + APCCON_{y,r} + FRZCON_{y,r} + CSWCON_{y,r} + DSWCON_{y,r} + LTCON_{y,r} + FANCON_{y,r} + PCCON_{y,r} + TVCON_{y,r} - ANNUALKWH_y}{1000000} * LEAPYR \quad (B-160)$$

Distillate

$$RSFLCN_{y,ds,r} = \frac{HTRCON_{y,ds,r} + H2OCON_{y,ds,r} + SHTCON_{y,ds,r} + APLCON_{y,ds,r}}{1000000} * LEAPYR \quad (B-161)$$

LPG

$$RSFLCN_{y,lp,r} = \frac{HTRCON_{y,lp,r} + H2OCON_{y,lp,r} + CKCON_{y,lp,b,r} + SHTCON_{y,lp,r} + APLCON_{y,lp,r}}{1000000} * LEAPYR \quad (B-162)$$

Kerosene

$$RSFLCN_{y,ks,r} = \frac{HTRCON_{y,ks,r} + SHTCON_{y,ks,r}}{1000000} * LEAPYR \quad (B-163)$$

Coal

$$RSFLCN_{y,cl,r} = \frac{SHTCON_{y,cl,r}}{1000000} * LEAPYR \quad (B-164)$$

Wood

$$RSFLCN_{y,wd,r} = \frac{HTRCON_{y,wd,r} + SHTCON_{y,wd,r}}{1000000} * LEAPYR \quad (B-165)$$

Geothermal

$$RSFLCN_{y,geo,r} = \frac{HTRCON_{y,geo,r} + COOLCN_{y,geo,r}}{1000000} * LEAPYR \quad (B-166)$$

National Total

$$RSFLCN_{y,US,r} = \sum_r (RSFLCN_{y,f,r}) \quad (B-167)$$

Appendix C: Key Computations and Equations

This section presents the detailed calculations used in each of the module components, couched in terms of the space heating end use, because it provides the best examples for generalization. Calculations for other end uses follow the space heating pattern, with different variable names. For more detail refer to Appendix B, where calculations are provided at the subroutine level. Table 3 shows the correspondence between the subscripts in the documentation and the subscripts in the FORTRAN source code.

Table 1-C Definitions of Subscripts

<u>Subscript in Documentation</u>	<u>Subscript in the FORTRAN Code</u>
r	R or D, refers to Census Division
t	Y, when Y is a year increment
f	F, fuel types
b	B, housing type
y	CURIYR or CURCALYR, the annual index
y-1	PREVYR, CURIYR-1, CURCALYR-1
eg	EQC, equipment class # within an end use (e.g., 1 - 11 for heat) RECCL, equipment class # from all end uses (currently 1 - 31)
egsw	EQCSW, equipment class # within an end use to switch to RECCLSW, equipment class # from all end uses to switch to
es	EQT, equipment type # within an end use RECTY, equipment type # from all end uses
v	Vintage of equipment (pre-2002, post-2001)

Please note the following conventions:

! The table of subscripts includes all of the major usages. In some minor instances,

additional subscripts are defined as needed.

- ! The equations follow the logic of the FORTRAN code very closely to facilitate an understanding of the code and its structure. In several instances, a variable appears on both sides of an equation. This is a FORTRAN programming device that allows a previous calculation to be updated (for example, multiplied by a factor) and re-stored under the same variable name (i.e., in the same memory location).

- ! The subscript, y , in the documentation refers to the year represented as 1990 through 2030. In the FORTRAN code, the subscripts for CURIYR represent array dimensions starting with an index of 1 to represent 1990, and CURCALYR represents the calendar year 1990 through 2030.

- ! Some variables are documented as having a $A_{y@}$ dimension when in fact they do not. The most common instances are for the variables, LFCY, OPCOST, SA, SHARES_N, and SHARES_R. These variables are calculated on an annual basis, but are retained only for the current year. The $A_{y@}$ dimension is used in the documentation to highlight 1) that the calculations do vary by year, and 2) to indicate the current year in formulas to avoid confusion.

- ! Summations over all relevant variables are usually written without upper and lower range limits on the summation signs.

- ! Unless otherwise stated, the range of y for an equation is 1990 through 2030.

Housing Stock Component

To calculate the number of existing dwellings, the Housing Stock Component adds newly-built homes to the inventory and subtracts demolitions. Housing construction starts are obtained from regional outputs of the MAM. Existing base year housing stock is designated as the "pre-2002" vintage, and new additions to the housing stock are referred to as the "post-2001" vintage. Additions and replacements for both housing vintages are tracked through the forecast period. Houses are removed from the stock at a constant rate over time. The survival rates for the

household types (HDR_b) are as follows:

Single-Family Homes: $HDR_1 = 0.997$

Multifamily Homes: $HDR_2 = 0.998$

Mobile Homes: $HDR_3 = 0.975$

The surviving 2001 housing stock is defined by

$$\begin{aligned} EH_{y,b,r} &= RECS \text{ data, if } y = 2001 \\ EH_{y,b,r} &= EH_{y-1,b,r} * HDR_b, \text{ if } y > 2001 \end{aligned} \tag{C-1}$$

where,

$EH_{y,b,r}$ is 2001 housing stock surviving by year, housing type and Census Division.

New houses are added to the stock each year, as defined by the NEMS Macroeconomic Module. The total number of new additions in a given year is defined as:

$$NH_{y,r} = MC_HUSPS1_{y,r} + MC_HUSPS2A_{y,r} + MC_HUSMFG_{y,r} \tag{C-2}$$

where,

$NH_{y,r}$ is total new housing added by year and Census Division,
 $MC_HUSPS1_{y,r}$ is single-family housing added by year and Census Division,
 $MC_HUSPS2A_{y,r}$ is multifamily housing added by year and Census Division,
 $MC_HUSMFG_{y,r}$ is mobile home shipments added by year and Census Division,

Technology Choice Component

The Technology Choice Component uses a log-linear function to estimate technology market shares. The module is able to calculate market shares based on consumer behavior as a function of bias, capital costs, and operating costs or as a function of life-cycle costs.

The ten major services modeled are:

Space Heating
 Space Cooling
 Water Heating
 Cooking
 Clothes Drying
 Food Refrigeration
 Food Freezing
 Clothes Washers
 Dishwashers
 Lighting

Color televisions, personal computers, and other appliance decisions are modeled differently from the major services listed above.

New equipment operating costs are computed by the expression,

$$OPCOST_{y,es,b,r,v} = PRICES_{f,r,y} * EQCUEC_{y,eg,b} * HDDFACT_{r,y} * RTEFFAC_{eg,v} \quad (C-3)$$

where,

$OPCOST_{y,es,b,r,v}$ is the operating cost for the specific equipment type by year, housing type, and Census Division, and vintage,
 $PRICES_{f,r,y}$ is the fuel prices for the equipment by fuel, by region and forecast year,
 $EQCUEC_{r,eg,b}$ is the unit energy consumption by Census Division, equipment class and housing type,
 $HDDFACT_{r,y}$ is a factor, the ratio between heating degree days in the current year and in the base year, for adjusting for abnormal weather in either the base year or in the current year, and
 $RTEFFAC_{eg,v}$ is the efficiency adjustment for the general equipment class and vintage.

The consumer is allowed to choose among the various levels of cost and efficiency for a given class of equipment. Electric heat pumps are an example of an equipment class (denoted by eg).

Equipment type (denoted by es) refers to the same class of equipment with different efficiency ratings (e.g., high vs low efficiency electric heat pumps).

EQCOST is a time-dependant function for computing the installed capital cost of equipment in new construction and the retail replacement cost of equipment in existing housing. It is called if the cost trend switch COSTTRSW = 1 in COMMON RTEK (which is the default). Its mathematical description is as follows:

$$\begin{aligned} EQCOST_{es,y,CAP} &= RTEQCOST_{es}, \text{ if } RTMATURE_{es} = MATURE \\ EQCOST_{es,y,RET} &= RTRECCOST_{es}, \text{ if } RTMATURE_{es} = MATURE \end{aligned} \tag{C-4}$$

$$\begin{aligned} EQCOST_{es,y,CAP} &= \frac{RTEQCOST_{es} * 2 * d}{1 + \left(\frac{y - y_1}{y_0 - y_1}\right)^y} + (1 - d) * RTEQCOST_{es}, \text{ if } RTMATURE_{es} = ADOLESCENT \\ EQCOST_{es,y,RET} &= \frac{RTRECCOST_{es} * 2 * d}{1 + \left(\frac{y - y_1}{y_0 - y_1}\right)^y} + (1 - d) * RTRECCOST_{es}, \text{ if } RTMATURE_{es} = ADOLESCENT \end{aligned} \tag{C-5}$$

$$\begin{aligned} EQCOST_{es,y,CAP} &= \frac{RTEQCOST_{es} * d}{1 + \left(\frac{y - y_1}{y_0 - y_1}\right)^y} + (1 - d) * RTEQCOST_{es}, \text{ if } RTMATURE_{es} = INFANT \\ EQCOST_{es,y,RET} &= \frac{RTRECCOST_{es} * d}{1 + \left(\frac{y - y_1}{y_0 - y_1}\right)^y} + (1 - d) * RTRECCOST_{es}, \text{ if } RTMATURE_{es} = INFANT \end{aligned} \tag{C-6}$$

where,

EQCOST_{es,y,ctype} is time-dependant installed capital cost of equipment in new construction or the retail replacement cost of equipment in existing housing,

ctype tells function type of equipment cost to return,

CAP = Return installed capital cost in new construction,

RET = Return retail replacement cost in existing housing,

RTMATURE_{es} Technology maturity description,

MATURE = No further equipment cost reductions expected,

ADOLESCENT = Major cost reductions occurred before base year,

INFANT = All cost reductions expected after first year available,

RTEQCOST_{es} Installed wholesale capital cost in \$2004 per unit for new homes, remains constant for MATURE technologies only (used when ctype = CAP),

RTRECCOST_{es} Retail capital cost in \$2004 per unit for replacements, remains constant for MATURE technologies only (used when ctype = RET),

y₀ is the year of inflection of cost trend,
RTINITYR_{es} if ADOLESCENT,
RTCOSTP1_{es} if INFANT,

y₁ is the year cost decline began,
RTCOSTP1_{es} if ADOLESCENT,
RTINITYR_{es} if INFANT,

d is the total possible proportional decline in equipment cost,
RTCOSTP3_{es},
from y₀ onward if ADOLESCENT,
from y₁ onward if INFANT,

is the logistic curve shape parameter, RTCOSTP2_{es}.

The module includes the option to use life-cycle costing to calculate market share weights. The life cycle cost calculation is,

$$LFCY_{y,es,b,r,v} = CAPITAL_{es} + OPCOST_{y,es,b,r,v} * \left(\frac{1 - (1 + DISRT)^{-HORIZON}}{DISRT} \right) \quad (C-7)$$

where,

LFCY_{y,es,b,r,v} is the life cycle cost of an equipment type by forecast year, housing type, and Census Division, and vintage,

CAPITAL _{es}	is the installed capital cost of an equipment type based on calling EQCOST with RTEQCOST _{es} ,
OPCOST _{y,es,b,r,v}	is the operating cost for the specific equipment type by year, housing type, and Census Division, and vintage,
HORIZON	is the number of years into the future that is used to compute the present value of future operating cost expenditures presently set to seven years, and
DISRT	is the discount rate applied to compute the present value of future operating costs presently at 20 percent.

A weight for each equipment class is calculated to estimate the market share for each of the 11 heating systems for new construction based on the cost factors computed above. The functional form is expressed as,

$$HEATSYS_{y,eg,b,r} = e^{(RFTBIAS_{eg} + RFTCBETA_{eg} * LFCY_{y,eg,b,r,v})} \quad (C-8)$$

where,

HEATSYS _{y,eg,b,r}	is the equipment weight for a heating equipment class for new housing by year, housing type, and Census Division,
RTFCBIAS _{eg}	is a consumer preference parameter that fits the current market share to historical shipment data,
LFCY _{y,eg,b,r,v}	is the life cycle cost for the equipment class by year, housing type, and Census Division, and vintage, and
RTFCBETA _{eg}	is a parameter value of the log-linear function.

The sum over the heating equipment classes gives the total weight for all of the heating equipment:

$$SYSTOT_{y,b,r} = \sum_{eg=1}^{eg=11} HEATSYS_{y,eg,b,r} \quad (C-9)$$

where,

$SYSTOT_{y,b,r}$ is the sum of equipment class weights for the all equipment classes.

The equipment class fuel share is computed by

$$HTYSSHR_{y,eg,b,r} = \frac{HEATSYS_{y,eg,b,r}}{SYSTOT_{y,b,r}}, \text{ if } SYSTOT_{y,b,r} > 0$$

$$HTYSSHR_{y,eg,b,r} = 0, \text{ otherwise}$$
(C-10)

where,

$HTYSSHR_{y,eg,b,r}$ is the equipment class fuel share by year, building type, and Census Division.

For each equipment type within each class, a weight is calculated based on the cost factors computed above. The functional form is expressed as,

$$EQWTN_{y,es,b,r} = e^{(RTECBTA1_{es} * CAPITAL_{es} + RTECBTA2_{es} * OPCOST_{y,es,b,r,1})}$$
(C-11)

$$EQWTR_{y,es,b,r} = e^{(RTECBTA1_{es} * CAPITAL_{es} + RTECBTA2_{es} * OPCOST_{y,es,b,r,2})}$$
(C-12)

where,

$EQWTN_{y,es,b,r}$ is the equipment weight for new equipment type by year, housing type, and Census Division,

$EQWTR_{y,es,b,r}$ is the equipment weight for replacement equipment type by year, housing type, and Census Division,

$OPCOST_{y,es,b,r,v}$ is the operating cost for the equipment type by year, housing type, Census Division, and vintage (1=new, 2=existing)

$RTECBTA1_{es}$, are parameter values of the same fit.

$RTECBTA2_{es}$

Sums over the equipment types within each class give total weights for the equipment classes:

$$TOTEWTN_{y,eg,b,r} = \sum_{es=loweff}^{es=hieff} EQWTN_{y,es,b,r} \quad (C-13)$$

$$TOTEWTR_{y,eg,b,r} = \sum_{es=loweff}^{es=hieff} EQWTR_{y,es,b,r} \quad (C-14)$$

where,

$TOTEWTN_{y,eg,b,r}$ is the sum of weights for the new equipment types within equipment classes,

$TOTEWTR_{y,eg,b,r}$ is the sum of weights for the replacement equipment types within equipment classes.

The equipment type fuel share is computed by

$$EQFSHRN_{y,es,b,r} = \frac{EQWTN_{y,es,b,r}}{TOTEWTN_{y,eg,b,r}}, \text{ if } TOTEWTN_{y,eg,b,r} > 0$$

$$EQFSHRN_{y,es,b,r} = 0, \text{ otherwise} \quad (C-15)$$

$$EQFSHRR_{y,es,b,r} = \frac{EQWTR_{y,es,b,r}}{TOTEWTR_{y,eg,b,r}}, \text{ if } TOTEWTR_{y,eg,b,r} > 0$$

$$EQFSHRR_{y,es,b,r} = 0, \text{ otherwise} \quad (C-16)$$

where,

$EQFSHRN_{y,es,b,r}$ is the new equipment type fuel share by year, building type, and Census Division.

$EQFSHRR_{y,es,b,r}$ is the replacement equipment type fuel share by year, building type, and Census Division.

This value is multiplied by the market share of the equipment type to yield the new market share for the equipment type. The relationship is expressed as,

$$NEQTSHR_{y,es,b,r} = EQFSHRN_{y,es,b,r} \quad (C-17)$$

$$REQTSHR_{y,es,b,r} = EQFSHRR_{y,es,b,r} \quad (C-18)$$

where,

$NEQTSHR_{y,es,b,r}$ is the new market share for the new equipment type by year, housing type, and Census Division.

$REQTSHR_{y,es,b,r}$ is the new market share for the replacement equipment type by year, housing type, and Census Division.

The weighted average equipment efficiencies for the equipment types within each equipment class are then computed as,

$$WTEQCEFFN_{y,eg,b,r} = \frac{\sum_{es} \left[\frac{NEQTSHR_{y,es,b,r}}{RTEQEFF_{y,es}} \right]}{\sum_{es} NEQTSHR_{y,es,b,r}}, \text{ if } \sum_{es} NEQTSHR_{y,es,b,r} > 0 \quad (C-19)$$

$$WTEQCEFFN_{y,eg,b,r} = \frac{1}{RTBASEFF_{eg}}, \text{ otherwise}$$

$$WTEQCEFFR_{y,eg,b,r} = \frac{\sum_{es} \left[\frac{REQTSHR_{y,es,b,r}}{RTEQEFF_{y,es}} \right]}{\sum_{es} REQTSHR_{y,es,b,r}}, \text{ if } \sum_{es} REQTSHR_{y,es,b,r} > 0 \quad (C-20)$$

$$WTEQCEFFR_{y,eg,b,r} = \frac{1}{RTBASEFF_{eg}}, \text{ otherwise}$$

where,

$WTEQCEFFN_{y,eg,b,r}$ is the weighted average efficiency of new equipment type within each equipment class by year, housing type, and Census Division,

$RTEQEFF_{y,es}$ is the efficiency of the equipment type,

$RTBASEFF_{eg}$ is the 2001 stock-average efficiency of the equipment class, and

$WTEQCEFFR_{y,eg,b,r}$ is the weighted average efficiency of replacement equipment types within each equipment class by year, housing type, and Census Division.

Appliance Stock Component

The appliance stock component tracks the major energy-consuming equipment by housing vintage and equipment vintage for additions, replacements, and surviving equipment.

Table 4 depicts the equipment accounting methodology. For simplicity, this discussion omits the details of the variable subscripts, which is explained later. The equipment accounting system partitions equipment into two major categories, depending on the vintage of the housing unit: equipment installed in housing units built before 2002 (at the beginning of a model run) and equipment added to new housing units (those added during the model run). Equipment is further partitioned into three additional survival/replacement categories: equipment that survives, equipment purchased to replace other equipment, and equipment purchased for new construction. The categorization of equipment by housing vintage and surviving/replacement type results in seven categories of equipment that are tracked.

Table C-2. Heating Equipment, UEC and Housing Shell Accounting Scheme

Housing Units that Existed in 2001			Housing Units Added From 2002 through 2030		
Equipment	UEC	Shell	Equipment	UEC	Shell
EQCRP90RP	EQCNUEC	EHSHELL			
EQCRP90	EQCRUEC	EHSHELL			
EQCSR90	EQCAUEC	EHSHELL	EQCADD	EQCNUEC	NHSHELL
			EQCREP	EQCNUEC	AHSHELL
EQCESE	EQCSUEC	EHSHELL	EQCSUR	EQCAUEC	AHSHELL

The equipment categories for pre-2002 housing units are:

EQCESE denotes the surviving pre-2002 equipment stock in pre-2002 homes,
 EQCSR90 represents equipment stock in pre-2002 homes that has been replaced after
 2001 and that still survives, and

EQCRP90 is current-year replacement equipment for pre-2002 housing.

EQCRP90RP is current-year replacements for the EQCRP90 equipment.

Note: EQCND90 is the sum of EQCESE, EQCSR90, EQCRP90RP, and EQCRP90.

The equipment categories for post-2001 housing units are:

EQCSUR denotes equipment that has been modeled as added and still survives,
EQCREP is equipment that has been modeled as added and is in need of replacement in
the current year, and
EQCADD is equipment for housing units added in the current year.

Unit energy consumption (UEC) is tracked for equipment added by category of housing unit:

EQCUEC is the average UEC for the original 2001 equipment in housing units that existed in
2001,
EQCSUEC is the average UEC for surviving equipment in pre-2002 housing units,
EQCAUEC is the average UEC for surviving equipment in post-2002 housing units,
EQCRUEC is the UEC for all equipment added in the current year to replace pre-2002
equipment, and
EQCNUEC is the UEC for all equipment added in the current year, other than EQCRP90.

Shell indices are modeled for three categories of housing units:

EHSHELL is the shell index applicable to pre-2002 housing units,
AHSHELL is the shell index applicable to housing units added in all but the current year, and
NHSHELL is the shell index for housing units added in the current year.

For example, in accounting for the heating energy consumption of surviving equipment installed in pre-2002 housing units, the equipment stock, HTESE, would be multiplied by the unit energy consumption, HTUEC, and by the shell index EHSHELL. This explanation was designed to account for heating equipment, but the accounting principle is used throughout the residential module. For the pre-2002 housing example above, the appropriate space cooling variables would be CLESE, CLUEC and ECSHELL. The shell indices apply only to heating and cooling, thus, for example, for refrigeration the accounting requires only RFESE and RFUEC.

The housing decay rate is used in conjunction with the equipment survival rate to determine the number of equipment units that survive/retire each year in the forecast. A linear function is used to model the retirement of equipment after a minimum age is reached up to its maximum age.

The linear function is expressed by,

$$\begin{aligned}
 SVRTE_{y-t, L_{\min}, L_{\max}} &= 1.0 \\
 SVRTE_{y-t, L_{\min}, L_{\max}} &= \frac{L_{\max} - (y-t)}{L_{\max} - L_{\min}}, \text{ if } L_{\min} < y-t < L_{\max} \\
 SVRTE_{y-t, L_{\min}, L_{\max}} &= 0.0, \text{ if } y-t \geq L_{\max}
 \end{aligned}
 \tag{C-21}$$

where,

$SVRTE_{y-t, L_{\min}, L_{\max}}$ is the equipment survival function,
 $y-t$ is the age of the equipment,
 L_{\min} is the minimum equipment lifetime in years, and
 L_{\max} is the maximum equipment lifetime in years.

Equipment in post-2001 (new) houses is the product of the number of new houses and the market share of each equipment class. This is expressed as,

$$EQCADD_{y,t, eg, b, r} = HSEADD_{y, b, r} * SHARES_{y, eg, b, r} \tag{C-22}$$

where,

$EQCADD_{y,t, eg, b, r}$ is the number of post-2001 vintage equipment units added to new houses in year y , vintaged to year t , by housing type and Census Division,
 $HSEADD_{y, b, r}$ is the number of new housing units constructed in the forecast year by housing type and Census Division,
 $SHARES_{y, eg, b, r}$ is the current year market share for each equipment class by housing type and Census Division.

The number of replacements for the post-2001 equipment units in post-2001 houses is calculated as:

$$EQCREP_{y,t, eg, b, r} = \sum_{t=2002}^{t=y-1} \left(EQCADD_{t, eg, b, r} * HDR_b^{y-t} * (1 - SVRTE_{eg}) \right) \tag{C-23}$$

where,

$EQCREP_{y,t, eg, b, r}$ is the number of equipment replacements of post-2001 equipment in post-

HDR_b is the housing survival rate by housing type, and
 $y-t$ represents the age of the equipment.

Post-2001 replacement units required for pre-2002 houses in the current year are calculated as,

$$EQCRP90_{y,t,eg,b,r} = EQCESE_{2001,eg,b,r} * EQCRET_{y,eg} * HDR_b \quad (C-24)$$

where,

$EQCRP90_{y,t,eg,b,r}$ is the number of replacement units required for pre-2002 homes in year y , vintaged to year t by housing type and Census Division,
 $EQCRET_{y,eg}$ is the equipment retirement rate for pre-2002 houses by forecast year,
 $EQCESE_{2001,eg,b,r}$ is the pre-2002 vintage stock of equipment in pre-2002 vintage houses in 2001 by housing type and Census Division.

Within the forecast period, some of the EQCRP90 will also need to be replaced. This is represented as,

$$EQCRP90RP_{y,t,eg,b,r} = \sum_{t=2002}^{t=y-1} (EQCRP90_{t,eg,b,r} + EQCRP90RP_{y,t,eg,b,r}) * (1 - SVRTE_{eg}) \quad (C-25)$$

where,

$EQCRP90RP_{y,t,eg,b,r}$ is the number of replacement units required to replace post-2001 equipment in pre-2002 houses by forecast year, housing type and Census Division.

Next, a series of calculations is made to determine the number of replacement units that switch to a different technology type. For each type of replacement ($EQCRP90$, $EQCRP90RP$, $EQCREP$), first calculate the number of eligible switches (single-family houses only).

$$ELIGIBLE_{y,eg,b,r} = \sum_{eg} (EQCRP90_{y,t,eg,b,r} + EQCRP90RP_{y,t,eg,b,r} + EQCREP_{y,t,eg,b,r}) * (SWFACT_{eg}) \quad (C-26)$$

where,

$ELIGIBLE_{y,eg,b,r}$ is the number of replacements eligible to switch technology types by housing type and Census Division, and
 $SWFACT_{eg}$ is the fraction who may switch from equipment class eg .

The Δ switching@ weight for each equipment type is calculated as,

$$RPWEIGHT_{y,egsw,b,r} = e^{(RTSWBIAS_{egsw} + RTSWBETA_{egsw} * (LFCY_{y,egsw,b,r,v} + RPINSCOST_{eg,egsw}))} \quad (C-27)$$

Summing over all equipment types,

$$TOTSH_{y,b,r} = \sum_{egsw=1}^{egsw=11} RPWEIGHT_{y,egsw,b,r} \quad (C-28)$$

allows for shares summing to 100 percent.

$$RPSHARE_{y,egsw,b,r} = \frac{RPWEIGHT_{y,egsw,b,r}}{TOTSH_{y,b,r}}, \text{ if } TOTSH_{y,b,r} > 0 \quad (C-29)$$

$$RPSHARE_{y,egsw,b,r} = 0, \text{ otherwise}$$

where,

$RPSHARE_{y,egsw,b,r}$ is the share that will switch to equipment class $egsw$ on replacement by year, housing type, and Census Division,
 $RPWEIGHT_{y,egsw,b,r}$ is the weight assigned to each equipment class $egsw$ by year, housing type, and Census Division,
 $RTSWBIAS_{egsw}$ is the consumer preference parameter for switching to this equipment class,
 $RTSWBETA_{egsw}$ is the parameter value for the same fit,
 $LFCY_{y,essw,b,r,v}$ is the lifecycle cost of the equipment type switching to ($essw$) by year, building type, region, and vintage,
 $RPINSCOST_{eg,egsw}$ is the cost of switching from equipment class eg to $egsw$ on switching,

TOTSH_{y,b,r} and is the sum of the switch weights.

The equipment classes are then reconciled by A_{from@} and A_{to@} switching categories and redistributed to the correct equipment class.

The surviving post-2001 vintage equipment in pre-2002 houses is computed as,

$$EQCSR90_{y,t,eg,b,r} = \sum_{t=2002}^{t=y-1} \left(EQCRP90_{t,y,eg,b,r} + EQCRP90RP_{t,y,eg,b,r} \right) * SVRTE_{eg,y-t,L_{min},L_{max}} * HDR_b^{y-t} \quad (C-30)$$

where,

EQCSR90_{y,eg,b,r} is the equipment stock in pre-2002 homes that has been replaced after 2001 and still survives by housing type and Census Division,
 EQCRP90_{t,y,eg,b,r} is the number of replacement (post-2001 vintage) equipment units demanded each year in pre-2002 houses by housing type and Census Division,
 EQCRP90RP_{t,y,eg,b,r} is the number of replacements of the EQCRP90 equipment units demanded each year by housing type and Census Division,
 SVRTE_{eg,y-t,L_{min},L_{max}} is the equipment survival function,
 HDR_b is the housing survival rate by housing type, and
 y-t represents the age of the equipment.

Surviving post-2001 equipment, originally purchased as additions or replacements in post-2001 houses, is calculated as,

$$EQCSUR_{y,eg,b,r} = \sum_{t=2002}^{t=y-1} \left(EQCADD_{t,eg,b,r} + EQCREP_{t,eg,b,r} \right) * SVRTE_{eg,y-t,L_{min},L_{max}} * HDR_b^{y-t} \quad (C-31)$$

where,

EQCSUR_{y,eg,b,r} is the surviving post-2001 equipment purchased as additions or replacements in post-2001 houses by housing type and Census Division,

EQCADD_{t,eg,b,r} is the quantity of post-2001 vintage equipment added to post-2001 houses by forecast year, housing type and Census Division,

SVRTE_{eg,y-t,Lmin,Lmax} is the equipment survival function,

EQCREP_{t,eg,b,r} is the number of equipment replacements of post-2001 equipment in post-2001 houses, and

y-t represents the age of the equipment.

Shell Integrity Component

The shell integrity component uses three indices to capture the increases in the energy efficiency of building shells over time. One index corresponds to the pre-2002 housing stock, and two indices correspond to the post-2001 stock, one for housing constructed in the current year and the other for the average post-2001 stock. The existing shell index is adjusted each year to account for fuel price increases (decreases have no effect on shell integrity, i.e., shell efficiency increases as price increases) and technology improvements. The shell index for newly-constructed homes is based on the choice of HVAC system, which includes the shell characteristics represented as an index.

An important part of shell integrity is the quality of windows. In the Energy Policy Act, there are regulations that require that all new windows be labeled with an index that describes their insulation properties. These regulations will be phased in over a period of years, beginning in 1995. The residential module evaluates the impacts of these regulations by means of an annual input variable, EPWINPCT_y, that gives the proportion of existing houses expected to be subject to window labeling. This quantity, when multiplied by the fraction of heat savings expected to be afforded by labeled windows, currently set at .08, gives the expected savings rate due to window labeling, EPACTH_y.

The existing housing heating shell index is calculated as,

$$\begin{aligned}
 EHSHELL_{y,f,r,b} &= EHSHELL_{y-1,f,r,b}, \text{ if } EHSHELL_{y,f,r,b} > EHSHELL_{y-1,f,r,b} \\
 EHSHELL_{y,f,r,b} &= LIMIT, \text{ if } EHSHELL_{y,f,r,b} > LIMIT \\
 EHSHELL_{y,f,r,b} &= EHSHELL_{RECSYEAR,f,r,b} * RSELAST_{y,f,\alpha 2,ef1,ef2,ef3,RECSYEAR} * TECHG_{e,r,b} * (1 - EPACTH_y) \text{ otherwise}
 \end{aligned}
 \tag{C-322}$$

where,

- EHSHELL_{y,f,r,b} is the shell integrity index for existing housing by year, fuel, Census Division, and building type,
- LIMIT limits the maximum shell index efficiency to 0.3 (i.e., maximum shell efficiency is limited to a 70-percent improvement on the base year value), and
- RSELAST is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and ϵ , the total short-term price elasticity,
- TECHG_{1,d,b} is a parameter that represents the annual increase in existing shell integrity due to technology improvements, and
- EPACTH_y is the projected national fractional savings in heating energy consumption from the EPACT window labeling program in year y, from the RMISC file.

The new housing heating shell index is calculated as,

$$NHSHELL_{y,f,r,b} = \sum_{t=2002}^{t=y-1} (EQFSHRN_{y,es,b,r} * SHELLEFF_{y,es,b,r}) \quad (C-33)$$

where,

- NHSHELL_{y,f,r,b} is the new housing units shell integrity index by year, fuel, Census Division, and building type, and
- SHELLEFF_{y,es,b,r} is the shell integrity factor associated with each HVAC package available.

The average post-2001 housing heating shell index is calculated as,

$$AHSHELL_{y,f,r,b} = \frac{\sum_{eg} [NHSHELL_{y,r,r,b} * EQCADD_{y,eg,b,r} + AHSHELL_{y-1,f,r,b} * (EQCREP_{y,eg,b,r} + EQCSUR_{y,eg,b,r})]}{\sum_{eg} [EQCADD_{y,eg,b,r} + EQCREP_{y,eg,b,r} + EQCSUR_{y,eg,b,r}]} \quad (C-344)$$

where,

- AHSHELL_{y,f,r,b} is the average post-2001 heating shell index by year, fuel, Census Division, and building type, equal to NHSHELL in 2002,
- NHSHELL_{y,f,r,b} is the new housing units shell integrity index by year, fuel, Census Division, and building type,

- EQCADD_{y,eg,b,r} is the number of equipment units installed in new construction by forecast year, housing type and Census Division,
- EQCREP_{y,eg,b,r} is the number of equipment replacements of post-2001 equipment in post-2001 houses, and
- EQCSUR_{y,eg,b,r} is the surviving post-2001 equipment purchased as additions or replacement in post-2001 houses by forecast year, housing type and Census Division.

In addition to the calculation shown above, the module places two additional restrictions upon AHSHELL_{y,f,r,b}: it may never increase, and it must not fall below LIMIT. If ever AHSHELL_{y,r,r,b} is calculated to increase, its value is set to the prior year's value; if it falls below LIMIT, it is set equal to LIMIT.

Consumption and UEC Component

Final end-use fuel consumption is determined by the fuels demanded by the equipment to provide households with the demanded services. For each equipment class, the UEC for new equipment, replacement equipment, and the average of all equipment is computed. New equipment UEC values are calculated as:

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFN_{y,eg,b,r} * RTBASEFF_{2001,eg} * HDDFACT_{y,r} * SQFTADJ_{y,b,r}, \text{ if } WTEQCEFFN_{y,eg,b,r} > 0 \quad (C-35)$$

$$EQCNUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * HDDFACT_{y,r} * SQFTADJ_{y,b,r}, \text{ otherwise}$$

where,

- EQCNUEC_{y,eg,b,r} is the unit energy consumption for new equipment by forecast year, housing type and Census Division,
- WTEQCEFFN_{y,eg,b,r} is the equipment class efficiency weighted by the market share of the specific equipment as computed in the logistic function in the technology choice component by housing type and Census Division,
- RTBASEFF_{2001,eg} is the 2001 stock-average efficiency of the equipment class,
- EQCUEC_{r,eg,b} is unit energy consumption for original 2001 stock of the equipment class by Census Division and housing type,
- HDDFACT_{y,r} is the heating degree day adjustment factor by Census Division to

SQFTADJ_{y,b,r} correct to normal weather relative to the RECS survey year, and is the adjustment for increasing floor area of new houses.

Replacement equipment UEC values are calculated as:

$$EQCRUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * WTEQCEFFR_{y,eg,b,r} * RTBASEFF_{2001,eg} * HDDFACT_{y,r}, \text{ if } WTEQCEFFR_{y,eg,b,r} > 0$$

$$EQCRUEC_{y,eg,b,r} = EQCUEC_{r,eg,b} * HDDFACT_{y,r}, \text{ otherwise}$$

(C-366)

where,

EQCRUEC_{y,eg,b,r} is the unit energy consumption for replacement equipment by housing type and Census Division,

RTBASEFF_{2001,eg} is the efficiency of the weighted average of retiring units from the 2001 existing stock, and

WTEQCEFFR_{y,eg,b,r} is the replacement equipment efficiency weighted by the market share of the specific equipment as computed in the logistic function in the technology choice component by housing type and Census Division.

And the UEC for the surviving stock must be adjusted, according to:

$$EQCSUEC_{r-1,eg,b,r} = EQCUEC_{r,eg,b} * HDDFACT_{y,r} * \frac{RTBASEFF_{2001,eg}}{RTBASEFF_{y,eg}}$$

(C-37)

where,

EQCSUEC_{y,eg,b,r} is the average unit energy consumption of the original 2001 equipment stock that remains after the replacements have taken place.

The average UEC for all equipment is calculated as:

$$\begin{aligned}
EQCAUEC_{y, eg, b, r} &= EQCNUEC_{y, eg, b, r} * HDDFACT_{y, r}, \text{ if } y = 2001 \\
EQCAUEC_{y, eg, b, r} &= EQCNUEC_{y, eg, b, r}, \text{ if the equipment stock } \leq 0 \\
&\quad (EQCREP_{y, eg, b, r} + EQCADD_{y, eg, b, r} + EQCRP90RP_{y, eg, b, r}) * EQCNUEC_{y, eg, b, r} \\
&\quad + (EQCSR90_{y, eg, b, r} + EQCSUR_{y, eg, b, r}) * EQCAUEC_{y-1, eg, b, r} \\
EQCAUEC_{y, eg, b, r} &= \frac{EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r}}{EQCREP_{y, eg, b, r} + EQCADD_{y, eg, b, r} + EQCRP90RP_{y, eg, b, r} + EQCSR90_{y, eg, b, r} + EQCSUR_{y, eg, b, r} + EQCRP90_{y, eg, b, r}}, \text{ otherwise}
\end{aligned} \tag{C-388}$$

where:

$EQCAUEC_{y, eg, b, r}$ is the average unit energy consumption for all post-2001 equipment categories.

The final step of this algorithm is to calculate consumption for the service category. This is accomplished in two steps. The first year of the forecast is computed initially as,

$$HTRCON_{y=2002, f, r} = \sum_b \sum_{eg} \left[\begin{aligned} &EQCESE_{y, eg, b, r} * ECQCUEC_{eg, b, r} * EHSHELL_{y, f, r} \\ &+ EQCADD_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} * NHSHELL_{y, f, r} \\ &+ EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r} * EHSHELL_{y, f, r} \end{aligned} \right] * RSELAST_{f, r, \alpha, EF1, EF2, EF3, 2001} \tag{C-39}$$

and subsequent consumption as,

$$HTRCON_{y, f, r} = \sum_b \sum_{eg} \left[\begin{aligned} &EQCESE_{y, eg, b, r} * ECQCUEC_{eg, b, r} * EHSHELL_{y, f, r} \\ &+ EQCADD_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} * NHSHELL_{y, f, r} * RBN_{y, eg, b, r} \\ &+ EQCRP90_{y, eg, b, r} * EQCRUEC_{y, eg, b, r} * EHSHELL_{y, f, r} * RBR_{y, eg, b, r} \\ &+ EQCRP90RP_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} * EHSHELL_{y, f, r} * RBN_{y, eg, b, r} \\ &+ EQCSR90_{y, eg, b, r} * EQCAUEC_{y, eg, b, r} * EHSHELL_{y, f, r} * RBA_{y, eg, b, r} \\ &+ EQCREP_{y, eg, b, r} * EQCNUEC_{y, eg, b, r} * AHSHELL_{y, f, r} * RBN_{y, eg, b, r} \\ &+ EQCSUR_{y, eg, b, r} * EQCAUEC_{y, eg, b, r} * AHSHELL_{y, f, r} * RBA_{y, eg, b, r} \end{aligned} \right] * RSELAST_{f, r, \alpha, EF1, EF2, EF3, 2001} \tag{C-390}$$

where,

$HTRCON_{y, f, r}$ is heating energy consumption by year, fuel type, and region,

$RSELAST$ is the short-term price elasticity function with distributed lag weights EF1, EF2, and EF3, and α , the total short-term price elasticity, and

the rebound effect associated with increasing equipment efficiency for a particular equipment class causes a corresponding change in the price elasticity for the class are represented as:

$$RBN_{r,eg,b,r} = WTEQCEFFN_{y,eg,b,r} * RTBASEFF_{2001,eg}^{\alpha_1} \quad (C-40)$$

$$RBR_{r,eg,b,r} = WTEQCEFFR_{y,eg,b,r} * RTBASEFF_{2001,eg}^{\alpha_1} \quad (C-41)$$

$$RBA_{r,eg,b,r} = WTEQCEFFA_{y,eg,b,r} * RTBASEFF_{2001,eg}^{\alpha_1} \quad (C-42)$$

where,

$RBA_{y,eg,b,r}$ is the rebound effect factor for surviving equipment,

$RBR_{y,eg,b,r}$ is the rebound effect factor for replacement equipment, and

$RBN_{y,eg,b,r}$ is the rebound effect factor for new equipment.

α_1 is the rebound effect elasticity, presently valued at -0.15.

Appendix D: Data Sources and Input Parameters

The Technology Choice Component requires extensive data describing end-use technologies. Equipment costs, efficiency levels, and other characteristics are specified for all the technologies included in the menu of choices. These data are drawn from numerous sources including Lawrence Berkeley Laboratory (LBL)¹, Navigant Consulting Incorporated (NCI)², Gas Appliance Manufacturing Association (GAMA), Association of Home Appliance Manufacturers (AHAM), and the Air Conditioning and Refrigeration Institute (ARI)³.

The remaining text of Appendix D describes the input data sources for the variables presented in Appendix B.

¹ Lawrence Berkeley Laboratory, "Energy Data Sourcebook for the U.S. Residential Sector," Berkeley, CA, May, 1997.

² Navigant Consulting Incorporated, "EIA - Technology Forecast Updates," Reference Number 117943, 2004.

³ Air Conditioning and Refrigeration Institute, "Directory of Certified Cooling Equipment," Arlington, VA, 1994.

Residential Demand Module Input Data Files

Residential Equipment Retirement Fractions for 2001 Equipment

Definition: Retirement fractions for each of the 30 residential equipment classes in for all forecast years.

Units: Dimensionless (units retired to date/units extant in 2001).

Source: Results from vintaging models developed based on shipment data. Shipment data from various sources including: AHAM, GAMA, ARI, LBL.

File: RSRET01.TXT

Comments: Values in this table give the fraction of 2001 stocks of equipment expected to be retired as of each year. They are calculated in an external FORTRAN program that vintages efficiencies from the shipment data. Program reads all years.

Sequence of Equipment Classes:

Electric Furnace	Nat Gas Heat Pump	Water Heat Dist
Electric Heat Pump	Room Air Cond	Water Heat LPG
Gas Furnace	Central Air Cond	Water Heat Solar
Gas Boil/Radiator	Electric Heat Pump	Cooking Nat Gas
Kerosene Furnace	Geothermal Heat Pump	Cooking LPG
LPG Furnace	Nat Gas Heat Pump	Cooking Electric
Distill Furnace	Clothes Washers	Dryers Nat Gas
Distill Other	Dishwashers	Dryers Electric
Wood Stoves	Water Heat Nat Gas	Refrigerators
Geothermal Heat Pump	Water Heat Electric	Freezers

Variables: $EQCRET_{y,eg}$

Residential Floor Areas by Building Type, Year and Division.

Definition: Average of floor space in residential buildings in each of 3 house types, for each division, from 1990-2025.

Units: Square feet.

Source: RECS and Census C25 data series.

File: RSSQRFT.TXT

Comments: Values after the last data year are based on a log-trend forecast derived from Census data. Data are used to adjust heating, cooling, and lighting loads.

Variables: $SQRFOOT_{y,b,d}$

Residential Existing Equipment

Definition: Stock of all equipment types for all end-uses in the base year within each building type in each Census Division.

Units: Number of units.

Source: EIA, Aggregation from the Residential Energy Consumption Survey 2001, DOE-EIA-0321(2001).

File: RSEQP93.TXT

Comments: Each value in the body of the table represents aggregated values from the Residential Energy Consumption Survey 2001. First, the census data were aggregated to determine the number of households in each Census Division of each building type that use the designated equipment class.

Equipment Classes Included:

Space Heating: Electric Furnace	Cooking: Natural Gas
Space Heating: Electric Heat Pump	Cooking: LPG
Space Heating: Gas Furnace	Cooking: Electric
Space Heating: Gas Boiler/Radiator	Drying: Natural Gas
Space Heating: Kerosene Furnace	Drying: Electric
Space Heating: LPG Furnace	Refrigeration
Space Heating: Dist Furnace	Freezing
Space Heating: Dist Other	Lighting
Space Heating: Wood Stoves	Furnace Fans
Space Heating: Geothermal HP	Color Televisions
Space Heating: Natural Gas HP	Personal Computers
Space Cooling: Room Air Conditioner	Electric Appliances
Space Cooling: Cent Air Conditioner	Secondary Heater: Natural Gas
Space Cooling: Electric Cool Pump	Secondary Heater: Electric
Space Cooling: Geo Cool Pump	Secondary Heater: Distillate
Space Cooling: Gas Cool Pump	Secondary Heater: LPG
Clothes Washers	Secondary Heater: Kerosene
Dishwashers	Secondary Heater: Coal
Water Heater: Natural Gas	Secondary Heater: Wood
Water Heater: EL	Appliance: Natural Gas
Water Heater: Distillate	Appliance: LPG
Water Heater: LPG	Appliance: Distillate
Water Heater: Solar	

Variables: $EQCESE_{2001, eg, b, r}$

Residential Retired Equipment Efficiencies of 2001 stock

Definition: Retiring efficiencies for each of the 30 residential equipment classes in forecasted years.

Units: Dimensionless (energy out/energy in) except refrigerator, freezers, and stoves.

Source: Results from vintaging models developed based on shipment data. Shipment data from various sources including: AHAM, GAMA, ARI, LBL (See page D-1 for source details).

File: RSEFF01.TXT

Comments: Values in this table give the average efficiencies of equipment expected to be retired in each year. They are calculated in an external spreadsheet that vintages efficiencies from the shipment data.

Equipment classes included:

Electric Furnace	Nat Gas Heat Pump	Water Heaters Distill
Electric Heat Pump	Room Air Conditioner	Water Heaters LPG
Gas Furnace	Central Air Conditioner	Water Heaters Solar
Gas Boil/Radiator	Electric Heat Pump	Cooking Nat Gas
Kerosene Furnace	Geothermal Heat Pump Nat	Cooking LPG
LPG Furnace	Gas Heat Pump	Cooking Electric
Distill Furnace	Clothes Washers	Dryers Nat Gas
Distill Other	Dishwashers	Dryers Electric
Wood Stoves	Water Heaters Nat Gas	Refrigerators
Geothermal Heat Pump	Water Heaters Electric	Freezers

Variables: $EQCEFF_{y, eg}$

Residential Unit Consumption of Energy

Definition: Unit Energy Consumption (UEC) for all Residential equipment classes and building types in each Census Division. Here, the equipment classes include the 30 major classes, plus lighting, furnace fans, color televisions, personal computers, 7 secondary heater types, and 4 appliance types.

Units: Classes 1-30: MMBtu/unit/yr; classes 31-45: MMBtu/household/yr.

Sources: EIA, Residential Energy Consumption Survey 2001, DOE.EIA-0321 (2001). U.S. DOE, U.S. Lighting Market Characterization, Volume I, September 2002.

File: RSUEC10.TXT

Comments: Each value in the body of the table represents the annual energy consumption of a single unit of the given type in the given building type, in the given Census division, in 2001.

Equipment Classes Included:

Space Heating: Electric Furnace	Space Cooling: Room Air Conditioner
Space Heating: Electric Heat Pump	Space Cooling: Cent Air Conditioner
Space Heating: Gas Furnace	Space Cooling: Electric Cool Pump
Space Heating: Gas Boiler/Radiator	Space Cooling: Geo Cool Pump
Space Heating: Kerosene Furnace	Space Cooling: Nat Gas Cool Pump
Space Heating: LPG Furnace	Clothes Washers
Space Heating: Dist Furnace	Dishwashers
Space Heating: Dist Other	Water Heater: Natural Gas
Space Heating: Wood Stoves	Water Heater: Electric
Space Heating: Natural Gas HP	Water Heater: Distillate
Space Heating: Geothermal HP	Water Heater: LPG
	Water Heater: Solar

Cooking: Natural Gas
Cooking: LPG
Cooking: Electric
Drying: Natural Gas
Drying: Electric
Refrigeration
Freezing
Lighting
Furnace Fans
Color Televisions
Personal Computers
Electric Appliances

Secondary Heater: Natural Gas
Secondary Heater: Electric
Secondary Heater: Distillate
Secondary Heater: LPG
Secondary Heater: Kerosene
Secondary Heater: Coal
Secondary Heater: Wood
Appliance: Natural Gas
Appliance: LPG
Appliance: Distillate

Variables: $EQCUEC_{r,eg,b}$

Residential Heating Equipment Shares for New Equipment

Definition: Market share of general space heating equipment for new homes in the base year. Gives the share of each equipment class by building type and Census Division.

Units: Fraction of purchases.

Source: Bureau of the Census C25 data, as described in Characteristics of New Housing: 2004, C25/2004-A.

File: RSHTSHR.TXT

Comments: Shares of heating equipment classes in new homes. Each value in the body of the table represents a fraction of aggregated values from the C25 database. First, the Census data were aggregated to determine the number of new houses in each Census Division of each building type that used the designated equipment class. These values were divided by the number of new houses in each Census Division and building type.

Equipment Classes Included:

Electric Furnace	Distillate Furnace
Electric Heat Pump	Distillate Other
Gas Furnace	Wood Stoves
Gas Boiler/Radiator	Geothermal Heat Pump
Kerosene Furnace	Natural Gas Heat Pump
LPG Furnace	

Variables: $HSYSSHR_{2001, eg, b, r}$

Benchmarking Data from Short-Term Energy Outlook

Definition: Household energy consumption by fuel and Census Division for the years 2001, 2002, 2003, 2004, and 2005.

Units: Trillion Btu.

Source: Short-Term Integrated Forecasting System 2005Q3.

File: RSSTEO.TXT

Comments: National total energy consumption by fuel and year comes from STEO, based on 2001 through 2005 forecasts.

Variables: $STEOCN_{y, f, r}$

Residential Technology Equipment Class Description File

Definition: Technology choice parameters for classes of equipment.

Units: See discussion of individual variables below.

Source: RECS 2001 and vintaging analyses.

File: RTEKCL.TXT.

Comments: Each of the 30 lines of this data file gives the important user-modifiable parameters for one equipment class. Used by the RDM for allocating equipment choice among the individual equipment classes.

Variable Descriptions:

$RTCLENDU_{eg}$ End use number. Equipment classes having the same end use compete with one another. The RDM allocates equipment among them in the technology choice process.

1=Space Heating
2=Space Cooling

- 3=Clothes Washers
- 4=Dishwashers
- 5=Water Heating
- 6=Cooking
- 7=Clothes Drying
- 8=Food Refrigeration
- 9=Food Freezing

Matches *RTTYENDU_{es}* in the RTEKTY.TXT file.

RTCLEQCL_{eg} Equipment class number. Appears on all records. Matches *RTTYEQCL_{es}* in the RTEKTY.TXT file for one or more equipment types: there are one or more equipment types in RTEKTY.TXT for each class in RTEKCL.

RTCLTYPT_{eg} Required pointer from equipment class to a representative equipment type. This is the only pointer from RTEKCL.TXT to RTEKTY.TXT. Selects the equipment type used in the log-linear formula for choice of equipment class for newly constructed housing units and replacements in single-family houses. Its value is the *RTEQTYPE_{es}* in RTEKTY.TXT of the representative equipment.

RTCLPNTR_{eg} Class pointer. Required for end uses 1 through 3; zero otherwise.
 If end use = 1: Required pointer from space heater class to associated water heater class linking water heater fuel choice to space heater fuel choice for newly constructed housing units.

If end use = 2: Required pointer from cooling heat pump class to same class of heating heat pump.

0 = Not a heat pump

Integer = Heater heat pump class number

If end use = 3: Required pointer from water heater class to matching cooking class linking cooking fuel choice to water heater fuel choice for newly constructed housing units. Also see *RTCLREPL_{eg}* end use 3 below; only natural gas water heaters may point to 2 types of cookstoves.

RTCLREPL_{eg} Replacement class. Required for end uses 1 and 3; zero otherwise.
 If end use = 1: Flag for replacing the existing space heater class with a natural gas forced air space heater at retirement (subject to switching limits described under GSL).

If end use = 3: Second pointer from natural gas water heater class to matching cooking class. The model assumes that 65% of new homes with natural gas water heaters have natural gas stoves and 35% have electric stoves.

<i>RTFUEL_{eg}</i>	Fuel used by this equipment. 1=Distillate 2=LPG 3=Natural Gas 4=Electricity (wood priced to electricity) 5=Kerosene
<i>RTMAJORF_{eg}</i>	Major fuel flag. Used only for end use 1; zero otherwise. Space heater shares for systems using major fuels are calculated differently from space heater shares for systems using minor fuels. Set to 1 to indicate a major fuel. Set to 0 to indicate a minor fuel.
<i>RTFAN_{eg}</i>	Furnace fan flag. Value of 1 assigns use of a furnace fan with respective central heating/cooling technology; zero otherwise.
<i>RTBASEFF_{eg}</i>	Base efficiency for this equipment class. Defined differently for different end uses: End uses 1,2,3,5: base efficiency for this equipment class. End uses 4,6,7: intensity for this equipment class.
<i>RTALPHA_{eg}</i>	Equipment life .
<i>RTMINLIF_{eg}</i>	Minimum life of this equipment class (years).
<i>RTMAXLIF_{eg}</i>	Maximum life of this equipment class (years).
<i>RTFCBETA_{eg}</i>	New home heating technology choice model log-linear parameter . Used only for end use 1; zero otherwise.
<i>RTFCBIAS_{eg}</i>	New home heating technology choice model bias parameter. Used only for end use 1; zero otherwise.
<i>RTSWFACT_{eg}</i>	Maximum fraction of single-family homes which may switch away from this equipment class on replacement.
<i>RTSWBETA_{eg}</i>	Replacement technology choice model log-linear parameter . Used only for single-family homes.
<i>RTSWBIAS_{eg}</i>	Replacement technology choice model bias parameter. Used only for single family homes.
<i>RTCLNAME_{eg}</i>	Unique name for each equipment class.

Residential Technology Equipment Type Description File

Definition: Technology choice parameters for types of equipment.
Units: See discussion of individual variables below.
Source: Navigant Consulting, 2004 for cost, performance, and availability.
File: RTEKTY.TXT
Comments: Each of the lines of this data file gives the important user-modifiable parameters for one equipment type. Used by the RDM for allocating equipment choice among the individual equipment types.

Variable Descriptions:

RTTYENDU_{es} End Use number as in RTEKCL. Matches RTCLENDU in the RTEKCL.TXT file.

RTTYEQCL_{es} Equipment class for this equipment type. MUST match a class number, *RTCLEQCL_{eg}*, in the RTEKCL.TXT file.

RTEQTYPE_{es} Equipment type number. Each equipment class may include multiple types. Each equipment type may have up to one record for each year of the forecast period. DO NOT overlap years. The user may add equipment types to existing classes. When adding new types, update the type numbers for the rest of that end use; also, adjust the RTTYPNTR pointer for cooling and the RTCLTYPT pointer in the RTEKCL.TXT file for heating. If adding heat pump types, add same type to both space heating and space cooling and adjust pointers.

RTINITYR_{es} Initial calendar year for this model of this equipment type. The first *RTINITYR_{es}* for a model within a type should be the NEMS residential module base year (2001); subsequent initial years for a model must be previous *RTLASTYR_{es}*+1.

RTLASTYR_{es} Last calendar year for this model of this equipment type. Must greater than or equal to *RTINITYR_{es}* for this model; final *RTLASTYR_{es}* should be the last year of the forecast period (2025).

HVACPT Pointer to identify the unique HVAC system number.

RTTYPNTR_{es} Required pointer from cooling heat pump type to same type of heating heat pump. Also used as a flag to mark room air conditioners and central air conditioners. Used by end use 2 only; zero otherwise. Modify as follows only if heat pumps added:

-1 = Room air conditioner

0 = Central air conditioner (not heat pump)

Other Integer = Matching heater heat pump type number

<i>LOADADJ_{es}</i>	Proportion of hot water heating load affected by efficiency gains is end-uses 3 and 4.
<i>RTEQEFF_{es}</i>	Defined differently for different end uses: If end use = 1,2,3,4,5,7: Equipment type efficiency (AFUE, COP, etc.). If end use = 6,8,9: Energy consumption for prototypical models (e.g., annual Kwh consumption for 18 cu ft refrigerators).
<i>RTEQCOST_{es}</i>	Installed capital cost in \$2004 per unit.
<i>RTRECCOST_{es}</i>	Retail capital cost in \$2004 per unit.
<i>RTMATURE_{es}</i>	Technology maturity description. 'MATURE' = No further cost reductions expected; use above constants for installed wholesale and retail capital costs. 'ADOLESCENT' = Main cost reductions occurred before base year (1996); function <i>EQCOST</i> reduces installed wholesale and retail capital cost with 1996 (or first year of availability) as the inflection point. 'INFANT' = All cost reductions expected after first year of availability; function <i>EQCOST</i> reduces installed wholesale and retail capital cost with the inflection point in the future.
<i>RTCOSTP1_{es}</i>	If 'MATURE' technology, not used. If 'ADOLESCENT' technology, representative year cost decline began (y_1 in code). If 'INFANT' technology, year of inflection of cost trend (y_0 in code).
<i>RTCOSTP2_{es}</i>	If 'MATURE' technology, not used. If 'ADOLESCENT' or 'INFANT' technology, logistic curve shape parameter (gamma in code).
<i>RTCOSTP3_{es}</i>	If 'MATURE' technology, not used. If 'ADOLESCENT' technology, total possible proportional decline in equipment cost from y_0 onward (d in code). If 'INFANT' technology, total possible proportional decline in equipment cost from y_1 onward (d in code).
<i>RTECBTA1_{es}</i>	Efficiency choice model log-linear parameter β_1 , weights capital cost.

<i>RTECBTA2</i> _{es}	Efficiency choice model log-linear parameter ₂ , weights fuel cost.
<i>RTECBTA3</i> _{es}	Efficiency choice model log-linear parameter ₃ , weights life cycle cost.
<i>RTECBIAS</i> _{es}	Efficiency choice model, consumer preference log-linear parameter; fits current market shares to shipment data.
<i>RTTYNAME</i> _{es}	Unique name for each equipment type. Do not modify existing names. Add unique names for new types.

Miscellaneous Residential Module Inputs

Definition: This file supplies a number of tables that define parameters for the RDM. Each of the tables is discussed individually below.

Units: Discussed for each variable.

Source: User Options.

File: RMISC.TXT

Comments: These tables are all read line-by-line in the logic of the RDM. The shape of each is read by the logic that reads the data.

Variables:

*HDR*_b Housing Demolition Rates by Building Type.

*EH*_{1997,b,r} Existing Houses in 2001 by Building Type and Census Division (With Totals).

*RACSAT*_{b,r} New Room Air Conditioner Saturation Level by Building Type and Census Division.

*CACSAT*_{b,r} New Central Air Conditioner Saturation Level by Building Type and Census Division.

*CACPR*_r Central A/C Penetration Rate by Census Division (1.+x).

DISHPEN Dishwasher penetration rate (1.+x),

*FRZSAT*_{b,r} New Home Freezer Saturation Level by Building Type and Census Division.

*ELDRYPR*_{b,r} Electric Dryer Penetration Rate by Building Type and Census Division (1.+ x / the number of years to reach saturation).

*SHTSHR*_{r,f,b} Secondary Heating Share by Fuel, building Type, and Census Division.

*NSHTSHR*_{r,f,b} Secondary Heating Share for post-2001 construction by Fuel, Building Type, and Census Division.

*NEWHEATUEC*_{e,b,r} New Construction Heating Unit Energy Consumption (UEC) by Equipment Type, Building Type, and Census Division (First Year Only).

*NEWFRIDGEUEC*_{b,r} New Construction Refrigerator Unit Energy Consumption (UEC) by Building

	Type and Census Division (First Year Only).
$ELASTIC_{s,r}$	Elasticity of Service Demand with respect to Square Footage by End Use and Census Division.
$HDDADJ_{y,r}$	Heating Degree Days by Census Division and Year.
$CDDADJ_{y,r}$	Cooling Degree Days by Census Division and Year.
$EPWINPCT_y$	Fraction of Existing Houses Affected by Window Labeling by Year.
$NEWDRYSAT_{eg,b,r}$	New Dryer Saturation By Type (Gas, Electric).
$RPINSCOST_{eg,egsw}$	Installation cost associated with switching from equipment class eg to equipment class egsw when equipment is replaced.
$PCSAT_{b,r}$	Number of personal computers by building type and Census Division in 2001.
$PCPEN_y$	Percent of housing stock with personal computers by forecast year.
$WTPCEFF_y$	Weighted stock efficiency of personal computers by forecast year.
$CTVSAT_{b,r}$	Number of color televisions per household by building type and Census Division in 2001.
$DISHNEW_{b,r}$	Percent of new households with dishwashers by building type and Census Division.
$WASHNEW_{b,r}$	Percent of new households with clothes washers by building type and Census Division.
$ICENERGY_{bin}$	Share of lighting energy by each of the 6 general use lighting bins,
$ICHOURS_{bin}$	Hours of use assigned to each of the 6 general use lighting bins,
$ICSHARE_{bin}$	Share of lighting bulb stock by each of the 6 general use lighting bins,
$LAMPSPERHH_b$	Number of lamps per household by housing type,
$LAMPSHARE_e$	Share of each bulb type in 2001,
$NLAMPSHR_{e,bin}$	Sales share of each bulb type by bin in initial model year (2002),
$BASEFF$	Wattage of installed stock,
$WATTS_e$	Wattage of new bulbs available for purchase,
$ICLIFE_{e,bin}$	Life expectancy in years of each bulb type for each hourly use bin,
$CAPITAL_{e,bin,y}$	Cost of each bulb type by bin for prescribed years (2001, 2010, 2020),
$LTBETA1$	Efficiency choice parameter for capital cost in general use lighting,
$LTBETA1$	Efficiency choice parameter for operating cost in general use lighting,
$COMPETE_{bin}$	Fraction of retiring bulbs that compete (non-like replacements) by bin,
$TCHSTKSHR_e$	Stock share for torchiere lamps by bulb type,
$TCHPEN_y$	Number of torchiere lamps per household by year (2001, 2010, 2020),

<i>BASETWATT</i>	Stock wattage of torchiere lamps,
<i>TCHHOURS</i>	Number of hours per day of torchiere lamp use,
<i>TCHLIFE_e</i>	Life expectancy of torchiere lamp bulb by type in years,
<i>TCHCAP_{e,y}</i>	Capital cost of torchiere lamps by bulb type and year (2001, 2010, 2020),
<i>TBETA1</i>	Efficiency choice parameter for capital cost in torchiere lighting,
<i>TBETA2</i>	Efficiency choice parameter for operating cost in torchiere lighting,
<i>ELAST</i>	Elasticity Parameters for Calculating Model Price Elasticities.

Residential Average Stock Equipment Efficiencies of 2001 stock

Definition: Stock efficiencies for each of the 30 residential equipment classes in forecasted years.

Units: Dimensionless (energy out/energy in) except refrigerators, freezers, and stoves.

Source: Results from vintaging models developed based on shipment data. Shipment data from various sources including: AHAM, GAMA, ARI, LBL (see page D-1 for details on sources).

File: RSSTKEFF.TXT

Comments: Values in this table give the average efficiencies of equipment remaining from the 2001 stock expected to be retired in each year. They are calculated in an external spreadsheet that vintages efficiencies from the shipment data.

Equipment classes included:

Electric Furnace	Nat Gas Heat Pump	Water Heaters Distillate
Electric Heat Pump	Room Air Conditioner	Water Heaters LPG
Gas Furnace	Central Air Conditioner	Water Heaters Solar
Gas Boil/Radiator	Electric Heat Pump	Cooking Nat Gas
Kerosene Furnace	Geothermal Heat Pump	Cooking LPG
LPG Furnace	Nat Gas Heat Pump	Cooking Electric
Distill Furnace	Clothes Washers	Dryers Nat Gas
Distill Other	Dishwashers	Dryers Electric
Wood Stoves	Water Heaters Nat Gas	Refrigerators
Geothermal Heat Pump	Water Heaters Electric	Freezers

Variables:

BASEFF_{y,eg} Stock efficiency for remaining 2001 equipment by year.

Residential Distributed Generation Equipment File

Definition:	Cost, performance, and penetration parameters for fuel cells and photovoltaic equipment.
Units:	Technology cost in 2003 dollars.
Source:	Navigant Consulting and National Renewable Energy Laboratory.
File:	RGENTK.TXT
Comments:	This file contains baseline data for distributed generation technologies. The data include cost, performance, baseline penetration rates, and penetration parameters for fuel cells and photovoltaic equipment.
Variables:	
xdegred _{t,d}	Degradation of conversion efficiency of technology.
xeff _{t,d}	The electrical conversion efficiency of the technology and vintage.
xqlife _{t,d}	Life of the equipment, specific to the equipment type as well as vintage.
xwhrecovery _{t,d}	waste heat recovery factor for technologies that burn fuel (i.e., not photovoltaics).
xinstcost _t	Installation cost in 2003 dollars per kw.
xcapcost _{t,v}	Capital cost of the investment in 2003 dollars per kw.
xmaintcst _{t,v}	Annual maintenance cost in 2003 dollars per kw.
xavail _{t,v}	Percentage of time available (1 – forced outage rate – planned outage rate) applied to typical operating hours
xtxcrpct _{t,v}	Tax credit percentage that applies to a given technology's total installed cost (if any).
xtxcrmax _{t,v}	Cap on the total dollar amount of a tax credit (if any).
xkw _{tv}	kw of typical system. Note capacity must remain constant across vintages for a given technology.
xoperhours	Typical operating hours
xlossfac	Conversion losses (for systems that are rated “at the unit” rather than per available alternating current wattage) if appropriate
xnetmeteradj	For solar technologies a percentage scalar that applies to the retail rate of electricity for sales to the grid (i.e., reverse flows of energy into the grid), currently set to 1.0 to compensate sales at the retail price. Any data for other technologies should be ignored since a grid sales price is now provided by the NEMS Electric Market Module.
xsolarins	Solar insolation for photovoltaics (kWh per square foot per year).
xintrate	residential mortgage rate from the Macroeconomic Activity Module.

pelrsout _{r,y,e}	Air Conditioning Electricity price in 1987 dollars per millionBtu from NEMS Electric Market Module.
pelrs _{r,y}	Residential electricity price in 1987 dollars per million Btu from NEMS Electric Market Module.
pelme _{r,y}	Marginal price for sales to grid in 1987 dollars per million Btu from NEMS Electric Market Module.
mc_pcwgdpy	GDP chain weighted implicit price deflator for converting energy prices to 1998 dollars
xterm	Loan term (currently set at 30 years).
xinflation	Inflation assumption for converting constant dollar fuel costs and fuel cost savings into current dollars for the cashflow model in order to make the flows correspond to the nominal dollar loan payments. The current assumption is 3% annually.
xlife	Equipment life for the specific technology and vintage being analyzed.
xdownpaypct	Down payment percentage assumed to apply to the distributed generation investment, currently 10% of the installed cost.
xtaxrate	Marginal combined federal and state income tax rate, currently assumed to be 34% for the typical homeowner.
xreqcost	Sum of installation cost plus capital cost multiplied by total system kw.
xtaxcreditpct	Set equal to the tax credit percentage for the specific technology and vintage being analyzed.
xtaxcreditmax	Set equal to the maximum dollar cap on the tax credit (if any) for the specific technology and vintage being analyzed.
xmaintcostbase	Set equal to the maintenance cost for the specific technology and vintage being analyzed.
xdegradation	Set equal to the degradation factor for the specific technology and vintage being analyzed.
xwhtgmmmbtu	The lessor of: 1) average annual water heating UEC from RECS (rounded 25 million Btu per year), and 2) the available Btu of waste heat estimated from the distributed generation technology.
xelecavguec	Average annual single-family electricity usage in kWh from RECS (rounded 10,000 kwh per year).
payment	Computed annual payment using loan amortization formula.
xdownpay	Computed as the downpayment percentage times the total installed cost for the

	specific technology and vintage being analyzed.
xoutlay	Loan payment made in a particular year (see xpayment above).
xintamt	Interest paid for the loan in each year of the analysis – determines tax deduction that can be taken (home loan interest deduction). This is computed as last year's ending principal balance, xloanbal(year-1), times the mortgage interest rate.
xprin	The amount principal paid on the loan in each year of the analysis – used to determine the loan balance for the next year of the analysis.
xloanba	Principal balance of the loan for each year of the analysis – used to compute the current year's xintamt.
xtaxcredit	Computed tax credit computed as the maximum of xtaxcreditmax and the xtaxcreditpct times the total installed cost.
xtaxdeduct	Combined tax rate times interest paid in the previous year plus any applicable tax credit.
xannualkwh	Represents annual system kWh generation for the specific technology and vintage being analyzed.
xkwh	kWh generated in each of the years of the cashflow analysis. Defined as annual kWh adjusted for degradation (i.e., if degradation factor is not equal to zero).
xgasinput	Million Btu of natural gas used by the technology (more generally this would be the MMBtu of the input fuel, currently the only fuel-using technologies are natural gas fuel cells).
xbtuwasteheat	Computed waste heat available for water heating (valid only for fuel cells or other fuel-consuming generating technology).
xbaseyrfuelcost	Initial fuel costs for operating the generation technology. Calculated from the fuel price and fuel input.
xfuelcost	Fuel cost for the technology net of any water heating cost savings from using waste heat.
xvalesavebase	Calculated value of generated electricity.
xvalesave	Computed as the nominal dollar value of xvalesavebase with an adjustment for output degradation (if appropriate)
xexcesskwh	Generated kWh in excess of average residential usage. Excess kWh are valued at the grid sales price (currently the residential retail rate for photovoltaics and the price of marginal electricity purchases, but the utility for other technologies).
xmaintcost	Set equal to the maintenance cost from the input file for the specific technology

	and vintage being analyzed.
xnetcashflow	The value of the electricity savings less outlays, fuel costs, and maintenance costs.
xcumflow	The accumulated sum of all prior xnetcashflow amounts.
xalpha	Penetration function shape parameter.
xperparm	Penetration function used to calculate maximum market share into new construction parameter.
xmaxpen	Maximum market penetration for the technology.
xsimplepayback	Computed as the first year in the cashflow stream for which an investment has a positive net cashflow.
units	Accumulated total units employing the relevant type of generation technology.
trills	Total kWh (own use and grid sales) generation (converted to trills).
trillsownuse	Own use electricity generation. The minimum of 1) the average electric consumption (in trills) of a single family home, or 2) the actual kWh generation (converted to trills).
invest	Total amount of investment in distributed generation equipment in millions of 2003\$.

Residential HVAC Technology Equipment Type Description File

Definition:	HVAC technology data for new homes.
Units:	See discussion of individual variables below.
File:	RTEKTYC.TXT
Comments:	Each of the lines of this data file gives the important user-modifiable parameters for HVAC equipment in new homes.

Variable Descriptions:

<i>RSCENDIV</i>	Census division number (1-9).
<i>RSBTYPE</i>	Building type number (1-3).
<i>HVHTEQCL</i>	HVAC heating equipment class. Same as the RTCLTYPT pointer in the RTEKCL.TXT file for heating.
<i>HVHTEQTY</i>	HVAC heating equipment type. Same as the RTEQTYPE variable in the RTEKTY.TXT file for heating.
<i>HVCLEQCL</i>	HVAC cooling equipment class. Same as the RTCLTYPT pointer in the RTEKCL.TXT file for cooling.

<i>HVCLEQTY</i>	HVAC cooling equipment type. Same as the RTEQTYPE variable in the RTEKTY.TXT file for cooling.
<i>HVFYEAR</i>	Initial calendar year for this model of this equipment type. The first HVFYEAR for a model within a type should be the NEMS base year (2001); subsequent initial years for a model must be previous R _{LASTYR} _{es} +1.
<i>HVLYEAR</i>	Last calendar year for this model of this equipment type. Must greater than or equal to HVFYEAR for this model; final HVLYEAR should be the last year of the forecast period (2025).
<i>HVTAXPCT</i>	HVAC system tax credit percent, if applicable.
<i>HVTAXMAX</i>	HVAC system tax credit maximum, if applicable.
<i>HTSHEFF</i>	Heating shell efficiency index for HVAC system type.
<i>CLSHEFF</i>	Cooling shell efficiency index for HVAC system type.
<i>SHELLCOST</i>	Installed capital cost for shell measures in \$2004 per unit for new homes.
<i>HVBETA1</i>	HVAC efficiency choice model log-linear parameter ₁ , weights capital cost.
<i>HVBETA2</i>	HVAC efficiency choice model log-linear parameter ₂ , weights fuel cost.
<i>HVPACKG</i>	HVAC shell efficiency package number (1-5).
<i>HVPGNAME</i>	Unique name for each HVAC shell efficiency package type.

Historical Energy Star Home Saturation File

Definition: Number of Energy Star homes built 2002-2005.

File: RSUEC11.TXT

Source: EPA spreadsheet on State level builds.

Variable Descriptions:

*HVEQWTN*_{y,e,s,d} Percent of homes meeting Energy Star Home criteria or better by heating technology type, shell level type, and Census division.

Appendix E: Data Quality

This Appendix discusses the quality of the survey data source from which the majority of the historical housing stock, appliance stock, and technology information that drives the NEMS Residential Sector Demand Module is drawn. This survey is the 2001 Residential Energy Consumption Survey (RECS). Data quality information pertinent to additional sources used in the module development is not available for this report. The parameter estimates included in the Residential Sector Demand Module are user-specified.

Quality of Input Data

RECS Implementation

The RECS procedure is composed of two instruments: the household survey and the energy supplier survey. Data is collected from a representative sample of households through personal interviews. Billing data is next collected through mail questionnaires from the energy supplier to the participating household, provided that authorization is obtained from the household. The results of the household and energy supplier surveys are presented in the Department of Energy documentation of the RECS 2001 survey¹.

Stage I of RECS consists of a personal interview. The sample for the interviews is developed based on all units occupied as a primary residence in the 50 states and the District of Columbia. The sample design process is composed of five steps that disaggregate the geographic scope into housing clusters of approximately 5 housing units to be surveyed.

The interview responses provide information on housing structure including insulation, doors, windows, space conditioning systems, use of wood fuel, energy conservation improvements, household appliances, household vehicles, receipt of government assistance for the cost of space heating, and demographics. Householders were also asked to sign

¹ U.S. Department of Energy, Energy Information Administration, Residential Energy Consumption Survey 2001.

authorization forms to allow access to their billing records with energy suppliers.

Stage II of the survey design consists of a mail questionnaire for energy suppliers of the households interviewed in Stage I. Suppliers of residential electricity, natural gas, fuel oil, kerosene, and liquified propane gas (LPG) are contacted in Stage II. For the 2001 RECS, each supplier was asked to supply billed quantities and expenditures for the households interviewed in Stage I.

Data verification begins with a manual verification of the interview data from Stage I. The questionnaires are checked for completeness and consistency. Interview responses are compared to energy supplier data, and respondents are contacted in the event that an inconsistency persists. These data collection and verification procedures ensure the quality of the survey data.

Appendix F: Bibliography

- Air Conditioning and Refrigeration Institute, "Directory of Certified Cooling Equipment," Arlington, VA, 1994.
- American Council for an Energy-Efficient Economy, "Energy Savings Estimates from the Energy Efficiency Provisions in the Senate and House Energy Bills," Washington, D.C., August, 1993.
- American Gas Association, "Residential Natural Gas Market Survey: 1998," Arlington, VA, December, 1999.
- Arthur D. Little, "Electricity Consumption by Small End Uses in Residential Buildings," 1998.
- Association of Home Appliance Manufacturers, "Freezers: Energy Efficiency and Consumption Trends," Chicago, IL, July, 1995. Association of Home Appliance Manufacturers, "Refrigerators: Energy Efficiency and Consumption Trends," Chicago, IL, July, 1995.
- Electric Power Research Institute, "Draft Model Documentation for Residential End-use Energy Planning System (REEPS), Version 2.0," Palo Alto, CA, 1990.
- Electric Power Research Institute, "Residential End-Use Energy Consumption: A Survey of Conditional Demand Estimates," Palo Alto, Ca, 1989.
- Electric Power Research Institute, "Residential End-Use Energy Planning System (REEPS), Version 1.0, Palo Alto, CA, 1982.
- Energy Systems and Policy, "The LBL Residential Energy Model: An Improved Policy Analysis Tool," 1987.
- Federal Register, "Part III: Department of Energy," May 14, 1991.
- Gas Appliance Manufacturers Association, "Consumers' Directory for Certified Efficiency Ratings," Arlington, VA, 1994.
- Gas Research Institute, "1991 Edition of the GRI Baseline Projection Methodology and Assumptions Topical Report," Lexington, MA, 1990.
- Gas Research Institute, "Baseline Projection Data Book," 1990.
- Itron Inc., *California Lamp Trends 2004*.
- Koomey, J.G., et. al., "The Potential for Electricity Efficiency Improvements in the U.S. Residential Sector," Lawrence Berkeley Laboratory, Berkeley, CA, July, 1991.

- Lawrence Berkeley Laboratory, "Energy Use of Televisions and Videocassette Recorders in the U.S.," Berkeley, CA, March, 1999.
- Lawrence Berkeley Laboratory, "Energy Data Sourcebook for the U.S. Residential Sector," Berkeley, CA, May, 1997.
- Navigant Consulting, "EIA – Technology Forecast Updates – Residential and Commercial Buildings Technologies," September 2004.
- Professional Remodeler, *2002 Home Remodeling Study: Room Addition(s) and Remodeling Report, 2002.*
- R.S. Means, *Means Residential Square Foot Costs*, 2003.
- Turiel, I., et. al., "U.S. Residential Sector Appliance Energy Efficiency: Present Status and Future Directions," Lawrence Berkeley Laboratory, Berkeley, CA, December, 1992.
- U.S. Bureau of the Census, "Annual Housing Survey: 1983," 1983.
- U.S. Bureau of the Census, "Components of Inventory Change," 1980.
- U.S. Bureau of the Census, "Current Construction Reports-Series C25 Characteristics of New Housing: 2004," 2005.
- U.S. Department of Energy, Energy Information Administration, "A Recommended Design for the National Energy Modeling System," 1991.
- U.S. Department of Energy, Energy Information Administration, "Residential Sector Component Design Report," January 19, 1993.
- U.S. Department of Energy, Energy Information Administration, *Residential Energy Consumption Survey 2001*, DOE/EIA-0314(2001), Washington, DC, 2004.
- U.S. Department of Energy, *Technical Support Document: Energy Conservation Standards for Consumer Products: Dishwashers, Clothes Washers, and Clothes Dryers*, DOE/CE-0267, Washington, D.C., July 1989.
- U.S. Department of Energy, *Technical Support Document: Energy Conservation Standards for Consumer Products: Refrigerators and Furnaces*, DOE/CE-0277, Washington, D.C., November, 1989.
- U.S. Department of Energy, *U.S. Lighting Market Characterization: Volume 1: National Lighting Inventory and Energy Consumption Estimate*, Washington, DC, September, 2002.
- Vorsatz, Diana, et. al., *Lighting Market Sourcebook for the U.S.*, Berkeley, CA, December 1997.