


Prepared in cooperation with the
Georgia Department of Natural Resources
Environmental Protection Division

Evaluation of Ground-Water Contribution to Streamflow in Coastal Georgia and Adjacent Parts of Florida and South Carolina

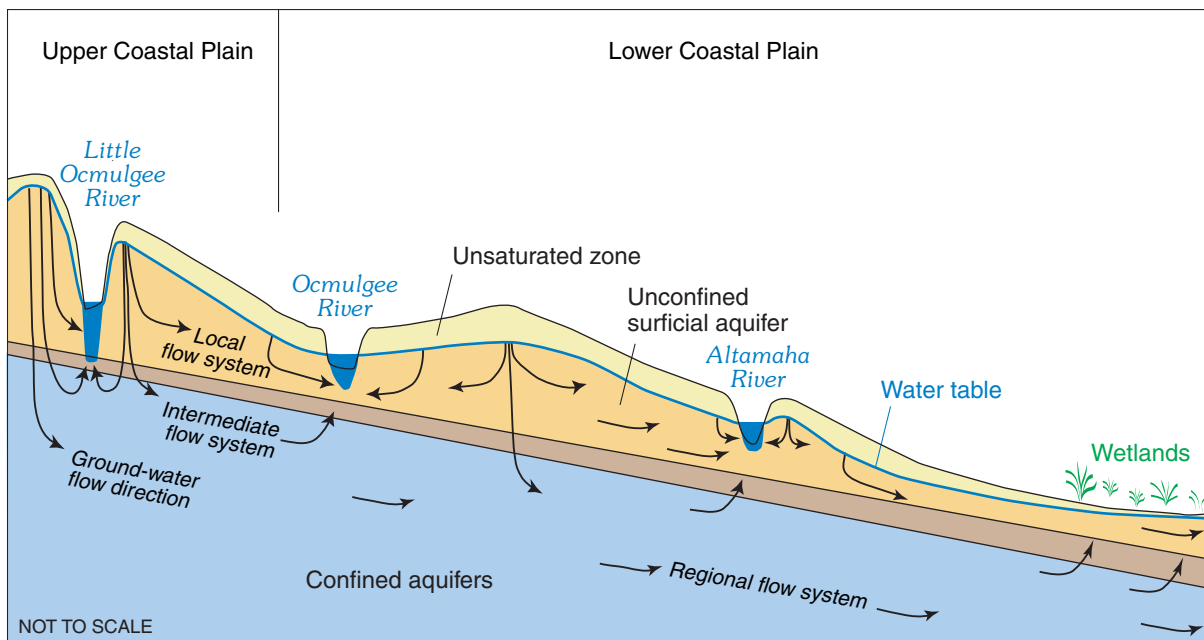

Scientific Investigations Report 2004-5265

Evaluation of Ground-Water Contribution to Streamflow in Coastal Georgia and Adjacent Parts of Florida and South Carolina

By Sherlyn Priest

Prepared in cooperation with the
Georgia Department of Natural Resources
Environmental Protection Division

Scientific Investigations Report 2004-5265

U.S. Department of the Interior
U.S. Geological Survey

U.S. Department of the Interior
Gale A. Norton, Secretary

U.S. Geological Survey
Charles G. Groat, Director

U.S. Geological Survey, Reston, Virginia: 2004
Atlanta, Georgia

This report is available online at <http://pubs.usgs.gov/>

For more information about the USGS and its products:

Telephone: 1-888-ASK-USGS

World Wide Web: <http://www.usgs.gov/> Any use of trade, product, or firm names in this publication is for descriptive purposes only and does not imply endorsement by the U.S. Government.

Although this report is in the public domain, permission must be secured from the individual copyright owners to reproduce any copyrighted materials contained within this report.

Suggested citation:

Priest, Sherlyn, 2004, Evaluation of ground-water contribution to streamflow in coastal Georgia and parts of Florida and South Carolina: U.S. Geological Survey Scientific Investigations Report 2004-5265, p. 46.

Contents

Abstract	1
Introduction	1
Purpose and Scope	2
Description of Study Area	2
Previous Studies	5
Method of Study	6
Baseflow Estimation	6
Precipitation Trends	8
Well and Streamflow Gaging Station Identification Systems	9
Stream-Aquifer Relations	9
Stream-Aquifer Flow Systems	9
Climate.....	10
Surface Water.....	10
Ground Water	15
Hydrogeologic Units	15
Upper Coastal Plain.....	15
Lower Coastal Plain.....	16
Ground-Water Levels	16
Long-Term Fluctuations and Trends	17
Salkehatchie–Savannah–Ogeechee River Basin	17
Altamaha–Satilla–St Marys River Basin	18
Suwannee River Basin	21
Ground-Water Contribution to Streamflow	21
Hydrograph Separation	24
Drought Streamflow	25
Linear-Regression Analysis of Streamflow Duration	28
Comparison of Results.....	34
Summary	36
Selected References	38

Figures

1.	Map showing location of study area, streamflow gaging stations, wells, and National Weather Service stations	3
2.	Chart showing geologic and hydrogeologic units of the upper and lower Coastal Plain, Georgia	7
3.	Graphs of differences in separating baseflow using fixed-interval, sliding-interval, and local-minimum methods of HYSEP at Beaverdam Creek (station 02198100) near Sardis, Georgia, 1999	8
4.	Schematic diagram of the conceptual hydrologic flow system in the upper and lower Coastal Plain of Georgia	9
5.	Map showing mean annual precipitation for selected National Weather Service stations in the Coastal Plain of Georgia and South Carolina, 1971–2000	11
6.	Graphs showing mean monthly precipitation at selected National Weather Service stations in the Coastal Plain area of Georgia and South Carolina, 1971–2001	12
7.	Map showing mean annual runoff for the Coastal Plain of Georgia, 1941–70	13
8.	Boxplots showing distribution of daily streamflow for Brier Creek (station 02198000) near Millhaven, Georgia; Canoochee River (station 02203000) near Claxton, Georgia; and Little Satilla River (station 02227500) near Offerman, Georgia, for the period of record	14
9–14.	Graphs Showing—	
9.	Mean monthly streamflow at a selected streamflow gaging station within the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins for the periods of record	15
10.	Daily water-level measurements in wells 35P094 and 36Q008, Chatham County; and daily rainfall at National Weather Service station, Savannah Municipal Airport, Chatham County, Georgia, 2001	17
11.	Daily mean water levels in the surficial, upper Brunswick, and Upper Floridan aquifers at the Gardi site, Wayne County, Georgia, 1983–2001	18
12.	Mean annual stream discharge, daily mean ground-water level, and cumulative departure from normal precipitation for the upper and lower parts of Salkehatchie–Savannah–Ogeechee River Basin, Georgia and South Carolina, 1971–2001	19
13.	Mean annual stream discharge, daily mean ground-water level, and cumulative departure from normal precipitation for the upper and lower parts of the Altamaha–Satilla–St Marys River Basin, Georgia, 1971–2001	20
14.	Mean annual stream discharge, daily mean ground-water level, and cumulative departure from normal precipitation for the upper and lower parts of the Suwannee River Basin, Georgia, 1971–2001	22
15.	Potentiometric surface of the Upper Floridan aquifer, May 1998	23
16.	Baseflow separation using the local-minimum method for the wet, average, and dry years at Canoochee River (station 02203000) near Claxton, Georgia, 1971–2001	25
17.	Comparison of drought streamflow between two adjacent streamflow gaging stations in the Salkehatchie–Savannah–Ogeechee River Basin	26

18–20.	Maps Showing—	
18.	Selected streamflow gaging stations monitored during the 1954 drought and corresponding intermediate unit-area discharge	30
19.	Selected streamflow gaging stations monitored during the 1981 drought and corresponding intermediate unit-area discharge	31
20.	Selected streamflow gaging stations monitored during the 2000 drought and corresponding intermediate unit-area discharge	32
21–26.	Graphs Showing—	
21.	Comparison of two flow-duration curve types: gentle curve along Brier Creek (station 02198000) and a steep curve along the Alapaha River (station 02317500) ...	33
22.	Duration of mean daily streamflow for Brushy Creek (station 02197600) near Wrens, Georgia, and Brier Creek (station 02198000) at Millhaven, Georgia, 1971–2001	33
23.	Duration of mean daily streamflow for Canoochee River (station 02203000) near Claxton, Georgia, in the upper Salkehatchie–Savannah–Ogeechee River Basin, 1971–2001	34
24.	Duration of mean daily streamflow for Little Satilla River (02227500) near Offerman, Georgia, and Ocmulgee River (02215500) at Lumber City, Georgia, in the Altamaha–Satilla–St Marys River Basin, 1971–2001	34
25.	Duration of mean daily streamflow for Alapaha River (station 02317500) at Statenville, Georgia, in the Suwannee River Basin, 1971–2001	35
26.	Regression of Q_{35} versus mean annual baseflow for the 8 and 14 streamflow gaging stations selected for hydrograph-separation technique, Georgia and South Carolina, 1971–2001	35

Tables

1.	Selected streamflow gaging and partial-record stations in Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins ...	4
2.	Well construction data for selected wells used in Georgia	6
3.	Summary of mean annual baseflow estimated using HYSEP at selected streamflow gaging stations in the upper and lower parts of the basins in coastal Georgia and South Carolina, 1971–2001	24
4.	Measured stream discharge at selected streamflow gaging stations in the upper and lower Coastal Plain during the 1954, 1981, and 2000 droughts in Georgia and Florida	27
5.	Estimated ground-water discharge to selected streams in the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins during the 1954, 1981, and 2000 droughts	29
6.	Flow-duration curve index $[(Q_{25}/Q_{75})^{1/2}]$ and curve shape for selected streams in the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins, 1971–2001	33
7.	Coefficient of determination (r^2) and residual standard of error for flow durations evaluated as indicators of baseflow for 8 and 14 streamflow gaging stations selected in the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins, 1971–2001	35
8.	Comparison of three methods used to calculate baseflow for selected streamflow gaging stations in the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys and Suwannee River Basins, 1971–2001	36

Conversion Factors and Datum

Temperature in degrees Celsius (°C) may be converted to degrees Fahrenheit (°F) as follows:

$$^{\circ}\text{F} = (1.8 \times ^{\circ}\text{C}) + 32$$

Temperature in degrees Fahrenheit (°F) may be converted to degrees Celsius (°C) as follows:

$$^{\circ}\text{C} = (^{\circ}\text{F} - 32) / 1.8$$

Vertical coordinate information is referenced to the North American Vertical Datum of 1988 (NAVD 88). Historical data collected and stored as National Geodetic Vertical Datum of 1929 have been converted to NAVD 88 for this publication.

Horizontal coordinate information is referenced to the North American Datum of 1983 (NAD 83). Historical data collected and stored as North American Datum of 1927 (NAD 27) have been converted to NAD 83 for use in this report.

Evaluation of Ground-Water Contribution to Streamflow in Coastal Georgia and Adjacent Parts of Florida and South Carolina

By Sherlyn Priest

Abstract

Stream-aquifer relations in the coastal area of Georgia and adjacent parts of Florida and South Carolina were evaluated as part of the Coastal Georgia Sound Science Initiative, the Georgia Environmental Protection Division's strategy to protect the Upper Floridan aquifer from saltwater intrusion. Ground-water discharge to streams was estimated using three methods: hydrograph separation, drought-streamflow measurements, and linear-regression analysis of streamflow duration. Ground-water discharge during the drought years of 1954, 1981, and 2000 was analyzed for minimum ground-water contribution to streamflow. Hydrograph separation was used to estimate baseflow at eight streamflow gaging stations during the 31-year period 1971–2001. Six additional streamflow gaging stations were evaluated using linear-regression analysis of flow duration to determine mean annual baseflow. The study area centers on three major river systems—the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee—that interact with the underlying ground-water system to varying degrees, largely based on the degree of incision of the river into the aquifer and on the topography. Results presented in this report are being used to calibrate a regional ground-water flow model to evaluate ground-water flow and stream-aquifer relations of the Upper Floridan aquifer.

Hydrograph separation indicated decreased baseflow to streams during drought periods as water levels declined in the aquifer. Average mean annual baseflow ranged from 39 to 74 percent of mean annual streamflow, with a mean contribution of 58 percent for the period 1971–2001. In a wet year (1997), baseflow composed from 33 to 70 percent of mean annual streamflow. Drought-streamflow analysis estimated baseflow contribution to streamflow ranged from 0 to 24 percent of mean annual streamflow. Linear-regression analysis of streamflow duration estimated the Q_{35} (flow that is equaled or exceeded 35 percent of the time) as the most reasonable

estimate of baseflow. The Q_{35} , when compared to mean annual streamflow, estimated a baseflow contribution ranging from 65 to 102 percent of streamflow. The Q_{35} estimate tends to overestimate baseflow as evidenced by the baseflow contribution greater than 100 percent. Ground-water contributions to streamflow are greatest during winter when evapotranspiration is low, and least during summer when evapotranspiration is high. Baseflow accounted for a larger percentage of streamflow at gaging stations in the Salkehatchie–Savannah–Ogeechee River Basin than in the other two basins. This difference is due largely to the availability of data, proximity to the Piedmont physiographic province where the major rivers originate and are by supplied ground water, and proximity to the upper Coastal Plain where there is greater topographic relief and interconnection between streams and aquifers.

Introduction

Population growth, increased tourism, and sustained industrial activities in the coastal area of Georgia have affected the area's water resources and limited the availability of ground water. The principal source of water in the 24-county coastal Georgia area is the Upper Floridan aquifer, which underlies most of the Coastal Plain of Georgia, southwest South Carolina, southeast Alabama, and all of Florida (Miller, 1986). The Upper Floridan aquifer is an extremely permeable, high-yielding aquifer that was first developed in the 1880s and has been used extensively since. Saltwater contamination of the Upper Floridan aquifer at Brunswick, Ga., Jacksonville, Fla., and Hilton Head Island, S.C., also limit the availability of ground water in coastal Georgia (Krause and Clarke, 2001).

The Coastal Georgia Sound Science Initiative is a program of scientific and feasibility studies to support development of Georgia Environmental Protection Division's (GaEPD) final strategy to protect the Upper Floridan aquifer

from saltwater contamination. In support of the Coastal Georgia Sound Science Initiative, the U.S. Geological Survey (USGS)—in cooperation with GaEPD—is conducting studies to characterize and monitor ground-water flow and saltwater contamination; evaluate possible alternative sources of water to the Upper Floridan aquifer; simulate ground-water flow and movement of saltwater in response to various water-management approaches; and monitor changes in the hydrologic system. The study area includes southeast Georgia and adjacent parts of northeast Florida and southwest South Carolina (fig. 1).

As part of the Coastal Georgia Sound Science Initiative, ground-water discharge to streams was estimated for selected streams and rivers in a 67-county area of southeast Georgia, northeast Florida, and southwest South Carolina (55 counties in Georgia, 5 counties in Florida, and 7 counties in South Carolina). Results presented herein are being used to calibrate a regional ground-water flow model to evaluate ground-water flow and stream-aquifer relations of the Upper Floridan aquifer.

Purpose and Scope

This report describes stream-aquifer relations in the coastal area of Georgia and adjacent parts of Florida and South Carolina by estimating ground-water discharge to streams under a variety of climatic conditions. These estimates were made using hydrograph-separation techniques, drought-streamflow measurements, and linear-regression analysis of streamflow duration. The estimated ground-water discharge is being used to calibrate a regional ground-water flow model to evaluate ground-water flow and stream-aquifer relations of the Upper Floridan aquifer.

Continuous-discharge records from eight streamflow gaging stations (stations) were used to estimate baseflow using hydrograph-separation techniques for the 31-year period from 1971 to 2001; and continuous-discharge records from an additional six stations were used to estimate baseflow using linear-regression analysis of streamflow duration for the same period. Historical streamflow data collected from 22 stations during the 1954 drought, 7 stations during the 1981 drought, and 19 stations during the 2000 drought were used to evaluate intermediate basin ground-water discharge during dry periods (table 1). Precipitation data from 11 National Weather Service (NWS) stations (National Oceanic and Atmospheric Administration, 2002) and ground-water levels from 9 USGS wells (table 2) were evaluated for long-term trends (1971–2001).

Several tributaries to major rivers—Altamaha, Ogeechee, Salkehatchie, Satilla, Savannah, St Marys, and Suwannee—drain the study area. Streamflow records for continuous-record stations and several partial-record stations along the major rivers and tributaries were used in the investigation. Stream-discharge measurements were taken at 18 continuous-record and partial-record stations from July 31 through August 2, 2000, and stream-discharge measurements from 24 continuous-record stations were used to evaluate surface-water conditions

(fig. 1 and table 1). Measurements from 24 partial-record stations and continuous-record stations were collected for 1954 and from 12 partial-record stations and continuous-record stations for 1981. Data were collected from 62 continuous-record and partial-record stations on tributaries including synoptic measurements. Unless otherwise indicated, the primary source of data used in this report is the USGS National Water Information System (NWIS) (at <http://waterdata.usgs.gov/ga/nwis/nwis>). All data presented are by calendar year.

Description of Study Area

The GaEPD defines the coastal area of Georgia to include the 6 coastal counties and adjacent 18 counties, an area of about 12,240 square miles (mi²) (fig. 1). To account for natural hydrologic boundaries used for model simulation, the study area has been expanded to 32,661 mi² and includes the 24 coastal counties and outlying 43 counties extending into northeast Florida and southwest South Carolina.

The study area is located in the northern part of the southeastern Coastal Plain of Georgia, South Carolina, and Florida (fig. 1). Coastal Plain geology consists of layers of sand, clay, limestone, and dolomite that range in age from Late Cretaceous through Holocene. The northern limit of these strata and the contact between Coastal Plain sediments and Piedmont crystalline rocks correspond approximately to the Fall Line (Clarke and Zisa, 1976), a physiographic boundary between the Piedmont and Coastal Plain. The various strata dip and progressively thicken from the Fall Line to the southeast. The sedimentary sequence unconformably overlies Paleozoic to Mesozoic igneous, metamorphic, and sedimentary rocks (Chowns and Williams, 1983).

Coastal Plain sediments consist of fluvial, deltaic, and marine coastal and shelf deposits (Prowell and others, 1985). Numerous marine transgressions and regressions have deposited, removed, and redistributed sediments in the study area and the vicinity (Colquhoun, 1981). Carter and Putnam (1977) divided the Coastal Plain physiographic province into upper and lower Coastal Plain. In the upper Coastal Plain in Richmond County, Ga., sediments predominantly consist of nonmarine siliciclastic sediments. Marine sediments are more abundant in the lower Coastal Plain and include carbonate-shelf deposits in some Tertiary strata (Atkins and others, 1996).

The principal source of ground water for all uses in the coastal area is the Floridan aquifer system, consisting of the Upper and Lower Floridan aquifers (Miller, 1986; Krause and Randolph, 1989). Secondary sources of water include the surficial and Brunswick aquifer systems (Clarke, 2003), consisting of sand of Miocene to Holocene age. A generalized correlation chart of geologic and hydrologic units is shown in figure 2.

Land use primarily is urban in industrial areas and cities. Outside of these areas, land use is a mix of forest, wetlands, row crops, and pasture. Altitude ranges from sea level along the coast to about 400 feet (ft) near the Fall Line.

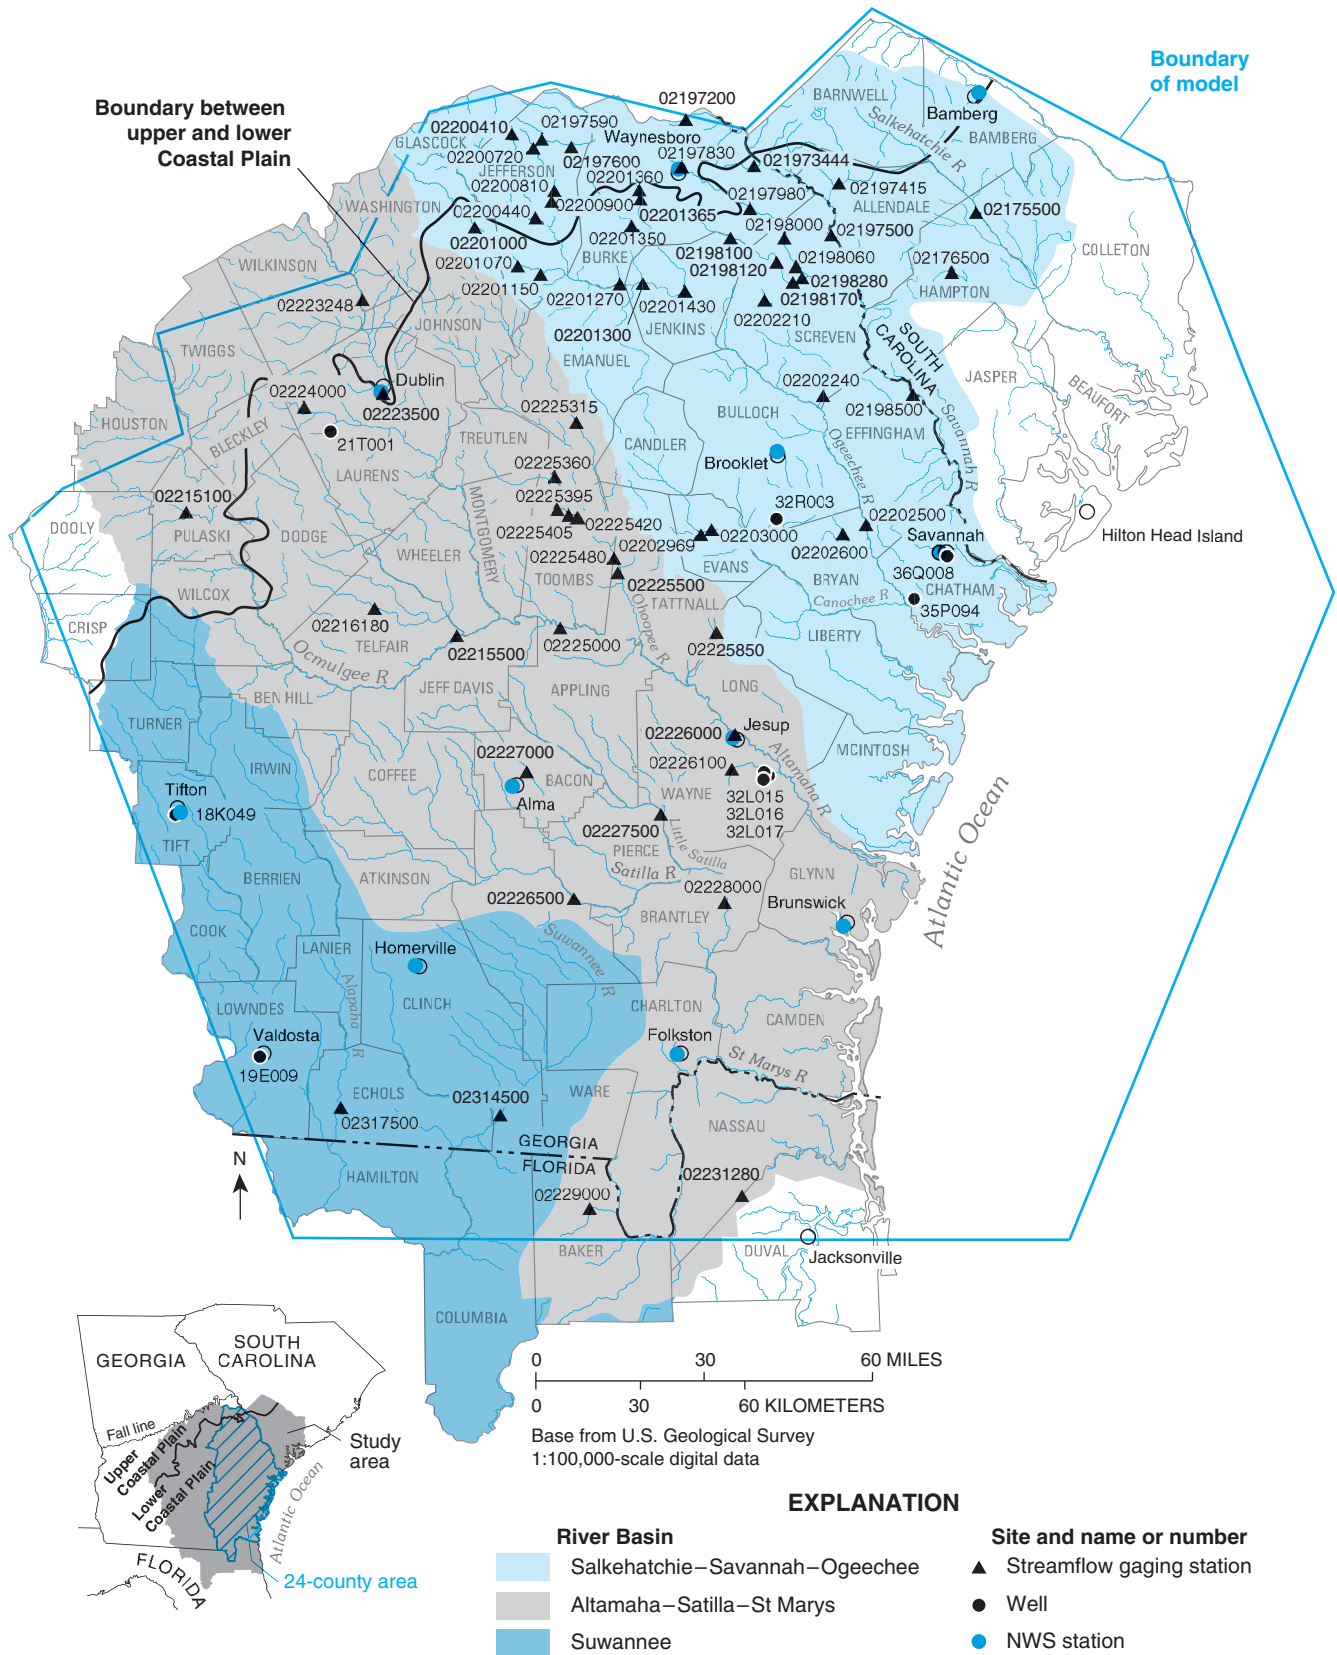


Figure 1. Location of study area, streamflow gaging stations, wells, and National Weather Service (NWS) stations.

4 Evaluation of Ground-Water Contribution to Streamflow in Coastal Georgia and Adjacent Parts of Florida and South Carolina

Table 1. Selected streamflow gaging and partial-record stations in Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins.

[*, partial-record station; —, data not available; mi², square miles; do., ditto]

Station number	Station name	Drainage area (mi ²)	County	Basin
Salkehatchie–Savannah–Ogeechee River Basin				
02175500	Salkehatchie River near Miley, S.C.	341.00	Hampton	Salkehatchie
¹ 02176500	Coosawhatchie River near Hampton, S.C.	203	do.	do.
02197200*	McBean Creek (Ga. Hwy 56) at McBean, Ga	71.4	Burke	Savannah
021973444*	Beaverdam Creek at River Rd near Girard, Ga.	23.3	do.	do.
02197415	Lower Three Runs at Martin, S.C.	109	Allendale	do.
02197500	Savannah River at Burtons Ferry Bridge, Millhaven, Ga.	8,650	Allendale/Screven	do.
02197590*	Brushy Creek at Wrens, Ga.	9.4	Jefferson	do.
02197600	Brushy Creek near Wrens, Ga.	28	do.	do.
02197830*	Brier Creek near Waynesboro, Ga.	473	Burke	do.
02197980*	Brier Creek (Ga. Hwy 23) near Sardis, Ga.	579	do.	do.
02198000	Brier Creek at Millhaven, Ga.	646	Screven	do.
02198060*	Brier Creek at US 301 near Sylvania, Ga.	669	do.	do.
02198100	Beaverdam Creek near Sardis, Ga.	30.8	Burke/Jenkins	do.
02198120*	Beaverdam Creek at Hilltonia, Ga.	85.3	Screven	do.
02198170*	Beaverdam Creek near Sylvania, Ga.	116	do.	do.
02198280*	Beaverdam Creek near Sylvania, Ga.	143	do.	do.
02198500	Savannah River near Cloy, Ga.	9,850	Effingham	do.
02200410*	Duhart Creek (SR 80) at Stapleton, Ga.	3.17	Jefferson	Ogeechee
02200440*	Rocky Comfort Creek (US 221) at Louisville, Ga.	286	do.	do.
02200720*	Big Creek (Penns Bridge Rd) near Wrens, Ga.	8.07	do.	do.
02200810*	Big Creek above Louisville, Ga.	56.9	do.	do.
02200900*	Big Creek near Louisville, Ga.	95.8	do.	do.
02201000	Williamson Swamp Creek at Davisboro, Ga.	109	Washington	do.
02201070*	Williamson Swamp Creek at Bartow, Ga.	185	Jefferson	do.
02201150*	Williamson Swamp Creek at Wadley, Ga.	233	do.	do.
02201270*	Barkcamp Creek (SR 17) near Midville, Ga.	31.7	Burke	do.
02201300*	Chow Mill Creek near Herndon, Ga.	23	Jenkins	do.
02201350*	Buckhead Creek near Waynesboro, Ga.	64	Burke	do.
02201360*	Rocky Creek at SR 24 near Waynesboro, Ga.	31.7	do.	do.
02201365*	Rocky Creek near Waynesboro, Ga.	34.8	Burke	Ogeechee
02201430*	Buckhead Creek at Millen, Ga.	272	Jenkins	do.
02202210*	Ogeechee Creek near Sylvania, Ga.	14	Screven	do.
02202240*	Ogeechee Creek near Oliver, Ga.	141	do.	do.
02202500	Ogeechee River near Eden, Ga.	2,650	Effingham/Bryan	do.
02202600	Black Creek near Blitchton, Ga.	232	Bryan	do.
02202969*	Cedar Creek (SR 129) at Claxton, Ga.	—	Evans	do.
02203000	Canoochee River near Claxton, Ga.	555	do.	do.

Table 1. Selected streamflow gaging and partial-record stations in Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins.—Continued[* , partial-record station; —, data not available; mi², square mile; do., ditto]

Station number	Station name	Drainage area (mi ²)	County	Basin
Altamaha–Satilla–St Marys River Basin				
02215100	Tucsawhatchee Creek near Hawkinsville, Ga.	163.00	Pulaski	Altamaha
02215500	Ocmulgee River at Lumber City, Ga.	5,180	Telfair/Jeff Davis	do.
02216180	Turnpike Creek near McRae, Ga.	49.2	do.	do.
02223248	Oconee River near Oconee, Ga.	3,770	Wilkins/Washington	do.
02223500	Oconee River at Dublin, Ga.	4,390	Laurens	do.
02224000	Rocky Creek near Dudley, Ga.	62.9	do.	do.
02225000	Altamaha River near Baxley, Ga.	11,600	Toombs/Appling	do.
02225315*	Jacks Creek near Wesley, Ga.	8.63	Emanuel	do.
02225360*	Pendleton Creek near Normantown, Ga.	101	Toombs/Emanuel	do.
02225395*	Swift Creek (SR 130) near Vidalia, Ga.	36	Toombs	do.
02225405*	Swift Creek (US 1) near Lyons, Ga.	46.3	do.	do.
02225420*	Swift Creek (SR 152) near Lyons, Ga.	55.6	do.	do.
02225480*	Ohoopce River (US 280) near Reidsville, Ga.	1,070	Tattnall/Toombs	do.
02225500	Ohoopce River near Reidsville, Ga.	1,110	Tattnall	do.
02225850*	Beards Creek near Glennville, Ga.	74.4	Long/Tattnall	do.
02226000	Altamaha River at Doctortown, Ga.	13,600	Long/Wayne	do.
02226100	Penholoway Creek near Jesup, Ga.	209	Wayne	do.
02226500	Satilla River near Waycross, Ga.	1,190	Ware	Satilla
02227000	Hurricane Creek near Alma, Ga.	139	Bacon	do.
02227500	Little Satilla River near Offerman, Ga.	646	Wayne/Pierce	Satilla
02228000	Satilla River at Atkinson, Ga.	2,790	Brantley	do.
02229000	Middle Prong St Marys River at Taylor, Fla.	125	Baker	St Marys
02231280	Thomas Creek near Crawford, Fla.	29.9	Duval/Nassau	do.
Suwannee River Basin				
02314500	Suwannee River at Fargo, Ga.	1,260	Clinch	Suwannee
02317500	Alapaha River at Statenville, Ga.	1,390	Echols	do.

¹For the purpose of this study, data from station 02716500 in the Broad–St Helen River Basin were included in the Salkehatchie–Savannah–Ogeechee River Basin.

Previous Studies

Hydrogeologic investigations of ground water in coastal Georgia include Miller (1986), who described the hydrogeologic framework of the Floridan aquifer system in Georgia, Florida, South Carolina, and Alabama; Krause and Randolph (1989), who simulated ground-water flow in the Floridan aquifer system in southeast Georgia and adjacent parts of South Carolina and Florida; and Clarke and others (1990), who described the geology and ground-water resources of 13 counties in the present study area.

Reports on stream-aquifer relations in the study area include Faye and Mayer (1990), who described stream-aquifer relations and ground-water flow in the northern

Coastal Plain of Georgia and adjacent South Carolina and Alabama. Atkins and others (1996) estimated ground-water contribution to streams in the central Savannah River Basin using hydrograph-separation techniques and a drought-streamflow analysis. Clarke and West (1997, 1998) simulated ground-water flow and stream-aquifer relations near the Savannah River Site in Georgia and South Carolina. Peck and others (2001) evaluated hydrogeologic conditions and pond-aquifer relations at two test sites in coastal Georgia. Abu-Ruman and Clarke (2001) described preliminary simulations of pond-aquifer interaction at a test site near Brunswick, Georgia. Mosner (2002) described stream-aquifer relations and the potentiometric surface of the Upper Floridan aquifer in southwest Georgia.

Table 2. Well construction data for selected wells used in Georgia.

[ft, foot; altitude in feet below North American Vertical Datum 1988; screened or opened interval in feet below land surface; °, degree; ', minute; ", second]

Well identification number (fig. 1)	Well name	County	Latitude	Longitude	Altitude of land surface datum (ft)	Top of screened or open interval (ft)	Bottom of screened or open interval (ft)	Aquifer
18K049	U.S. Geological Survey, test well 1	Tift	31°27'12"	82°59'33"	330.00	270	620	Upper Floridan
19E009	City of Valdosta	Lowndes	30°49'51"	83°16'58"	217	200	342	Upper Floridan
21T001	Danny Hogan	Laurens	32°27'06"	83°03'28"	259	89	123	Upper Floridan
32L015	Georgia Geologic Survey, Gardi, test well 1	Wayne	31°32'52"	81°43'36"	74	545	750	Upper Floridan
32L016	Georgia Geologic Survey, Gardi, test well 2	Wayne	31°32'52"	81°43'36"	74	320	340	Upper Brunswick
32L017	Georgia Geologic Survey, Gardi, test well 3	Wayne	31°32'52"	81°43'36"	74	200	215	Surficial
32R003	Bulloch South, test well 2	Bulloch	32°12'40"	81°41'15"	120	134	155	Miocene
35P094	University of Georgia, Bamboo Farm	Chatham	31°59'50"	81°16'12"	18.7	15	15	Surficial
36Q008	Layne-Atlantic Company	Chatham	32°05'30"	81°08'50"	9.91	250	406	Upper Floridan

Since 1977, the USGS has described ground-water levels annually in reports for selected wells in Georgia. The most recent of these reports described ground-water conditions in Georgia for 2002, including annual and period-of-record water-level fluctuations and trends for wells in the 67-county study area (Leeth and others, 2003). Peck and others (1999) described the potentiometric surface of the Upper Floridan aquifer in Georgia and adjacent parts of Alabama, Florida, and South Carolina, and water-level trends in Georgia during 1990–98. Fanning (1999; 2003) described water use in coastal Georgia during 1980–97 and 1980–2000, respectively.

Streamflow conditions are described annually in Georgia in the report series, “Water resources data for Georgia.” The most recent of these reports described streamflow conditions in Georgia during 2002, including records for 62 stations in the study area (Hickey and others, 2002; Coffin and others, 2002). Thomson and Carter (1955) reported effects of drought on streamflow for the 1954 drought; Carter (1983) for the 1980–81 drought; and Hale and others (1989) for the 1986 drought.

Method of Study

This study includes several work elements to estimate the ground-water discharge to streams under a variety of climatic conditions. The work includes compiling discharge, precipitation, and water-level data; separation of streamflow hydrographs to estimate mean annual ground-water contribution to streams; and evaluation of streamflow records and periodic discharge measurements during drought periods 1954, 1981,

and 2000, to estimate minimum values of ground-water discharge. Comparison of data was made between the upper and lower Coastal Plain when data were available. When no or few data were available, comparison was made between the upper and lower parts of the basins within the study area. This is an informal division done solely for comparison in this report.

Literature review provided information necessary to describe a conceptual model of stream-aquifer relations. Much of the conceptual model is based on results of previous investigations by Toth (1962; 1963), Freeze and Witherspoon (1966; 1967; 1968), Faye and Mayer (1990), Atkins and others (1996), and Clarke and West (1998). These studies show that large rivers and their tributaries function as hydraulic drains for ground-water flow; and that during severe droughts, most of the discharge in these streams is contributed by ground water.

Baseflow Estimation

During periods of little or no rainfall, streamflow is assumed to be composed almost entirely of ground water (baseflow). As a result, the amount of streamflow contributed by ground water can be estimated. Three methods were used to estimate ground-water contribution to streamflow: hydrograph separation, field measurements during droughts, and linear-regression analysis of streamflow duration. Baseflow was estimated at eight stations using HYSEP (Sloto and Crouse, 1996), a computer program that separates the streamflow hydrographs into baseflow and surface-runoff components. The method for streamflow hydrograph separation used by this program was adapted from Pettyjohn and Henning (1979) and uses streamflow data in standard USGS daily values format.

Series	System	Lower Coastal Plain ¹		Upper Coastal Plain ³			
		Geologic unit ²	Hydrogeologic unit Savannah Brunswick		Geologic unit	Hydrogeologic unit	
Post-Miocene		Undifferentiated	Surficial aquifer		Undifferentiated	Upper Three Runs aquifer	
Miocene	Upper	Ebenezer Formation	Confining unit				
	Middle	Coosawhatchie Formation					
	Lower	Marks Head Formation					Upper Brunswick aquifer
		Parachucla Formation					Confining unit
	Tiger Leap Formation	Lower Brunswick aquifer					
Oligocene		Lazaretto Creek Formation	Confining unit				
		Suwannee Limestone	Upper Floridan aquifer				
Eocene	Upper	Ocala Limestone	Confining unit	Barnwell Group			
	Middle	Avon Park Formation		Santee Limestone			Confining unit
	Lower	Oldsmar Formation	Lower Floridan aquifer	Congaree Formation	Gordon aquifer		
Paleocene		Cedar Keys Formation	Confining unit	Fernandina permeable zone	Snapp Formation Ellenton Formation (undifferentiated)	Confining unit ⁴	
Upper Cretaceous		Undifferentiated		Steel Creek Formation Black Creek Group (undifferentiated)	Upper Dublin aquifer		

¹Modified from Randolph and others, 1991; Clarke and Krause, 2000.
²Modified from Randolph and others 1991; Weems and Edwards, 2001.
³Modified from Falls and others, 1997.
⁴In local areas includes Millers Pond aquifer.

Figure 2. Geologic and hydrogeologic units of the upper and lower Coastal Plain, Georgia.

HYSEP uses three methods to separate baseflow: fixed interval, sliding interval, and local minimum (fig. 3). Each method uses a different algorithm to separate baseflow systematically from runoff by connecting low points on the streamflow hydrograph (Sloto and Crouse, 1996). The duration of surface runoff is calculated from the empirical relation:

$$N=A^{0.2},$$

where N is the number of days for the cessation of runoff, and A is the drainage area of the basin (Linsley and others, 1982). All three methods use an algorithm based on the interval 2N*, which is the odd integer between 3 and 11 that is nearest to

2N (Pettyjohn and Henning, 1979). The three methods as described by Sloto and Crouse (1996) are:

- The *fixed-interval method* assigns the lowest discharge in each 2N* interval to all days in that interval starting with the first day of the period of record.
- The *sliding-interval method* finds the lowest discharge in one-half the interval minus 1 day [0.5(2N*-1) days] prior to and after the day being considered and assigns the discharge value to that day; overlapping of intervals is allowed.

- The local-minimum method checks each day to determine whether the discharge is the lowest discharge in one-half the interval minus 1 day $[0.5(2N^*-1)$ days]; overlapping of intervals is not allowed.

Mosner (2002) compared the results of the three methods using four basins in southwest Georgia and found that the fixed-interval and sliding-interval methods are biased toward baseflow; and thus, overpredict ground-water contribution to streamflow. A plot of the three methods of hydrograph separation for Beaverdam Creek (station 02198100) near Sardis, Ga., is shown in figure 3. The plot shows the overestimation of the fixed-interval and sliding-interval methods; for this reason, the local-minimum method was used to estimate baseflow in the study area.

Surface-water discharge measurements collected during the three drought periods—1954, 1981, and 2000—were used to estimate baseflow for selected tributaries of the Salkehatchie–Savannah–Ogeechee (SSO) River, Altamaha–Satilla–St Marys (SAS) River and Suwannee River Basins. The minimum ground-water discharge to tributaries between two adjacent reaches during the 1954 (22 stations), 1981 (7 stations), and 2000 (19 stations) drought years were collected from continuous-record stations and periodic discharge measurements. Unit-area ground-water discharge was measured for 24 stations during 1954, 12 stations during 1981, and 24 stations during 2000 within the three major basins. Drought year 1986 was not used in this evaluation because the drought effect on streamflow in this region was minor compared to other droughts.

Linear-regression analysis was used to determine the flow duration that most closely estimates baseflow in the study area. Flow duration is a cumulative frequency curve that shows the percentage of time a specific discharge was equaled or exceeded during a given period of time. Flow-duration curves integrate the effects of topography, geology, and climate of the basin. For example, baseflow of streams in the glacial till/outwash of Long Island was estimated from 55-percent flow duration (Reynolds, 1982); whereas in the southeastern sand aquifer, baseflow was estimated to range between 60–65 percent of mean annual streamflow (Stricker, 1983). Mean annual baseflow for 14 stations in the study area was compared to flow durations ranging from Q_1 to Q_{99} (streamflow equaled or exceeded 1 percent to 99 percent of the time) to derive flow duration that is representative of baseflow. This flow duration can be applied to streams in the study area to estimate baseflow for a given period.

Precipitation Trends

National Weather Service stations within the upper and lower parts of the SSO, SAS, and Suwannee River Basins were selected to estimate how long-term variations in precipitation affect fluctuations in streamflow and ground-water levels. The cumulative departure from normal precipitation for

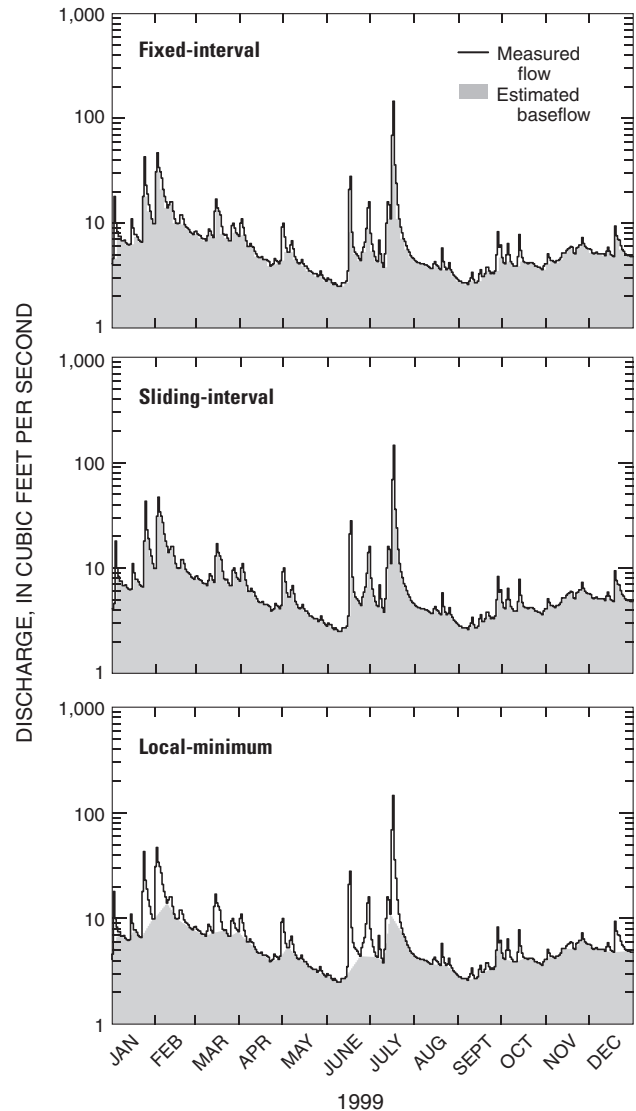


Figure 3. Differences in separating baseflow using fixed-interval, sliding-interval, and local-minimum methods of HYSEP at Beaverdam Creek (station 02198100) near Sardis, Georgia, 1999.

the period 1971–2001 was used to evaluate any trends in the precipitation. Cumulative departure describes the long-term surplus or deficit of precipitation during a designated period, and is derived by adding successive monthly values of departures from normal precipitation. Normal precipitation for a given month is defined as the average of total monthly precipitation during a specified 30-year period (National Oceanic and Atmospheric Administration, 2002); for this report, the period 1971–2000 was used to determine normal precipitation for computation of cumulative departure. Average precipitation is the arithmetic mean of total monthly precipitation for the period of study 1971–2001.

Well and Streamflow Gaging Station Identification Systems

Wells in Georgia are identified by a system based on USGS topographic maps. Each 7½-minute topographic quadrangle map in Georgia has been assigned a number and letter designation beginning at the southwest corner of the State. Numbers increase sequentially eastward through 39; letters advance northward through “Z,” then double-letter designations “AA” through “PP” are used. The letters “I,” “O,” “II,” and “OO” are not used. Wells inventoried in each quadrangle are numbered sequentially beginning with “1.” Thus, the second well inventoried in the Folkston quadrangle (29E) is designated 29E002.

Stations are assigned an 8- to 14-digit station identification number according to downstream order along the main stream. The first two digits of the station identification number represent the “Part” number with the remaining digits representing the downstream order number. All stations on a tributary entering upstream from a mainstream station are listed before that station. A station on a tributary that enters between two mainstream stations is listed between them. A similar order is followed in listing stations on first rank, second rank, and other ranks of tributaries. Gaps are left in the series of numbers to allow for new stations that may be established; hence, the numbers are not consecutive.

Stream-Aquifer Relations

Water in streams and aquifers interact within a dynamic hydrologic system that includes aquifers, streams, reservoirs, and floodplains. These systems are interconnected and form a single hydrologic entity that is stressed by natural hydrologic, climatic, and anthropogenic factors.

Stream-Aquifer Flow Systems

Under steady-state conditions, most ground-water systems can be divided into three subsystems: local, intermediate, and regional (Toth, 1962; 1963). Relatively shallow and short flowpaths that extend from a topographic high (recharge area) to an adjacent topographic low (discharge area) characterize a local flow system. Intermediate flowpaths include at least one local flow system between their respective points of recharge and discharge, and are longer and deeper than local flowpaths. Regional flowpaths begin at or near a major ground-water divide and terminate at a regional drain (fig. 4).

The number, distribution, and depth of influence of local flow regimes are largely a function of water-table configuration and aquifer thickness relative to watershed relief (Faye and Mayer, 1990). Where aquifer sediments are thin, local flow systems may dominate. Local flow systems are affected

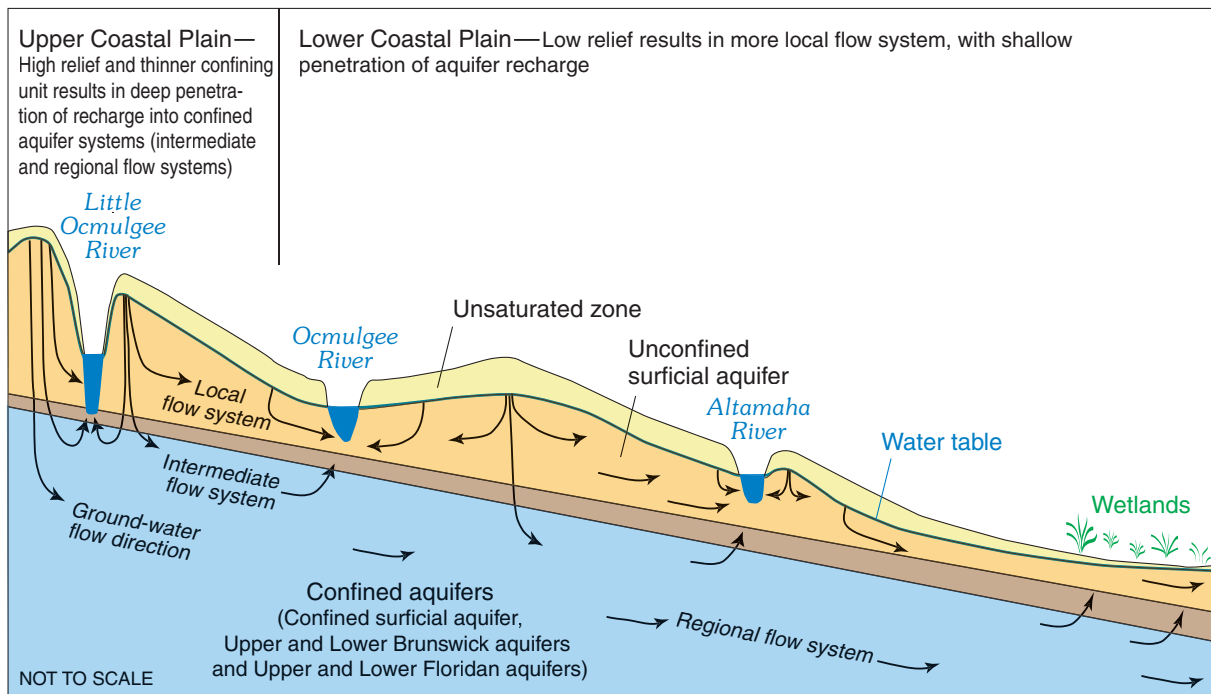


Figure 4. Schematic diagram of the conceptual hydrologic flow system in the upper and lower Coastal Plain of Georgia (modified from Toth, 1962; 1963).

mostly by climatic variations. The net recharge and amount of ground-water flow are distributed according to the flow system, with flow and net recharge being greatest in local flow systems and least in regional flow systems (Toth, 1963). Local flow systems are most dynamic in areas of high relief such as the upper Coastal Plain (fig. 4).

In the study area, recharge to the hydrologic system is provided by rainfall that ranges spatially from an average of about 47 to 53 inches per year (in/yr), based on mean annual precipitation for the 30-year period 1971–2000 (fig. 5). Most of the recharge is discharged from the shallow, local flow systems into small streams or is lost as evapotranspiration. In the intermediate flow system, some of the water is discharged to major tributaries. A smaller percentage of recharge infiltrates through clayey confining units and enters the deeper regional flow system (Clarke and West, 1997). In the regional flow system, some of the water discharges to the Savannah and Altamaha River valleys and some flows southward discharging into the Atlantic Ocean. Faye and Mayer (1990) estimated mean annual ground-water discharge to the Savannah River by computing the gain in stream discharge between Augusta (station 02197000) and Millhaven (station 02197500). This estimate includes contribution from surface runoff and should be considered to represent the maximum aquifer discharge for that reach. Faye and Mayer (1990) estimated a gain of 660 cubic feet per second (ft³/s) from combined intermediate and regional flow systems and a gain of 560 ft³/s from the local flow system. Baseflow was estimated by a modified hydrograph-separation technique to be 1,220 ft³/s. Thus, in the Savannah River Basin about 54 percent of ground-water recharge entered the intermediate and regional flow systems, and the remaining 46 percent entered the local flow system (Faye and Mayer, 1990). The local and intermediate flow systems affect much of the stream discharge in the northern part of the study area, and the intermediate and regional flow systems affect stream discharge in the southern part of the study area.

In the upper Coastal Plain, where relief is relatively high, local flow systems dominate. In upland areas, the altitude of the water table in the vicinity of a stream generally is higher than the altitude of the stream-water surface making possible the discharge of ground water into the stream. Small streams may have very little runoff because pervious sandy soil drains water rapidly and the channels of streams do not cut deep enough to intercept ground water (Thomson and Carter, 1955). Large streams in the upper Coastal Plain generally have uniform flow because of small runoff and high yields due to ground-water discharge (Thomson and Carter, 1955).

In the lower Coastal Plain, the relatively flat topography is dominated by estuaries and marshes. Local flow systems have less affect on stream conditions because of low relief and shallow ground-water hydraulic gradients from aquifers toward streams. Thomson and Carter (1955) described the lower Coastal Plain as having the least streamflow within Georgia because of high air temperatures and low flow-producing land characteristics, and because of high consumptive demands

for water by the dense growth in the swamps. The terrain consists of wide and flat ridges separated by wide, swampy, and heavily wooded valleys (Thomson and Carter, 1955). Tidal effects and differences in runoff, due to soil type and vegetative cover, account for the variation in baseflow between upper and lower Coastal Plain (Carter and Putnam, 1977).

Climate

The study area has a mild climate with warm, humid summers and mild winters. Mean annual temperature ranges from about 63 degrees Fahrenheit (°F) in Burke County, Ga., to about 70°F in Glynn County, Ga., for the period 1971–2000 (National Oceanic and Atmospheric Administration, 2002).

Precipitation data were evaluated from 10 NWS stations in Georgia and 1 in South Carolina. Of these stations, six were selected to determine long-term trends that could affect ground-water recharge and associated water-level fluctuations. The Georgia stations are located at Alma, Brooklet, Brunswick, Dublin, Folkston, Homerville, Jesup, Savannah, Tifton, and Waynesboro; the South Carolina station is located at Bamberg (figs. 1 and 5). Mean annual precipitation, based on the period 1971–2000 ranges from about 47 in/yr in Waynesboro, Ga., to about 53 in/yr in Folkston, Ga. (fig. 5). Rainfall is not evenly distributed throughout the year. The maximum rainfall generally occurs during the summer months of June, July, and August (fig. 6). Estimated evapotranspiration ranges from 31 in/yr in the northern part of the study area to more than 40 in/yr in Charlton and Ware Counties, Ga., near the Okefenokee Swamp (Krause and Randolph, 1989). Rainfall as a source of recharge to aquifers is most important during the nongrowing season, generally October through March, when evapotranspiration is lowest.

Surface Water

The study area is drained by several major river systems: SSO River Basin, SAS River Basin, and Suwannee River Basin (fig. 1; table 1). The largest river basins are the SAS, with a drainage area of about 14,142 mi²; and the SSO, with a drainage area of about 10,734 mi². The Suwannee River has a drainage area of about 6,400 mi². With the exception of the Suwannee River, which drains to the Gulf of Mexico, each of the rivers discharges into the Atlantic Ocean. Surface-water discharge in the study area primarily is affected by precipitation, baseflow, evapotranspiration, and pumpage. Four power plants use surface water within the SSO River Basin, and one power plant within the SAS River Basin. Surface water accounts for about 75 percent of total water usage in the Georgia Coastal Plain (Fanning, 1999). In the Coastal Plain, mean annual runoff ranges between 24 and 31 percent of total rainfall (Carter and Stiles, 1983). In the study area, runoff during the period 1941–70 was about 14 in/yr in the upper Coastal Plain, and about 12 in/yr in the lower Coastal Plain (Carter and Stiles, 1983) (fig. 7).

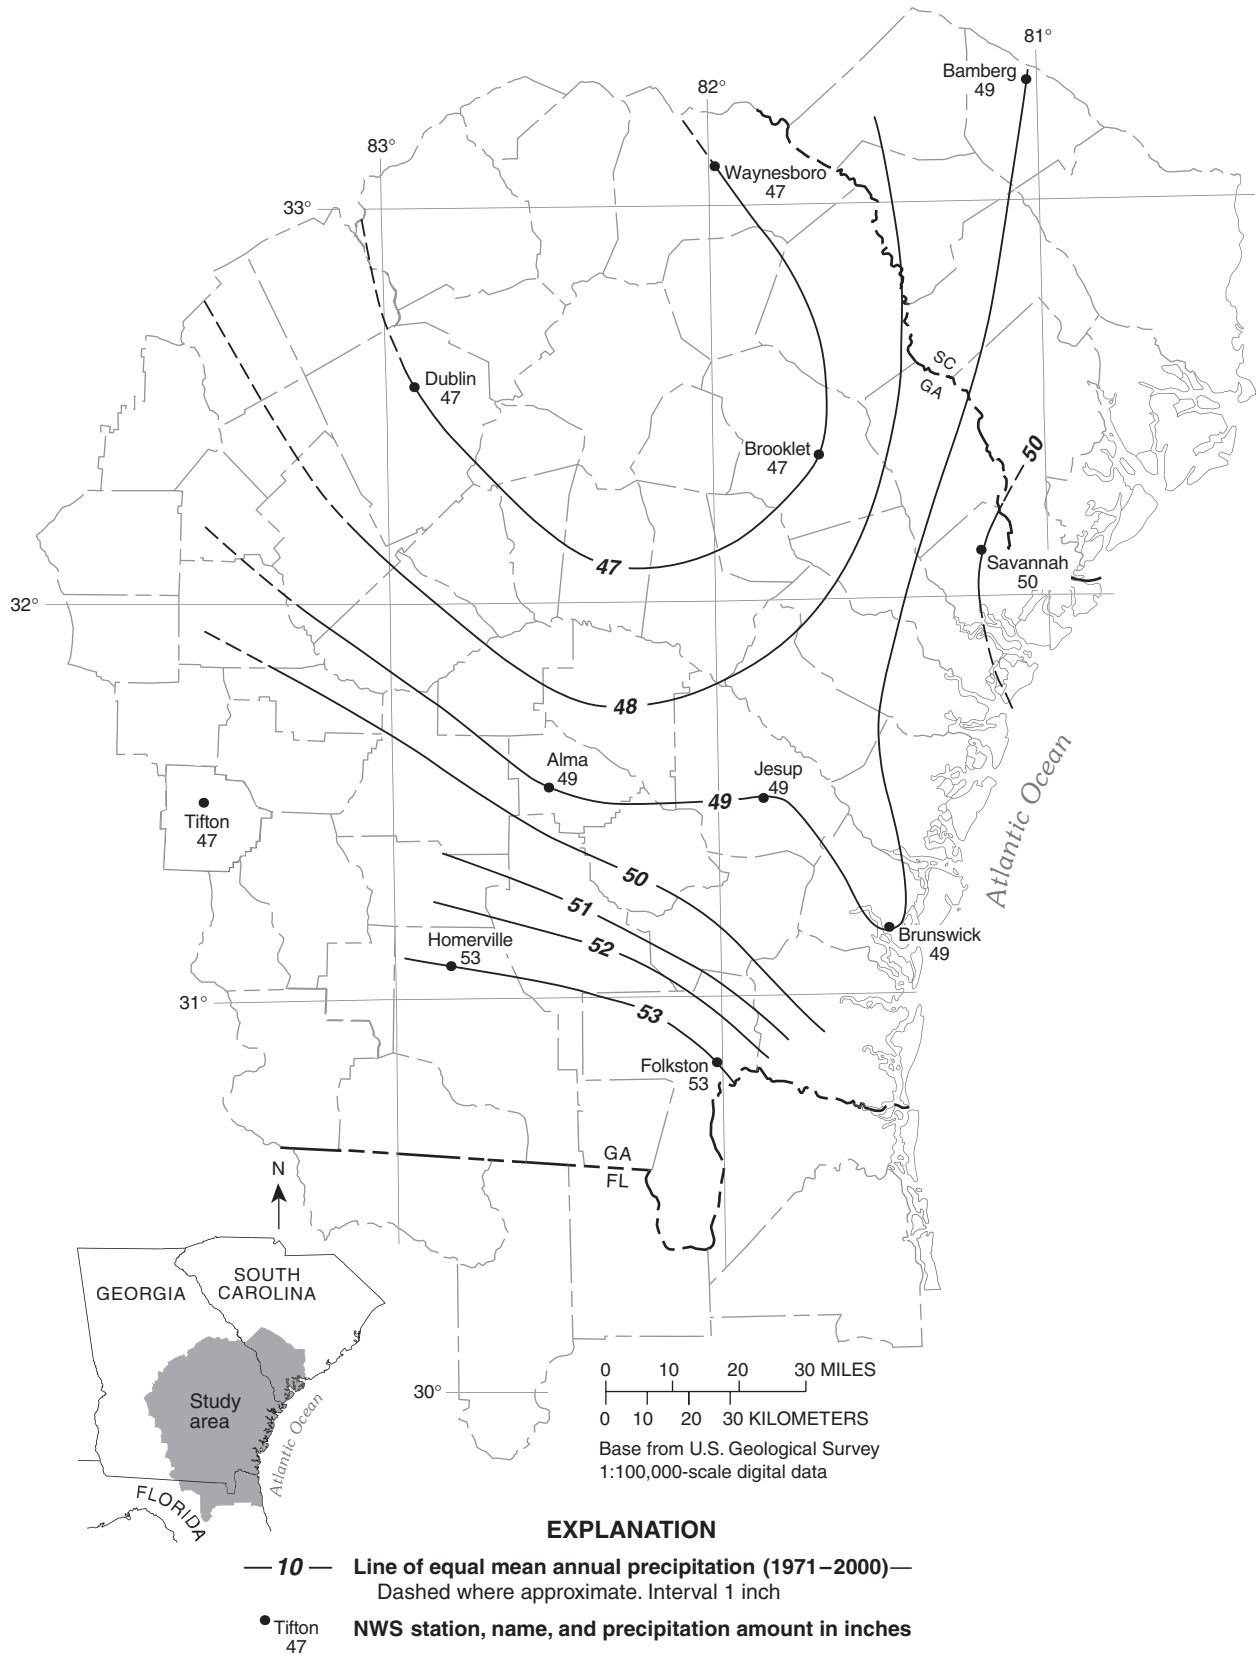


Figure 5. Mean annual precipitation for selected National Weather Service (NWS) stations in the Coastal Plain of Georgia and South Carolina, 1971–2000.

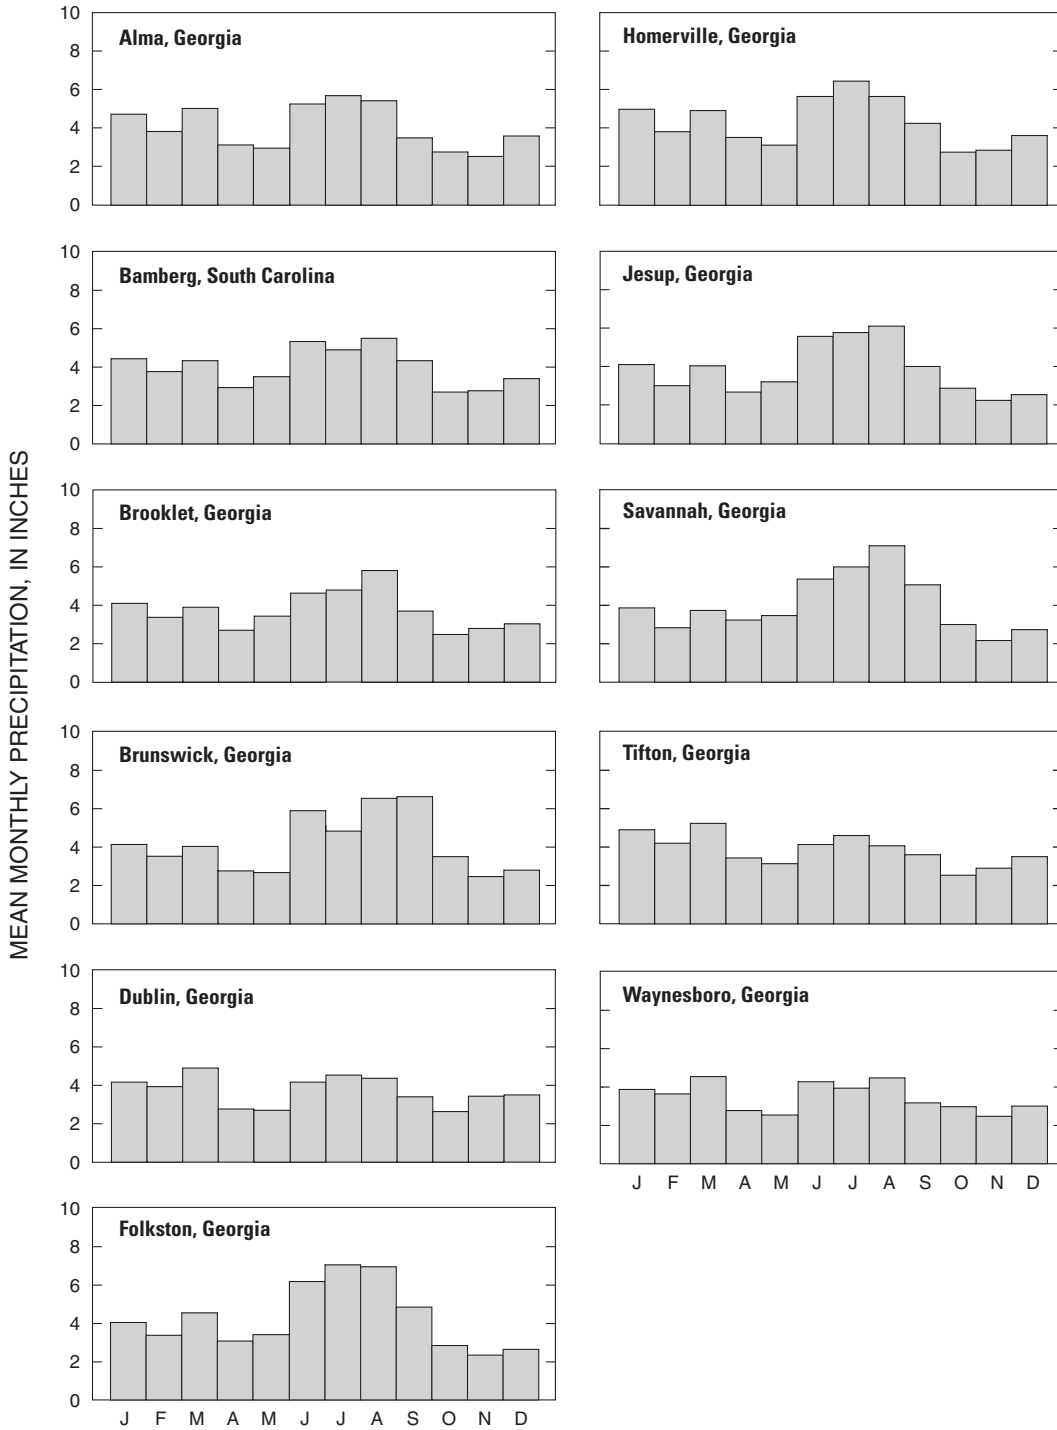


Figure 6. Mean monthly precipitation at selected National Weather Service stations in the Coastal Plain area of Georgia and South Carolina, 1971–2001.

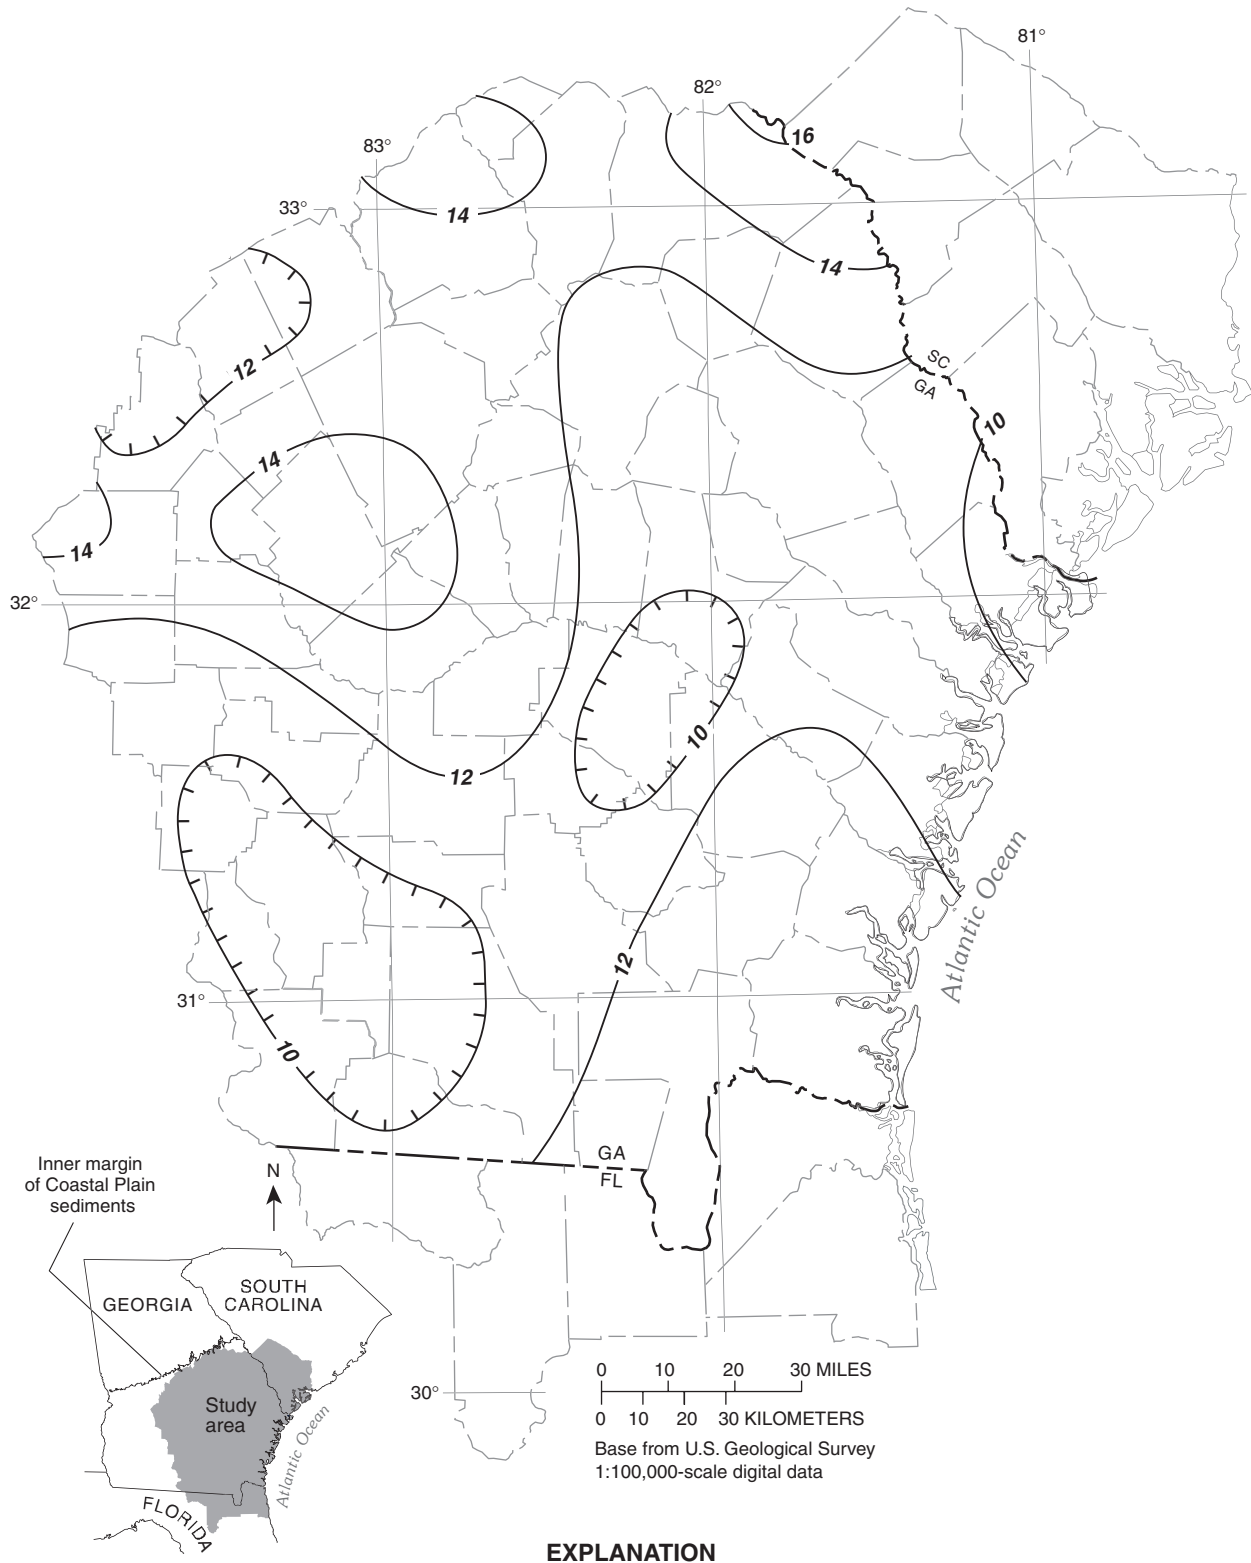


Figure 7. Mean annual runoff for the Coastal Plain of Georgia, 1941-70.

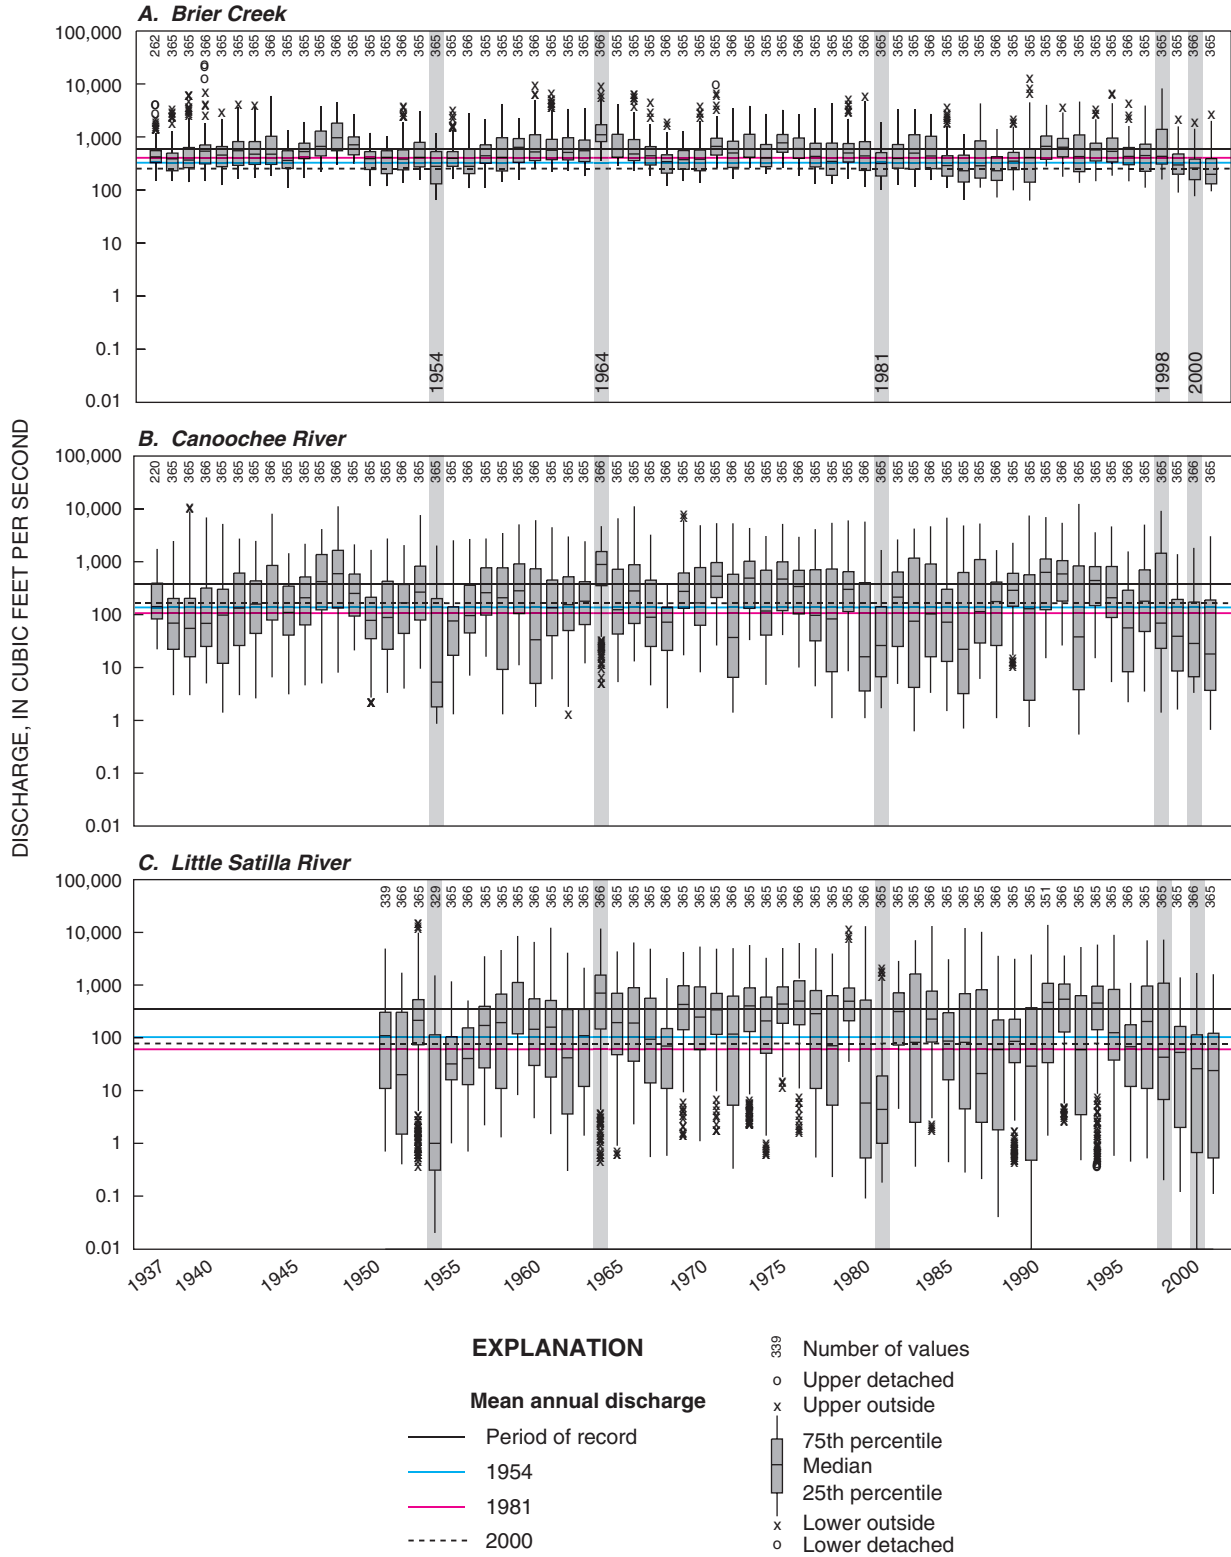


Figure 8. Distribution of daily streamflow for (A) Brier Creek (station 02198000) near Millhaven, Georgia; (B) Canoochee River (station 02203000) near Claxton, Georgia; and (C) Little Satilla River (station 02227500) near Offerman, Georgia, for the period of record.

Streamflow characteristics are summarized in boxplots showing streamflow duration for each year during the period of record for selected stations in the study area (fig. 8). For three comparably sized basins, boxplots of daily streamflows were prepared for each year of the period of record. The boxplots depict the minimum, maximum, mean, and median daily discharge; and the 25 and 75 percentiles for each calendar year. The mean annual discharge was computed for the period of record and used as a reference for the drought-year streamflow. Brier Creek (station 02198000) in the SSO River Basin shows climatically driven rise and fall (cyclical) in streamflow throughout the period of record (fig. 8). The mean annual discharges indicate that the 2000 drought was the most severe followed by the 1954 and 1981 droughts, respectively. The Canoochee River (station 02203000) in the SSO River Basin also shows a climatically driven cyclical trend in discharge throughout the period of record. At this station, the 1981 drought was the most severe followed by the 1954 and 2000 droughts, respectively (fig. 8). The Little Satilla River (station 02227500) is less cyclical than the previous two stations, with the 1981 drought the most severe followed by the 2000 and 1954 droughts, respectively (fig. 8). Pronounced dry years are evident at each site during 1954, 2000, and 2001, and wet periods are evident during 1964 and 1998. In any given year, streamflow generally is highest during the winter-spring and lowest during the summer-fall when evapotranspiration is highest (fig. 9).

Ground Water

Sediments and rock form a series of aquifers and confining units that have variable geologic and hydrologic properties in the upper and lower Coastal Plain (fig. 2). The following sections describe the various hydrogeologic units and water-level fluctuations and trends—long-term incline or decline in overall water levels—in major aquifer units in the upper and lower Coastal Plain.

Hydrogeologic Units

Principal water-bearing units in the upper Coastal Plain are, in order of increasing depth, the Upper Three Runs aquifer, Gordon aquifer, and Upper Dublin aquifer (fig. 2). In the lower Coastal Plain, the principal water-bearing units are in descending order, the surficial aquifer system, Brunswick aquifer system, and Floridan aquifer system (fig. 2). Low-permeability clayey confining units separate these water-bearing units.

Upper Coastal Plain

The Upper Three Runs aquifer, formerly referred to as the Jacksonian aquifer (Vincent, 1982), consists of quartz, calcareous sand, and limestone of the Barnwell Group and undifferentiated post-Miocene deposits (fig. 2) (Falls and others, 1997; Huddleston and Hetrick, 1986). The sands are

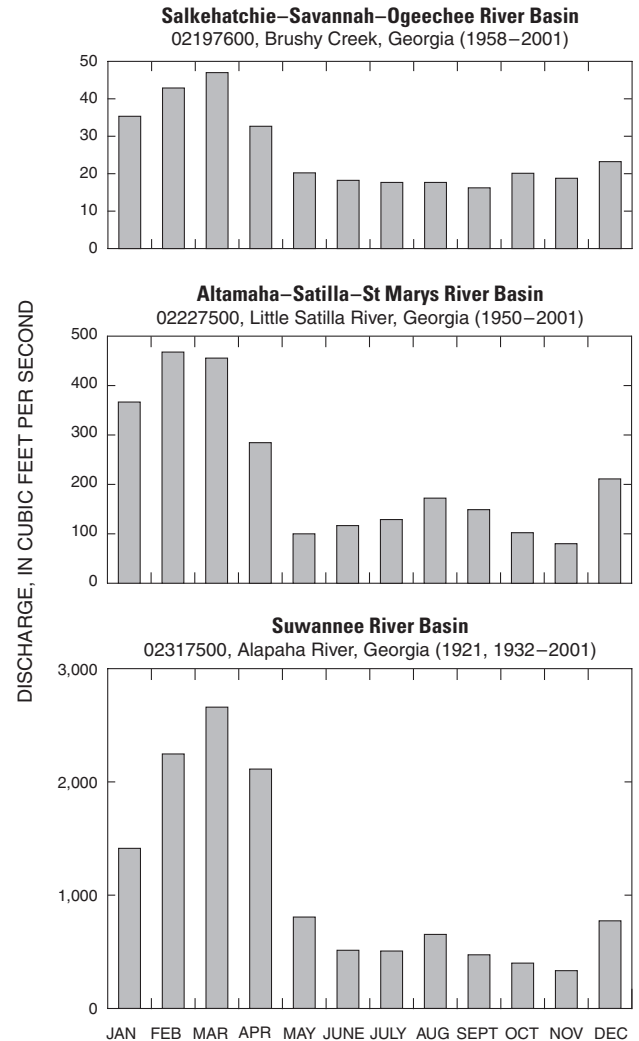


Figure 9. Mean monthly streamflow at a selected streamflow gaging station within the Salkehatchie-Savannah-Ogeechee, Altamaha-Satilla-St Marys, and Suwannee River Basins for the periods of record.

highly permeable; however, low-permeability clay beds and lenses are present at the top of the aquifer (Huddleston and Summerour, 1996). The Upper Three Runs aquifer is hydrogeologically equivalent to the Upper Floridan aquifer in the lower Coastal Plain.

The Gordon aquifer, underlying the Upper Three Runs aquifer, consists of sand and calcareous sand of the Congaree Formation (fig. 2) (Falls and others, 1997). The Gordon aquifer is the updip equivalent of the Lower Floridan aquifer in the lower Coastal Plain. The Gordon aquifer is underlain by a confining unit that consists of black laminated clay of the Ellenton Formation and moderately to poorly sorted, fine to very coarse sand of the Snapp Formation.

The Upper Dublin aquifer underlies the Gordon aquifer. The Upper Dublin aquifer consists of poorly to moderately sorted fine quartz sand with thin beds of clay of the Steel

Creek Formation and Black Creek Group, undifferentiated (fig. 2). The Upper Dublin aquifer is hydrogeologically equivalent to the Fernandina permeable zone of the Lower Floridan aquifer in the lower Coastal Plain.

Lower Coastal Plain

In the lower Coastal Plain, the surficial aquifer system consists of interlayered sand, clay, and thin limestone beds of post-Miocene age (Clarke and others, 1990; Leeth, 1999). Generally, the surficial aquifer is under water-table conditions throughout the study area. Locally, however, the aquifer may be confined or semiconfined by dense phosphatic limestone or dolomite, and phosphatic silty clay of undifferentiated Miocene sediments (Leeth, 1999; Clarke, 2003). A confining unit that consists of clay, silt, phosphatic limestone or dolomite, and sand of Miocene age underlies the surficial aquifer (fig. 2). Sand and limestone within this unit have been identified as a source of water in parts of the coastal area. Clarke and others (1990) designated this unit as the upper and lower Brunswick aquifers.

The upper Brunswick aquifer consists of poorly sorted, fine to coarse, slightly phosphatic and dolomitic quartz sand of the Coosawhatchie and Marks Head Formations (fig. 2) (Randolph and others, 1991; Weems and Edwards, 2001). This aquifer is confined by upper and lower confining units of the Miocene Parachucla Formation. The upper Brunswick aquifer is present in the Brunswick area and generally is absent in the Savannah area.

The lower Brunswick aquifer consists of quartzose calcarenite to calcareous quartz sand of the Tiger Leap Formation (fig. 2) (Weems and Edwards, 2001). The Parachucla Formation in most of coastal Georgia overlies the Tiger Leap Formation. In the lower Coastal Plain, the lower Brunswick aquifer mostly is absent in the Savannah area and in Bulloch County because the permeable upper sand in Miocene sediments either has been eroded away or was never deposited (Clarke and others, 1990). At the base of the lower Brunswick aquifer is a confining unit consisting of Oligocene fossiliferous limestone of the Lazaretto Creek Formation (Huddleston, 1993). The surficial and Brunswick aquifer systems and Upper Floridan aquifer are hydrogeologically equivalent to the Upper Three Runs aquifer in the upper Coastal Plain.

The Upper Floridan aquifer supplies most of the drinking water obtained from ground water for coastal Georgia. In the lower Coastal Plain, this aquifer is largely carbonate, consisting of Eocene to Oligocene limestone and dolomite. The Oligocene Lazaretto Creek Formation overlies the Upper Floridan aquifer (Huddleston, 1993). Units composing the Upper Floridan aquifer crop out at or near land surface in the upper Coastal Plain, where the aquifer is under confined to semiconfined conditions. The Upper Floridan aquifer is separated from the underlying Lower Floridan aquifer by a confining unit of dense, low-permeability, recrystallized Eocene limestone and dolomite. The confining unit has very low primary hydraulic conductivity; however, in the Brunswick

area, joints and fractures produce zones of high secondary hydraulic conductivity (Krause and Randolph, 1989).

The Lower Floridan aquifer mostly consists of Eocene dolomitic limestone but locally may include Paleocene to Upper Cretaceous dolomitized limestone. This aquifer is confined throughout the coastal area and is subdivided into at least three permeable units in the Brunswick area—the brackish-water zone, deep freshwater zone (Gregg and Zimmerman, 1974), and Fernandina permeable zone (Krause and Randolph, 1989). The Fernandina permeable zone is highly permeable and cavernous, and contains high salinity water that may be the source of saltwater contamination in the Brunswick area. The Fernandina permeable zone consists of Paleocene to Upper Cretaceous pelletal, recrystallized limestone and finely crystallized dolomite.

Ground-Water Levels

Ground-water level fluctuations reflect changes in recharge to and discharge from an aquifer. Recharge varies in response to precipitation, and discharge varies in response to leakage to adjacent aquifers, withdrawal from wells, and evapotranspiration from shallow unconfined aquifers.

In the surficial aquifer, water levels show a pronounced response to climatic effects throughout the study area. Where climatic effects dominate, water levels generally are highest in the winter and early spring when precipitation is greatest and evapotranspiration is least; water levels are lowest during the summer and fall when precipitation is least and evapotranspiration is highest. These fluctuations are illustrated on the hydrograph for well 35P094 near Savannah (fig. 10). The 15-ft-deep well is completed in the surficial aquifer and shows pronounced water-level rise in response to precipitation, followed by a gradual decline that corresponds to discharge from the aquifer.

In the lower Coastal Plain, with the exception of the unconfined part of the surficial aquifer system, aquifers are deeply buried and confined. In these areas, climatic effects are greatly diminished, and fluctuations largely are because of changes in ground-water pumping. These fluctuations are illustrated for well 36Q008 near Savannah (fig. 10). The 406-ft-deep well is completed in the Upper Floridan aquifer and shows a pronounced response to changes in local and regional pumping, but little response to changes in precipitation. Water-level response to pumping in adjacent aquifers may be similar due to interaquifer leakage. This response in adjacent aquifers is most pronounced in the upper Coastal Plain and results from greater aquifer interconnection because of the thin, sandy, and discontinuous nature of the confining units in this area. In addition, ground-water pumping in the lower Coastal Plain may have produced hydraulic gradients that resulted in increased aquifer leakage and similar water-level responses. Such similarities are indicated on the hydrographs for wells completed in the surficial, upper Brunswick, and Upper Floridan aquifers (32L017, 32L016, and 32L015, respectively) at Gardi, Wayne County, Georgia (fig. 11).

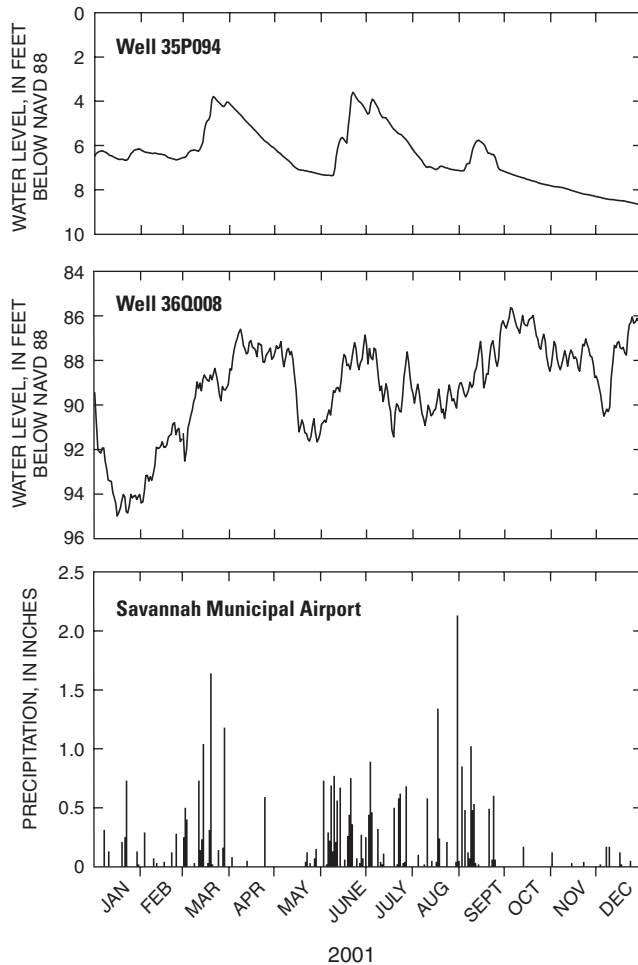


Figure 10. Daily water-level measurements in wells 35P094 and 36Q008, Chatham County; and daily rainfall at National Weather Service station, Savannah Municipal Airport, Chatham County, Georgia, 2001.

Long-Term Fluctuations and Trends

Long-term fluctuations in precipitation, ground-water levels, and streamflow show the effects of natural and anthropogenic stresses on the stream-aquifer flow system. Precipitation changes are reflected in streamflow and in ground-water levels of aquifers that are unconfined or semiconfined. When ground-water levels are high from natural recharge (precipitation), ground-water contribution to streamflow is correspondingly high. Conversely, when ground-water levels are low because of lack of recharge or increased pumping, ground-water contribution to streamflow is correspondingly low. Fluctuations and trends are shown on selected graphs of cumulative departure from normal precipitation, ground-water levels, and streamflow in the SSO, SAS, and Suwannee River Basins (figs. 12–14, respectively). Normal precipitation for a given month is defined as the average of total monthly precipitation during a specified 30-year period; for this report,

the period 1971–2000 was used to determine normal precipitation for computation of cumulative departure.

Upward or positive slopes on the graph indicate periods of above-normal precipitation; downward or negative slopes on the graph indicate periods of below-normal precipitation; no slope indicates periods of normal precipitation. Trend is the overall slope over a period of time. A short-term trend covers a period of 5 years or less; a long-term trend covers a period greater than 5 years. An above-normal trend means that the slopes over a period of time are positive or upward; whereas a below-normal trend means that the slopes over a period of time are negative or downward. Fluctuations and trends in the major river basin groupings are plotted for the period 1971–2001.

Salkehatchie–Savannah–Ogeechee River Basin

In the upper part of the SSO River Basin, precipitation trends are illustrated on the cumulative departure graph for the Waynesboro, Ga., station (fig. 12). In general, there were several short-term trends of above- and below-normal precipitation during 1971–84 followed by a long-term trend of below-normal precipitation during 1984–91. A long-term trend of above-normal precipitation is observed during 1992–98 with intermittent short-term trends of below-normal precipitation. During 1999–2001, there was a short-term trend of below-normal precipitation in Waynesboro, Ga., reflecting the 2000 drought. By the end of the study period, the overall cumulative departure was +19.47 inches at Waynesboro.

Streamflow in the upper part of the SSO River Basin is shown on bar graphs of mean annual discharge for Brier Creek (station 02198000) (fig. 12). Generally, about half of the streamflow was at or above the 31-year mean for this station. Changes in streamflow correspond to above- and below-normal periods of precipitation for the area. Two of the three severe drought periods—1981 and 2000—are more than 200 ft³/s below the 31-year mean of about 598 ft³/s.

Ground-water levels in the upper part of the SSO River basin are shown for well 32R003, Bulloch County (fig. 12), completed in the surficial aquifer to a depth of 155 ft. Data are insufficient to recognize a trend in the water level; however, well 32R003 taps a deeper part of the surficial aquifer where semiconfined conditions occur as a result of a clay confining unit.

In the lower part of the SSO River Basin, precipitation trends are illustrated on the cumulative departure from normal precipitation graph for the Savannah, Ga., station (fig. 12). In general, there was a long-term trend of below-normal precipitation during 1973–90 with intermittent short-term trends of above-normal precipitation. There was a long-term trend of generally above-normal precipitation during 1990–95, followed by a long-term trend of generally below-normal precipitation during 1996–2001. Effects of drought are evidenced by a short-term trend of below-normal precipitation during 1999–2001. By the end of the study period, the overall cumulative departure was –13.26 inches at Savannah.

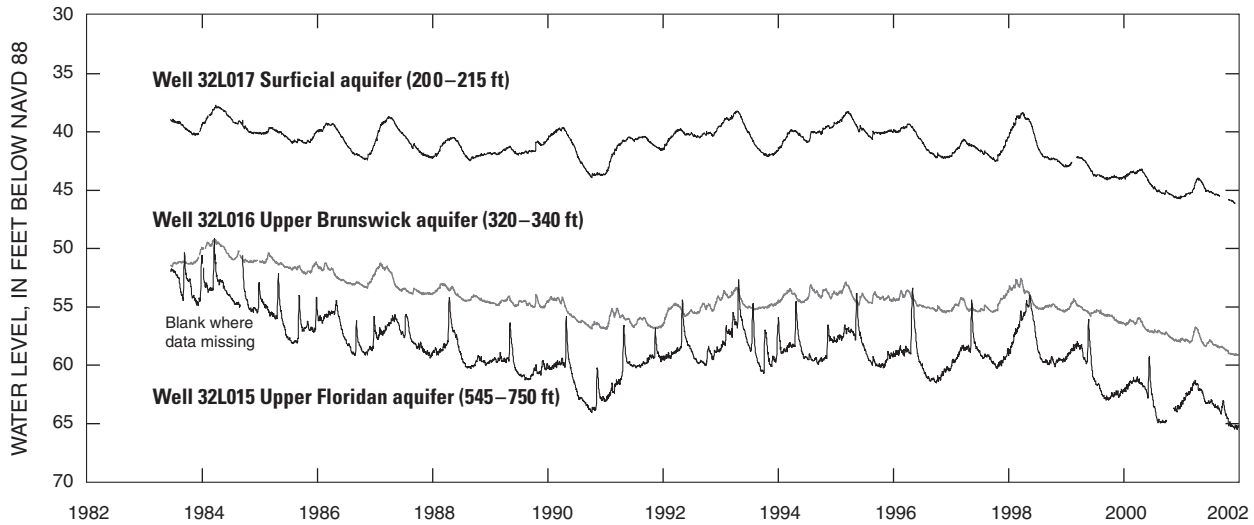


Figure 11. Daily mean water levels in the surficial, upper Brunswick, and Upper Floridan aquifers at the Gardi site, Wayne County, Georgia, 1983–2001.

Streamflow in the lower part of the SSO River basin is shown on bar graphs for Canoochee River (station 02203000) (fig. 12). Generally, about half of the streamflow was at or above the 31-year mean for this station. Changes in streamflow correspond to above- and below-normal periods of precipitation for the area. Two of the three severe drought periods—1981 and 2000—are more than 350 ft³/s below the 31-year mean of about 484 ft³/s. Drought conditions had a greater effect on streamflow in the lower part of the basin than in the upper part of the basin, probably because of interconnectivity with the aquifer.

Ground-water levels in the lower part of the SSO River Basin are shown for well 35P094, Chatham County, completed in the surficial aquifer to a depth of 15 ft (fig. 12). No long-term trend is evident, and water levels show a pronounced response to climatic effects. Recharge by precipitation is reflected by a sharp rise in the water level followed by a gradual decline that represents evapotranspiration and recharge of water into the aquifer.

Altamaha–Satilla–St Marys River Basin

In the upper part of the SAS River Basin, precipitation trends are illustrated on the cumulative departure graph for the Dublin station (fig. 13). There was a long-term trend of at- or below-normal precipitation during 1975–91, followed by a long-term trend of above-normal precipitation during 1992–98, followed by another short-term trend of below-normal precipitation during 1999–2001, reflecting effects of drought. By the end of the study period, the overall cumulative departure was –17.14 inches at Dublin.

Streamflow in the upper part of the SAS River Basin is shown on bar graphs for the Oconee River (station 02223500)

(fig. 13). Streamflow appears to fluctuate in a similar manner as precipitation, with low streamflow occurring during below-normal precipitation years and high streamflow occurring during above-normal precipitation years. During two-thirds of the study period, streamflow was at or above the 31-year mean. During the drought years of 1981 and 2000, streamflow was about 2,000 ft³/s below the 31-year mean of about 4,393 ft³/s.

Ground-water levels in the upper part of the SAS River Basin are shown for well 21T001 (fig. 13) Laurens County, completed in the Upper Floridan aquifer to a depth of 123 ft. The hydrograph shows seasonal fluctuations of the water level in response to precipitation. Starting in 1999, the hydrograph slopes downward slightly, indicating the effects of the 2000 drought.

In the lower part of the SAS River Basin, precipitation trends are illustrated on the cumulative departure graph for the Jesup site (fig. 13). Generally, there were two long-term trends of at- or above-normal precipitation during 1976–87, and 1989–95. Following these trends was a short-term trend of generally below-normal precipitation during 1998–2001. By the end of the study period, the overall cumulative departure was –12.39 inches.

Streamflow in the lower part of the SAS River Basin is shown on bar graphs for the Little Satilla River (station 02227500) (fig. 13). Streamflow appears to fluctuate in a similar manner as precipitation, with low streamflow occurring during below-normal precipitation years and high streamflow occurring during above-normal precipitation years. More than half of the mean annual streamflow was at or above the 31-year mean for the station. During the drought years of 1981 and 2000, streamflow was about 500 ft³/s below the 31-year mean of about 542 ft³/s.

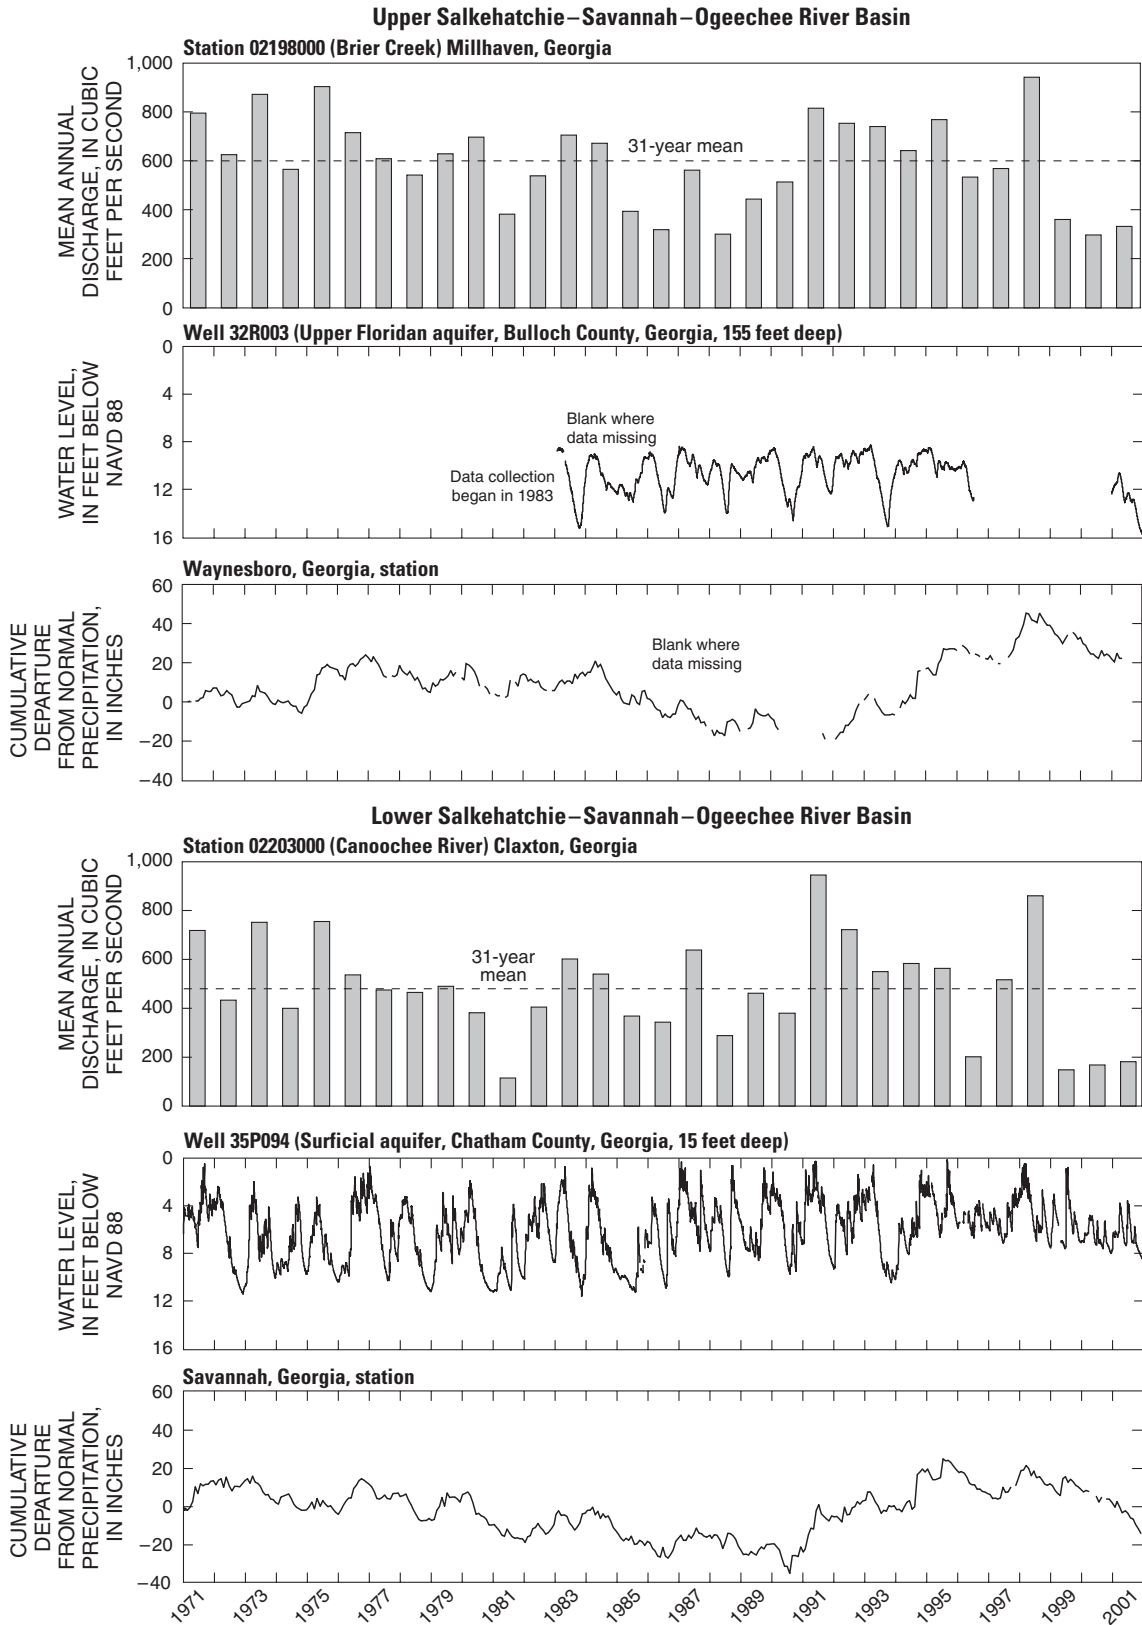


Figure 12. Mean annual stream discharge, daily mean ground-water level, and cumulative departure from normal precipitation for the upper and lower parts of Salkehatchie-Savannah-Ogeechee River Basin, Georgia and South Carolina, 1971-2001.

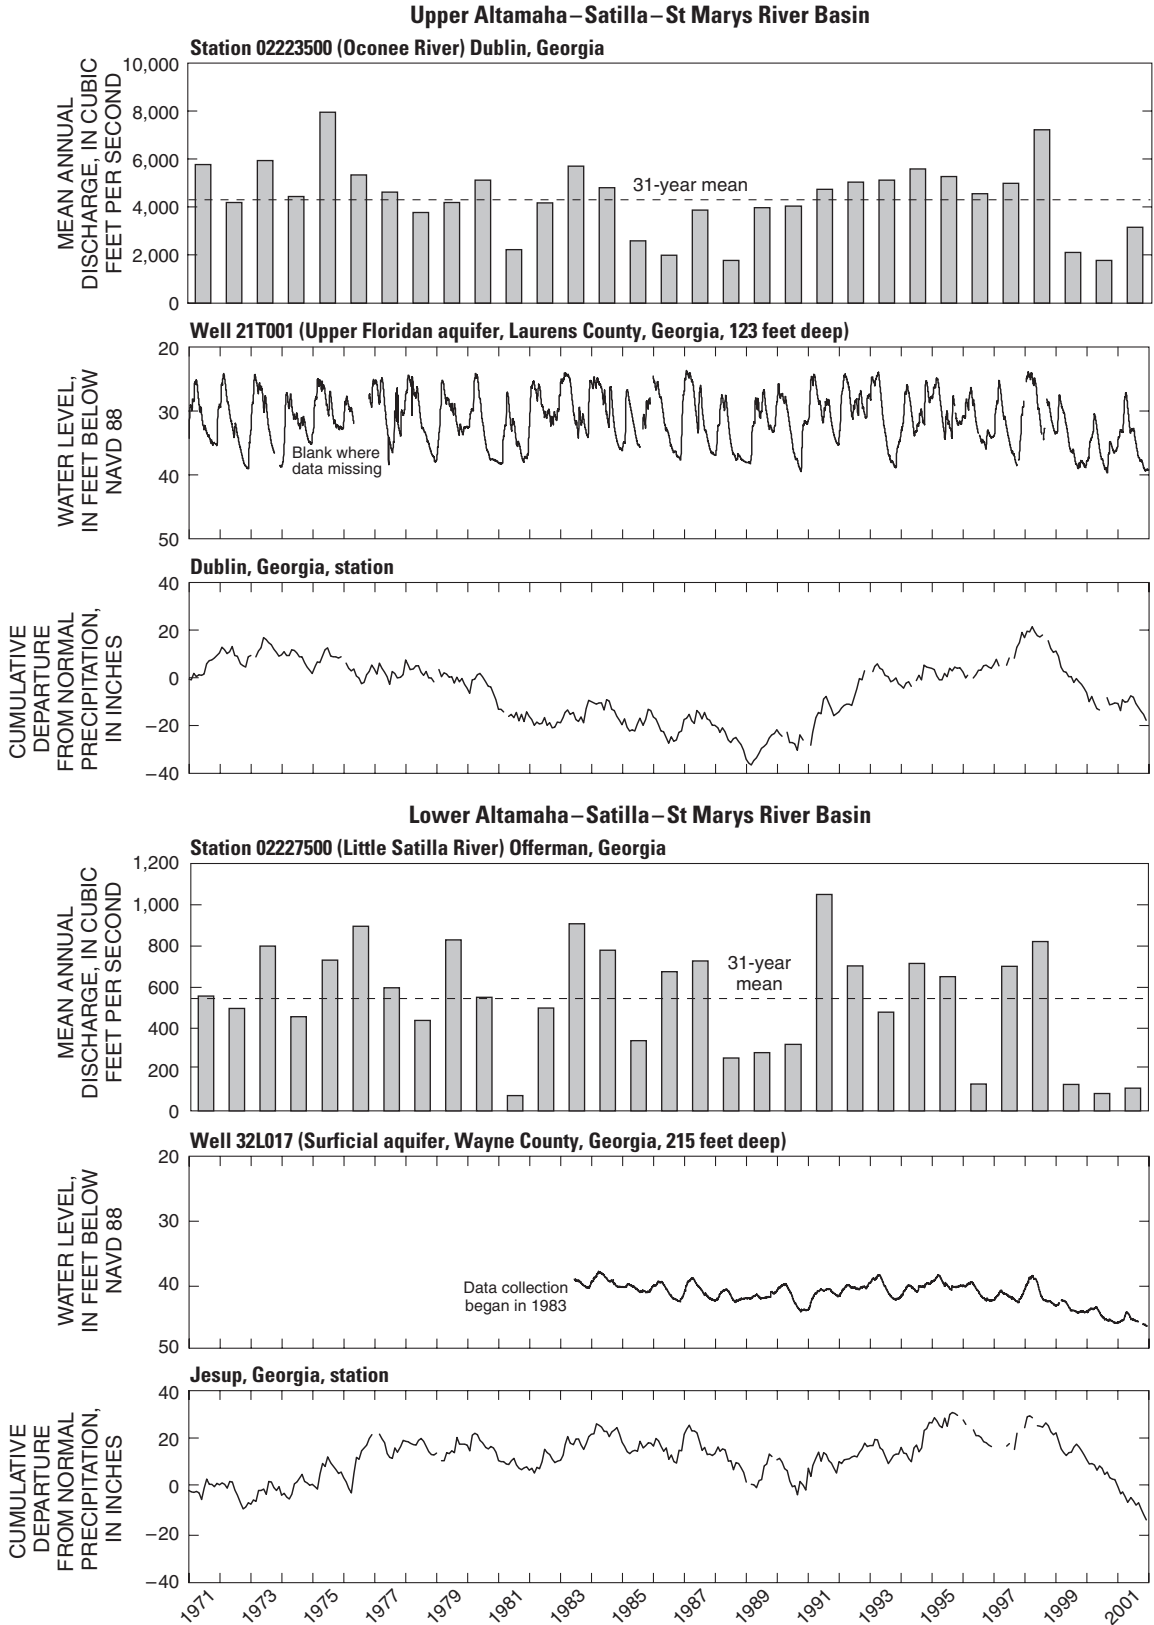


Figure 13. Mean annual stream discharge, daily mean ground-water level, and cumulative departure from normal precipitation for the upper and lower parts of the Altamaha–Satilla–St Marys River Basin, Georgia, 1971–2001.

Ground-water levels in the lower part of the SAS River Basin are shown for well 32L017, Wayne County, completed in the surficial aquifer to a depth of 215 ft. In this area, the water level of the surficial aquifer is influenced largely by ground-water pumping and, to a lesser extent, changes in recharge because of the depth of the aquifer. Water levels in the well declined about 6 ft during 1983–2001, with the most rapid decline beginning in 1999 as a result of the 2000 drought.

Suwannee River Basin

In the upper part of the Suwannee River Basin, precipitation trends are illustrated on the cumulative departure graph for the Tifton station (fig. 14). In general, there was a long-term trend of above-normal precipitation during 1971–88, followed by a long-term trend of below-normal precipitation during 1989–2001. By the end of the study period, the overall cumulative departure was –1.9 inches at Tifton.

Streamflow in the upper part of the Suwannee River Basin is shown on bar graphs for Alapaha River (station 02317500) (fig. 14). Streamflow generally responds to changes in precipitation, with low flow occurring during below-normal periods, such as 1999–2001, and high flow occurring during above-normal periods, such as 1983–84. Less than half of the mean annual streamflows are at or above the 31-year mean for the period. During the drought years of 1981 and 2000, streamflow was more than 700 ft³/s below the 31-year mean.

Ground-water levels in the upper part of the Suwannee River Basin are shown for well 18K049, Tift County, completed in the Upper Floridan aquifer to a depth of 620 ft (fig. 14). Water levels in this well are influenced mostly by changes in pumping. The general water-level trend in this well is an approximate decline of 35 ft from 1978, when data collection began, to 2001.

In the lower part of the Suwannee River Basin, precipitation trends are illustrated on the cumulative departure graphs for the Homerville station (fig. 14). Generally, there were long-term trends of above-normal precipitation during 1971–77 and 1991–98, with a long-term trend of below-normal precipitation during 1978–83, and a short-term trend of below-normal precipitation during 1999–2001. By the end of the study period, the overall cumulative departure was –9.44 inches at Homerville.

Streamflow in the lower part of the Suwannee River Basin is shown on bar graphs for Suwannee River (station 02314500) (fig. 14). Streamflow generally follows precipitation patterns, with pronounced declines in streamflow during below-normal precipitation periods. About half of the mean annual streamflow was at or above the 31-year mean for the period 1971–2001. During the drought years of 1981 and 2000, streamflow was more than 800 ft³/s below the 31-year mean of about 941 ft³/s.

Ground-water levels in the lower part of the Suwannee River Basin are shown for well 19E009, Lowndes County (fig. 4), completed in the Upper Floridan aquifer to a depth of 342 ft. Both pumping and recharge influence water levels in this well. Although the well is deep, it is located in an area of karst topography where there is interconnection between streams and the Upper Floridan aquifer. Water levels in the well generally followed precipitation trends during 1971–2001.

Ground-Water Contribution to Streamflow

The degree of aquifer interconnection with streams varies in the upper and lower Coastal Plain. In general, relief is greater and local flow occurs more in the upper Coastal Plain. In this area, the Upper Floridan and equivalent aquifers are unconfined or semiconfined and are incised by streams flowing through the area. In the lower Coastal Plain, the Upper Floridan aquifer is deeply buried and confined.

The interconnection between ground water and streams is illustrated on a map showing the potentiometric surface of the Upper Floridan aquifer for May 1998 (fig. 15). In the upper Coastal Plain, aquifer interconnection with streams is indicated by steep hydraulic gradients toward streams and potentiometric contours that cross in a “V” pattern upstream, indicating ground-water flow toward the stream. In the lower Coastal Plain, the aquifer is more deeply buried and is not incised. Here, potentiometric contours indicate little connection between the aquifer and overlying streams. An exception is in the karstic Valdosta area, where the aquifer is interconnected with streams.

Streamflow composes two major components—surface runoff and baseflow. On a typical hydrograph, peaks indicate rapid response to precipitation and represent the runoff component of a hydrograph. The slope of the streamflow recession indicates ground-water discharge to streams and represents the baseflow component of a hydrograph.

In relation to the conceptual model (fig. 4), baseflow in streams comprises contributions from the local, intermediate, and regional ground-water flow systems. Because local flow systems are most affected by rainfall during periods of extended drought, streamflow is assumed to be sustained entirely by baseflow.

Ground-water contribution to streamflow (baseflow) was estimated by using three methods. Hydrograph-separation analysis was used to estimate baseflow based on data from eight continuous-record stations. Field measurements of drought discharge from headwater to an adjacent streamflow gaging station and between two adjacent stations were used to estimate the minimum ground-water contribution to streamflow. Linear-regression analysis of streamflow duration and mean annual baseflow was performed to estimate the percentile of streamflow that most closely represents baseflow.

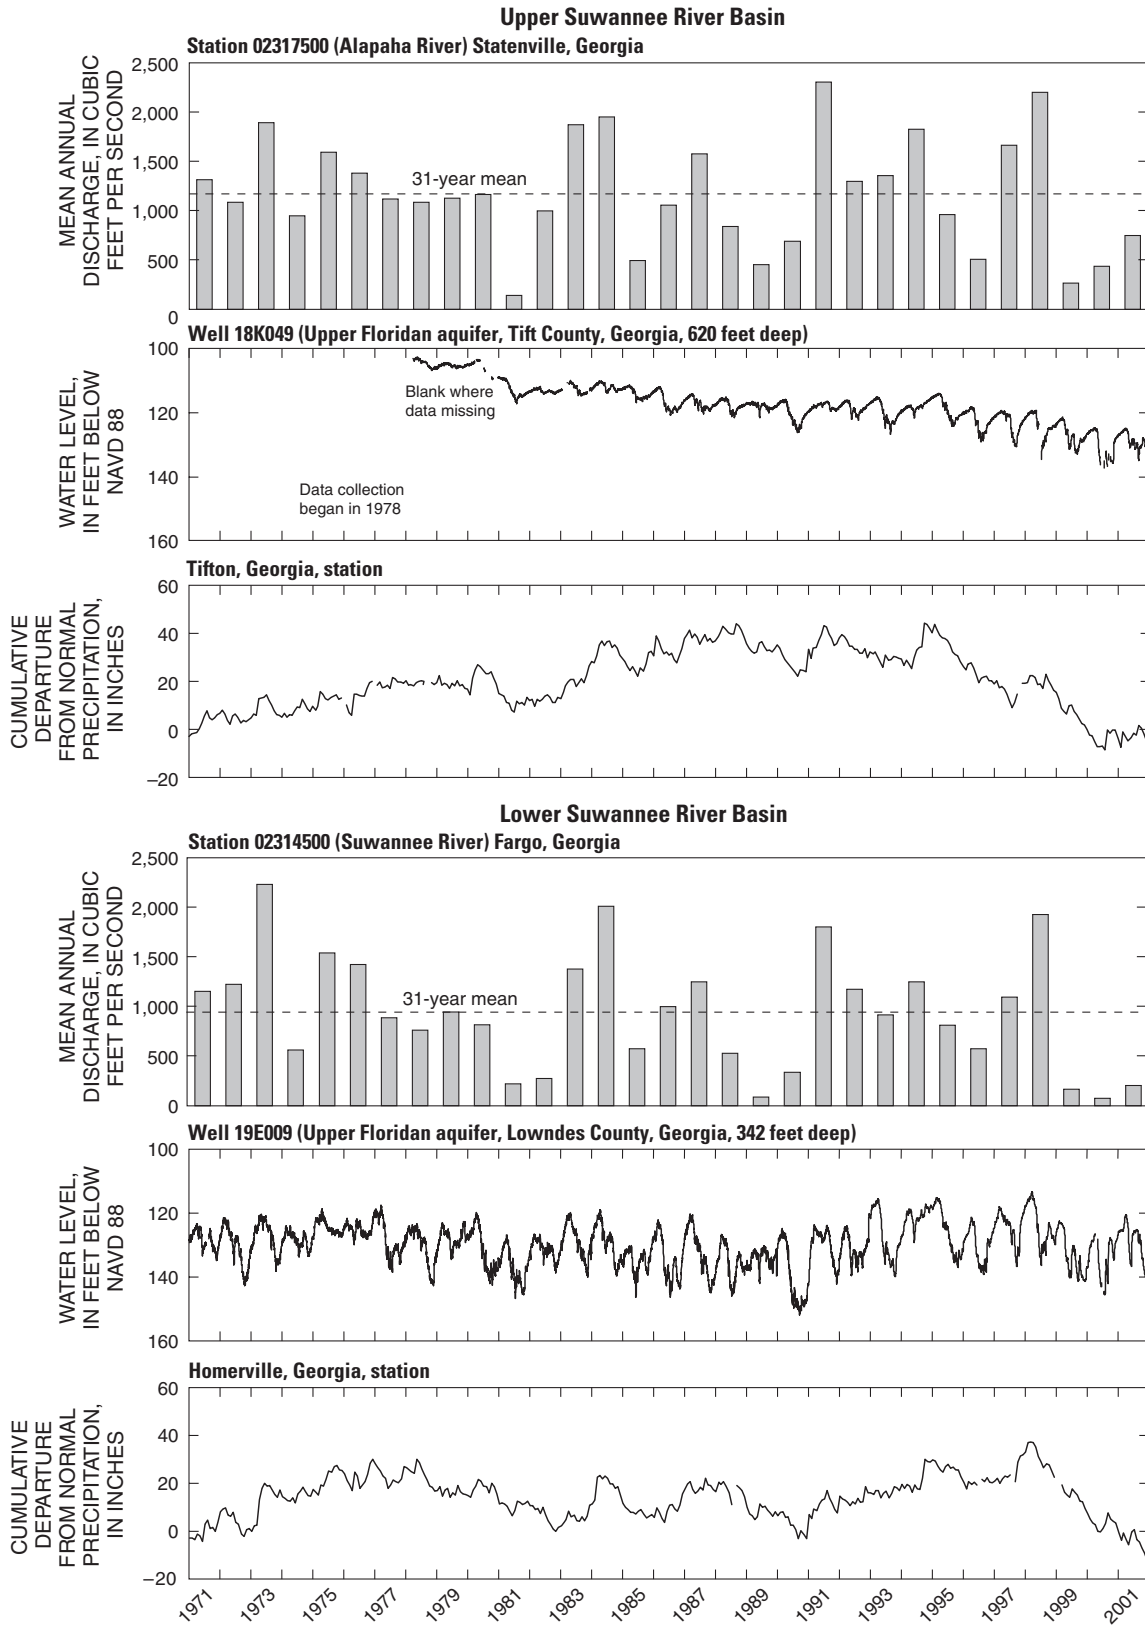


Figure 14. Mean annual stream discharge, daily mean ground-water level, and cumulative departure from normal precipitation for the upper and lower parts of the Suwannee River Basin, Georgia, 1971–2001.

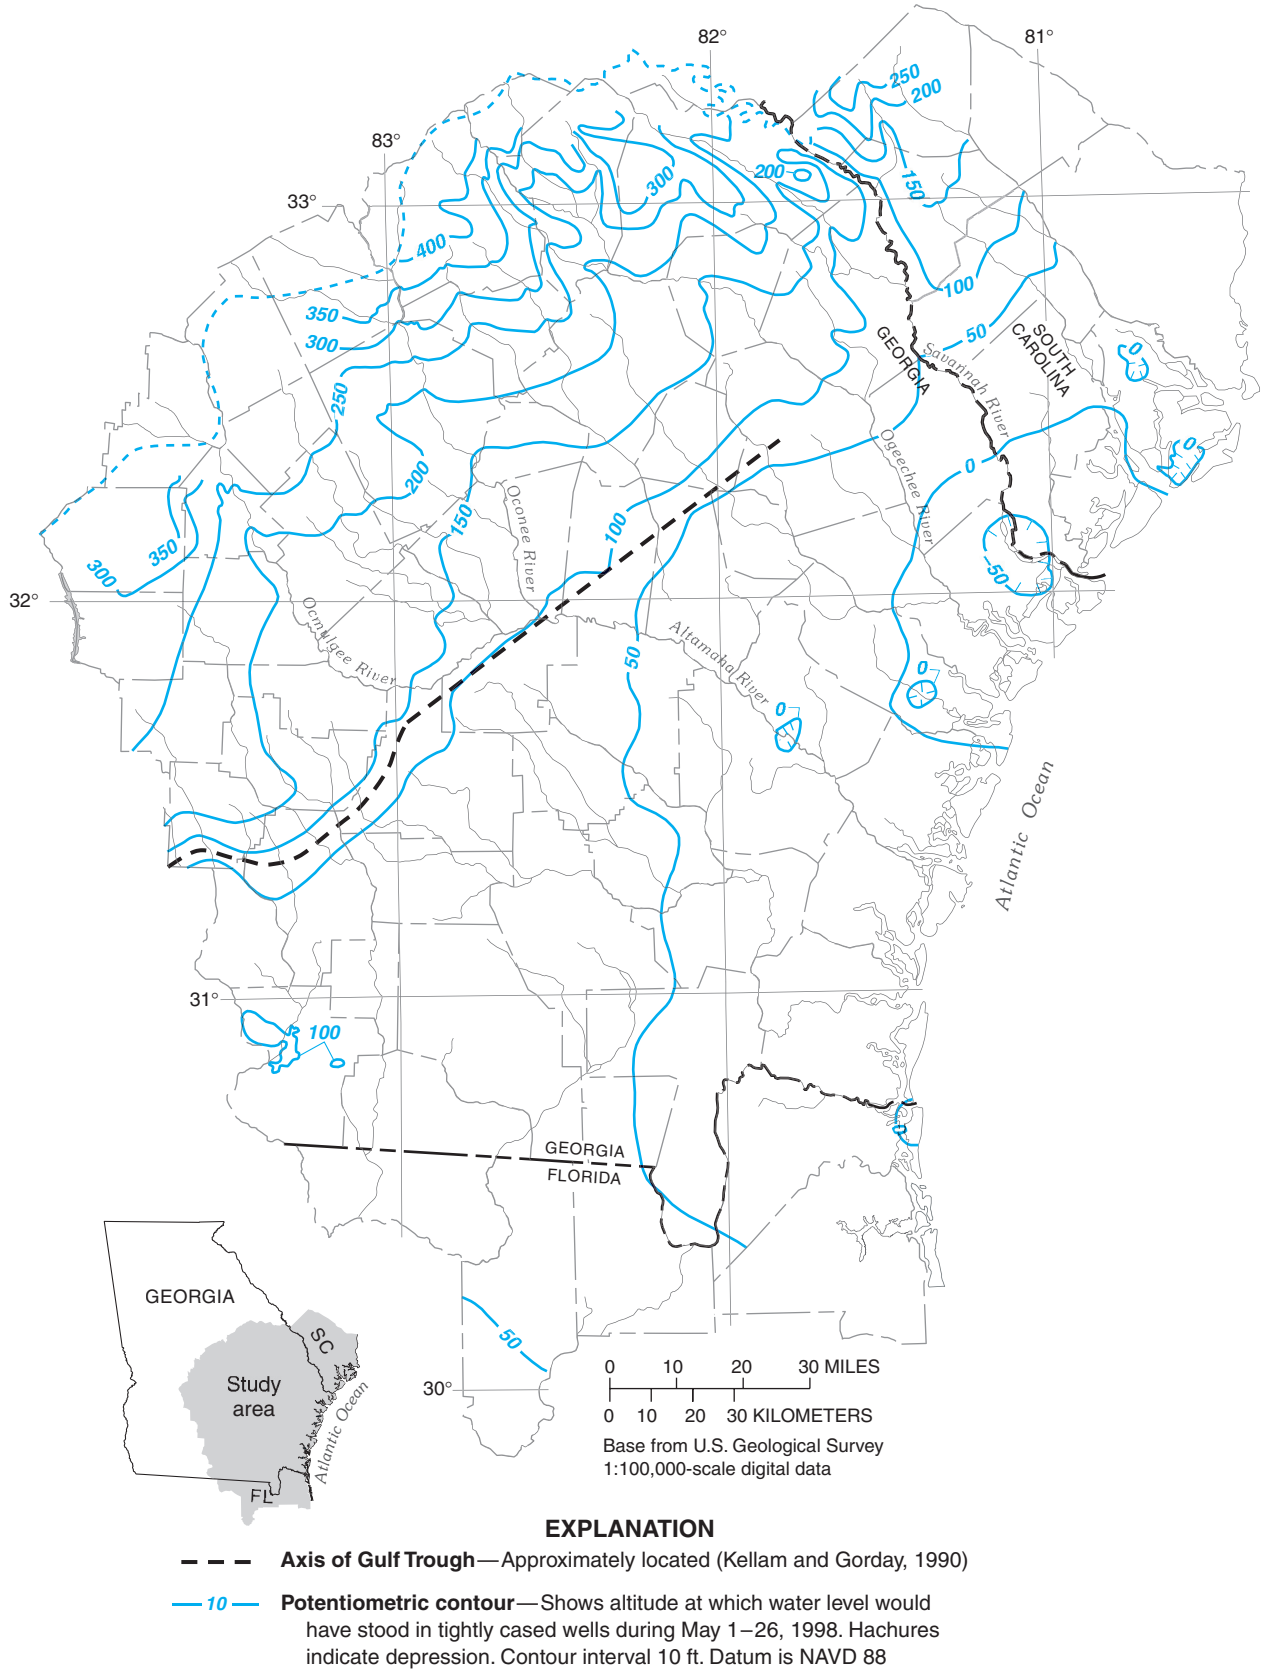


Figure 15. Potentiometric surface of the Upper Floridan aquifer, May 1998.

Hydrograph Separation

Hydrograph separation was completed on streamflow data using HYSEP, a computer program that uses mathematical techniques to separate streamflow into baseflow and runoff components (Sloto and Crouse, 1996). The mathematical formulation of HYSEP does not consider the geology of the basin; therefore, it can be used on a site-by-site basis in any hydrologic setting. There are limitations on its use, however, because HYSEP bases hydrograph separation only on basin area and streamflow hydrograph characteristics.

Estimates of baseflow from HYSEP were used to determine changes in baseflow contribution during a variety of climatic conditions. Baseflow estimates are affected by regulation of flows and physical properties of the basin such as vegetation cover, slope, area, shape, land use, soil thickness, and infiltration capacity (Horton, 1933; Riggs, 1963; Bevans, 1986; Sloto and Crouse, 1996), as well as antecedent soil moisture and depth to ground water. The river or tributary at each station selected for HYSEP analysis had negligible diversion or regulation upstream, a drainage area less than 1,400 mi², and at least 31 years of continuous record (table 3). The accuracy of the estimates depends on the period of record used (Sloto and Crouse, 1996) and the size of the drainage basin (Pettyjohn and Henning, 1979). A long-term record with representative long-term climatological conditions provides a more reliable baseflow estimate because periods of extreme dry or extreme wet climates would have less influence (Sloto and Crouse, 1996). In addition, the river or tributary at each station was not dominated by losing reaches, interaction with deeper aquifers, evapotranspiration effects, or prolonged periods of surface runoff.

During 1971–2001, baseflow represented a greater portion of streamflow during years of lower rainfall, and a lower portion during years of higher rainfall. At the eight stations selected for HYSEP, mean annual baseflow was from 39 to 74 percent of streamflow, with a mean contribution of 58 percent (table 3). Figure 16 shows the amount of streamflow at the Canoochee River (station 02203000) in the lower Coastal Plain near Claxton, Ga., originating from baseflow for average, wet, and dry years (based on the Brooklet NWS station). During a high-precipitation year, baseflow accounted for 48 percent of total streamflow; during an average-precipitation year, about 63 percent; and during a low-precipitation year, about 60 percent. During dry periods, there is a reduction in runoff, and baseflow becomes the major contributor to streamflow. During drought conditions, there is less water available to recharge the aquifer, as indicated by ground-water level declines. As ground-water levels drop, the hydraulic gradient between the stream and aquifer decreases, reducing ground-water discharge to streams. In some instances, the gradient between the stream and aquifer reverses and stream-water discharges into the aquifer, but this usually is of short duration because the streambed eventually dries up.

Baseflow estimates vary within the upper and lower parts of a basin. Mean annual baseflow for the period 1971–2001 in the upper SSO River Basin ranges from 66 to 74 percent and in the lower basin is 54 percent (table 3). In the upper SAS River Basin, baseflow is about 57 percent of total streamflow at station 02225500 (Ohoopsee River). In the lower SAS River Basin, baseflow ranges from about 39 to 43 percent of total streamflow. In the lower part of the Suwannee River Basin, baseflow is about 56 percent of total streamflow. Mean annual baseflow was estimated for 1981 and 2000 (drought condi-

Table 3. Summary of mean annual baseflow estimated using HYSEP at selected streamflow gaging stations in the upper and lower parts of the basins in coastal Georgia and South Carolina, 1971–2001.

[in/yr, inch per year; ft³/s, cubic foot per second; mi², square mile; part of basin: U, upper; L, lower; do, ditto]

Station identification	Drainage area (mi ²)	Part of basin	Period of record (calendar year)	Station identification	Outcropping hydro-geologic unit	Mean annual baseflow					
						in/yr	ft ³ /s	(in percent of total streamflow)			
						1971–2001	1981	2000	1997		
Salkehatchie–Savannah–Ogeechee River Basin											
02175500	341	U	1951-01	02175500	Upper Three Runs	9.79	246.0	69	77	65	64
02197600	28	U	1958-01	02197600	do.	8.02	16.5	66	74	81	68
02198000	646	U	1936-01	02198000	do.	9.29	442	74	72	80	70
02203000	555	L	1937-01	02203000	Surficial	6.29	257	54	51	51	48
Altamaha–Satilla–St Marys River Basin											
02225500	1,110	U	1903-07, 37-01	02225500	Surficial	7.16	585	57	53	62	56
02226500	1,190	L	1937-01	02226500	do.	5.41	478	43	47	34	47
02227500	646	L	1951-01	02227500	do.	4.46	212	39	27	34	33
Suwannee River Basin											
02317500	1,390	L	1931-01	02317500	Surficial	6.36	656	56	56	50	56
Mean of stations for each period								58	57	57	55

tions) and 1997 (year most representative of mean annual precipitation for the period 1971–2001). Mean annual baseflow was greater in the upper part of the SSO and SAS River Basins than in the lower parts (table 3). The average mean annual baseflow for the 31-year period was 58 percent; for 1981 and 2000, 57 percent each; and for 1997, 55 percent. The difference in baseflow is attributed to variations in topography, geology, and vegetation in the upper and lower Coastal Plain. The upper Coastal Plain is characterized by steep slopes and porous sand and gravel soils that have high infiltration rates and support little vegetation. In this area, aquifers are shallower than in the lower Coastal Plain because the topographic relief is greater in the upper Coastal Plain. The steeper topography results in deeper incision of streams into the aquifers, thereby increasing baseflow to streams. Gentle slopes that facilitate low runoff and more abundant vegetation, which derive water from soil moisture, characterize the lower Coastal Plain. In these areas, the streams do not incise into the more deeply buried aquifers, resulting in lower baseflow. Hydraulic conductivity of an aquifer, which also can have an effect on ground-water discharge, was not studied for this report.

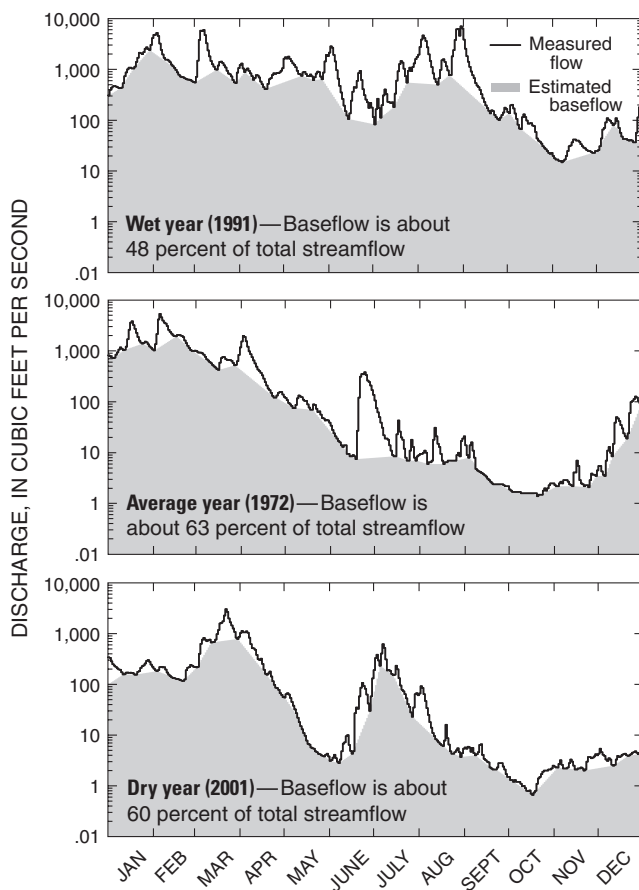


Figure 16. Baseflow separation using the local-minimum method for the wet, average, and dry years at Canoochee River (station 02203000) near Claxton, Georgia, 1971–2001.

Drought Streamflow

Drought streamflow represents a quantitative estimate of minimum ground-water discharge to streams because during drought periods, streamflow is composed mostly of baseflow. Drought baseflow is a minimum estimate because ground-water levels are lowered during droughts; and as a result, less water is available to the streams than would be available during average precipitation conditions. During droughts, streams receive baseflow mostly from the intermediate and regional flow systems because the water level in the local flow system is substantially decreased (Faye and Mayer, 1990). Streamflow at selected stations was compiled for the 1954 (Thomson and Carter, 1955), 1981 (Carter, 1983; Faye and Mayer, 1990), and 2000 drought years (table 4). Streamflow was normalized to unit-area discharge to separate out effects of basin size on discharge rates. The computed unit-area discharge was estimated for selected stations in the SSO, SAS and Suwannee River Basins. The minimum streamflow during each calendar year was used in the calculations.

A comparison of the unit-area discharge in the upper and lower Coastal Plain was made in the SSO River Basin, using data from the 1954, 1981, and 2000 drought years. Streamflow data were collected on the same date from two adjacent stations (02197830 and 02198000) along Brier Creek near Waynesboro, Ga., and Millhaven, Ga. (fig. 17). During the 1954 and 2000 droughts, streamflow along that reach decreased in response to the droughts. During 1954, unit-area discharge decreased from 0.23 to 0.16 ($\text{ft}^3/\text{s}/\text{mi}^2$) from Waynesboro, Ga., to Millhaven, Ga., a distance of about 20 mi. During 2000, unit-area discharge decreased from 0.32 to 0.25 ($\text{ft}^3/\text{s}/\text{mi}^2$) from Waynesboro to Millhaven. There was no significant change in unit-area discharge between the two stations during 1981. For this comparison, these discharge measurements were made on the same date at each site (fig. 17). A comparison of the lowest discharge measured between the two stations for the calendar years 1954, 1981, and 2000 shows a decrease in unit-area discharge from 0.23 to 0.10 ($\text{ft}^3/\text{s}/\text{mi}^2$) from Waynesboro to Millhaven for 1954; no change for 1981; and a decrease from 0.32 to 0.18 ($\text{ft}^3/\text{s}/\text{mi}^2$) for 2000. Similar comparisons were not made in the SAS or Suwannee River Basins because of insufficient data (table 4).

Drought unit-area discharge shows little variation among the three basins, with a few exceptions. In the SSO River Basin, the median unit-area discharge was 0.11 cubic feet per second per square mile ($\text{ft}^3/\text{s}/\text{mi}^2$) for the 1954 drought, 0.11–0.14 ($\text{ft}^3/\text{s}/\text{mi}^2$) for the 1981 drought, and 0.18 ($\text{ft}^3/\text{s}/\text{mi}^2$) for the 2000 drought. During each drought period, unit-area discharge generally was higher for the stations in the upper Coastal Plain than for stations in the lower Coastal Plain. During the 1954 drought, seven stations in the upper Coastal Plain had unit-area discharges ranging from 0.08 to 0.63 ($\text{ft}^3/\text{s}/\text{mi}^2$) (table 4). The unit-area discharge ranged from 0 to 0.56 ($\text{ft}^3/\text{s}/\text{mi}^2$) at 15 stations in the lower Coastal Plain during 1954. During 1981, two stations in the upper Coastal Plain had unit-area discharge of 0.14 and 0.18 ($\text{ft}^3/\text{s}/\text{mi}^2$;

Table 4. Measured stream discharge at selected streamflow gaging stations in the upper and lower Coastal Plain during the 1954, 1981, and 2000 droughts in Georgia and Florida.[DA, drainage area; mi², square mile; ft³/s, cubic foot per second; (ft³/s)/mi², cubic foot per second per square mile; U, upper; L, lower; —, data not available]

Station identification	Station name	DA (mi ²)	Part of Coastal Plain	Date (1954)	Stream discharge (ft ³ /s)	Unit-area discharge [(ft ³ /s)/mi ²]	Date(s) (1981)	Stream discharge (ft ³ /s)	Unit-area discharge [(ft ³ /s)/mi ²]	Date (2000)	Stream discharge (ft ³ /s)	Unit-area discharge [(ft ³ /s)/mi ²]
Salkehatchie–Savannah–Ogeechee River Basin												
02197200	McBean Creek (Ga Hwy 56) at McBean, Ga.	71.4	U	4 Oct	141.4	0.58	—	—	—	—	—	—
021973444	Beaverdam Creek at River Rd nr Girard, Ga.	23.3	L	20 July	13.1	.56	—	—	—	—	—	—
02197590	Brushy Creek at Wrens, Ga.	9.4	L	5 Oct	11.6	.17	—	—	—	—	—	—
02197600	Brushy Creek near Wrens, Ga.	28	U	—	—	—	1 July	24.00	.14	30 May	2.7	0.10
02197830	Brier Creek near Waynesboro, Ga.	473	U	4 Oct	1107	.23	30 Sept	84	.18	31 July	153	.32
02197980	Brier Creek (GA Hwy 23) near Sardis, Ga.	579	L	—	—	—	—	—	—	31 July	119	17.5
02198000	Brier Creek at Millhaven, Ga.	646	L	5 Sept	164	.10	30 Sept	114	.18	22 July	76	.18
02198060	Brier Creek at US 301 near Sylvania, Ga.	669	L	30 July	1182	.27	—	—	—	—	—	—
02198100	Beaverdam Creek near Sardis, Ga.	30.8	L	—	—	—	—	—	—	21 July	2.3	.07
02198120	Beaverdam Creek at Hilltonia, Ga.	85.3	L	29 July	11.3	.02	—	—	—	—	—	—
02198170	Beaverdam Creek near Sylvania, Ga.	116	L	20 July	113.1	.11	22 Oct	30.58	0	—	—	—
02198280	Beaverdam Creek near Sylvania, Ga.	143	L	29 July	126.7	.19	—	—	—	—	—	—
02200410	Duhart Creek (SR80) at Stapleton, Ga.	3.17	U	6 Oct	11.5	.48	—	—	—	—	—	—
02200440	Rocky Comfort Creek (US 221) at Louisville, Ga.	286	U	13 Oct	446.7	.63	—	—	—	—	—	—
02200720	Big Creek (Penns Bridge Rd) near Wrens, Ga.	8.07	U	6 Oct	12.4	.30	—	—	—	—	—	—
02200810	Big Creek above Louisville, Ga.	56.9	U	6 Oct	14.74	.08	—	—	—	—	—	—
02200900	Big Creek near Louisville, Ga.	95.8	U	13 Oct	423.6	.25	—	—	—	—	—	—
02201000	Williamson Swamp Creek at Davisboro, Ga.	109	L	—	—	—	4 Oct	12	.11	—	—	—
02201070	Williamson Swamp Creek at Bartow, Ga.	185	L	15 Oct	17.1	.09	—	—	—	—	—	—
02201150	Williamson Swamp Creek at Wadley, Ga.	233	L	15 Oct	421.7	.09	—	—	—	—	—	—
02201270	Barkcamp Creek (SR 17) near Midville, Ga.	31.7	L	10 Sept	40	0	—	—	—	—	—	—
02201300	Chow Mill Creek near Herndon, Ga.	23	L	10 Sept	0.23	.01	—	—	—	—	—	—
02201350	Buckhead Creek near Waynesboro, Ga.	64	L	5 Oct	0	0	—	—	—	1 Aug	36.6	.57
02201360	Rocky Creek at SR 24 near Waynesboro, Ga.	31.7	L	5 Oct	10.12	0	—	—	—	—	—	—
02201365	Rocky Creek near Waynesboro, Ga.	34.8	L	5 Oct	0	0	—	—	—	—	—	—
02202210	Ogeechee Creek near Sylvania, Ga.	14	L	9 Sept	10	0	—	—	—	—	—	—
02202240	Ogeechee Creek at Oliver, Ga.	141	L	—	—	—	22 Oct	.07	0	—	—	—
02203000	Canochee River near Claxton, Ga.	555	L	—	—	—	—	—	—	16 June	3.3	.04

Table 4. Measured stream discharge at selected streamflow gaging stations in the upper and lower Coastal Plain during the 1954, 1981, and 2000 droughts in Georgia and Florida.—Continued

[DA, drainage area; m², square mile; ft³/s, cubic foot per second; (ft³/s)/mi², cubic foot per second per square mile; U, upper; L, lower; —, data not available]

Station identification	Station name	DA (mi ²)	Part of Coastal Plain	Date (1954)	Stream discharge (ft ³ /s)	Unit-area discharge [(ft ³ /s)/mi ²]	Date (1981)	Stream discharge (ft ³ /s)	Unit-area discharge [(ft ³ /s)/mi ²]	Date(s) (2000)	Stream discharge (ft ³ /s)	Unit-area discharge [(ft ³ /s)/mi ²]
Altamaha-Satilla-St Marys River Basin												
02215500	Ocmulgee River at Lumber City, Ga.	5,180.0	L	—	—	—	—	—	—	30 Aug	905.0	.17
02216180	Turnpike Creek near McRae, Ga.	49.2	L	—	—	—	—	—	—	28 May	0	0
02224000	Rocky Creek near Dudley, Ga.	62.9	L	6 Oct	.23	0	—	—	—	—	—	—
02225000	Altamaha River near Baxley, Ga.	11,600	L	—	—	—	25 Oct	1,680	.14	29 Aug	1450	.13
02225315	Jacks Creek near Wesley, Ga.	8.63	L	—	—	—	—	—	—	31 July	0	0
02225360	Pendleton Creek near Normantown, Ga.	101	L	—	—	—	—	—	—	1 Aug	0	0
02225395	Swift Creek SR 130 near Vidalia, Ga.	36	L	—	—	—	—	—	—	31 July	0	0
02225405	Swift Creek US 1 near Lyons, Ga.	46.3	L	—	—	—	—	—	—	31 July	0	0
02225420	Swift Creek (SR 152) near Lyons, Ga.	55.6	L	—	—	—	—	—	—	31 July	0.7	.01
02225480	Ohoopce River at US 280 near Reidsville, Ga.	1,070	L	—	—	—	—	—	—	1 Aug	45.1	.04
02225500	Ohoopce River near Reidsville, Ga.	1,110	L	—	—	—	—	—	—	1 Aug	49.2	.04
02225850	Beards Creek near Glennville, Ga.	74.4	L	—	—	—	—	—	—	31 July	0	—
02226000	Altamaha River at Doctortown, Ga.	13,600	L	—	—	—	9 Oct	1,790	.13	31 Aug	1,410	.1
02226100	Penholoway Creek near Jesup, Ga.	209	L	—	—	—	27 July	0	0	1 July	0	0
02227000	Hurricane Creek near Alma, Ga.	139	L	1 June	¹⁰	—	—	—	—	—	—	—
02229000	Middle Prong St Marys River at Tallylor, Fla.	125	L	—	—	—	17 July	.32	0	1 June	0	0
02231280	Thomas Creek near Crawford, Fla.	29.9	L	—	—	—	—	—	—	11 June	0.09	0
Suwannee River Basin												
02314500	Suwannee River at Fargo, Ga.	1,260	L	—	—	—	3 Nov	7.80	0	16 June	5.4	0
02317500	Alapaha River at Statenville, Ga.	1,390	L	—	—	—	19, 20 Oct	25	.02	20 July	37	0

¹⁰Thomson and Carter, 1955

²Faye and Mayer, 1990

³Hale and others, 1989

⁴Carter, 1983

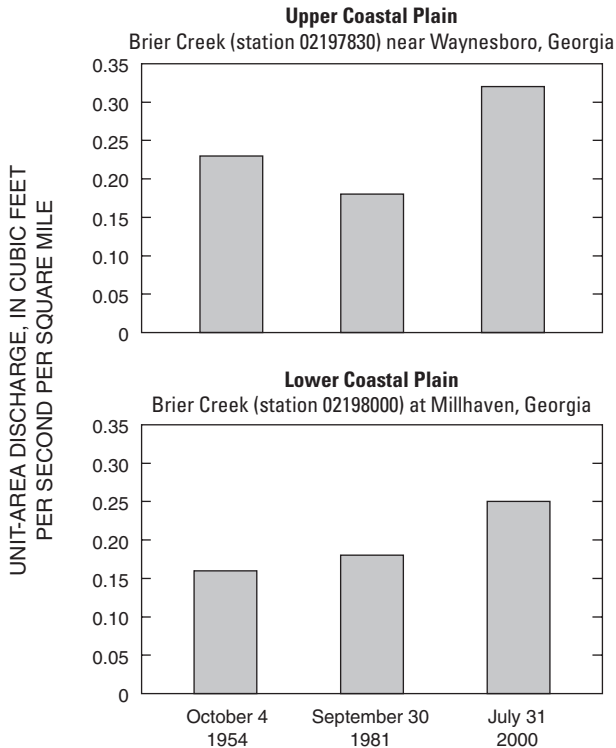


Figure 17. Comparison of drought streamflow between two adjacent streamflow gaging stations in the Salkehatchie–Savannah–Ogeechee River Basin.

whereas, four stations in the lower Coastal Plain had unit-area discharge ranging from 0 to 0.18 (ft³/s)/mi² (table 4). During 2000, two stations in the upper Coastal Plain had unit-area discharge of 0.10 and 0.32 (ft³/s)/mi², and five stations in the lower Coastal Plain had unit-area discharge ranging from 0.04 to 17.5 (ft³/s)/mi² (table 4). The relatively higher contribution of baseflow in the upper Coastal Plain compared to the lower Coastal Plain reflects the greater relief, higher interconnection between aquifers and streams, greater soil permeability, and different vegetation.

In the SAS and Suwannee River Basins, all stations are located in the lower Coastal Plain. In the SAS River Basin, the unit-area discharge was 0 (ft³/s)/mi² for two stations during 1954; ranged from 0 to 0.14 (ft³/s)/mi² for four stations during 1981; and ranged from 0 to 0.17 (ft³/s)/mi² for 15 stations during 2000 (table 4). In the Suwannee River Basin, the unit-area discharge for two stations was 0 and 0.02 (ft³/s)/mi² during 1981; 0 (ft³/s)/mi² during 2000; no data were available for 1954 (table 4).

Observed differences in streamflow between upstream and downstream stations give an indication of the gain or loss of water from or to the ground-water flow system. In the SSO and SAS River Basins, near-concurrent discharge measurements taken at partial-record stations and daily mean flow at continuous-record stations during the three drought periods were used to estimate ground-water discharge to selected reaches. Observed gains or losses along selected stream

reaches were determined in the SSO and SAS River Basins during the 1954, 1981, and 2000 droughts (table 5). Gain or loss determinations were not made in the Suwannee River Basin because of insufficient data.

In the SSO River Basin, ground water provided baseflow to most stream reaches evaluated during the 1954, 1981, and 2000 droughts. In some reaches, streams were either dry or lost water to the ground-water system. For example, in the Brier Creek Basin, during the 1954 drought, a loss of 0.25 (ft³/s)/mi² was measured between stations 02197830 and 02198000 (fig. 18; table 5). In this same reach during the 1981 drought, a gain of 0.17 (ft³/s)/mi² was measured (fig. 19; table 5). During the 2000 drought, a loss of 0.45 (ft³/s)/mi² was measured (fig. 20; table 5) in the same reach. Losses were observed in the SSO River Basin at Rocky Creek between stations 02201360 and 02201365 in 1954 (fig. 18; table 5) and in the SAS River Basin along the Altamaha River between stations 02225000 and 02226000 during 2000 (fig. 20; table 5). Losses most likely are due to stream-water seepage into the surficial aquifer along the reach. Gains most likely are due to baseflow.

Linear-Regression Analysis of Streamflow Duration

A linear-regression analysis was used to develop a relation between mean annual baseflow and flow duration for streams in the study area. A flow-duration curve is a cumulative frequency curve that shows the percentage of time that specified discharges are equaled or exceeded during a given period at stations where continuous records of daily flow are collected. Flow-duration curves integrate the effects of climate, topography, and geology. Visual inspection of the slopes of curves gives some indication of flow from ground water. Ground water dominates streamflow at the inflection point on a curve, where the curve begins to flatten. Generally, steep slopes are indicative of limited basin storage and dominant contribution from runoff, whereas flat slopes are indicative of equal contribution of ground water and runoff (Stricker, 1983) (fig. 21).

Many studies have compared ground-water discharge to streams using the flow-duration characteristics of a stream. Stricker (1983) estimated baseflow using streamflow-duration curves for 35 stations in the southeastern Coastal Plain of South Carolina, Georgia, Alabama, and Mississippi. Stricker (1983) found that the 60- and 65-percent flow-duration points on the flow-duration curves were representative of mean annual baseflow for streams having mean discharges greater than 10 ft³/s. Stricker (1983) found that the shape of streamflow-duration curves is affected by the lithology of the Coastal Plain sediments. Steep curves are associated with basins underlain by low-permeability clay or chalk with high runoff and low baseflow, whereas flatter curves are associated with basins underlain by high-permeability sand and gravel where a high percentage of the discharge is baseflow (Stricker, 1983).

Table 5. Estimated ground-water discharge to selected streams in the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins during the 1954, 1981, and 2000 droughts.

[—, not applicable; mi², square mile; ft³/s, cubic foot per second; Do., ditto; bold and negative sign “-”, loss]

Stream name and state	Intermediate area of stream reach	Intermedi-ate drain-age area (mi ²)	1954 drought (fig. 18)		1981 drought (fig. 19)		2000 drought (fig. 20)	
			Date(s)	Net gain/loss in stream discharge (ft ³ /s) [(ft ³ /s)/mi ²]	Date(s)	Net gain/loss in stream discharge (ft ³ /s) [(ft ³ /s)/mi ²]	Date(s)	Net gain/loss in stream discharge (ft ³ /s) [(ft ³ /s)/mi ²]
Salkehatchie–Savannah–Ogeechee River Basin								
Barkcamp Creek, Ga.	between headwater and station 02201270	31.70	10 Sept	0.00	—	—	—	—
Beaverdam Creek, Ga.	between stations 02198120 and 02198170	30.7	20 & 29 July	11.8	.38	—	—	—
Do.	between headwater and station 021973444	23.3	20 July	13.1	.56	—	—	—
Do.	between headwater and station 02198100	30.8	—	—	—	21 July	2.3	.07
Do.	between headwater and station 02198120	85.3	29 July	1.3	.02	—	—	—
Do.	between headwater and station 02198170	116	—	—	.58	0	—	—
Do.	between stations 02198170 and 02198280	27	29 July	13.6	.5	—	—	—
Big Creek, Ga.	between headwater and station 02200720	8.07	6 Oct	2.4	.3	—	—	—
Do.	between stations 02200720 and 02200810	48.9	6 Oct	2.3	.05	—	—	—
Do.	between stations 02200810 and 02200900	38.9	6 & 13 Oct	18.9	.49	—	—	—
Brier Creek, Ga.	between stations 02197830 and 02198000	173	4 Oct & 5 Sept	-43	-25	30 Sept	.17	22 & 31 July -77
Do.	between stations 02198000 and 02198060	24	30 July & 5 Sept	118	4.9	—	—	—
Brushy Creek, Ga.	between headwater and station 02197600	28	—	—	—	—	—	30 May 2.7
Do.	between headwater and station 02197590	9.4	5 Oct	1.56	.17	—	—	—
Buckhead Creek, Ga.	between headwater and station 02201350	64	5 Oct	0	0	—	—	1 Aug 36.6
Chow Mill Creek, Ga.	between headwater and station 02201300	23	10 Sept	.23	.01	—	—	—
Duhart Creek, Ga.	between headwater and station 02200410	3.17	6 Oct	1.9	.6	—	—	—
Do.	between stations 02200410 and 02200440	283	6 & 13 Oct	44.8	.16	—	—	—
McBean Creek, Ga.	between headwater and station 02197200	71.4	4 Oct	41.4	.58	—	—	—
Ogeechee Creek, Ga.	between headwater and station 02202210	14	9 Sept	0	0	—	—	—
Do.	between headwater and station 02202240	141	—	—	.07	0	—	—
Rocky Creek, Ga.	between stations 02201360 and 02201365	3.1	5 Oct	-12	-04	—	—	—
Williamsonswamp Creek, Ga.	between headwater and station 02201000	109	—	—	—	4 Oct	12	.11
Do.	between stations 02201070 and 02201150	48	15 Oct	4.6	.1	—	—	21 July 11.0
Altamaha–Satilla–St Marys River Basin								
Altamaha River, Ga.	between stations 02225000 and 02226000	1,990	—	—	—	30 Sept	110	0.05
Beards Creek, Ga.	between headwater and station 02225850	74.4	—	—	—	—	—	20 & 31 Aug -40.0
Jacks Creek, Ga.	between headwater and station 02225315	8.63	—	—	—	—	—	31 July 0
Middle Prong St Marys, Fla.	between headwater and station 02229000	125	—	—	—	17 July	0.32	0
Ophoee River, Ga.	between stations 02225480 and 02225500	40	—	—	—	—	—	1 June 0
Pendleton Creek, Ga.	between headwater and station 02225360	101	—	—	—	—	—	1 Aug -4.1
Penholoway Creek, Ga.	between headwater and station 02226100	209	—	—	—	27 July	0	0
Swift Creek, Ga.	between headwater and station 02225395	36	—	—	—	—	—	1 July 0
Do.	between stations 02225395 and 02225405	10.3	—	—	—	—	—	31 July 0
Do.	between stations 02225405 and 02225420	9.3	—	—	—	—	—	31 July 0.7
Turnpike Creek, Ga.	between headwater and station 02216180	49.2	—	—	—	—	—	28 May 0

The shape of a flow-duration curve can be described by a streamflow index, modified by Pettyjohn and Henning (1979) as:

$$\sqrt{\frac{Q_{25}}{Q_{75}}}$$

where Q_{25} (75th percentile) is the streamflow equaled or exceeded 25 percent of the time and less than or equal to 75 percent of the time; and Q_{75} (25th percentile) is the streamflow equaled or exceeded 75 percent of the time and less than or equal to 25 percent of the time. Stricker (1983) found that the lower the ratio, the greater the portion of baseflow from ground water.

Discharge data from 14 stations for the period 1971–2001 were analyzed to determine the streamflow index (table 6). Streamflow indices ranged from a low of 1.48 at the Brushy Creek (station 02197600) in the SSO River Basin to a high to 7.31 at Little Satilla River (station 02227500) in the SAS River Basin.

The lowest index in the SSO River Basin is for the station on Brushy Creek near Wrens, Ga. (station 02197600) (fig. 22; table 6), where the lithology is mostly sand interlayered with clay, aquifers are more deeply incised by streams, and ground water contributes a large percentage of baseflow. The flow-duration curve has a gentle slope. Brushy Creek is the only station in the upper Coastal Plain area of the SSO River Basin. The highest index in the SSO River Basin is Canoochee River near Claxton, Ga. (station 02203000) (fig. 23), where the lithology is mostly sand. The curve is steep, indicating high runoff. In this area, aquifers are deeply buried and ground water contributes only a small percentage to baseflow. There appears to be little difference between the flow duration of mean daily streamflows in the upper and lower Coastal Plain in the SSO River Basin. Brushy Creek in the upper Coastal Plain has an index of 1.48, and Brier Creek in the lower Coastal Plain has an index of 1.74 (fig. 22; table 6).

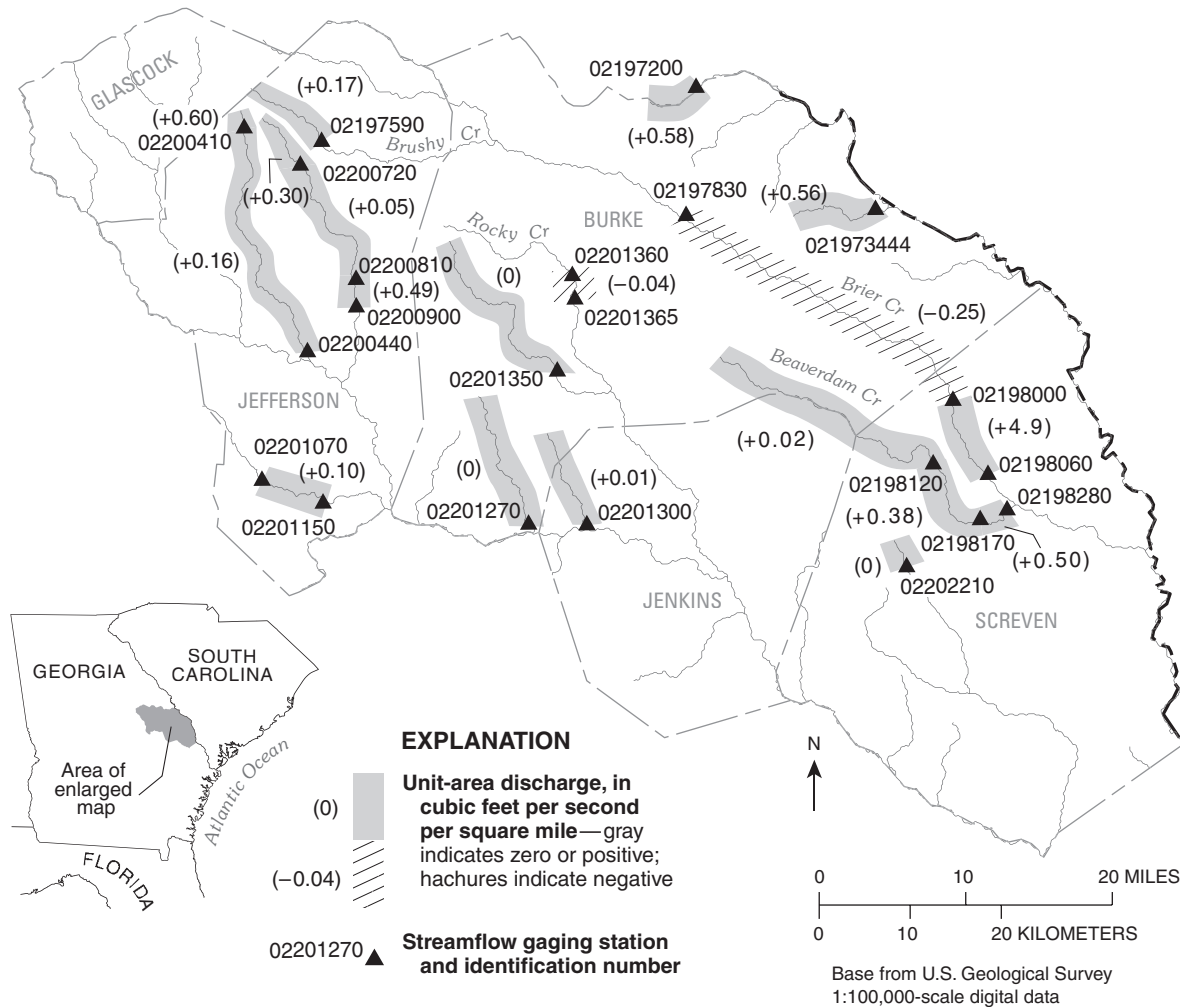


Figure 18. Selected streamflow gaging stations monitored during the 1954 drought and corresponding intermediate unit-area discharge.

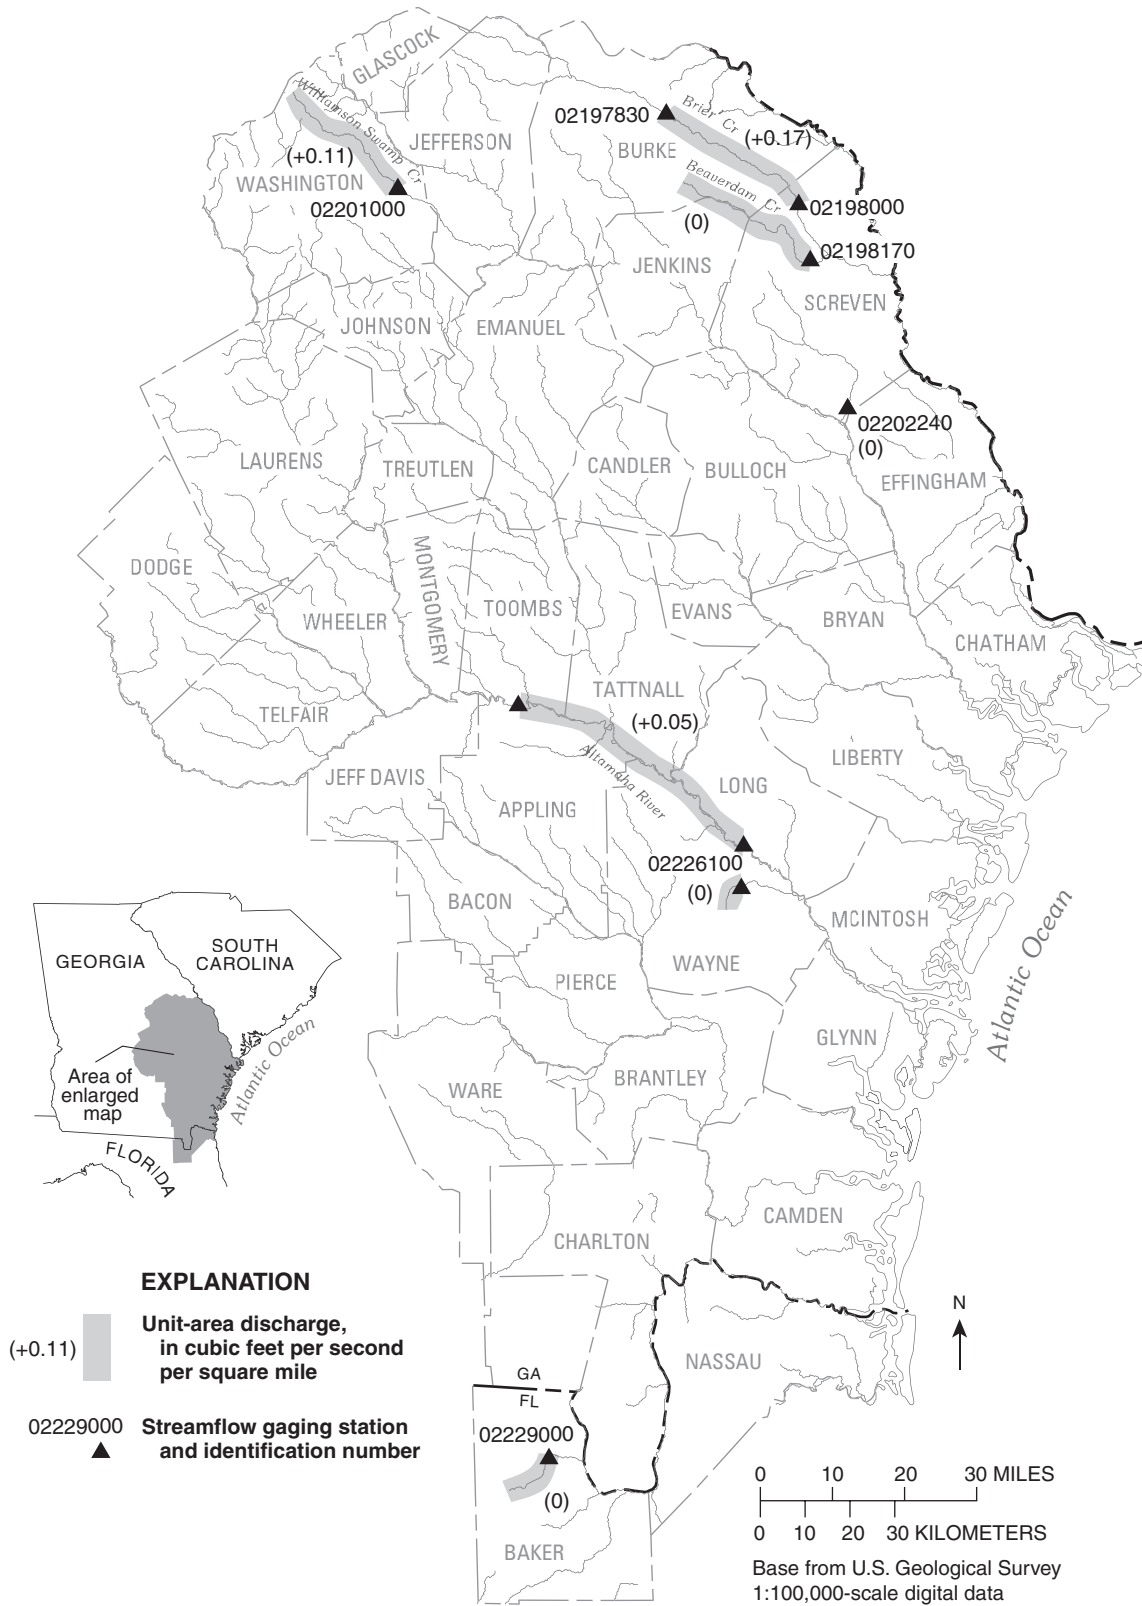


Figure 19. Selected streamflow gaging stations monitored during the 1981 drought and corresponding intermediate unit-area discharge.

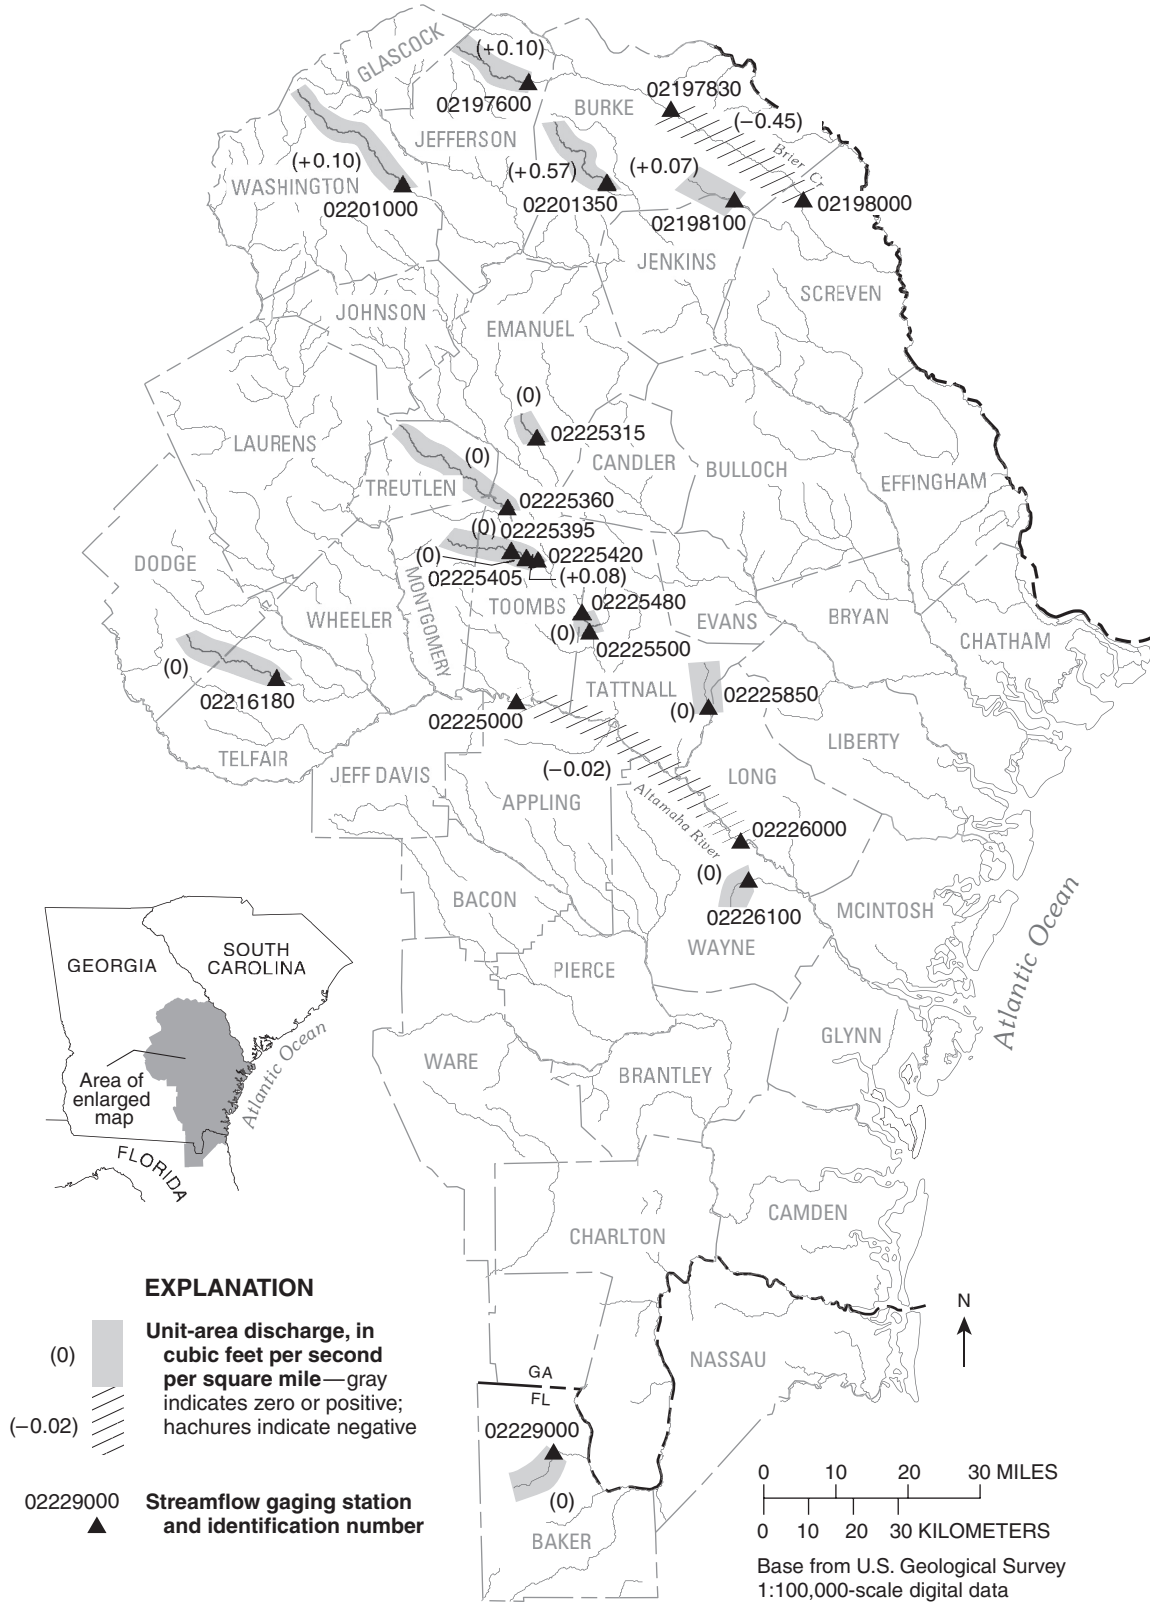


Figure 20. Selected streamflow gaging stations monitored during the 2000 drought and corresponding intermediate unit-area discharge.

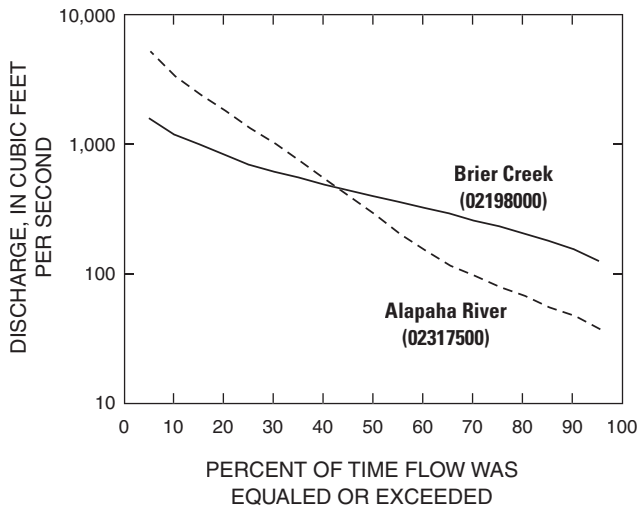


Figure 21. Comparison of two flow-duration curve types: gentle curve along Brier Creek (station 02198000) and a steep curve along the Alapaha River (station 02317500).

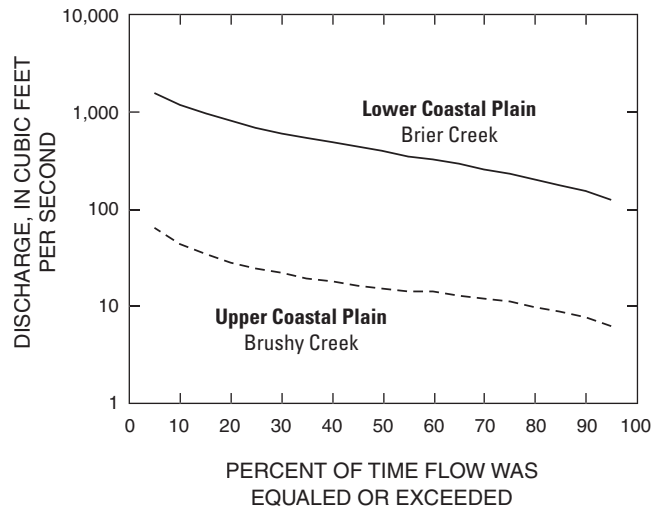


Figure 22. Duration of mean daily streamflow for Brushy Creek (station 02197600) near Wrens, Georgia, and Brier Creek (station 02198000) at Millhaven, Georgia, 1971–2001.

Table 6. Flow-duration curve index $[(Q_{25}/Q_{75})^{1/2}]$ and curve shape for selected streams in the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins, 1971–2001.

[mi², square mile; ft³/s, cubic foot per second; part of basin: U, upper; L, lower]

Station identification	Station name	Part of basin	Drainage area (mi ²)	Q ₂₅ (ft ³ /s)	Q ₇₅ (ft ³ /s)	Index	Curve shape
Salkehatchie–Savannah–Ogeechee River Basin							
02175500	Salkehatchie River near Miley, S.C.	U	341	444	157	1.68	Gentle
02197600	Brushy Creek near Wrens, Ga.	U	28	24	11	1.48	do.
02198000	Brier Creek at Millhaven, Ga.	U	646	755	250	1.74	do.
02202500	Ogeechee River near Eden, Ga.	L	2,650	2,940	557	2.3	Steep
02203000	Canoochee River near Claxton, Ga.	L	555	674	23	5.41	do.
Altamaha–Satilla–St Marys River Basin							
02215500	Ocumulgee River at Lumber City, Ga.	U	5,180	6,920	2,060	1.83	Gentle
02223500	Oconee River at Dublin, Ga.	U	4,390	5,480	1,120	2.21	Steep
02225000	Altamaha River near Baxley, Ga.	U	11,600	15,300	3,680	2.04	do.
02225500	Ohoopsee River near Reidsville, Ga.	U	1,110	1,410	105	3.66	do.
02226000	Altamaha River at Doctortown, Ga.	L	13,600	18,700	4,140	2.13	do.
02226500	Satilla River near Waycross, Ga.	L	1,190	1,260	66	4.37	do.
02227500	Little Satilla River near Offerman, Ga.	L	646	642	12	7.31	do.
02228000	Satilla River at Atkinson, Ga.	L	2,790	2,995	218	3.71	do.
Suwannee River Basin							
02317500	Alapaha River at Statenville, Ga.	L	1,390	1,450	96	3.89	Steep

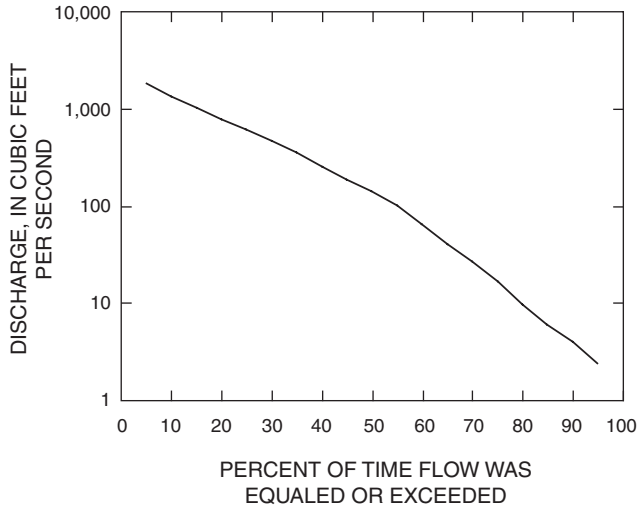


Figure 23. Duration of mean daily streamflow for Canoochee River (station 02203000) near Claxton, Georgia, in the upper Salkehatchie–Savannah–Ogeechee River Basin, 1971–2001.

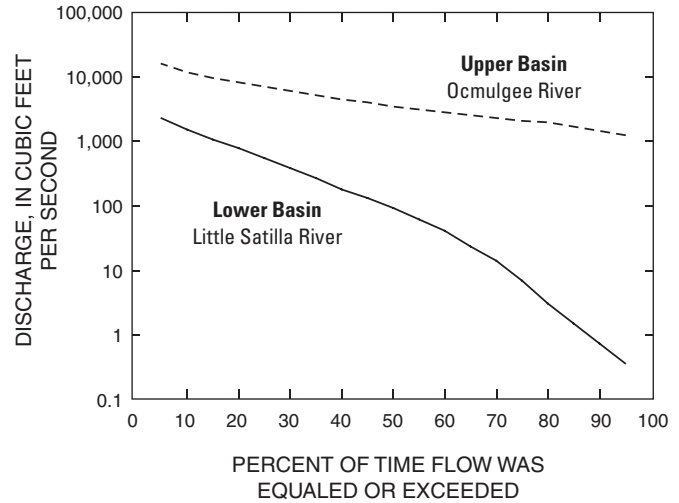


Figure 24. Duration of mean daily streamflow for Little Satilla River (station 02227500) near Offerman, Georgia, and Ocmulgee River (station 02215500) at Lumber City, Georgia, in the Altamaha–Satilla–St Marys River Basin, 1971–2001.

In the SAS River Basin, all measured discharges have indices greater than 2, except the Ocmulgee River, which has an index of 1.83. An index greater than 2 corresponds to a steep slope. The lowest ratio in the SAS River Basin is Ocmulgee River at Lumber City, Ga. (station 02215500) (fig. 24), where the lithology is a heterogeneous mix of sand, silt, and clay. This station is located in the upper part of the basin where baseflow dominates streamflow. The highest index (7.31) in the SAS River Basin is the station on the Little Satilla River at Offerman, Ga. (station 02227500) (fig. 24), where the lithology is mostly clay, sand, and silt beds containing phosphate. This station is located in the lower part of the basin, where runoff dominates streamflow and the aquifer is deeply buried.

In the Suwannee River Basin, the only discharge that was analyzed was at the Alapaha River at Statenville, Ga. (station 02317500) (fig. 25), where the lithology is mostly sand, silt, clay, limestone, and dolomite. The shape of the curve indicates there is a large contribution of runoff to streamflow, which corresponds to a higher index (3.89) than observed in the upper Coastal Plain.

Linear-regression analysis was used to determine the flow duration that best estimates baseflow for streams in the area. Mean annual baseflow calculated by HYSEP for the 14 stations for the period 1971–2001 were compared to flow durations at the stations ranging from Q_1 to Q_{99} ; the best fit between HYSEP estimates and flow duration was at the Q_{35} flow duration (flow is equaled or exceeded 35 percent of the time). The best regression model had an r^2 value of 0.9970 and a p -value of less than 0.0001 (table 7). Linear-regression analysis was used on the eight stations selected for HYSEP to compare results. Both sets of data show the Q_{35} as the best estimate of baseflow. The linear regression of flow duration is probably more representative of average

climatic conditions rather than drought conditions because the analysis compares mean annual baseflow and flow duration for several stations with differing drainage areas for the 31-year period. Linear-regression analysis of flow duration shows drought conditions most likely occur above the Q_{80} flow duration. Figure 26 illustrates the regression of Q_{35} with mean annual baseflow from HYSEP.

Comparison of Results

Major variation exists between baseflow estimation using drought-streamflow analysis and both HYSEP and linear-regression analysis of flow duration. Slight variation exists between HYSEP and flow-duration methods. The same 14 stations were selected to make a comparison of the three methods. Using the drought-streamflow analysis, the minimum contribution to streamflow from baseflow was observed. During drought conditions, the following observations were made: (1) total streamflow was equivalent to baseflow; (2) surface-water runoff to streamflow and ground-water contribution was reduced; (3) ground-water levels decreased; and (4) some streams reaches went dry. Under average precipitation conditions during 1971–2001, baseflow ranged from 33 to 70 percent of total streamflow during 1997 (average conditions are best represented by 1997 data) and increased to 27 to 81 percent in drought years 1981 and 2000, respectively (table 3). For the study area, mean annual baseflow during drought conditions (1981 and 2000) ranged from 0 to 24 percent of mean annual streamflow for 1971–2001 (table 8). These values are far below the 39–74 percent estimated using HYSEP and 65–102 percent estimated using linear-regression analysis of flow duration (fig. 8).

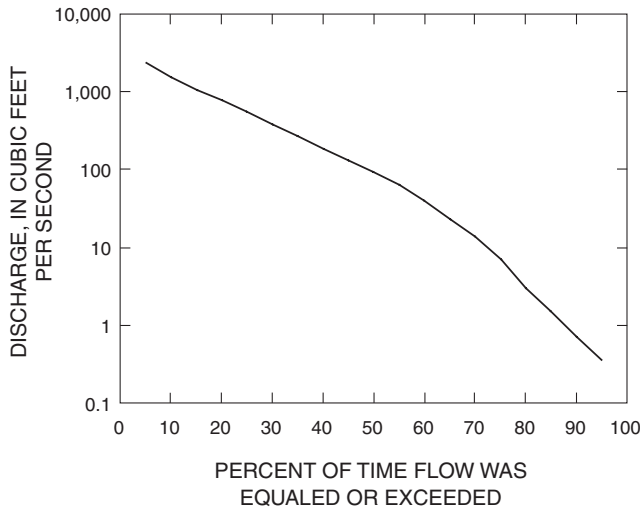


Figure 25. Duration of mean daily streamflow for Alapaha River (station 02317500) at Statenville, Georgia, in the Suwannee River Basin, 1971–2001.

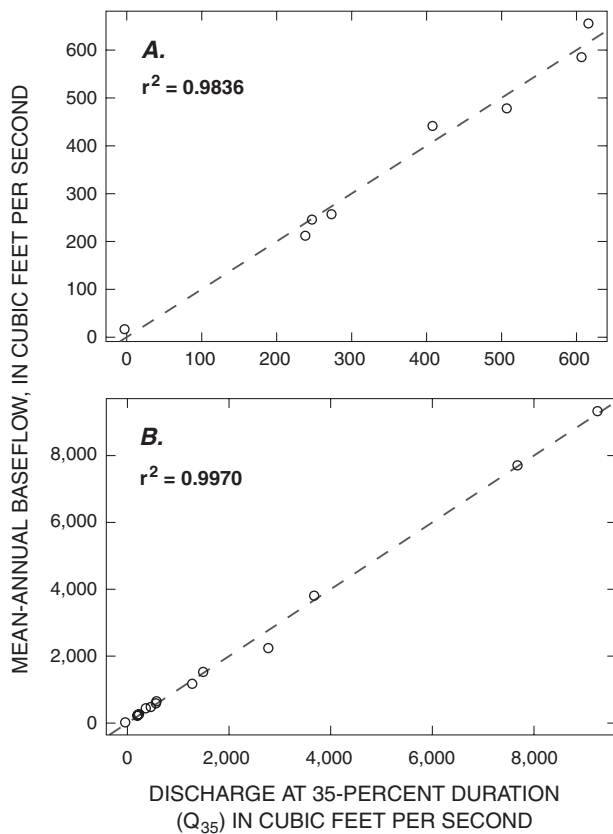


Figure 26. Regression of Q_{35} versus mean annual baseflow for the (A) 8 and (B) 14 streamflow gaging stations selected for hydrograph-separation technique, Georgia and South Carolina, 1971–2001.

Table 7. Coefficient of determination (r^2) and residual standard of error for flow durations evaluated as indicators of baseflow for 8 and 14 streamflow gaging stations selected in the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys, and Suwannee River Basins, 1971–2001.

[P-value = less than 0.5 for the 8 stations; less than 0.0001 for the 14 stations]

Flow duration	r-squared		Residual standard error	
	8 stations	14 stations	8 stations	14 stations
Q_{01}	0.69	0.98	128.40	463.7
Q_{05}	0.75	0.98	116.40	346.3
Q_{10}	0.77	0.98	110.10	345
Q_{15}	0.82	0.98	97.04	311.4
Q_{20}	0.88	0.99	80.82	238.7
Q_{25}	0.92	0.99	66.41	202.8
Q_{30}	0.95	0.99	52.09	179.8
Q_{35}	0.98	1.00	29.71	168.8
Q_{40}	0.98	0.99	36.56	169.4
Q_{45}	0.92	0.99	63.81	205.7
Q_{50}	0.81	0.99	100.60	224.7
Q_{55}	0.65	0.99	136.60	257.1
Q_{60}	0.46	0.99	170.20	266.1
Q_{65}	0.33	0.99	189.60	275.4
Q_{70}	0.24	0.98	202.50	307.4
Q_{75}	0.18	0.98	209.30	347.5
Q_{80}	0.15	0.98	213.90	377.8
Q_{85}	0.12	0.98	217.80	412.6
Q_{90}	0.11	0.97	219.30	456.4
Q_{95}	0.10	0.97	219.50	481.6
Q_{99}	0.13	0.97	216.70	518.2

The flow-duration method of estimating baseflow gives an overestimation of baseflow for a particular stream. Regression analyses of streamflow data indicate that the flow-duration point that most closely estimates baseflow is the 35-percent flow-duration point (Q_{35}) (flow is greater than or equaled to 35 percent of the time and less than or equaled to 65 percent of the time). Stricker (1983) estimated baseflow as the 65-percent flow-duration point (Q_{65}). The difference could merely be a matter of interpretation. Q_{35} is the flow that is equaled or exceeded 35 percent of the time or less than or equal 65 percent of the time, corresponding to a Q_{65} . Nevertheless, the linear regression of streamflow duration is not a reliable estimator of baseflow, particularly in the upper part of the basin area where streams intersect the aquifer as indicated by the 102-percent baseflow estimation of the Salkehatchie River, nor in the lower part of the study area where the aquifer is deeply buried. The variability in basin size, the lithology, and ground-water levels affect the reliability of using the flow-duration method as a good estimator of baseflow.

The HYSEP method of estimating baseflow most likely relates to actual baseflow of the three methods used. HYSEP systematically separates baseflow from runoff by connecting low points of the streamflow hydrograph. HYSEP is most

Table 8. Comparison of three methods used to calculate baseflow for selected streamflow gaging stations in the Salkehatchie–Savannah–Ogeechee, Altamaha–Satilla–St Marys and Suwannee River Basins, 1971–2001.

[bold, stations selected for HYSEP; mi², square mile; ft³/s, cubic foot per second; in/yr, inch per year; %, percent of total streamflow]

Station identification	Drainage area (mi ²)	31-year mean annual streamflow (ft ³ /s, in/yr)		Estimated baseflow									Mean annual streamflow	
				Flow duration (Q ₃₅)			HYSEP			1981 and 2000 average of lowest flow			1981	2000
				(ft ³ /s)	(in/yr)	(%)	(ft ³ /s)	(in/yr)	(%)	(ft ³ /s)	(in/yr)	(%)	(ft ³ /s)	(ft ³ /s)
Salkehatchie–Savannah–Ogeechee River Basin														
02175500	341.0	357.0	14.23	365.0	14.50	102	246	9.80	69	28.0	1.11	11	189.0	174.0
02197600	28	24.5	11.87	19	9.21	78	17	8.24	69	3.35	1.62	20	13.8	12.1
02198000	646	598	12.58	588	12.4	98	442	9.29	74	95	2	21	383	297
02202500	2,650	2,330	11.94	2,160	11.1	93	1,529	7.83	66	136	.69	9	823	803
02203000	555	484	11.84	401	9.82	83	257	6.29	54	2.5	.06	1	116	169
Altamaha–Satilla–St Marys River Basin														
02215500	5,180	5,510	14.44	5,210	13.7	95	3,811	10	69	928	2.43	24	2,570	2,460
02223500	4,390	4,390	13.54	3,950	12.2	90	2,238	6.9	51	399	1.23	18	2,230	1,780
02225000	11,600	11,700	13.69	10,800	12.6	92	7,704	9.02	66	1,570	1.84	20	5,330	4,850
02225500	1,110	1,040	12.72	863	10.6	83	585	7.15	57	28	.34	5	309	476
02226000	13,600	13,900	13.87	12,900	13	93	9,330	9.31	67	1,590	1.6	17	6,050	5,640
02226500	1,190	1,110	12.56	725	8.2	65	478	5.41	43	8.75	.1	2	118	252
02227500	646	542	11.38	353	7.42	65	212	4.45	39	0	0	0	75.4	85.2
02228000	2,790	2,390	11.63	1,860	9.05	78	1,171	5.7	49	33	.16	3	326	438
Suwannee River Basin														
02317500	1,390	1,170	11.34	876	8.49	75	656	6.36	56	31.0	0.30	5	138	437

reliable for estimating drainage areas of less than 100 mi² with at least 20 years of continuous streamflow data. Because of the limited availability of data, the drainage-area size criterion was increased and the period-of-record criterion was increased to include extremes in precipitation conditions. Table 8 compares mean annual baseflow of selected streams using the hydrograph-separation and linear-regression analysis of flow duration, and drought-streamflow analysis methods. An example of the variability in baseflow estimation is observed at station 02175500 (Salkehatchie River) (fig. 1). Part of the river is in the upper Coastal Plain where there is a high degree of interconnection between the stream and the aquifer resulting in a substantial contribution of ground water to streamflow. According to the methods used, linear-regression analysis estimates that baseflow is equivalent to the flow at Q₃₅, which in this case is 102 percent of the mean annual streamflow. The drought-streamflow analysis estimates that baseflow is 11 percent of total streamflow. Again, this is an unreasonable estimation because the stream is in the upper Coastal Plain where there is a greater interconnectivity with the aquifer. The HYSEP method estimates baseflow as 69 percent of total streamflow, which seems most reasonable of the three methods, considering the size and location of the basin.

Summary

Stream-aquifer relations were evaluated in the 67-county area of southeast Georgia, southwest South Carolina, and northeast Florida (55 counties in Georgia, 5 counties in Florida, and 7 counties in South Carolina) during a variety of climatic conditions for the period from 1971–2001. Ground-water discharge to streams was estimated using three methods: (1) HYSEP, an automated hydrograph-separation program; (2) drought measurement of baseflow; and (3) a comparison of mean annual baseflow and flow-duration data using a simple linear-regression analysis. The hydrograph-separation method provides the best estimate of mean annual ground-water discharge to streams in the study area. The analysis of drought streamflow provides an estimate of the minimum ground-water discharge to streamflow, whereas linear-regression analysis overestimates an average value for a given basin. Analyses were conducted using 8 continuous-record streamflow gaging stations for hydrograph separation, 14 continuous-record streamflow gaging stations for streamflow duration, and 62 continuous-record and partial-record streamflow gaging stations for drought streamflow; 9 U.S. Geological Survey wells; and 11 National Weather

Service stations. Streams and tributaries were grouped into the Salkehatchie–Savannah–Ogeechee River, Altamaha–Satilla–St Marys River, and Suwannee River Basins for this study.

Water in streams and aquifers interact through a dynamic hydrologic system including aquifers, streams, reservoirs, and floodplains. These systems are interconnected and form a hydrologic environment that is stressed by natural hydrologic, climatic, and anthropogenic factors. Under steady-state conditions, most ground-water systems can be divided into three subsystems: local flow, characterized by relatively shallow and short flowpaths that extend from a topographic high to an adjacent topographic low; intermediate flow, which includes at least one local flow system between respective points of recharge and discharge; and regional flow, which begins at or near a major ground-water divide and terminates at a regional drain.

Recharge to the hydrologic system is provided by rainfall that ranges from an average of about 47 to 53 inches per year based on the 30-year period 1971–2000. Most of the recharge is either discharged from the shallow, local flow systems into small streams, or is lost as evapotranspiration. In the intermediate flow system, some water is discharged to major tributaries. Climatic effects dominate in the surficial aquifer. Water levels generally are highest in the winter and early spring when precipitation is greatest and evapotranspiration is least; water levels are lowest during the summer and fall when precipitation is least and evapotranspiration is highest. In the lower Coastal Plain, with the exception of the unconfined section of the surficial aquifer system, the aquifers are deeply buried and confined. In this area, climatic effects are greatly diminished, and fluctuations are due to changes in ground-water pumping.

Three methods to estimate baseflow were compared because a number of variables can affect baseflow including regulation of flows; physical properties of the basin such as vegetative cover, slope, area, shape, land use, soil thickness; and infiltration capacity as well as antecedent soil moisture and depth to ground water. The river or tributary at each streamflow gaging station selected for HYSEP analysis had negligible diversion or regulation, drainage area less than 1,400 square miles, and at least 31 years of continuous record. For the 8 streamflow gaging stations selected for HYSEP, baseflow contributed from 39 to 74 percent of streamflow with a mean contribution of 58 percent.

During a high-precipitation year, baseflow accounted for 48 percent of total streamflow, 63 percent during an average-precipitation year, and 60 percent during a low-precipitation year. During dry periods, there is a reduction in runoff, and baseflow is the major contributor to streamflow. During drought conditions, there is less water available to recharge the aquifer and ground-water levels decline.

Baseflow estimates vary from the upper and lower parts of a basin. Mean annual baseflow in the upper Salkehatchie–Savannah–Ogeechee River Basin during 1971–2001 ranges from 66 to 74 percent and is 54 percent in the lower basin. In the upper Altamaha–Satilla–St Marys River Basin, baseflow

is about 57 percent of total streamflow; in the lower part of the basin, baseflow ranges from about 39 to 43 percent of total streamflow. In the lower part of the Suwannee River Basin, baseflow is about 56 percent of total streamflow.

Drought streamflow represents a quantitative estimate of minimum ground-water discharge to streams because during drought periods, streamflow is composed mostly of baseflow as estimated by HYSEP. During droughts, ground-water contribution to streamflow mostly is from the intermediate and regional flow systems. During the 1981 and 2000 droughts, baseflow contribution ranged from 0 to 24 percent of streamflow. This low contribution most likely is due to a lower ground-water levels during drought.

Linear-regression analysis was used to determine the flow duration that best estimates baseflow for streams in the area. Mean annual baseflow at 14 streamflow gaging stations in the study area for 1971–2001 were compared to the Q_1 to Q_{99} flow durations at those stations using a statistical computer program; the best fit between HYSEP estimates and flow duration was at the Q_{35} flow duration. Discharge data during 1971–2001 for 14 streamflow gaging stations were analyzed to determine the streamflow index. Indices ranged from a low of 1.48 at the Brushy Creek station in the Salkehatchie–Savannah–Ogeechee River Basin to a high of 7.31 at Little Satilla River in the Altamaha–Satilla–St Marys River Basin. Generally, high indices are associated with steep slopes that are indicative of limited basin storage and dominant contribution from runoff. Low indices are associated with flat slopes that are indicative of equal contribution of ground water and runoff.

Comparison of the three methods used to estimate baseflow shows that drought-streamflow conditions are a minimum estimate of mean-annual baseflow contributions. Because ground-water levels may decline during droughts, the amount of baseflow to streamflow correspondingly declines. The linear-regression analysis of streamflow duration overestimates baseflow when generalizing across a large basin because of variability in size and geology of basins. The HYSEP method of baseflow estimation most likely provides a reasonable estimate because of the stringent requirements placed on basin selection, which helps to reduce the number of errors in estimation. This comparison is illustrated in the baseflow estimation at Salkehatchie River (station 02175500). Part of the Salkehatchie River is in the upper Coastal Plain where there is a high degree of interconnection between the stream and the aquifer, resulting in a substantial contribution of ground water to streamflow. According to the methods used, linear-regression analysis estimates that baseflow is equivalent to the flow at Q_{35} , which in this case is 102 percent of the mean annual streamflow. The drought-streamflow analysis estimates baseflow as 11 percent of total streamflow. This is an unreasonable estimation because part of the stream is in the upper Coastal Plain where there is a high degree of interconnectivity with the aquifer. The HYSEP method estimates baseflow as 69 percent of total streamflow. The same 14 stations were used to make a comparison among the three methods used to estimate baseflow.

Overall, for the study area, mean annual baseflow during the 1981 and 2000 droughts ranged from 0 to 24 percent of mean annual total streamflow for the period 1971–2001 using drought-streamflow analysis. During 1971–2001, baseflow was estimated as ranging from 39–74 percent of streamflow using HYSEP and 65–102 percent using linear-regression analysis of flow duration.

Selected References

- Abu-Ruman, Malek, and Clarke, J.S., 2001, Preliminary simulation of pond-aquifer flow and water availability at a seepage pond near Brunswick, Georgia, *in* Proceedings of the 2001 Georgia Water Resources Conference held March 26–27, 2001, at The University of Georgia, Kathryn J. Hatcher, ed., Institute of Ecology, The University of Georgia, Athens, Georgia, p. 669–672.
- Atkins, J.B., Journey, C.A., and Clarke, J.S., 1996, Estimation of ground-water discharge to streams in the central Savannah River basin of Georgia and South Carolina: U.S. Geological Survey Water-Resources Investigations Report 96-4179, 36 p.
- Bevans, H.E., 1986, Estimating stream-aquifer interactions in coal areas of eastern Kansas by using streamflow records, *in* Subitzky, Seymour, ed., Selected papers in the Hydrologic Sciences: U.S. Geological Survey Water-Supply Paper 2290, p. 51–64.
- Brooks, R., Clarke, J.S., and Faye, R.E., 1985, Hydrogeology of the Gordon aquifer system of east-central Georgia: Georgia Geologic Survey Information Circular 75, 41 p.
- Carter, R.F., 1983, Effects of the drought of 1980–81 on streamflow and ground-water levels in Georgia: U.S. Geological Survey Water-Resources Investigations Report 83-4158, 46 p.
- Carter, R.F., and Putnam, S.A., 1977, Low-flow frequency of Georgia streams: U.S. Geological Survey Water-Resources Investigations Report 77-127, 104 p.
- Carter, R.F., and Stiles, H.R., 1983, Average annual rainfall and runoff in Georgia, 1941–1970: Georgia Geologic Survey Hydrologic Atlas 9, 1 sheet.
- Chowns, T.M., and Williams, C.T., 1983, Pre-Cretaceous rocks beneath the Georgia Coastal Plain—Regional implications, *in* Gohn, G.S., ed., Studies related to the Charleston, South Carolina earthquake of 1886—Tectonics and seismicity: U.S. Geological Survey Professional Paper 1313-L, p. L1–L42.
- Clark, W.Z., Jr., and Zisa, A.C., 1976, Physiographic map of Georgia: Georgia Geologic Survey State map 4, 1 sheet.
- Clarke, J.S., 2003, The Surficial and Brunswick aquifer systems—alternative ground-water resources for Coastal Georgia *in* Proceedings of the 2003 Georgia Water Resources Conference held April 23–24, 2003, at The University of Georgia, Kathryn J. Hatcher, ed., Institute of Ecology, The University of Georgia, Athens, Georgia, CD-ROM.
- Clarke, J.S., Hacke, C.M., and Peck, M.F., 1990, Geology and ground-water resources of the coastal area of Georgia: Georgia Geologic Survey Bulletin 113, 106 p.
- Clarke, J.S., and Krause R.E., 2000, Design, revision, and application of ground-water flow models for simulation of selected water-management scenarios in the coastal area of Georgia and adjacent parts of South Carolina and Florida: U.S. Geological Survey Water-Resources Investigations Report 00-4084, 93 p.
- Clarke, J.S., and West, T.C., 1997, Ground-water levels, predevelopment ground-water flow, and stream-aquifer relations in the vicinity of the Savannah River Site, Georgia and South Carolina: U.S. Geological Survey Water-Resources Investigations Report 97-4197, 120 p.
- Clarke, J.S., and West, T.C., 1998, Simulation of ground-water flow and stream-aquifer relations in the vicinity of the Savannah River Site, Georgia and South Carolina, Predevelopment through 1992: U.S. Geological Survey Water-Resources Investigations Report 98-4062, 134 p.
- Coffin, Robert, Grams, S.C., Leeth, D.C., and Peck, M.F., 2002, Continuous ground-water-level data and periodic surface-water- and ground-water-quality data, Calendar Year 2002, *in* Water Resources Data-Georgia, 2002, U.S. Geological Survey Water-Data Report GA-02-2, CD-ROM.
- Colquhoun, D.J., 1981, Variation in sea level on the South Carolina Coastal Plain, *in* Variation in sea level on the South Carolina Coastal Plain, Colquhoun, D.J., ed., International Geological Correlation Program, no. 61, p. 1–44.
- Cressler, A.M., Blackburn, D.K., and McSwain, K.B., 2001, Ground-water conditions in Georgia, 2001: U.S. Geological Survey Open-File Report 01-220, 184 p.
- Falls, W.F., Baum, J.S., Harrelson, L.G., Brown, L.H., and Jerden, James, L., Jr., 1997, Geology and hydrogeology of Cretaceous and Tertiary strata, and confinement in the vicinity of the U.S. Department of Energy Savannah River Site, South Carolina and Georgia: U.S. Geological Survey Water-Resources Investigations Report 97-4245, 125 p.
- Fanning, J.L., 1999, Water use in coastal Georgia by county and source, 1997; and water-use trends, 1980–97: Georgia Geologic Survey Information Circular 104, 37 p.
- Fanning, J.L., 2003, Water use in Georgia by county for 2000 and water-use trends for 1980–2000: Georgia Geologic Survey Information Circular 106, 176 p.

- Faye, R.E., and Mayer, G.C., 1990, Ground-water flow and stream-aquifer relations in the northern Coastal Plain of Georgia and adjacent parts of Alabama and South Carolina: U.S. Geological Survey Water-Resources Investigations Report 88-4143, 83 p.
- Faye, R.E., and Mayer, G.C., 1996, Simulation of ground-water flow in Southeastern Coastal Plain clastic aquifers in Georgia and adjacent parts of Alabama and South Carolina: U.S. Geological Survey Professional Paper 1410-F, 77 p.
- Freeze, R.A., and Witherspoon, P.A., 1966, Theoretical analysis of regional groundwater flow – 1. Analytical and numerical solutions to the mathematical model: *Water Resources Research*, v. 2, no. 4, p. 641–656.
- Freeze, R.A., and Witherspoon, P.A., 1967, Theoretical analysis of regional groundwater flow – 2. Effect of water-table configuration and subsurface permeability variation: *Water Resources Research*, v. 3, no. 2, p. 623–634.
- Freeze, R.A., and Witherspoon, P.A., 1968, Theoretical analysis of regional groundwater flow – 3. Quantitative interpretations: *Water Resources Research*, v. 4, no. 3, p. 581–590.
- Gregg, D.O., and Zimmerman, E.A., 1974, Geologic and hydrologic control of chloride contamination in aquifers at Brunswick, Glynn County, Georgia: U.S. Geological Survey Water-Supply Paper 2029-D, 44 p.
- Hale, T.W., Hopkins, E.H., and Carter, R.F., 1989, Effects of the 1986 drought on streamflow in Alabama, Georgia, North Carolina, South Carolina, Tennessee, and Virginia: U.S. Geological Survey Water-Resources Investigations Report 89-4212, 102 p.
- Hickey, A.C., Kerestes, J.F., and McCallum, B.E., 2002, Continuous water-level, streamflow, water-quality data, and periodic water-quality data, Water Year 2002 in Water Resources Data—Georgia, 2002: U.S. Geological Survey Water-Data Report GA-02-1, CD-ROM.
- Horton, R.E., 1933, The role of infiltration in the hydrologic cycle: *Transactions of American Geophysical Union*, v. 14, p. 446–460.
- Huddleston, P.F., 1988, A revision of the lithostratigraphic units of the Coastal Plain of Georgia, Miocene through Holocene: *Georgia Geologic Survey Bulletin* 104, 162 p.
- Huddleston, P.F., 1993, The Oligocene stratigraphic framework on the Coastal Plain of the Southeastern United States: Abstracts with Programs, Geological Society of America, v. 25, no. 4, p. 24.
- Huddleston, P.F., and Hetrick, J.H., 1986, Upper Eocene stratigraphy of central and eastern Georgia: *Georgia Geologic Survey Bulletin* 95, 78 p.
- Huddleston, P.F., and Summerour, J.H., 1996, The lithostratigraphic framework of the uppermost Cretaceous and lower Tertiary of eastern Burke County, Georgia: *Georgia Geologic Survey Bulletin* 127, 94 p.
- Kellam, M.F., and Gorday, G.L., 1990, Hydrogeology of the Gulf Trough–Apalachicola Embayment area, Georgia: *Georgia Geologic Survey Bulletin* 94, 74 p.
- Krause, R.E., and Clarke, J.S., 2001, Saltwater contamination of ground water at Brunswick, Georgia and Hilton Head Island, South Carolina, in *Proceedings of the 2001 Georgia Water Resources Conference* held March 26–27, 2001, at The University of Georgia, Kathryn J. Hatcher, ed., Institute of Ecology, The University of Georgia, Athens, Georgia, p. 756–759.
- Krause, R.E., and Randolph, R.B., 1989, Hydrology of the Floridan aquifer system in southeast Georgia and adjacent Florida and South Carolina: U.S. Geological Survey Professional Paper 1403-D, 65 p.
- Leeth, D.C., 1999, Hydrogeology of the Upper Floridan Aquifer in the vicinity of the Marine Corps Logistics Base near Albany, Georgia: U.S. Geological Survey Water-Resources Investigations Report 98-4202, 49 p.
- Leeth, D.C., Clarke, J.S., Craigg, S.D., and Wipperfurth, C.J., 2003, Ground-water conditions and studies in Georgia, 2001: U.S. Geological Survey Water-Resources Investigations Report 03-4032, 96 p.
- Linsley, R.K., Kohler, M.A., and Paulhus, J.L.H., 1982, *Hydrology for Engineers* (3rd ed.): New York, McGraw-Hill, 508 p.
- McCallum, B.E., Cressler, A.M., Blackburn, D.K., and McSwain, K.B., 2000, Water resources data, Georgia, 2000—Continuous ground-water level data, and periodic surface-water- and ground-water-quality data, Calendar Year 2000: U.S. Geological Survey Water-Data Report GA-00-2, CD-ROM.
- McCallum, B.E., and Hickey, A.C., 2000, Water resources data, Georgia, 2000—Continuous water-level, streamflow, water-quality data, and periodic water-quality data, Water Year 2000: U.S. Geological Survey Water-Data Report GA-00-1, CD-ROM.
- Miller, J.A., 1986, Hydrogeologic framework of the Floridan aquifer system in Florida and in parts of Georgia, Alabama, and South Carolina: U.S. Geological Survey Professional Paper 1403-B, 91 p.
- Mosner, M.S., 2002, Stream-aquifer relations and the potentiometric surface of the Upper Floridan aquifer in the Lower Apalachicola–Chattahoochee–Flint River Basin in parts of Georgia, Florida, and Alabama, 1999–2000: U.S. Geological Survey Water-Resources Investigations Report 02-4244, 45 p.

- National Oceanic and Atmospheric Administration, 2002, Monthly station normals of temperature, precipitation, and heating and cooling degree days 1971–2000: Asheville, N.C., no. 81, 28 p.
- Peck, M.F., Clarke, J.S., Abu-Ruman, Malek, and Laitta, M.T., 2001, Hydrogeologic conditions at two seepage ponds in the coastal area of Georgia, August 1999 to February 2001, *in* Proceedings of the 2001 Georgia Water Resources Conference held March 26–27, 2001, at The University of Georgia, Kathryn J. Hatcher, ed., Institute of Ecology, The University of Georgia, Athens, Georgia, p. 768–771.
- Peck, M.F., Clarke, J.S., Ransom, Camille, III, and Richards, C.J., 1999, Potentiometric surface of the Upper Floridan aquifer in Georgia and adjacent parts of Alabama, Florida, and South Carolina, May 1998; and water-level trends in Georgia, 1990–1998: Georgia Geologic Survey Hydrologic Atlas 22, 1 sheet.
- Pettyjohn, W.A., and Henning, Roger, 1979, Preliminary estimate of ground-water recharge rates, related streamflow, and water quality in Ohio: Ohio State University, Water Resources Center, 321 p.
- Price, Van, Jr., Fallaw, W.C., and McKinney, J.B., 1991, Geologic setting of the new production reactor reference site within the Savannah River Site (U): Aiken, S.C., Westinghouse Savannah River Company, report no. WSRC-RP-91-96, ESH-EMS-90171, 80 p.
- Prowell, D.C., and O’Conner, B.J., 1978, Belair fault zone—Evidence of Tertiary fault displacement in eastern Georgia: *Geology*, v. 6, no. 11, p. 681–684.
- Prowell, D.C., Christopher, R.A., Edwards, L.E., Bybell, L.M., and Gill, H.E., 1985, Geologic section of the updip Coastal Plain from central Georgia to western South Carolina: U.S. Geological Survey Miscellaneous Field Studies Map, MF-1737, 10 p.
- Randolph, R.B., Pernik, L.M., and Garza, Regina, 1991, Water-supply potential of the Floridan aquifer system in the Coastal area of Georgia—A digital model approach: Georgia Geologic Survey Bulletin 116, 30 p.
- Reynolds, R.J., 1982, Ground-water contributions of streams on Long Island, New York: U.S. Geological Survey Water-Resources Investigations Report 81-48, 33 p.
- Reynolds, R.J., 1969, Mean streamflows from discharge measurements: *International Association of Scientific Hydrology Bulletin*, v. XIV, no. 4, p. 95–110.
- Riggs, H.C., 1963, The base-flow recession curve as an indicator of ground water: *International Association of Scientific Hydrology Publication* 63, p. 353–363.
- Rutledge, A.T., 1993, Computer programs for describing the recession of ground-water discharge and for estimating mean ground-water recharge and discharge from streamflow records: U.S. Geological Survey Water-Resources Investigations Report 93-4121, 45 p.
- Searcy, J.K., 1959, Flow-duration curves: U.S. Geological Survey Water-Supply Paper 1542-A, 33 p.
- Sloto, R.A., and Crouse, M.Y., 1996, HYSEP – A computer program for streamflow hydrograph separation and analysis: U.S. Geological Survey Water-Resources Investigations Report 96-4040, 67 p.
- Southeast Regional Climate Center, accessed October 10, 2002, at <http://cirrus.dnr.state.sc.us/cgi-bin/sercc/cliMAIN.pl?sc0448>.
- Stricker, V.A., 1983, Baseflow of streams in the outcrop areas of southeastern sand aquifer: South Carolina, Georgia, Alabama, and Mississippi: U.S. Geological Survey Water-Resources Investigations Report 83-4106, 17 p.
- Thomson, M.T., and Carter, R.F., 1955, Surface water resources of Georgia during the drought of 1954: Georgia Department of Mines, Mining, and Geology Information Circular 17, 79 p.
- Toth, J.A., 1962, A theory of groundwater motion in small drainage basins in central Alberta, Canada: *Journal of Geophysical Research*, v. 67, no. 11, p. 4375–4387.
- Toth, J.A., 1963, A theoretical analysis of groundwater flow in small drainage basins: *Journal of Geophysical Research*, v. 68, no. 16, p. 4795–4812.
- Vincent, H.R., 1982, Geohydrology of the Jacksonian aquifer in central and east-central Georgia: Georgia Geologic Survey Hydrologic Atlas 8, 3 sheets.
- Weems, R.E., and Edwards, L.E., 2001, Geology of Oligocene, Miocene, and younger deposits in the coastal area of Georgia: Georgia Geologic Survey Bulletin 131, 124 p.

Prepared by U.S. Geological Survey, Water Resources
Discipline, Georgia District, Atlanta, Georgia.

Figure design and production by Bonnie J. Turcott and
Caryl J. Wipperfurth .

Editing and page layout by Patricia L. Nobles.



1879–2004