

in SPM stations do not require approvals, but a change in the designation of a monitoring site from SLAMS to SPM requires approval of the Regional Administrator.

(d) State and local governments must follow the criteria contained in appendix E to this part for siting monitor inlets, paths or probes at SLAMS stations. Appendix E adherence is optional for SPM stations.

§ 58.12 Operating schedules.

State and local governments shall collect ambient air quality data at any SLAMS station on the following operational schedules:

(a) For continuous analyzers, consecutive hourly averages must be collected except during:

- (1) Periods of routine maintenance,
 - (2) Periods of instrument calibration,
- or

(3) Periods or monitoring seasons exempted by the Regional Administrator.

(b) For Pb manual methods, at least one 24-hour sample must be collected every 6 days except during periods or seasons exempted by the Regional Administrator.

(c) For PAMS VOC samplers, samples must be collected as specified in section 5 of appendix D to this part. Area-specific PAMS operating schedules must be included as part of the PAMS network description and must be approved by the Regional Administrator.

(d) For manual PM_{2.5} samplers:

(1)(i) Manual PM_{2.5} samplers at required SLAMS stations without a collocated continuously operating PM_{2.5} monitor must operate on at least a 1-in-3 day schedule.

(ii) For SLAMS PM_{2.5} sites with both manual and continuous PM_{2.5} monitors operating, the monitoring agency may request approval for a reduction to 1-in-6 day PM_{2.5} sampling or for seasonal sampling from the EPA Regional Administrator. The EPA Regional Administrator may grant sampling frequency reductions after consideration of factors, including but not limited to the historical PM_{2.5} data quality assessments, the location of current PM_{2.5} design value sites, and their regulatory data needs. Required SLAMS stations whose measurements determine the design value for their area and that are

within plus or minus 10 percent of the NAAQS; and all required sites where one or more 24-hour values have exceeded the NAAQS each year for a consecutive period of at least 3 years are required to maintain at least a 1-in-3 day sampling frequency. A continuously operating FEM or ARM PM_{2.5} monitor satisfies this requirement.

(iii) Required SLAMS stations whose measurements determine the design value for their area and that are within plus or minus 5 percent of the daily PM_{2.5} NAAQS must have an FRM or FEM operate on a daily schedule. A continuously operating FEM or ARM PM_{2.5} monitor satisfies this requirement.

(2) Manual PM_{2.5} samplers at NCore stations and required regional background and regional transport sites must operate on at least a 1-in-3 day sampling frequency.

(3) Manual PM_{2.5} speciation samplers at STN stations must operate on at least a 1-in-3 day sampling frequency.

(e) For PM₁₀ samplers, a 24-hour sample must be taken from midnight to midnight (local standard time) to ensure national consistency. The minimum monitoring schedule for the site in the area of expected maximum concentration shall be based on the relative level of that monitoring site concentration with respect to the 24-hour standard as illustrated in Figure 1. If the operating agency demonstrates by monitoring data that during certain periods of the year conditions preclude violation of the PM₁₀ 24-hour standard, the increased sampling frequency for those periods or seasons may be exempted by the Regional Administrator and permitted to revert back to once in six days. The minimum sampling schedule for all other sites in the area remains once every six days. No less frequently than as part of each 5-year network assessment, the most recent year of data must be considered to estimate the air quality status at the site near the area of maximum concentration. Statistical models such as analysis of concentration frequency distributions as described in "Guideline for the Interpretation of Ozone Air Quality Standards," EPA-450/479-003,

U.S. Environmental Protection Agency, Research Triangle Park, NC, January 1979, should be used. Adjustments to the monitoring schedule must be made on the basis of the 5-year network assessment. The site having the highest concentration in the most current year must be given first consideration when selecting the site for the more frequent sampling schedule. Other factors such as major change in sources of PM₁₀ emissions or in sampling site characteristics could influence the location of the expected maximum concentration site. Also, the use of the most recent 3 years of data might, in some cases, be justified in order to provide a more representative database from which to estimate cur-

rent air quality status and to provide stability to the network. This multiyear consideration reduces the possibility of an anomalous year biasing a site selected for accelerated sampling. If the maximum concentration site based on the most current year is not selected for the more frequent operating schedule, documentation of the justification for selection of an alternative site must be submitted to the Regional Office for approval during the 5-year network assessment process. Minimum data completeness criteria, number of years of data and sampling frequency for judging attainment of the NAAQS are discussed in appendix K of part 50 of this chapter.

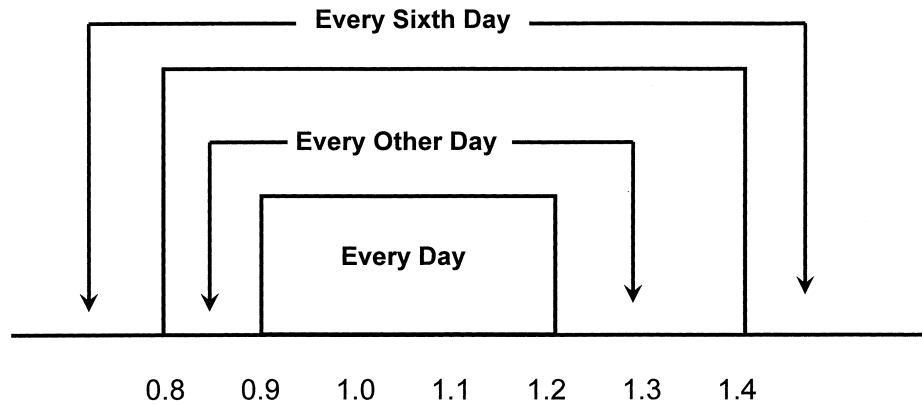


Figure 1 – Ratio to Standard

(f) For manual PM_{10-2.5} samplers:

(1) Manual PM_{10-2.5} samplers at NCore stations must operate on at least a 1-in-3 day schedule at sites without a collocated continuously operating federal equivalent PM_{10-2.5} method that has been designated in accordance with part 53 of this chapter.

(2) Manual PM_{10-2.5} speciation samplers at NCore stations must operate on at least a 1-in-3 day sampling frequency.

[71 FR 61298, Oct. 17, 2006, as amended at 72 FR 32210, June 12, 2007]

§ 58.13 Monitoring network completion.

(a) The network of NCore multi-pollutant sites must be physically established no later than January 1, 2011, and at that time, operating under all of the requirements of this part, including the requirements of appendices A, C, D, E, and G to this part.

(b) Where existing networks are not in conformance with required numbers of monitors specified in this part, additional required monitors must be operated by January 1, 2008.