


Toluene Diisocyanates

CAS No. 26471-62-5

Reasonably anticipated to be a human carcinogen
First Listed in the *Fourth Annual Report on Carcinogens* (1985)

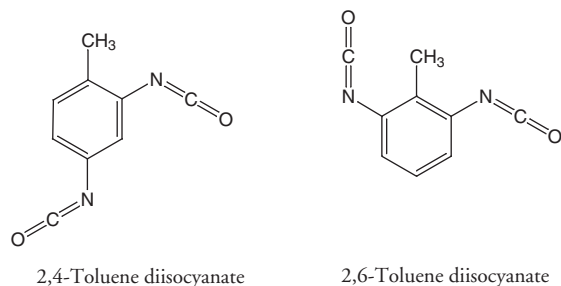

Carcinogenicity

Toluene diisocyanates are *reasonably anticipated to be human carcinogens* based on sufficient evidence of carcinogenicity in experimental animals (NTP 1986, IARC 1986, 1987, 1999). When administered by gavage in corn oil, commercial-grade toluene diisocyanate (analyzed as 85% 2,4-isomer and 15% 2,6-isomer) induced hemangiomas in the spleen and subcutaneous tissues, hepatocellular adenomas, and hemangiosarcomas in the liver, ovaries, and peritoneum in female mice; subcutaneous fibromas and fibrosarcomas and pancreatic acinar cell adenomas in male rats; and neoplastic nodules of the liver, pancreatic acinar cell adenomas, mammary gland fibroadenomas, and subcutaneous fibromas and fibrosarcomas in female rats. No treatment-related lesions were induced in male mice (NTP 1986). When administered by inhalation, no treatment related tumors were observed following exposure of mice or rats to commercial toluene diisocyanate (80% 2,4- and 20% 2,6-isomers) (IARC 1986, 1999).

No adequate evidence from human studies of the relationship between exposure to toluene diisocyanates and human cancer have been reported (IARC 1999).

Properties

Toluene diisocyanates occur as a colorless to pale yellow liquid, solid, or crystal with a sharp, pungent odor. They are sensitive to moisture. They are soluble in diethyl ether, acetone, and other organic solvents, and miscible with diglycol monomethyl ether, carbon tetrachloride, benzene, chlorobenzene, kerosene, and olive oil. Toluene diisocyanates may react violently with water, acids, and alcohols. Contact with bases, such as caustic soda and tertiary amines, may cause uncontrollable polymerization and the rapid evolution of heat. When heated to decomposition, they emit toxic fumes of cyanides and nitrogen oxides. Toluene diisocyanates are generally available as a mixture of 2,4- and 2,6-toluene diisocyanates in ratios of 80%:20% and 65%:35%. Other mixtures are also available commercially. 2,4-Toluene diisocyanate is a clear to pale yellow liquid with a sharp, pungent odor. It has solubilities and reactivities similar to the mixture. It is combustible when exposed to heat or flame and darkens when exposed to sunlight. 2,4-Toluene diisocyanate is available as a >99.5% pure commercial product. 2,6-Toluene diisocyanate also occurs as a reactive liquid. Toluene diisocyanates may degrade to 2,6-diaminotoluene dihydrochloride, 2,6-diaminotoluene, and 2,4-diaminotoluene (see 2,4-Diaminotoluene) (NTP 1986, IARC 1999, HSDB 2000).

Use

Toluene diisocyanates are used primarily in the synthesis of polyurethane foams. This use accounts for approximately 90% of the

total supply of toluene diisocyanates. Flexible polyurethane foam is used mainly in furniture (43%) and bedding (12%); rigid polyurethane foams are used primarily in insulation. Toluene diisocyanate-based rigid polyurethane foam is used in household refrigerators and, in board or laminate form, for residential sheathing or commercial roofing. "Pour-in-place" or "spray-in" rigid foam is used as insulation for truck trailers, railroad freight cars, and cargo containers. Polyurethane-modified alkyds contain approximately 6 to 7% isocyanate, mostly toluene diisocyanates, and are used as floor finishes, wood finishes, and paints. Moisture-curing coatings are used as wood and concrete sealants and floor finishes. Aircraft, truck, and passenger-car coatings are often composed of toluene diisocyanates pre-polymer systems. Castable urethane elastomers are used in applications requiring strength, flexibility, and shock-absorption, and are resistant to oil, solvents, and ultraviolet radiation. They are used in adhesive and sealant compounds and in automobile parts, shoe soles, roller skate wheels, pond liners, and blood bags. They are also used in oil fields and mines. Certain elastomer products are produced from the pure 2,4-isomer rather than the 80:20 mixture (IARC 1986, 1999, WHO 1987, HSDB 2000).

Production

Toluene diisocyanates have been produced commercially since the late 1930s (IARC 1986). Chem Sources (2001) identified 2, 8, and 18 U.S. suppliers of toluene diisocyanates, 2,6-toluene diisocyanate, and 2,4-toluene diisocyanate, respectively. Five U.S. manufacturers are listed in the HSDB (2000). U.S. production of an 80:20 mixture of 2,4- and 2,6-toluene diisocyanate increased from 616 million lb in 1985 to 665 million lb in 1986 (USITC 1986, 1987). This production increased to an estimated 742 million lb in 1988, but showed a slight decline in 1989 to 731 million lb (USITC 1989, 1990). By 1993, the production capacity for toluene diisocyanates in North America was estimated at more than one billion lb (IARC 1999). U.S. production in 1994 and 1995 was approximately 876 million lb and 869 million lb, respectively (USITC 1996).

The United States imported 29 million lb of the compound (including mixtures) and exported 9 million lb in 1985 (USDOC 1986). Imports declined to approximately 53,000 lb (mixtures) and 102,000 lb (unmixed) while exports rose to more than 478 million lb (mixed) and 25 million lb (unmixed) in 2000 (ITA 2001).

Exposure

The primary routes of potential human exposure to toluene diisocyanates are inhalation and dermal contact. Because of the high volatility of toluene diisocyanates, exposure can occur in all phases of its manufacture and use. According to a national occupational survey conducted from 1981 to 1983, approximately 40,000 workers are potentially exposed to toluene diisocyanates (CHIP 1984, IARC 1999). The occurrence of toluene diisocyanates in the work environment, primarily in air, has been associated with its commercial production; its handling and processing prior to urethane foam production; its release in stack exhaust from plants; and its release into the air from sprays, insulation materials, polyurethane foam, and coated fabrics. Analysis of the isomeric composition of atmospheric toluene diisocyanates in a plant producing polyurethane foam demonstrated a large increase in the level of the 2,6-isomer relative to that of the 2,4-isomer, particularly at the finishing end of the production process. Median air concentrations of 2,4-toluene diisocyanate were 5.0 and 2.3 $\mu\text{g}/\text{m}^3$ for the initial mixing and finishing ends of the process, respectively. The respective median values for the 2,6-isomer were 6.4 and 7.8 $\mu\text{g}/\text{m}^3$, with a maximum value greater than 450 $\mu\text{g}/\text{m}^3$ at the finishing end. These findings were attributed to enhanced emission of the less chemically active 2,6-

isomer from the cured foam bats and retention of the 2,4-isomer as a polymer (IARC 1986).

Workers having potential occupational exposure to diisocyanates include adhesive workers, insulation workers, diisocyanate resin workers, lacquer workers, organic chemical synthesizers, paint sprayers, polyurethane makers, rubber workers, ship builders, textile processors, and wire coating workers (CHIP 1984). Aniline and the 2,4- and 2,6-isomers of toluene diisocyanate were detected under controlled experimental conditions in the thermodegradation fumes of polyurethane varnish used in the insulation of copper wire. Consistent with these findings, the compounds were also detected in the workplace atmosphere during the industrial production of polyurethane-coated wire (IARC 1986, 1999).

Exposure to unreacted toluene diisocyanates is associated with the spray application of polyurethane foam. The construction industry uses polyurethane formulations in thermal insulation, adhesives, lacquers, and paints. In most cases, the foam is applied through air spraying in confined spaces. In the United States, a typical modern housing unit of 1,800 ft² floor space, including furniture, carpet underlay, and bedding, contains 306 lb of flexible polyurethane foam. The transportation industry utilizes approximately 21% of flexible polyurethane foams with automobile seating and padding, resulting in the use of 24 to 31 lb polyurethane per automobile (IARC 1986).

Worker exposure to toluene diisocyanates is most likely to occur during sample collection, residue removal, spill clean-up, and equipment maintenance. Employees are required to use air-line respirators during these operations. The highest exposure levels have occurred during the spray application of polyurethane foam, a procedure which is usually conducted in confined spaces; exposure to concentrations above safe limits are a particular concern for the sprayers and their helpers. Studies summarized by the IARC (1986, 1999) indicate that toluene diisocyanates exposure levels of <1 to >1,000 µg/m³ have been found in the workplace, as compared with the current OSHA standard of 0.02 ppm (~140 µg/m³).

It appears that several household products that are commercially available to consumers may pose a risk of exposure to toluene diisocyanates if used indiscriminately. Consumers may also be exposed to toluene diisocyanates volatilized from polyurethane varnishes during the application of such coatings (CHIP 1984). FDA has determined that levels of toluene diisocyanates in food, food additives, or food packaging are so low that the potential daily intake is virtually nil.

The Toxic Chemical Release Inventory (TRI) listed 183, 61, and 28 industrial facilities that produced, processed, or otherwise used toluene diisocyanates (mixed isomers), 2,4-toluene diisocyanate, or 2,6-toluene diisocyanate, respectively in 1999 (TRI 2001). These facilities reported releases of 74,027 lb, 34,022 lb, and 3,818 lb of toluene diisocyanates (mixed isomers), 2,4-toluene diisocyanate, and 2,6-toluene diisocyanate, respectively.

Regulations

DOT

Toluene diisocyanate is considered a hazardous material and special requirements have been set for marking, labeling, and transporting this material

EPA

Clean Air Act

NSPS: Manufacture of substance is subject to certain provisions for the control of Volatile Organic Compound (VOC) emissions

Prevention of Accidental Release: Threshold Quantity (TQ) = 10,000 lb

Comprehensive Environmental Response, Compensation, and Liability Act

Reportable Quantity (RQ) = 100 lb

Emergency Planning and Community Right-To-Know Act

Toxics Release Inventory: Listed substance subject to reporting requirements

Resource Conservation and Recovery Act

Listed Hazardous Waste: Waste codes in which listing is based wholly or partly on substance - U223, K027

Listed as a Hazardous Constituent of Waste

OSHA

Ceiling Concentration = 0.02 ppm (0.14 mg/m³) (toluene 2,4-diisocyanate)

Guidelines

NIOSH

Immediately Dangerous to Life and Health (IDLH) = 2.5 ppm (toluene-2,4-diisocyanate)

Toluene-2,4-diisocyanate listed as a potential occupational carcinogen

REFERENCES

- ChemSources. 2001. Chemical Sources International, Inc. <http://www.chemsources.com>.
- CHIP. 1984. Chemical Hazard Information Profile. ortho-Toluidine; ortho-Toluidine Hydrochloride. Washington, D.C.: U.S. Environmental Protection Agency, Office of Pesticide Programs and Toxic Substances.
- HSDB. 2000. Hazardous Substances Data Base. National Library of Medicine. <http://toxnet.nlm.nih.gov/cgi-bin/sis/htmlgen?HSDB>.
- IARC. 1986. Some Chemicals Used in Plastics and Elastomers. IARC Monographs on the Evaluation of Carcinogenic Risk of Chemicals to Humans, vol. 39. Lyon, France: International Agency for Research on Cancer. 403 pp.
- IARC. 1987. Overall Evaluations of Carcinogenicity. IARC Monographs on the Evaluation of Carcinogenic Risk of Chemicals to Humans, Supplement 7. Lyon, France: International Agency for Research on Cancer. 440 pp.
- IARC. 1999. Re-evaluation of Some Organic Chemicals, Hydrazine, and Hydrogen Peroxide. IARC Monographs on the Evaluation of Carcinogenic Risk of Chemicals to Humans, vol. 71. Lyon, France: International Agency for Research on Cancer. 1589 pp.
- ITA. 2001. Subheading 292910: Isocyanates. International Trade Administration. U.S. Department of Commerce. <http://www.ita.doc.gov/td/industry/otea/Trade-Detail/>.
- NTP. 1986. Toxicology and Carcinogenesis Studies of Commercial Grade 2,4 (80%)- and 2,6 (20%)-Toluene Diisocyanate (CAS No. 26471-62-5) in F344/N Rats and B6C3F1 Mice (Gavage Studies). Technical Report Series No 251. NIH Publication No. 251. Research Triangle Park, NC and Bethesda, MD: National Toxicology Program. 194 pp.
- TRI99. 2001. Toxic Chemical Release Inventory 1999. Data contained in the Toxic Chemical Release Inventory (TRI). National Library of Medicine. <http://www.epa.gov/triexplorer/>.
- USDOCEExports. 1986. U.S. Exports, Schedule E, Commodity by Country, 1985. Washington, D.C.: U.S. Government Printing Office.
- USITC. 1986. Synthetic Organic Chemicals, United States Production and Sales, 1985. USITC Publication No 1892. Washington, D.C.: U.S. Government Printing Office.
- USITC. 1987. Synthetic Organic Chemicals, United States Production and Sales, 1986. USITC Publication No 2009. Washington, D.C.: U.S. Government Printing Office.
- USITC. 1989. Synthetic Organic Chemicals, United States Production and Sales, 1988. USITC Publication No 2219. Washington, D.C.: U.S. Government Printing Office.
- USITC. 1990. Synthetic Organic Chemicals, United States Production and Sales, 1989. USITC Publication No 2338. Washington, D.C.: U.S. Government Printing Office.
- USITC. 1996. Preliminary Report on U.S. Production of Selected Synthetic Organic Chemicals (Including Synthetic Plastics and Resin Materials) First Quarter, Second Quarter and Cumulative Totals, 1994-1996. S.O.C. Series C/P-96-2. Washington, D.C.: U.S. Government Printing Office.
- WHO. 1987. Toluene Diisocyanate. Environmental Health Criteria 75. Geneva: World Health Organization. 72 pp.