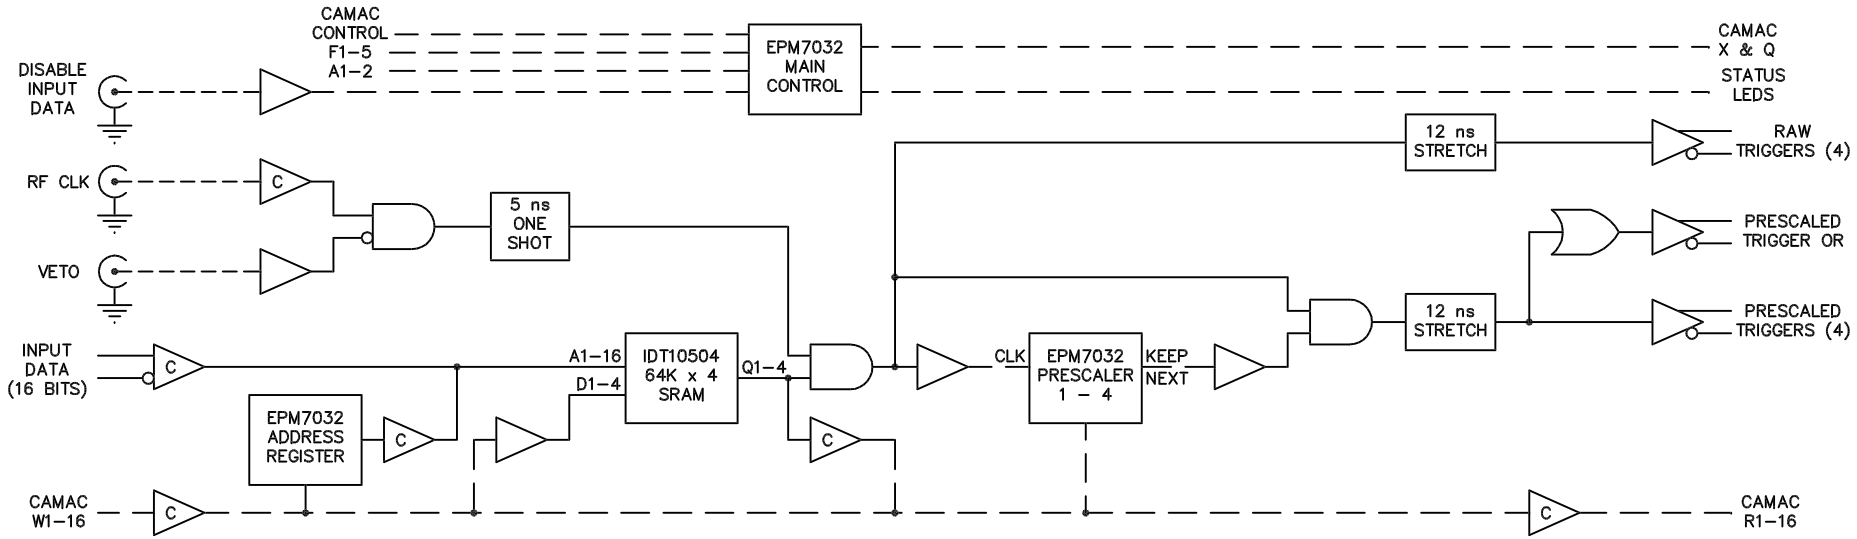
CAMAC
CONTROL
F1–5
A1–2
EPM7032
MAIN
CONTROL
CAMAC
X & Q
STATUS
LEDS
DISABLE
INPUT
DATA
RF CLK
VETO
C
5 ns
ONE
SHOT
12 ns
STRETCH
RAW
TRIGGERS (4)
PRESCALED
TRIGGER OR
PRESCALED
TRIGGERS (4)
INPUT
DATA
(16 BITS)
A1–16
D1–4
IDT10504
64K x 4
SRAM
Q1–4
CLK
EPM7032
PRESCALER
1 – 4
KEEP
NEXT
EPM7032
ADDRESS
REGISTER
CAMAC
W1–16
CAMAC
R1–16