


INITIAL RADIO CONTACT: 12nm on Assigned Air Tactical Frequency.

CLEARANCE IS REQUIRED TO ENTER FTA

NO RADIO CONTACT: Hold a minimum of 7nm from the incident.

NOTE: Airtanker Maneuvering altitude determines minimum Airtanker and ATGS Orbit altitudes. Assigned altitudes may be higher and will be stated as **MSL**.

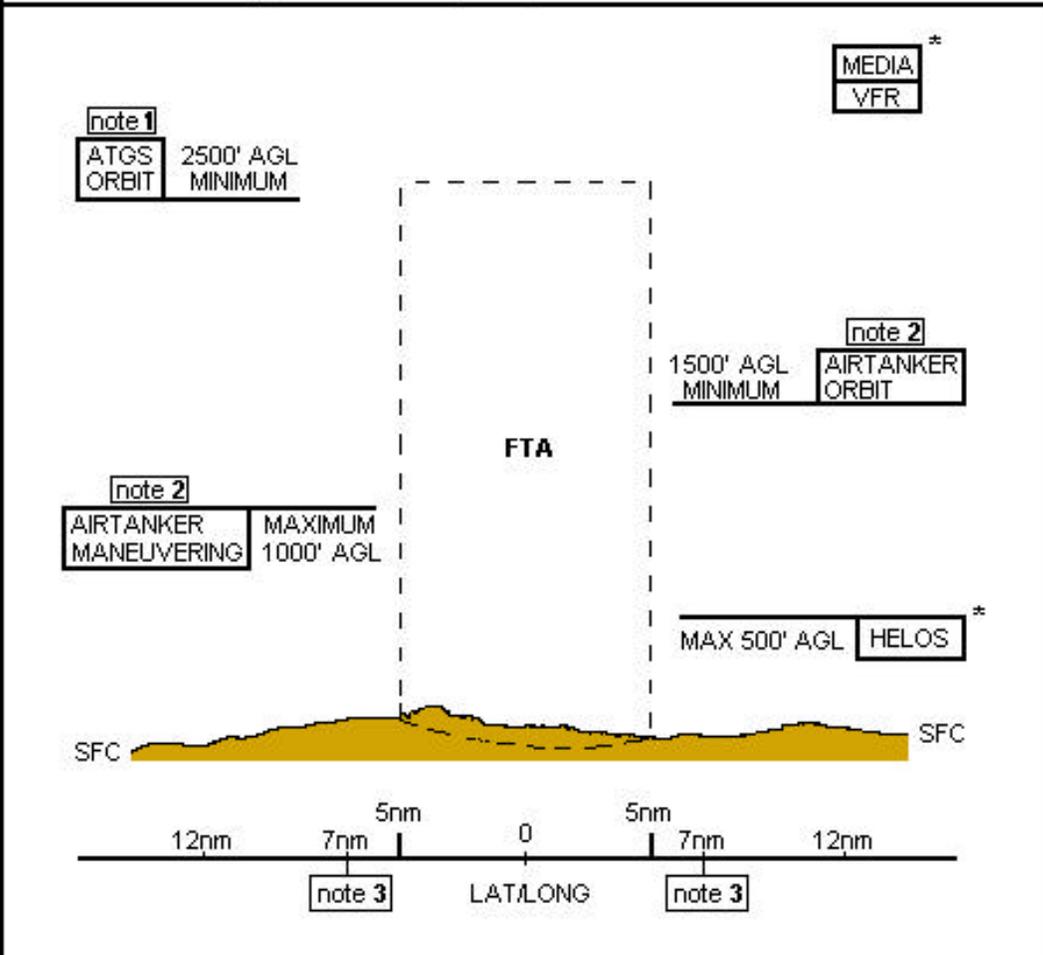

- note 1 1000' min. separation between ATGS orbit and Airtanker orbit altitude.
- note 2 500' min. separation between Airtanker Orbit and Maneuvering altitude.
- note 3 On arrival reduce speed to cross 7nm at assigned altitude and 150 KIAS or less.

* **HELOS** – Fly assigned altitudes and routes.

* **MEDIA** – Maintain VFR separation above highest incident aircraft or position and altitude as assigned by controlling aircraft.

AIR BASE 123.975	AIR GUARD 168.625 TxTone 110.9	AIR to AIR 122.925	NATIONAL FLIGHT FOLLOW 168.650
---------------------	-----------------------------------	-----------------------	-----------------------------------

