

---

# Exposure Processes and Assessment

Dr. Paul R. Schroeder

Dr. Joe Z. Gailani


[Paul.R.Schroeder@usace.army.mil](mailto:Paul.R.Schroeder@usace.army.mil)

[Joe.Z.Gailani@usace.army.mil](mailto:Joe.Z.Gailani@usace.army.mil)



# RISK FRAMEWORK


## RISK ASSESSMENT PARADIGM

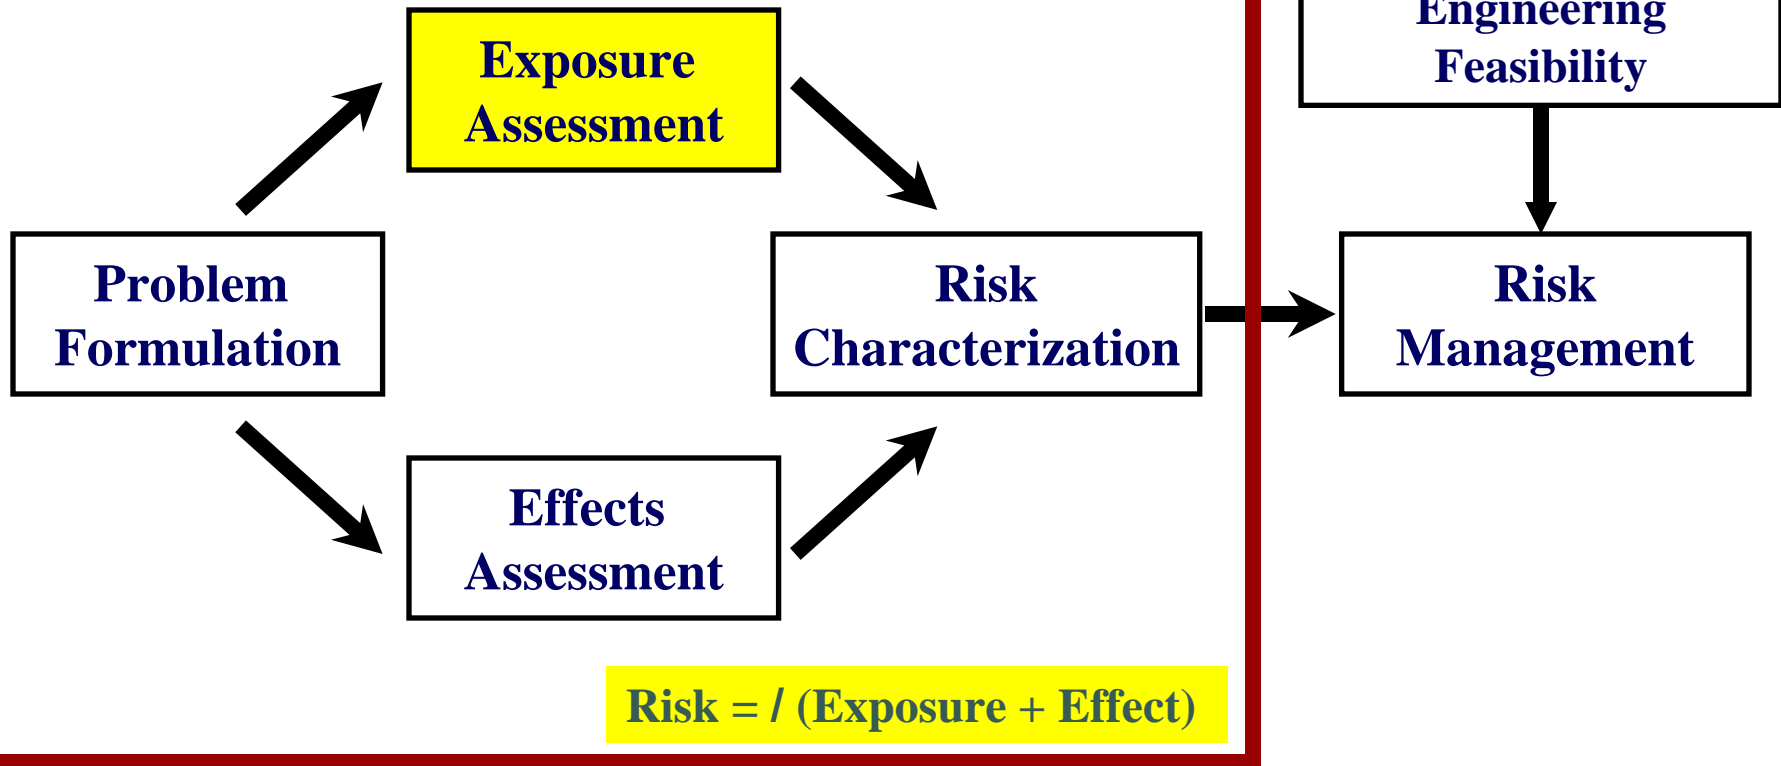

# Exposure

- Exposure is a quantification of the level and duration of a stressor affecting the receptor often expressed as a dose

$$D = \sum_{i=1}^n C_i \Delta t$$

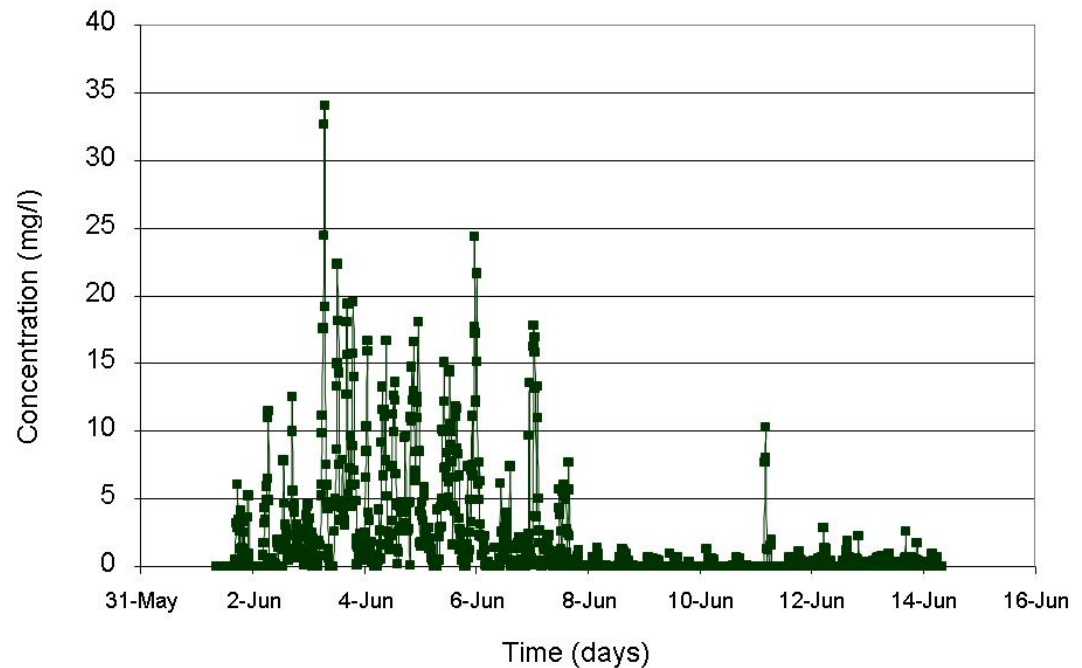


# Topics

---

- **Exposure Pathways and Drivers**
- **Sediment Characterization**
- **Resuspension Source Strength Predictions**
- **Dredging Residuals Generation and Transport**
- **Contaminant Release Predictions**
- **Screening Models**
- **Comprehensive Exposure Modeling**
- **Dose Modeling for Cumulative Exposure**
- **Example Case Study**



# Exposure Pathways

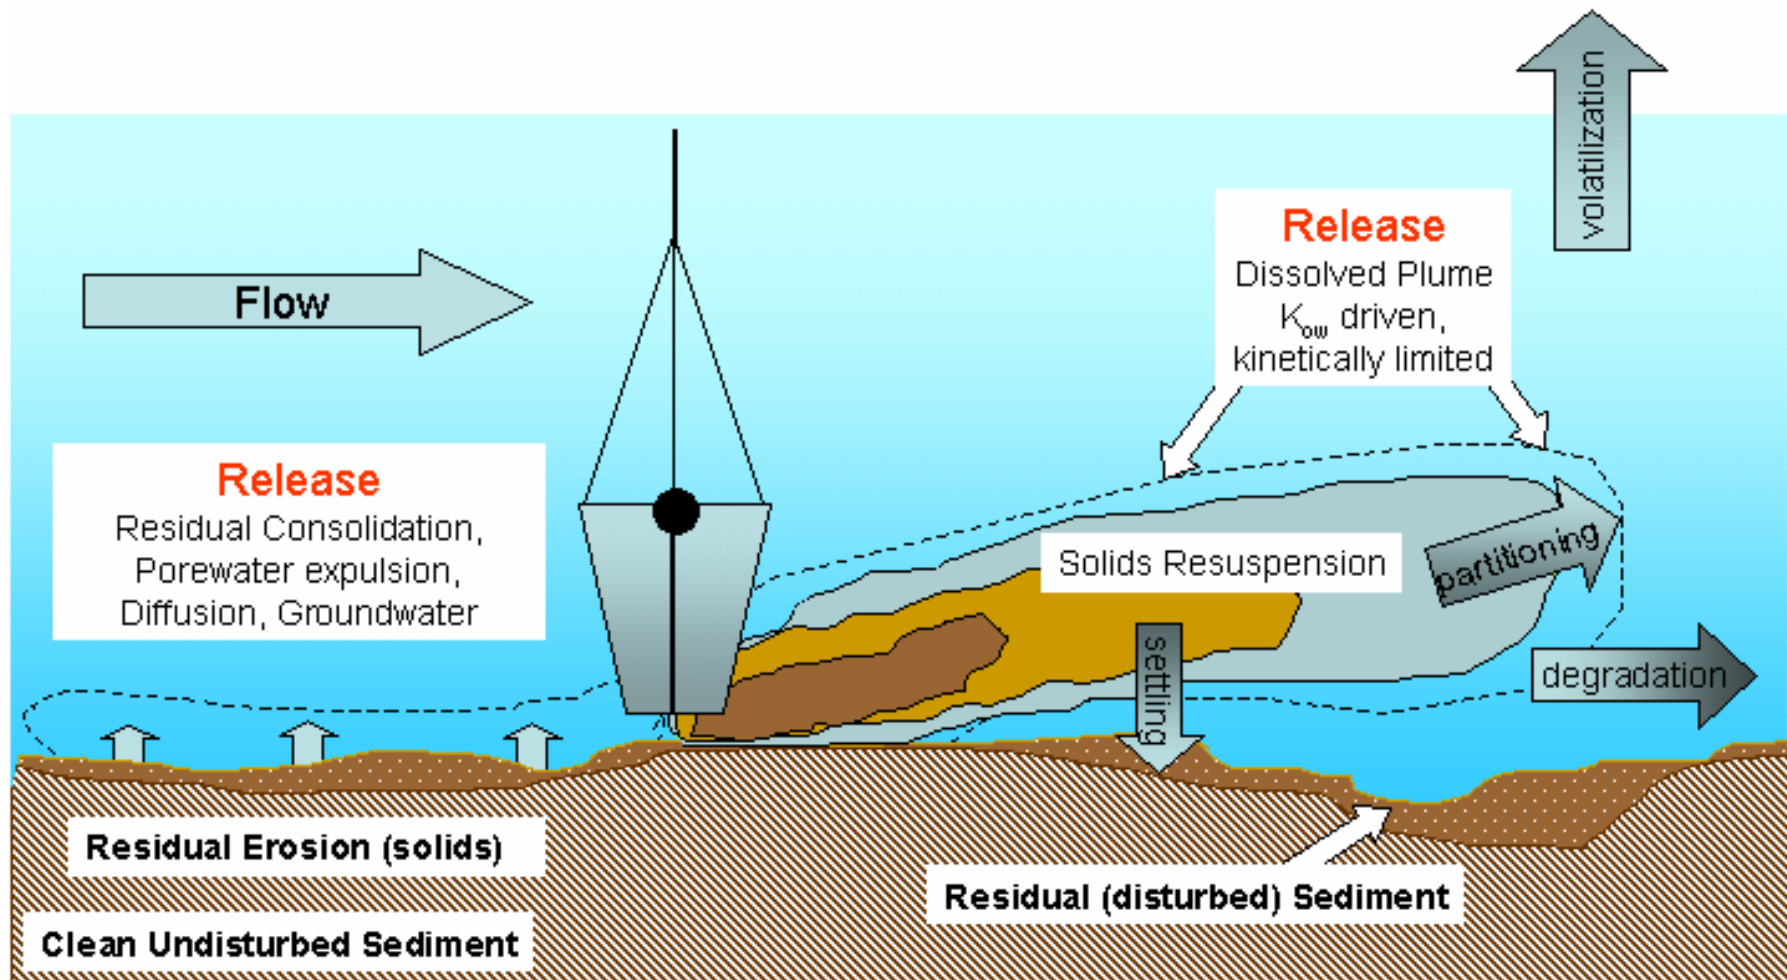

# Other Sources

---





# Exposure Pathways and Risk Drivers


---

- **Sediment Resuspension**
  - Turbidity
  - Suspended solids
  - Contribution to deposition and benthic impacts
- **Transport of Dredged Material Residuals Out of Dredge Prism**
  - Burial
  - Benthic toxicity
  - Bioaccumulation
- **Contaminant Release**
  - Water quality
  - Water column toxicity
  - Bioaccumulation



# Sediment Resuspension

- Sediment resuspension will occur at dredging projects--the extent varies
- Often less than 1% of mass of fine-grained fraction of sediment dredged
- Factors:
  - Sediment properties such as bulk density, particle size distribution, and mineralogy
  - Site conditions: water depth, currents, and waves, presence of hardpan, bedrock, or loose cobbles or boulders
  - Nature and extent of debris and obstructions
  - Operations: production, thickness of dredge cuts, dredging equipment type, methods, operator skill

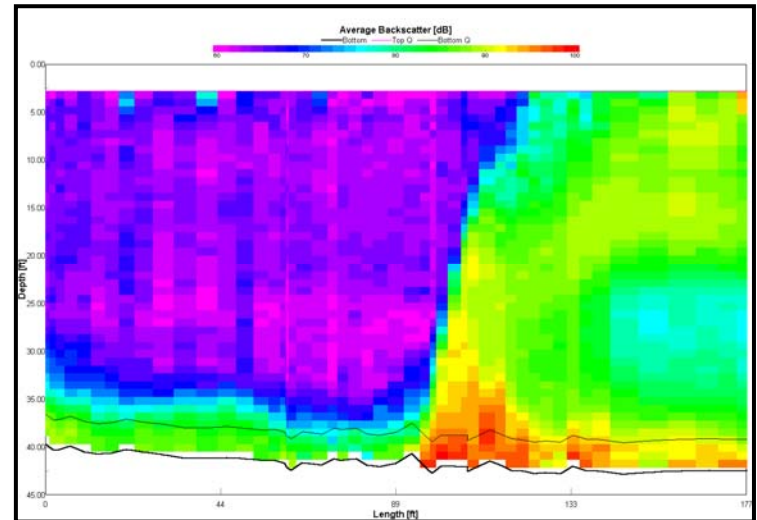



# Sediment Characterization

---

- **Sediment characteristics is the dominant driver for resuspension and residuals transport**
- **Sediment parameters for predicting sediment loss by resuspension and erosion (Source Strength) and transport:**
  - Water content ( $w$ )
  - Atterberg limits --  $LL$ ,  $PL$  and  $PI$       $PI = LL - PL$
  - Liquidity index ( $LI$ ) --  $LI = (w - PL) / PI$
  - Grain size distribution
  - Settling velocity
  - Erodibility coefficients
- **Contaminant Release**
  - Dredging Elutriate Test (DRET)
  - Partitioning and Mass Transfer Coefficients

## Atterberg Limits

$LL$  = Liquid Limit

$PL$  = Plastic Limit

$PI$  = Plasticity Index



# Resuspension Source Predictions

---


- **Hayes characteristic resuspension approach**
  - Process-based
  - Sediment dependence correlated to liquidity index and grain size
  - Equipment specific processes and characteristic losses
  - Equipment factors: size and controls
  - Site factors: debris, heterogeneity, water depth and current
  - Operations: speed, cut, relative production rate
  - Makes adjustments to characteristic loss rates by process based on empirical and theoretical evidence
- **Empirical**
  - Equipment, Operations and Controls
  - Sediment type
  - Limited data sources and limited conditions for selection



# Mechanical Dredge Operation

---

- **Release processes**
  - Bottom wake
  - Expulsion during closing
  - Stripping during raising
  - Draining during slewing
  - Washing during descent
  - Lost loads from debris
- **Operator controls**
  - Cycle time
  - Depth of cut
  - Debris removal

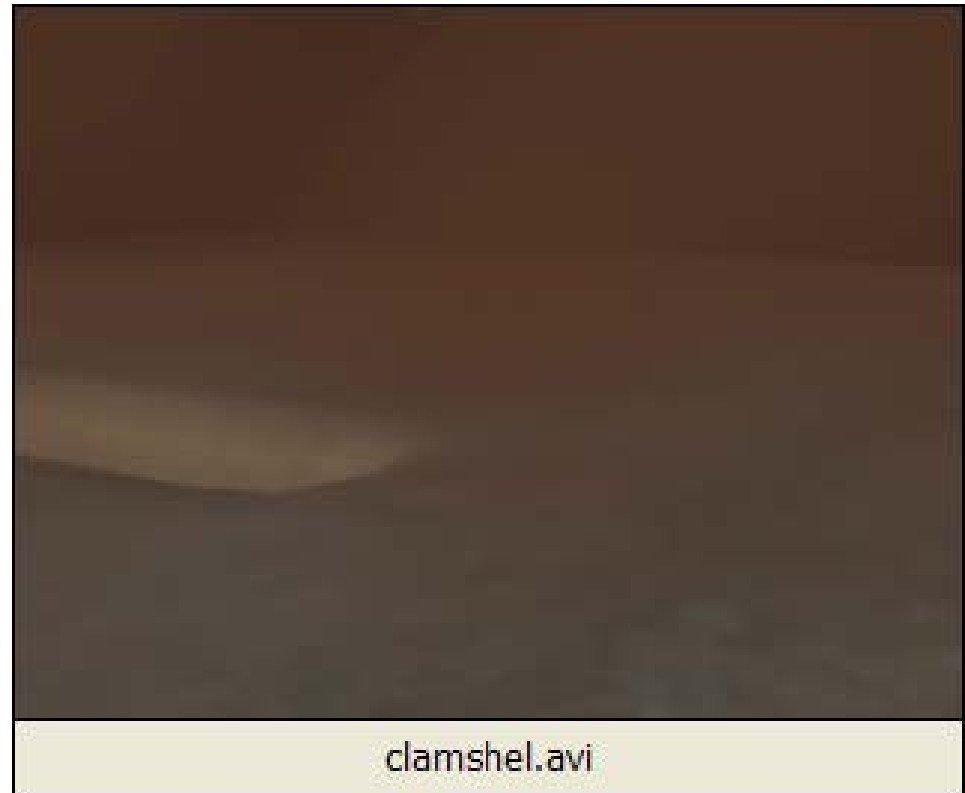

# Example of Hayes Approach

- **Empty Bucket Descent**

- $r_1' = f_{aa} f_{dv} f_{dd} f_{sed} r_1$

- **Bucket Impact and Closure**

- $r_2' = f_{bv} f_{ec} f_{sed} r_2$

- **Full Bucket Ascent**

- $f_{ta} \leq 1 \quad r_3' = [(f_{la} w_{la} + f_{bw} w_{bw} + f_{ea} w_{eb}) f_{ta} + f_{sw} w_{sw}] f_{sed} r_3$

- for  $f_{ta} > 1 \quad r_3' = [(f_{la} w_{la} + f_{ea} w_{eb}) f_{ta} + f_{bw} w_{bw} + f_{sw} w_{sw}] f_{sed} r_3$

- **Full Bucket Slewing**

- $r_4' = f_{so} f_{sed} r_4$

- **Where:  $r_1 = 0.01 \quad r_2 = 0.09 \quad r_3 = 0.15 \quad r_4 = 0.25$**

- **Sediment characteristics affect each process**

D. F. Hayes, T. D. Borrowman, and P. R. Schroeder (2007). Process-Based Estimation of Sediment Resuspension Losses During Bucket Dredging. WODCON XVIII, Orlando, FL



# Other Contributors

---

- **Barge Overflow**

For  $V_{ds} \leq V_{hb}$   $R_{OF} = 0$

For  $V_{ds} > V_{hb}$   $R_{OF} = 100 \left( \frac{\gamma_{OF}}{\gamma_{sed}} \right) \left[ \frac{(bV_{ds} - V_{hb})}{V_{ds}} \right]$

- **Debris**

$$R_{debris} = \frac{5 f_{sed} N_{debris}}{100}$$

- **No predictive measures proposed for bottom sweeping, movement, anchoring, etc.**



# Hydraulic Dredge Operation

- **Factors affecting release rate:**

- Pump rate
- Cutterhead speed
- Swing speed
- Depth of cut
- Direction of cut
- Debris
- Banks / slopes





# Empirical Solids Releases

---

- **Equipment**

- Mechanical dredges

- Open or watertight
- Environmental

**Losses of fine-grained mass of dredged sediment to water column**

➔ 0.2 to 9%, typically 0.5 to 2%

➔ 0.1 to 5%, typically 0.3 to 1%

- Hydraulic dredges

➔ 0.01 to 4%, typically 0.2 to 0.8%

- **Production versus turbidity control**

- Operator feedback

- **Erosion**

- Weakening of sediment structure
- Entrainment of water in residuals



# Residuals Source Predictions

---

- **Empirical**
  - Mass Available: 2 to 9% of sediment mass in last cut
- **Sediment Properties**
  - Erosion characteristics
  - Settling rates
- **Site Properties – bottom shear stress**
- **Dredging Work Plan**
  - Equipment
  - Operations
  - Sequence
- **Control Measures**



# Near-Field Models

---

- **Two primary purposes**
  - Evaluate source strength
  - Evaluate acute impacts in vicinity of dredge-head during operations
- **Spatial scale is restricted to ~10 m from dredge-head**
- **Examples of available models**
  - DREDGE (USACE)
  - TASS (Wallingford)



# Far-Field Models

---

- **Primary purpose**
  - Evaluate impacts during operational and post-dredge periods
- **Spatial scale ranges from ~10 m to > 1,000 m from dredge-head**
- **Examples of available models**
  - Plume models (screening)
    - DREDGE (USACE)
  - Particle tracking models
    - PTM (USACE)
  - Comprehensive models
    - Coupled hydrodynamic-sediment transport models

# Dissolved Contaminant Releases

---

- **Entrainment of porewater**
  - 0.5 to 10% of porewater in dredged sediment lost to water column
- **Dispersion of particulate and dissolution/partitioning of particulate-associated contaminants**
  - Function of variable contaminant properties, availability and kinetics
- **Advection and diffusion from residuals and face of dredge cut**



# ADDAMS Screening Models

---


- Mixing Models for Short-term, Near-/Mid-Field Water Quality and Toxicity Evaluations
  - DREDGE - continuous resuspension
  - CDFATE / CORMIX - continuous discharge/overflow
  - STFATE - discrete discharges
- 1-D Models for Releases from Residuals and Sediment
  - RECOVERY
  - CAP





# DREDGE

Prediction of Sediment Resuspension and Contaminant Release by Dredging

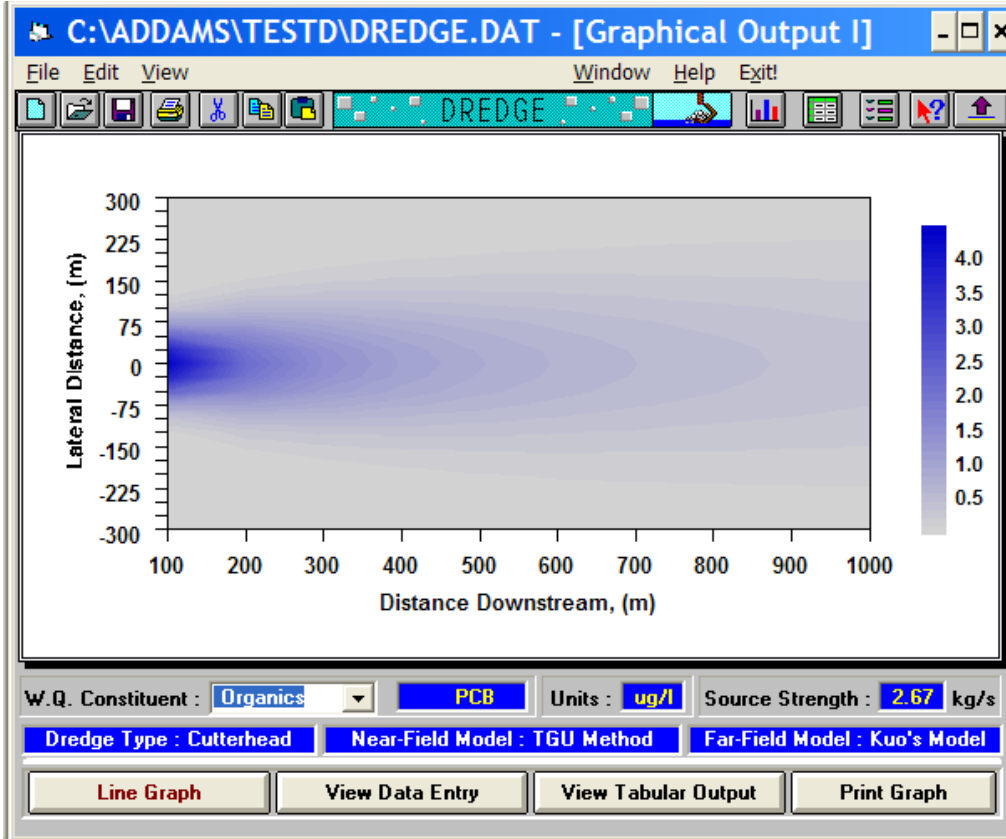

# DREDGE INPUTS

C:\ADDAMS\TESTD\DREDGE.DAT - [Input Data Entry]

File Edit View Window Help Exit!

DREDGE

**Select Dredge**

Hydraulic Dredge  Mechanical Dredge

Open Clamshell

**Contaminant Modeling**

TSS

**Near Field Model**

**Estimated Source Strength**

	kg/s	% Loss
<input checked="" type="radio"/> TGU Method <input type="button" value="→"/>	1.89	.71
<input type="radio"/> Correlation <input type="button" value="→"/>	1.84	.69
<input type="radio"/> User Estimate <input type="button" value="→"/>		

**Far Field Model Selection**

Kuo's Model

TABS Model

**Site Characteristics**

Marine Environment

Freshwater Environment

**Dredged Material Transport Method**

Pipeline

Hopper with Overflow

Hopper without Overflow

Estimated contribution to near-field sediment resuspension



# CDFATE

---



Computation of  
Mixing Zone Size  
or Dilution for  
Continuous  
Discharges or  
Overflows



# CDFATE INPUTS

**CDFATE - C:\ADDAMS\CDFATE\EXAMPLE-HOPPERWEIROVERFL...**

File Edit Run View Help

Discharge Description  
Example - Hopper Dredge: Weir Overflow

Discharge Case

Hopper Dredge: Single Port Discharge  
 Hopper Dredge: Weir Overflow  
 Pipeline Slurry Discharge

CDF Discharge From Side Stream Channel  
 CDF Discharge From Partially Full Pipe  
 CDF Dike Leakage

Receiving Water Data

Receiving Water Depth: 10.0 m  
 Is the Receiving Stream Narrow?  
Receiving Water Width: N/A  
Channel Type: Unbounded

Bottom Roughness: .015  
Receiving Water Velocity: 0.50 m/s  
Wind Speed Conditions: Medium

Receiving Water Density: 999.00 kg/m<sup>3</sup>

Effluent Density and Modeling Parameters

Effluent Density: 1100.00 kg/m<sup>3</sup>  
Plume Modeling Distance: 5000.0 m  
Number of Reporting Periods: 50

Mixing Zone Data

Pollutant: Lead  
Simulated Pollutant Concentration: 25.00  
Criterion Maximum Concentration: 5.00  
Criterion Continuous Concentration: 2.00

Run Simulation View Output View Graphics Help  
Save Data File Data Wizard Error Check Exit





# Estimating Exposure Using PTM

## MOTIVATION:

- Dredged material mgmt and optimization requires long-term, far-field fate predictions for
  - Beneficial Use
  - Resource Management
  - Regulatory Compliance
- Field data collection not possible for these low concentration conditions
- Need to extrapolate sources to areas where no data exist



# Estimating Exposure Using PTM

---

## SOLUTION


- Lagrangian Particle Tracker for modeling transport only from specified sources
- Numerically efficient method for quantifying time-varying concentration, deposition, dose, and exposure
- Efficient modeling of multiple scenarios to quantify potential exposure pathways






# Estimating Exposure Using PTM

- PTM is a Lagrangian model specifically designed to monitor dredge sources.
- Efficient simulation of multiple scenarios, sources and constituents
- User-defined or model generated source strengths for sediments and constituents
- Isolate and monitor fate of designated sources for exposure estimates
- Physical/chemical properties and processes incorporated into PTM
- Multiple classes of particles to represent different constituents

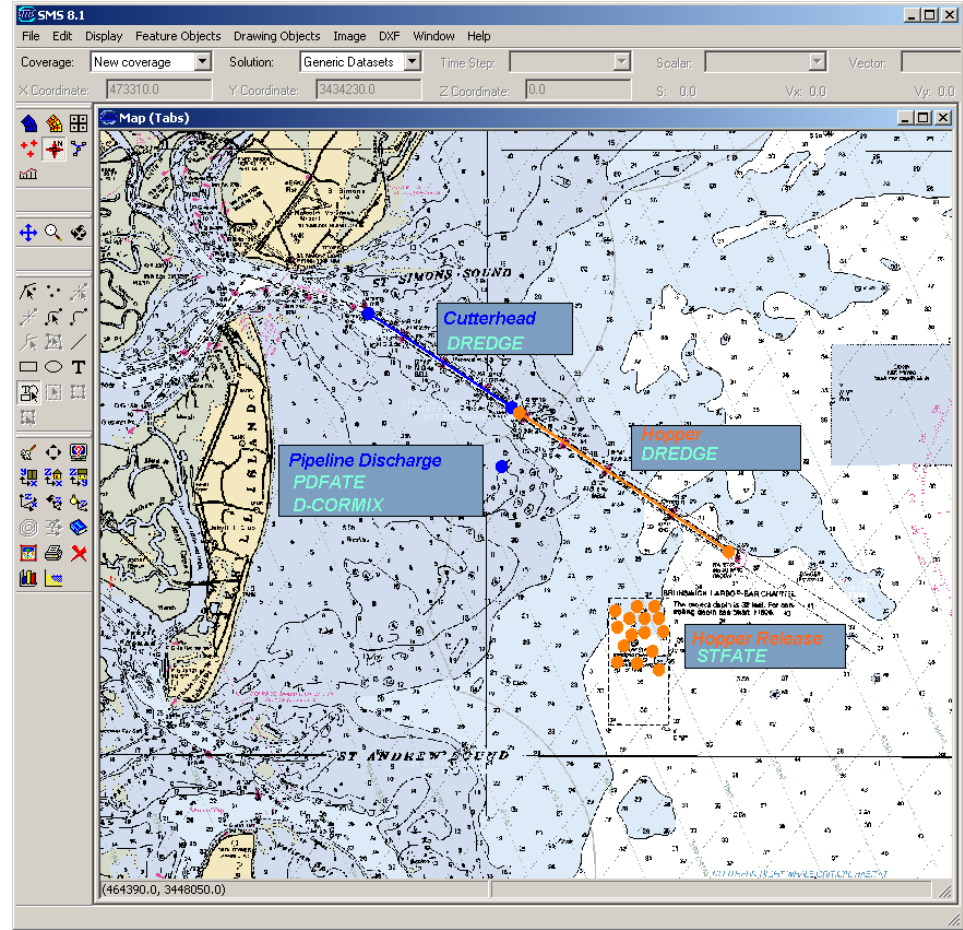

# PTM Source Description

- User defines sources generated from:
  - Dredge source models
  - FATE models
  - Known release rates
- Sources from:
  - Dredging operations
  - Placement operations
  - ODMDS erosion
  - Overflow
- Source strengths vary temporally and spatially (incl. vertically)
- Each particle represents a defined mass of constituent and includes constituent behavior

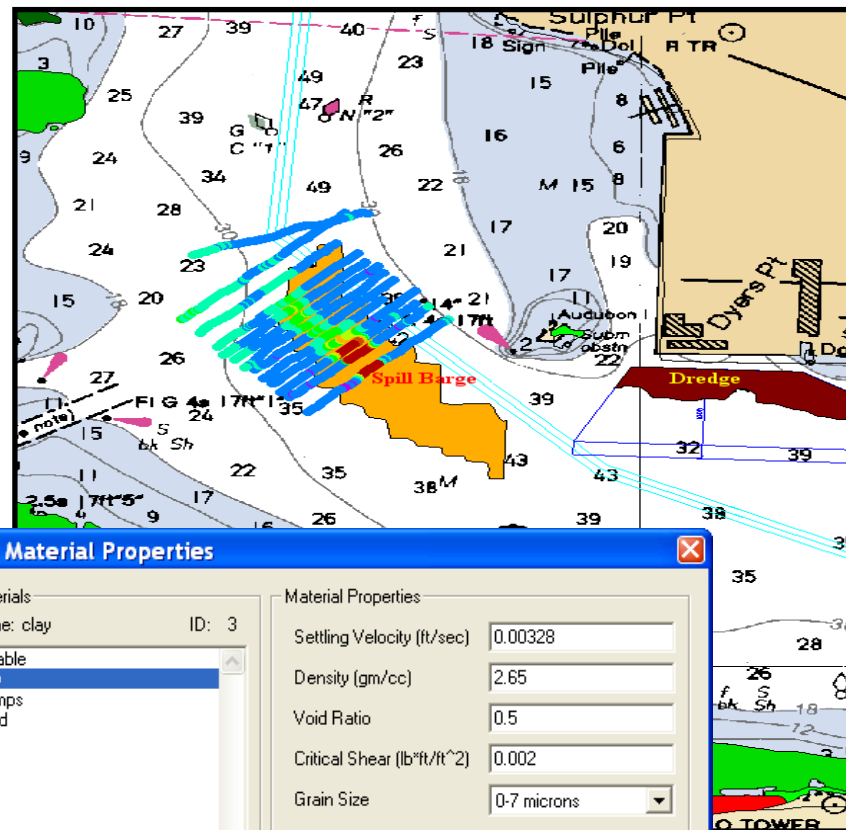

**FATE Material Properties**


Materials	Material Properties
Name: clay ID: 3	Settling Velocity (ft/sec) 0.00328
Disable	Density (gm/cc) 2.65
clay	Void Ratio 0.5
clumps	Critical Shear (lb <sup>2</sup> /ft <sup>2</sup> ) 0.002
sand	Grain Size 0.7 microns
	<input type="checkbox"/> Use in Mixing
	<input checked="" type="checkbox"/> Stripped during descent
General Material Properties...	

Help... OK Cancel





# PTM Hydro/Waves

- PTM hydro input directly from large-domain model
- Wave input (optional) from wave transformation model
- Hydro and wave forcings drive particles
- Hydro and wave models are mature, demonstrated
- Generally, field data insufficient to define hydro for complex domain
- Exposure is dependent on accurate predictions of wave and hydrodynamics

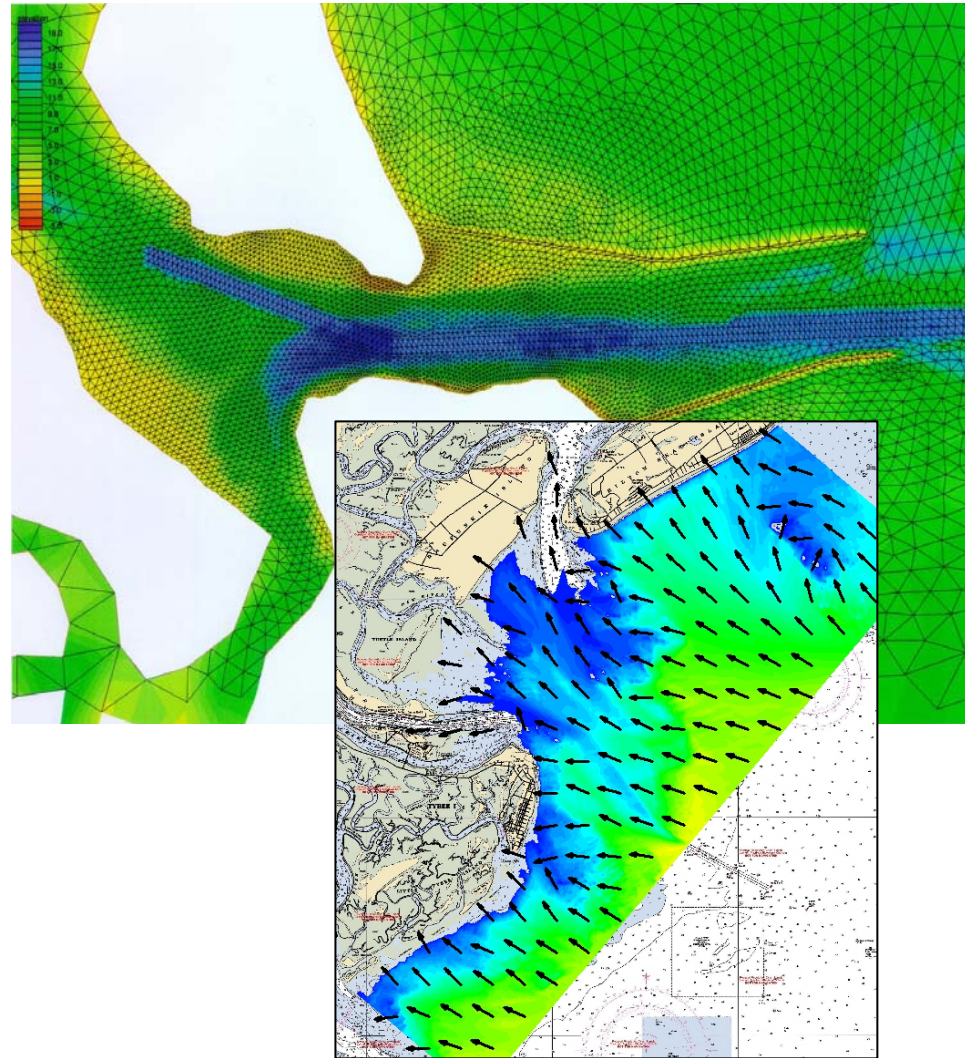

# PTM Sediment Processes


- **Particles Include complex, physics-based description for first order processes influencing transport of the sediments they represent**
  - Settling
  - Aggregation/flocculation
  - Resuspension
  - BBL Dynamics
- **Processes are time-varying**
- **Accounts for particle interactions with native bed (mixing and burial)**
- **Native bed properties are spatially variable**

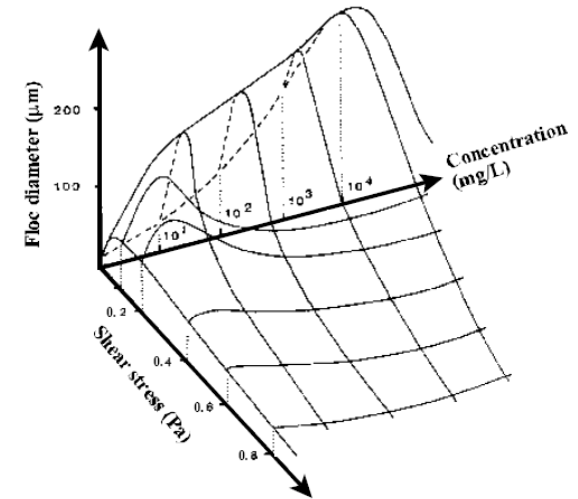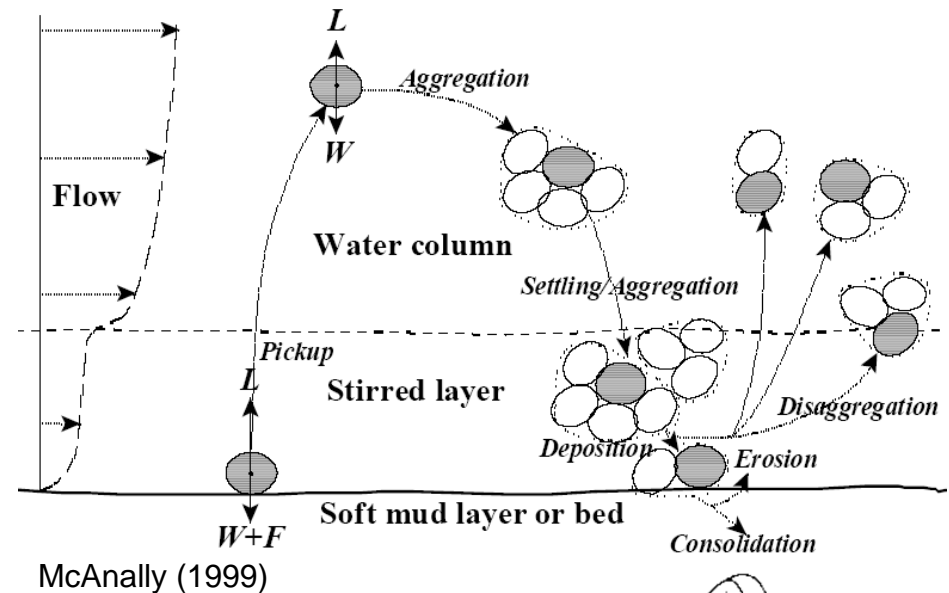




# PTM Constituent Processes

- **Particles can simulate ammonia, DO, contaminant, or other non-conservative substance**
- **Process descriptions include**
  - Non-equilibrium partitioning
  - Volatilization
  - Chemical Reactions
  - Settling/Buoyancy
- **Address contaminant, WQ, and species issues associated with dredging**
- **Modular code permits modification for inclusion of additional processes**

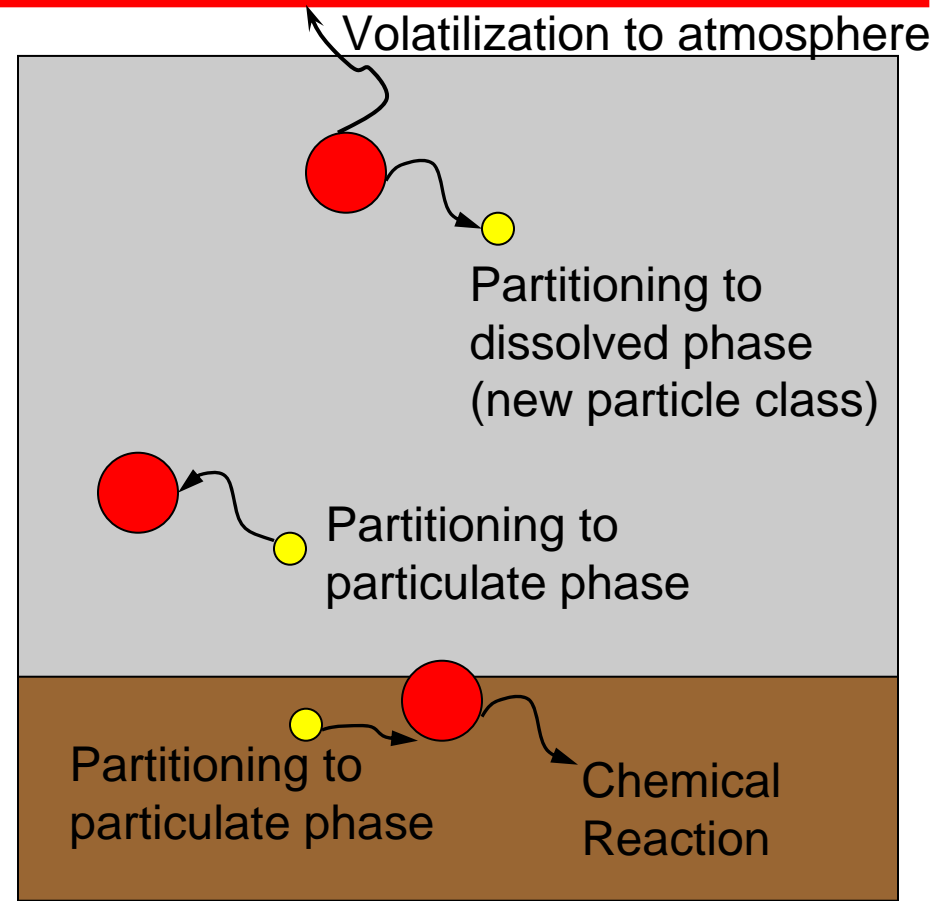

# PTM Concentration Predictions

- Time Series at point
- Average over user-specified domain (point or area)
- Snapshot over entire domain
- Analysis for user-specified combination of constituents
- Vertically varying concentration analysis
- Extract data for further analysis
- Generally used in exposure analysis and resource protection

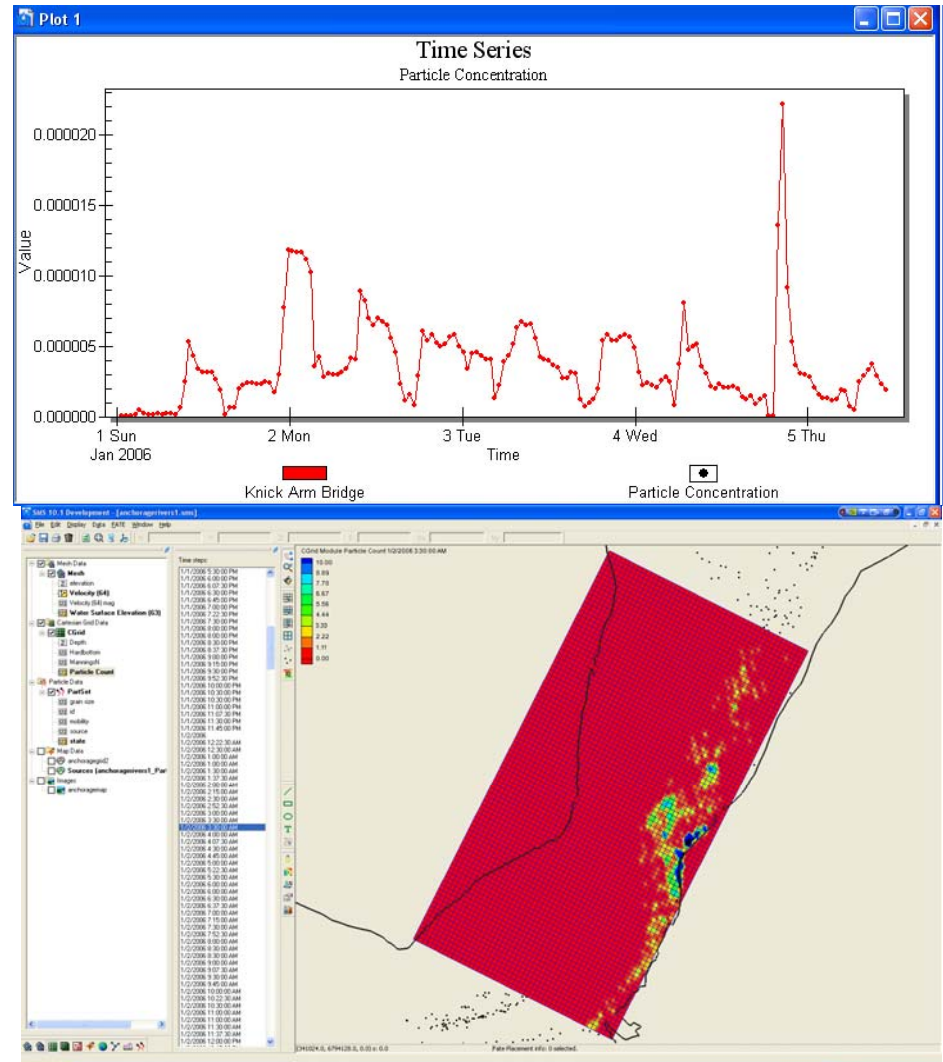







# PTM Deposition/Sedimentation

- Temporally varying fate (deposition) of dredged material is critical to many exposure estimates
- Deposition and re-entrainment are highly dependent on native bed dynamics
- PTM does not account for transport of native sediments
- PTM deposits particles and includes interactions with native bed active layer
  - Probability of Deposition
  - Mixing
  - Burial
  - Re-entrainment

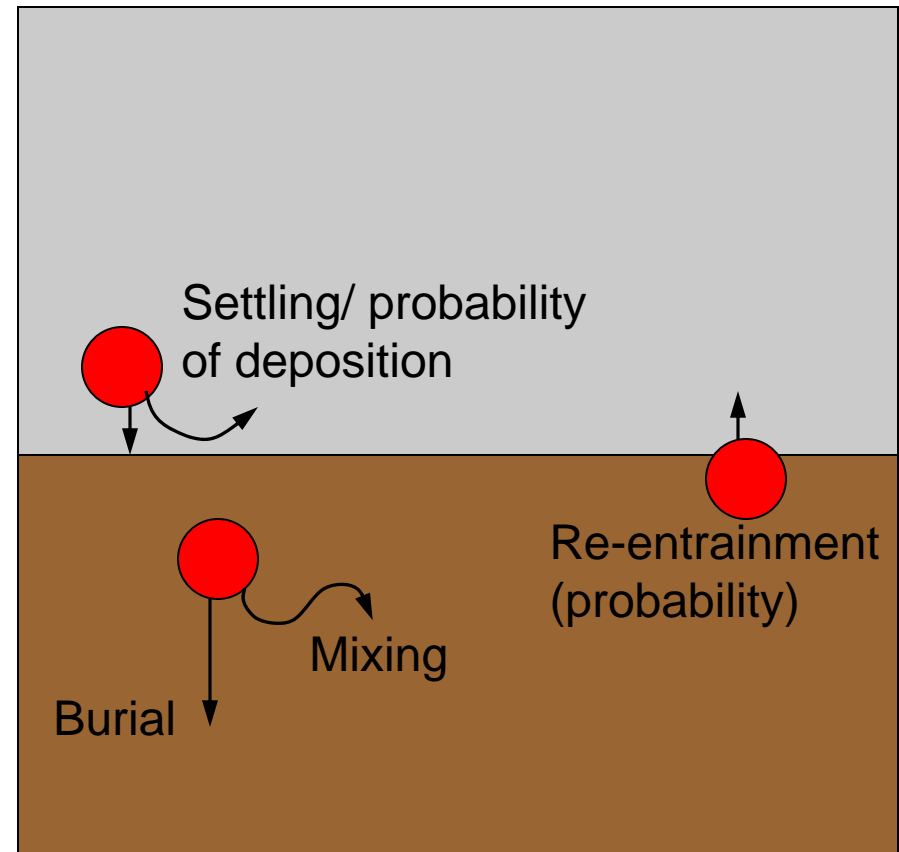

# Estimating Exposure

- Effects of sediment or constituent on organisms is both concentration and time dependent.
- Exposure estimates, coupled with effects are used directly in Risk Characterization

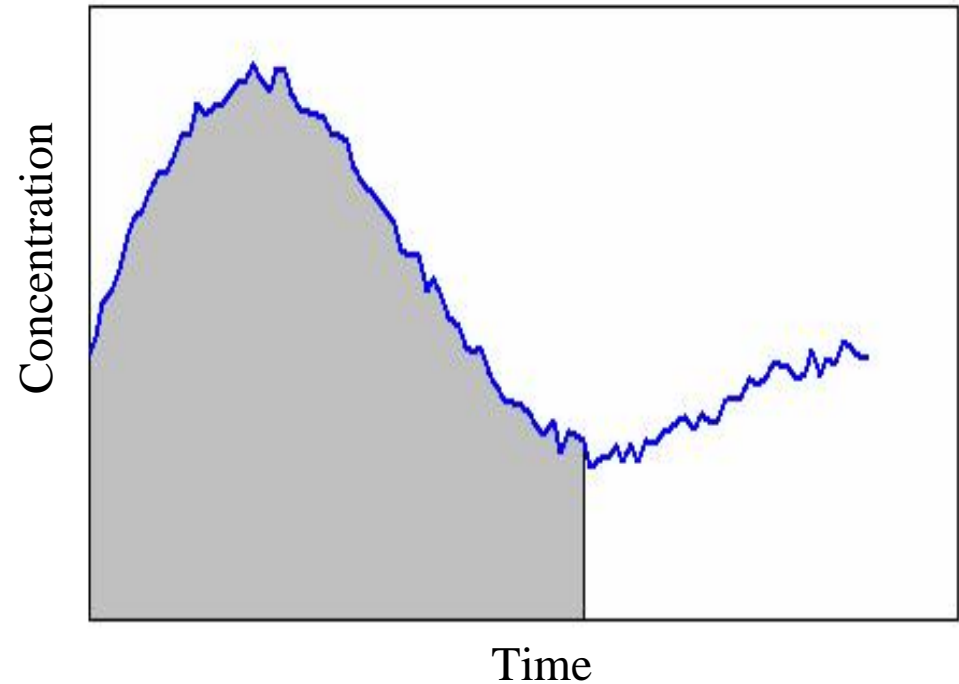

$$D = \int_t^{t+\Delta t} C dt$$



# Estimating Exposure in PTM


- **Virtual Gages**
- **Present (fixed space)**
  - point
  - volume
- **Future (moving)**
  - drifting with flow
    - passive larvae
  - moving with behaviors
    - fish
    - motile larvae






# Hypothetical Example: Exposure

- Ebb Shoal Environment
- Three resources of concern for exposure
  - Coral Reef
  - Fish
  - SAV
- 3-Day Hopper Dredging (overflow and no-overflow)
- 6-Day PTM Simulation to allow for post-dredging transport and deposition
- Assess exposure due to deposition, suspended solids
- Compare various scenarios (dredging rate, method, etc)

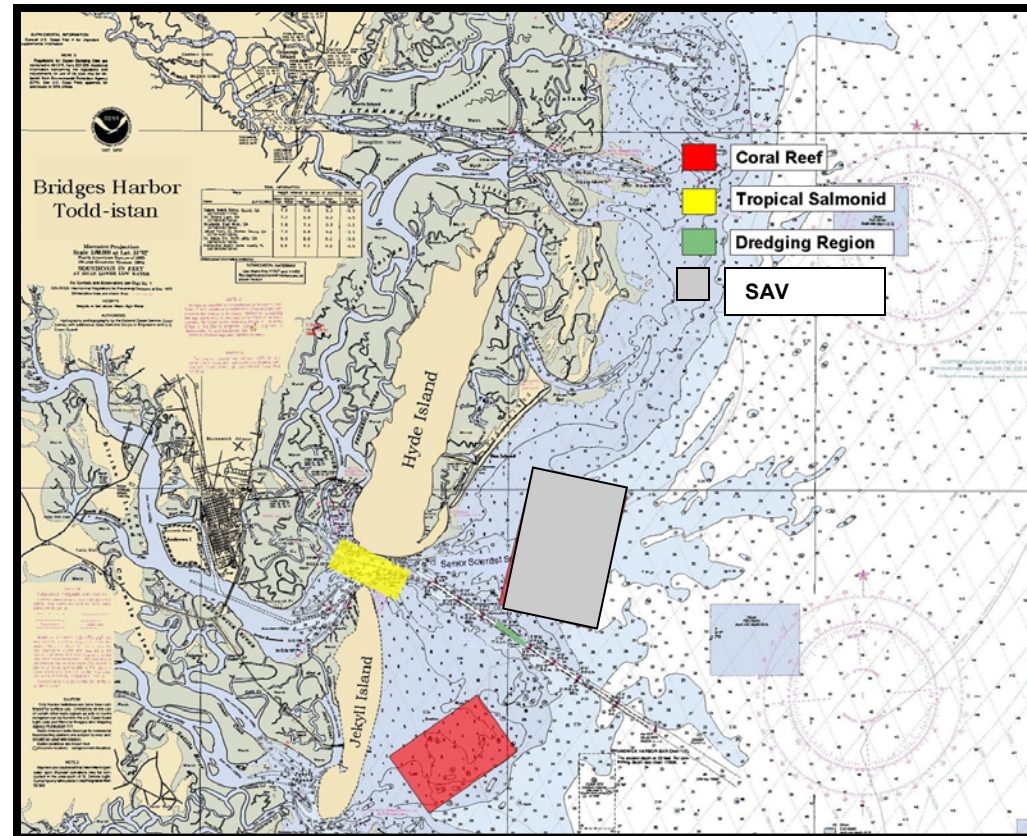

# Hypothetical Example: Exposure


Understanding time-varying concentration and wave conditions over complex regions requires validated wave and hydrodynamic models

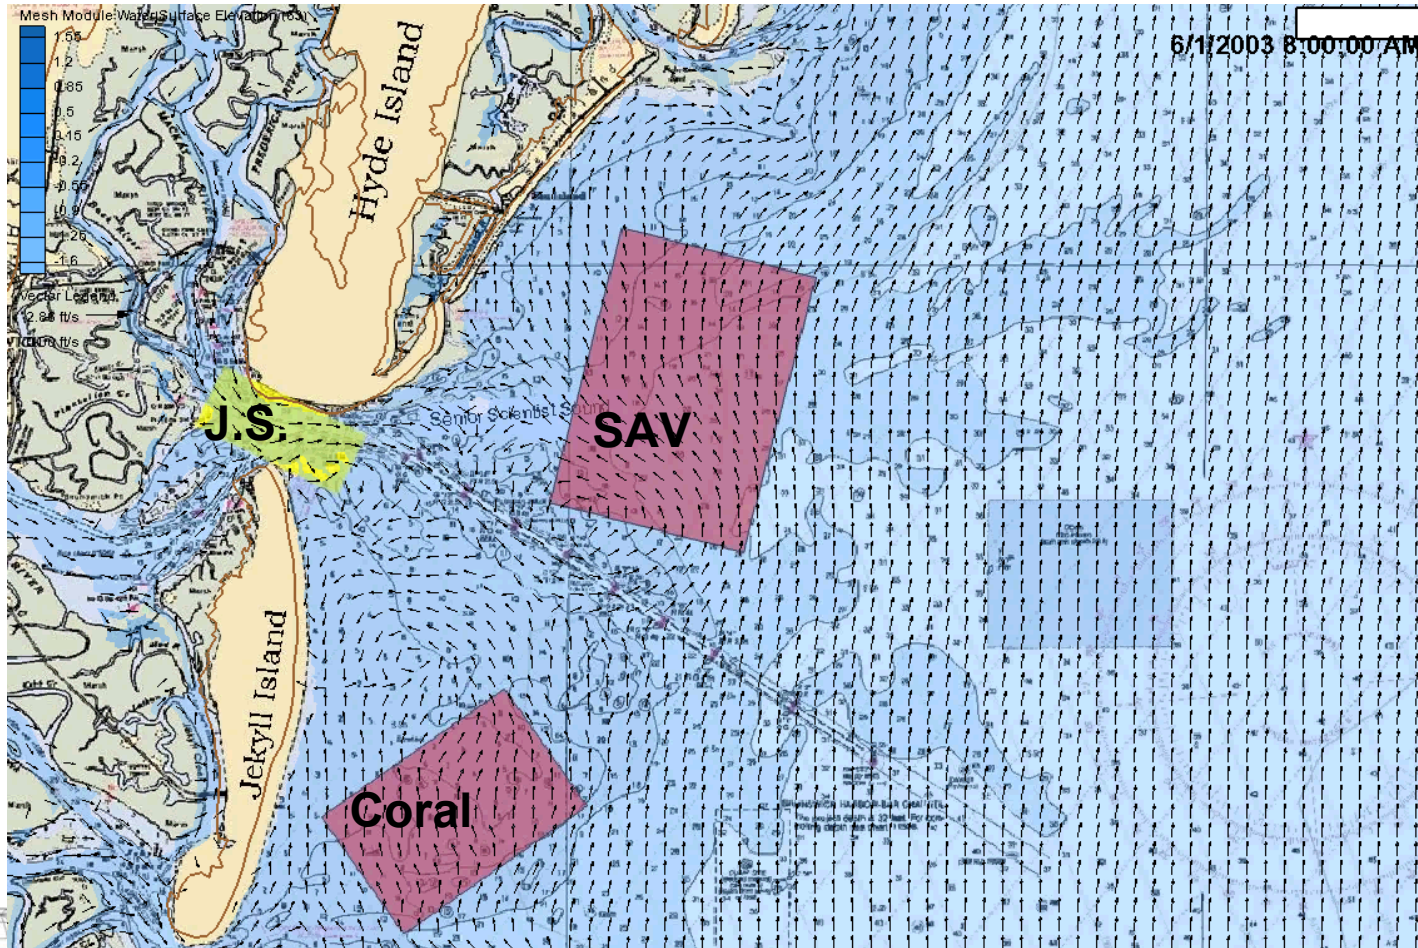




# Hypothetical Example: Exposure

PTM 6-day simulation with overflow indicates most sediment remains in channel with some north of channel. Very little near coral reef

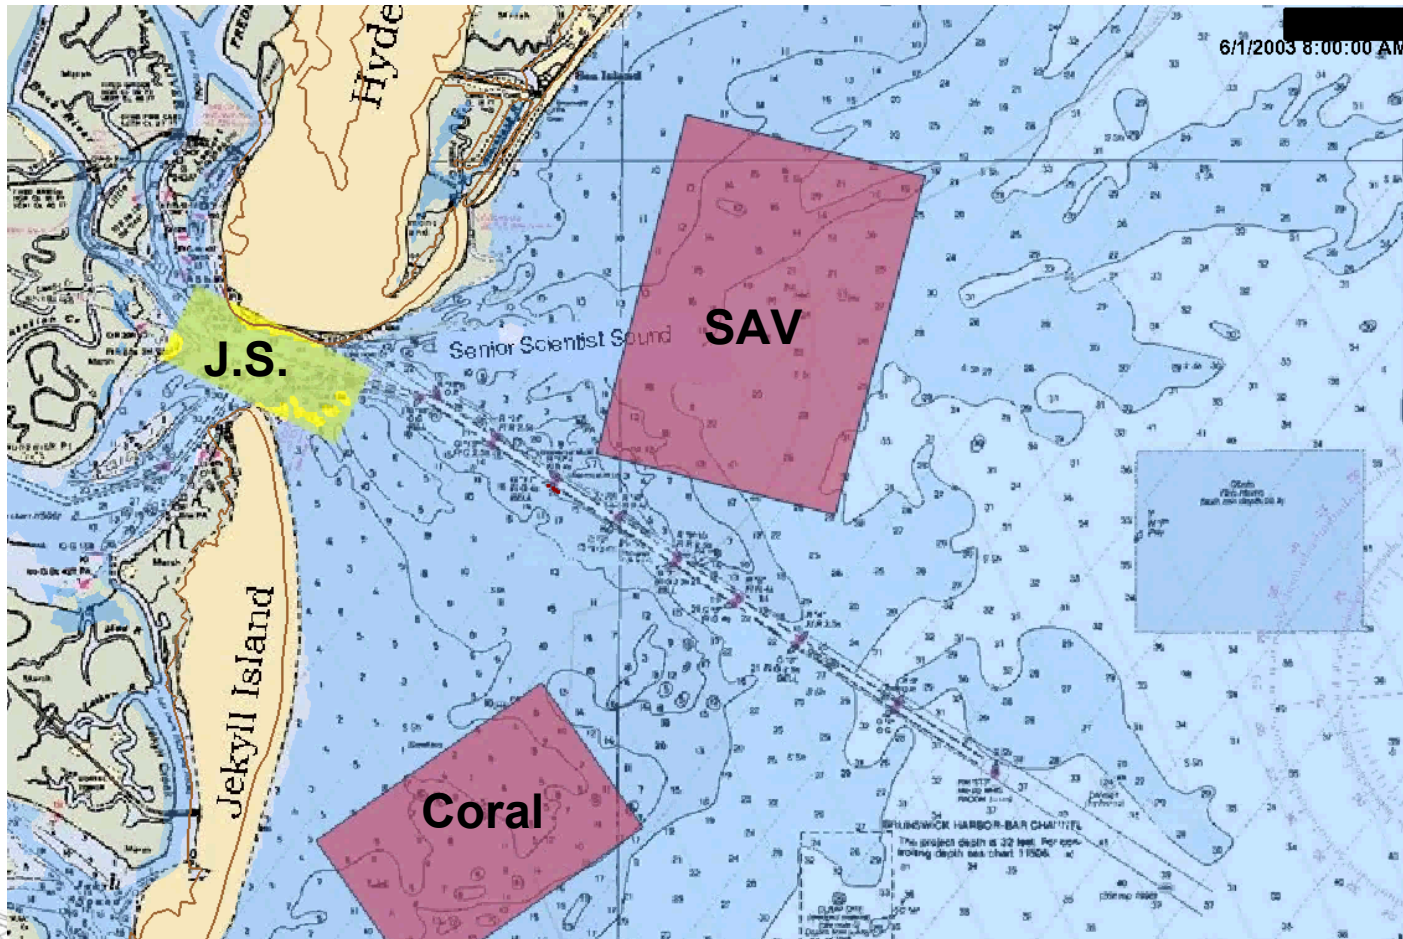


# Hypothetical Example: TSS Exposure

- Concentration is highly variable both spatially and temporally
- Significant TSS difference between overflow and no overflow cases
- PTM maintains all data for each particle: mass, location, properties
- These are translated to concentration of each sediment type and each constituent
- Assess exposure due to suspended solids
- Convert TSS to NTU to assess light attenuation

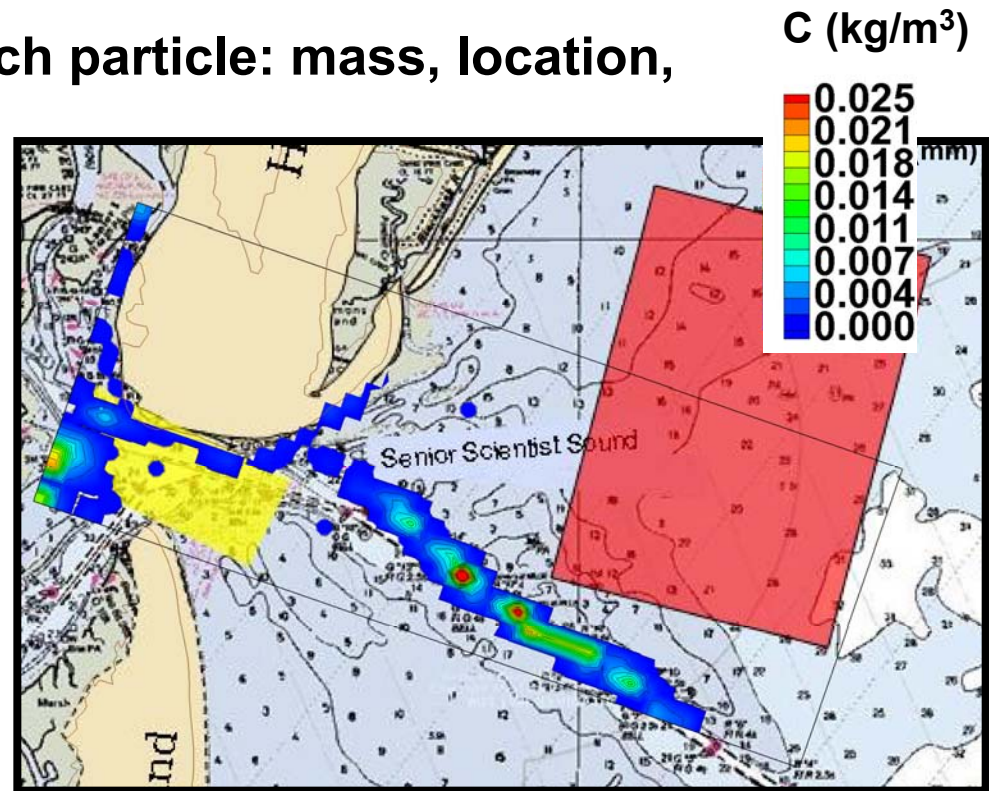


# Time Series of Concentration → Dose

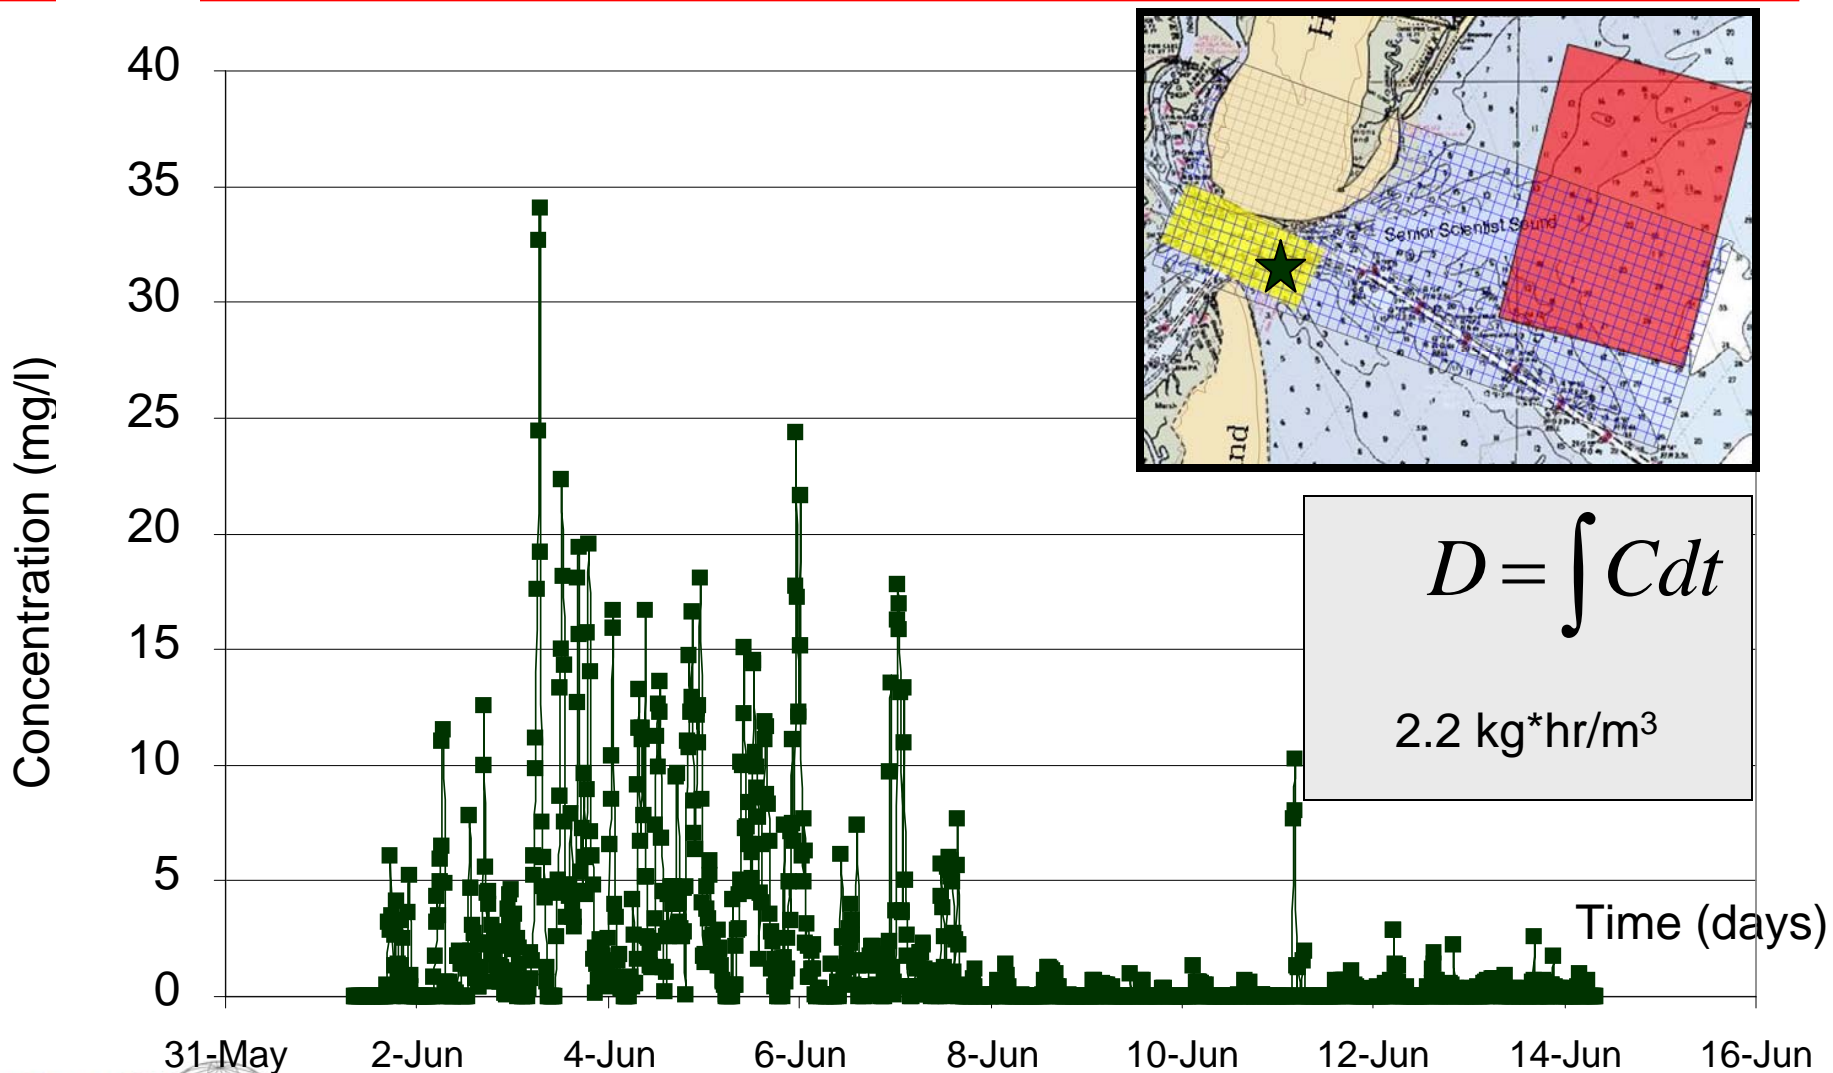



# Cross-Section of Inlet TSS

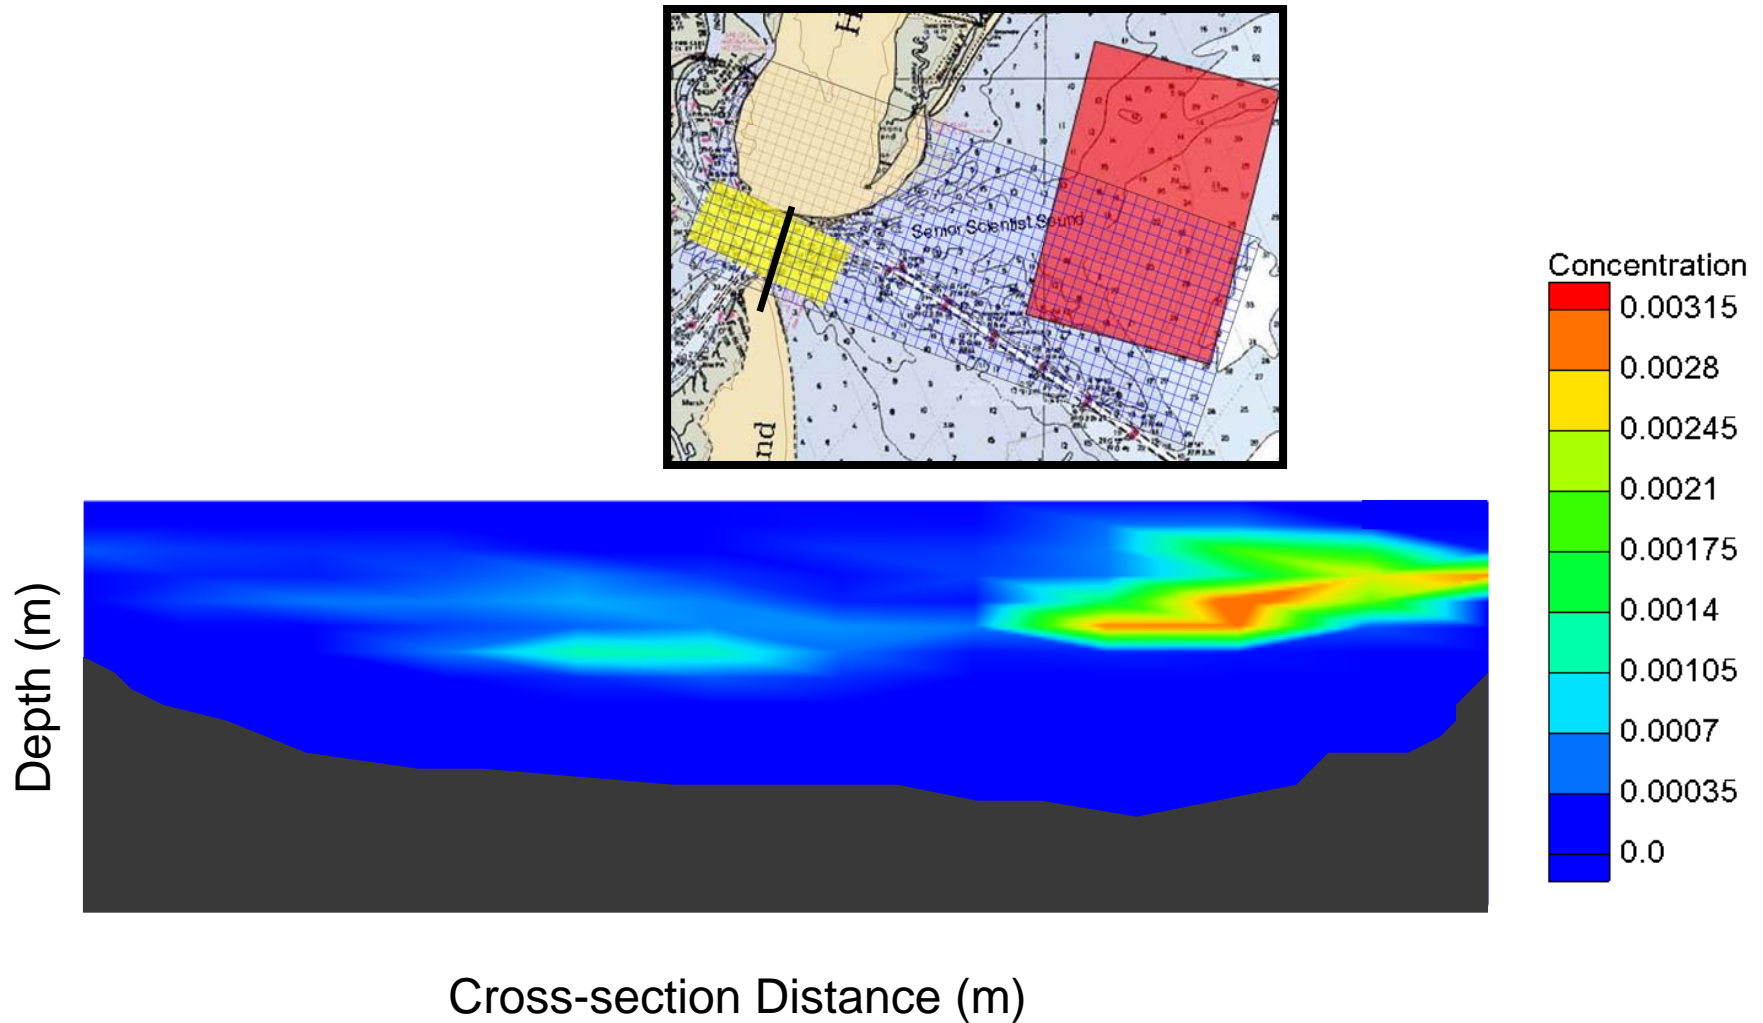


Cross-section Distance (m)






# Time Series of Deposition

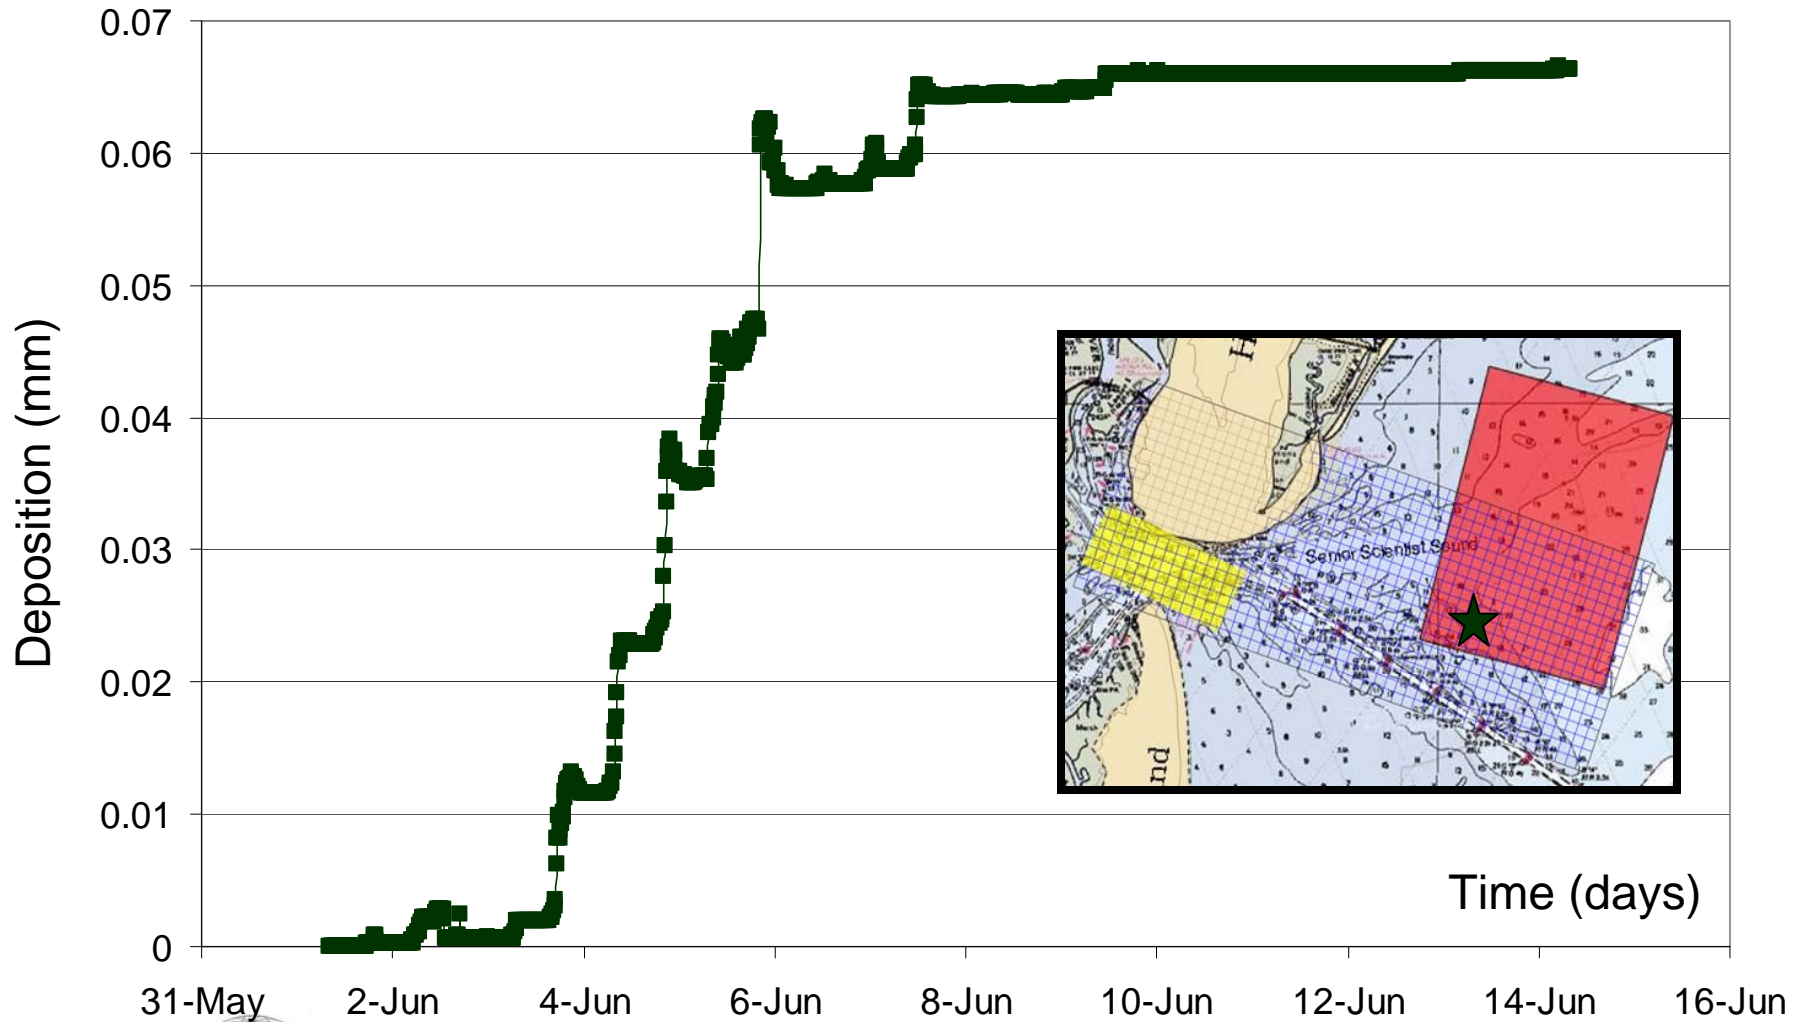



# Time Series of Light Attenuation

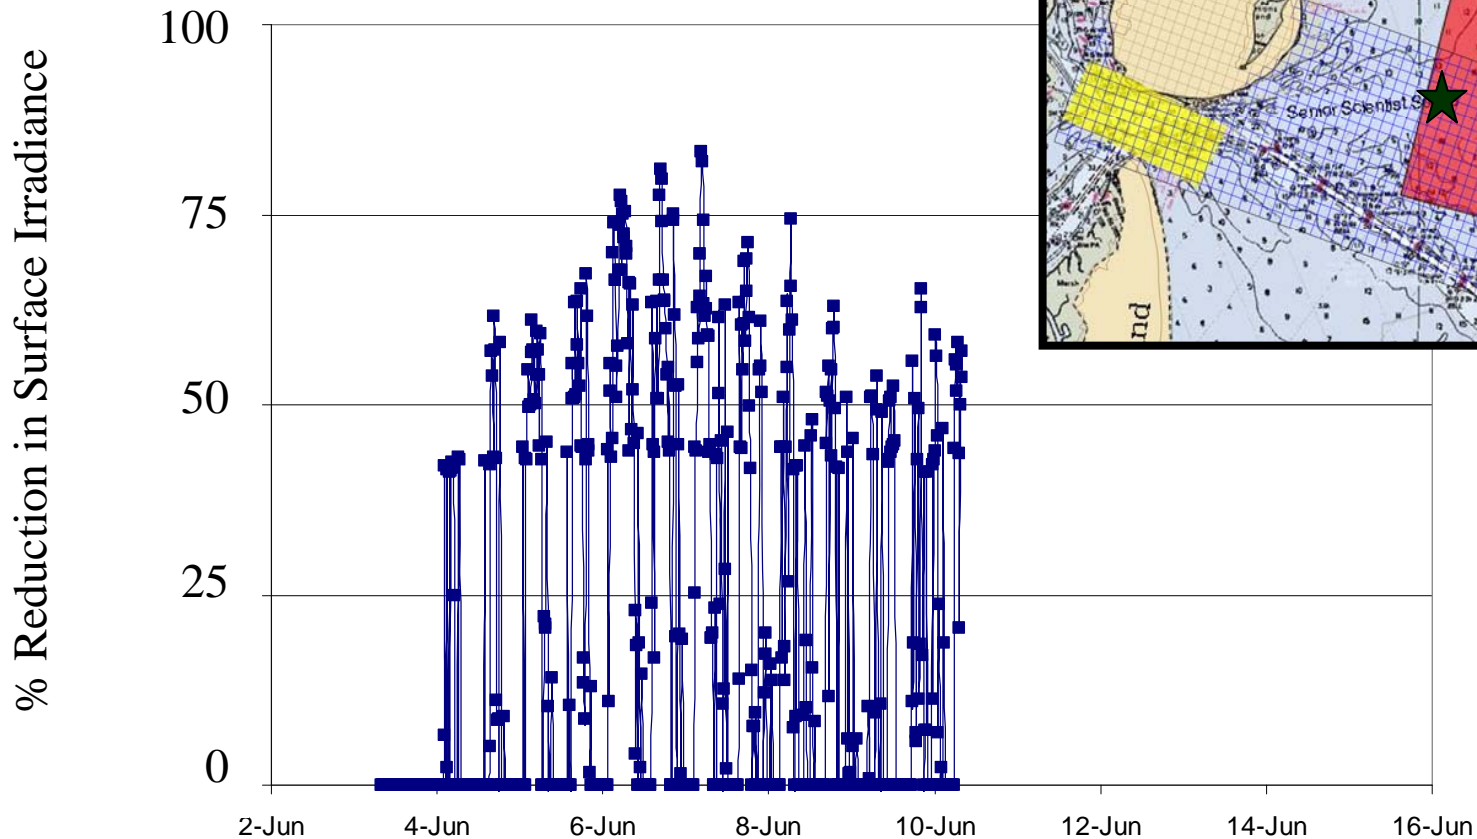

# Summary

---

- **No Pathway for exposure to coral reef**
- **Suspended Solids move into the Juvenile Salmon migration pathway but covers only a portion of the channel cross-section**
- **Deposition and light attenuation occur over southern half of the SAV**
- **Dredge-induced turbidity moves out of the region after approximately two weeks**
- **Concentration and deposition patterns are dynamic**

