



U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
National Policy

ORDER
8260.42B

Effective Date:

SUBJ: Helicopter Area Navigation (RNAV) Instrument Procedure Construction

These criteria are the Federal Aviation Administration (FAA) standards for developing helicopter area navigation (RNAV) instrument procedure construction based on Global Positioning System (GPS). This revision adds definitions, changes procedure identification from GPS to RNAV, provides specific holding pattern leg lengths, helicopter en route criteria, decreases navigation system error tolerance for along-track distance in the terminal area, and adds departure criteria, minimums, and requirements. The types of final approaches have been revised. They are Instrument Flight Rules (IFR) to an IFR heliport, IFR to a Visual Flight Rules (VFR) heliport (Proceed Visually), Point-in-Space (PinS) approach (Proceed VFR), and IFR to Runways with separate criteria for each.

The first step to increase helicopter IFR utility is the development of helicopter RNAV instrument procedures. Ongoing testing and criteria development by the FAA for application of the Wide Area Augmentation System (WAAS) will provide the next major step. WAAS with its increased integrity and 3-dimensional (3D) approach capability will allow narrower route widths and approaches with vertical guidance (APV).

James J. Ballough
Director
Flight Standards Service

Chapter 1. General

1.0 Purpose of This Order.

This order contains criteria for the formulation, review, approval, and publication of area navigation (*RNAV*) helicopter instrument procedures based on Global Positioning System (*GPS*) and Wide Area Augmentation System (*WAAS*) navigation.

1.1 Audience.

This order is distributed in Washington headquarters to the branch level offices of Airport Safety, Standards and Communications, and Navigation and Surveillance Systems; Air Traffic Organization (Safety, En Route and Oceanic Services, Terminal Services, System Operations Services, and Technical Operations Services); Flight Standards Services; National Flight Procedures Office and the Regulatory Standards Division (at the Mike Monroney Aeronautical Center); branch level in the regional Flight Standards and Airports Divisions; special mailing list ZVS-827, and Special Military and Public Addressees.

1.2 Where Can I Find This Order? This information is also available on the FAA's Web site at <http://fsims.avs.faa.gov/fsims/fsims.nsf>.

1.3 Cancellation.

Order 8260.42A, *Helicopter Global Positioning System (GPS) Nonprecision Approach Criteria*.

1.4 Explanation of Changes.

These criteria were written for automated implementation. Formulas are presented in Math notation and standard text to facilitate programming efforts. Calculation examples were eliminated. Instead, an Adobe Acrobat version of the criteria document is available where each formula performs the calculation as an imbedded calculator. Changed format from sections to chapters for user convenience and for harmonization with *Order 8260.54A*.

1.4.1 Chapter 1.

1.4.1 a. Paragraph 1.7. Numerous definitions added and/or changed to harmonize with Heliport Design AC 150/5390-2 and other documents that were changed since the publication of *Order 8260.42A*.

- 1.4.2 Chapter 2.**
- 1.4.2 a. Paragraph Added 2.0.** Policy directives and requirements. *Wide Area Augmentation System (WAAS)* criteria added.
- 1.4.2 b. Paragraph 2.0. Formulas are numbered** by chapter and depicted in standard mathematical notation and in standard text to aid in computer programming. Each formula contains a Javascript functional calculator for more user friendly document. This was harmonized with *Order 8260.54A*.
- 1.4.2 c. Paragraph 2.1.** Deletes note pertaining to arming the *GPS* receiver 30 *nautical miles (NM)* prior to the *heliport reference point (HRP)* or the *airport reference point (ARP)*.
- 1.4.2 d. Paragraph 2.1. Data Resolution added** to harmonize with *Order 8260.54A*.
- 1.4.2 e. Paragraph 2.1.1. Documentation accuracy.** Paragraph added to harmonize with *Order 8260.54A*.
- 1.4.2 f. Paragraph 2.1.2. Mathematic convention** added to facilitate programming efforts and to harmonize with *Order 8260.54A*. Added explanation of Math notation and support for *RNAV* and to harmonize with *Order 8260.54A*.
- 1.4.2 g. Paragraph 2.1.3. Geospatial Standards** added for harmonization with *Order 8260.54A*.
- 1.4.2 h. Paragraph 2.1.3.c. Obstacle Evaluation Area (OEA) Construction and Obstacle Evaluation Methodology** added for harmonization *Order 8260.54A*.
- 1.4.2 i. Paragraph 2.1.4. Evaluation of Actual and Assumed Obstacles (AAO).** Added to comply with changes in *Order 8260.19*.
- 1.4.2 j. Paragraph 2.2. Special Approach Procedures.** Several changes and additions are different from *Order 8260.42A*. These changes were agreed to after several meetings between the FAA and industry with the *Performance-Based Operations Aviation Rulemaking Committee (PARC)*.
- 1.4.2 k. Table 2-1. Fix displacement tolerance (FDT) dimensions in table 2-1** were changed. *Along-track Tolerance (ATT)* replaces *FDT* throughout document.
- 1.4.2 l. Paragraph 2.5. Procedure Identification.** Changes procedure identification from *GPS* to *RNAV* and other procedure identification names. Changes made to comply with changes in *Order 8260.19*.

- 1.4.2 m. Paragraphs 2.5.5 and 2.5.6. Formulas 2-2 true airspeed and 2-3 tailwind component.** These formulas and calculators were added to permit calculations required for other criteria contained within this document, i.e., wind spirals, radii, etc.
- 1.4.2 n. Paragraph 2.5.7. Applies tailwind component values** to specific segments to harmonize with *Order 8260.54A*.
- 1.4.2 o. Paragraph 2.5.8. Table 2-2 added for the application of bank angles.** This table was added for criteria changes in this document that require specific bank angles for calculations of wind spirals and turn radii.
- 1.4.2 p. Paragraph 2.5.9. Added for calculating the *Turn Radius (R)*** to harmonize with *Order 8260.54A*.
- 1.4.2 q. Paragraph 2.7. Turn Construction** criteria added for harmonization with *Order 8260.54A*.
- 1.4.2 r. Paragraph 2.7.1b. Minimum length** of *track-to-fix (TF)* leg following a fly-over turn and **Formula 2-6** added to harmonize with *Order 8260.54A*.
- 1.4.2 s. Paragraph 2.9. Minimum TF leg.** Turn construction to harmonize with *Order 8260.54A*.
- 1.4.2 t. Paragraph 2.10. Calculating Descent Gradient** formula and calculator added for user convenience.
- 1.4.2 u. Paragraph 2.11. Missed Approach Segment (MAS)** conventions added to harmonize with *Order 8260.54A*.
- 1.4.2 v. Paragraph 2.10.1. Charted Missed Approach Altitude** added to comply with *Order 8260.3* and changes to that order.
- 1.4.3 Chapter 3.**
- 1.4.3 a. Adds Special en route** criteria using *GPS* and *WAAS* navigation.
- 1.4.3 b. Adds construction** of *GPS* and *WAAS* en route segment criteria to comply with *RNAV* concepts and to meet industry requests for special airways.
- 1.4.3 c. Paragraph 3.1.2.** Added formula and calculator for determining secondary *required obstacle clearance (ROC)*
- 1.4.3 d. Paragraph 3.2. Minimum Crossing Altitude (MCA).** Formula and calculator is displayed for determining *MCA*.

- 1.4.3 e. Paragraph 3.3.1. Terminal Routes Between Airports/Heliports.** Criteria for displaying en route and feeder graphics.
- 1.4.3 f. Paragraph 3.4. Descent Gradient** criteria added to comply with *Order 8260.3B, Volume 1, paragraph 1110*.
- 1.4.4 Chapter 4.**
- 1.4.4 a. Paragraph 4.0. Approach Configuration.** Criteria changed to harmonize with other documents, e.g., “Y” construction added. Army criteria added per request.
- 1.4.4 b. Paragraph 4.1.2. ROC formula** and calculator added for the convenience of user.
- 1.4.5 Chapter 5.**
- a. Paragraph 5.1. States the five procedure types.** Added for introduction and clarification. *Instrument Flight Rule (IFR) to a visual flight rules (VFR) heliport (IVH), IFR to a VFR Runway (IVR), and point-in-space (PinS)* procedures are added to meet industry requests and to formalize criteria previously stated in letters and memos.
- 1.4.5 b. Paragraph 5.2.2. ROC for the final approach segment (FAS)** formula and calculator given for user convenience.
- 1.4.5 c. Paragraph 5.2.2a. Descent Gradient/Angle** from *final approach fix (FAF) to missed approach point (MAP)* formula and calculator given for user convenience. This criteria is used for *IVH, IVR, and PinS* procedures.
- 1.4.5 d. Paragraph 5.2.2b. Descent Gradient/Angle to an IFR Runway or an IFR Heliport.** Added for required criteria.
- 1.4.5 e. Paragraph 5.2.2d. Stepdown Descent Gradient/Angle.** Added to meet required criteria for stepdown requirements in the *FAS*.
- 1.4.5 f. Paragraph 5.2.2e. Existing Obstacles Close to the FAF or Stepdown Fix** to comply with *Order 8260.3B, Volume 1, paragraph 289* and to establish an *obstacle identification surface (OIS)* for the helicopter’s operational characteristics using a steeper descent gradient than airplanes.
- 1.4.5 g. Paragraph 5.3.1.** Formulas and calculators added for determining *OIS* elevations, the Visual Segment Descent Angle, Visual Segment Length, and Distance from Helipoint were added for user convenience.

1.4.5 h. Paragraph 5.4. IVH (Proceed Visually). Criteria added to meet industry requests and to formalize the letters and memos that were applied by industry for approaches to *VFR* heliports.

1.4.5 i. Paragraph 5.5. IVR (Proceed Visually). Criteria added to meet industry requests for *IFR* approaches to *VFR* runways.

1.4.5 j. Paragraph 5.6. PinS Approach (Proceed VFR). Added to modify *PinS TERPS chapter 11* criteria to meet industry requests.

1.4.5. k. Paragraph 5.7. IFR to an IFR Runway. Criteria is added for clarification, and to separate from other parts of approach criteria.

1.4.6 Chapter 6.

This chapter is a missed approach criteria redevelopment, necessary because *Order 8260.38* was canceled. This criteria harmonizes with *Order 8260.54A*. It contains wind spirals, flat surfaces, **ROC**, and **OEA**s that were not contained in *Order 8260.42A*.

1.4.7 Chapter 7.

This chapter contains criteria not contained in *Order 8260.42A* for departures from *IFR* heliports and to meet industry requests for departures from *VFR* heliports or runways into *IFR* protected airspace.

1.4.8 Chapter 8.

This chapter was developed for approach and departure *IFR* minimum changes to and from *IFR* heliports. It also furnishes approach and departure minimums to/from *PinS*, *VFR* heliports, and *VFR* runway operations added in *chapters 5 and 7*.

1.4.9 Chapter 9.

1.4.9 a. Adds Wide Area Augmentation System (WAAS) Localizer Performance (LP) criteria.

1.4.9 b. Adds WAAS LP criteria providing a narrower **OEA** in the *IFR FAS* (this may lower the **MDA**) and **OIS** in the visual segment. It also can provide narrower route widths when departures and arrivals are networked together. Qualified heliports may also be used as an alternate.

1.4.10 Appendix 1. Adds conditions and assumptions for helicopter *GPS* airways development.

1.4.11 Appendix 2. Adds *TERPS* standard formulas for geodetic calculations.

- 1.4.12 **Appendix 3.** Adds requirements for special *PinS* departure criteria.
- 1.4.13 **Appendix 4.** Adds conditions and assumptions for special sector and diverse departure criteria from civil *IFR* heliports.
- 1.4.14 **Appendix 5.** Adds conditions and assumptions for special helicopter *GPS* holding.

1.5 **Background.**

The analysis of *GPS/WAAS* navigation flight test data provides the basis for these criteria. A significant difference exists between approach procedures to runways and approach procedures to heliports. Approaches to runways terminate in relatively obstacle-free environments. Approaches to heliports commonly terminate in areas of dense population and large buildings. Speed limitations incorporated in these criteria provide the smallest obstacle clearance areas, the shortest segment lengths, and the lowest ceiling and visibility minimums. *The graphic illustrations in this order are not to scale.* The guidance published in this directive supersedes previous guidance concerning helicopters published in Terminal Instrument Procedures (*TERPS*) Instruction Letters (*TILs*) and other correspondence.

1.6 **Effective Date.**

1.7 **Definitions.**

1.7.1 **Approach Procedure Types using RNAV (GPS).**

1.7.1 **a. *IFR* to an *IFR* Heliport.** An *IFR* approach to a heliport that meets Advisory Circular (*AC*) 150/5390-2, *Heliport Design*, standards for an *IFR* heliport.


1.7.1 **b. *IVH* (Proceed Visually).** An *IFR* approach to a *VFR* heliport that meets *AC 150/5390-2* standards. This special procedure requires flight standards approval. The phrase “Proceed Visually” is charted on the procedure for the visual segment from the *MAP* to the heliport. *IVR* applies *IVH* criteria to an approach to a *VFR* runway.

1.7.1 **c. *PinS* Approach (Proceed *VFR*).** An *IFR PinS* approach to one or more *VFR* heliports. The procedure can be either a public or special procedure. The phrase “Proceed *VFR*” is charted on the procedure for the *VFR* segment following the *MAP*.

1.7.1 **d. *IFR* to a Runway.** An *IFR* helicopter approach procedure to a runway.

1.7.2 *Distance of Turn Anticipation (DTA).*

DTA represents the maximum distance prior to a fly-by-fix that a helicopter is expected to start a turn to intercept the course of the next segment. The *along-track tolerance (ATT)* value, associated with a fix, is added to the *DTA* value when *DTA* is applied (see figure 1-1 and formula 2-6).

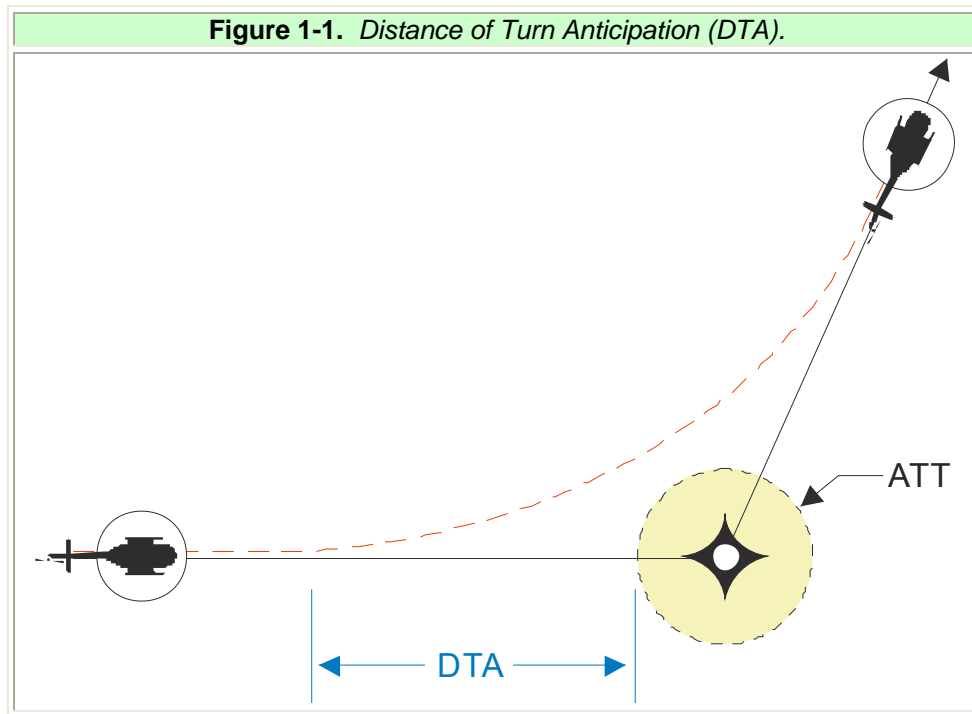

$$DTA = \text{Radius} \times \tan (\text{degrees of turn} \div 2)$$

1.7.3 **Fly-By Fix.** ✧

A fly-by fix is a waypoint where a turn is initiated prior to reaching it.

1.7.4 **Fly-Over Waypoint (WP).** Ⓢ

A fly-over **WP** is a waypoint over which an aircraft is expected to fly before one turn is initiated.

1.7.5 **Final Approach and Takeoff Area (FATO).**

A defined area over which the final phase of the approach to a hover, or a landing, is completed and from which the takeoff is initiated. The guidance for a **FATO** is published in AC 150/5390-2.

1.7.6 ***Fictitious Helipoint (FHP).***

The **FHP** is located 2,600 ft beyond the **MAP** and 9,023 ft in front of the *flight path alignment point (FPAP)*. It is used to establish the approach course width for the **WAAS**.

1.7.7 ***Flight Path Alignment Point (FPAP).***

The **FPAP** is a 3-dimensional (**3D**) point defined by the *World Geodetic System of 1984/North American Datum of 1983 (WGS-84/NAD-83)* latitude and longitude lying in the same plane as the **FHP**.

1.7.8 ***Flight Technical Error (FTE).***

FTE is the measure of the pilot or autopilot's ability to control an aircraft so that its indicated position matches the desired position.

1.7.9 ***Heliport Approach Lighting System (HALS).***

The **HALS** is a distinctive approach lighting configuration designed to prevent it from being mistaken for an airport runway approach lighting system. **HALS** consists of ten bars of lights at 100-ft increments and has a length of 1,000 ft (305 m). **HALS** provides a visibility credit of 1/4 *statute mile (SM)* for nonprecision approaches.

1.7.10 ***Height Above Landing Area Elevation (HAL).***

The **HAL** is the height of the *minimum descent altitude (MDA)* above helipoint elevation.

1.7.11 ***Height Above Surface (HAS).***

HAS is the height of the **MDA** above the highest terrain/surface within a 5,200-ft radius of the **MAP** in the **PinS** procedure.

1.7.12 ***Height Above Threshold (HATH).***

The **HATH** is the height of the **MDA** above the *landing threshold point (LTP)* elevation.

1.7.13 ***Helipoint Crossing Height (HCH).***

The **HCH** is the height of the vertical guidance path above the heliport elevation at the helipoint.

1.7.14 Helipoint.

The helipoint is the aiming point for the visual segment and is normally centered in the *touchdown and lift-off area (TLOF)*. The *TLOF* is normally centered in the *FATO*.

1.7.15 Heliport.

An area of land, water, or structure used or intended to be used for helicopter landings and takeoffs and includes associated buildings and facilities. *IFR* and *VFR* heliports are described in *AC 150/5390-2*.

1.7.16 Heliport Elevation (HE).

For heliports without a precision approach, the heliport elevation is the highest point of the *FATO* expressed as the distance above *mean sea level (MSL)*.

1.7.17 Heliport Reference Point (HRP).

The geographic position of the helipoint, measured at the center of the *FATO* or the central point of multiple *FATOs*, expressed as latitude and longitude to the nearest hundredth of a second of the *WGS-84/NAD-83* and the *HRP* elevation is equal to the heliport elevation.

1.7.18 Initial Departure Fix (IDF).

The first fix on a *PinS* departure procedure where application of *IFR* obstruction protection and air traffic separation standards are provided.

1.7.19 IFR Heliports.

Facility specifications for *IFR* Heliports are described in *chapters 6 or 7* as appropriate of Advisory Circular 150/5390-2, *Heliport Design*. *Chapter 6* of *AC 150/5390-2* relates to *paragraph 5.3* of this order for nonprecision *IFR* approach procedures to *IFR* heliports.

1.7.20 Landing and Takeoff Site.

The area of intended landing and takeoff. It can be a heliport, helistop, vertiport, or other point of landing designated for a *PinS* approach.

1.7.21 Proceed Visually.

This phrase requires the pilot to acquire and maintain visual contact with the *FATO* or elements associated with the *FATO* such as heliport lighting, *precision approach path indicator (PAPI)*, etc. at or prior to the *MAP*. Obstacle and terrain

avoidance from the *MAP* to the *FATO* is the responsibility of the pilot. A missed approach procedure is not provided between the *MAP* and the landing *FATO*.

1.7.22 Proceed VFR.

For *PinS* procedures, this phrase requires the pilot to proceed from the *MAP* to the selected landing area on the approach chart with no less than the visibility and ceiling required on the approach chart. For flights that do not terminate at the selected landing area on the approach chart, the pilot is required to proceed from the *MAP* under the applicable *VFR* for ceiling and visibility required by the applicable *Code of Federal Regulations (14 CFR)* but no less than the visibility required on the approach chart, *operations specifications (OpSpec)*, or *letter of agreement (LOA)*. Obstacle and terrain avoidance from the *MAP* to the landing site is the responsibility of the pilot. A missed approach procedure is not provided between the *MAP* and the landing site. The landing site is not required to be in sight from the *MAP*.

1.7.23 Touchdown and Lift-Off Area (TLOF).

A *TLOF* is a load bearing, generally paved area, normally centered in the *FATO*, on which the helicopter lands or takes off (*see AC 150/5390-2*).

1.7.24 United States Air Force (USAF).

1.7.25 United States Army (USA).

1.7.26 United States Coast Guard (USCG).

1.7.27 United States Navy (USN).

1.7.28 VFR Heliports.

Standards and recommendations for *VFR* and *IFR* heliports are described in *chapters 2 through 5* and *chapter 8* of *AC 150/5390-2, Heliport Design*. *Paragraph 5.4* of this order relates to *VFR* heliports.

1.7.29 Visual Segment Descent Angle (VSDA).

The angle of descent in the visual segment.

1.7.30 Visual Segment Reference Line (VSRL).

A line perpendicular to the final course at a distance of 75 ft (22.9 m) from the heliport for public use heliports and 50 ft (15.27 m) from the heliport for heliports with special instrument procedures. It extends 75 ft (22.9 m) on each side of the final course centerline for public use heliports and 50 ft (15.27 m) on

each side of the final course centerline for heliports with special instrument procedures. For **IFR** procedures the line is 75 ft (22.9 m) from the heliport and it extends 75 ft (22.9 m) on each side of the final approach course.

1.7.31 **Wide Area Augmentation System (WAAS) Localizer Performance (LP).**

The **LP** approach applies lateral-only **WAAS** guidance (and reduced **OEA**) within the **FAS** to a **PinS**.

1.8 **Data Resolution.** *See chapter 2, paragraph 2.1.*

1.9 **Applicable Directives.**

All directives in this order refer to the latest editions.

1.9.1 **Order 7130.3, Holding Pattern Criteria.**

1.9.2 **Order 8260.3, United States Standard for Terminal Instrument Procedures (TERPS).**

1.9.3 **Order 8260.19, Flight Procedures and Airspace.**

1.9.4 **Order 8260.40, Flight Management System (FMS) Instrument Procedures Development.**

1.9.5 **Order 8260.45, Terminal Arrival Area (TAA) Design Criteria.**

1.9.6 **Order 8260.54, United States Standard for Area Navigation (RNAV).**

1.9.7 **Advisory Circular (AC) 150/5390-2, Heliport Design.**

1.10 **Information Update.**

For your convenience, FAA Form 1320-19, *Directive Feedback Information*, is included at the end of this order to note any deficiencies found, clarifications needed, or suggested improvements regarding the contents of this order. When forwarding your comments to the originating office for consideration, please use the "Other Comments" block to provide a complete explanation of why the suggested change is necessary.

THIS PAGE INTENTIONALLY LEFT BLANK

Chapter 2. General Criteria.

2.0 Policy Directives and Requirements.

These criteria assume use of *Global Positioning System (GPS)* or *Wide Area Augmentation System (WAAS)* receivers approved for approach operations, in accordance with Advisory Circular (AC) 20-138, *Airworthiness Approval of Global Navigation Satellite System (GNSS) Equipment*; Technical Standard Order (TSO) C-129 Class A (1) systems; and AC 20-130, *Airworthiness Approval of Navigation or Flight Management Systems Integrating Multiple Navigation Sensors*, for **GPS** as part of a multi-sensor system meeting TSO-C129 Class C (1) System or pertinent military guidance. **WAAS** navigation equipment must be approved in accordance with the requirements specified in TSO-C145, *Airborne Navigation Sensors Using the Global Positioning System (GPS) Augmented by the Wide Area Augmentation System (WAAS)*, or TSO-C146, *Stand-Alone Airborne Navigation Equipment Using the Global Positioning System (GPS) Augmented by the Wide Area Augmentation System (WAAS)*.

Unless otherwise specified, Order 8260.3, *United States Standard for Terminal Instrument Procedures (TEPRs)*, applies. For public use procedures, the heliport must meet the guidance contained in AC 150/5390-2, *Heliport Design*. Obstacle clearance area dimensions are based on 90 *knots indicated airspeed (KIAS)* MAXIMUM in the initial and intermediate segments and 70 *KIAS* MAXIMUM in the final and missed approach segments until passing the missed approach holding fix. **USA/USAF/USN/USCG** only: procedures are designed for 90 *KIAS* in the final and missed approach segments.

The following FAA orders apply:


8260.3, *United States Standard for Terminal Instrument Procedures (TERPS)*.

8260.19, *Flight Procedures and Airspace*.

7130.3, *Holding Pattern Criteria*.

Apply *chapter 2, section 3* of Order 7130.3, *Holding Pattern Criteria*. Use pattern 4 for all helicopter holding (including climb-in-hold) up to and including 10,000 ft. Chart 4 *nautical mile (NM)* leg lengths.

Formulas are numbered by chapter and depicted in standard mathematical notation and in standard text to aid in computer programming. Each formula contains a Javascript functional calculator.

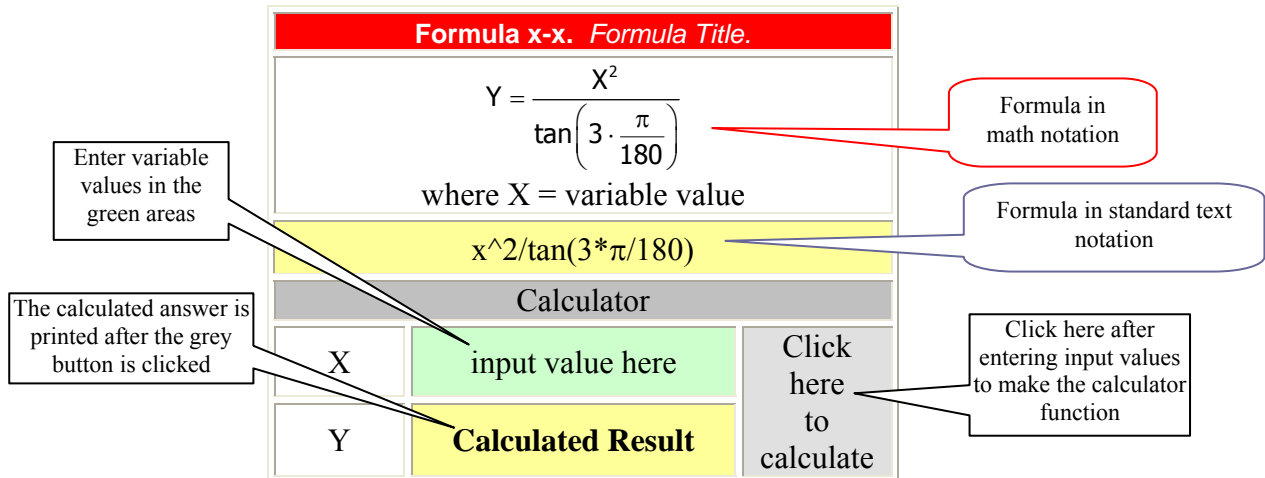

2.1 Data Resolution.

Perform calculations using an accuracy of at least 15 significant digits; i.e., floating point numbers must be stored using at least 64 bits. Do not round intermediate results. Round only the final result of calculations for documentation purposes. Required accuracy tolerance is 1 centimeter for distance and 0.002 arc-second for angles. The following list specifies the minimum accuracy standard for **documenting** data expressed numerically. This standard applies to the documentation of final results only; e.g., a calculated adjusted glidepath angle of 5.04178 degrees is documented as 5.05 degrees. The standard does not apply to the use of variable values during calculation. Use the most accurate data available for variable values.

2.1.1 Documentation Accuracy.

- 2.1.1 a. **World Geodetic System of 1984 (WGS-84) latitudes and longitudes** to the nearest one hundredth (0.01) arc second; [*nearest five ten thousandth (0.0005) arc second for Final Approach Segment (FAS) data block entries*].
- 2.1.1 b. **Flight Path Alignment Point (FPAP) mean sea level (MSL) elevation** to the nearest foot;
- 2.1.1 c. **FPAP height above ellipsoid (HAE)** to the nearest tenth (0.1) meter;
- 2.1.1 d. **Glidepath angle** to the next higher one hundredth (0.01) degree;
- 2.1.1 e. **Courses** to the nearest one hundredth (0.01) degree; and
- 2.1.1 f. **Course width at threshold** to the nearest quarter (0.25) meter;

2.1.1 g. Distances to the nearest hundredth (0.01) unit [except for “length of offset” entry in final approach segment (**FAS**) data block which is to the nearest 8 meter value].

2.1.2 Mathematics Convention.

Formulas in this document as depicted are written for *radian* calculation.

Note: The value for 1 **NM** was previously defined as 6,076.11548 ft. For the purposes of area navigation (**RNAV**) criteria, 1 **NM** is defined as the result of the following calculation:

$$\frac{1852}{0.3048}$$

2.1.2 a. Conversions:

- Degree measure to radian measure:

$$\text{radians} = \text{degrees} \cdot \frac{\pi}{180}$$

- Radian measure to degree measure:

$$\text{degrees} = \text{radians} \cdot \frac{180}{\pi}$$

- Feet to meters:

$$\text{meters} = \text{feet} \cdot 0.3048$$

- Meters to feet

$$\text{feet} = \frac{\text{meters}}{0.3048}$$

- Feet to Nautical Miles (**NM**)

$$\text{NM} = \text{feet} \cdot \frac{0.3048}{1852}$$

- **NM** to feet:

$$\text{feet} = \text{NM} \cdot \frac{1852}{0.3048}$$

- **NM** to meters

$$\text{meters} = \text{NM} \cdot 1852$$

- Meters to **NM**

$$\text{NM} = \frac{\text{meters}}{1852}$$

- Temperature Celsius to Fahrenheit:

$$T_{\text{Fahrenheit}} = 1.8 \cdot T_{\text{Celsius}} + 32$$

- Temperature Fahrenheit to Celsius

$$T_{\text{Celsius}} = \frac{T_{\text{Fahrenheit}} - 32}{1.8}$$

2.1.2

b. Definition of Mathematical Functions and Constants.

$a + b$ indicates addition

$a - b$ indicates subtraction

$a \times b$ or ab or $a \cdot b$ or $a * b$ indicates multiplication

$\frac{a}{b}$ or a/b or $a \div b$ indicates division

$(a - b)$ indicates the result of the process within the parenthesis

$|a - b|$ indicates absolute value

\approx indicates approximate equality

\sqrt{a} or $a^{0.5}$ or $a^{\wedge}0.5$ indicates the square root of quantity "a"

a^2 or $a^{\wedge}2$ indicates $a \times a$

$\ln(a)$ or $\log(a)$ indicates the natural logarithm of "a"

$\tan(a)$ indicates the tangent of "a" degrees

$\tan^{-1}(a)$ or $\text{atan}(a)$ indicates the arc tangent of "a"

$\sin(a)$ indicates the sine of "a" degrees

$\sin^{-1}(a)$ or $\text{asin}(a)$ indicates the arc sine of "a"

$\cos(a)$ indicates the cosine of "a" degrees

$\cos^{-1}(a)$ or $\text{acos}(a)$ indicates the arc cosine of "a"

- e** The constant **e** is the base of the natural logarithm and is sometimes known as Napier's constant, although its symbol (**e**) honors Euler.

With the possible exception of π , **e** is the most important constant in mathematics since it appears in myriad mathematical contexts involving limits and derivatives. Its value is approximately 2.718281828459045235360287471352662497757...

- r** The **TERPS** constant for the mean radius of the earth for spherical calculations in feet is $r = 20890537$.

2.1.2

c. Operation Precedence (Order of Operations).

First: Grouping Symbols: parentheses, brackets, braces, fraction bars, etc.

Second: Functions: Tangent, sine, cosine, arcsine, and other defined functions;

Third: Exponentiations: Powers and roots;

Fourth: Multiplication and Division: Products and quotients;

Fifth: Addition and subtraction: Sums and differences; e.g.,
 $5 - 3 \times 2 = -1$ because multiplication takes precedence over subtraction
 $(5 - 3) \times 2 = 4$ because parentheses take precedence over multiplication
 $\frac{6^2}{3} = 12$ because exponentiation takes precedence over division
 $\sqrt{9 + 16} = 5$ because the square root sign is a grouping symbol
 $\sqrt{9} + \sqrt{16} = 7$ because roots take precedence over addition
 $\frac{\sin(30^\circ)}{0.5} = 1$ because functions take precedence over division
 $\sin\left(\frac{30^\circ}{0.5}\right) = 0.8660254$ because parentheses take precedence over functions

Notes on calculator usage:

1. Most calculators are programmed with these rules of precedence.
2. When possible, let the calculator maintain all of the available digits of a number in memory rather than re-entering a rounded number. For highest accuracy from a calculator, any rounding that is necessary should be done at the latest opportunity.

2.1.3 Geospatial Standards.

The following standards apply to the evaluation of obstacle and terrain position and elevation data relative to **RNAV obstacle evaluation areas (OEA)** and **obstacle clearance surfaces (OCS)**. Terrain and obstacle data are reported in **North American Datum of 1983 (NAD-83)** latitude, longitude, and elevation relative to **MSL** in **National Geodetic Vertical Datum of 1929 (NGVD-29)** or **North American Vertical Datum of 1988 (NAVD-88)** vertical datum. Evaluate obstacles using their **NAD-83** horizontal position and **NAVD-88** elevation value compared to the **WGS-84** referenced course centerline (along-track and cross-track), **OEA** boundaries, and **OCS** elevations as appropriate.

- 2.1.3 a. WGS-84[G873] for Position and Course Construction.** This reference frame is used by the FAA and the U.S. Department of Defense (DoD). It is defined by the National Geospatial-Intelligence Agency (NGA) (formerly the National Imagery and Mapping Agency, formerly the Defense Mapping Agency [DMA]). In 1986, the Office of National Geodetic Survey (NGS), redefined and readjusted the North American Datum of 1927 (NAD-27), creating the NAD-83. The WGS-84 was defined by the DMA. Both NAD-83 and WGS-84 were originally defined (in words) to be geocentric and oriented as the Bureau International d'Heure Terrestrial System. In principle, the three-dimensional (3D) coordinates of a single physical point should therefore be the same in both NAD-83 and WGS-84 Systems; in practice; however, small differences are sometimes found. The original intent was that both systems would use the Geodetic Reference System of 1980 (GRS-80) as a reference ellipsoid. As it

happened, the **WGS-84** ellipsoid differs very slightly from **GRS-80**). The difference is 0.0001 meters in the semi-minor axis. In January 2, 1994, the **WGS-84** reference system was realigned to be compatible with the International Earth Rotation Service's Terrestrial Reference Frame of 1992 (**ITRF**) and renamed **WGS-84 (G730)**. The reference system underwent subsequent improvements in 1996, referenced as **WGS-84 (G873)** closely aligned with **ITRF-94**, to the current realization adopted by the **NGA** in 2001, referenced as **WGS-84 (G1150)** and considered equivalent systems to **ITRF 2000**.

2.1.3 b. NAVD-88 for elevation values. **NAVD-88** is the vertical control datum established in 1991 by the minimum-constraint adjustment of the Canadian-Mexican-U.S. leveling observations. It held fixed the height of the primary tidal bench mark, referenced to the new International Great Lakes Datum of 1985 local **MSL** height value, at Father Point/Rimouski, Quebec, Canada. Additional tidal bench mark elevations were not used due to the demonstrated variations in sea surface topography, (i.e., the fact that **MSL** is not the same equipotential surface at all tidal bench marks).

2.1.3 c. OEA Construction and Obstacle Evaluation Methodology.

2.1.3 c. (1) Courses, fixes, boundaries (lateral dimension). Construct straight-line courses as a **WGS-84** ellipsoid geodesic path. If the course outbound from a fix differs from the course inbound to the fix (courses measured at the fix), then a turn is indicated. Construct parallel and trapezoidal boundary lines as a locus of points measured perpendicular to the geodesic path. (*The resulting primary and/or secondary boundary lines do not display a "middle bulge" due to curvature of the ellipsoids surface since they are not geodesic paths.*) **NAD-83** latitude/longitude positions are acceptable for obstacle, terrain, and airport data evaluation. Determine obstacle lateral positions relative to course centerline/**OEA** boundaries using ellipsoidal calculations (*see appendix 2*).

2.1.3 c. (2) Elevations (vertical dimension). Evaluate obstacles, terrain, and airport data using their elevation relative to their orthometric height above the geoid (for our purposes, **MSL**) referenced to the **NAVD-88** vertical datum. The elevations of **OCSs** are determined spherically relative to their origin **MSL** elevation (**NAVD-88**). *Department of Defense (DoD)* procedure developers may use **EGM-96** vertical datum.

2.1.4 Evaluation of Actual and Assumed Obstacles (AAO).

Apply the vertical and horizontal accuracy standards in *Order 8260.19, paragraphs 272, 273, 274, and appendix 3.* (**USAF**, apply guidance per AFI 11-230)

Note: When applying an assumed canopy height consistent with local area vegetation, contact either the National Forestry Service or the FAA regional Flight Procedures Office (FPO) to verify the height value to use.

2.2 Special Approach Procedures.

Publish annotations to require special authorization when the procedure is an *instrument flight rules (IFR)* approach to a *visual flight rules (VFR)* heliport, reference *paragraph 5.4*, or one of the following conditions exists: (*USAF/USA/USCG/USN* not applicable).

2.2.1 A track change at the final approach fix (FAF) exceeds 30 degrees.

2.2.2 Descent Gradient/Angle exceeds 600 ft/NM (5.64 degrees) on any IFR segment.

2.2.3 When raising the heliport crossing height (HCH) to greater than 10 ft in the visual segment.

2.2.4 When a V_{mini} less than 70 knots indicated airspeed (KIAS) is applied. Data must be entered on *FAA Form 8260-7* and annotated on the planview portion of chart.

2.2.5 Where a bank angle other than the standard is used, enter the data on the appropriate *FAA Forms 8260-7 and 8260-9*, and annotate the information on the chart planview.

2.2.6 When the missed approach point (MAP) to heliport distance is less than 3,342 ft (0.55 NM).

Note: This criterion applies only to an IFR to a VFR heliport (IVH) procedure.

2.3 Helicopter Special GPS Airways.

The conditions and assumptions contained in *appendix 1* are mandatory.

2.4 Helicopter GPS Fix Displacement Tolerance.

Table 2-1 contains the *along-track fix displacement tolerance (ATT)* associated with the four modes of receiver operations. Cross-track tolerances are incorporated into the trapezoid width and are not listed in this table.

Table 2-1. Helicopter GPS/WAAS Fix Along-track Tolerance (ATT).						
GPS/WAAS EN ROUTE	GPS/WAAS TERMINAL	GPS APPROACH	GPS MISSED	WAAS APPROACH	WAAS MISSED	WAAS MISSED
					≤ 3° of FAC until turn initiation of first WP	> 3° turn of FAC or turn initiation of first WP
2.0 NM	1.0 NM	0.3 NM	1.0 NM	131.234 ft (40 m)	0.3 NM	1.0 NM
En Route	IAF	FAF	Missed Approach (MA) Turn Fix	FAF		
Feeder	Initial Step-down Fix	Final Step-down Fix	Missed Approach (MA) Holding Fix	LP Final Step-down Fix		
Feeder Step Down	IF	MAP				
	Intermediate Stepdown Fix					
	IDF (PinS Departure)	IDF (Special PinS Departure)				

2.5 Procedure Identification.

GPS and *WAAS* are considered to be *RNAV* systems. The procedure identification begins with “**COPTER RNAV (GPS).**” The remainder of the identification is based on whether the landing site is a heliport or a runway.

2.5.1 *U.S. Army (USA) Helicopter Runways.*

USA heliports that have helicopter runways chart the procedure with the letter H and the runway number. To differentiate between parallel runways, use the letter “L” or “R”; i.e., **COPTER RNAV (GPS) RWY H22R.**

2.5.2 *IFR Approach to an IFR Runway (within 30 degrees alignment).*

Use the abbreviation “**RWY**” followed by the runway number. Examples: **COPTER RNAV (GPS) RWY 22.**

2.5.3 *Point-in-Space (PinS) or IVH procedures to a VFR Runway.*

Use the magnetic bearing of the final approach course. Example: **COPTER RNAV (GPS) 160°.**

2.5.4 *Multiple Procedures to the Same Runway.*

Where more than one approach, using the same final approach guidance is developed to the same location, identify each location/guidance combination with

an alphabetical suffix beginning at the end of the alphabet; e.g., **COPTER RNAV (GPS) Z RWY 22 (first procedure), COPTER RNAV (GPS) Y RWY 22 (second procedure), COPTER RNAV (GPS) X RWY 22 (third procedure)**. Identify the procedure with the lowest minimums will be identified with “Z” and the next lowest “Y.”

2.6 General Airspeed, Tailwind, Bank Turn Radius

2.6.1 True Airspeed. Find *true airspeed* (V_{KTAS}) using *formula 2-1*.

Formula 2-1. True Airspeed. (V_{KTAS}).		
$V_{KTAS} = \frac{V_{KIAS} \cdot 171233 \cdot \sqrt{(288 + 15) - 0.00198 \cdot \text{alt}}}{(288 - 0.00198 \cdot \text{alt})^{2.628}}$		
where alt = Helicopter MSL Altitude V_{KIAS} = knots indicated airspeed		
$(V_{KIAS} * 171233 * ((288 + 15) - 0.00198 * \text{alt})^{0.5}) / (288 - 0.00198 * \text{alt})^{2.628}$		
Calculator		
V_{KIAS}		Click here to calculate
alt		
V_{KTAS}		

2.6.2 Tailwind. Calculate *tailwind component* (V_{KTW}) using *formula 2-2*.

Formula 2-2. Tailwind. (V_{KTW}).		
$V_{KTW} = 0.00198 \cdot \text{alt} + 47$		
where alt = highest turn altitude		
<i>Note: If "alt" is 2000 or less above airport/heliport elevation, $V_{KTW} = 30$</i>		
$0.00198 * \text{alt} + 47$		
Calculator		
		Click here to calculate
alt		
V_{KTW}		

2.6.2 a. Apply tailwind component values as follows.

En route: Apply the formula to the highest *MSL* elevation of each segment.

Terminal area and the missed approach, and departure segments:

Apply a 30-knot tailwind component from heliport or airport elevation up to and including 2,000 ft above heliport or airport elevation. For departure and missed approach procedure wind spirals, apply a 30-knot tailwind component. Above

2,000-ft altitude above heliport or runway elevation, excluding wind spiral turns, apply the wind component formula for the highest *MSL* altitude of the procedure.*

**Note: Other tailwind gradients may be required after a site-specific determination of wind based on that location's meteorological history (using available information from other sources). Where a different value is used it must be recorded in the procedure documentation.*

2.6.3 Bank Angles. Apply bank angles as specified in *table 2-2*.

Table 2-2. Bank Angles.		
Knots True Airspeed (KTAS)	< 90	≥ 90
Bank Angle (In degrees)	11.0	14.0

2.6.4 Turn Radius (R) Calculations.

The design turn radius value is based on four variables: indicated airspeed, assumed tailwind, altitude, and bank angle. Apply the indicated airspeed of 70 or 90 *KIAS* as appropriate for the highest speed helicopter that will be published on the approach procedure. Apply the highest expected turn altitude value. The bank angle is 11.0 degrees or 14.0 degrees as appropriate.

For missed approach, project a vertical path along the nominal flight track from the *start of climb (SOC)* point and altitude to the turn fix that rises at a gradient of 400 ft/*NM* (3.77 degrees), or a steeper *climb gradient (CG)* if specified. For turn at altitude construction, determine the V_{KTAS} calculation altitude based on the climb-to-altitude plus an additive based on a continuous 400 ft/*NM* (or higher *CG* climb for each 12 degrees (or portion) of turn [ϕ^* (400 or higher *CG*)/12], (not to exceed the missed approach altitude). Add 900 ft for a turn of 27 degrees and add 3,000 ft for a turn of 90 degrees. The turn and/or calculation altitude must not be higher than the published missed approach altitude.

2.6.4 a. Calculating Turn Radius.

Step 1: Using the highest altitude in the turn, determine the *knots true airspeed (KTAS)* for the turn using *formula 2-1*. Apply the *knots indicated airspeed (KIAS)* and the appropriate bank angle from *table 2-2*.

Note: Apply the highest segment airspeed intended to be published, and the highest altitude in the turn..

Step 2: Calculate the appropriate *tailwind component* (V_{KTW}) using *formula 2-2* for the highest altitude within the turn. **EXCEPTION:** If the *MSL* altitude is 2,000 ft or less above airport elevation, use 30 knots.

Step 3: Calculate *radii* (R) using *formula 2-3*.

Formula 2-3. Turn Radius.		
$R = \frac{(V_{KTAS} + V_{KTW})^2}{\tan\left(\text{bank}_{\text{angle}} \cdot \frac{\pi}{180}\right) \cdot 68625.4}$		
where $\text{bank}_{\text{angle}}$ = assumed bank angle (normally 11° or 14°)		
$(V_{KTAS} + V_{KTW})^2 / (\tan(\text{bank}_{\text{angle}} \cdot \pi / 180) \cdot 68625.4)$		
Calculator		
V_{KTAS}	<input type="text"/>	Click here to calculate
V_{KTW}	<input type="text"/>	
$\text{bank}_{\text{angle}}$	<input type="text"/>	
R	<input type="text"/>	

2.7 Turn Construction.

If the outbound course from a fix differs from the inbound course (measured at the fix), a turn is indicated.

2.7.1 Turns at Fly-Over Fixes (see figures 2-1 and 2-2). Turns at Fly-By Fixes (see figure 2-3).

- 2.7.1 a. Extension for Turn Delay.** Turn construction incorporates a *delay* (rr) in start of turn to account for pilot reaction time and roll-in time. Calculate the extension distance in feet using the *formulas 2-4 and 2-5* for terminal and en route segments respectively:

Terminal area segments: (approach, departure, missed):

Formula 2-4. Turn Delay (Terminal Area).		
$rr = 6 * \frac{1852}{3600} * 0.3048 * (V_{KTAS} + V_{KTW})$		
Where V_{KTW} = Tailwind Component (<i>see formula 2-2</i>) V_{KTAS} = True Airspeed (<i>see formula 2-1</i>)		
$6 * (1852 / 0.3048 / 3600) * (V_{KTW} + V_{KTAS})$		
Calculator		
V_{KTW}		Click here to calculate
V_{KTAS}		
rr		

Note: 6 second delay.

En route and feeder segments:

Formula 2-5. Turn Delay (En Route, Feeder).		
$rr = 8 * \frac{1852}{3600} * 0.3048 * (V_{KTAS} + V_{KTW})$		
$8 * (1852 / 0.3048 / 3600) * (V_{KTW} + V_{KTAS})$		
Calculator		
V_{KTW}		Click here to calculate
V_{KTAS}		
rr		

Note: 8 second delay.

Step 1: Determine Turn Radius (**R**) using *formula 2-3*.


Step 2: Determine **rr** using *formula 2-4 or 2-5*.

Step 3: Establish the turn expansion area construction baseline perpendicular to the inbound track at a distance equal to (**ATT** + **rr**) past the turn fix.

Step 4: On the baseline, locate the center points for the primary and secondary turn boundaries. The first is located at a distance **R** from the non-turning side primary boundary. The second is located at a distance **R** from the turning side secondary boundary (*see figures 2-1 and 2-2*).


Step 5: From these center points construct arcs of radius R . Complete the secondary boundary by constructing additional arcs of radius $(R+W_S)$ from the same centers (W_S =width of the secondary). See figure 2-2.

Step 6: The arcs constructed in step 5 are tangent to the outer boundary lines of the inbound segment. Construct lines tangent to the arcs based on the first turn point tapering inward at an angle of 30 degrees relative to the outbound track that joins the arc primary and secondary boundaries with the outbound segment primary and secondary boundaries. If the arcs from the second turn point are inside the tapering lines as shown in figure 2-1, then they are disregarded and the expanded area construction is completed. If not, proceed to step 7.

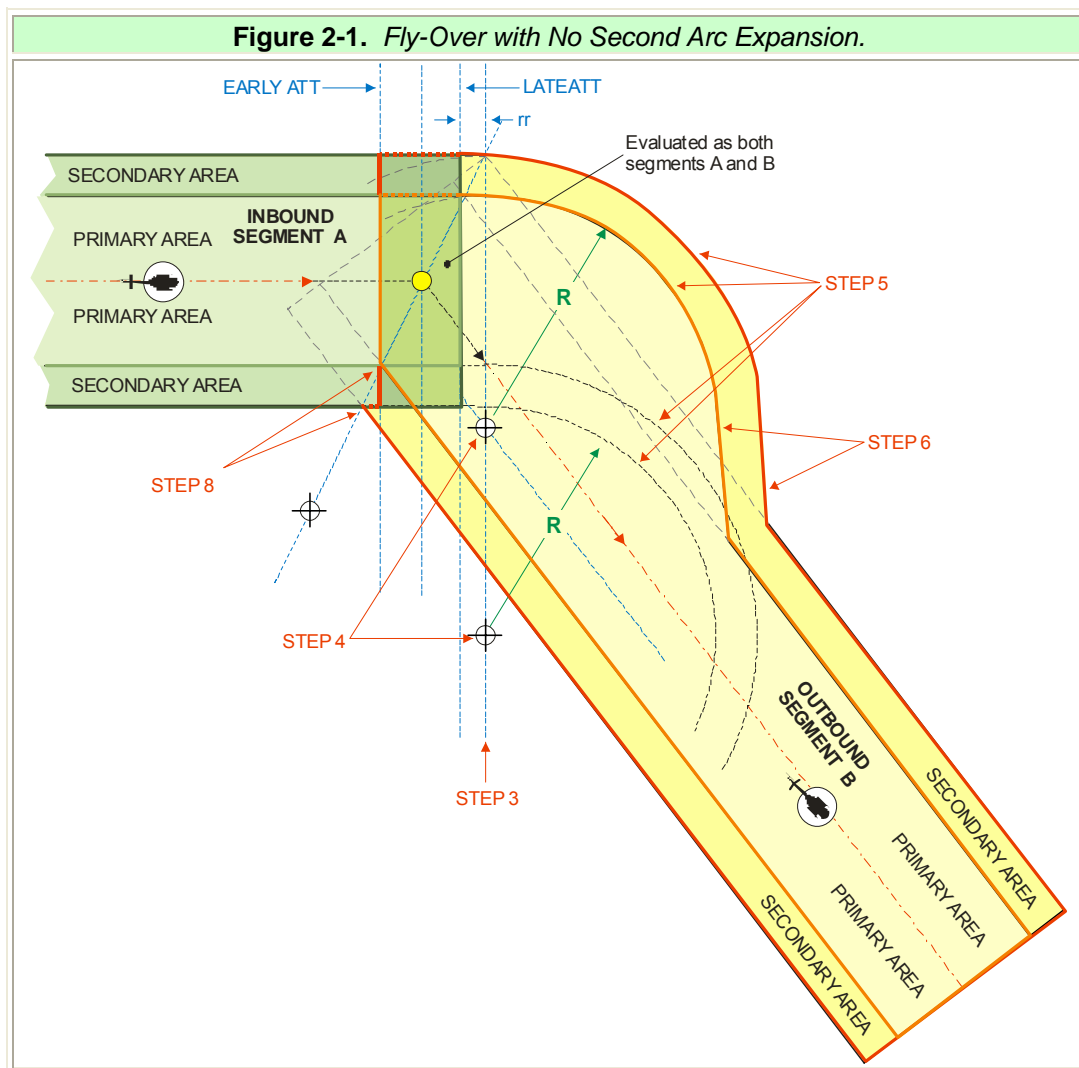

Step 7: If both the inner and outer arcs lie outside the tapering lines constructed in step 6, connect the respective inner and outer arcs with tangent lines and then construct the tapering lines from the arcs centered on the second center point as shown in figure 2-2.

Step 8: The inside turn boundaries are the simple intersection of the preceding and succeeding segment primary and secondary boundaries.

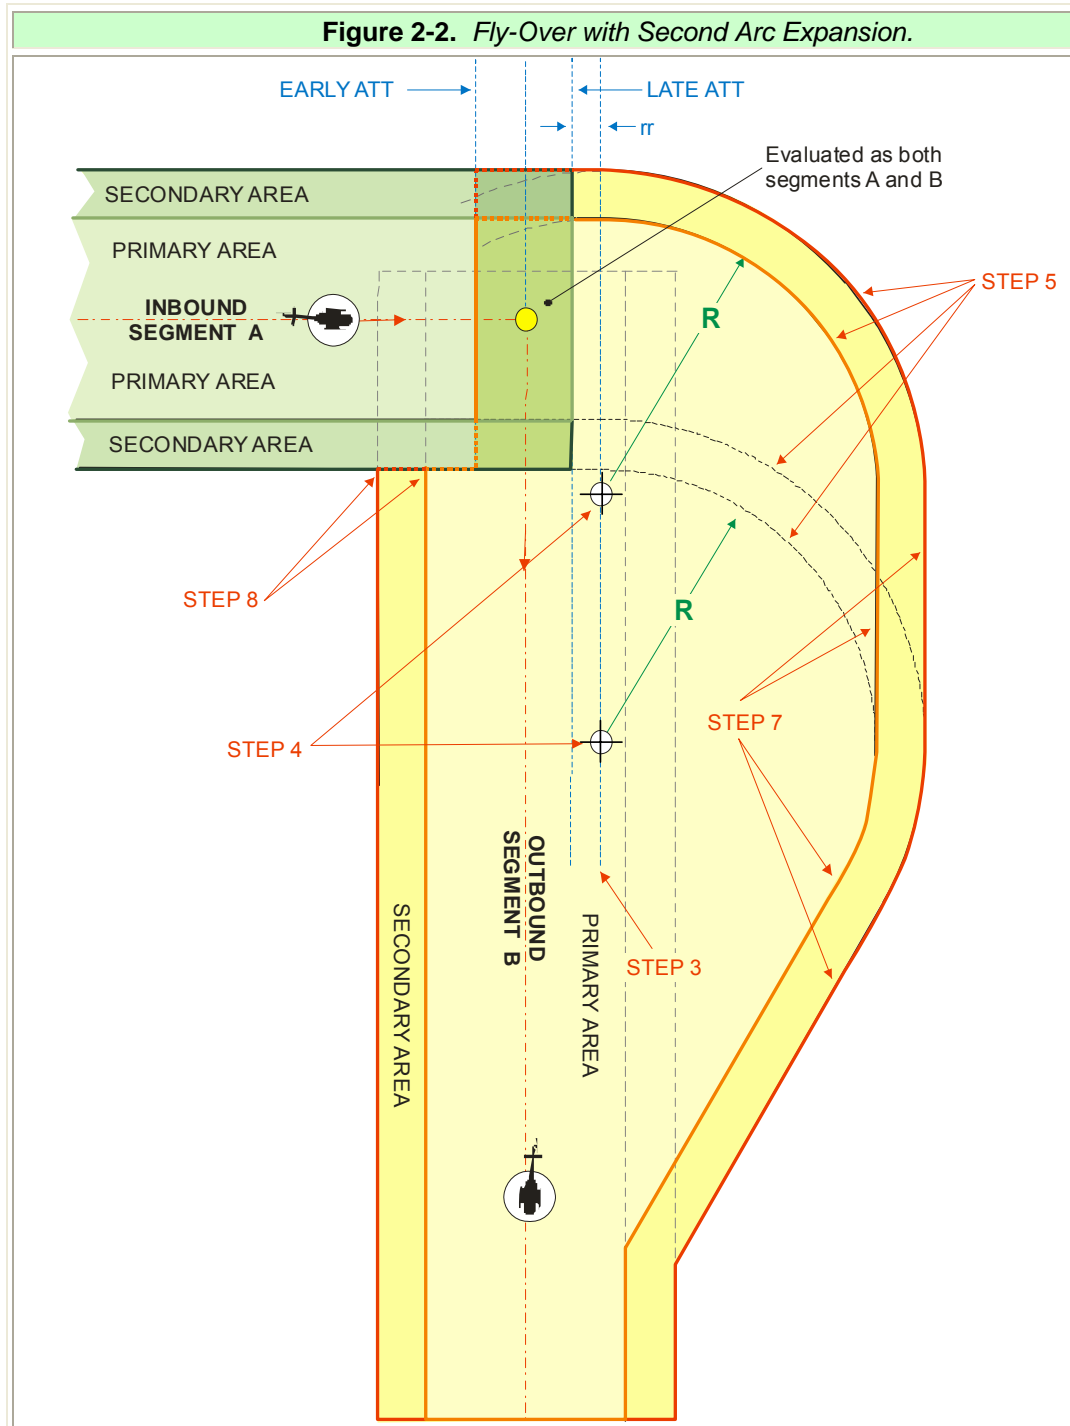

Evaluate the inbound **OEA** end ($\pm ATT$) for both inbound and outbound segments.

2.7.1


b. Minimum length of *track-to-fix (TF)* leg following a fly-over turn. The *TF* leg length following a fly-over turn must be sufficient to allow the aircraft to return to course centerline. Determine the minimum *leg length (L)* using *formulas 2-6 and 2-7.*

Formula 2-6. Distance of Turn Anticipation.		
$DTA = R \cdot \tan\left(\frac{\phi \cdot \pi}{2 \cdot 180}\right)$		
where R = turn radius from <i>formula 2-3</i> ϕ = degrees of heading change		
$R \cdot \tan(\phi / 2 \cdot \pi / 180)$		
Calculator		
R		Click here to calculate
ϕ		
DTA		

Formula 2-7. TF Leg Minimum Length Following Fly-Over Turn.

$$L = f1 \cdot \left(\cos\left(\phi \cdot \frac{\pi}{180}\right) + \sqrt{3} \cdot \sin\left(\phi \cdot \frac{\pi}{180}\right) \right) + R \cdot \left(\sin\left(\phi \cdot \frac{\pi}{180}\right) + 4 - \sqrt{3} - \sqrt{3} \cdot \cos\left(\phi \cdot \frac{\pi}{180}\right) \right) + DTA + f2$$

where R = turn radius (NM) from *formula 2-3*
 ϕ = degrees of track change at fix
 f1 = ATT (NM) of fly-over fix (segment initial fix)
 f2 = ATT (NM) of segment termination fix
 DTA = value from *formula 2-6* (applicable only if the fix is "fly-by")

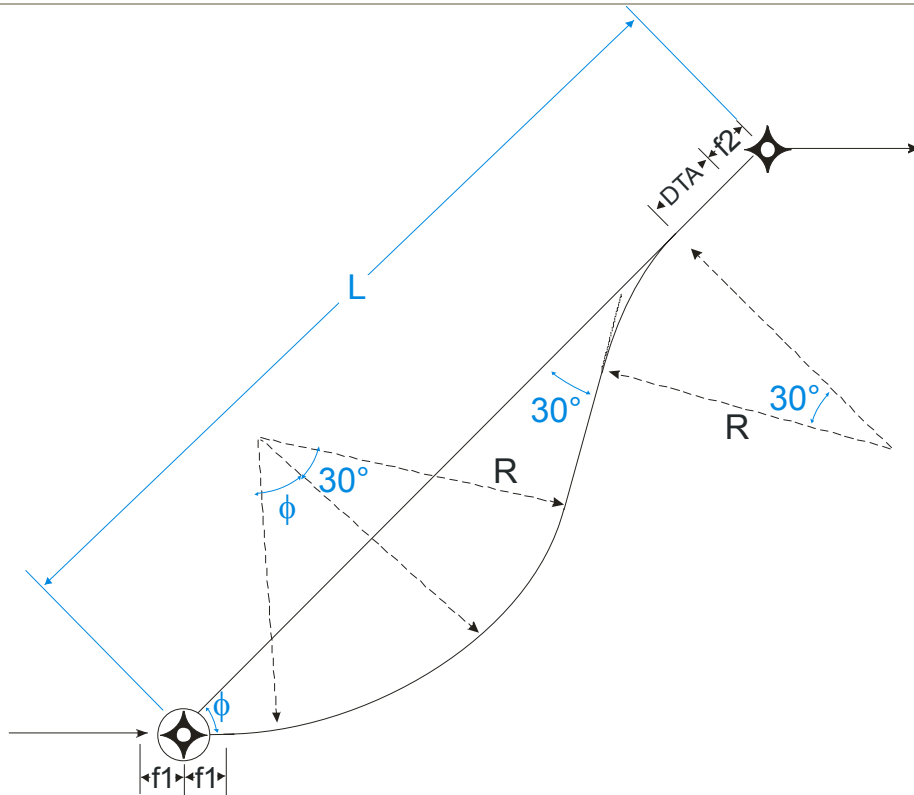

$$f1 * (\cos(\phi * \pi / 180) + 3^{0.5} * \sin(\phi * \pi / 180)) + R * (\sin(\phi * \pi / 180) + 4 - 3^{0.5} - 3^{0.5} * \cos(\phi * \pi / 180)) + DTA + f2$$

Calculator

f1	<input type="text"/>
f2	<input type="text"/>
ϕ	<input type="text"/>
R	<input type="text"/>
DTA	<input type="text"/>
L	<input type="text"/>

Click here to calculate

2.8 Fly-By Turn (see figure 2-3).


Step 1: Establish a line through the turn fix that bisects the turn angle. Determine *Turn Radius (R)* using *formula 2-3*. Scribe an arc (with origin on bisector line) of radius *R* tangent to inbound and outbound courses, creating the designed turning flight path.

Step 2: Scribe an arc (with origin on bisector line) that is tangent to each segment's inner primary boundary with a radius equal to $\frac{\text{Primary Area Half-width}}{2}$ (example: half width of 2 *NM*, the radius would be *R*+1.0 *NM*).

Step 3: Scribe an arc that is tangent to each segment's inner secondary boundary using the origin and radius from *step 2* minus the secondary width.

Step 4: Scribe the primary area outer turning boundary with an arc with a radius equal to the segment half width centered on the turn fix.

Step 5: Scribe the secondary area outer turning boundary with the arc radius from *step 4* plus the secondary area width centered on the turn fix.

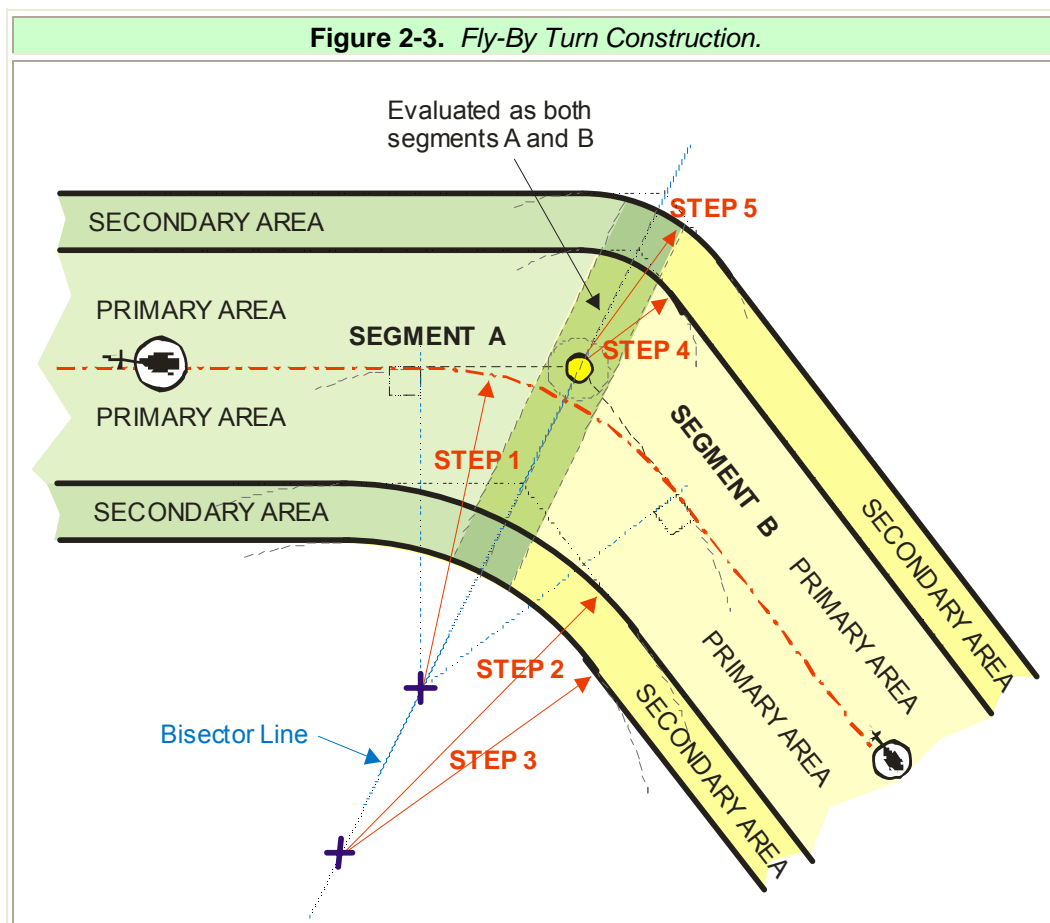

2.9 Minimum length of TF leg following a fly-by turn. Calculate the minimum length for a **TF** leg following a fly-by turn using *formula 2-8*.

Formula 2-8. TF Leg Minimum Length Following Fly-by Turn.

$L = f1 + DTA1 + DTA2 + f2$

where $f1$ = ATT of initial fix
 $f2$ = ATT of termination fix
 $R1$ = turn radius for first fix from *formula 2-3*
 $R2$ = turn radius for subsequent fix from *formula 2-3* Note: zero when $\phi2$ is fly-over
 $\phi1$ = degrees of heading change at initial fix
 $\phi2$ = degrees of heading change at termination fix

$DTA1 = R1 \cdot \tan\left(\frac{\phi1}{2} \cdot \frac{\pi}{180}\right)$

$DTA2 = R2 \cdot \tan\left(\frac{\phi2}{2} \cdot \frac{\pi}{180}\right)$ Note: zero when $\phi2$ is fly-over


$F1+DTA1+DTA2+F2$

Calculator

f1		<p>Click here to calculate</p>
f2		
R1		
R2		
$\phi1$		
$\phi2$		
DTA1		
DTA2		
L		

2.10 Calculating Descent Gradient (DG).

Determine total altitude lost between the plotted positions of the fixes. Divide the total altitude lost by *distance (D)* in *NM* to determine the segment descent gradient using *formula 2-9* (see *figure 2-4*).

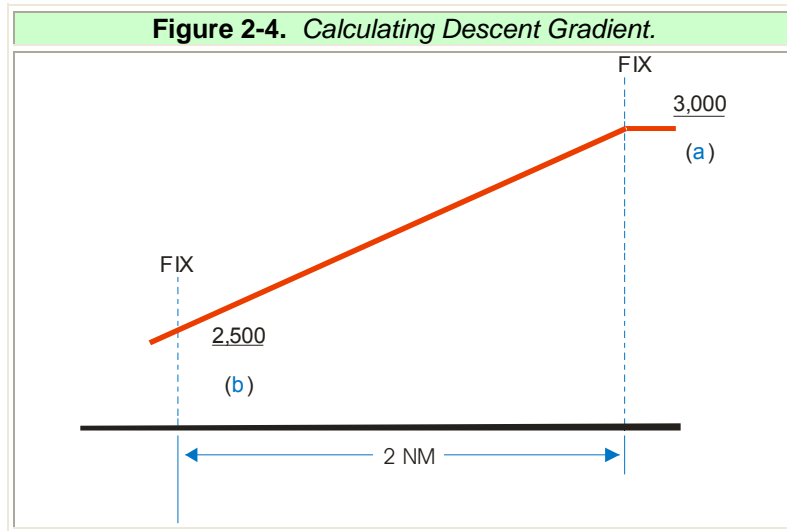

Formula 2-9. Descent Gradient.

$$DG = \frac{r \cdot \ln\left(\frac{r+a}{r+b}\right)}{D}$$

where a = beginning altitude
 b = ending altitude
 D = distance (NM) between fixes
 r = 20890537

(r*ln((r+a)/(r+b)))/D


Calculator	
a	
b	
D	
DG	

Click here to calculate

2.11 Missed Approach Segment (MAS) Conventions.

Figure 2-5 defines the **MAP** point **OEA** construction line terminology and convention for section 1. The missed approach obstacle clearance standard is based on a minimum helicopter climb gradient of 400 ft/**NM**, protected by a **required obstacle clearance (ROC)** surface that rises at 304 ft/**NM**. The **MA ROC** value is based on a requirement for a 96 ft/**NM** (400-304 = 96) increase in

ROC value from the *start-of-climb (SOC)* point located at ***JK*** (***AB*** for ***LPV***). The actual slope of the **MA** surface is $(1 \text{ NM in feet})/304 \approx 19.987$. In manual application of **TERPS**, the rounded value of 40:1 has traditionally been applied. However, this order is written for automated application; therefore, use the full value (to 15 significant digits) in calculations. The nominal **OCS** slope (**MA_{OCSslope}**) associated with any given missed approach climb gradient is calculated using *formula 2-10*.

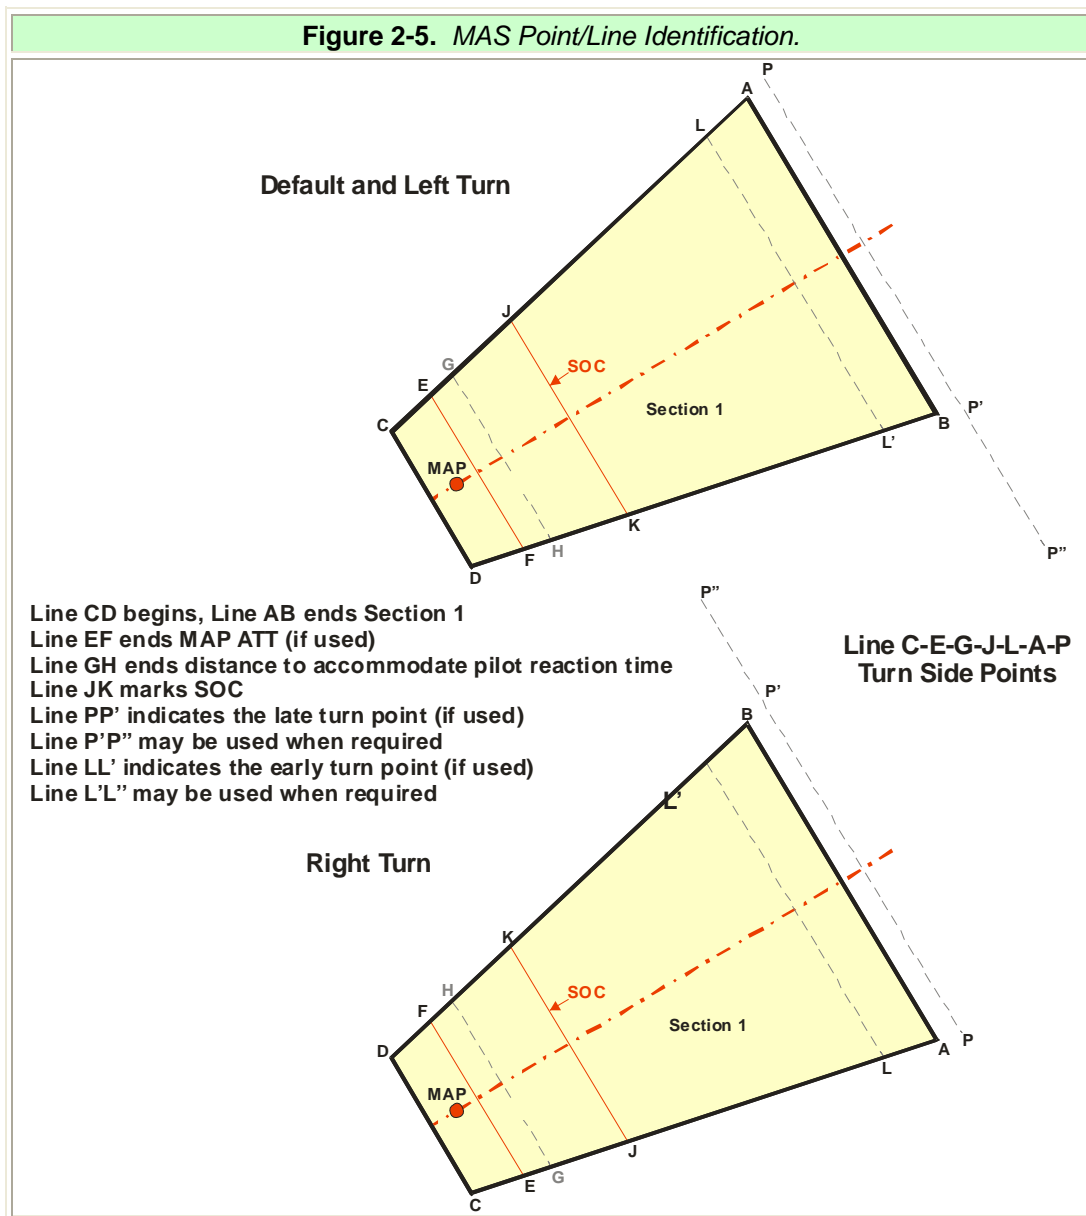

Formula 2-10. Missed Approach OCS Slope.		
$MA_{OCSslope} = \frac{1852}{0.3048 \cdot (CG - 96)}$		
where CG = Climb Gradient (nominally 400 ft/NM)		
1852/(0.3048*(CG-96))		
Calculator		
CG		Click here to calculate
MA _{OCSslope}		

2.11.1 Charted Missed Approach Altitude.

Apply **TERPS Volume 1, paragraphs 277d and 277f** to establish the preliminary and charted missed approach altitudes.

2.11.2 Climb-In-Holding.

Apply **TERPS Volume 1, paragraph 277e** for climb-in-holding guidance.


Chapter 3. Special En Route Criteria

3.0 General.

A helicopter en route segment begins at an en route fix and ends at an en route fix, feeder fix, or an *initial approach fix (IAF)*. The basic en route obstacle protection areas contain a primary area width of ± 3.0 *nautical mile (NM)* from centerline and a 1.0 *NM* secondary area (see figure 3-1). The secondary is attached to the primary boundary.

Route width reductions (after full expansion), along routes contained in the data base are authorized where special procedures network departures and arrivals. Minimum *Global Positioning System (GPS)* route width is ± 2.0 *NM* primary and 0.5 *NM* secondary, minimum *Wide Area Augmentation System (WAAS)* route width is ± 1.5 *NM* primary and 0.5 *NM* secondary. These routes must be flown using terminal mode with a *Course Deviation Indicator (CDI)* scale of ± 1 *NM*. These procedures require *operations specifications (OpSpec)* approval or a *Letter of Authorization (LOA)* and must be noted on *FAA Form 8260-10*.

The required angle of turn connecting en route segments to other en route, feeder, or initial approach segments must not exceed 90 degrees. The **MAXIMUM** route segment length is 65 *NM*. Conditions and limitations for operations on these special *GPS* airways are contained in *appendix 1*. Apply *chapter 2* turn expansion criteria.

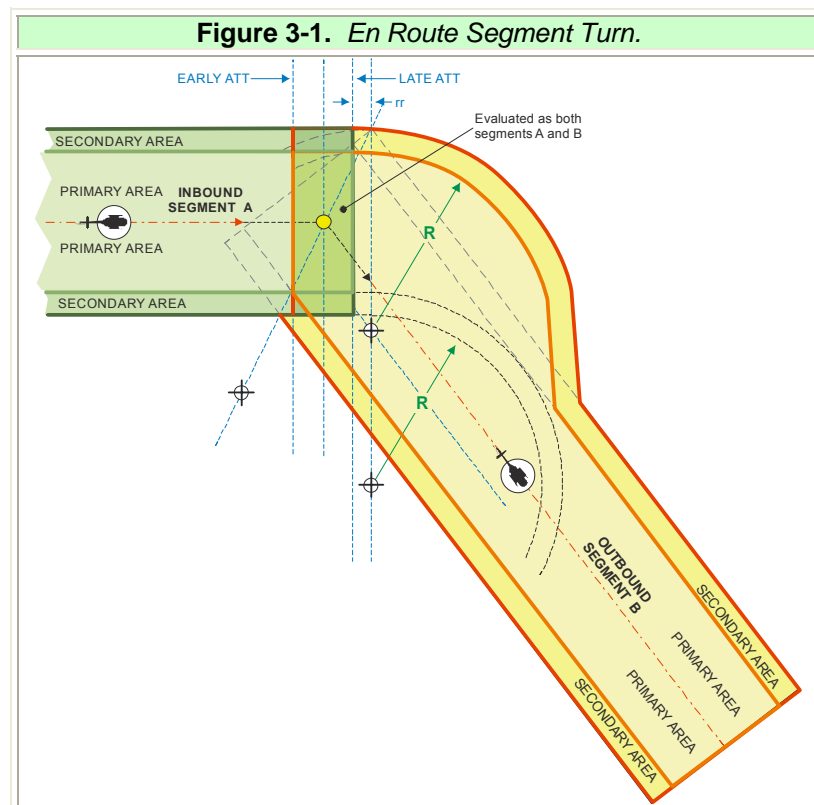


3.1 Required Obstacle Clearance (ROC).

3.1.1 Primary Area.

Apply 1,000 ft (2,000 ft in designated mountainous terrain) of **ROC** in the primary area (see figure 3-2).

3.1.2 Secondary Area.

The secondary area **ROC** tapers from 500 ft at the primary boundary to zero feet at the outer edge for non-mountainous areas (see figure 3-2). The secondary area **ROC** tapers from 500 ft at the primary boundary to 1,000 ft at the outer edge for designated mountainous areas (see figure 3-3).

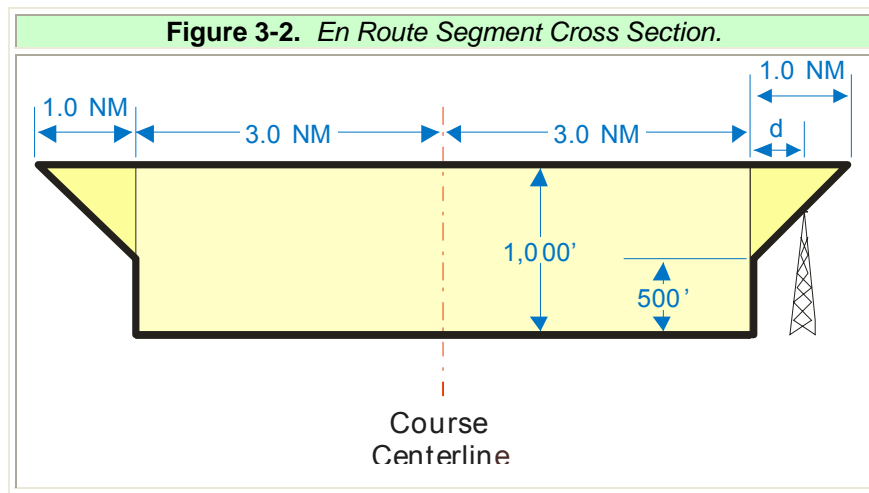

3.1.2 a. ROC Formula Secondary Area/Non-Mountainous. Apply formula 3-1 to determine the secondary **ROC** in non-mountainous areas at a given distance "d" in feet from the primary boundary line to the obstacle (round to nearest foot increment):

Formula 3-1. Secondary ROC.		
$ROC_{secondary} = 500 \cdot \left(1 - \frac{d}{D}\right)$		
where D = width (ft) of secondary d = distance (ft) from edge of primary area measured perpendicular to boundary		
500*(1-d/D)		
Calculator		
d		Click here to calculate
D		
ROC _{secondary}		

3.1.2

b. ROC Formula Secondary Area/Mountainous. Apply the following formula to determine the secondary **ROC** in designated mountainous areas in accordance with Part 95 (see figure 3-3). Areas at a given distance “d” in feet from the primary boundary line in mountainous areas are determined by the following formula:

Formula 3-2. ROC in Secondary.		
$ROC_{\text{secondary}} = 500 \cdot \left(1 - \frac{d}{D}\right) + 1000$		
where D = width (ft) of secondary d = distance (ft) from edge of primary area measured perpendicular to boundary		
$500 \cdot (1 - d/D) + 1000$		
Calculator		
d		Click here to calculate
D		
ROC _{secondary}		


3.1.2

c. The ROC additive may be reduced to a MINIMUM of 500 ft resulting in 1,500 ft **ROC** above terrain in the designated mountainous areas of the Eastern United States, Commonwealth of Puerto Rico, and the land areas of the State of Hawaii; and the additive may be reduced to a MINIMUM of 700 ft resulting in 1,700 ft above terrain in the designated mountainous areas of the Western United States and the State of Alaska. Consider the following points before altitudes providing less than 2,000 ft **ROC** are authorized.

- Areas characterized by precipitous terrain.
- Weather phenomena peculiar to the area.
- Phenomena conducive to marked pressure differentials.
- Availability of weather services throughout the area.
- Availability and reliability of altimeter resetting points along routes in the area.
- Following reduction, the minimum altitude must be at least 1,000 ft above manmade obstacles.

3.1.2

d. Altitude Selection. The altitudes selected for each segment must be established in 100-ft increments. The en route charted altitude may be rounded down when the computed altitude is 49 ft or less and must be rounded up when 50 ft or more, e.g., 1,549 ft may be charted as 1,500 ft and 1,550 ft must be charted as 1,600 ft.

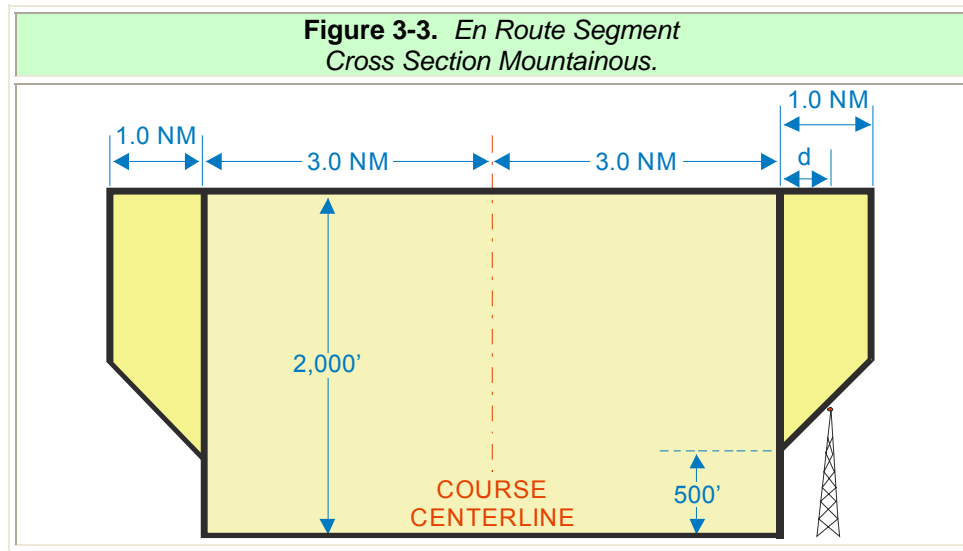

Order 8260.3B, Volume 1, paragraph 1720 may be applied to reduce **ROC** in designated mountainous areas.

3.1.3 Minimum Crossing Altitude (MCA).

Establish an **MCA** when an obstacle prevents a normal climb to a higher *minimum en route altitude (MEA)*. The normal climb gradient is shown in *table 3-1*. When a **MCA** is required, chart the required climb gradient and rate of climb on the en route chart.

Table 3-1. Normal Helicopter En Route Climb Gradient.		
Gradient Level (MSL)	Gradient	OCS Slope
at or below 5,000 ft	300 ft per NM	20.25:1
5,001 ft through 10,000 ft	240 ft per NM	25.3:1

The **MCA** computation is based on the distance from the nearest fix displacement tolerance line to the obstacle. The computation is rounded to the next higher 100-ft increment (*see figure 3-4 for an example of computing MCA*).


Note: The USA standard climb gradient is 400 ft/NM for all altitudes.

3.1.4 Determining MCA.

Apply *formula 3-3 and 3-4* for determining **MCA**:

Formula 3-3. Sea Level to 5,000 ft MSL.		
MCA = A-300·L		
Where:		
A = "Climb to" MSL Altitude		
L = Length of segment (NM)		
A-300*L		
Calculator		
A		Click here to calculate
L		
MCA		

Formula 3-4. Sea Level to 10,000 ft MSL.		
MCA = 5000 - 300(L - $\frac{A-5000}{240}$)		
Where:		
A = "Climb to" MSL Altitude		
L = Length of segment (NM)		
5000-300*(L-(A-500)/240)		
Calculator		
A		Click here to calculate
L		
MCA		

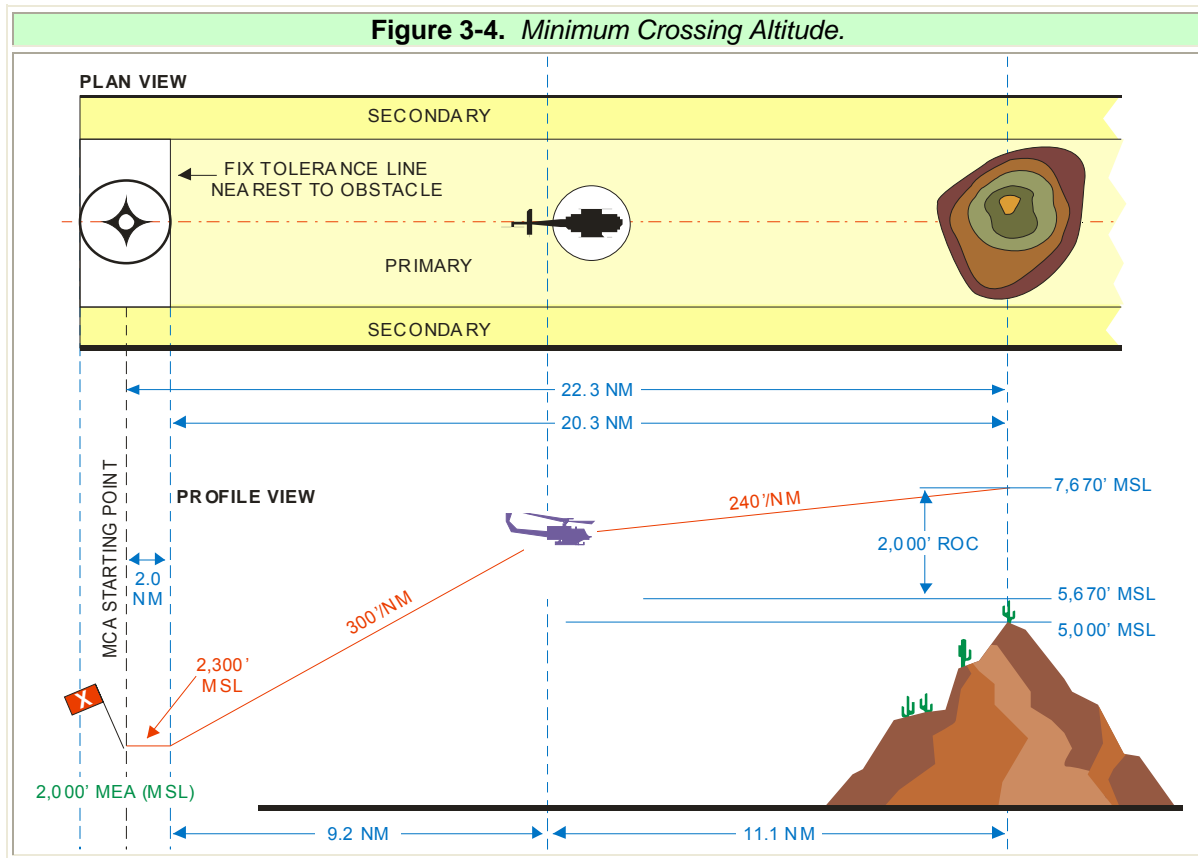

Step 1: Add 2,000 ft mountainous *ROC* to *MSL* height of obstacle:

Step 2: Apply *formula 3-4* to determine the *MCA*.


3.2 Feeder Segment Route Transitions from *GPS* to Terminal Route Widths.

3.2.1 Terminal Routes Between Airports/Heliports.

A departure waypoint can be connected to an *initial approach fix (IAF)* or *initial/intermediate fix (IF)* of an approach procedure to establish a terminal route for the entire feeder segment. Construct a primary terminal route width of $\pm 1.5 \text{ NM}$ and a secondary of 0.5 NM between a departure airport/heliport and arrival airport/heliport *IAF*. The departure route length and arrival route length must be less than 30 NM from the departure and arrival *airport reference point/heliport reference point (ARP/HRP)* [see figure 3-5, example 1]. The **MAXIMUM** route length is 60 NM between the departure *ARP/HRP* to the arrival *ARP/HRP*. Establish a changeover point *IAF*, usually mid-way between the departure and arrival *ARP/HRP*.

Note: For USA, limit turns in feeder segments to no greater than 60 degrees when designing *COPTER RNAV (GPS)* procedures.

- 3.2.2 Construct routes originating beyond 30 NM from the ARP/HRP.** (For simplicity, transition points are drawn in relation to the ARP/HRP).
- 3.2.2 a. Ending 30 NM or less from the ARP/HRP,** beginning with standard en route dimensions (primary area width of the ± 3.0 NM and a secondary width 1.0 NM) and tapering at a rate 30 degrees inward, relative to course to terminal criteria size, beginning at the latest point the feeder fix can be received (*see figure 3-5, example 2*).
- 3.2.2 b. If the distance from the plotted position** of the feeder fix to the plotted position of the next fix is less than 4.598 NM (tapered segment is less than 2.598 NM long), taper from the latest position the feeder fix can be received directly to the appropriate area edges abeam the plotted position of the next fix (*see figure 3-5, example 3*).

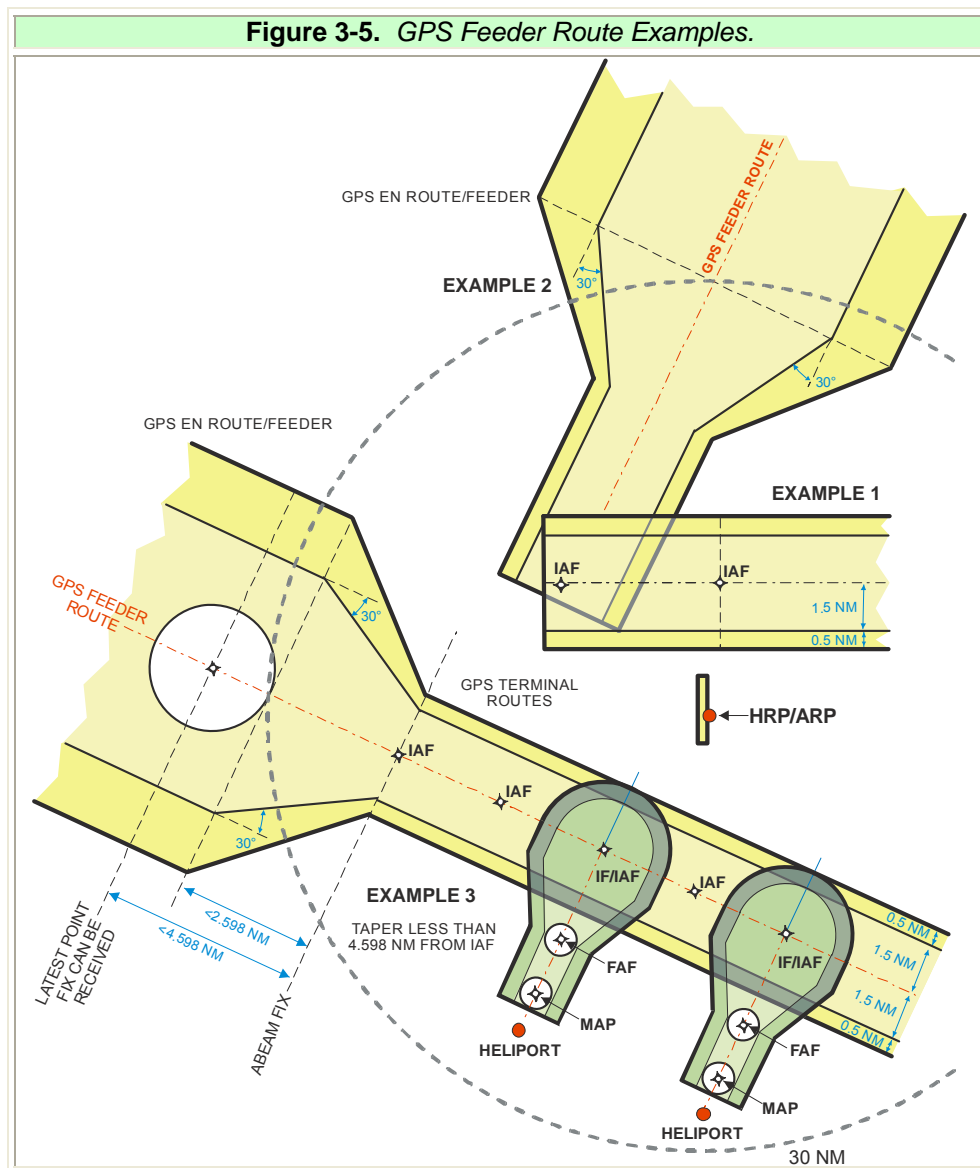

3.3 Descent Gradient.


The OPTIMUM descent gradient is (3.77 degrees) 400 ft *NM* and the MAXIMUM is (5.64 degrees) 600 ft/*NM*. Where higher descent gradients are required, *Order 8260.3B, Volume 1, paragraph 1110* applies.


Chapter 4. Terminal Operations

4.0 Approach Configuration.

Initial segment course widths are ± 1.5 *nautical miles (NM)* primary and 0.5 *NM* secondary. The BASIC “Y” or “T” approach configuration should be the basis of procedure design. Use initial and intermediate segment lengths, as specified in *table 4-1*, as the first option in procedure design. The **optimum** design incorporates the basic **Y** or **T** configuration. This design eliminates the need for a specific course reversal pattern. Where the **optimum** design cannot be used and a course reversal is required, establish a holding pattern at the initial or intermediate approach fix. See *paragraph 2.0*. The **maximum** course change at the fix *initial approach fix/initial fix (IAF/IF)* is 90 degrees. Design initial/initial and initial/intermediate *track-to-fix (TF)* segment intersections with the smallest amount of course change that is necessary for the procedure. No course change is **optimum**. Where a course change is necessary, it should normally be limited to 70 degrees or less; 30 degrees or less is preferred. The **maximum** allowable course change between *TF* segments is 90 degrees. Deviations from this configuration in shape and dimension should not be used for public procedures unless there is an operational advantage (*see figure 4-1*).

Note: For USA, limit turns in initial segments to a **MAXIMUM** of 60 degrees with a basic “Y” approach configuration when designing COPTER RNAV (GPS) procedures.

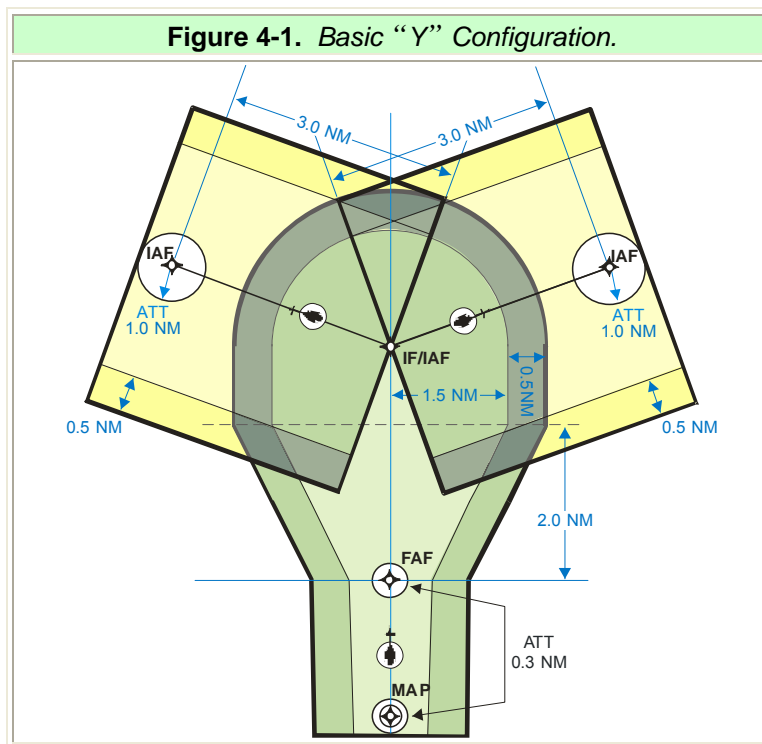

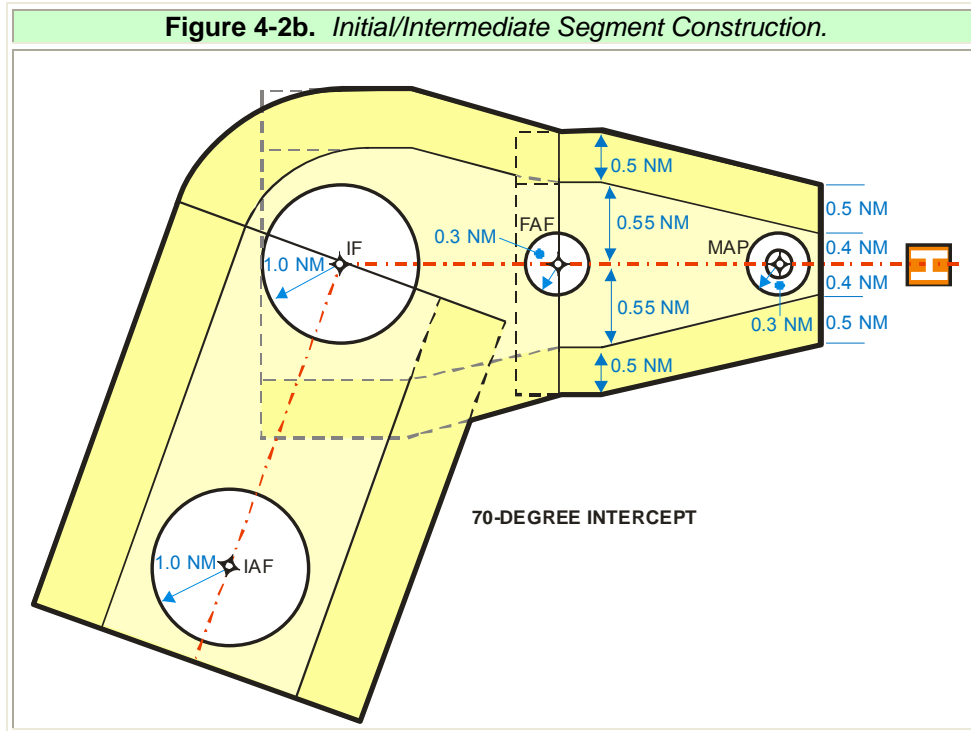

4.1.1 Area.

4.1.1 a. Length. The initial segment length should not exceed 10 *NM* unless operational requirements mandate a longer segment. Construct IAFs within 25 *NM* of the *airport reference point/heliport reference point (ARP/HRP)*. The MINIMUM length is governed by the turn magnitude required at the *IAF* (see *table 4-1*).

4.1.1 b. Width.


4.1.1 b. (1) Primary Area. 1.5 *NM* each side of the course centerline.

4.1.1 b. (2) Secondary Area. 0.5 *NM* on each side of the primary area.

4.1.2 Obstacle Clearance.

Provide a MINIMUM of 1,000 ft of *required obstacle clearance (ROC)* in the primary area. In the secondary area, provide 500 ft of *ROC* at the inner edge, tapering uniformly to zero at the outer edge (see *figure 4-3*). Calculate the secondary *ROC* using the following *formula 4-1*:

Formula 4-1. Secondary ROC.		
$ROC_{\text{secondary}} = 500 \cdot \left(1 - \frac{d}{D}\right)$		
where D = width (ft) of secondary d = distance (ft) from primary area edge, measured perpendicular to boundary		
500*(1-d/D)		
Calculator		
d		Click here to calculate
D		
ROC _{secondary}		

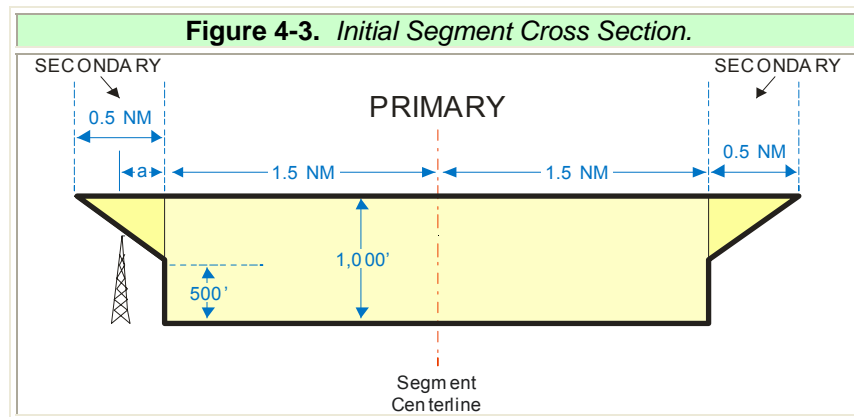

Establish initial segment altitudes in 100-ft increments. The charted altitude may be rounded down when the computed altitude is 49 ft or less and must be rounded up for an altitude of 50 ft or more; e.g., 1,549 ft may be charted as 1,500 ft and 1,550 ft must be charted as 1,600 ft*. However, do not round down below 1,000 ft of **ROC**.

*Allowance for precipitous terrain should be made as specified in *Order 8260.3B, Volume 1, paragraph 3.2.2b*.

4.1.3 Descent Gradient for *Initial* and *Intermediate* Segments.

The OPTIMUM descent gradient/angle is 400 ft/NM (3.77 degrees) and the recommended MAXIMUM is 600 ft/NM (5.64 degrees). Where higher descent gradients are required, *Order 8260.3B, Volume 1, paragraph 1110* applies.

4.2 Intermediate Segment.

The intermediate segment begins at the **IF** and ends at the **FAF**. The intermediate segment is used to prepare the helicopter speed and configuration for

final approach segment entry, therefore the gradient should be as flat as possible. If a descent is required, the OPTIMUM descent gradient/angle is 400 ft/**NM** (3.77 degrees) and the recommended maximum is 600 ft/**NM** (5.64 degrees). At a point beginning 2.0 **NM** from the **FAF**, construct a taper to accommodate the *course deviation indicator (CDI)* scaling and integrity change from terminal to approach mode.

4.2.1 Alignment.

The MAXIMUM course change at the **FAF** is 60 degrees.

4.2.2 Area.

4.2.2 a. **Length.** MAXIMUM length is 5.0 **NM**. OPTIMUM length is 3.0 **NM**. The MINIMUM length is governed by the turn magnitude required at the **IF** and the segment descent requirement (*see table 4-1*).

4.2.2 b. **Width.** The primary area is 1.5 **NM** each side of the segment centerline, beginning at the earliest **IF** position. The segment taper begins 2.0 **NM** prior to the plotted position of the **FAF** to reach a ± 0.55 **NM*** width at the **FAF** plotted position (*see figures 4-2a and 4-2b*). The secondary area is 0.50 **NM** each side of the primary area.

Note:* USAF/USA/USCG/USN operating at 90 KIAS: Change 0.55 **NM to 0.70 **NM**.

4.2.3 Obstacle Clearance.

Provide a MINIMUM of 500 ft of **ROC** in the primary area. In the secondary area, provide 500 ft of **ROC** at the inner edge tapering to zero feet at the outer edge. Establish altitudes for each intermediate segment in 100-ft increments, and round to the next higher 100-ft increment. Calculate the secondary **ROC** using *formula 4-2 (see figure 4-4)*.

Formula 4-2. Intermediate Secondary ROC.


$$ROC_{secondary} = (500 + adj) \cdot \left(1 - \frac{d_{primary}}{W_s} \right)$$

where $d_{primary}$ = perpendicular distance (ft)
 from primary area edge
 W_s = Width of the secondary area
 adj = TERPS para 323 adjustments

$(500+adj) \cdot (1-d_{primary}/W_s)$

Calculator

$d_{primary}$		Click here to calculate
W_s		
adj		
$ROC_{secondary}$		

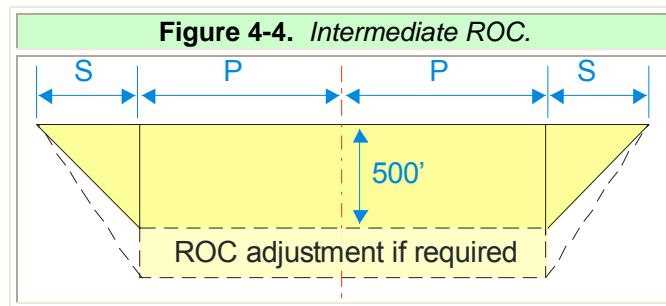

Allowance for precipitous terrain should be made as specified in *Order 8260.3B, Volume 1, paragraph 323a*.

Chapter 5. IFR Final and Visual Segments

5.0 General.

The approach procedure type is determined by the visual segment. The *instrument flight rule (IFR) final approach segment (FAS)* applies to all five types of procedures.

5.1 The five procedure types are:

- *IFR* to an *IFR* Heliport.
- *IFR* to a *VFR* Heliport (*IVH*) (Proceed Visually)
- *IFR* to a *VFR* Runway (*IVR*) (Proceed Visually)
- *Point-in-Space (PinS)* Approach (Proceed *VFR*)
- *IFR* to an *IFR* Runway


5.2 *IFR* Final Segment.

The *IFR FAS* begins at the *final approach fix (FAF)* and ends at the *missed approach point (MAP)* (see figure 5-1). *MAP* location should provide the best compromise of lowest visibility and *visual segment descent angle (VSDA)*. The OPTIMUM distance for the “Proceed Visually” *MAP* is 0.65 *nautical mile (NM)* [3/4 statute mile (*SM*) visibility] from the heliport.

5.2.1 Configuration and Alignment.

Preferred approach/departure paths should be aligned with the prevailing wind direction to avoid downwind and minimize crosswind operations. To accomplish this, a heliport should have more than one approach/departure path and the preferred flight approach/departure path should, to the extent feasible, be aligned with the prevailing wind. Other approach/departure paths should be based on the assessment of the prevailing winds or when this information is not available, the separation between such flight paths and the preferred flight path should be at least 135 degrees.

The *IFR* final segment alignment is from the *FAF* to the *MAP*. For a straight-in approach, the alignment must not exceed 30 degrees MAXIMUM turn at the *FAF* without special approval. The *MAP* is located on the *final approach course (FAC)* between the *FAF* and a point no closer to the heliport than 0.3 *NM* from the *visual segment reference line (VSRL)*. *MAP* location should provide the best compromise of lowest visibility and visual segment descent angle. For a straight-in approach, the alignment must not exceed 30 degrees to a heliport for an approach to an *IFR* heliport or 30 degrees from *runway centerline (RCL)* extended to an *IFR runway threshold (RWT)*. Optimum alignment is coincident with the *RCL*. When the alignment exceeds 5 degrees the optimum alignment point is 1,500 ft from the *RWT* on *RCL*.

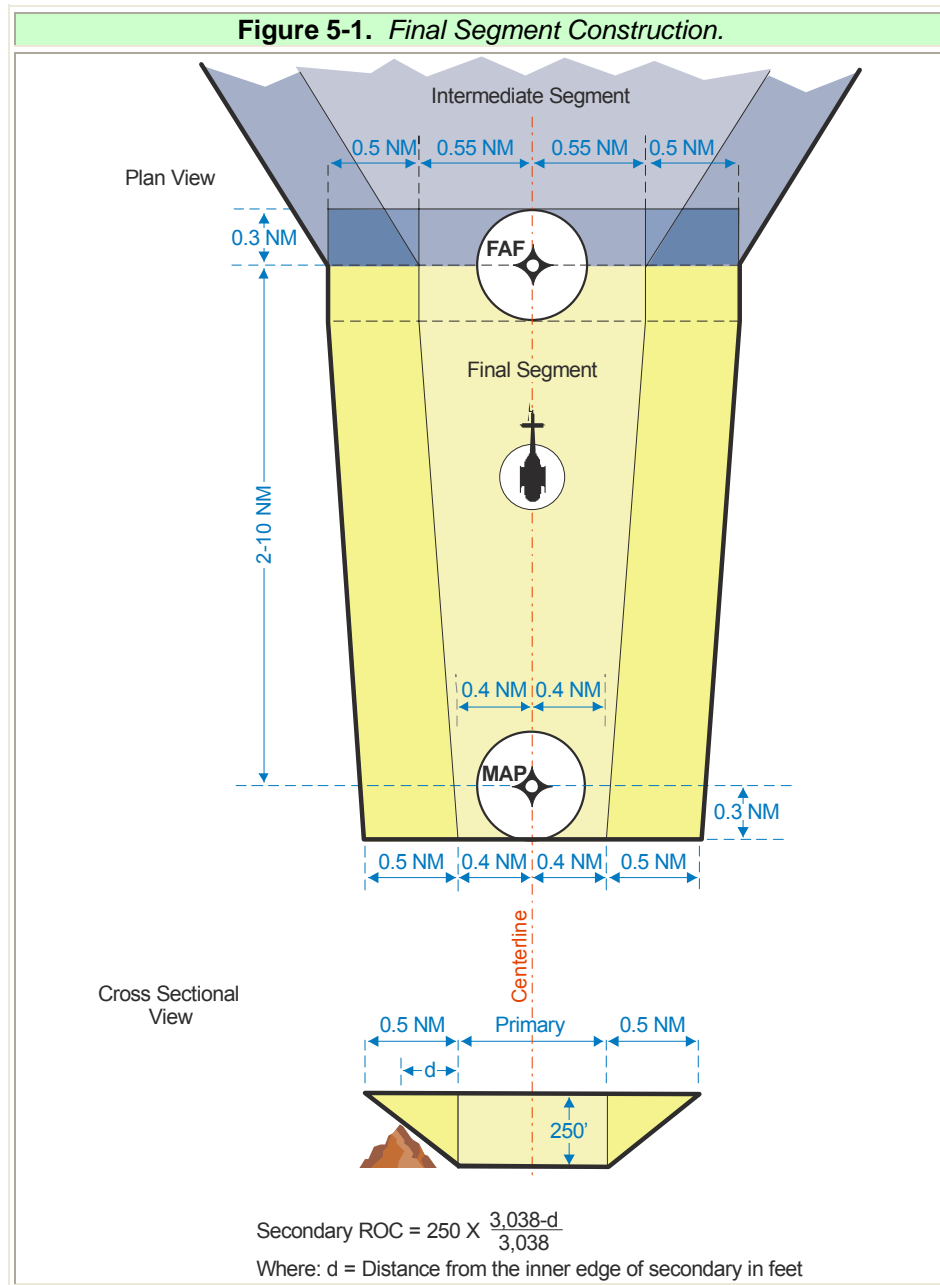

- 5.2.1 a. Area.** The area considered for obstacle clearance begins at the earliest *FAF along-track tolerance (ATT)* and ends at the latest *MAP ATT* (see figure 5-1).
- 5.2.1 b. Length.** The OPTIMUM length is 3 NM. The MINIMUM length (*FAF to MAP*) is 2 NM (3 NM when a step down fix is established for public procedures). The MINIMUM length is also governed by the required *FAF* turn magnitude (see table 4-1) and descent gradient. The MAXIMUM length is 10 NM.
- 5.2.1 c. Width.** The primary area boundary begins 0.55 NM* each side of the final segment centerline at the earliest *FAF ATT*. The width remains constant until the

latest **FAF ATT**. It then tapers to 0.40 **NM*** at the latest **MAP ATT**. The secondary area boundary is constant, 0.50 **NM** each side of the primary area. Calculate the primary half-width at any distance from latest **MAP ATT** using *formula 5.1a*.

Formula 5-1a. Final Area Half-Width.(W _p)		
$W_p = P_{w2} + \left(\frac{P_{w1} - P_{w2}}{D_1} \right) \cdot D_2$		
Where P _{w1} = Primary Width, FAF, (0.55 or 0.7) NM P _{w2} = Primary Width, latest MAP ATT, (0.4 or 0.5) NM D ₁ = FAF to MAP distance (NM) D ₂ = Latest MAP ATT to desired point (NM) W _T = Final Total Width (ft) (WP+0.5NM)		
$P_{w2} + ((P_{w1} - P_{w2}) / D_1) * D_2$		
Calculator		
P _{w1}		Click here to calculate
P _{w2}		
D ₁		
D ₂		
W _p (NM)		
W _p (ft)		
W _T (ft)		

**Note: USAF/USA/USCG/USN operating at 90 KIAS: Change 0.55 NM to 0.70 NM and 0.4 0NM to 0.50 NM (primary area).*

5.2.2 Required Obstacle Clearance.

Primary area *required obstacle clearance (ROC)* is 250 ft. Secondary **ROC** is 250 ft at the edge of the primary area, tapering uniformly to zero at the outer edge. Calculate secondary **ROC** using *formula 5-1b*.

Formula 5-1b. Secondary Area ROC ($ROC_{secondary}$).		
$ROC_{secondary} = (250 + adj) \cdot \left(1 - \frac{d_{primary}}{W_s}\right)$		
Where adj = TERPS para 323 adjustments $d_{primary}$ = distance (perpendicular to C/L from primary area (ft)) W_s = Secondary area width (ft)		
$(250+adj) \cdot (1-d_{primary}/W_s)$		
Calculator		
adj		Click here to calculate
$d_{primary}$		
W_s		
$ROC_{secondary}$		

5.2.2

a. Descent Gradient/Angle (\angle) (figure 5-2a). For *IVH*, *PinS*, and *IVR approaches*, the descent gradient/angle is measured from the plotted positions of the *FAF* at *FAF* altitude to the *MAP* at *MDA*. Calculate the final segment descent gradient/angle using *formula 5-2*:

Formula 5-2 Final Approach Angle to MAP (DescentAngle).		
$DescentAngle = \tan^{-1}\left(\frac{r}{c} \cdot \ln\left(\frac{r+a}{r+b}\right)\right) \cdot \frac{180}{\pi}$		
Where:		
c = FAF to MAP distance (ft)		
a = FAF altitude MSL		
b = MDA at MAP MSL		
r = 20890537 earth mean radius		
$\tan^{-1}(r/c \cdot \ln((r+a)/(r+b))) \cdot 180/\pi$		
Calculator		
c		Click here to calculate
a		
b		
Descent Angle		

MAXIMUM: 800 ft/*NM* (7.5 degrees).

Note 1: USA MAXIMUM descent gradient/angle is 478 ft/*NM* (4.5 degrees) without a waiver.

Note 2: The visual segment descent gradient is considered separately in approaches to **VFR** heliports or **VFR** runways.

5.2.2

b. Descent Gradient/Angle to an IFR Runway or an IFR Heliport. Apply the same descent gradient/ angle in *paragraph 5.2.2a* for an **IFR** approach to an **IFR** runway, but the distance/elevation calculations begin at the **FAF** and end at **RWT/TCH** elevation (see *figure 5-2b*). For an **IFR** approach to an **IFR** Heliport, the distance/elevation calculations begin at the **FAF** and end at **HCH** (see *figure 5-2c*). Apply *formula 5-3*:

Formula 5-3. Descent Angle to Runway or HCH (DescentAngle).

$$\text{Descent Angle} = \tan^{-1} \left(\frac{r}{c} \cdot \ln \left(\frac{r+a}{r+b} \right) \right) \cdot \frac{180}{\pi}$$


Where:



- c = FAF to RWT/helipoint distance (ft)
- a = FAF Altitude MSL
- b = TCH/HCH elevation at RWT or HCH
- r = 20890537 earth mean radius

$\tan^{-1}(r/c \cdot \ln((r+a)/(r+b))) \cdot 180/\pi$

Calculator

c		Click here to calculate
a		
b		
Descent Angle		

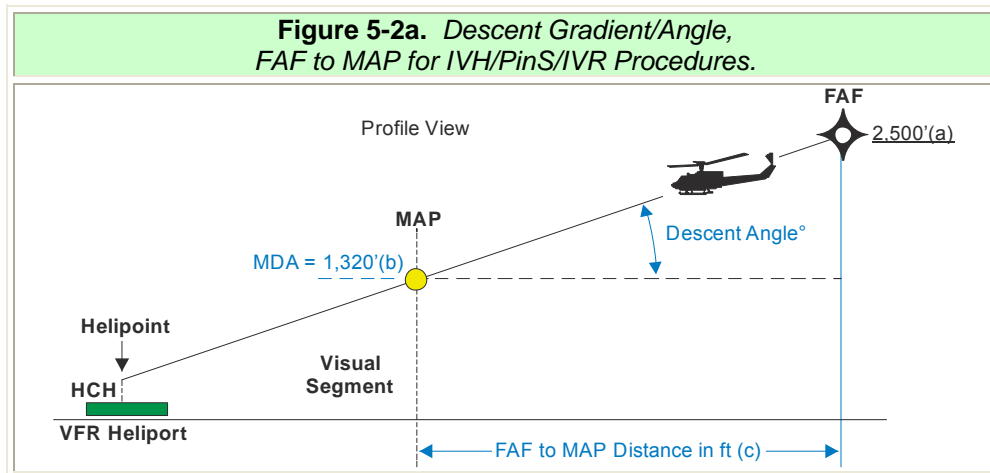

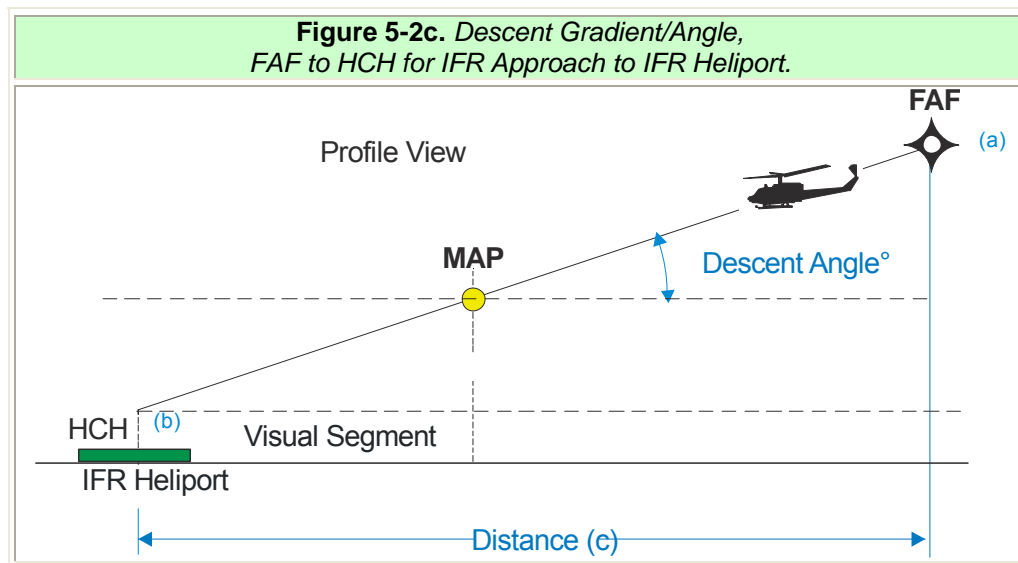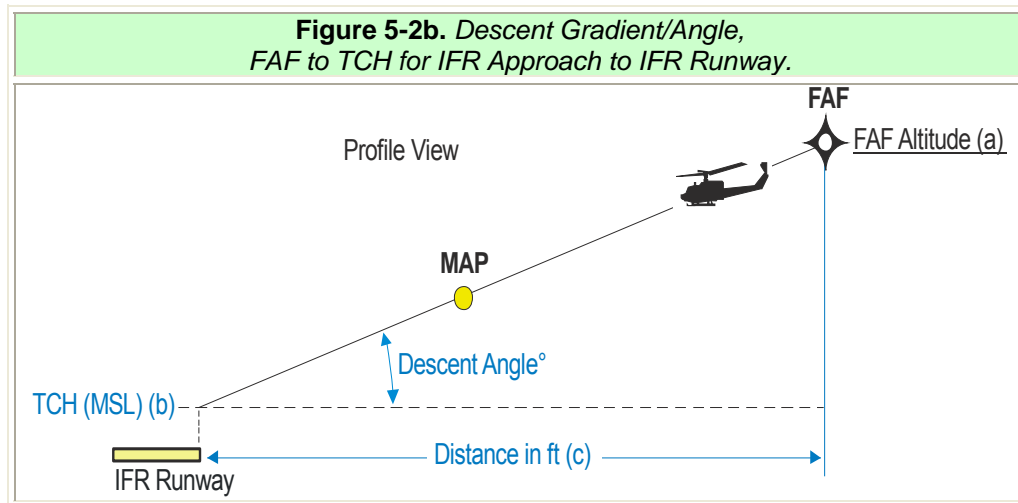

- 5.2.2 d. Stepdown Descent Gradient/Angle.** When a stepdown fix is used, measure the descent gradient/angle from the **FAF** at the **FAF** altitude to the stepdown fix at the minimum fix altitude, then to the **MAP** at the **MDA**. For a stabilized approach, provide a constant gradient/angle from the **FAF** to the **MAP**, (may require raising the **FAF** altitude). A stepdown fix must be located no closer than 0.6 **NM** to the **FAF** or **MAP**.
- 5.2.2 e. Existing Obstacles Close to the FAF or Stepdown Fix.** If the segment descent gradient/angle is less than 800 ft/**NM** (7.5 degrees), *Order 8260.3B, Volume 1, paragraph 289* may be applied substituting an **OIS** slope of 3.5:1 vice 7:1. Calculate the **OIS** Elevation and Minimum fix altitude using *formula 5-4*.


Formula 5-4. OIS Elevation & Minimum Fix Altitude (OIS_z & MFa).

$$OIS_z = a - c - \frac{O_x}{3.5}$$

$$MFa = O_z + c + \frac{O_x}{3.5}$$

Where:

- a = MSL fix altitude (ft)
- c = ROC plus adjustments (*TERPS, Volume 1, para 3.2.2*)
- O_x = Obstacle along-track distance (ft) from early fix ATT (1 NM max)
- O_z = MSL obstacle elevation (ft)
- MFa = Minimum Fix Altitude (rounded to next higher 100-ft increments)

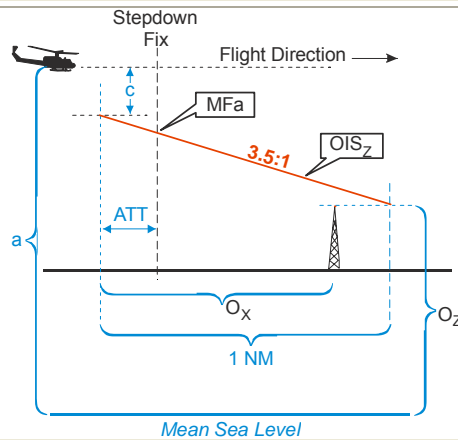

$$OIS_z = a - c - O_x / 3.5$$

$$MFa = O_z + c + O_x / 3.5$$



Calculator

a	<input type="text"/>	Click here to calculate
c	<input type="text"/>	
O _x	<input type="text"/>	
O _z	<input type="text"/>	
OIS _z	<input type="text"/>	
MFa	<input type="text"/>	



5.3 IFR Heliport Visual Segment.

5.3 a. Area.

5.3 a. (1) Length. The *obstacle clearance area (OCA)* begins at the *Visual Segment Reference Line (VSRL)* and extends toward the *MAP* to the point the visual segment *OIS* reaches an altitude 250 ft below the *MDA*, or the latest *MAP ATT*, whichever is farther from the heliport (*see figures 5-3 and 5-4*).

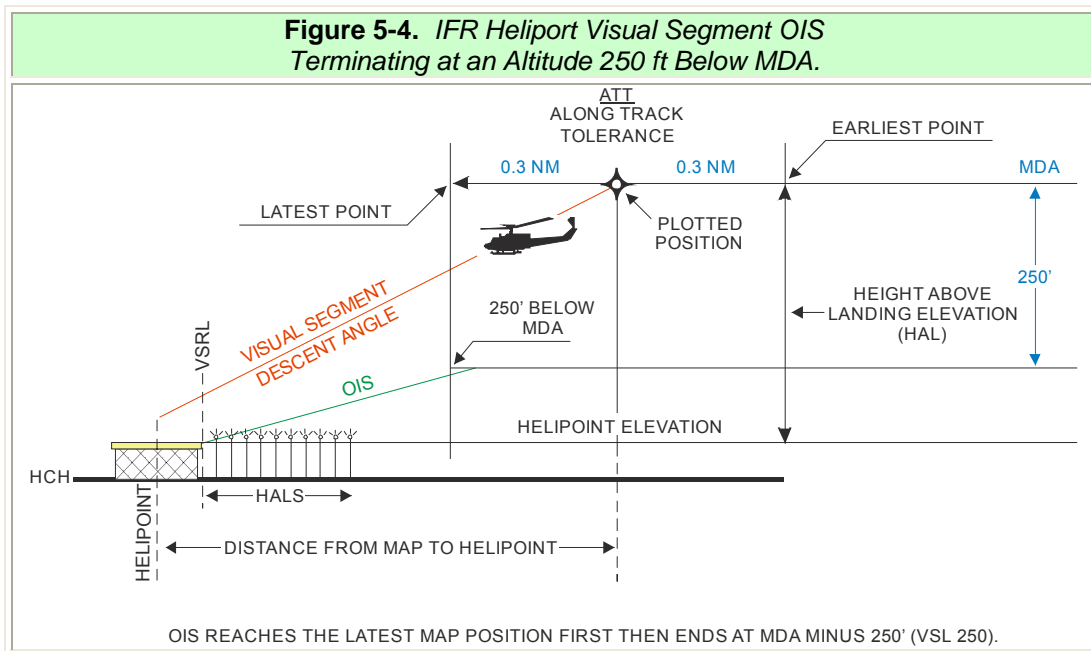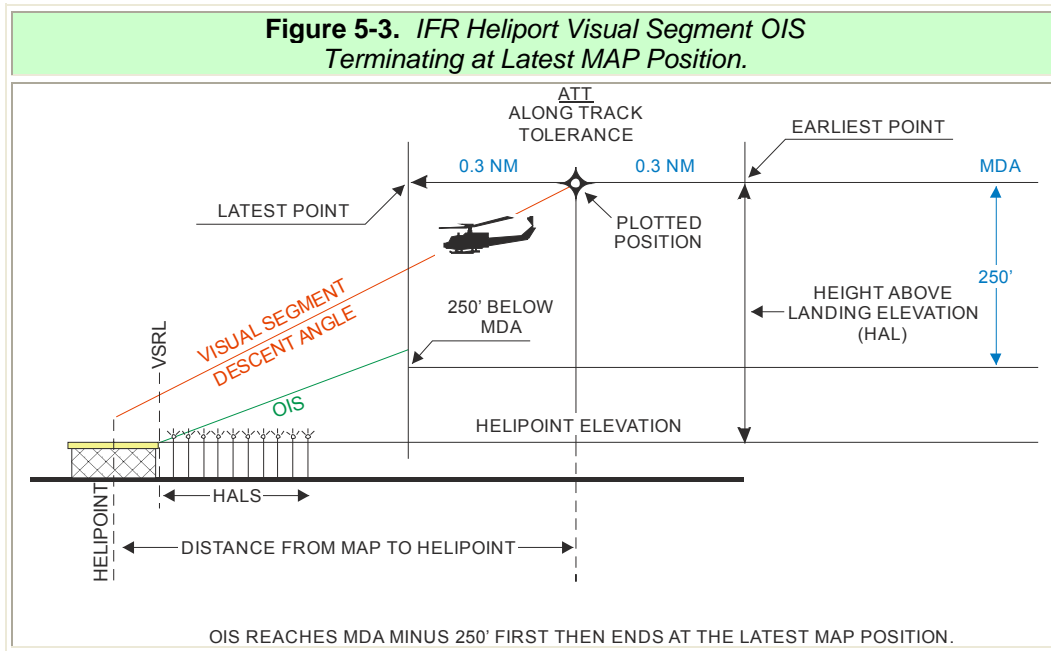

- 5.3. a. (2) **Width.** When the splay reaches the width of the primary area, continue splaying the width by the primary area dimensions to the OIS end (see figures 5-5 and 5-6).

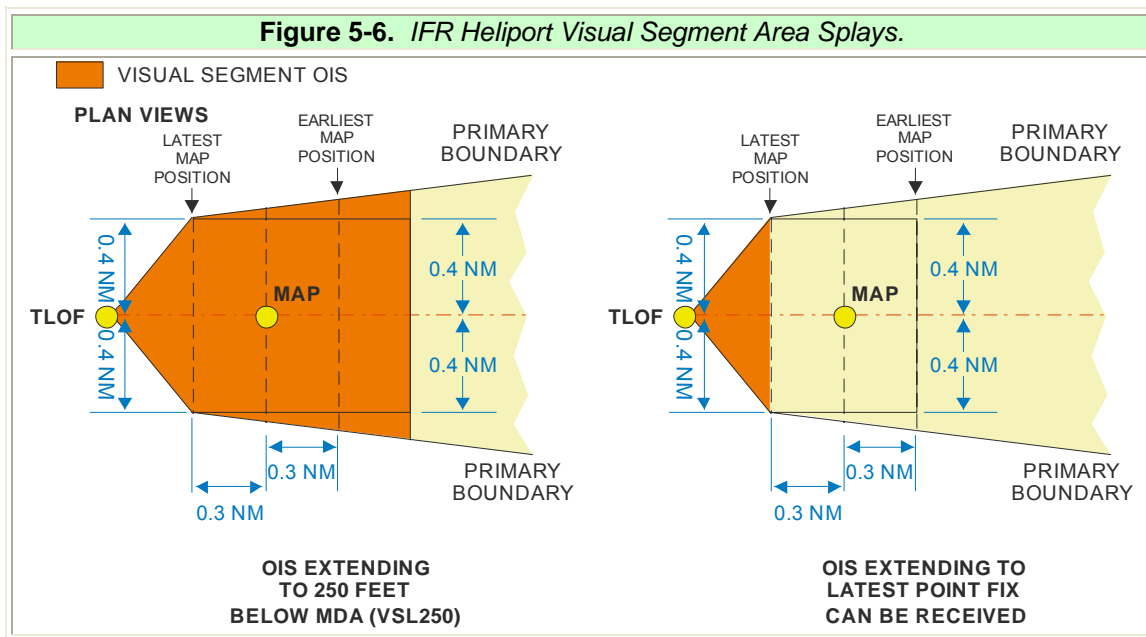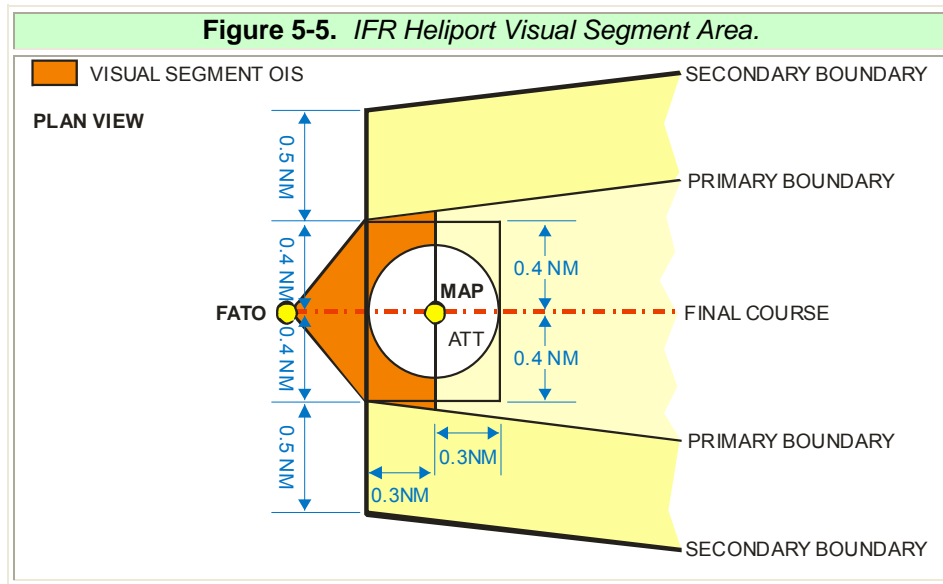

5.3.1 IFR Helicopter Visual Segment Descent Point (VSDP).

A **VSDP** may be established for helicopter **GPS** procedures. Apply the **VSDP** concepts in *Order 8260.3B, Volume 1, paragraph 253*, except use heliport elevation vice **RWT** elevation and **HCH** vice **TCH**. The recommended **VSDP** visual segment angle is 6.0 degrees. The **MAXIMUM** angle is 7.5 degrees. Publish the **VSDP** as an **ATD** from the **MAP**. Do not publish a **VSDP** where the **VSDP** fall between the **MAP** and the heliport. Locate the **VSDP** on the **FAC** at the point where the visual glide slope indicator (**VGSI**) on-glide slope beam intersects the **MDA**. Where a **VGSI** is not established, calculate the **VSDP** to heliport distance along the **FAC** using *formula 5-5*:

Formula 5-5. <i>VDP to Heliport Distance (VSDP_{dist})</i> .		
$VSDP_{dist} = \frac{\left(r \cdot \ln \left(\frac{r + MDA}{r + HE + HCH} \right) \right)}{\tan \left(VSDA \cdot \frac{\pi}{180} \right)}$		
Where:		
MDA = Final Minimum Descent Altitude (MDA)		
HE = Heliport Elevation		
HCH = Heliport Crossing Height		
VSDA = descent angle (<i>see formula 5-8</i>)		
r = 20890537 earth mean radius		
$(r \cdot \ln((r + MDA) / (r + HE + HCH))) / \tan(VSDA \cdot \pi / 180)$		
Calculator		
MDA		Click here to calculate
HE		
HCH		
VSDA		
VSDP _{dist}		

- 5.3.1 a. Area.** Center the *VSDP* area on the *FAC*. The *VSDP OIS* origin is *VSRL*. The surface splays outward at a 10-degree angle relative to the *FAC*. It ends at the *VSDP*, or where the *VSDP OIS* elevation is equal to the *MDA*, minus the *ROC*, whichever occurs first. The *VSDP OIS* inclines upward and outward from its origin at an angle 1.0 degree below the computed descent angle.
- 5.3.1 b. Obstacle Clearance.** No obstacle penetration is allowed of the *VSDP OIS* (*see figure 5-7*). Calculate the *OIS* elevation (*MSL*) at a specified obstacle location using *formula 5-6*.

Formula 5-6. OIS Elevation (OIS_{elev}).

$$OIS_{elev} = (r+HE) \cdot e^{\frac{D \cdot \tan\left(\beta \cdot \frac{\pi}{180}\right)}{r}} - r$$


Where:

- HE = Helipoint elevation MS
- D = Distance obstacle to VSRL
- β = OIS Angle
- r = 20890537 earth mean radius

$(r+HE) \cdot e^{(D \cdot \tan(\beta \cdot \pi/180)/r)} - r$

Calculator

HE		Click here to calculate
D		
β		
OIS_{elev}		

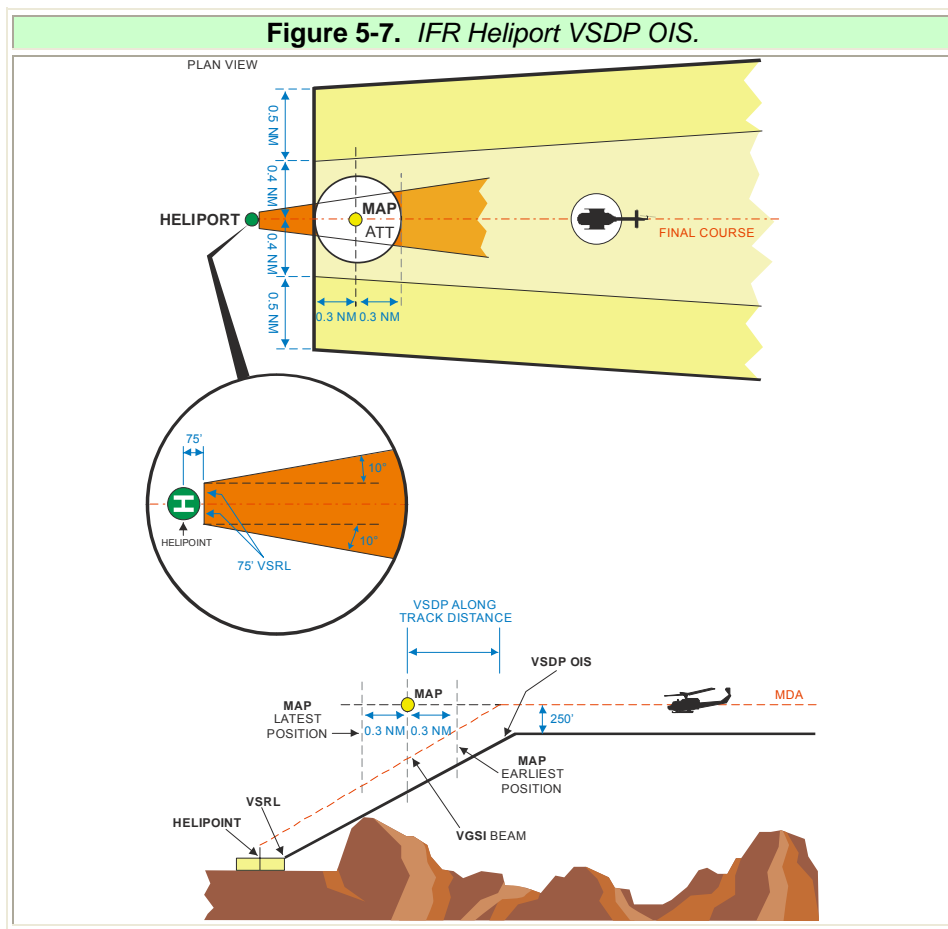

5.3.1

c. IFR Heliport Obstacle Clearance of VSDP OIS. Obstacle penetration of the VSDP OIS is not allowed. Evaluate obstacles based on the shortest obstacle to

surface origin distance measured along the visual segment centerline. Calculate the *OIS* elevation above mean sea level (*MSL*) at a specified obstacle location using *formula 5-6*.

5.3.1 d. IFR Heliport HAL, Visual Segment Length (VSL₂₅₀), and Visual Segment Descent Angle (VSDA) Computations.

Calculate *HAL*, *VSRL* to a point 250 ft below *MDA* (*VSL₂₅₀*), and *VSDA* using the following steps (*see figure 5-7*):

5.3.1 d. (1) Calculate HAL using formula 5-7:

Formula 5-7. OIS Elevation (HAL).		
HAL= MDA-Helipoint Elevation (HE)		
MDA-HE		
Calculator		
MDA		Click here to calculate
HE		
HAL		

5.3.1 d. (2) Calculate VSDA using formula 5-8.

Formula 5-8. Visual Segment Descent Angle (VSDA).		
$VSDA = \tan^{-1} \left(\frac{r}{c} \cdot \ln \left(\frac{r+HAL+HE}{r+HE} \right) \right) \cdot \frac{180}{\pi}$		
Where:		
c = MAP to Helipoint Distance (ft)		
HAL = Formula 5-7 output		
HE = Helipoint elevation		
r = 20890537 mean earth radius		
$\tan^{-1}(r/c \cdot \ln((r+HAL+HE)/(r+HE))) \cdot 180/\pi$		
Calculator		
c		Click here to calculate
HAL		
HE		
VSDA		

5.3.1 d. (3) Calculate visual segment length from the VSRL to a point 250 ft below MDA (VSL₂₅₀) using formula 5-9.

Formula 5-9. Visual Segment Length (VSL_{250}).		
$VSL_{250} = \frac{\left(r \cdot \ln \left(\frac{r+a}{r+HE} \right) \right)}{\tan \left((VSDA-1) \cdot \frac{\pi}{180} \right)}$		
Where:		
HAL = Formula 5-7 output		
a = HAL-250 (MSL)		
HE = Heliport elevation		
r = 20890537 mean earth radius		
VSDA = Formula 5-8 output		
$(r \cdot \ln((r+a)/(r+HE)))/\tan((VSDA-1) \cdot (\pi/180))$		
Calculator		
HAL		Click here to calculate
HE		
VSDA		
VSL ₂₅₀		

5.3.2 **IFR Heliport Visual Segment OIS** (figure 5-7).

- 5.3.2 a. Where no VSDP has been established**, apply Order 8260.3B, Volume 1, paragraph 253. Where a **VGSI** facility is installed, the **VSDP** obstacle identification surface (**OIS**) inclines upward from the **VSRL** at an angle 1.0 degree below the aiming angle of the on-glide slope beam. Locate the **VSDP** on the **FAC** at the point where the **VGSI** on-glide slope beam intersects the **MDA**. The recommended **VSDP** on-glide slope descent gradient/angle is 639 ft/**NM** (6 degrees). The **MAXIMUM** angle is 7.5 degrees (USA **MAXIMUM** descent gradient/angle is 478 ft/**NM** (4.5 degrees) without a waiver). Where no **VGSI** facility is installed, the **VSDP OIS** rises at a 5-degree angle from the **VSRL** to the **VSDP**. Publish the **VSDP** as an **ATD** from the **MAP**. The **MINIMUM HCH** is 5 ft. The **MAXIMUM HCH** is 20 ft unless approved by Flight Standards. Calculate the **VSDP** distance (**D**) from the heliport using formula 5-10.

Formula 5-10. Distance from Helipoint (D).		
$D = \frac{\left(r \cdot \ln \left(\frac{r + HAL + HE}{r + HE} \right) \right)}{\tan \left(VSDA \cdot \frac{\pi}{180} \right)}$		
Where:		
HAL = Formula 5-7 output		
HE = Helipoint elevation		
VSDA = Formula 5-8 output		
r = 20890537 mean earth radius		
$(r \cdot \ln((r + HAL + HE)/(r + HE)))/\tan(VSDA \cdot (\pi/180))$		
Calculator		
HAL		Click here to calculate
HE		
VSDA		
D		

5.4 **IFR Approach to a VFR Helipoint (IVH) (Proceed Visually).**


5.4.1 **General.**

The special procedure provides a measure of obstruction protection/identification along the visual track from a **MAP** to a specific **VFR** helipoint. This procedure requires training and equipment contained in the *operations specifications (OpSpec)* or *letter of authorization (LOA)*. Three development steps for an **IVH** are: Helipoint, Visual Segment **OIS**, and **Obstacle Clearance Surface (OCS)** evaluations. The approach chart must be annotated “Proceed Visually.”

5.4.2 **Helipoint Evaluation.**

Before designing a special **RNAV (GPS) IVH** approach procedure, ensure the helipoint meets the following criteria:

- 5.4.2. a. **FAA Form 7480-1, Notice of Landing Area Proposal**, has been filed under Part 157.
- 5.4.2. b. **No penetration of the 8:1 surface** in AC 150/5390-2 is permitted (*see figure 5-8*). Penetrations of *either* A or B areas, but not penetrations of both areas, are allowed if the obstructions are charted, marked or lighted, and not considered a hazard. Calculate the 8:1 surface height (S_H) at any distance (D) using *formula 5-11*.

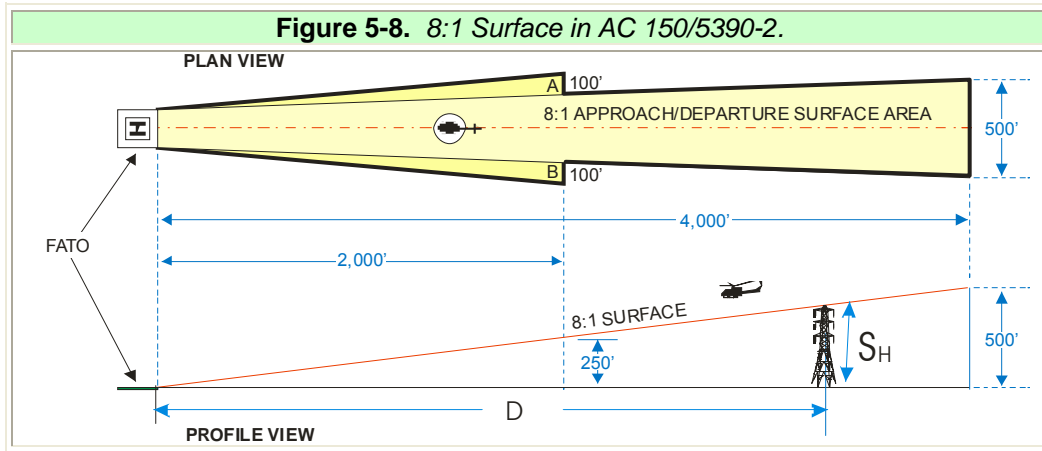

Formula 5-11. 8:1 OCS (S_H).

$$S_H = \frac{D}{8} + HE$$

Where:

D = C/L distance FATO edge to Obstacle
 HE = Heliport Elevation

D/8+HE	
Calculator	
D	
HE	
S_H	

[Click here to calculate](#)

5.4.2 c. An acceptable onsite evaluation of the heliport for VFR use is required. Apply Order 8700.1, *General Aviation Inspector’s Guide*, chapter 61 for the heliport evaluation. Based on the FAA determination, a procedure can be developed under the following conditions:

5.4.2 c. (1) No objection.

5.4.2 c. (2) Conditional. Conditions have been resolved by the proponent, e.g., obstacle penetrations of the 8:1 approach area, transitional and lateral extension areas, or pertain to the minimum size of the *FATO*, *TLOF*, and Safety Area.

5.4.2 c. (3) Objection. If an objection determination is issued, an IVH approach procedure development is not authorized. A *Point-in-Space (PinS)* (Proceed *VFR*) approach procedure may be developed in accordance with *chapter 5, paragraph 5.6*.

5.4.2 d. An ‘acceptable’ visual segment evaluation for flyability, obstacles, and visual references must be completed in both day and night flight conditions. The heliport or heliport visual references must be in clear view from the *MAP* to provide visual orientation sufficient to maneuver the helicopter from the *MAP* to

the landing site based solely on visual reference. The landing site must not be obscured by structures, trees, etc. Buildings and facilities associated with the heliport such as hangers, administration buildings, **AWOS** equipment, windsock, beacon, etc. located within 500 ft are acceptable visual references. Surrounding buildings and landmarks are not allowable visual references unless approved by Flight Standards. At least one of the following visual references must be visible or identifiable before the pilot may proceed visually:

- 5.4.2 d. (1) **FATO** or **FATO** lights.
- 5.4.2 d. (2) **TLOF** or **TLOF** lights.
- 5.4.2 d. (3) *Helicopter Instrument Lighting System (HILS)*.
- 5.4.2 d. (4) *Helicopter Approach Lighting System (HALS)* or lead-in lights.
- 5.4.2 d. (5) **VGSI**.
- 5.4.2 d. (6) Windsock or windsock light(s).*
- 5.4.2 d. (7) Heliport beacon.*
- 5.4.2 d. (8) Other facilities or systems approved by Flight Standards (AFS-400).

**Note: Windsock lights and heliport beacons should be located within 500 ft of the TLOF.*

5.4.3 **Visual Segment OIS Evaluation.**

The visual segment is based on the premise that the pilot will maintain level flight at the **MDA** until the helicopter is in a position to initiate a descent to the heliport. When obstacles preclude an immediate descent at the **MAP** to the **FATO**, establish an **ATD** fix to provide a descent point to the **FATO**. The MINIMUM distance from the **ATD** fix to the heliport is 0.4 **NM**. Chart a profile note, "Maintain **MDA** altitude until **NM** past **MAP**." Example, "Maintain 560 until 0.2 **NM** past PEMIE." These procedures should have a **VGSI** for vertical guidance from the **ATD** fix to the planned **HCH**. The course from the **MAP** to the heliport must be within 30.0 degrees of the **FAC**. Apply *paragraphs 5.2.1 and 5.2.2* for the **IFR** segment **OCA** and **ROC**. Apply *paragraph 5.2.2b* in constructing the descent gradient/angle in the **IFR** segment. When an amended procedure no longer meets the criteria in this paragraph, a **PinS** procedure applying the criteria in *paragraph 5.6* may be published. Compute the distance for the Remote Altimeter Setting Source (**RASS**) adjustment for the **MDA** and stepdown altitudes for the **IVH** approach procedures from the source to the **MAP**.

5.4.3 a. Visual Segment *Obstacle Identification Surface (OIS) Obstacle Evaluation Area (OEA)*.

5.4.3 a. (1) Length. The visual segment *OEA* MAXIMUM length is 10,560 ft (2 *SM*), measured from the *MAP* plotted position to the heliport. The OPTIMUM *MAP* to heliport distance is 3,949 ft (0.65 *NM*). Align the visual segment (optimally) with the *IFR* segment *FAC*. The *OIS* area begins at the earliest *MAP ATT* and extends to the *VSRL*. The MAXIMUM turn angle over the *MAP* is 30.0 degrees. The two visual segment construction configurations are:


5.4.3 a. (1) (a) Straight course to a heliport.

5.4.3 a. (1) (b) Turn at the *MAP*.


5.4.3 b. Visual Segment *OEA*.

5.4.3 b. (1) Length. The *OIS* area begins at the earliest *MAP ATT* and extends to the *VSRL*. The MINIMUM *MAP* to heliport distance is 2,600 ft. See figures 5-9 and 5-10.

5.4.3 b. (2) Straight Course to a Heliport *OEA* Construction. Connect the final primary area outer edges (**cd**) to the *VSRL* outer edges (**ef**) (see figure 5-9).

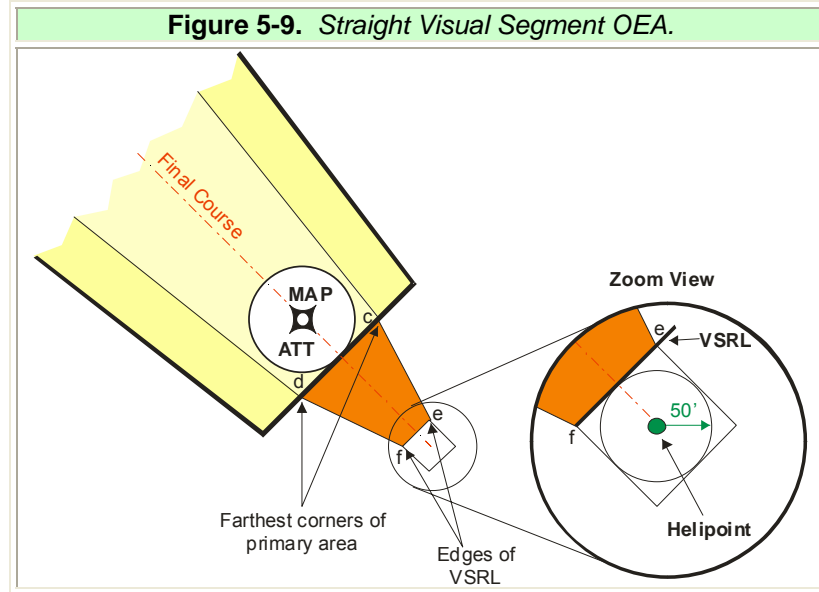


5.4.3 b. (3) Turn at the *MAP* Construction. A visual segment course may deviate up to 30 degrees from the *IFR* *FAC*. Refer to figure 5-10, and connect the tangent on the turn side (**b**) of the *MAP* nearest the heliport to the *VSRL* at point (**e**). Connect the non-turn-side primary area corner (**d**) to the *VSRL* at point (**f**).

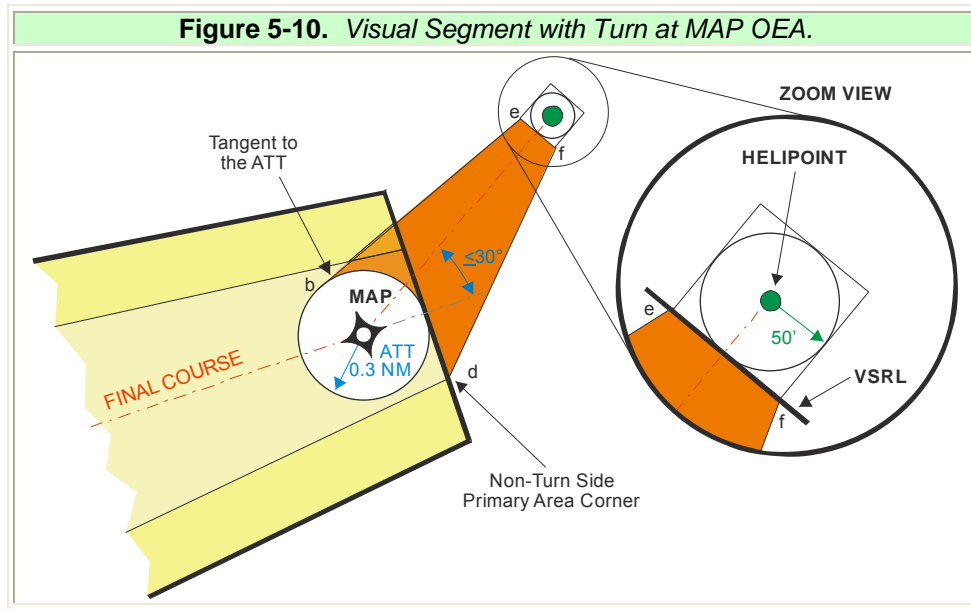

5.4.3 c. Visual Segment Descent Angle (VSDA).


The **VSDA** is a developer-specified angle extending from a point 5 to 20 ft directly above the heliport to the **MDA**. The **VSDA** must cross the **MDA** between the heliport and the **MAP**. The **MAXIMUM VSDA** is **7.5** degrees, **OPTIMUM** is 6.0 degrees, **VSDA** angles higher than **7.5** degrees require Flight Standards Service approval and must be documented on *FAA Form 8260-10*. Consider the specific helicopter equipment and capabilities, pilot training, and demonstrated capability for each case (see figure 5-11).

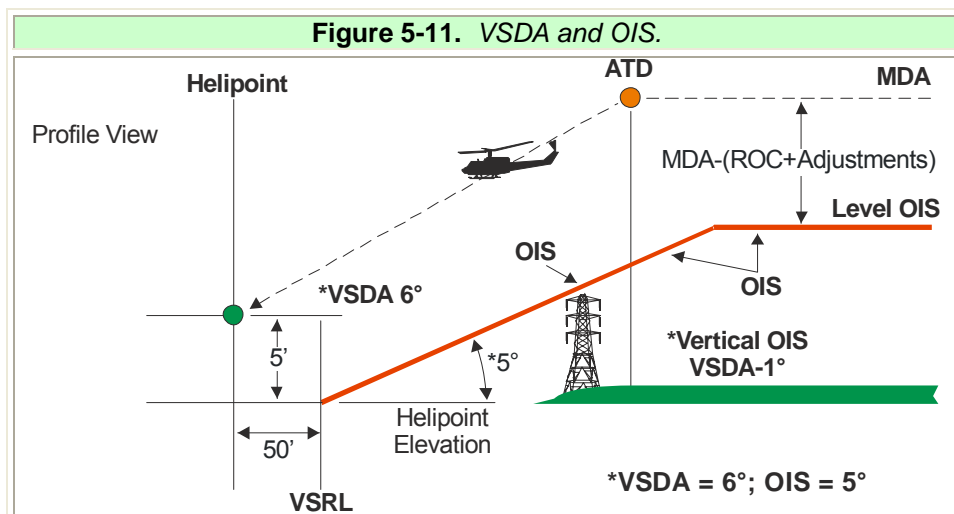

5.4.3 d. Visual Segment OIS.

The **OIS** begins at the **VSRL** and extends upward toward the **MA** at an angle of (**VSDA** – 1 degree). The **OIS** rises to the point it reaches an altitude equal to the **MDA** minus the **ROC** and adjustments. When the **MAP** is beyond this point, the **OIS** becomes a level surface to the **MAP** plotted position. Measure obstacles using the shortest distance to the **VSRL**. **Obstacles should not penetrate the OIS**; if they penetrate in the initial evaluation, take one of the following actions, listed in preferential order (see figure 5-12):

- 5.4.3 d. (1) **Remove or adjust obstacle location** and/or height to eliminate the penetration, or
- 5.4.3 d. (2) **Raise the VSDA** to achieve an **OIS** angle that clears the obstacle, (7.5 degrees MAXIMUM without Flight Standards Service approval), or
- 5.4.3 d. (3) **Identify the obstacle** with the greatest penetration. Raise the **MDA** the penetration amount and round to the next highest 20-ft increment. Initiate action to have the obstacle marked and lighted, if feasible. Depict all obstacles on the approach chart that penetrate the **OIS** and include in required training.
- 5.4.3 d. (4) **Raise the HCH** to ≤ 20 ft provided the height is consistent with the helicopter's ability to hover out of ground effect. When this procedure is applied, raise the **OIS** origin above the heliport elevation by the amount that the **HCH** is increased (see figure 5-12). Operational approval must include a requirement for training to terminate approaches at a high hover. Annotate the procedure for the visual segment descent planned for the **HCH**. An **HCH** greater than 20 ft, and **VSDAs** greater than 7.5 degrees require Flight Standards Service approval and must be listed on *FAA Form 8260-10*. Each case must consider the specific helicopter equipment and capabilities, pilot training, and demonstrated capability.

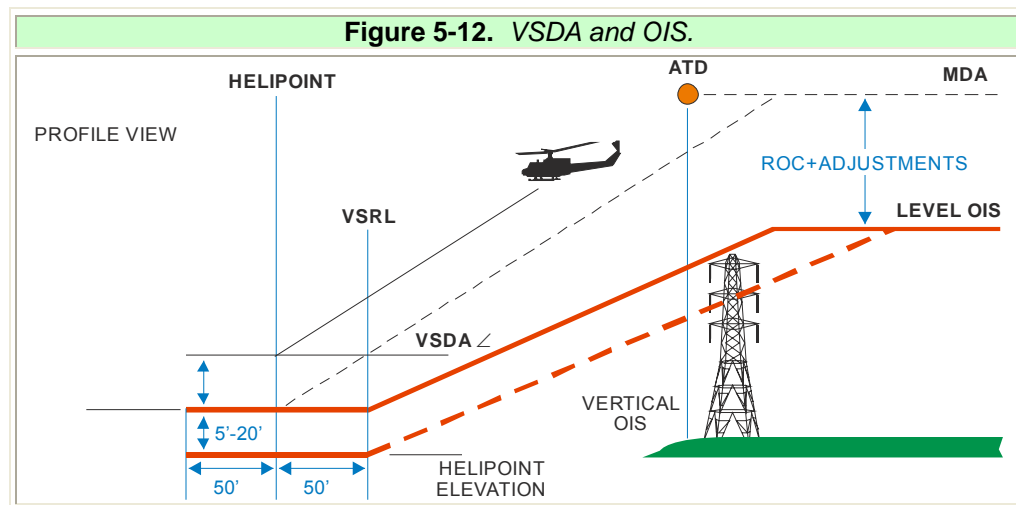

- 5.4.3 d. (5) **Annotate the procedure** for the flight rules after the **MAP** in the visual segment.

5.4.3 d. (6) **Annotate the procedure** when night operations are **not** authorized.

5.4.4 **OCS Evaluation.**

5.4.4 a. **IFR Approach to a VFR Heliport (IVH) Analysis:**

Perform the following analysis prior to authorizing an **IVH** procedure. Apply obstacle clearance surface (**OCS**) areas using concepts from *FAA Order 8260.3 paragraph 251a (1)* with the following exceptions:


5.4.4 a. (1) **Alignment is always** centered on the visual segment centerline.

5.4.4 a. (2) **Length OCS-1 and OCS-2.**

Measure **OCS-1** and **OCS-2** length from the **FATO** edge to abeam the earliest **MAP ATT** (see figure 5-9).

5.4.4 a. (3) **Area Width OCS-1 and OCS-2.**

OCS-1 splays outward 8.5 degrees from the **FATO** outer edges. **OCS-2** splays outward 17 degrees from the **FATO** outer edges (see figure 5-9).

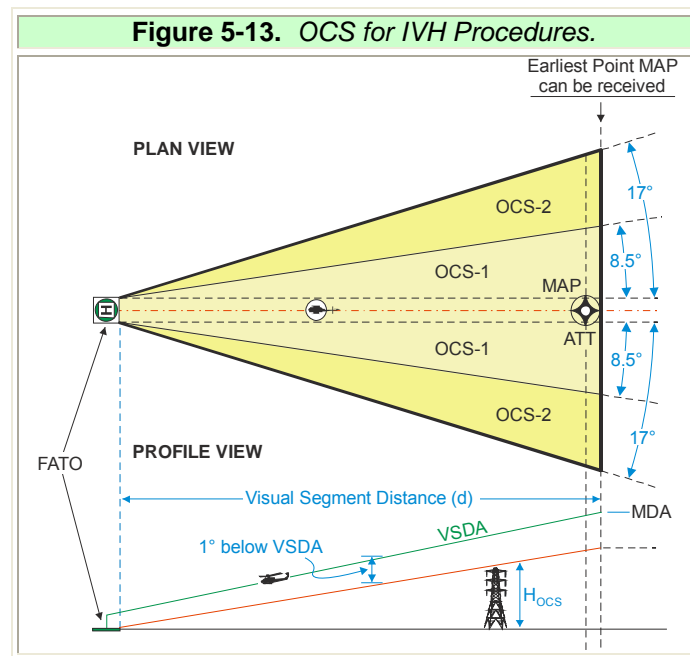

5.4.4 a. (4) **Calculate OCS-1 half-width (W_{ocs1})** at distance (**d**) from the **FATO** edge using *formula 5-12*.

Formula 5-12. OCS-1 Width (W_{OCS1}).		
$W_{OCS1} = \left[\tan \left(8.5^\circ \cdot \frac{\pi}{180} \right) \cdot d \right] + 0.5 \cdot F_W$		
Where:		
W_{OCS1} = Perpendicular distance flight path to OCS-1 edge		
d = Distance (ft) from FATO edge along flight path		
F_W = FATO width		
$[(\tan(8.5*\pi/180)*d)]+0.5*F_W$		
Calculator		
d		Click here to calculate
F_W		
W_{OCS1}		


- 5.4.4 a. (5) Calculate the *OCS-2* width (W_{OCS2}) at distance (**d**) from the *FATO* edge using formula 5-13.

Formula 5-13. OCS-2 Width (W_{OCS2}).		
$W_{OCS2} = \left[\tan \left(17^\circ \cdot \frac{\pi}{180} \right) \cdot d \right] + 0.5 \cdot F_W$		
Where:		
W_{OCS2} = Perpendicular distance flight path to OCS-2 boundary		
d = Distance (ft) from FATO edge along flight path		
F_W = FATO width		
$[(\tan(17*\pi/180)*d)]+0.5*F_W$		
Calculator		
d		Click here to calculate
F_W		
W_{OCS2}		

- 5.4.4 a. (6) The *OCS-1* and *OCS-2* slopes equal (*VSDA-1* degree), measured from the *FATO* edge *MSL* elevation. Determine the *OCS-1* and *OCS-2 MSL* height at distance (**D**) from the *FATO* edge using formula 5-14:

Formula 5-14. OCS-1 and OCS-2 Slope (H_{ocs}).		
$H_{ocs} = D[\tan((VSDA-1) \cdot \frac{\pi}{180})] + HE$		
Where:		
VSDA - 1 = (VSDA minus 1 degree)		
H_{ocs} = OCS-1 and OCS-2 MSL height		
D(ft) = Distance, FATO edge to obstacle		
HE = Heliport/FATO edge elevation (MSL)		
$D * [\tan((VSDA-1) * \pi / 180)] + HE$		
Calculator		
D		Click here to calculate
VSDA		
HE		
H_{ocs}		

- 5.4.4 a. (7) If an unlighted obstacle penetrates OCS-1, a VGSI must be installed at the heliport.**
- 5.4.4 a. (8) If an unlighted obstacle penetrates OCS-2, the heliport must have lead-in lights to assist the pilot, with visual cues, to remain within the IVH OCS area.**
- 5.4.4 a. (9) The lead-in lights' operational suitability must be evaluated during the night evaluation.**
- 5.4.4 a. (10) If obstacle penetrations exist outside the OCS-1 and OCS-2 areas, but within the OIS area (see paragraph 5.4.3), these obstacle penetrations must be noted on FAA Order 8260-7 and charted.**
- 5.4.4 b. If any of these conditions are not met, a PinS (Proceed VFR) procedure may be developed in accordance with paragraph 5.6 of this order (see figure 5-14).**

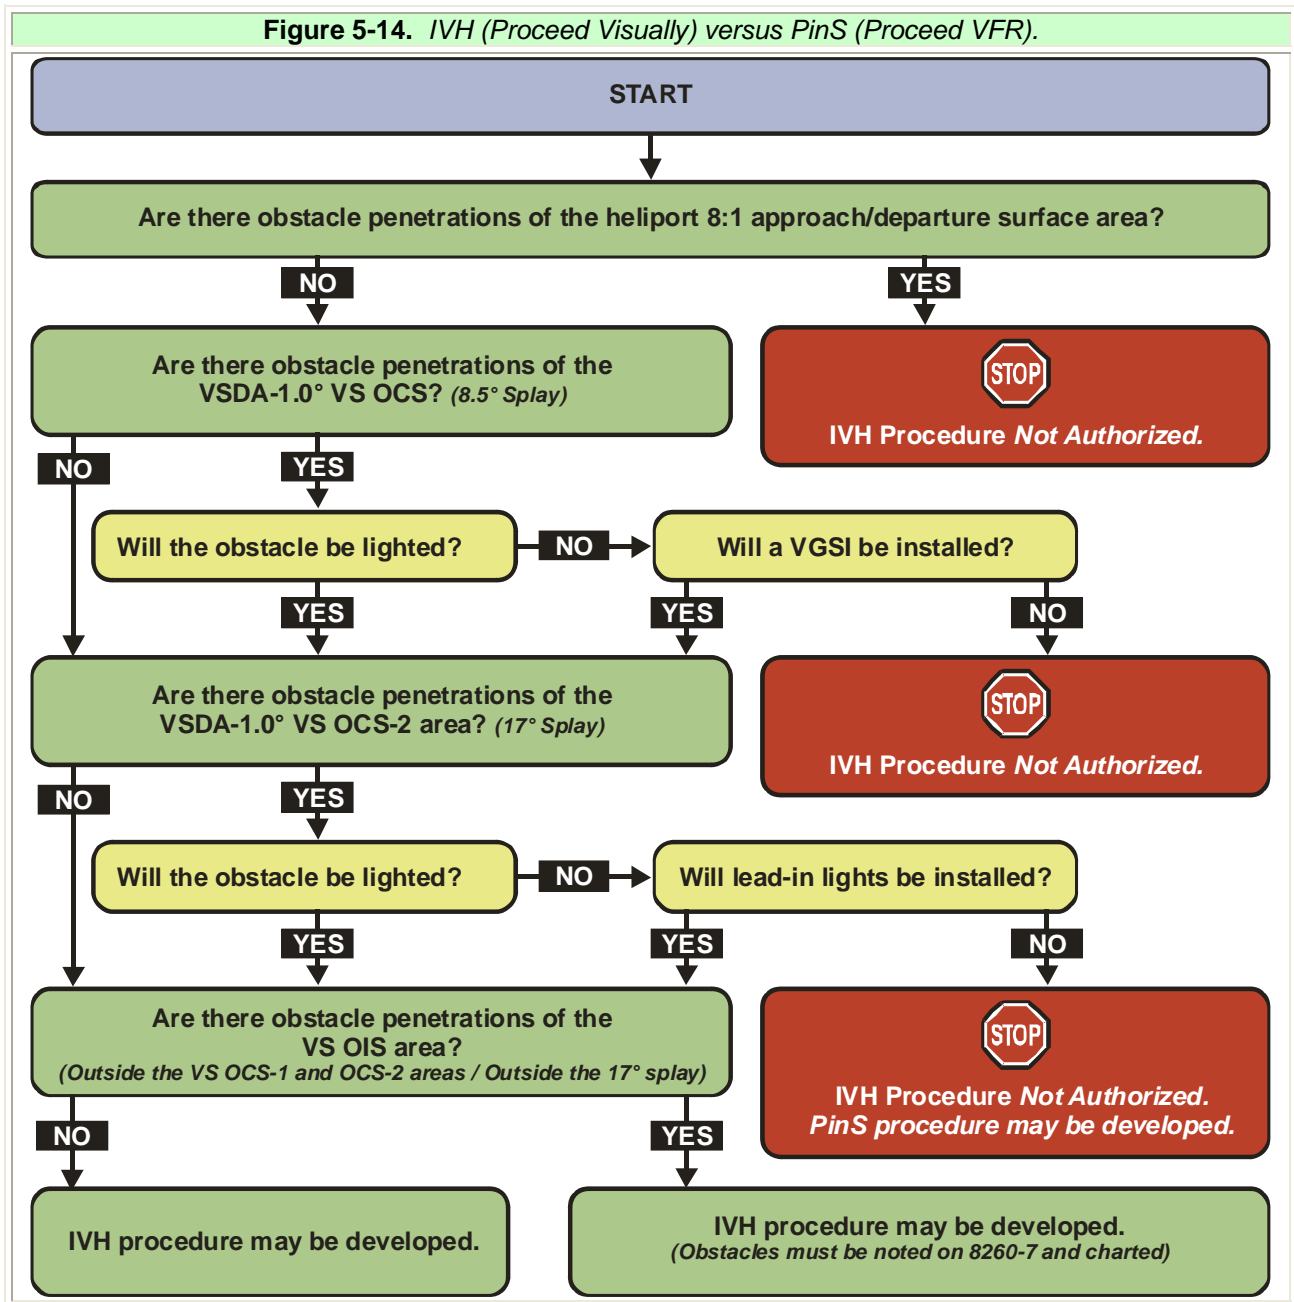


5.5 IFR Approach to A VFR Runway (IVR) (Proceed Visually).

5.5.1 General.

This special procedure provides protection/identification along a visual track from the *MAP* to a specific point on a *VFR* runway (see figure 5-15 example). This procedure requires the training and equipment contained/specified in an *OpSpec* or letter of authorization (*LOA*). This procedure must meet all *IVH* (Proceed Visually) procedure requirements **and** the following additional requirements:

- 5.5.2 Location on the runway.** The heliport (aiming point) may be located at any point on a runway centerline, but should be at least a distance of (1.5 * Rotor Diameter) from the end of the usable runway on centerline. The runway is not required to be marked with heliport markings. The visual track from the **MAP** to the final approach area heliport must be charted.
- 5.5.3 Alignment.** The **FAS** must be aligned within 30 degrees of the extended runway centerline. The optimum flight path is aligned with the extended runway centerline, with the **MAP** at the threshold.
- 5.5.4 Day operations.** An ‘acceptable’ visual segment day flight evaluation for flyability and **OIS** obstacle penetration must be completed.
- 5.5.5 Night operations.** An ‘acceptable’ visual segment night flight evaluation for flyability must be completed. This includes confirmation that the runway lighting system is visible from the **MAP**. The *Principle Operations Inspector (POI)* with geographic responsibility determines the runway lighting system acceptability.
- 5.5.6 Heliport Location.** The runway final approach area about the heliport must be clearly viewable from the **MAP**.

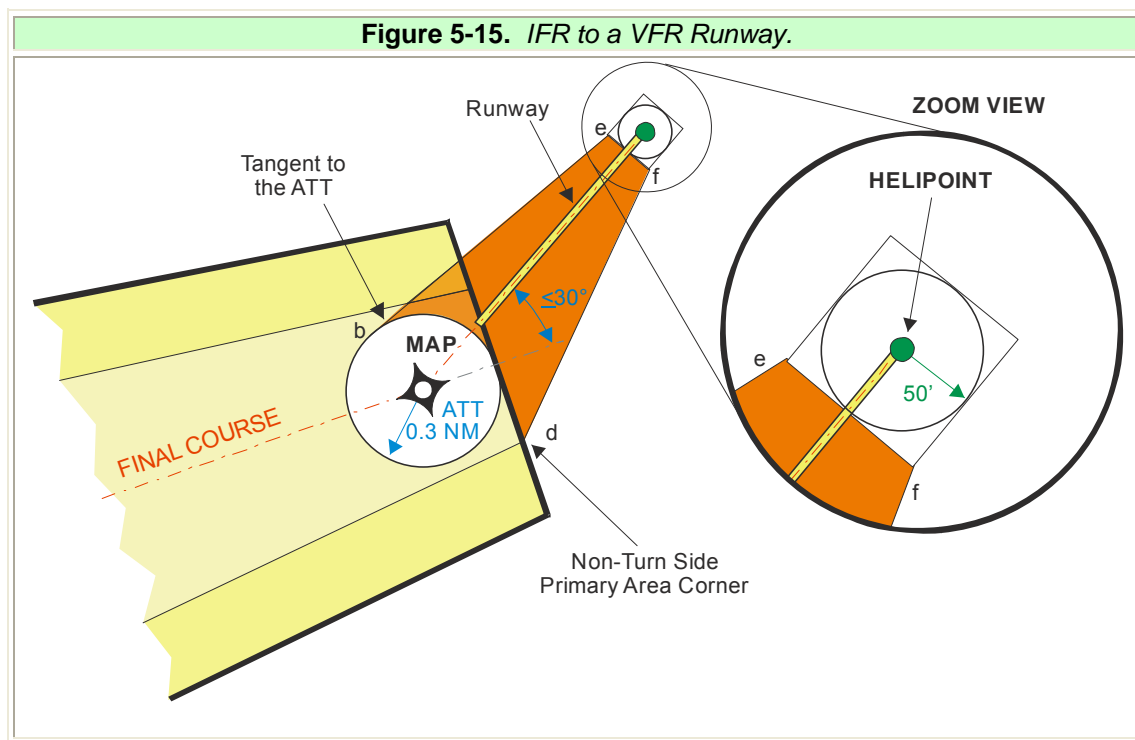

5.6 PinS Approach (Proceed VFR).


The **VFR** segment on a **PinS** (Proceed **VFR**) approach procedure provides a measure of obstacle protection/identification to allow a safe transition from **IFR**

to **VFR** flight. Annotate the procedure with the note: “Proceed VFR to the Landing Site.”

Apply *Order 8260.3, Volume 1, chapter 11* pertaining to **PinS** approach criteria except, there is no requirement for a **MAP** to be located beyond 2,600 ft of the heliport. A **PinS** (Proceed **VFR**) procedure may be developed to a heliport, multiple heliports, or a geographical area not associated with a specific heliport. Refer to *paragraph 2.2* of this order to determine whether procedures are specials. Compute the distance for the Remote Altimeter Setting Source (**RASS**) adjustment for the **MDA** and stepdown altitudes for the **PinS** approach procedures from the source to the **MAP**.

5.6.1 Area.

The **OEA** is a 5,280-ft radius arc segment centered at the **FAC** and the latest **MAP ATT** intersection. The arc segment is laterally bounded by 20 degree splay lines (relative the **FAC**-extended), originating at the **FAS** secondary boundaries and the latest **MAP ATT** (see figure 5-16). This surface **MUST NOT** be penetrated **EXCEPT** when a ‘special approach procedure’ **MDA**, not providing obstacle clearance in this area, is **MANDATORY** for mission completion. **Special procedure surface penetrations must be charted and included in the required training.**

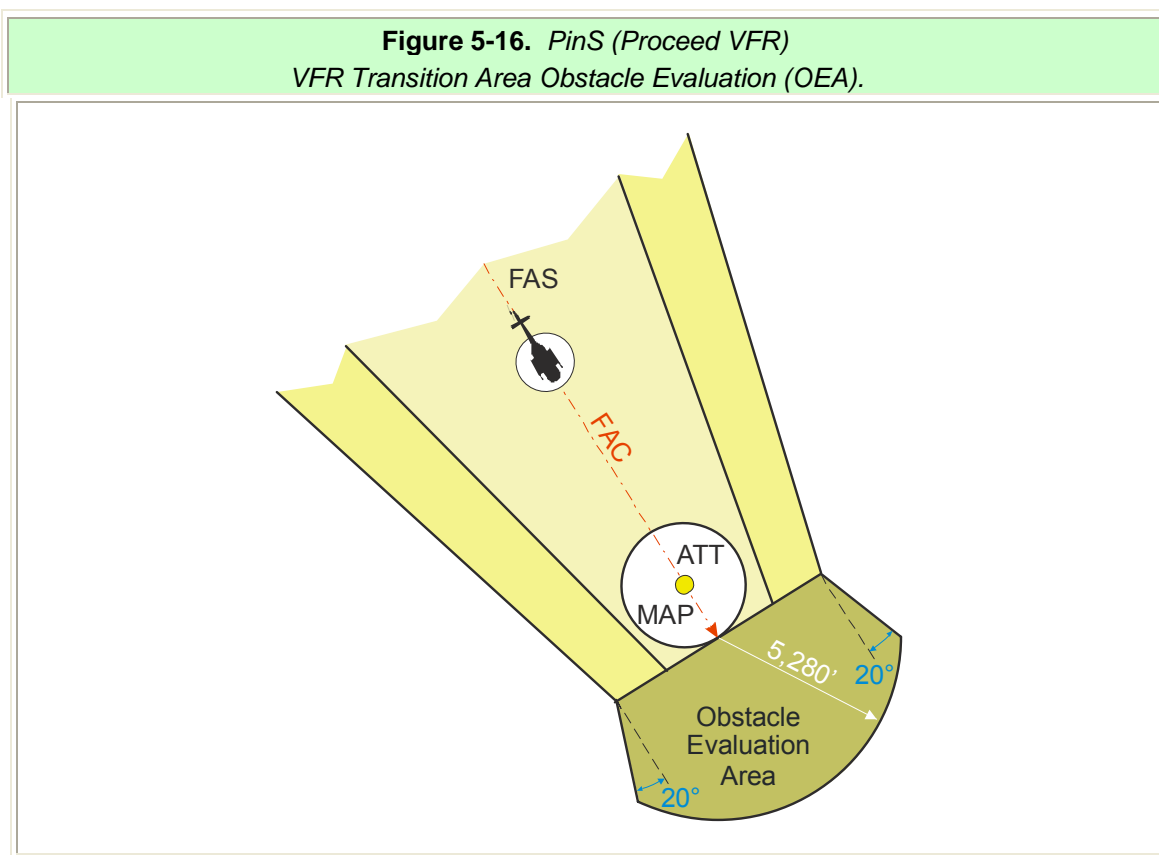

5.6.2 Obstacle Clearance in the VFR Segment.

Add 250 ft of **ROC** (minus adjustments) to the highest obstacle/terrain within the **VFR** area and (round to the next higher 20-ft increment). The final **MDA** is the higher of the **MDAs** calculated for the final and **VFR** segments. This does not apply to special approaches (*see paragraph 5.5.1*).

5.6.3 Visibility.

The MINIMUM final segment visibility is $\frac{3}{4}$ **SM** for a height above surface (**HAS**) of 800 ft and below. Where a **HAS** exceeds 800 ft, the MINIMUM visibility is 1.0 **SM**. The MINIMUM visibility required after the **MAP**, in the **VFR** segment is dependent on the Code of Federal Regulations (**14 CFR**) Part 91 or 135, **OpsSpecs**, or **LOA** as appropriate.

5.7 IFR to an IFR Runway.**5.7.1 Configuration and Alignment.**

The **MAP** location should provide the best compromise of lowest visibility and **VSDA**.

Except where the alignment is to the **RWT**, the mandatory **MAP** location is at the **FAC** and **RCL** intersection.

Where the alignment is to the **RCL**, the optimum **MAP** location is at the **RWT**, with optional **MAP** location along the **FAC** between the **FAF** and the **RWT**.

5.7.2 Area.

The final **OCA** begins at the earliest **FAF ATT** and ends at the latest **MAP ATT**, **RWT**, or a point abeam the **RWT**, whichever is farthest. Apply *paragraphs 5.2.1 and 5.2.2* criteria for the **IFR** segment **OCA** and **ROC** (*see figure 5-1*).

5.7.3 Descent Gradient/Angle.

Calculate the **FAS** descent angle from the **FAF** altitude at the plotted position of the **FAF** to the **TCH** at **RWT**. Apply *paragraph 5.2.2b*.

5.7.4 Visual Segment.

Apply *Order 8260.3B, Volume 1, paragraph 251*. Establish a 40 ± 5 ft **TCH** for runways where no **VGSI** is installed. Where a **VGSI** is installed, a final descent gradient and **VSDA** may be established to coincide with the established gradients/angles for angles of 3.0 angles or more. If the descent gradient/angle cannot be published coincident (within ± 0.20 degrees) and **TCH** values within 3 ft of the published **VGSI** glide slope angle, publish a note on the chart.

5.7.5 Visibility.

See *paragraph 8.1.2*. Apply *TERPS paragraph 1127**. Where obstacles penetrate *TERPS paragraph 251* surfaces, add the chart note: **Visibility Reduction by helicopters NA.**

**When a special procedure has a GPA greater than 5.7 degrees and a TCH higher than 45 ft, Order 8260.3B, Volume I, paragraph 1127 may be applied. Table 25 application is required.*

THIS PAGE INTENTIONALLY LEFT BLANK

Chapter 6. Missed Approach

6.0 General.

6.0 a. Missed Approach (MA) Construction.

6.0 a. (1) **Speed.** Apply 70 *KIAS* for civil procedures (*see paragraph 2.0*) and 90 *KIAS* for military. Apply wind values (*see formula 2-2*) and bank angles (*see table 2-2*). For special procedures when V_{mini} less than 70 *KIAS* is applied, this application must be noted on *FAA Form 8260-10* and on the approach chart.

6.0 a. (2) **Optimum Flight Path.** The missed approach segment position (*MASP*) ends at a holding point designated by a missed approach holding fix (*MAHF*). OPTIMUM routing is straight ahead to a direct entry into holding at the *MAHF*. If the *MA* routing terminates at a “T” *IAF*, OPTIMUM *MA* holding pattern alignment is with the initial inbound course, with either a teardrop or direct entry into holding (*see figure 6-1*).

Note: USA: Develop and annotate an alternate RNAV(GPS) MA procedure when requested.

6.0 b. Obstacle Clearance Standard.

Calculate the nominal *OCS* slope (MA_{OCS} SLOPE) associated with a given missed approach climb gradient using *formula 2-10*. *See paragraph 2.11 for Missed Approach Conventions.*

6.0.1 Missed Approach Section 1. (MAS-1).

Section 1 begins at earliest *MAP* along-track tolerance (*ATT*) and extends to the start-of-climb (*SOC*), or the point where the aircraft is projected to cross 400 ft above airport/heliport elevation, whichever is the greatest distance from *MAP*. *See figure 6-1a for MA segment point and line designations. Figure 6-2 depicts the Section 1 / Section 2 (partial), OCS plan and profile view beginning at an altitude of MDA minus 100 ft plus adjustments (see chapter 5 for greater final segment detail).*

6.0.1 a. Length.

6.0.1 a. (1). Flat Surface Length (FSL).

- *RNAV.* Section 1 flat surface begins at CD (0.3 *NM* prior to the *MAP*) and extends (distance *FSL* feet) to JK.
- *LP.* Section 1 flat surface begins at CD [40 meters (131.2336’) prior to the *MAP*] and extends (distance *FSL* feet) to JK.

Calculate the *FSL* value using *formula 6-1*. Use final segment formulas to determine *MAS* starting widths.

Formula 6-1. Flat Surface Length (FSL).	
$FSL = 8 * \frac{1852}{3600} * \left(\left(V_{KIAS} * \frac{171233 * \sqrt{(288 + 15) - 0.00198 * MDA}}{(288 - 0.00198 * MDA)^{2.628}} \right) + 10 \right) + 2 * ATT$	
$8 * (1852 / 3600) * \left(\left(V_{KIAS} * (171233 * ((288 + 15) - 0.00198 * MDA)^{0.5}) / (288 - 0.00198 * MDA)^{2.628} \right) + 10 \right) + 2 * ATT$	
Calculator	
V _{KIAS}	
MDA	
ATT (ft)	
FSL	
Click here to calculate	

Note: FSL time is 3 seconds reaction, and 5 seconds delay.

- 6.0.1 b. Section 1 end location (AB).**
- 6.0.1 b. (1) MDA ≥ 400 ft above airport/heliport elevation.** Locate AB coincident with JK.
- 6.0.1 b. (2) MDA < 400 ft above airport/heliport elevation.** Locate AB at $\frac{1852}{(0.3048 \cdot CG)}$ feet beyond JK for each foot of altitude needed to reach 400 ft above airport/heliport/surface elevation. The surface between JK and AB is a rising slope commensurate with the standard rate of climb (400 ft/NM). Find the appropriate CG-related slope using *formula 2-10*.
- 6.0.1 b. (3) Required/assigned turning altitude > 400 ft above airport/heliport elevation.** Locate AB and apply the surface described in *paragraph 6.0.1b(2)* until reaching the assigned turning altitude.
- 6.0.1 c. Width. RNAV and LP.**
- 6.0.1 c. (1) RNAV.** Splay each secondary area outer boundary line outward 15 degrees relative to the missed approach course (MAC) from the secondary area outer edge at CD (0.3 NM prior to MAP) until it reaches a point 2 NM from MAC. Splay the primary area boundary uniformly outward from the primary area edge at CD to reach 1.5 NM from MAC at the same distance the secondary reaches full width. Calculate the distance from MAC to the MAS-1 OEA primary and outer secondary boundary at any distance from CD using *formula 6-1a*. Calculate final primary and secondary widths at CD using final formulas.

- 6.0.1** c. (2) **LP**. Splay each secondary area outer boundary line outward 15 degrees relative to the **MAC** from the secondary area outer edge at **CD** (40 meters or 131.2336' prior to **MAP**) until it reaches a point 2 **NM** from **MAC**. Splay the primary area boundary uniformly outward from the primary area edge at **CD** to reach 1.5 **NM** from **MAC** at the same distance the secondary reaches full width. Calculate the distance from **MAC** to the **MAS-1 OEA** primary and outer secondary boundary at any distance from **CD** using *formula 6-1a*. Calculate final primary and secondary widths at **CD** using final sement formulas.

Formula 6-1a. RNAV/LP Section 1 Primary & Secondary Width.		
$MAS_{Y_{primary}} = d \cdot \frac{\tan\left(15 \cdot \frac{\pi}{180}\right) \cdot (1.5 \cdot NM - W_p)}{2 \cdot NM - W_s} + W_p$ $MAS_{Y_{secondary}} = d \cdot \tan\left(15 \cdot \frac{\pi}{180}\right) + W_s$		
Where d = along-track distance (ft) from the cd line ≤ 45352.743 NM = 1852/0.3048 W _p = Primary Start Width (ft) (final formula) W _s = Secondary Start Width (ft) (final formula)		
$MAS_{Y_{primary}} = d \cdot ((\tan(15 \cdot \pi / 180) \cdot (1.5 \cdot 1852 / 0.3048 - W_p)) / (2 \cdot 1852 / 0.3048 - W_s)) + W_p$ $MAS_{Y_{secondary}} = d \cdot \tan(15 \cdot \pi / 180) + W_s$		
Calculator		
d		Click here to calculate
W _p		
W _s		
MAS _{Y_{primary}}		
MAS _{Y_{secondary}}		

- 6.0.1** d. **Obstacle Clearance Section 1.**
- 6.0.1** d. (1) The nominal **MAS-1 OCS** is a flat surface. The **MSL** surface height (**HMAS**) is equal to the **MDA** minus 100 ft plus adjustments (*see formula 6-1b*). No obstacle may penetrate this surface.
- 6.0.1** d. (2) Where Section 1 extends beyond **SOC (JK)**, no obstacle may penetrate the **CG**-associated **OCS** slope between **SOC** and **AB**. Find helicopter altitude at **AB** using *formula 6-1c*.

Formula 6-1b. HMAS.		
$HMAS = MDA - (100 + adj)$		
Where adj = precipitous terrain, remote altimeter (only if full time), and excessive length of final adjustments		
MDA-(100+adj)		
Calculator		
MDA		Click here to calculate
adj		
HMAS		

Formula 6-1c. Section 1 End Helicopter Altitude (Copter _{AB}).		
$Copter_{AB} = (r + MDA \text{ or } DA) \cdot e^{\frac{AB_{NM} \cdot CG}{r}} - r$		
Where AB _{NM} = SOC to <u>AB</u> distance (NM) r = Earth radius (20890537 ft) CG = applied climb gradient (ft/NM)		
$(r + (MDA)) \cdot e^{((AB_{NM} \cdot CG)/r)} - r$		
MDA		Click here to calculate
AB _{NM}		
CG		
Copter _{AB}		

6.0.2

These criteria cover two basic **MA** constructions:

- Straight missed approach
- Turning missed approach

Note: These construction methods accommodate traditional combination straight and turning missed approaches.

The section 2 obstacle evaluation area (**OEA**) splays 15 degrees relative to the nominal track to reach full width (*see figure 6-3*). Apply the Section 2 standard **MA OCS** slope beginning from **AB**. Calculate precise **OCS** slope values using *formula 2-10*.

Note: All references to ‘standard MA OCS slope’ and use of ‘20:1’ refer to the output of formula 2-10 with an input climb gradient (CG) of 400 ft/NM.

Where a higher than standard **CG** (400 ft/NM) is required, apply the **CG** and the **CG**-related **OCS** from the **SOC**. Apply secondary areas as specified in this chapter. Measure the 4:1 secondary **OCS** perpendicular to the nominal track, measured from the primary boundary, or perpendicular to the primary boundary when considering arcs, diagonal corner-cutter, etc.

Locate the **MA** holding fix (**MAHF**) within 25 *NM* of the **ARP/HRP**.

Use *table 4-1, paragraph 4.1, MINIMUM LEG LENGTH* for course changes following the first fix after the **MAP**.

Design **MA** holding for 90 *KIAS*.

6.1 Straight Missed Approach.

The straight missed approach course (**MAC**) is a continuation of the final approach course (**FAC**). The straight **MA** section **2 OEA** begins at section **1** end (**AB**), and splays at 15 degrees relative to the nominal track until reaching full primary and secondary width (0.5-1.5-1.5-0.5). Apply the section **2** standard **OCS**, or the **OCS** associated with a higher **CG**, beginning at **AB** from the section **1** end **OCS** elevation. (*When the increased CG is no longer required, revert to the section 2 standard OCS*). Determine primary **OCS** elevation at an obstacle by measuring the along-track distance from **AB** to a point at/abeam the obstacle. Where the obstacle is located in the secondary area, apply the primary **OCS** slope to a point abeam the obstacle, then apply the 4:1 secondary slope (perpendicular to the track) from the primary boundary to the obstacle (*see figures 6-3, 6-4*).

6.2 Turning Missed Approach.

Apply turning criteria when requiring a turn at or beyond **SOC**. Where secondary areas exist in section **1**, they continue to full width in section **2**. Terminate turn-at-fix turn-side secondary areas not later than the early turn point. Do not apply turn-side secondary areas for turn-at-altitude construction.

There are two types of turn construction for the first **MA** turn:

- Turn at an altitude (*see paragraph 6.2.1*)
 - Always followed by a **DF** leg ending with a **DF/TF** connection
- Turn at a fix (*see paragraph 6.2.2*)
- Always followed by a **TF** leg ending with a **TF/TF** connection.

Following a turn, the minimum segment length must be the greater of:

- The minimum length calculated using the *chapter 2* formulas.
- The distance from previous fix to the intersection of the 30-degree converging outer boundary line extension and the nominal track, (plus segment end fix **DTA** and **ATT**).

Minimum **DF** leg length must accommodate 6 seconds (minimum) of flight time based on either 70 *KIAS* or 90 *KIAS*, as appropriate, applied between the wind

spiral (**WS**)/ direct-to-fix-line tangent point, and the earliest maneuvering point of the **DF/TF** fix. Convert to **TAS** using the **MAHF** altitude.

6.2.1 Turn At An Altitude.

Apply turn-at-an-altitude construction unless the first **MA** turn is at a fix. Since pilots may commence the **MA** at altitudes higher than the **MDA** and helicopter climb rates differ, turn-at-an-altitude construction protects the large area where turn initiation is expected. This construction also provides protection for ‘turn as soon as practicable’ and combination straight and turning operations. When a required turning altitude exceeds the minimum turning altitude (typically 400 ft above the airport, heliport, or height above surface), specify the turning altitude in a 100-ft increment. Where operationally required, 20-ft increments may be applied.

When a turn at altitude **MA**, (low **MDA**, turn at less than 400 ft above airport/heliport or height above surface, etc.) is required, training and equipment requirements are approved by Flight Standards waiver and entered on *FAA Form 8260-10*. Annotate the chart “Training and Equipment required.”

Track guidance is assumed throughout the operation; therefore, dead reckoning (**DR**) segments are not considered. Apply turning **MA** criteria whenever the **MAC** differs from the **FAC**. The following applies:

- Section 1/Section 2 connection is depicted in *figure 6-5* for a *minimum altitude* turn-at-altitude **MA**. The **CD** is the earliest the **MAP** can be received. **AB** is the **SOC** (*figure 6-6 depicts higher than minimum altitude turns*).
- Section 2 and section 1 connect at **AB**.
- Construct section 2 outside-turn boundaries using **WS** vice specified radii. Construct outside boundaries in relation to these **WS** and possible tracks (*see figure 6-7*).
- Construct inside-turn boundaries in relation to possible tracks.
- Apply the standard **OCS** slope (or the assigned **CG**-associated slope) beginning at **AB** at **AB OCS** height. The secondary 4:1 surface rises from the primary **OCS**.

6.2.1 a. Turn Initiation Area (**TIA**).

Construct the **TIA**, a portion of a straight **MA**, beginning from the earliest **MA** turn point (**CD**), and ending where the specified minimum turning altitude is reached, (**AB** or **LL**’). Base the **TIA** length on the climb distance required to reach the turning altitude. The **TIA** minimum length must place the aircraft at an

altitude from which obstacle clearance is provided in section **2** outside the **TIA**. The **TIA** boundary varies with length, the shortest **B-A-C-D**, where **AB** overlies **JK**. Where the **TIA** is contained within section **1**, **B-A-J-C-D-K** defines the boundary. Where the required turn altitude exceeds that supported by section **1**, the **TIA** extends into section **2**, (see figure 6-8 and Order 8260.54A for construction examples) and points **L'-L-A-J-C-D-K-B** define its boundary. In this case, **L-L'** is the early turn point based on the helicopter climbing at the prescribed **CG**. Calculate **TIA** length using formula 6-2a. A 4:1 secondary is depicted on the non-turning side of the primary (see figures 6-6, 6-8, and 6-9).

Step 1: Turn altitude. The turn altitude is either operationally specified (must be at or above altitude required by obstacles) or determined by obstacle evaluation. Evaluate the nominal **OCS**. If the **OCS** is penetrated, mitigate the penetration with one or a combination of the following:

- a. Raise **MDA**
- b. Establish a climb gradient that clears the obstacle
- c. Move **MAP**
- d. If the penetration is outside the **TIA**, consider raising the climb-to altitude

6.2.1

- a. (1) Determine the helicopter required minimum turning altitude:
 - Identify the controlling obstacle in section **2** (straight **MA**)
 - For straight **OCS/CG**/length options
 - Identify the controlling obstacle in section **2**, (typically turn-side)
 - Find the shortest distance from the **TIA** lateral boundary to the obstacle
 - Apply this distance and the **MA OCS** slope to find the **TIA**-to-obstacle **OCS** rise
 - The minimum **TIA** boundary, (and **OCS** end elevation) equals the obstacle elevation minus **OCS** rise
 - The minimum turn altitude is the sum of (**TIA OCS** boundary elevation) and (final **ROC**), rounded to the next higher 100 ft-increment (where operationally required, 20-ft increments may be applied)

Note 1: **TIA** lateral boundary is the straight segment (portion) lateral boundary until the required minimum turn altitude and **TIA** length are established.

Note 2: Repeat step 1 until acceptable results are obtained.

The specified altitude must equal or exceed the section **1** end altitude. Find section **1** end altitude using formula 6-1c.

Step 2: Calculate **TIA** length using formula 6-2a (see figures 6-6 and 6-8).

Formula 6-2a TIA_{length}		
$TIA_{length} = FSL \cdot \frac{r}{(r + MDA)} + \frac{r}{CG} \cdot \frac{1852}{0.3048} \cdot \ln\left(\frac{r + turn_{alt}}{r + MDA}\right)$		
Where MDA = Final MDA r = Earth Radius (20890537 ft) CG = Climb Gradient (Standard 400) turn _{alt} = required turn altitude		
$FSL * r / (r + MDA) + r / CG * 1852 / 0.3048 * \ln((r + turn_{alt}) / (r + MDA))$		
Calculator		
FSL (formula 6-1)		Click here to calculate
MDA		
CG		
turn _{alt}		
TIA _{length}		

Step 3: Locate the **TIA** end at a distance **TIA** length beyond **CD** (from Step 2) (**LL'**) where the applied **OCS** reaches the required **TIA** end surface elevation (from Step 1).

Step 4: Locate the latest turn point, (**PP'**) at distance **rr** (from formula 2-4) beyond the **TIA** end (**AB/LL'**). (See example figures 6-6 and 6-8).

6.2.1 b. **OEA Construction after TIA.**

The **OEA** includes areas to protect the earliest and latest direct tracks from the **TIA** to the fix. Construct the obstacle areas about each of the tracks as described below. See figures 6-9 through 6-15 for various turn geometry construction illustrations.

6.2.1 b. (1) **Early Turn Track and OEA Construction.**

Where the early track from the **FAC/CD** intersection defines a turn less than or equal to 75 degrees relative to the **FAC**, the tie-back point is **C** (see figure 6-5); if the early track defines a turn greater than 75 degrees relative to the **FAC**, tie-back to point **D** (see figure 6-7). Where the early track represents a turn greater than 165 degrees ~ (see figures 6-12 and 6-15), begin the early turn track and the 15-degree splay from the non-turn side **TIA** end + **rr** (formula 2-4) (**PP'**).

Step 1: Construct a line (defines the earliest-turn flight track), from the tie-back point to the fix. See figures 6-9, 6-10, 6-14, and 6-15.

Step 2: Construct the outer primary and secondary **OEA** boundary lines parallel to this line (0.5-1.5-1.5-0.5 segment width). See figures 6-9 and 6-10.

Step 3: From the tie-back point, construct a line splaying at 15 degrees to intersect the parallel boundary lines or segment end, whichever occurs earlier (*see figures 6-9 and 6-10*).

Apply secondary areas only after the 15-degree splay line intersects the primary boundary line (*see figures 6-9, 6-10, 6-13, etc*).

Step 3alt-1: Where **Step 3** construction provides less than full-width protection at the **DF** fix, construct the **OEA** inner boundary with a line splaying from the tie-back point at 15 degrees relative the direct-to-fix line, (or greater where required to provide full-width protection at the **DF** fix), until it intersects the parallel boundary lines (not later than tangent/tangent-extension to the full-width-arc about the fix), and provides full-width protection at or before the **DF** fix. **DF** secondary areas begin/exist only where full width primary exists. *See figures 6-10, 6-14 and 6-15.*

Note: Where excessive splay (dependent upon various conditions but generally in the 20-25 degree range), consider modifying the segment to avoid protection and/or construction difficulties.

6.2.1

b. (2) Late Turn Track and OEA Construction.

Apply **WSs** for late-turn outer boundary construction using the following calculations, construction techniques, and bank angles of 11 degrees or 14 degrees, as appropriate.

Step 1: Find the no-wind turn radius (**R**) using formula 6-2b.

Formula 6-2b. No-Wind (R).		
$R = \frac{(V_{KTAS} + 0)^2}{\tan(\text{Bank}_{\text{ANGLE}} \cdot \left(\frac{\pi}{180}\right)) \cdot 68625.4}$		
Where V_{KTAS} = True Airspeed (<i>formula 2-1</i>) $\text{Bank}_{\text{ANGLE}}$ = <i>Table 2-2</i> value		
$(V_{KTAS}+0)^2/(\tan(\text{Bank}_{\text{ANGLE}}*\pi/180)*68625.4)$		
Calculator		
V_{KTAS}		Click here to calculate
$\text{Bank}_{\text{ANGLE}}$		
R		

Note: Apply the appropriate indicated airspeed and minimum assigned turn altitude when converting to true airspeed for this application.

Step 2: Calculate the Turn Rate (**TR**) using *formula 6-2c*. Maximum **TR** is 3 degrees per second. Apply the lower of 3 degrees per second or *formula 6-4a* output.

Formula 6-2c. Turn Rate (TR).		
$TR = \frac{3431 \cdot \tan\left(\text{Bank}_{\text{ANGLE}} \cdot \frac{\pi}{180}\right)}{\pi \cdot V_{\text{KTAS}}}$		
Where $\text{Bank}_{\text{ANGLE}} = \text{Table 2-2}$ $V_{\text{KTAS}} = \text{Formula 2-1}$		
$(3431 * \tan(\text{Bank}_{\text{ANGLE}} * \pi / 180)) / (\pi * V_{\text{KTAS}})$		
Calculator		
Bank _{ANGLE}		Click here to calculate
V _{KTAS}		
TR		

Step 2a: Calculate the Turn Magnitude (**TMAG**) using the appropriate no-wind turn radius and the arc distance (degrees) from turn start (at **PP'**) to the point of tangency with a line direct to the fix.

Step 2b: Calculate the highest altitude in the turn using *formula 6-2d* (**MAHF** altitude may be used). Determine subsequent fix altitudes using fix-to-fix direct measurement and 400 ft/NM, (or higher assigned) climb rate.

Formula 6-2d. Highest Altitude Gained (Total _{ALT}).		
$\text{HighestTurn} = \text{MDA}_{\text{ALT}} + (2R \cdot \pi \cdot \frac{\text{Turn}_{\text{Magnitude}}}{360} \cdot \text{CG})$		
Where $\text{MDA}_{\text{ALT}} = \text{Procedure MDA}$ $R = \text{No-wind turn radius (NM)}$ $\text{Turn}_{\text{Magnitude}} = \text{Turn start to rollout (deg)}$ $\text{CG} = \text{Standard 400 ft/NM}$		
$\text{MDA}_{\text{ALT}} + (2 * R * \pi * \text{Turn}_{\text{Magnitude}} / 360 * \text{CG})$		
Calculator		
MDA _{ALT}		Click here to calculate
R		
Turn _{Magnitude}		
CG		
Total _{ALT}		

Step 3: Find the omni-directional wind component (**V_{KTW}**) for the highest altitude in the turn applying *paragraph 2.5.6*.

Step 4: Apply this common wind value (**Step 3**) to all first-turn wind spirals.

Note: Apply 30 knots for turn altitudes ≤ 2000 ft above heliport/airport elevation.

Step 5: Calculate the wind spiral radius increase (ΔR) (relative **R**), for a given turn magnitude (ϕ) using formulas 6-2c and 6-2e.

Formula 6-2e. WS (ΔR).		
$\Delta R = \frac{V_{KTW} \cdot \phi}{3600 \cdot TR}$		
Where V_{KTW} = Windspeed, <i>Formula 2-2</i> ϕ = Degrees of turn TR = Turn Rate, <i>Formula 6-2c</i>		
$(V_{KTW} * \phi) / (3600 * TR)$		
Calculator		
V_{KTW}		Click Here to Calculate
ϕ		
ΔR (NM)		
ΔR (ft)		

6.2.2 Turn-At-A-Fix.

The first **MA** turn-at-a-fix may be a fly-by or fly-over fix. Use fly-by unless a fly-over is required for obstacle avoidance or where mandated by specific operational requirements. The turn fix early-turn-point must be at or beyond section **1** end.

6.2.2 a. Early/Late Turn Points.

The fly-by fix early-turn-point is located at (FIX-**ATT**-**DTA**) prior to the fix.

The fly-by fix late-turn-point is located at a distance (FIX + **ATT** - **DTA** + **rr**) from the fix.

The fly-over early-turn-point is located at a distance (FIX - **ATT**) prior to the fix.

The fly-over late-turn-point is located at a distance (FIX + **ATT** + **rr**) beyond the fix.

Fly-by fixes (see figure 6-16).

$$\text{Early}_{TP} = \text{Fix} - \text{ATT} - \text{DTA}$$

$$\text{Late}_{TP} = \text{Fix} + \text{ATT} - \text{DTA} + rr$$

Fly-over fixes (see figure 6-16).

$$\text{Early}_{TP} = \text{Fix} - \text{ATT}$$

$$\text{Late}_{TP} = \text{Fix} + \text{ATT} + rr$$

6.2.2

b. Turn-at-a-fix. (First MA turn) Construction.

The recommended maximum turn is 70 degrees; the absolute maximum is 90 degrees. The first turn fix must be located on the final approach track extended.

Step 1: Calculate aircraft altitude at **AB** using formula 6-1c.

Step 2: Calculate fix distance based on minimum fix altitude. Where the first fix must be located at the point the helicopter reaches or exceeds a specific altitude, apply formula 6-2f (using the assigned/applied **CG**), to calculate fix distance (ft) (D_{fix}) from **SOC** (**AB/JK**) (see figures 6-17 through 6-20).

Formula 6-2f. Fix Distance (D_{fix})		
$D_{\text{fix}} = \ln\left(\frac{\text{Alt}_{\text{fix}} + r}{\text{Copter}_{\text{SOC}} + r}\right) \cdot \frac{r}{\text{CG}}$		
Where Alt_{fix} = Minimum altitude required at fix $\text{Copter}_{\text{SOC}}$ = Copter AB (SOC) altitude CG = Climb Gradient (Standard 400 ft/NM)		
$\ln((\text{Alt}_{\text{fix}}+r)/(\text{Copter}_{\text{SOC}}+r))*r/\text{CG}$		
Calculator		
Alt_{fix}		Click here to calculate
$\text{Copter}_{\text{SOC}}$		
CG		
D_{fix} (NM)		

Step 3: Calculate the altitude a helicopter climbing at the assigned **CG** would achieve over an established fix using formula 6-2g.

Formula 6-2g <i>Altitude Achieved at Fix (Alt_{fix}).</i>		
$Alt_{fix} = (r + Copter_{SOC}) \cdot e^{\left(\frac{CG \cdot D_{fix}}{r}\right)} - r$		
where Copter _{SOC} = Copter AB (SOC) altitude CG = Climb Gradient (Standard 400 ft/NM) D _{fix} = Distance (ft) from AB to fix		
$(r+Copter_{SOC}) \cdot e^{(CG \cdot D_{fix}/r)} - r$		
Calculator		
Copter _{SOC}		Click here to calculate
CG		
D _{fix} (NM)		
Alt _{fix}		

6.2.2

c. **Fly-By Turn Calculations and Construction.**

(Consider direction-of-flight-distance positive, opposite-flight-direction distance negative).

6.2.2

c. (1) **Fly-By Turn Calculations.**

Step 1: Calculate the fix to early-turn distance (D_{early TP}) *using formula 6-2h.*

Formula 6-2h. <i>Early Turn Distance (D_{earlyTP}).</i>		
$D_{earlyTP} = ATT + DTA$		
Where ATT = along-track tolerance DTA = distance of turn anticipation(formula 6-2i)		
$ATT+DTA$		
Calculator		
ATT		Click here to calculate
DTA		
D _{earlyTP}		

Apply formula 6-2i for distance turn anticipation (DTA).

Formula 6-2i. Distance Turn Anticipation.

$$DTA = R \cdot \tan\left(\frac{\phi}{2} \cdot \frac{\pi}{180}\right)$$

Where ϕ = Turn/Heading Change (Degrees)
 R = Turn Radius, No-Wind

$R \cdot \tan(\phi/2 \cdot \pi/180)$

Calculator

R		Click here to calculate
ϕ (Degrees)		
DTA		

6.2.2

c. (2) Early Turn Point (ETP) and Area construction.

Table 6-1. Inside Turn Expansion Guide.	
Outbound Segment Boundary Relative ETP Connections	Expansion Line Required
Secondary & Primary PRIOR ETP	15-Degree Line
Secondary Prior ETP	15-Degree Line
Primary Beyond ETP	$\phi/2$
Secondary & Primary Beyond ETP	$\phi/2$

Note: ETP = LL' early turn point connection, 15-degree line relative the outbound segment, $\phi/2$ = half turn-angle

6.2.2

c. (3) **Inside turn (Fly-By) Construction** is predicated on the location of **LL'** and primary/secondary boundary intersections (early turn connections), relative the outbound segment, *see table 6-1. (See figures 6-17 and 6-18).*

Where no inside turn secondary area exists in section **1**, apply secondary areas only after the turn expansion line/s intersect the outbound segment boundaries.

Apply the same technique to primary and secondary area connections when both inbound segment connection points fall either outside the outbound segment, or inside the outbound segment primary area. When both inbound connection points are within the outbound segment secondary area or its extension, *table 6-1* provides a connection method for each point.

Note: Where half-turn-angle construction is indicated, apply a line splaying at the larger of, half-turn-angle, or 15 degrees, relative the outbound track. Where a small angle turn exists and standard construction is suitable for one, but not both splays; connect the uncommon splay, normally primary, to the outbound primary boundary at the same along-track distance as the secondary connection. Maintain or increase primary area as required.

Step 1: Construct a baseline (**LL'**) perpendicular to the inbound track at distance D_{earlyTP} (formula 6-2h) prior to the fix (see figures 6-17 and 6-18).

CASE 1: The outbound segment boundary, or its extension, is **beyond** the baseline (early-turn connection points are **prior** to the outbound segment boundary),

Step 1: Construct the inside turn expansion area with a line, drawn at one-half the turn angle from the inbound segment primary early turn connection point, to intercept the outbound segment primary boundary (see figure 6-18).

Step 2 (if required): Construct the inside turn expansion area with a line, drawn at one-half the turn angle, from the inbound segment secondary early turn connection point, to intercept the outbound segment secondary boundary (see figure 6-18).

CASE 2: The outbound segment secondary boundary or its extension is **prior** to the **LL'** baseline and outbound segment primary boundary or its extension is beyond the **LL'** baseline, (early-turn connection points are both **within** the outbound segment secondary area or its extension).

Step 1: Construct the inside-turn expansion area with a line splaying at 15-degree, (relative the outbound track) from the inbound segment secondary early turn connection point to intersect the outbound segment boundary.

Step 1 Alt: Begin the splay from **L'** when the turn angle exceeds 75 degrees~.

Step2: Construct the primary boundary with a line, drawn at one-half the turn angle, from the inbound segment primary early turn connection point to intercept the outbound segment primary boundary (see figure 6-17).

CASE 3: The outbound segment secondary and primary boundaries, or their extensions, are **prior** to the **LL'** baseline (early-turn connection points are **inside** the outbound segment primary area).

Step 1: Construct the inside turn expansion area with a line, splaying at 15-degree (relative the outbound track) from the more conservative point, (**L'**) or (the intersection of **LL'** and the inbound segment inner primary boundary), to intersect the outbound segment boundaries.

Step 1 Alt: Begin the splay from **L'** when the turn angle exceeds 75 degrees~.

In this case, terminate the inside turn secondary area at the outbound segment primary boundary, since it falls before the early turn points, **LL'** (see figure 6-18a).

6.2.2 c. (4) Outside Turn (Fly-By) Construction.

Step 1: Construct the outer primary boundary using a radius of 1/2 primary width (1.5 *NM*), centered on the plotted fix position, drawn from the inbound segment extended primary boundary until tangent to the outbound segment primary boundary. See figure 6-17.

Step 2: Construct the secondary boundary using a radius of one-half segment width (2*NM*), centered on the plotted fix position, drawn from the inbound segment extended outer boundary until tangent to the outbound segment outer boundary (see figures 6-17, 6-18, and 6-18a).

6.2.2 d. Fly-Over Turn Construction.

6.2.2 d. (1) Inside Turn (Fly-Over) Construction.

Step 1: Construct the early-turn baseline (**LL'**) at distance **ATT** prior to the fix, perpendicular to the inbound nominal track.

Step 2: Refer to paragraph 6.2.2.c(3), (skip *Step 1*).

6.2.2 d. (2) Outside Turn (Fly-Over) Construction.

Step 1: Construct the late-turn baseline (**PP'**) at distance (**ATT + rr**) beyond the fix, perpendicular to the inbound nominal track. Calculate late turn distance using formula 6-2j (see figure 6-19).

Formula 6-2j. Late Turn Point Distance (D_{lateTP}).		
$D_{lateTP} = ATT + rr$		
where ATT = along-track tolerance rr = delay/roll-in <i>formula 2-4</i>		
ATT+rr		
Calculator		
ATT		Click here to calculate
rr		
D_{lateTP}		

Step 2: Apply wind spiral outer boundary construction for the first **MA** fly-over turn. See *paragraph 6.2.1b(2)* for necessary data, using the higher of *formula 6-2g* output, or the assigned fix crossing altitude for **TAS** and turn radius calculations and *paragraph 6.4* for wind spiral construction. A non-turn side secondary area may extend into the **WSI** area.

6.2.2 d. (3) Obstacle Evaluations. See *paragraph 6.2.3*.

6.2.3 Section 2 Obstacle Evaluations.

6.2.3 a. Turn at an Altitude Section 2.

Apply an inclined **OCS (MA OCS)** slope to section 2 obstacles based on the shortest primary area distance (**do**) from the **TIA** boundary to the obstacle. *Shortest primary area distance is the length of the shortest line kept within primary segments that passes through the early turn baseline of all preceding segments.*

Step 1: Measure and apply the **OCS** along the shortest primary area distance (**do**) from the **TIA** boundary to the obstacle (single and multiple segments). See various obstacle measurement examples in *figures 6-19 through 6-22*.

Step 2: For obstacles located in secondary areas, measure and apply the **OCS** along the shortest primary area distance (**do**) from the **TIA** boundary to the primary boundary abeam the obstacle, then the 4:1 slope along the shortest distance to the obstacle, (taken perpendicular to the nominal track or in expansion areas, to the primary arc, the primary corner-cutter, corner apex, or other appropriate primary boundary). Where an obstacle requires multiple measurements (*an obstacle is equidistant from multiple primary boundary points, or lies along perpendiculars from multiple primary boundary points, etc.*), apply the more adverse result from each of the combined primary/secondary measurements. See *figures 6-19 through 6-22*.

6.2.3 b. Turn at Fix Section 2.

Apply an inclined **OCS** (**MA OCS**) slope, beginning at **SOC** at the inbound-segment end **OCS** height.

Step 1: Measure and apply the **OCS** along the shortest distance (**do**) from **AB** (parallel to track) to **LL'**, the shortest primary distance to the obstacle (single and multiple segments). See figures 6-19 and 6-20, for various obstacle measurement examples.

Step 2: For obstacles located in secondary areas, measure and apply the **OCS** along the shortest primary area distance (**do**) from the **TIA** boundary to the primary boundary abeam the obstacle, then the 4:1 slope along the shortest distance to the obstacle, (taken perpendicular to the nominal track or in expansion areas, to the primary arc, the primary corner-cutter, corner apex, or other appropriate primary boundary). Where an obstacle requires multiple measurements (*where an obstacle is equidistant from multiple primary boundary points, or lies along perpendiculars from multiple primary boundary points, etc.*), apply the more adverse result from each of the combined primary/secondary measurements (*see figure 6-21*).

6.3 Turning Missed Approach (Second Turn).

6.3.1 DF/TF Turn (Second Turn, following turn-at-altitude).

Turns at the **DF** path terminator fix will be fly-by or fly-over to a **TF** leg. In either case, the outer boundary provides fly-over protection, and the inner boundary provides fly-by protection. Maximum turn angle is 90 degrees (applicable to both tracks within the **DF** segment). This application provides that construction under *chapter 2*, or this chapter will apply, including cases where the inside and outside turn construction differs.

6.3.1 a. DF/TF (Fly-By) Turn.

6.3.1 a. (1) Inside DF/TF (Fly-By) construction.

CASE 1: Full width inside secondary exists at the early turn point (**LL'**).

Step 1: Construct a baseline (**LL'**) perpendicular to the inbound track nearer the turn side boundary at distance D_{earlyTP} (*formula 6-2h*) prior to the fix.

Step 2: Apply *chapter 2* criteria.

CASE 2: Less than full width inside secondary exists at (**LL'**).

Step 1: Apply *paragraph 6.2.2.c(3)* criteria.

6.3.1 a. (2) Outside DF/TF (Fly-By) construction.

CASE 1: Full width outside secondary exists at the early turn point (L'L'').

Step 1: Construct a baseline (L'L'') perpendicular to the inbound track nearer the non-turn side boundary at distance D_{earlyTP} (*formula 6-2h*) prior to the fix.

Step 2: Apply *chapter 2* criteria. See *figures 6-21 through 6-22*.

CASE 2: Less than full width outside secondary exists at (L'L'').

Step 1: Apply *paragraph 6.2.2c(4)* criteria.

6.3.1 b. DF/TF (Fly-Over) Turn.

6.3.1 b. (1) Inside DF/TF (Fly-Over) Turn Construction.

Step 1: Construct a baseline (LL') perpendicular to the inbound track nearer the turn side boundary at distance *ATT* prior to the fix (*see figure 6-22*).

Note: Where half-turn-angle construction is specified, apply a line splaying at the larger of half-turn-angle or 15 degrees relative the outbound track.

CASE 1: No inside secondary area exists at LL'.

Step 1: Create the *OEA* early-turn protection by constructing a line, splaying at the larger of one-half (1/2) the turn angle, or 15 degrees relative the outbound track, from the intersection of LL' and the inbound segment inner primary boundary to connect with the outbound *TF* segment boundaries.

The *TF* secondary area begins at the intersection of this diagonal line and the outbound segment boundary.

CASE 2: Partial width inside secondary area exists at LL'.

Step 1: Create the *OEA* early-turn primary area protection by constructing a line, splaying at the larger of one-half (1/2) the turn angle, or 15 degrees relative the outbound track, from the intersection of LL' and the inbound segment inner primary boundary to connect with the *TF* segment primary boundary.

Step 2: Create the *OEA* early-turn secondary protection by constructing a line, splaying at the larger of one-half (1/2) the turn angle, or 15 degrees relative the outbound track, from the intersection of LL' and the inbound segment inner boundary to connect with the *TF* segment boundary.

CASE 3: Full width inside secondary area exists at LL'.

Step 1: Apply *chapter 2* criteria. See *figure 6-21*.

6.3.1 b. (2) Outside DF/TF (Fly-Over) Turn Construction.

Step 1: Construct the late-turn baseline for each inbound track, (**PP'**) for the track nearer the inside turn boundary, and (**P'P''**) for the outer track at distance (**ATT + rr**) beyond the fix, perpendicular to the appropriate inbound track. See *figure 6-22*.

Note: A DF/TF Fly-Over turn is limited to 90 degrees (both inbound tracks) and should require no more than one WS per baseline. Construct the outside track WS (**WS1**) on base line **P'P''**, then construct **WS2** on baseline **PP'**.

Step 2: Apply wind spiral construction, see *paragraph 6.2.1b(2)* for necessary data, and *paragraph 6.4* for wind spiral construction. See *figure 6-22*.

6.3.2 TF/TF Turn (Second Turn, following turn-at-fix).

Turns at the **TF** path terminator fix will be fly-by or fly-over to a **TF** leg. In either case, the outer boundary provides fly-over protection, and the inner boundary provides fly-by protection. Maximum turn angle is 90 degrees. This application provides that construction under *chapter 2*, or this chapter will apply, including cases where the inside and outside turn construction differs.

6.3.2 a. TF/TF (Fly-By) Turn.

6.3.2 a. (1) Inside TF/TF (Fly-By) construction.

Step 1: Apply *chapter 2* criteria.

6.3.2 a. (2) Outside TF/TF (Fly-By) construction.

Step 1: Apply *chapter 2* criteria.

6.3.2 b. TF/TF (Fly-Over) Turn.

6.3.2 b. (1) Inside TF/TF (Fly-Over) Turn Construction.

Step 1: Apply *chapter 2* criteria.

6.3.2 b. (2) Outside TF/TF (Fly-Over) Turn Construction.

Step 1: Apply *chapter 2* criteria.

6.4 Wind Spiral Cases.

Wind Spiral (**WS**) construction applies to turn-at-an-altitude, turn-at-a-fix (Fly-Over) for the first **MA** turn, and **DF/TF** (Fly-Over) for the second turn. The late-turn line **P'** designator is typically placed where the baselines cross. Where baseline extension is required, mark each baseline inner end with **P'**. Additional **WS** examples are available in *Order 8260.54A*.

Each **WS** has several connection options along its boundary. The chosen connection(s) must provide the more conservative reasonable track and protection areas (*see figures 6-23 through 6-25 for examples*).

- A 15-degree, (or greater*) splay line to join outbound segment outer boundaries, from:
 - **WS**/direct-to-fix tangent point
 - **WS** to **WS** tangent line origin
 - **WS** to **WS** tangent line end
 - **WS**/outbound segment parallel point (**DF** segment **NA**)
- A tangent line to join the next **WS** (*figure 6-25*)
- A tangent line direct to the next fix (**DF** segment) (*see figure 6-24*)
- A tangent line, converging at 30 degrees to the segment track (**TF** segment) (*see figure 6-20*)

**Note: See paragraph 6.4.1a and 6.4.1b for alternate connection details.*

*Note: Where multiple **WSs** exist, a line from the earlier **WS** splaying at 15 degrees relative the tangent line between **WSs** may produce the more conservative construction.*

Outbound segment type and turn magnitude are primary factors in **WS** application. Refer to *table 6-2* for basic application differences. Calculate **rr** using *formula 2-4*.

Table 6-2. MA First Turn Wind Spiral Application Comparison.		
	Turn At Fix (FO)	Turn At Altitude
WS1 Baseline (PP')	Fix + $ATT + rr$	$TIA + rr$
WS2 Baseline (PP')	Fix + $ATT + rr$	$TIA + rr$
WS3 Baseline (CD Ext)	NA	$TIA + rr$
WS Number	1 or 2	1, 2, or 3 *
Final WS Connection (Tangent line)	30 to outbound track	Direct to Fix

* Where a required turn exceeds that served by three wind spirals, consider adding fixes to avoid prohibitively large protection areas resulting from further wind spiral application.

6.4 a Turn-at-Fix (FO) and Turn-at-Altitude WS Comparison.

Three cases for outer-boundary wind spirals commonly exist:

- (Case 1), Small angle turns use one wind spiral (*WS1*);
- (Case 2), Turns near/exceeding 90° ~ use a second wind spiral (*WS2*); and
- (Case 3), turns near/exceeding 180° ~ use a third wind spiral (*WS3*).

6.4 a. (1) Turn-at-Altitude WS application concludes with a line tangent to the final WS direct to the next fix.

6.4 a. (2) Turn-at-Fix (FO) WS application concludes with a line tangent to the final WS converging at a 30-degree angle to the outbound segment nominal track. The intersection of this line with the nominal track establishes the earliest maneuvering point for the next fix. The minimum segment length is the greater of:

- The minimum length calculated using the *chapter 2 formulas* or,
- The distance from previous fix to the intersection of the 30-degree converging outer boundary line extension and the nominal track, (plus *DTA* and *ATT*). See *paragraph 6.3.1*.

6.4 a. (3) Second MA Turn DF/TF Turn-at-Fix (FO) WS application concludes with a line tangent to the final WS converging at a 30-degree angle to the outbound segment nominal track. This construction requires two WS baselines, one for each inbound track. Each late turn baseline is located (*ATT + rr*) beyond the fix, oriented perpendicular to the specific track. The baseline for the inbound track nearer the inside turn boundary is designated **PP'**, the baseline associated with the outside turn track is designated **P'P''**. For convenience **P'** is often placed at the intersection of the two baselines, but a copy properly goes with each baseline inner end if baseline extensions are required (*see figure 6-22*).

6.4.1 First MA Turn WS Construction.

Find late turn point distance ($D_{\text{late TP}}$) using formula 6-2j.

6.4.1 a. **CASE 1:** Small angle turn using 1 WS.

Step 1: Construct the *WSI* baseline, (**PP'**) perpendicular to the straight *MA* track at the late-turn-point (*see table 6-2 for line PP' location*). *See figures 6-5 and 6-8*.

Step 2: Locate the wind spiral center on **PP'** at distance **R** (no-wind turn radius, using *formula 6-2b*; see *figure 6-8*) from the intersection of **PP'** and the inbound-segment outer-boundary extension (see *figures 6-8 and 6-9*).

Step 3: Construct **WSI** from this outer boundary point in the direction of turn until tangent to the **WS/Segment** connecting line from *table 6-2* (see *figure 6-9*).

CASE 1-1: Turn-at-Altitude (**WSI** ends when tangent to a line direct to fix).

Step 1: Construct the **OEA** outer primary and secondary boundary lines parallel to this track (0.5-1.5-1.5-.0.5 segment width). See *figure 6-9*.

Step 2: Construct a line from the **WSI** tangent point, splaying at 15 degrees from the **WSI-to-fix** track until it intersects the parallel boundary lines or reaches the segment end (see *figure 6-9*).

Note: Consider 'full-width protection at the fix' to exist where the splay line is tangent to a full-width-radius-circle about the fix.

Step 2alt-1: Where *Step 2* construction provides less than full-width protection at the DF fix, construct the **OEA** outer boundary with a line splaying from the **WSI/direct-to-fix** tangent point at 15 degrees relative the direct-to-fix line, (or greater where required to provide full-width protection at the **DF** fix), until it intersects the parallel boundary lines (not later than tangent/tangent-extension to the full width-arc about the fix), and provides full-width protection at or before the **DF** fix. **DF** secondary areas begin/exist only where full width primary exists (see *figure 6-9*).

Note: Where excessive splay (dependent upon various conditions generally in the 35-40 degree range), consider lengthening the segment, restricting the speed, category, etc. to avoid protection and/or construction difficulties.

CASE 1-2: Turn-at-Fix (FO) (**WSI** ends when tangent to a 30-degree line converging to nominal track).

Step 1: Construct the **OEA** outer boundary line using **WSI** and the tangent 30-degree converging line until it crosses the outbound segment boundaries (see *figure 6-19*).

Step 1a: Where **WSI** lies within the outbound segment primary boundary, construct the **OEA** boundary using **WSI** and a line (from the point **WSI** is parallel to the outbound segment nominal track), splaying at 15 degrees relative the outbound segment nominal track until it intersects the outbound segment boundary lines.

Step 1b: Where **WS1** lies within the outbound segment secondary boundary, construct the **OEA** boundary using **WS1** and a line (from the point **WS1** is parallel to the outbound segment nominal track), splaying at 15 degrees relative the outbound segment nominal track until it intersects the outbound segment boundary line. Continue **WS1** and the tangent 30-degree converging line to establish the inner primary/secondary boundary (*see similar figure 6-24*).

6.4.1

b. CASE 2: Larger turn using more than 1 WS. For turns nearing or greater than 90 degrees, **WS2** may be necessary. *See figure 6-20.*

Step 1: To determine **WS2** necessity, locate its center on baseline **PP'**, at distance **R** from the inbound-segment inner-boundary extension.

Step 2: Construct **WS2** from this inner boundary point in the direction of turn until tangent to the **WS/Segment** connecting line from *table 6-2*. *See figure 6-20.*

Step 3: Where **WS2** intersects **WS1** construction, (including the connecting and expansion lines where appropriate), include **WS2** in the **OEA** construction. Otherwise revert to the single **WS** construction.

Step 3a: Connect **WS1** and **WS2** with a line tangent to both (*see figure 6-20*).

Note: The WS1/ WS2 tangent line should parallel a line between the WS center points.

CASE 2-1: Turn-at-Altitude (**WS2** ends when tangent to a line direct to fix).

Step 1: Construct the **OEA** outer primary and secondary boundary lines parallel to this track (0.5-1.5-1.5.0.5 segment width).

Step 2: Construct a line from the **WS2** tangent point, splaying at 15 degrees from the **WS2-to-fix** track until it intersects the parallel boundary lines or reaches the segment end (*see figure 6-9*).

Note: Consider 'full-width protection at the fix' exists where the splay line is tangent to a full-width- radius- circle about the fix.

Step 2alt-1: Where *Step 2* construction provides less than full-width protection at the **DF** fix, construct the **OEA** outer boundary with a line splaying from the **WS2/direct-to-fix** tangent point at 15 degrees relative the direct-to-fix line, (or greater where required to provide full-width protection at the **DF** fix), until it intersects the parallel boundary lines (not later than tangent/tangent-extension to the full-width-arc about the fix), and provides full-width protection at or before the **DF** fix. Where the turn angle is ≤ 105 degrees, or the divergence angle between the **WS/WS** tangent line and the direct-to-fix line is ≤ 15 degrees,

apply the splay line from the **WS1/WS2** tangent line origin. **DF** secondary areas begin/exist only where full width primary exists (*see figure 6-9*).

Note: Where excessive splay (dependent upon various conditions but generally greater than ~30 degrees), consider using an earlier splay origin point, lengthening the segment, restricting the speed, category, etc. to avoid protection or construction difficulties (see paragraph 6.4 for origin points).

CASE 2-2: Turn-at-Fix (FO): (**WS2** ends when tangent to a 30-degree line converging to nominal track).

Step 1: Construct the **OEA** outer boundary line using **WS2** and the 30-degree converging line until it crosses the outbound segment boundaries (*see figure 6-20*).

Step 1a: Where **WS2** lies within the outbound segment primary boundary, construct the **OEA** boundary using **WS1**, **WS2**, and a line (from the point **WS1** or **WS2** is parallel to the outbound segment nominal track, the more conservative), splaying at 15 degrees relative the outbound segment nominal track until it intersects the outbound segment boundary lines.

Step 1b: Where **WS2** lies within the outbound segment secondary boundary, construct the **OEA** boundary using **WS1**, **WS2**, and a line (from the point **WS2** is parallel to the outbound segment nominal track), splaying at 15 degrees relative the outbound segment nominal track until it intersects the outbound segment boundary line. Continue **WS2** and the tangent 30-degree converging line to establish the inner primary/secondary boundary.

6.4.1 c. **CASE 3: Larger turn using more than 2 WSs.** (*Not applicable to Turn-at-Fix due to 90 degree turn limit*). For turns nearing or greater than 180 degrees ~ (such as a missed approach to a holding fix at the **IF**),

Step 1: Construct the **WS3** baseline perpendicular to the straight **MA** track along **CD**-extended toward the turn side. *See figure 6-15.*

Step 2: To determine **WS3** necessity, locate its center on the **WS3** baseline at distance **R** from point **C**. *See figure 6-15.*

Step 3: Construct **WS3** from point **C** in the direction of turn until tangent to the **WS/Segment** connecting line from *table 6-2*. *See figure 6-15.*

Step 4: Where **WS3** intersects **WS2** construction, include **WS3** in the **OEA** construction. Otherwise revert to the dual **WS** construction. *See figure 6-15.*

Step 5: Connect **WS2** and **WS3** with a line tangent to both (*see figure 6-15*).

Note: The WS2 & WS3 tangent line should parallel a line between the WS center points.

CASE 3-1: Turn-at-Altitude: (WS3 ends when tangent to a line direct to fix)

Step 1: Construct the *OEA* outer primary and secondary boundary lines parallel to this track (0.5-1.5-1.5-0.5 segment width). *See figure 6-15.*

Step 2: Construct a line from the *WS3* tangent point, splaying at 15 degrees from the *WS3*-to-fix track until it intersects the parallel boundary lines or reaches the segment end. *See figure 6-15.*

6.4.1 d. Outside Turn Secondary Area. Outbound segment secondary areas following wind spirals begin where either the 30-degree converging line crosses the secondary and primary boundaries from outside the segment, or the 15-degree splay line crosses the primary boundary from inside the segment.

6.4.2 Second MA Turn WS Construction (DF/TF FO).

To accommodate the two inbound tracks in the *DF* leg, the second *MA* turn *DF/TF* (fly-over) construction uses two *WS* baselines, **PP'** and **P'P''**.

Note: Apply table 6-2 PP' location information for each baseline (formula is identical).

6.4.2 a. CASE 1: Small angle turn using 1 *WS* for each inbound *DF* track.

Step 1: Construct the *WS1* baseline, (**P'P''**) perpendicular to the *DF* track nearer the outside of the *DF/TF* turn, at the late-turn-point (*see table 6-2* for line **PP'** location).

Step 1a: Construct the *WS2* baseline, (**PP'**) perpendicular to the *DF* track nearer the inside of the *DF/TF* turn, at the late-turn-point (*see table 6-2* for line **PP'** location).

Step 2: Locate the *WS1* center on **P'P''** at distance *R* (no-wind turn radius, using *formula 6-2b*; *see figure 6-5*) from the intersection of **P'P''** and the inbound-segment outer-boundary extension.

Step 2a: Locate the *WS2* center on **PP'** at distance *R* (no-wind turn radius, using *formula 6-2b*; *see figure 6-5*) from the intersection of **PP'** and the inbound-segment inner-boundary extension.

Step 3: Construct *WS1* from this outer boundary point in the direction of turn until tangent to the *WS/Segment* connecting line from *table 6-2*.

Step 3a: Construct **WS2** from this inner boundary point in the direction of turn until tangent to the **WS/Segment** connecting line from *table 6-2*.

Step 4: Where **WS2** intersects **WS1** construction, include **WS2** in the **OEA** construction, and connect **WS1** to **WS2** with a tangent line. Otherwise revert to the single **WS** construction.

CASE 1-1: **WS1** and/or **WS2** lie outside the outbound segment boundary.

Step 1: Construct the **OEA** outer boundary using **WS1** and/or **WS2** and the tangent 30-degree converging line until it crosses the outbound segment boundaries (*see figure 6-22*).

CASE 1-2: **WS1** and **WS2** lie inside the outbound segment boundary.

Step 1: Where **WS1** and/or **WS2** lie inside the outbound segment primary boundary, construct the **OEA** outer boundary using **WS1** and/or **WS2** and a line (from the point **WS1** or **WS2** is parallel to the outbound segment nominal track), splaying at 15 degrees relative the outbound segment nominal track until it intersects the outbound segment boundary lines.

Step 1a: Where **WS1** and/or **WS2** lie inside the outbound segment secondary boundary, construct the **OEA** outer boundary using **WS1** and/or **WS2** and a line (from the point **WS1** or **WS2** is parallel to the outbound segment nominal track), splaying at 15 degrees relative the outbound segment nominal track until it intersects the outbound segment boundary line. Continue the final **WS** and 30 degrees converging line to establish the primary/secondary boundary.

6.5 Missed Approach Climb Gradient.

Where the **MA** standard **OCS** is penetrated and a **CG** is required, specify a missed approach **CG** to clear the penetrating obstruction. **MA** starting **ROC** is **100 ft** (plus adjustments). **ROC** increases at 96 ft/**NM**, measured parallel to the **MA** track to **TIA** end (Turn-at-Altitude), or early-turn point (Turn-at-Fix), then shortest primary distance to the next fix. Apply fix-to-fix distance for subsequent segments. Where a part-time altimeter is in use, consider the helicopter **SOC** altitude to be the **MDA** associated with the local altimeter (ensures adequate **CG** is applied).

Step 1: Calculate the **ROC**, the altitude at which the **ROC** for the obstacle is achieved, and the required **CG** (ft/**NM**) using *formula 6-13*.


Step 2: Apply the **CG** to:


- The altitude which provides appropriate **ROC**, or


- The point/altitude where the subsequent **MA OCS** clears all obstacles.



Step 2a: Where a **RASS** adjustment is applicable for climb-to-altitude operations (prior to turn, terminate **CG**, etc.), apply the **CG** associated with the lower **MDA** (formula 6-3). Where there is a local altimeter, to establish the **RASS**-based climb-to-altitude, add the difference between the Local altimeter-based **MDA** and the **RASS**-based **MDA** to the climb-to-altitude and round to the next higher 100-ft increment (see **TERPS** chapter 3 for further details).


Formula 6-3. ROC/CG/Minimum Altitude/OCS.		
STEP 1	$ROC_{obs} = ROC_{start} + 96 \cdot d$ <p>Where ROC_{start} = SOC ROC (100 ft for NVGP) d = distance (NM) CG origin (SOC) to obstacle</p>	
$ROC_{start} + 96 \cdot d$		
STEP 2	$Alt_{min} = O_{elev} + ROC_{obs}$ <p>Where ROC_{obs} = Step 1 result O_{elev} = Obstacle Elevation (MSL)</p>	
$O_{elev} + ROC_{obs}$		
STEP 3	$CG = \frac{r}{d} \cdot \ln \left(\frac{(r + Alt_{min})}{(r + Copter_{soc})} \right)$ <p>Where Alt_{min} = Step 2 result $Copter_{soc}$ = Helicopter altitude (MSL) at CG origin d = distance (NM), CG origin (SOC) to obstacle</p>	
$r/d * \ln((r + ALT_{min}) / (r + Copter_{soc}))$		
Calculator		
ROC _{start}		Click here to calculate
O _{elev}		
d (NM)		
Copter _{soc}		
ROC _{obs}		
Alt _{min}		
CG		

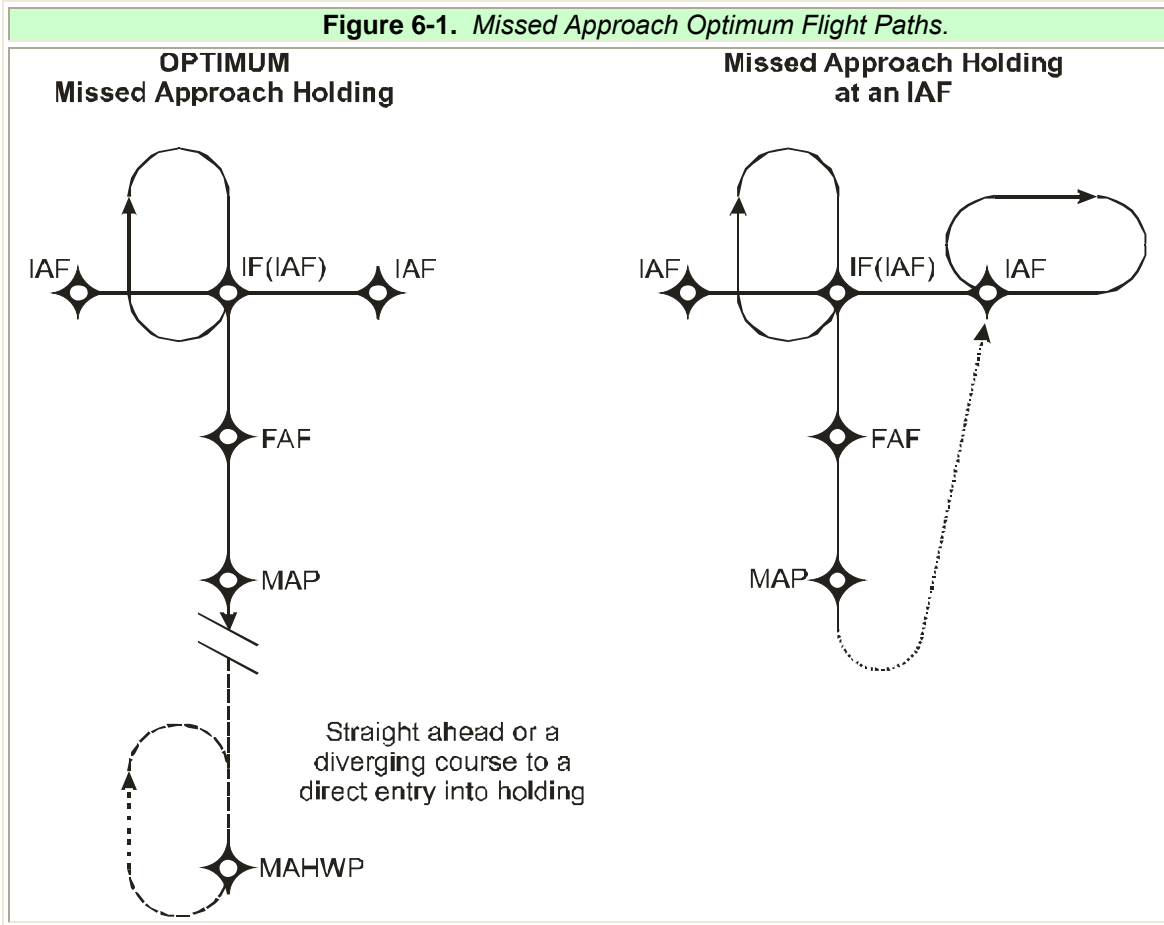


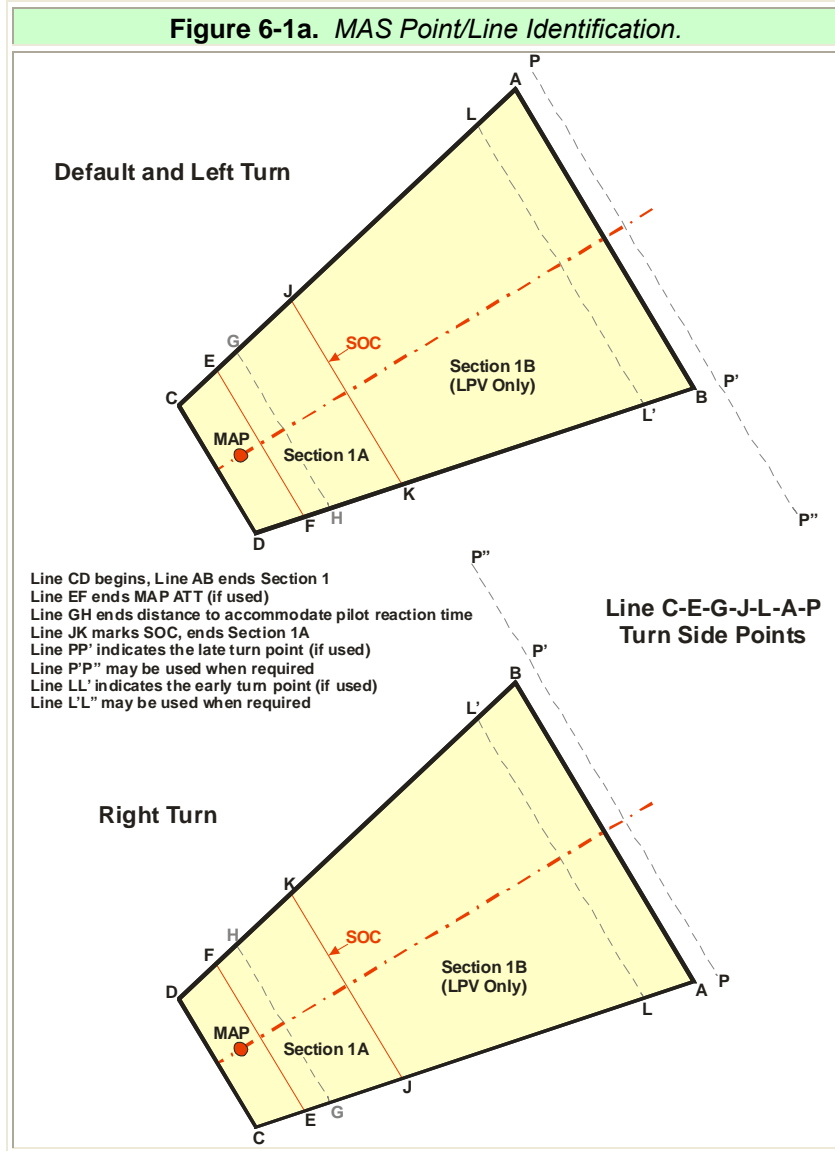


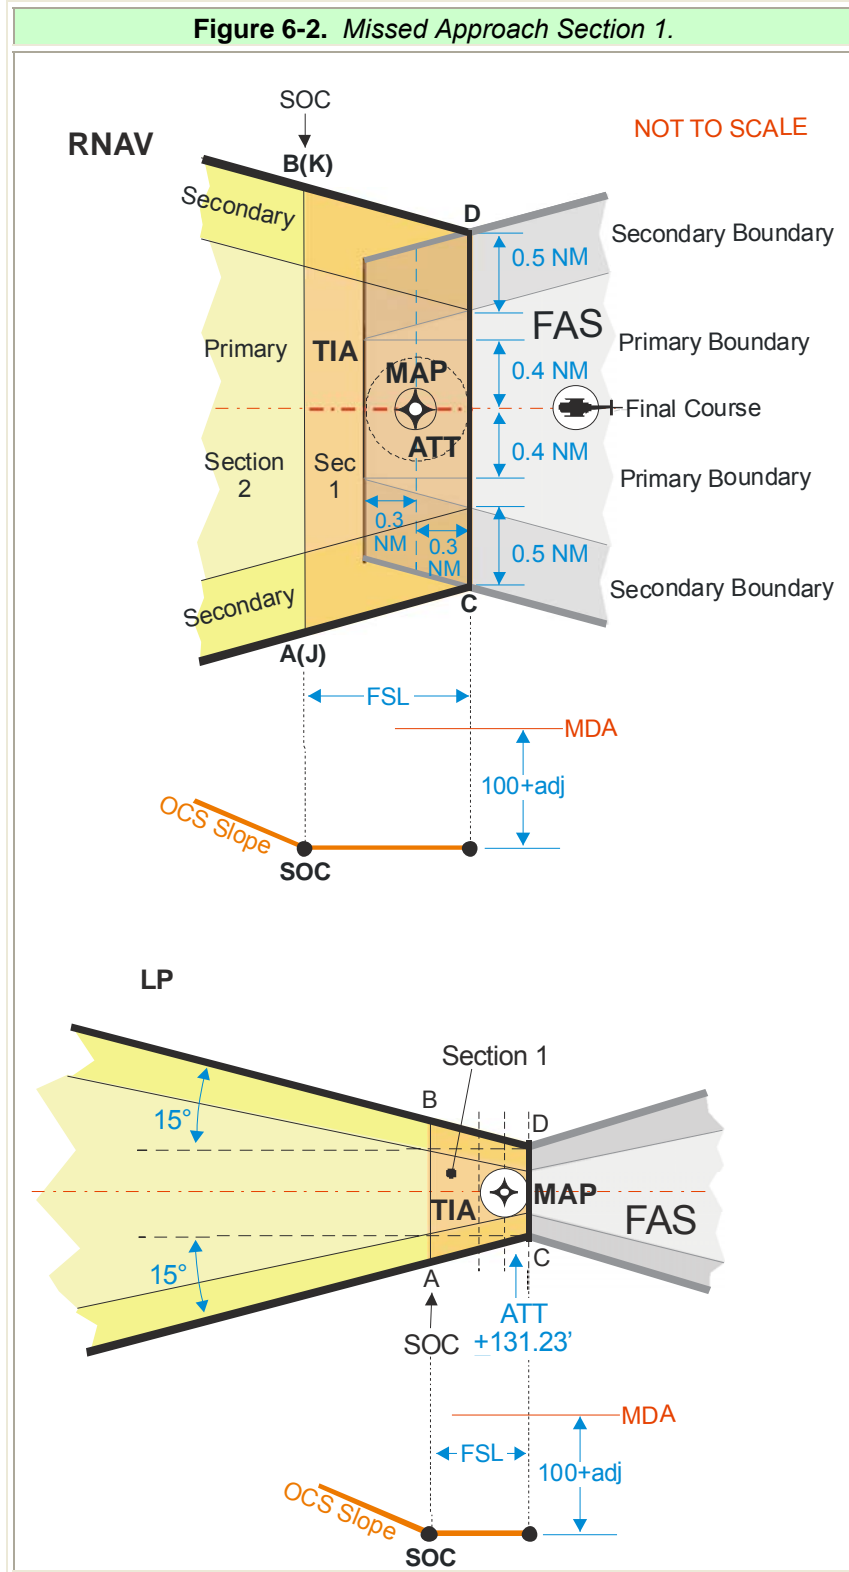


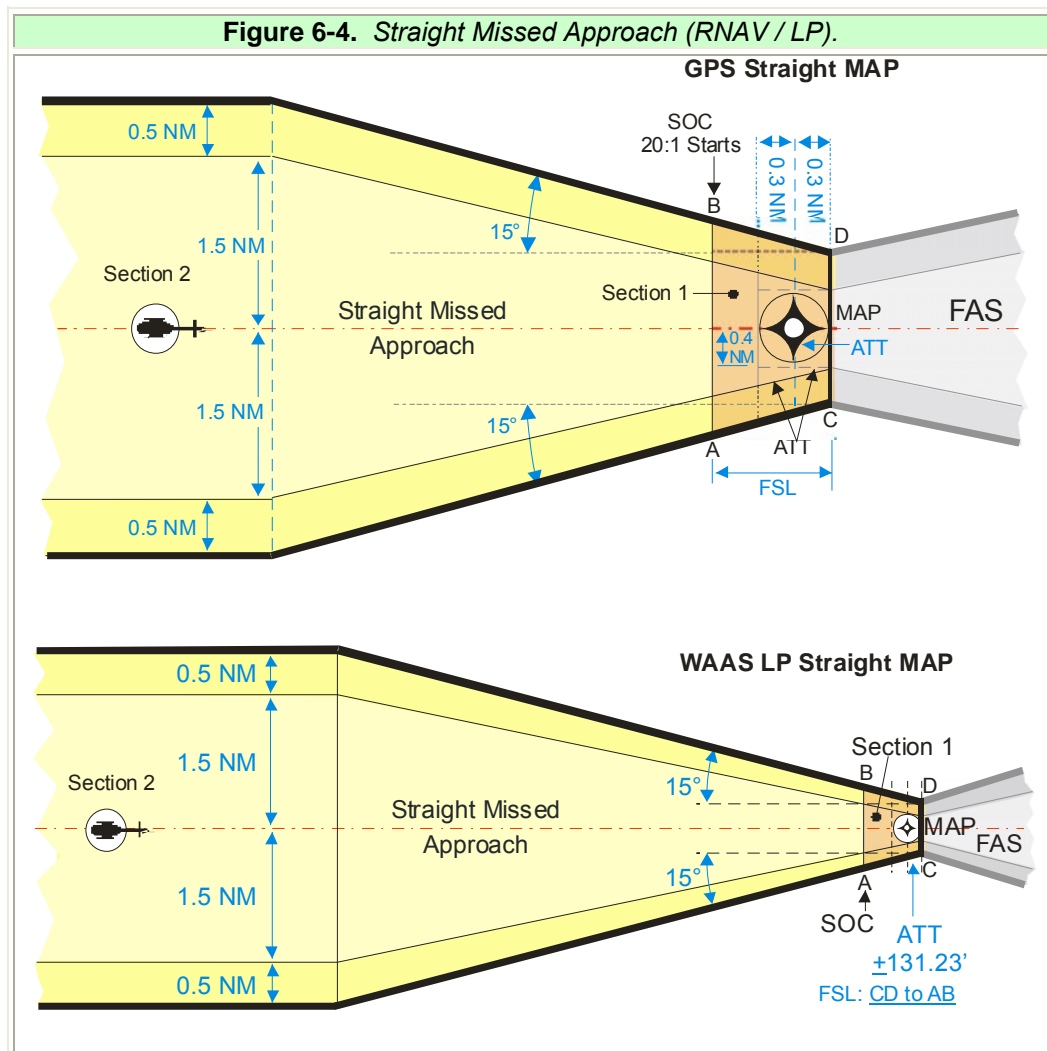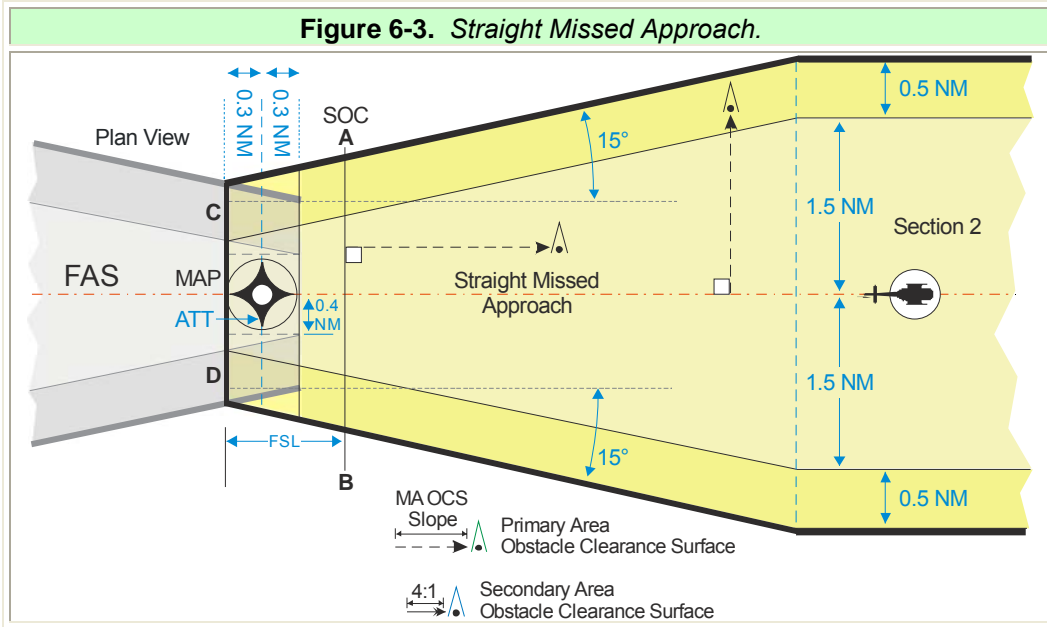


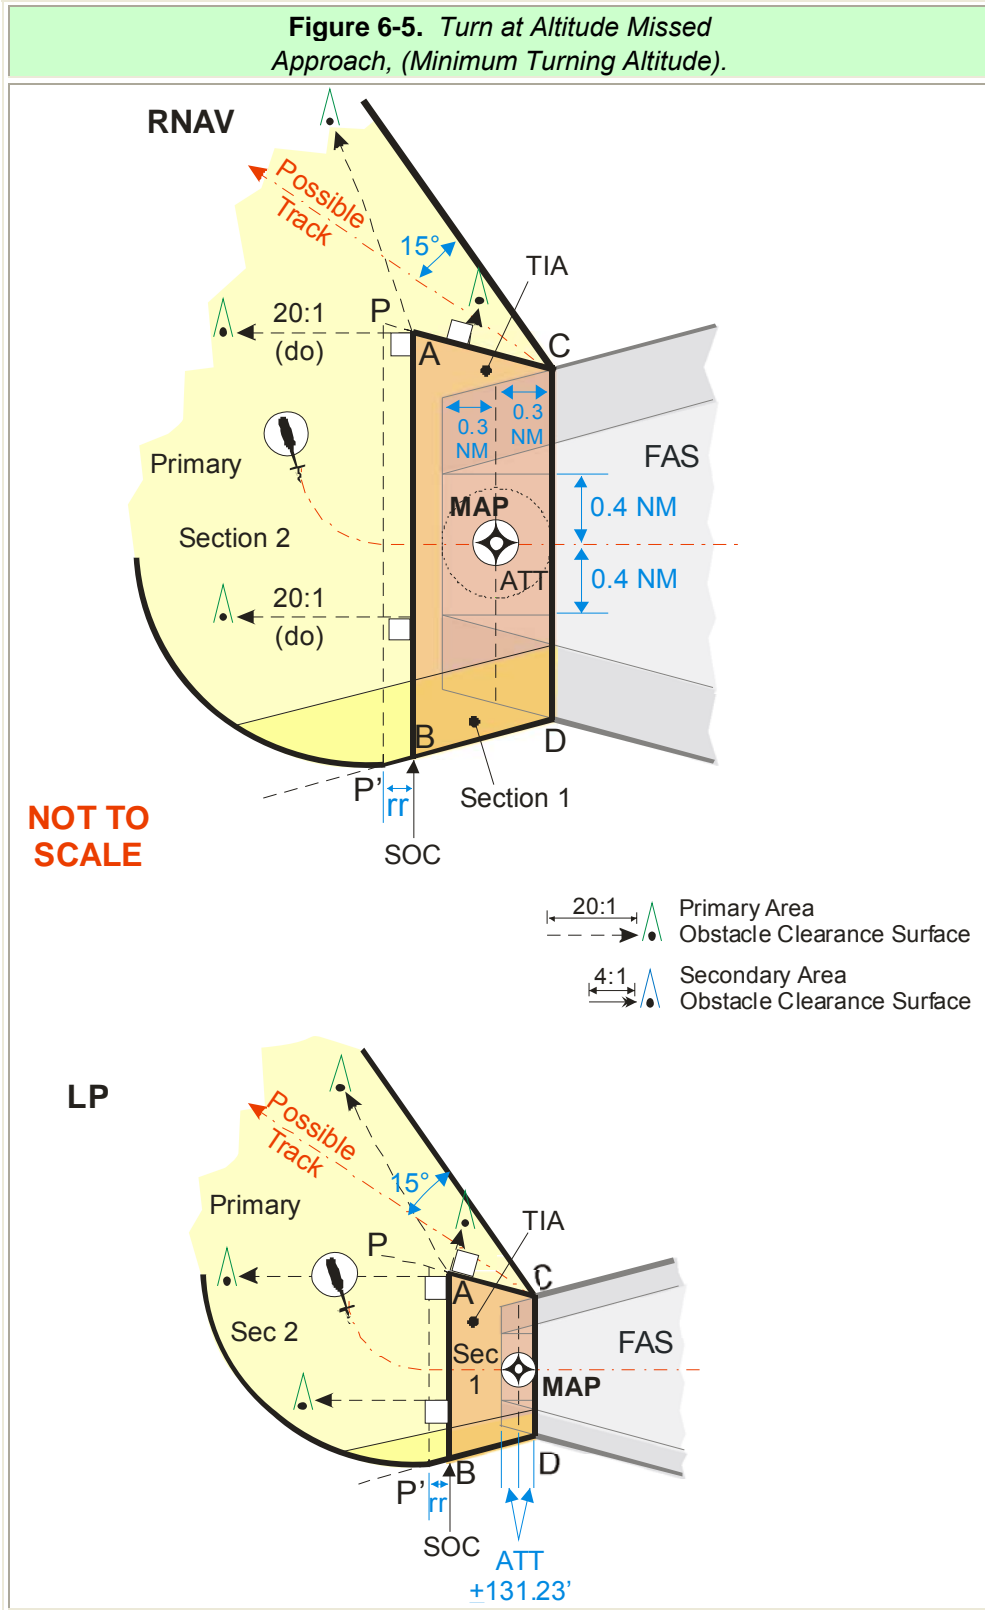


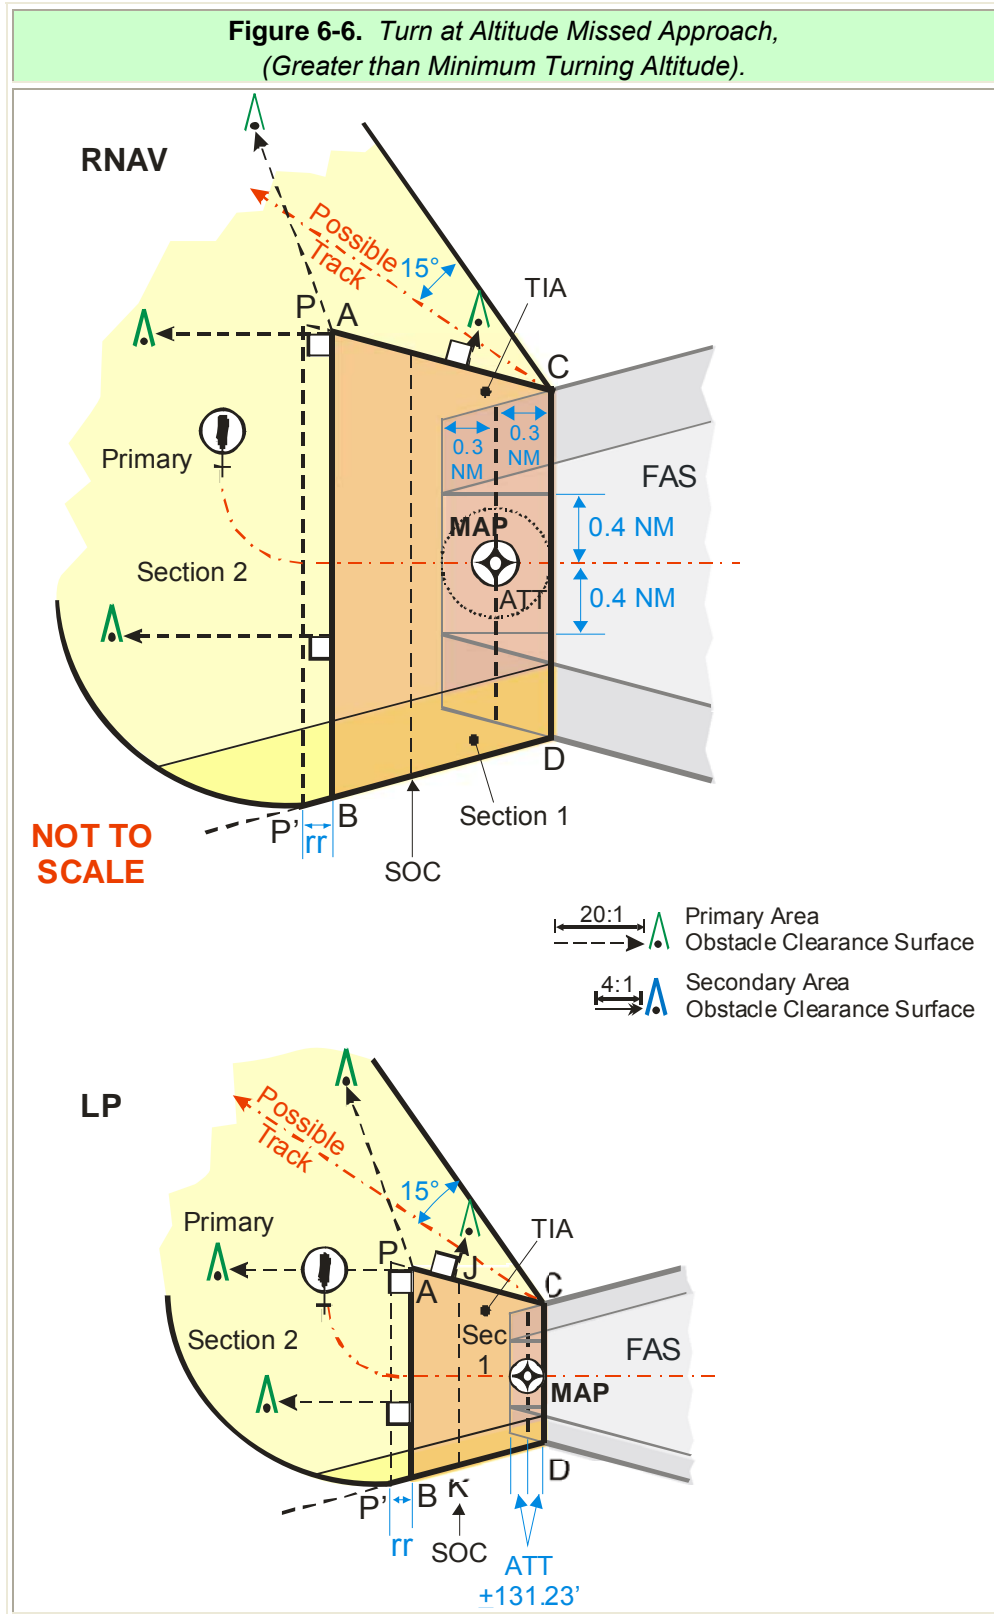


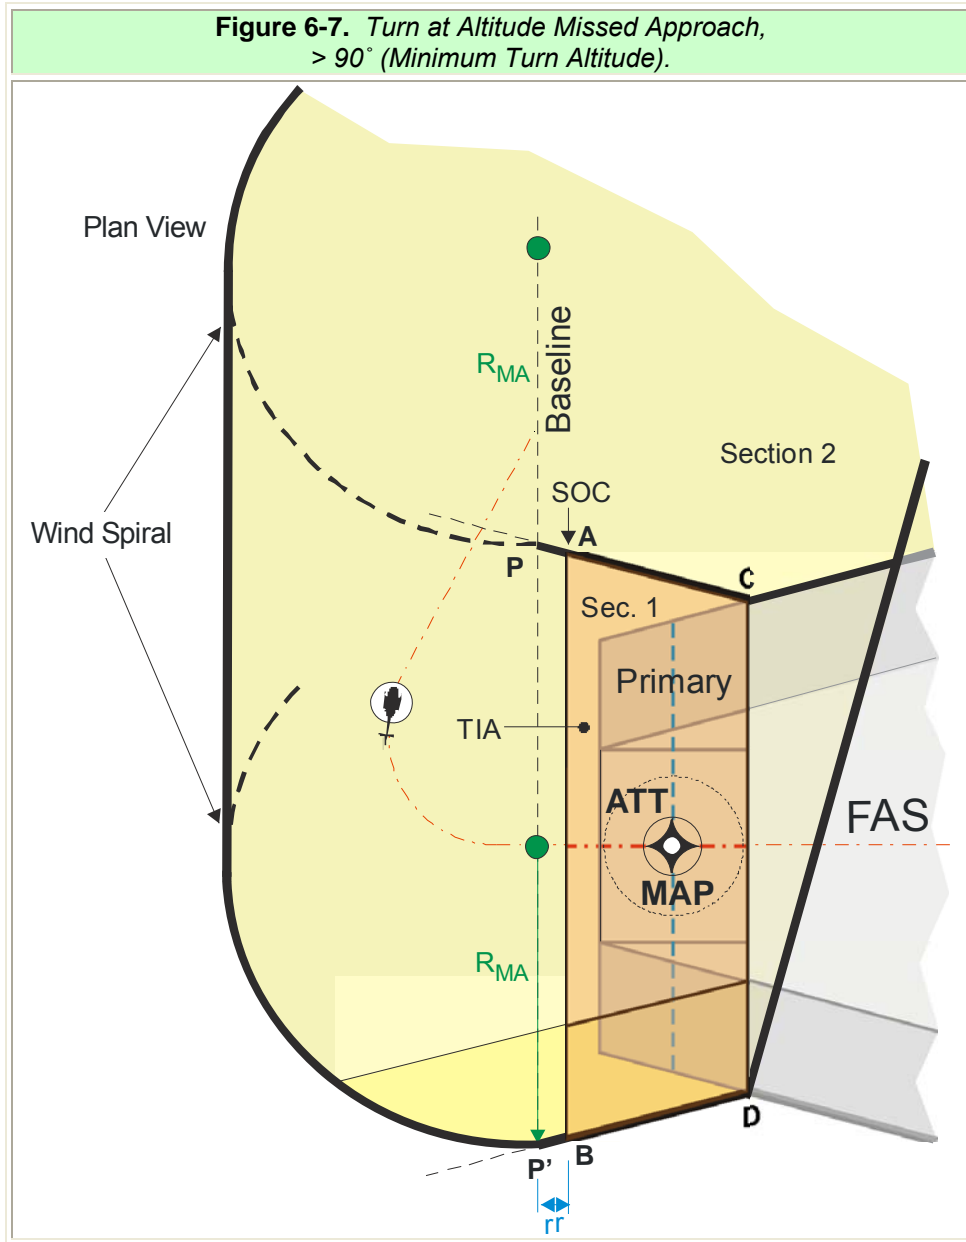


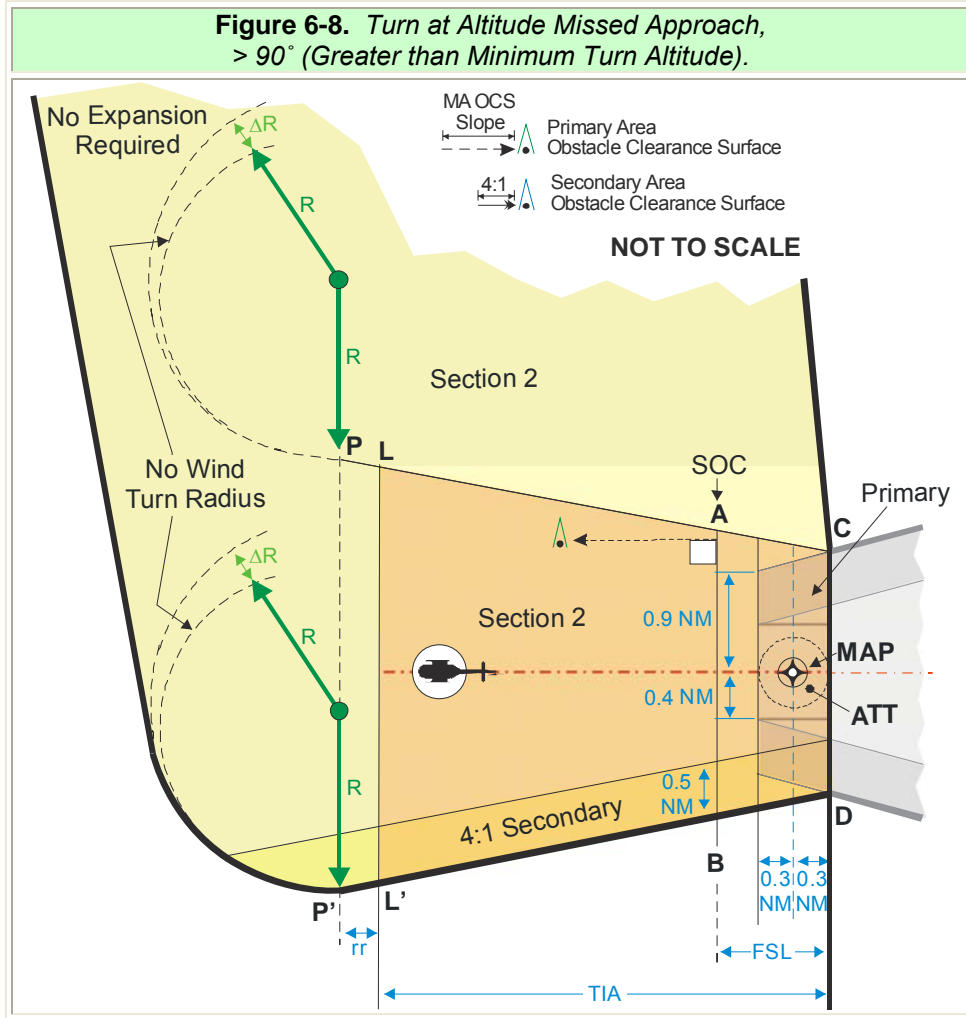


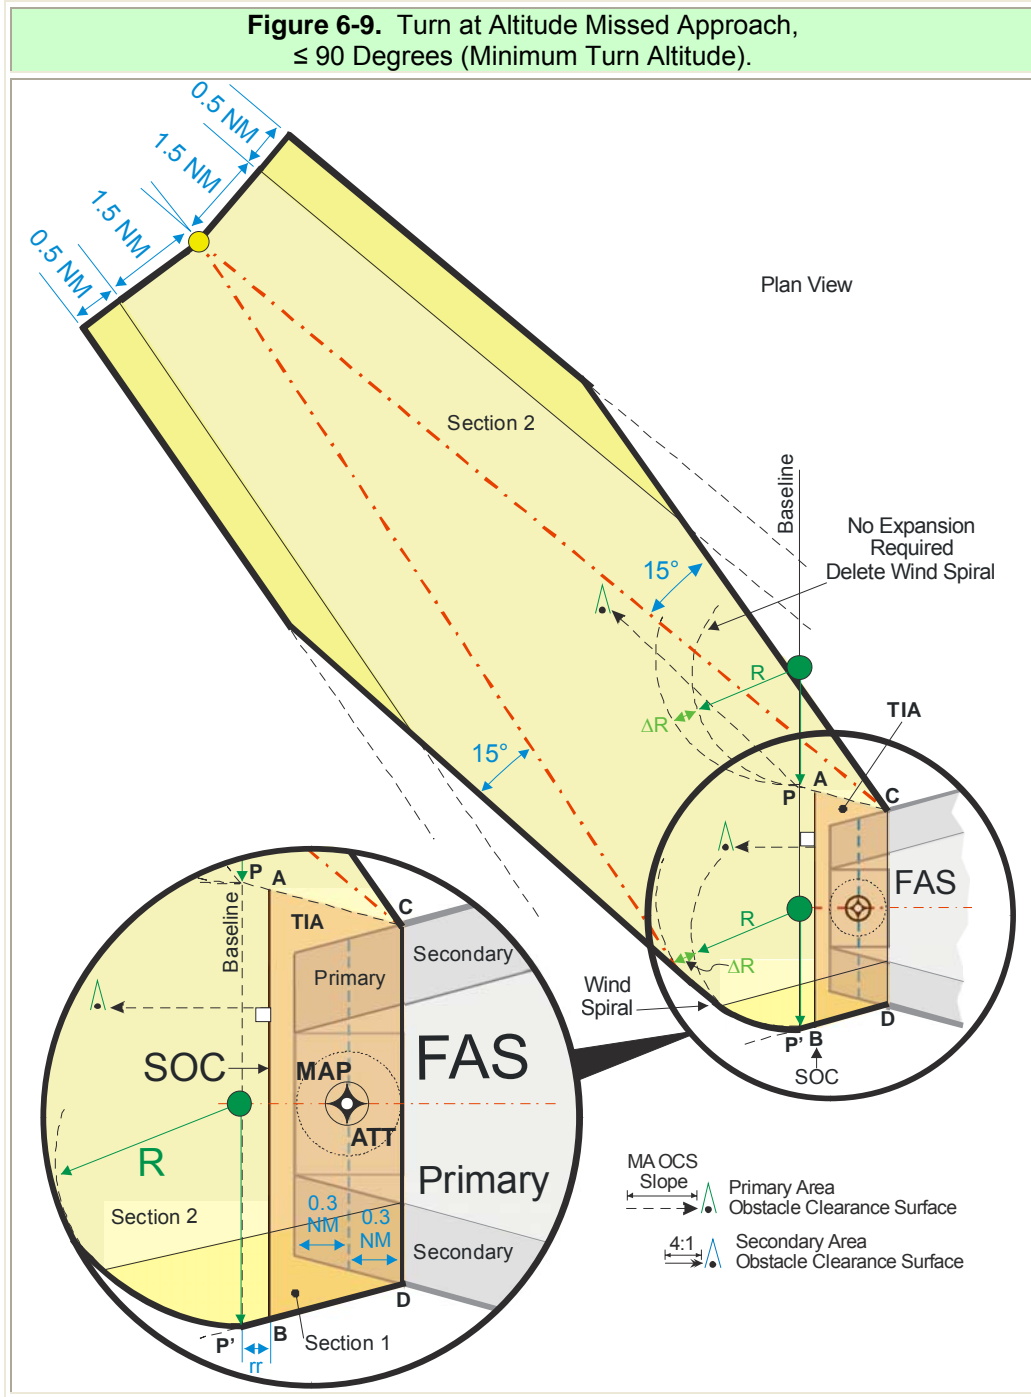


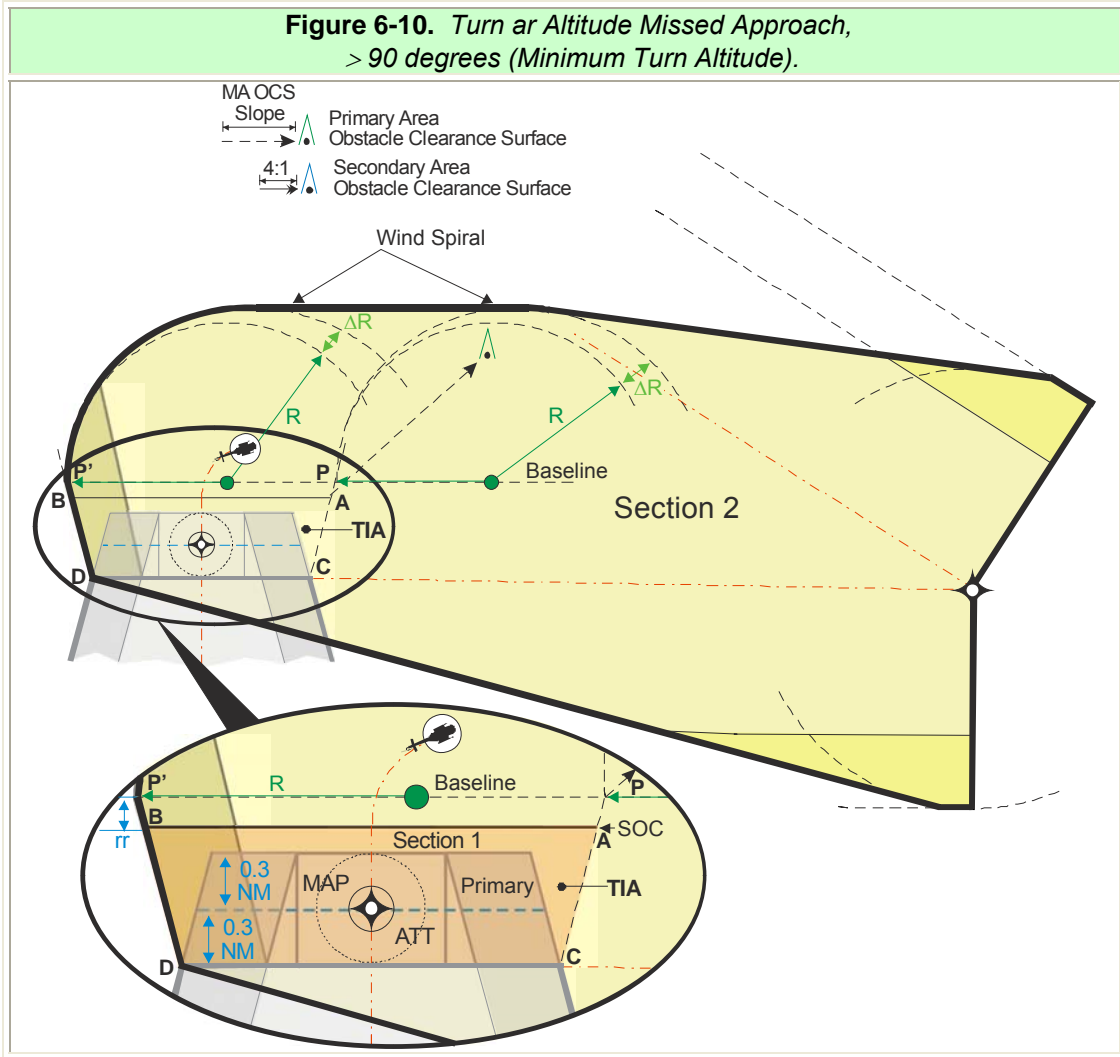


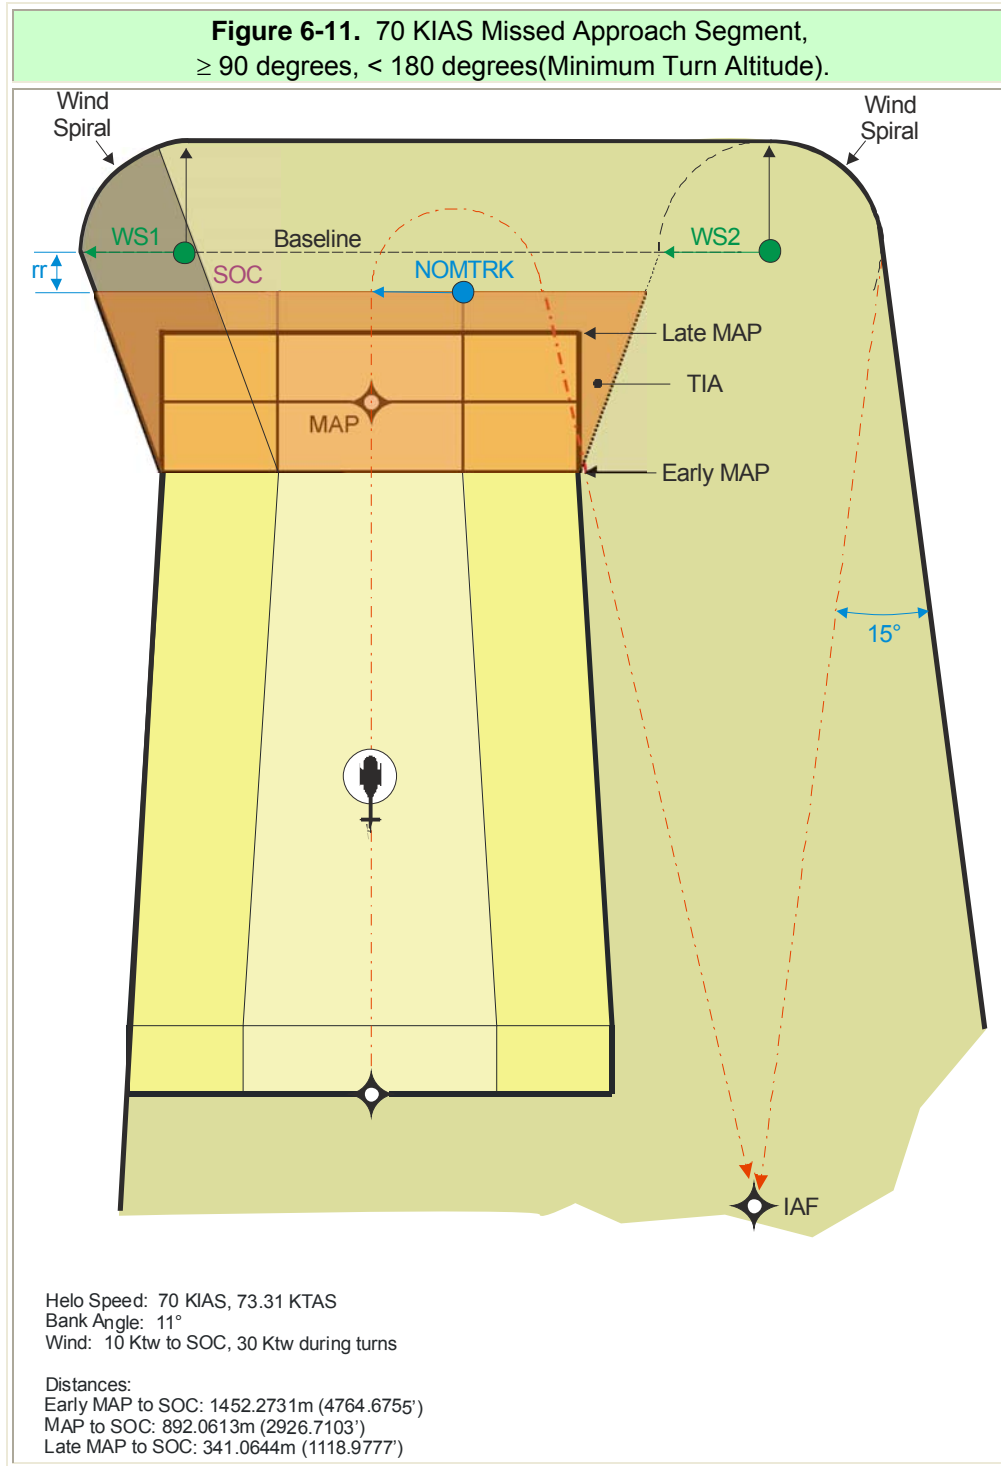


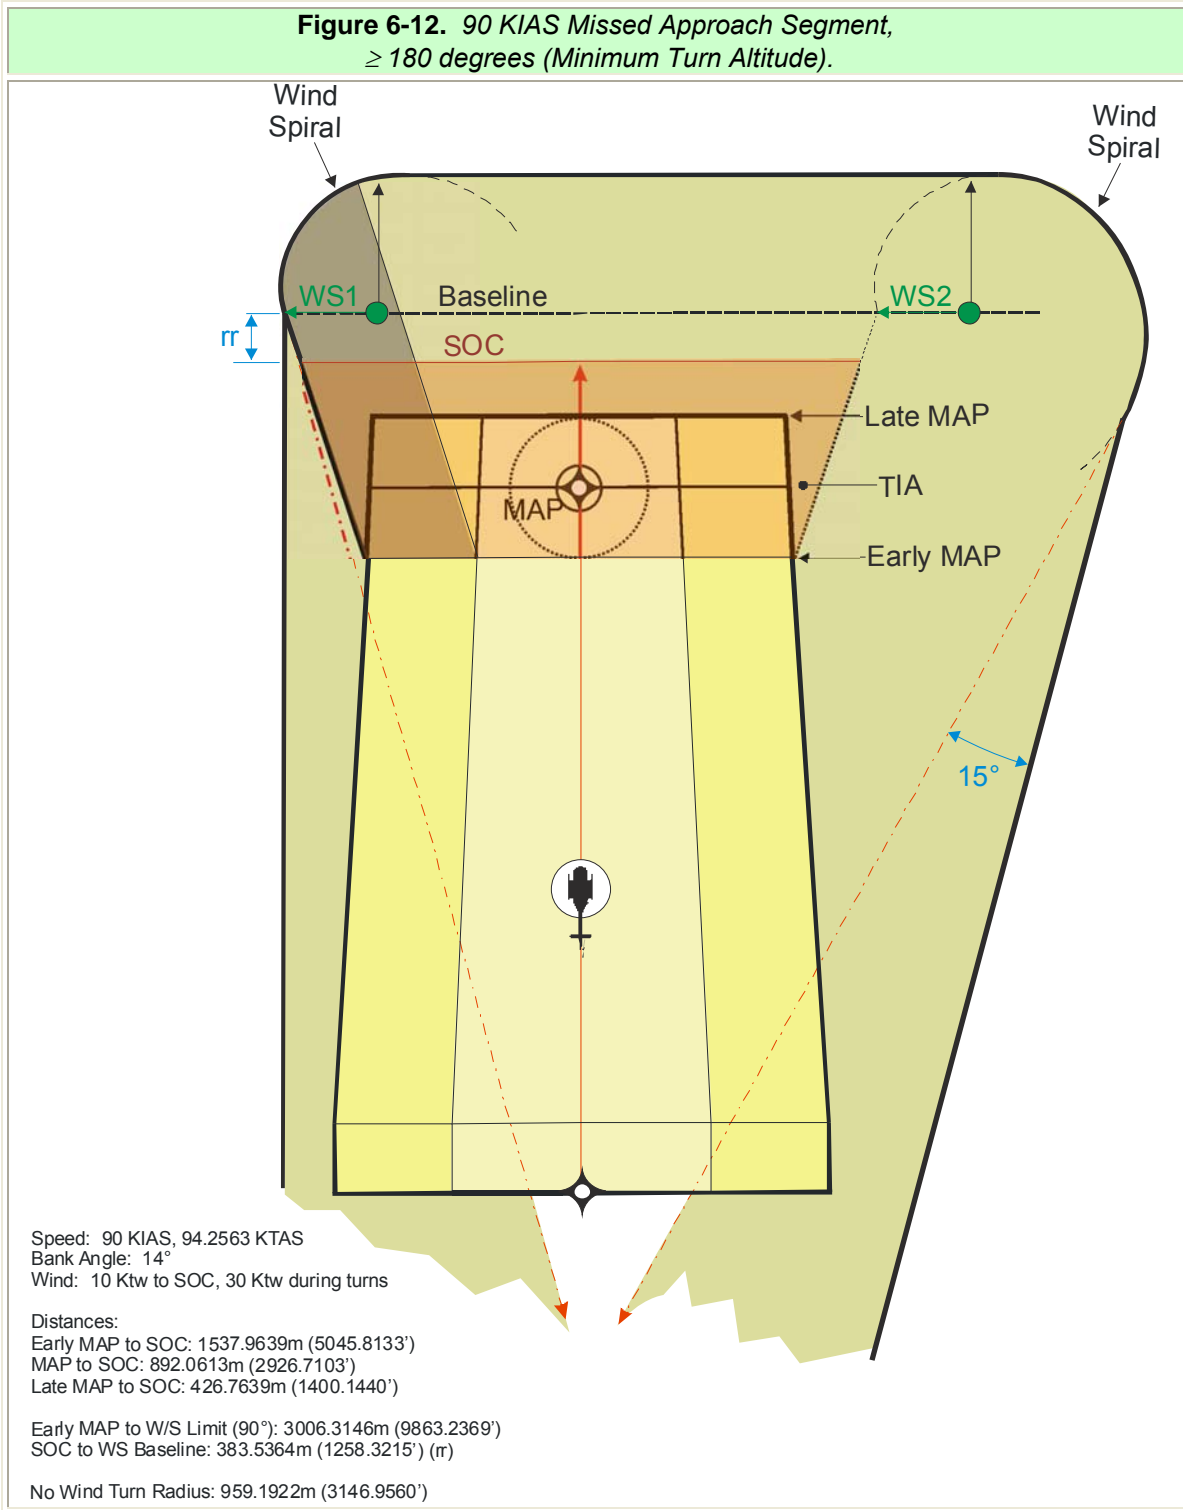


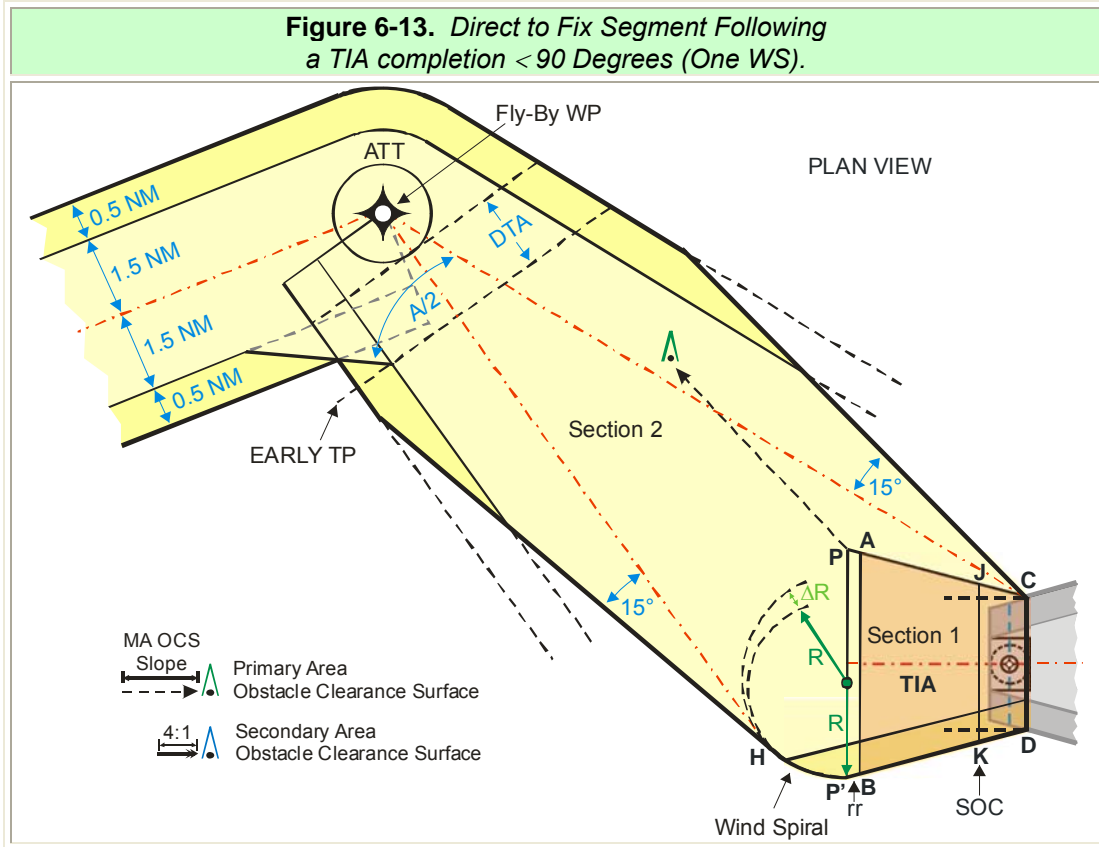


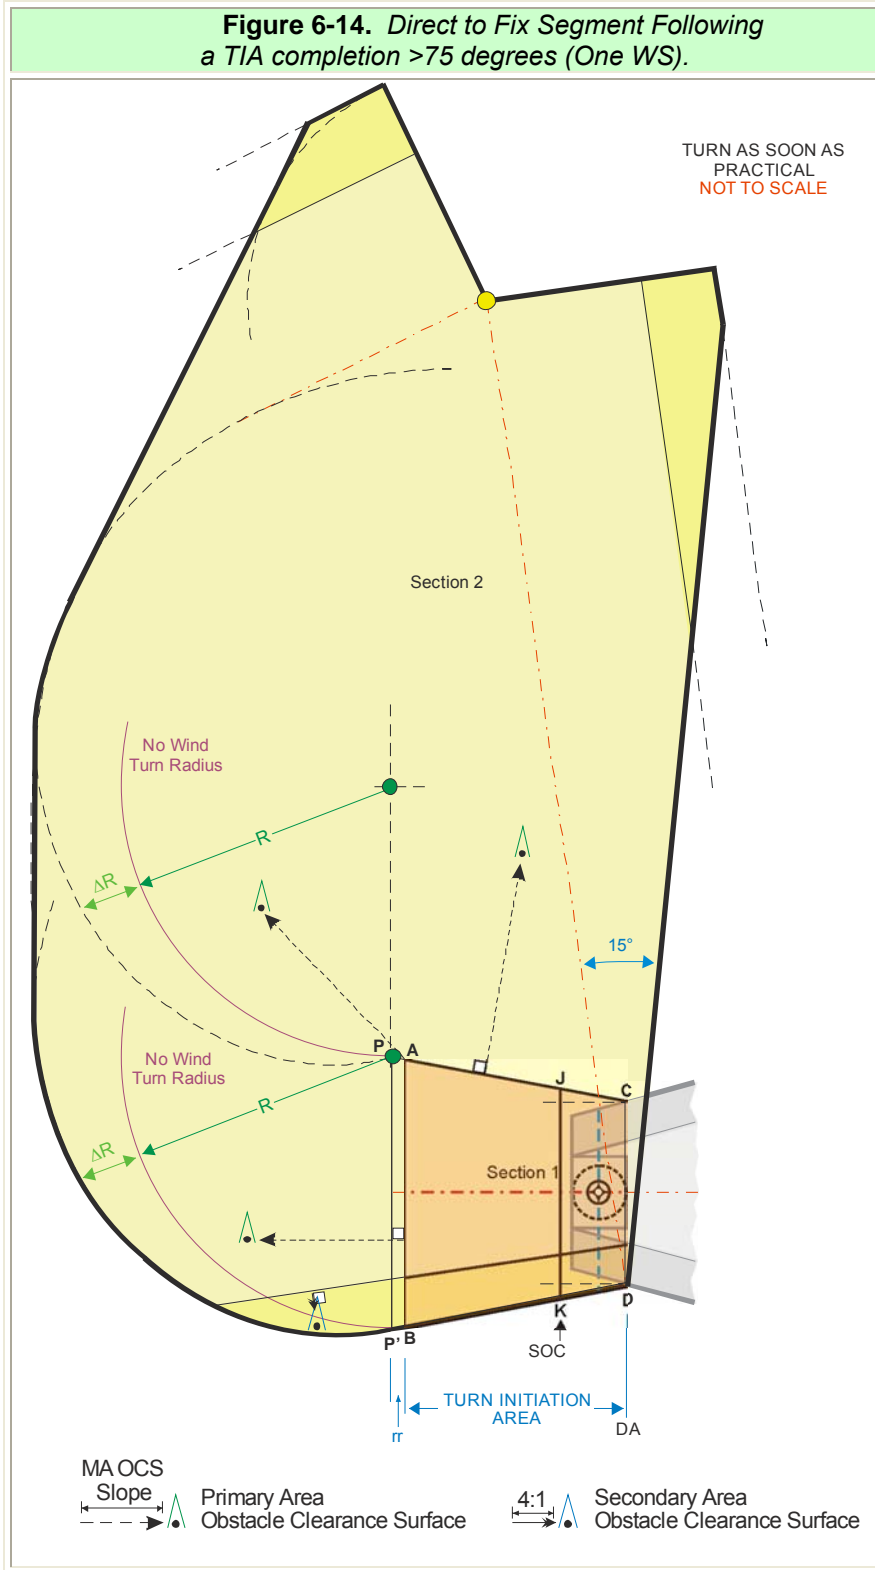


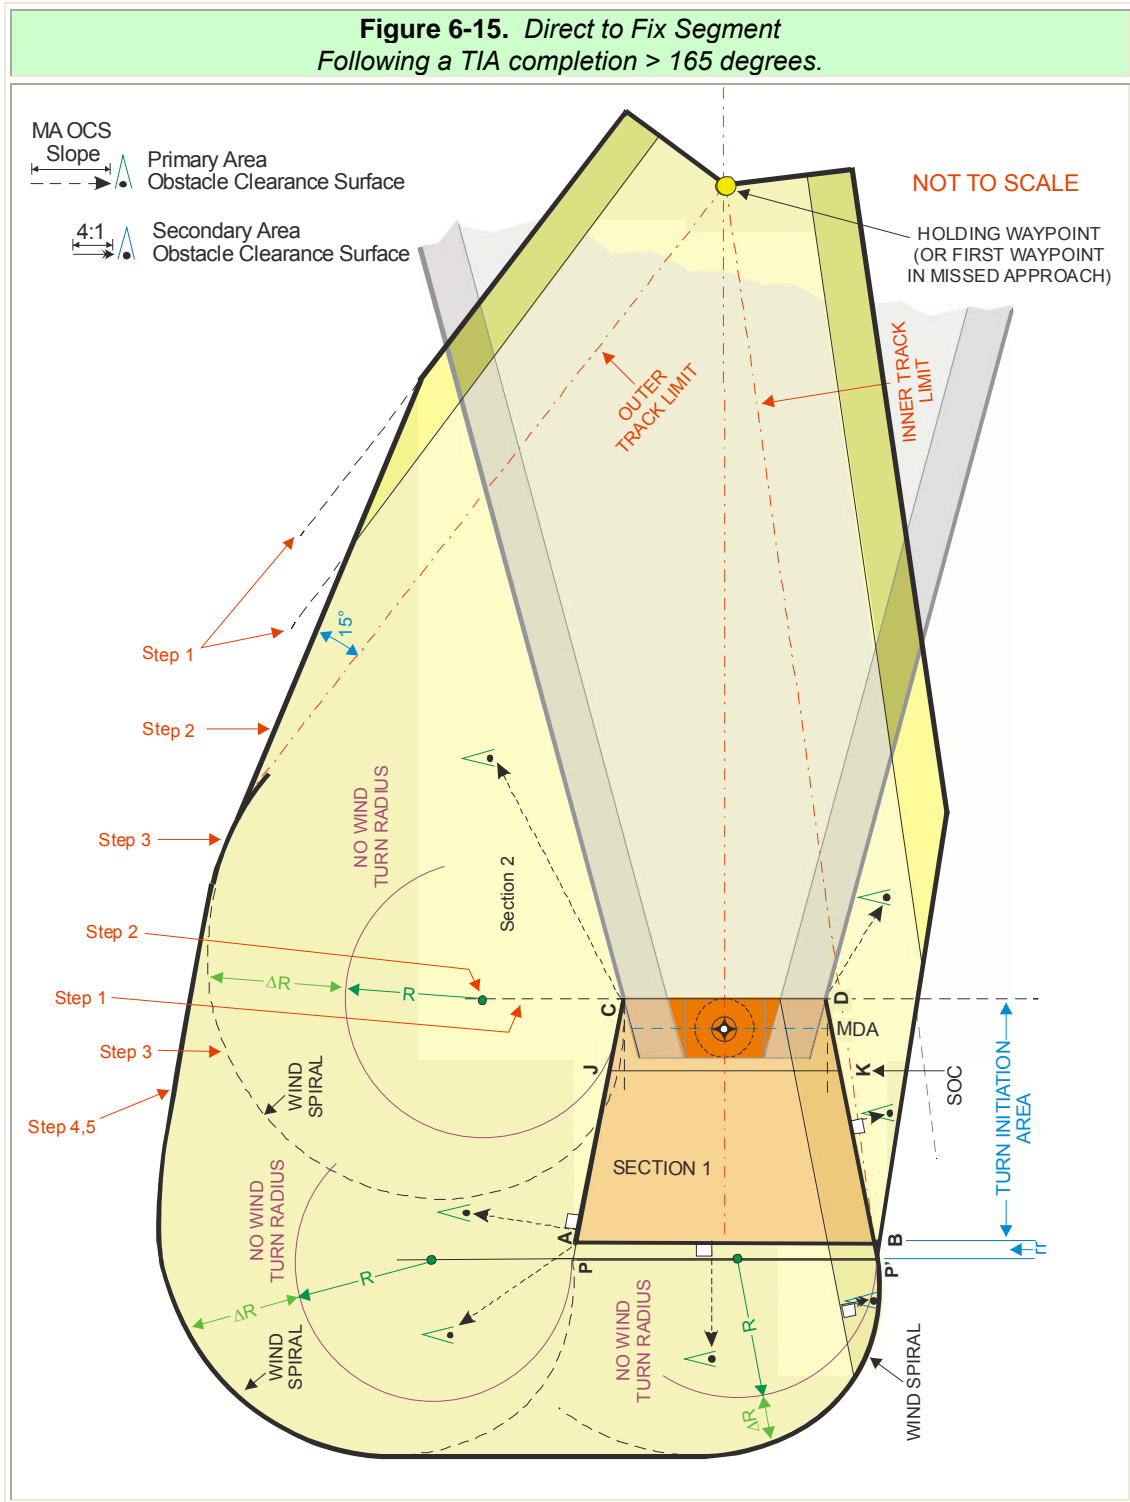


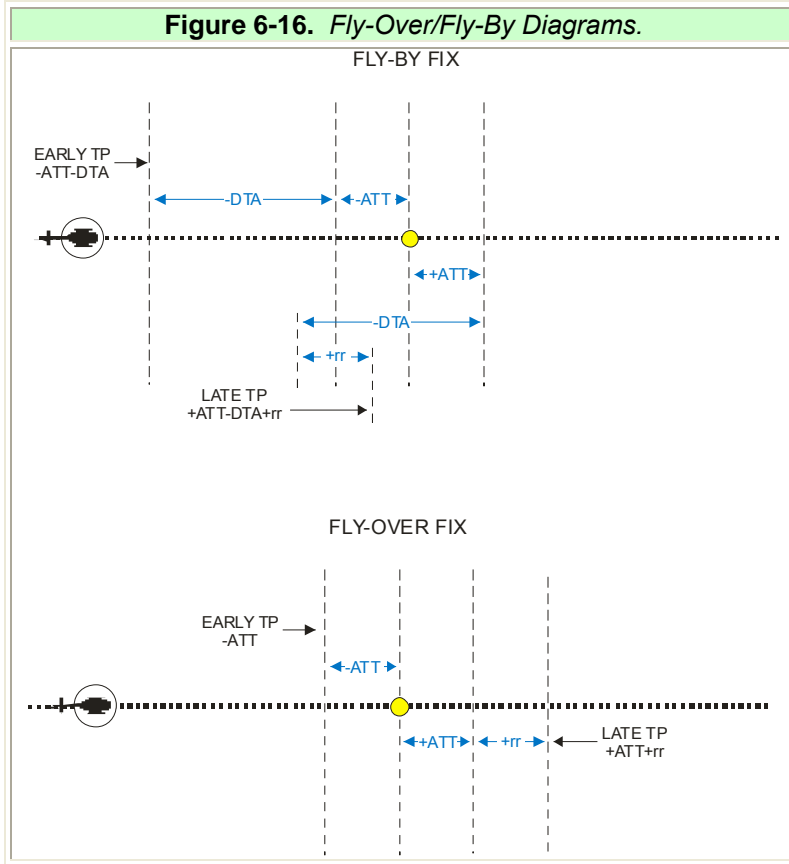


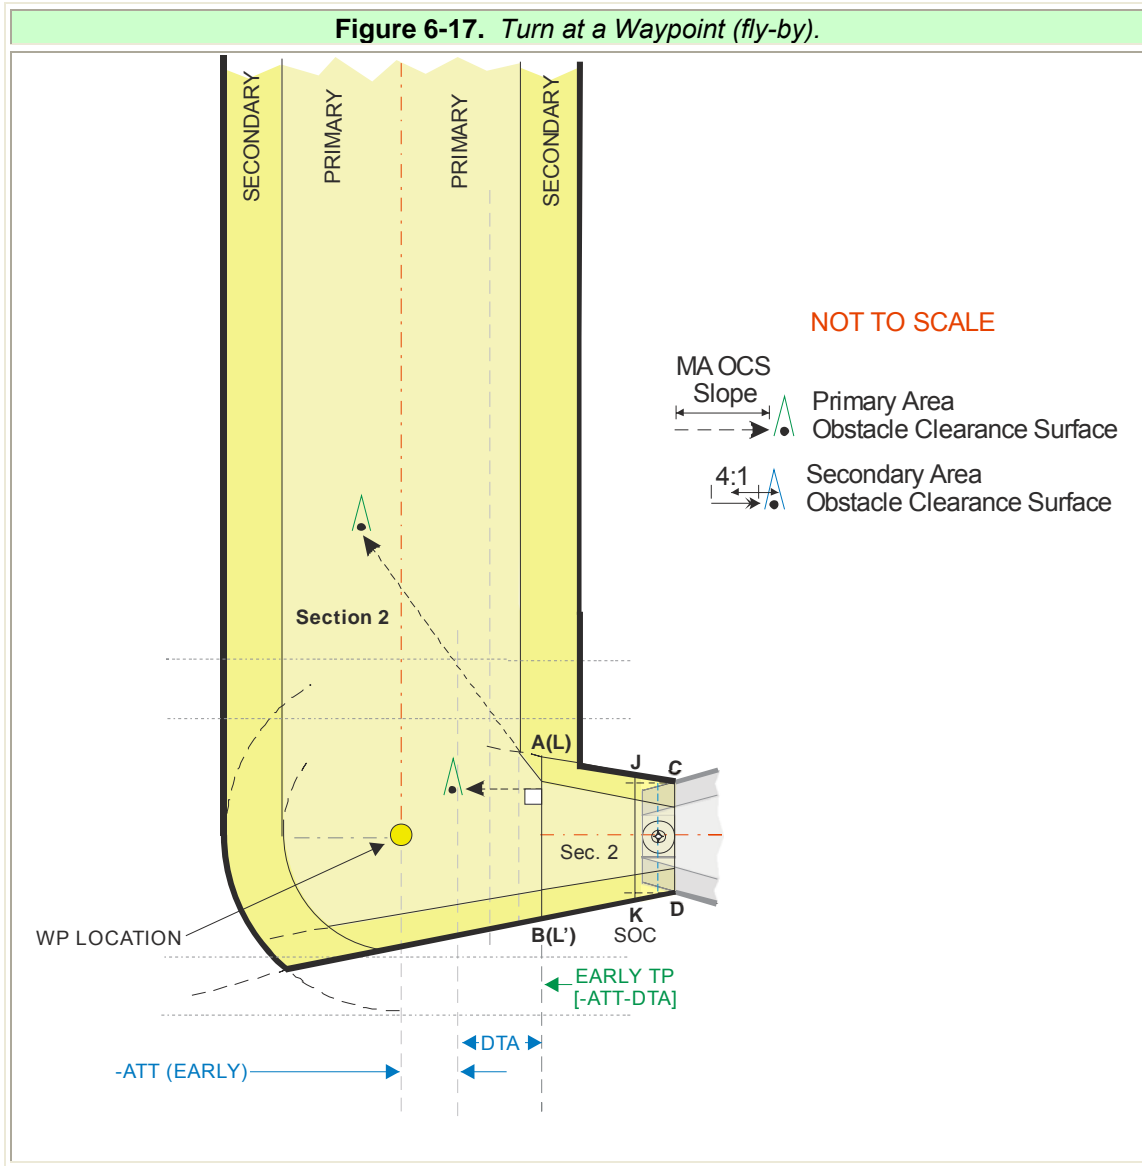


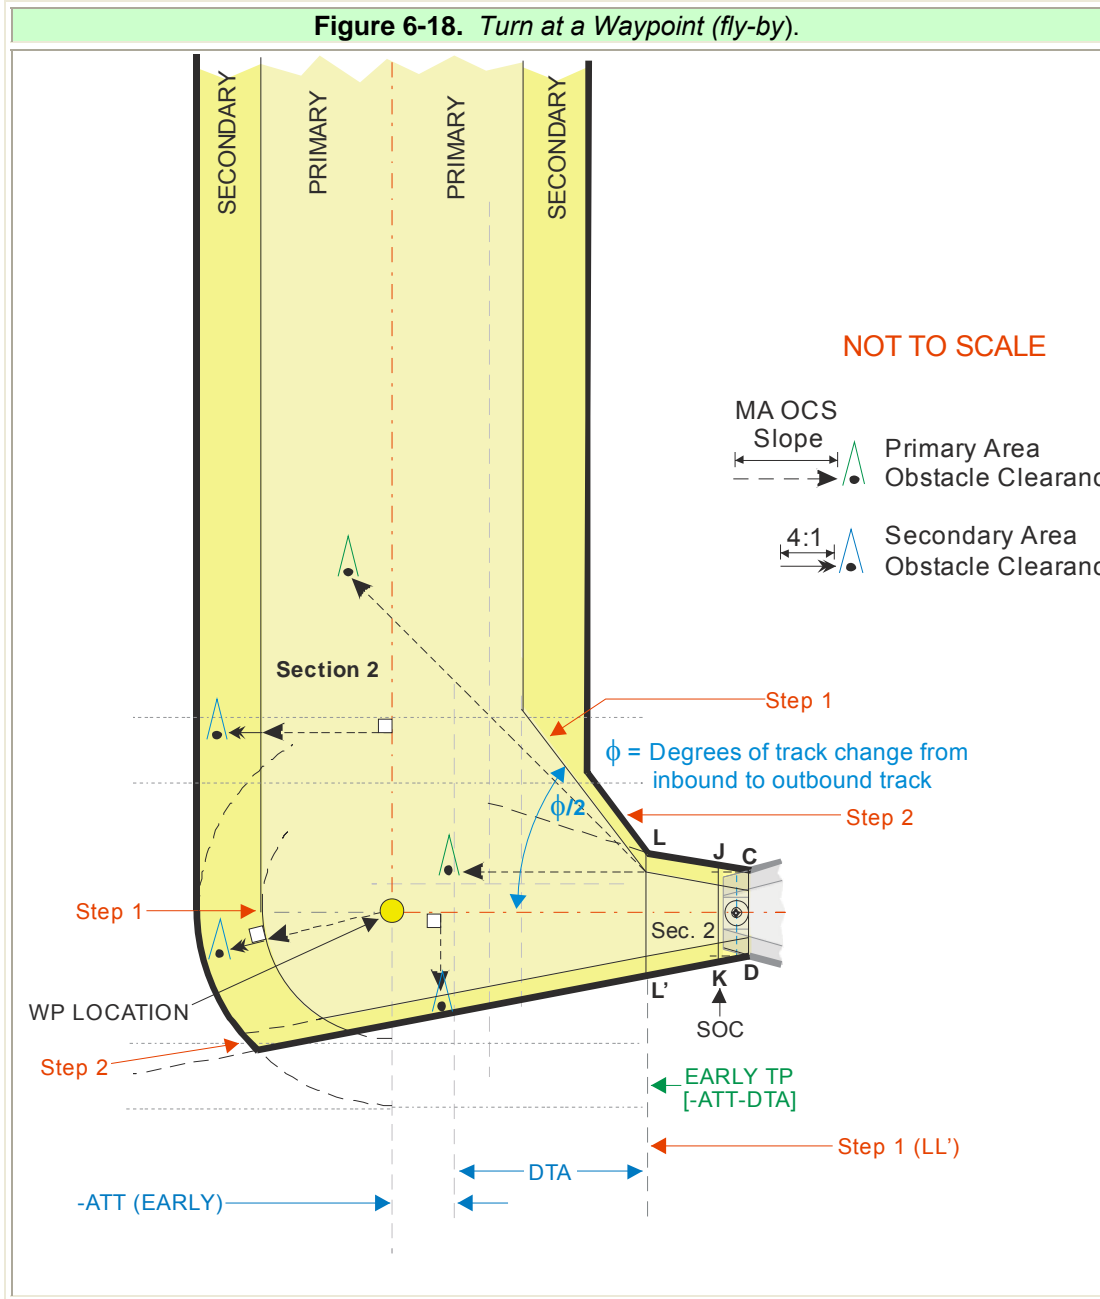


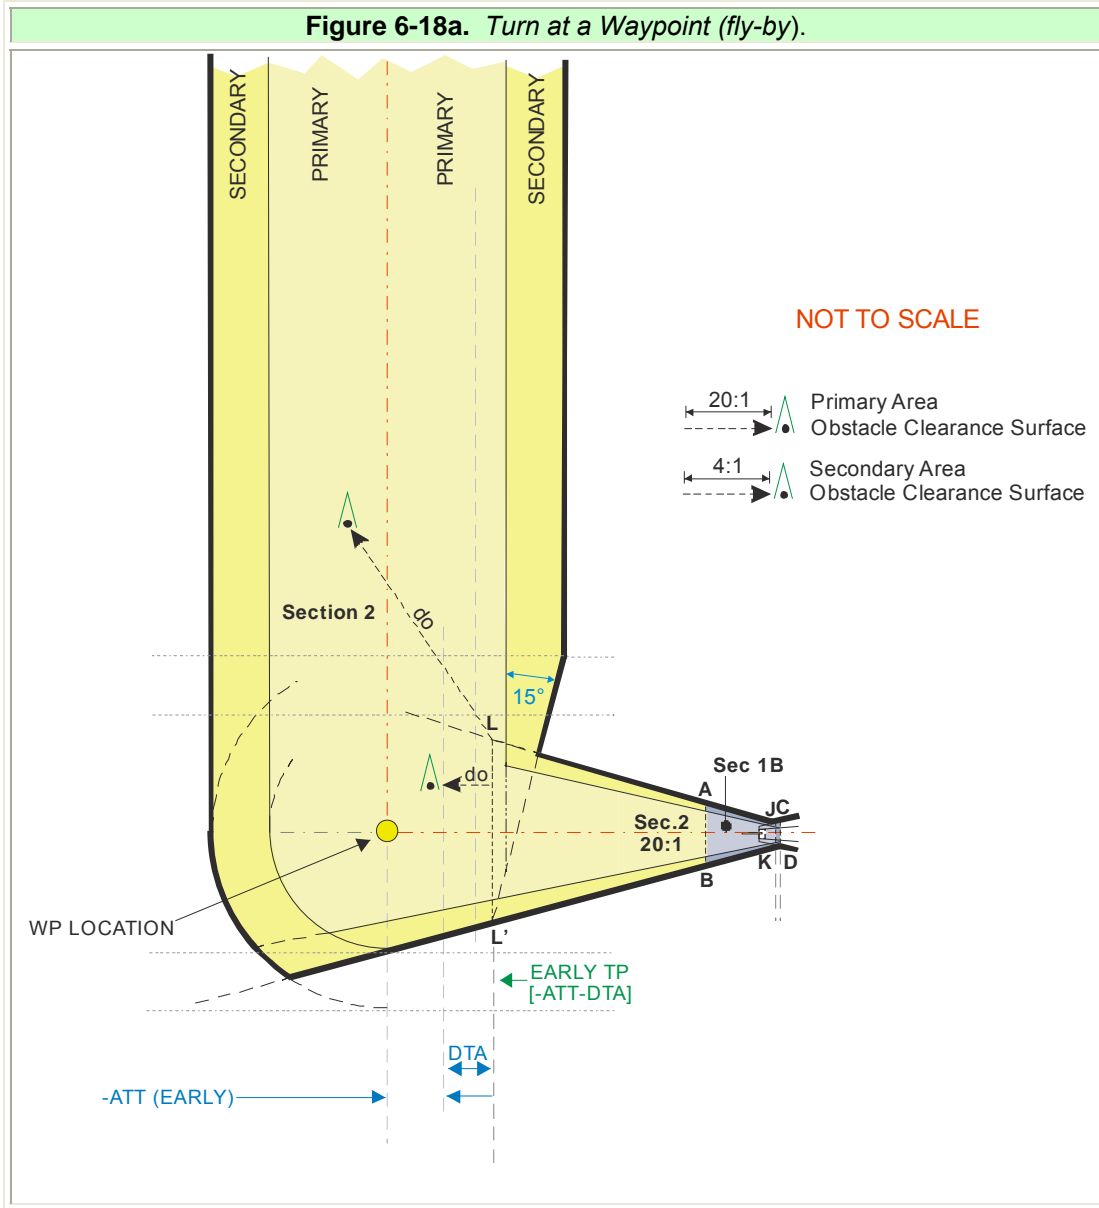


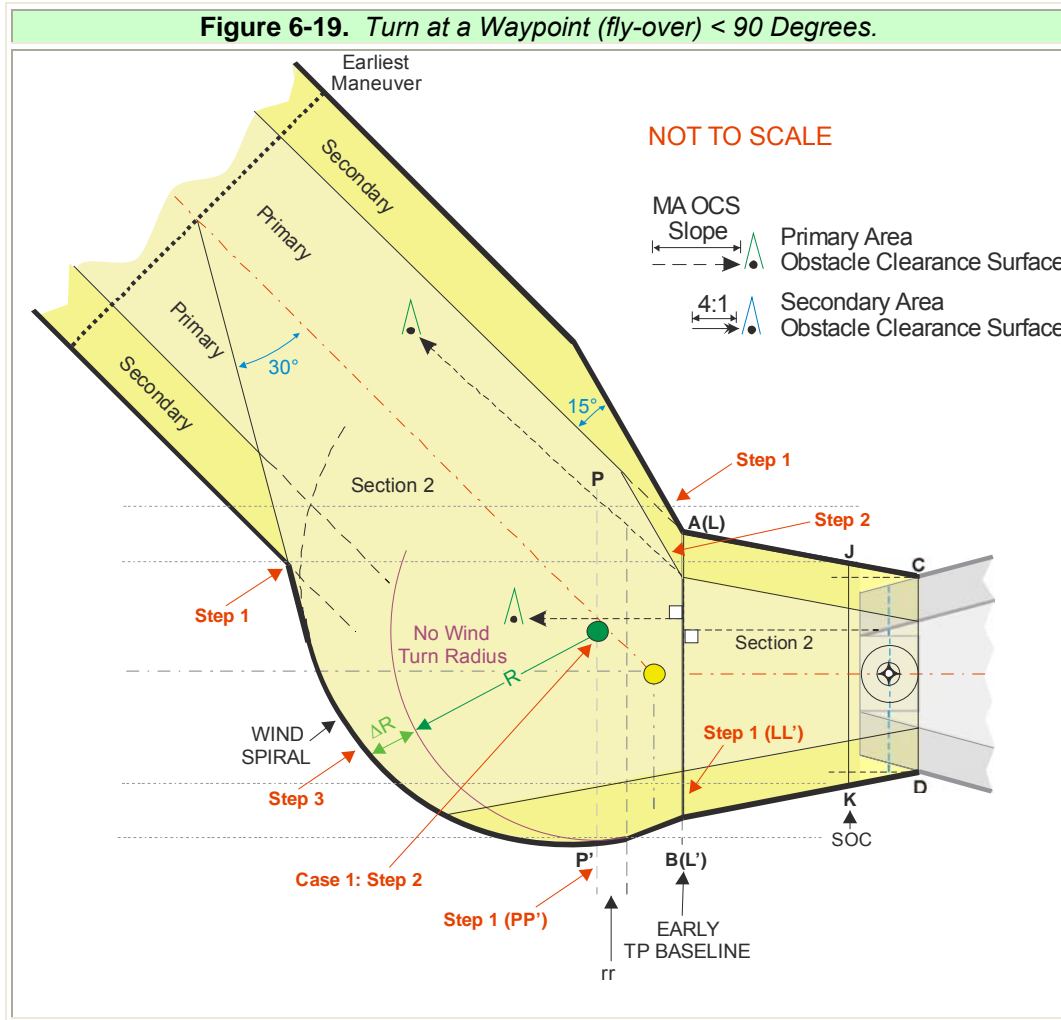


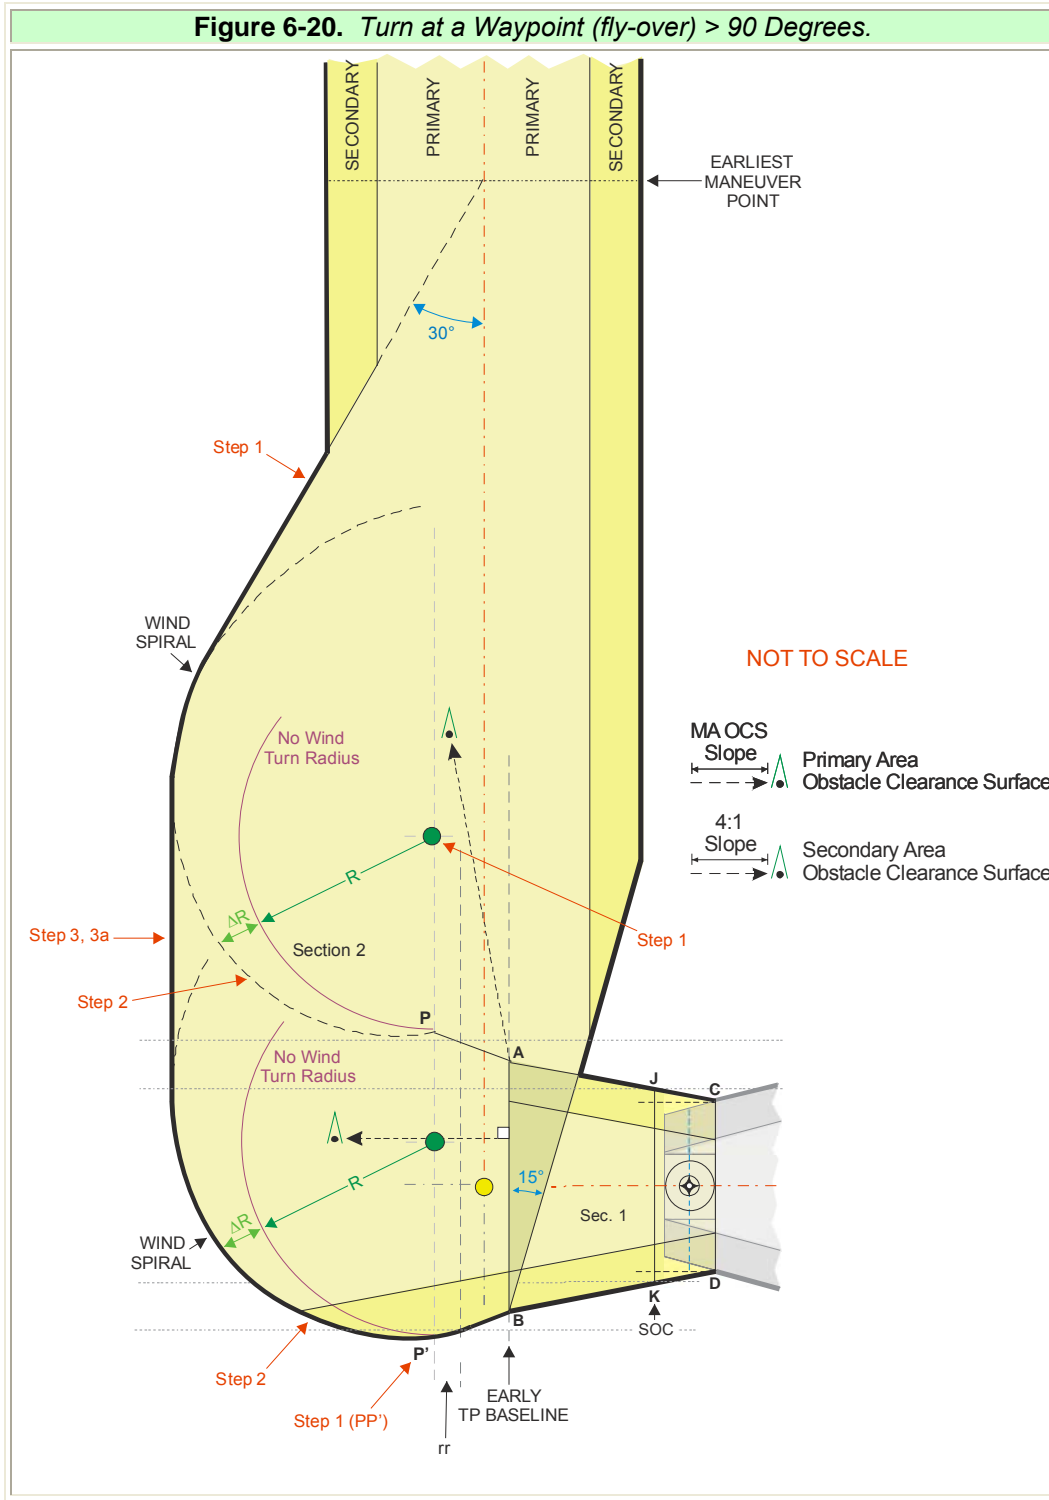


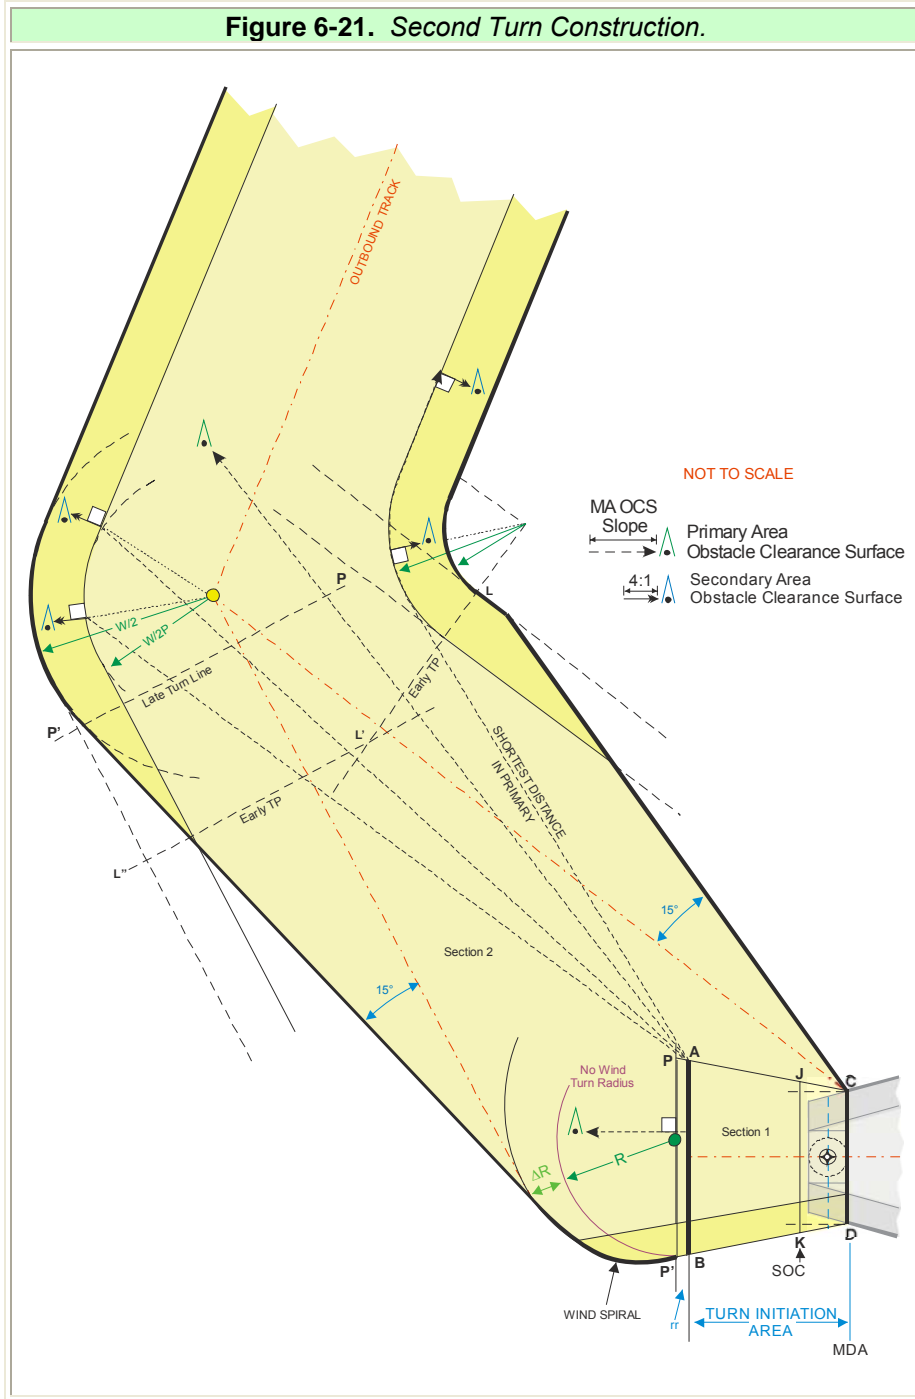

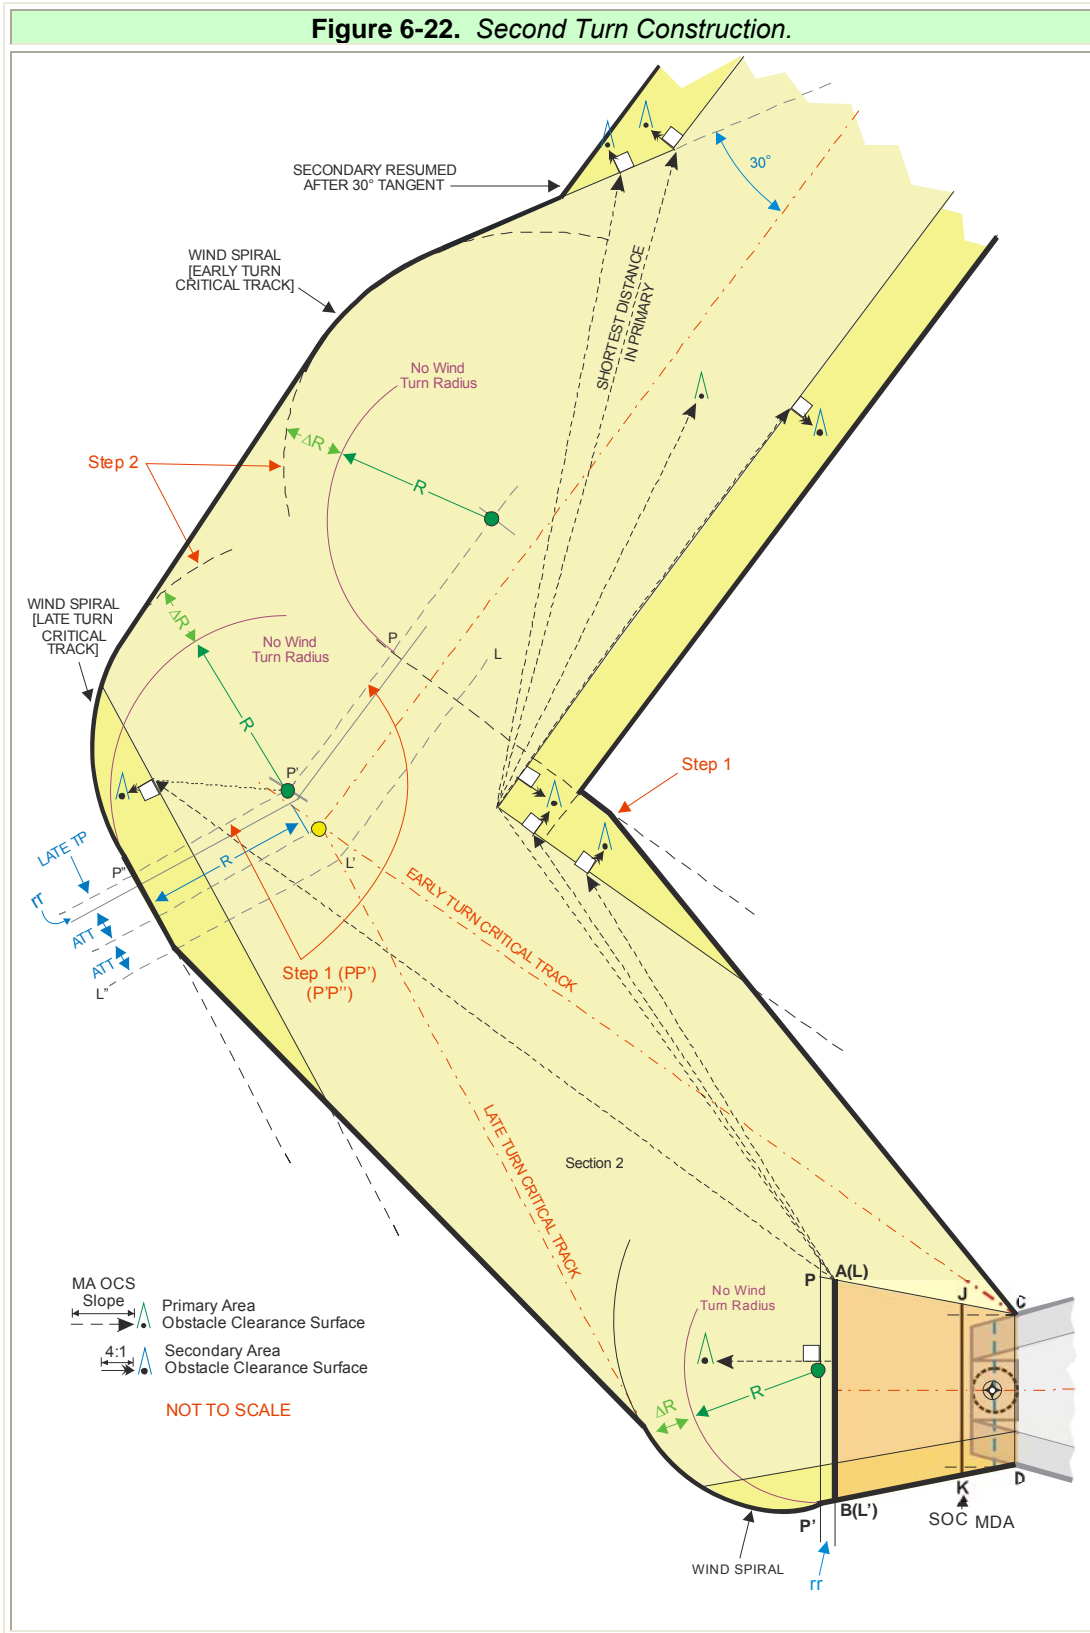

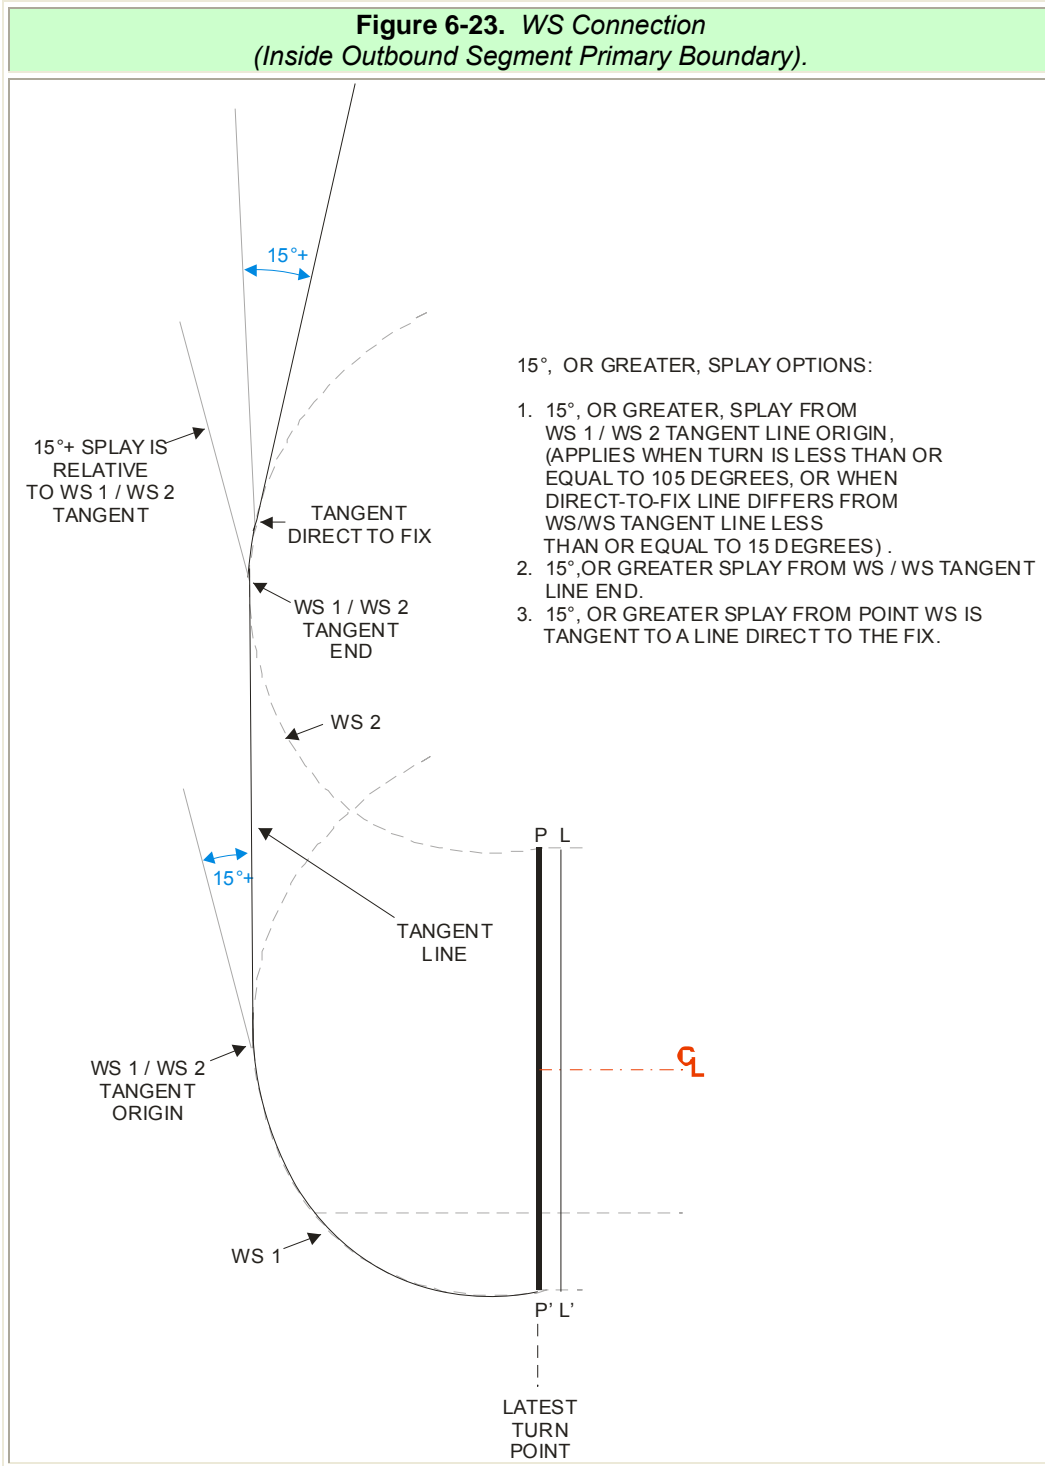

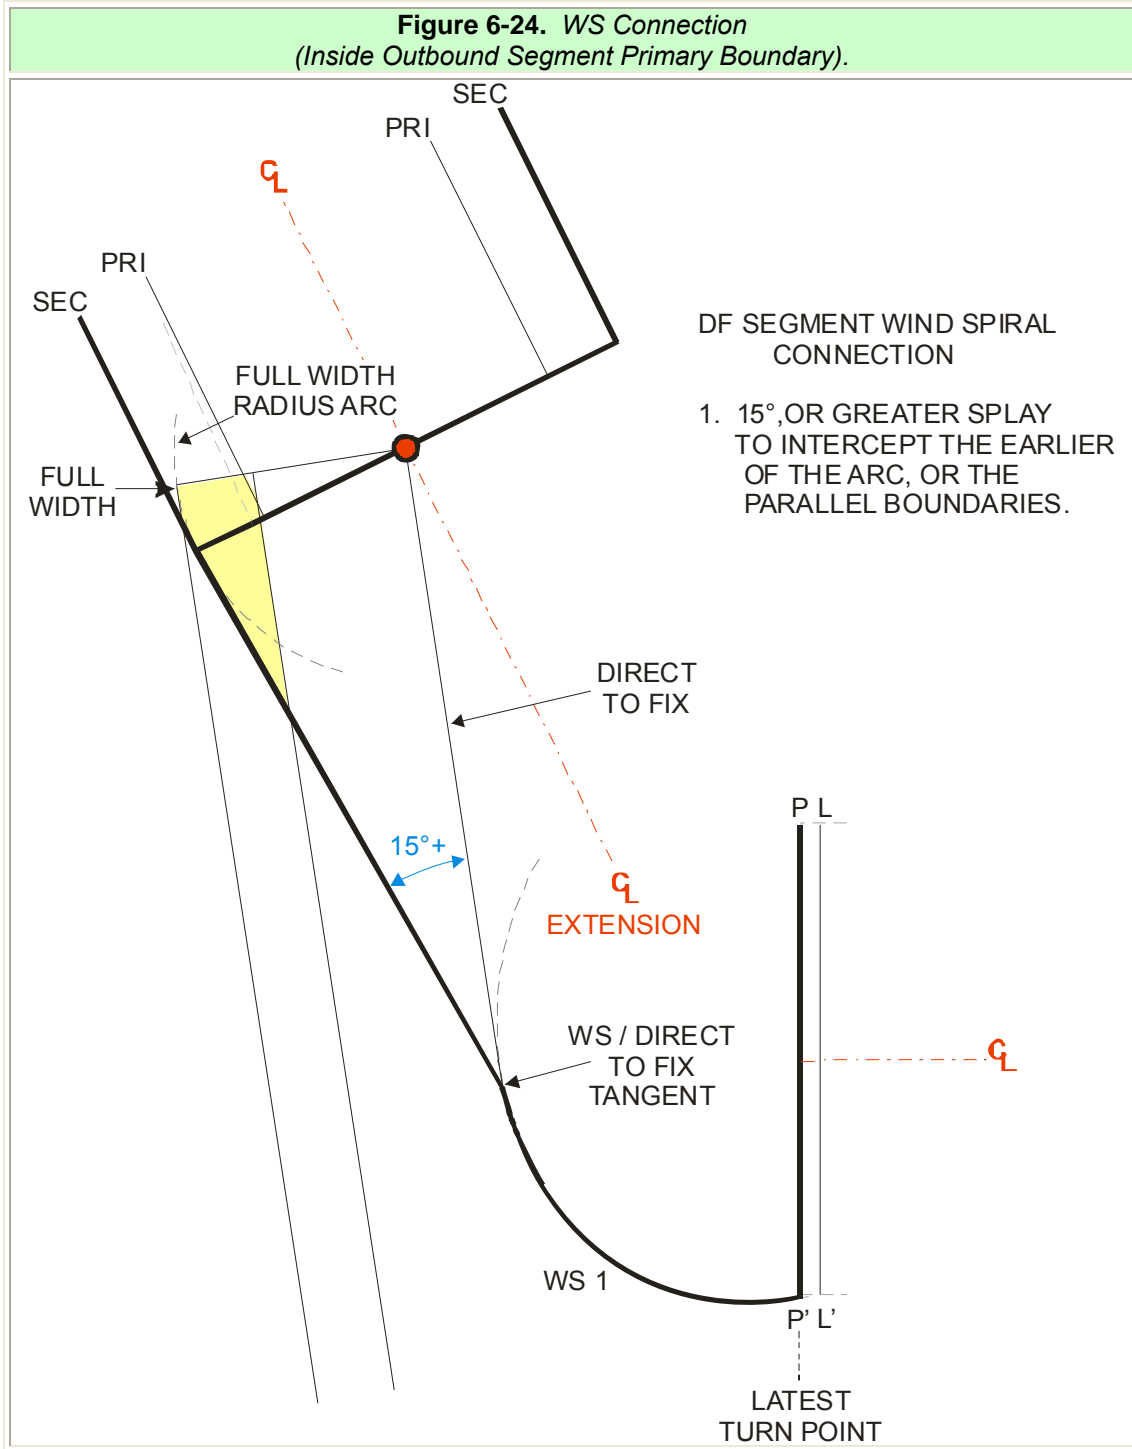

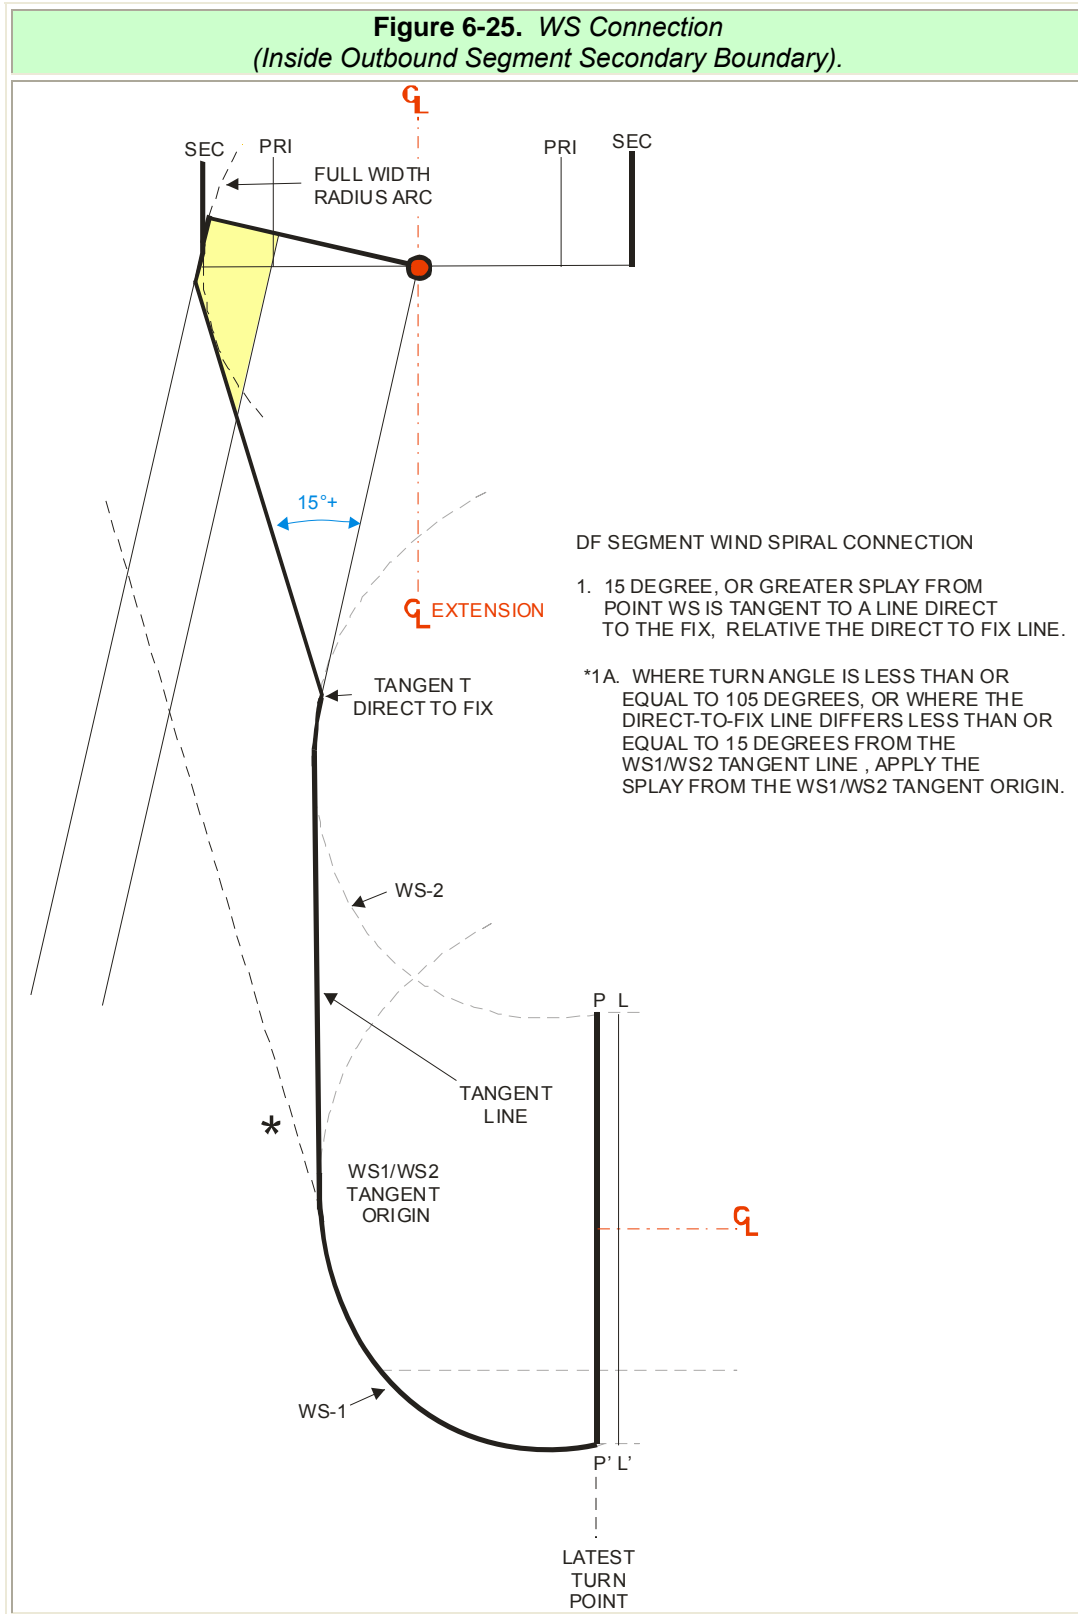

Chapter 7. Departure Criteria

7.1 Departure Criteria.

7.1.1 Development of Departure Procedures from *IFR* Nonprecision or Precision Heliports.

Paragraphs 7.2, 7.3, and 7.4 provide criteria for departure procedure (**DP**) development from civil and **USA IFR** heliports. *Paragraph 7.5* criteria applies to **DP** development from civil and **USA VFR** heliports. Advisory Circular (**AC**) 150/5390-2, *Heliport Design*, applies. Note the **FATO/TLOF** shape and dimension flexibility provided in the **AC**. Most graphics in this document apply square or rectangular shapes. These criteria are based on a standard 400 ft/**NM** helicopter climb performance.

Note: ‘VSRL’ in this chapter refers to a construction reference line, identical to the chapter 1 definition in dimension and construction, except it relates to the departure and departure course and may be generally considered synonymous with FATO edge.

Design the simplest **DP** that serves the operation. **DPs** and *turn protection* are based on a MAXIMUM of 70 **KIAS** (90 **KIAS** for military) until established on the departure termination fix (**DPTF**) inbound course. Annotate the MAXIMUM **KIAS** on the **DP**, e.g., Do Not Exceed 70 **KIAS** until established on the (*fix-name*) inbound course.

The initial departure fix (**IDF**) may be considered comparable to the departure end of runway for these departures. The visual segment, from Heliport to the **IDF**, provides a virtual three-dimensional path in space to join the instrument segment.

Apply departure route widths as follows:

- **Terminal** ≤ 30 **NM** from **HRP** (0.5-1.5-1.5-0.5):
 - Primary 1.5**NM**
 - Secondary 0.5**NM**
- **En Route** > 30 **NM** from **HRP** (1.0-3.0-3.0-1.0):
 - Primary 3.0**NM**
 - Secondary 1.0**NM**

Note: See paragraph 7.4.2b for WAAS widths.

7.1.2 Departure Types.

7.1.2 a. Diverse Departure.

A diverse departure supports any-direction departures to an altitude that satisfies all en route flight obstacle clearance requirements. Where the obstacle clearance

surface (**OCS**) is not penetrated, unrestricted diverse departures may be authorized. Publish standard takeoff minimums (*see paragraph 7.2*).

7.1.2 **b. Sector Departure.**

The sector departure supports any course/track/heading departure within a specified sector to an altitude that satisfies all en route flight obstacle clearance requirements (*see paragraph 7.3*).

7.1.2 **c. Route Departure.**

A route departure provides **IFR** protection along a route (retrievable from the navigation receiver database), with the navigation receiver operated in the terminal mode, from an **IFR** heliport or runway (*see paragraph 7.4*).

7.1.2 **d. Point-in-Space (*PinS*) Special Route Departure.**

The **PinS** Special Route Departure provides **IFR** protection beginning at a fly-over fix along a specific route (retrievable from the navigation receiver database), with the navigation receiver operated in the approach, terminal, or en route mode. Construct this departure using terminal and/or en route criteria (*see paragraph 7.5*).

7.2 **Diverse Departure.**

7.2.1 **Civil *IFR* and USA *VFR/IFR* Heliports Criteria.**

These criteria apply to civil and **USA IFR** heliports (*see appendix 4*). Evaluate the 20:1 **OCS** (*figure 7-1*) beginning at the **FATO** edge and extending outward and upward until the **OCS** reaches an altitude of 1,000 ft below the specified en route altitude. The MINIMUM en route level-flight required Obstacle Clearance (**ROC**) is 1,000 ft in non-mountainous areas and 2,000 ft in designated mountainous areas. *Order 8260.3B, Volume 1, paragraph 1720 applies*. Evaluate a level surface, beginning at the **HRP** throughout the departure area to a MINIMUM distance of 11 **NM** non-mountainous/21 **NM** mountainous beyond the 20:1 surface termination. The minimum climb gradient (**CG**) is 400 ft/**NM**. **ROC** increases at the rate of 96 ft/**NM**. Determine the distance (**NM**) to attain a **ROC** value by dividing the target **ROC** value by 96. [**ROC**/96 = Distance **NM**; round to next higher **NM**].

7.2.2 Calculate the OCS (20:1) height at an obstacle using formula 7-1.

Formula 7-1. OCS Elevation (H_{OCS}).		
$H_{OCS} = \frac{D}{20} + HE$		
Where D = Distance, FATO edge/boundary to obstacle (ft) HE = Heliport elevation (MSL)		
D/20+HE		
Calculator		
HE		Click here to calculate
D		
H_{OCS}		

7.3 Sector Departure.

These criteria apply to civil **IFR** heliports (see appendix 4) and **USA IFR** heliports. Establish sector area boundaries within which the helicopter must remain during departure maneuvers. Establish a circle about the **HRP** of the appropriate MINIMUM radius (50 ft for special procedures, 75 ft for public procedures). Identify obstacles the diverse sector area will avoid or mitigate. Establish the sector outer buffer boundaries using two lines drawn tangent to the circle and to the obstacle edges. Construct the common inner buffer/sector boundary using a set of lines drawn tangent to the circle diverging 20 degrees inward from the buffer outer boundary lines. The MINIMUM authorized sector is 30 degrees between sector boundaries (*see figure 7-2*).

7.3.1 Evaluate the sector OCS using the applicable portions of *paragraph 7.2.1*.

7.3.2 Climb instructions must relate to the course established from the **HRP** waypoint. Departure instructions must assure that helicopter maneuvers remain within the sector boundaries (*see Order 8260.46*).

7.4 Route Departure.

7.4.1 Initial Climb Area (ICA).

These criteria apply to civil and **USA IFR** heliports whose **HRP** coordinates are contained in the navigation receiver database. *Manual waypoint loading is not authorized*. All waypoints used in these procedures must be coded in the database as a retrievable sequence of waypoints. The navigational receiver must achieve a terminal **Receiver Autonomous Integrity Monitor (RAIM)** of 1.0 **NM**. Construct the initial climb segment to allow climb to an altitude of ≥ 400 ft above heliport elevation (**HE**). Construct the departure course from the Helipoint to a fly-over **IDF** ≤ 5 **NM** from the **HRP**. Construct the **ICA** lateral boundary with lines drawn

from the *VSRL* ends, splaying 20 degrees relative to the design track/course. Apply a 20:1 planar departure *OCS* rising from the *VSRL* toward the *IDF*. Minimum *HRP* to *IDF* distance is 1.0 *NM* unless a *CG* is published (see figure 7-3).

7.4.2 Continue the 20-degree splays until reaching full terminal or en route width (as applicable). The approximate splay distance to terminal width is 5.5 *NM*. Do not apply secondary areas within the *ICA*. Beyond the plotted *IDF* position, apply secondary areas after full primary width is attained (see figure 7-4). Use table 4-1, paragraph 4.1 MINIMUM leg length for course changes.

7.4.2 a. Global Positioning System (GPS) OEA Width more than 30 NM from the HRP for PinS and Special PinS Procedures.

Beginning where the route centerline reaches 30 *NM* from the *HRP*, expand from terminal route *OCA* widths to en route widths. Splay the primary area at 20 degrees relative to the course. Connect the secondary area boundaries by straight lines beginning and ending abeam the primary area boundary connection points (see figure 7-5).

7.4.2 b. Wide Area Augmentation System (WAAS) OEA En Route Width
Route width reductions (after full expansion), along routes contained in the data base are authorized where special procedures network departures and arrivals. Minimum *GPS* route width is ± 2.0 *NM* primary and 0.5 *NM* secondary, minimum *WAAS* route width is ± 1.5 *NM* primary and 0.5 *NM* secondary. These routes must be flown using terminal mode with a *CDI* scale of ± 1 *NM*. *OpsSpec* approval and form 8260-10 notation is required.

7.4.3 IFR Departure Areas' Segment Lengths.

The MINIMUM segment length is governed by the turn required at each waypoint and lengths required in table 4-1.

7.4.4 OCS Evaluation.

The 20:1 *OCS* rises from the *VSRL/FATO* forward edge until reaching the level surface described in paragraph 7.2.1. Evaluate straight segment primary area obstacles using the shortest distance, measured parallel to the design track/course, from AB to, or abeam the obstacle (see figure 7-6). Evaluate straight segment secondary area obstacles using the same measurement technique, plus the shortest distance 6:1 secondary rise from the primary boundary. Where a turn is involved, evaluate the straight portion until abeam the earliest primary area boundary divergence as described above. From the earliest primary boundary divergence (and its *OCS* elevation), measure the shortest distance within the primary area to the obstacle. Find the secondary *OCS* elevation at an obstacle using the same measurement method to the primary boundary nearest the obstacle (for the primary *OCS* elevation), then add the shortest distance 6:1 surface rise to the

obstacle. (see figures 7-6, 7-7). The procedure **OEA** ends at the **DPTF** latest **ATT**. Confirm the **OCS** /obstacle relationship using formula 7-2.

Formula 7-2. OCS Evaluation.		
$OBST_{PENETRATION} = OBST_{ELEV} - \left(OCS_{START} + \frac{D_{PRI}}{P_{SLOPE}} + \frac{D_{SEC}}{6} \right)$		
Where: $OBST_{ELEV}$ = Obstacle Elevation (MSL) OCS_{START} = Primary OCS start elevation (MSL) D_{PRI} = Distance, Primary OCS start to Obstacle (ft) P_{SLOPE} = Primary Slope (20:1 standard) D_{SEC} = Distance, Primary/Secondary Boundary to obstacle (ft) $OBST_{PENETRATION}$ = OCS Penetration (Positive penetrates/Negative is clear)		
$OBST_{ELEV} - (OCS_{START} + D_{PRI}/P_{SLOPE} + D_{SEC}/6)$		
Calculator		
$OBST_{ELEV}$		Click here to calculate
OCS_{START}		
D_{PRI}		
P_{SLOPE}		
D_{SEC}		
$OBST_{PENETRATION}$		

7.4.5 Level Surface Evaluation.

Apply *paragraph 7.2.1* (as applicable) within the route boundaries.

7.4.6 Obstacle Penetration of the OCS.

Where **OCS** penetrations exists, *paragraph 7.4.7* may be applied to establish a **CG**. Publish a ceiling in 100-ft increments above the controlling obstacle, and a visibility of 1.0 **SM** (minimum) for **IFR DP**s from **IFR** heliports requiring a **CG** exceeding 400 ft/**NM**. See *paragraph 7.5.4* for **MAXIMUM CG**. Establish a **CG** sufficient to clear penetrations, and determine an altitude where the **CG** is no longer required. Ensure the **OCS** clears all succeeding climb area obstructions, but avoid using a **CG** above an altitude that satisfies the **ROC**. When a required **CG** is operationally excessive, adjust fixes to allow lower **CG** usage within succeeding segments.

7.4.7 Climb Gradient to Relieve OCS Penetrations.

When **OCS** penetrations exist, consider increasing the minimum required **CG** to provide the required **ROC**. Maximum **CG** is 600 ft/**NM***

**Helicopters using special procedures may have a higher rate. When this applies, document data on FAA form 8260-10.*

Step 1: Calculate the **ROC**, the altitude at which the **ROC** for the obstacle is achieved, and the required **CG** (ft/**NM**) applying *formula 7-3*.

Note: Formula 7-3 Copter_{SOC} refers to the helicopter altitude at start-of-climb (SOC).

Step 2: Apply the **CG** to:

- The altitude that provides appropriate **ROC**, *or*
- The point/altitude that the subsequent **OCS** clears all obstacles.

Formula 7-3. ROC/CG/Minimum Altitude/OCS.		
STEP 1	$ROC_{obs} = ROC_{start} + 96 \cdot d$ <p>Where ROC_{start} = SOC ROC (100 or 250 ft) d = distance (NM) CG origin (SOC) to obstacle</p>	
$ROC_{start} + 96 \cdot d$		
STEP 2	$Alt_{min} = O_{elev} + ROC_{obs}$ <p>Where O_{elev} = Obstacle Elevation (MSL) ROC_{obs} = Step 1 result</p>	
$O_{elev} + ROC_{obs}$		
STEP 3	$CG = \frac{r}{d} \cdot \ln \left(\frac{(r + Alt_{min})}{(r + Copter_{soc})} \right)$ <p>Where d = distance (NM), (Same as Step 1 Input) Alt_{min} = Step 2 result $Copter_{soc}$ = Helicopter altitude (MSL) at CG origin</p>	
$r/d \cdot \ln((r + ALT_{min}) / (r + Copter_{soc}))$		
Calculator		
ROC _{start}		Click here to calculate
d (NM)		
O _{elev}		
Copter _{soc}		
ROC _{obs}		
Alt _{min}		
CG		

7.4.8

Climb Gradient Termination Altitude Determination.

Specify the **CG** to an altitude or fix where the higher than standard **CG** is no longer required. Calculate the gradient from the heliport **VSRL/FATO** edge for an **IFR** heliport **IFR** departure, or from the **IDF** latest **ATT** for a **VFR** heliport **PinS** departure. Round the **CG** termination altitude to the next higher 100-ft increment (20-ft or 50-ft increments may be applied when operationally required). For a climb in holding pattern, apply *Order 8260.3B, Volume 1, paragraph 293b* criteria (also see *appendix 5*).

7.5 PinS Special Route Departure for Civil and USA VFR Heliports.

7.5.1 Area.

Begin the terminal *IFR* route with a fly-over *IDF* waypoint. Construct the route using terminal or en route width, as appropriate. Expand from terminal to en route widths as described in *paragraph 7.4.2*.

7.5.1 a. Initial Climb Area. The *ICA* provides a measure of protection for helicopter climb to the *IDF* altitude (*see figure 7-3*). Establish the fly-over *IDF* within 5 *NM* of the *HRP*. The *ICA* begins at the *VSRL* and extends to the *IDF* plotted position. Splay the *ICA* from *VSRL* width to full primary area width (aligned with the course) at the *IDF* earliest *ATT* (*see figure 7-8*).

7.5.1 b. Obstacle Evaluation, Initial Climb Area. The *ICA* length is normally that of the *IFR* to a *VFR* heliport (*IVH*) approach visual segment. The special *PinS* departure minimum *ROC* at the *IDF* is 100 ft (turn $\leq 15^\circ$), or 250 ft (turn $> 15^\circ$). The *OIS* starts at the *VSRL* at *HE* and rises as a plane 1 degree below the approach *VSDA*. The *IDF* altitude is normally the approach *MDA*, but may be lower where the *IFR* segment *OCS* is not penetrated and the *IDF ROC* is adequate. A *CG* may be applied to mitigate *IFR* segment *OCS* penetrations. Where the *OIS* reaches 250 ft below the *IDF* altitude (plus adjustments) prior to the *IDF* (for a special procedure), extend a level *OIS* to the *IDF* latest *ATT*. [This applies to an *IFR* to a *VFR* heliport (*IVH*)]. Mitigate *OIS* penetrations using the methods listed in *paragraph 5.4.3d*. Where there is an established *PinS* approach, the *OCS* at the *IDF* is normally *MDA* minus *ROC* and adjustments.

7.5.1 c. Special PinS Departure IFR Segment Area. The *IFR* segment *OEA* begins at the *IDF* earliest *ATT* at ± 0.4 *NM* primary width and 0.5 *NM* secondary width. The *ICA* to first *IFR* segment intersection angle must not exceed 30° (*see figure 7-9*). The *IFR* segment primary width splays to ± 0.55 *NM* at the second *WP* earliest *ATT*, and maintains this width until abeam the second *WP* plotted position. The route width then expands to reach terminal area primary width at 2 *NM* past the second *WP* plotted position (*see figures 7-9 and 7-9a*). *Appendix 3* conditions and assumptions must be satisfied. Where the *ICA* to first *IFR* segment intersection angle is $\leq 15^\circ$, and where an operational advantage is gained within the initial *IFR* segment, the area outside 20-degree splay lines from the *IDF* earliest *ATT* primary boundaries may be eliminated from consideration (*see figure 7-9a*). Where the intersection angle exceeds 15 degrees, apply the fly-over fix, outside turn protection principles from *chapter 6*.

7.5.1 d. Raise the OIS Origin to Avoid Penetration. A hover climb may mitigate a *PinS* departure *ICA OIS* penetration. The hover climb height (above *HE*) must be consistent with the helicopter's flight manual operational limitations, and its ability to hover out of ground effect (*see figure 7-10*). Publish a hover-climb procedure only where the climb exceeds 5 ft above *HE*. A hover height above

20 ft requires Flight Standards approval. Where this procedure is developed, raise the **OIS** origin by the prescribed hover climb/penetration amount.

7.5.1 e. PinS Departure IFR Segment. This criteria applies to **VFR** heliport departures with or without an approach procedure. The **IFR** segment begins at the fly-over **IDF** earliest **ATT**, and ends at the **DPTF**. Where no established approach exists, or when otherwise required, establish an **IDF** based on an **OEA** evaluation of a *level surface* from the earliest to latest **IDF ATT** in the **IFR** segment and a *20:1 surface* starting at the latest **IDF ATT**. In this case, code the **HRP** at the **IDF** location. The **ICA** course and the first **IFR** segment interception angle should not exceed 30 degrees. Use *table 4-1, paragraph 4.1*, MINIMUM leg length for course changes. Apply the terminal **IFR** route width within 30 **NM** (no **WAAS** distance limit applies) using a 6:1 secondary area. Establish an **IFR** segment entry altitude at least 100 ft (turn $\leq 15^\circ$), or 250 ft (turn $> 15^\circ$) above the **IFR** segment **OCS** slope beginning elevation (*see figure 7-11*). Where the turn exceeds 15 degrees, apply the fly-over fix, outside turn protection principles from *chapter 6*.

7.5.2 OCS Evaluation.


Evaluate the 20:1 **OCS**, beginning at the **IDF** latest **ATT**, as specified in *paragraph 7.4.4*. Where possible, establish the **IDF** crossing altitude using a STANDARD **CG** from the heliport. Where the **IDF** turn is $\leq 15^\circ$, and where an operational advantage is gained within the initial **IFR** segment, the area outside 20-degree splay lines from the **IDF** earliest **ATT** primary boundaries may be eliminated from consideration (*see figure 7-11a*).


7.5.3 Multiple Climb Gradient (All Departures).



Where multiple **CGs** exist within a segment, e.g., due to multiple obstacle impacts, and/or air traffic control requirements, or to meet en route MINIMUM crossing altitude requirements, publish the highest computed **CG** for that segment. Subsequent departure segment **CGs** must not exceed a proceeding segment **CG**. Flight Standards approval is required for more than two higher-than-standard **CGs** in a procedure.


7.5.4 Maximum Climb Gradient (All Departures).


The MAXIMUM allowable public procedure **CG** is 600 ft/**NM**. For special procedures, base the MAXIMUM **CG** in any segment on specific performance information provided by the operator's helicopter flight manual, the helicopter manufacturer, or Rotorcraft Directorate's Office (ASW-100).


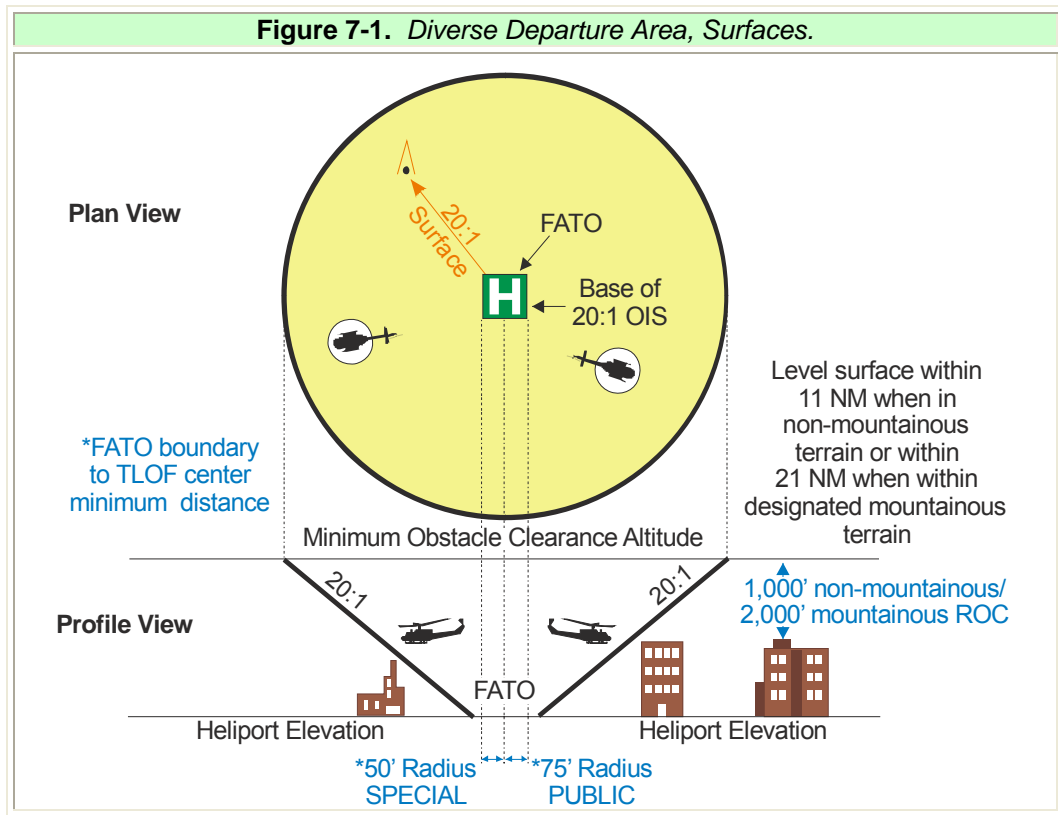


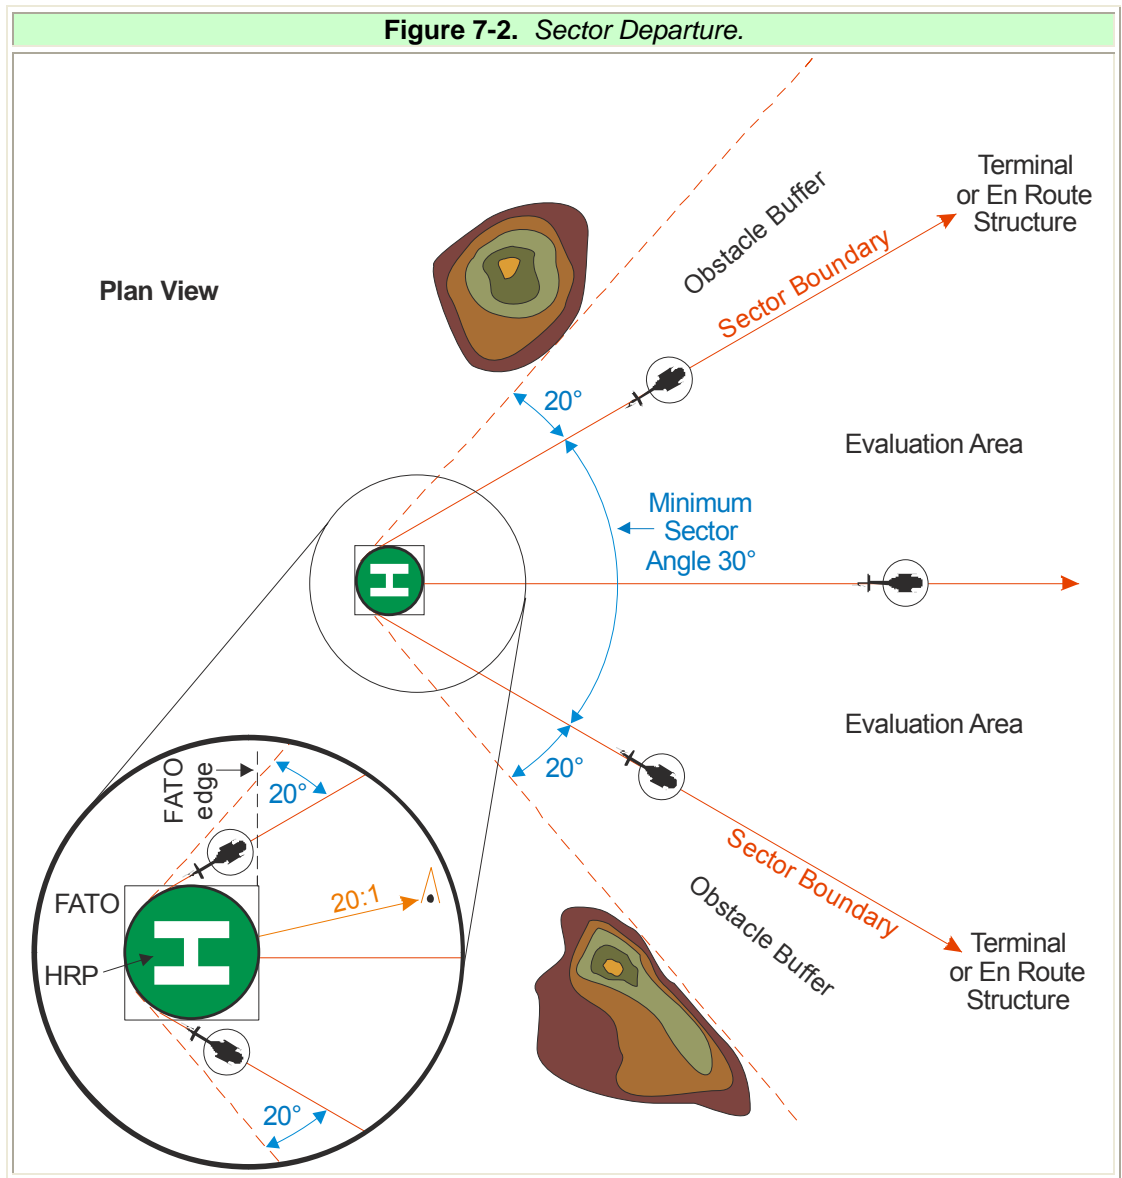


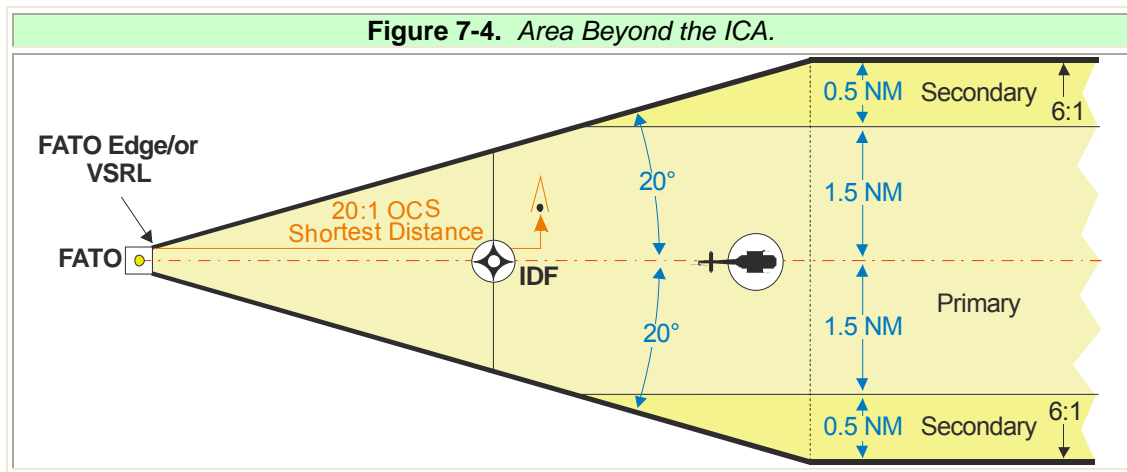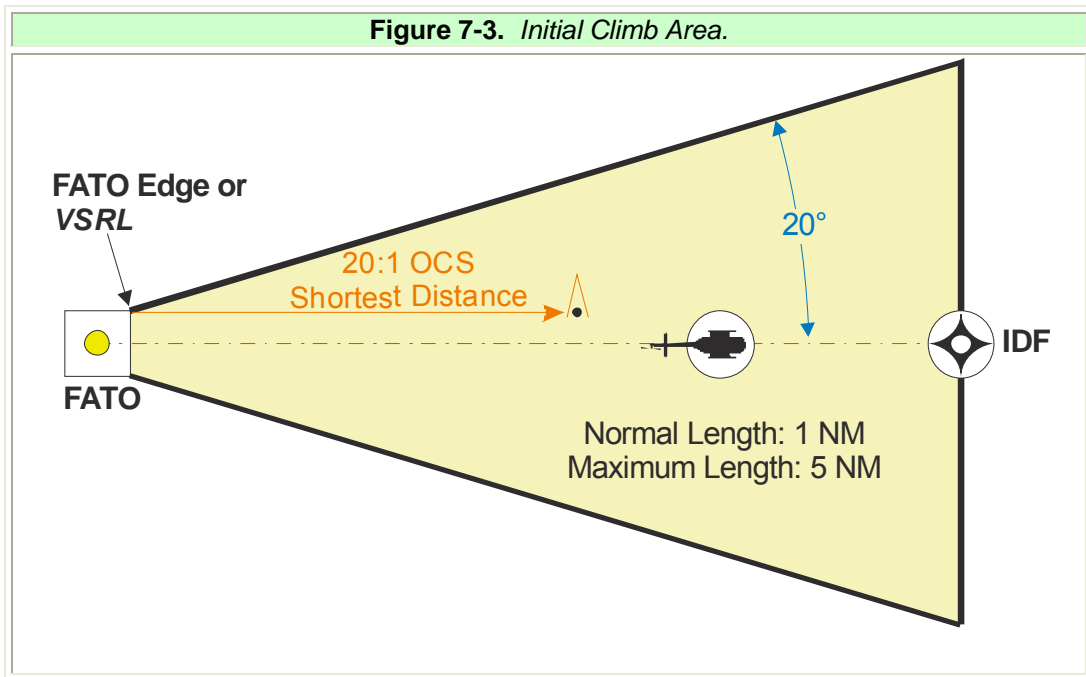


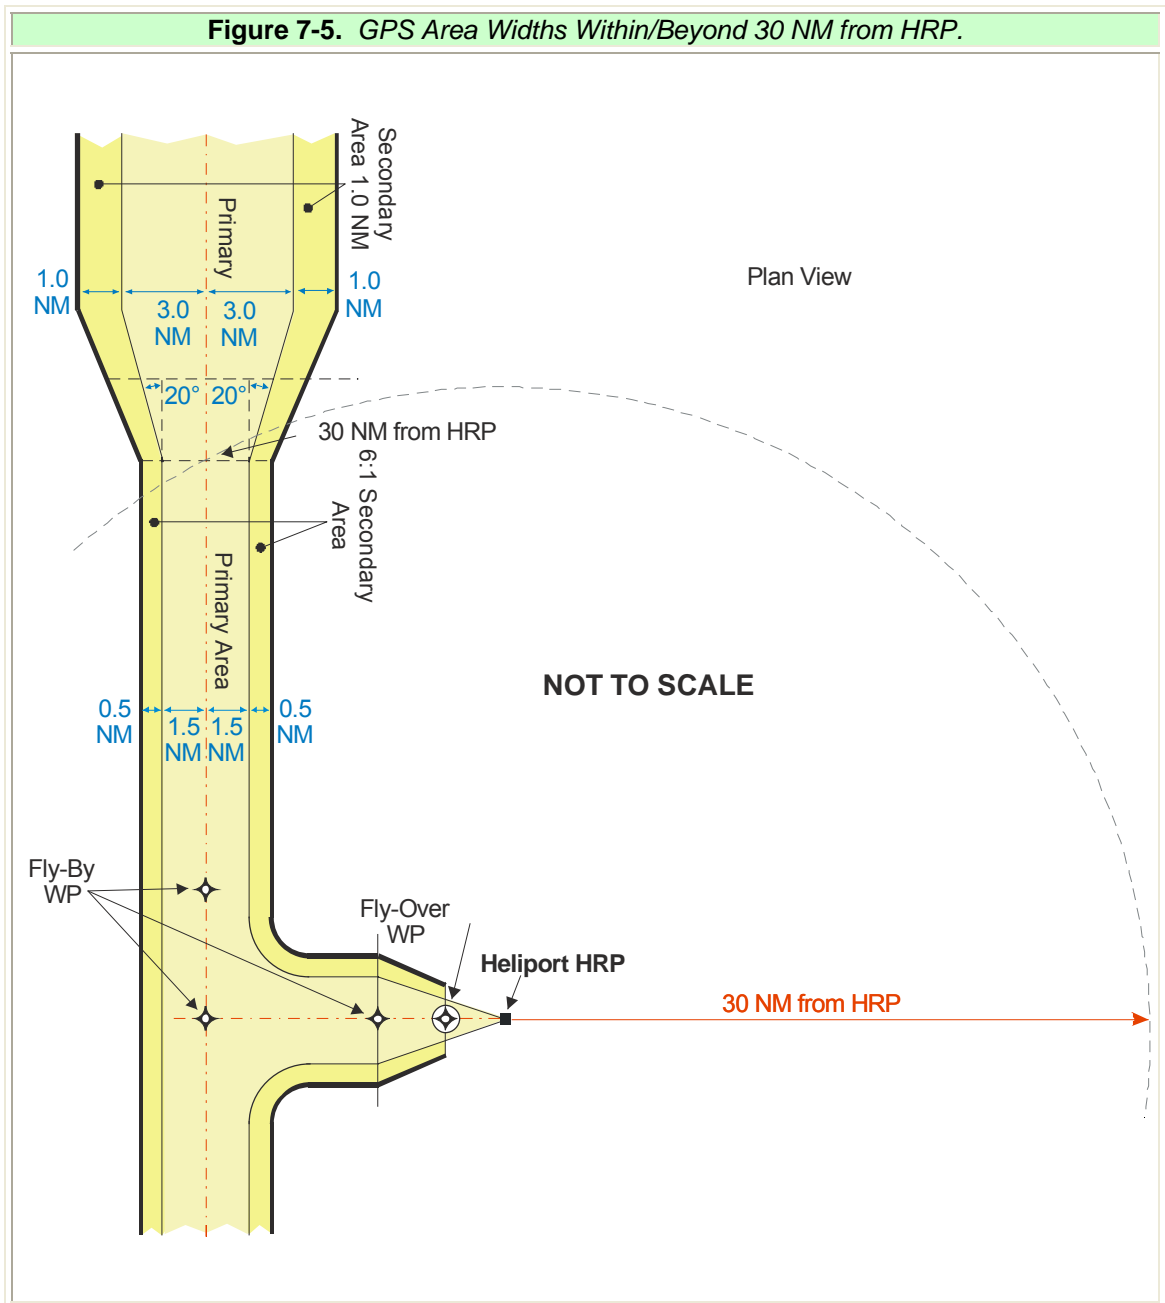


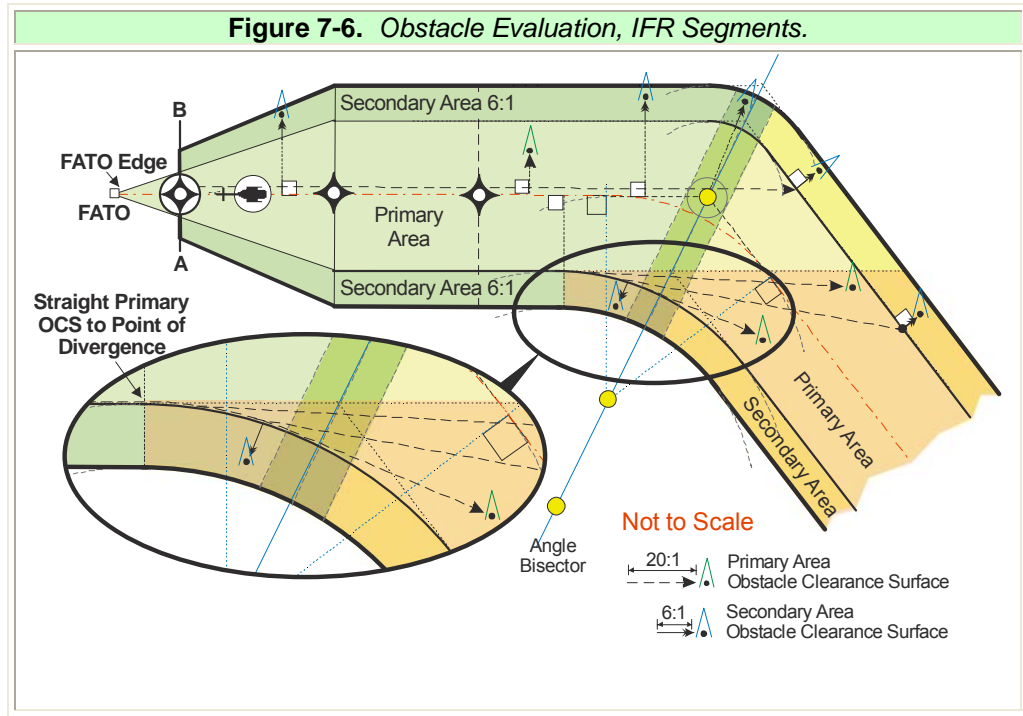


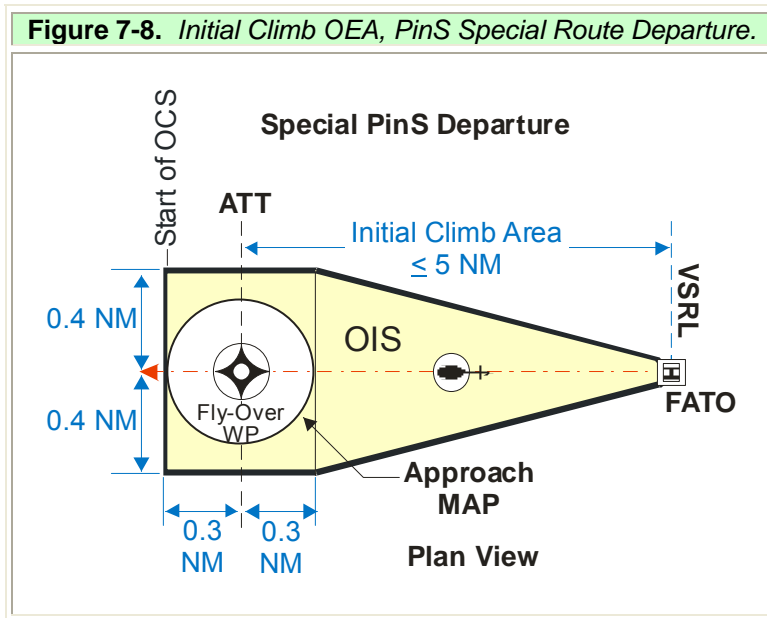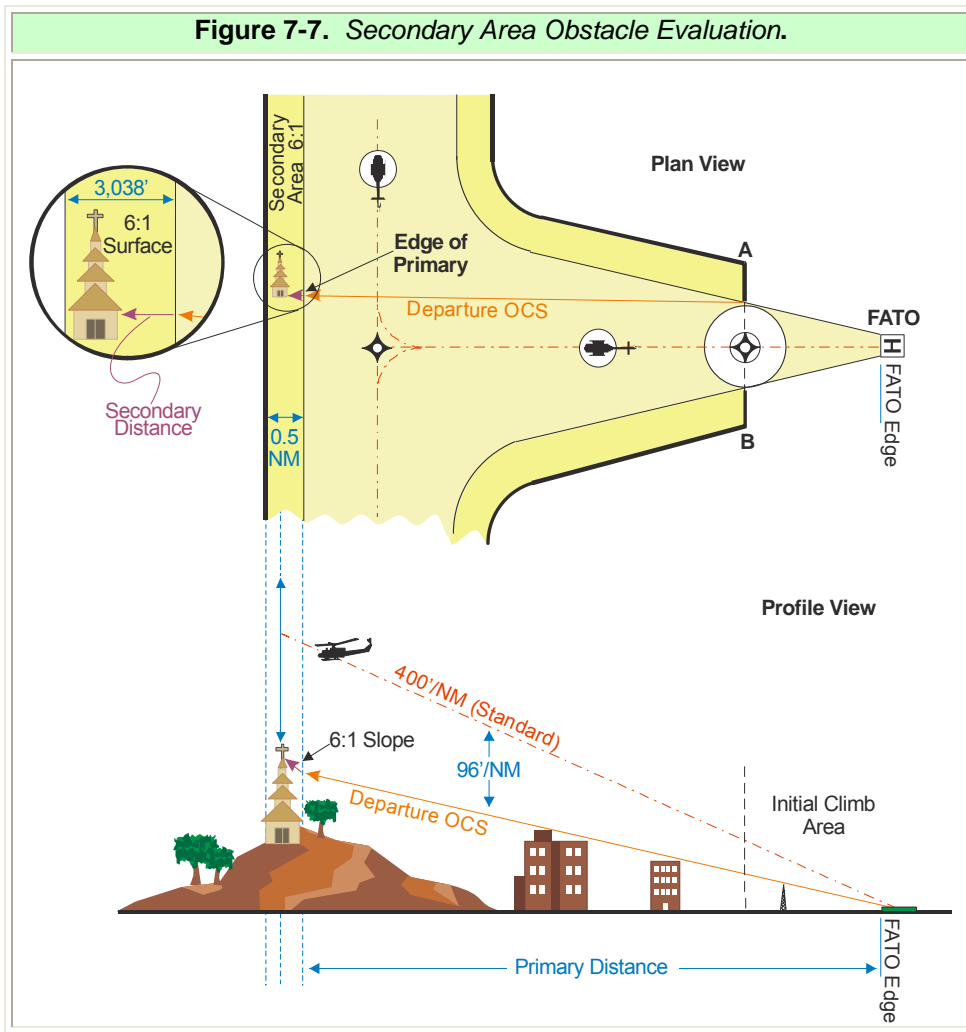


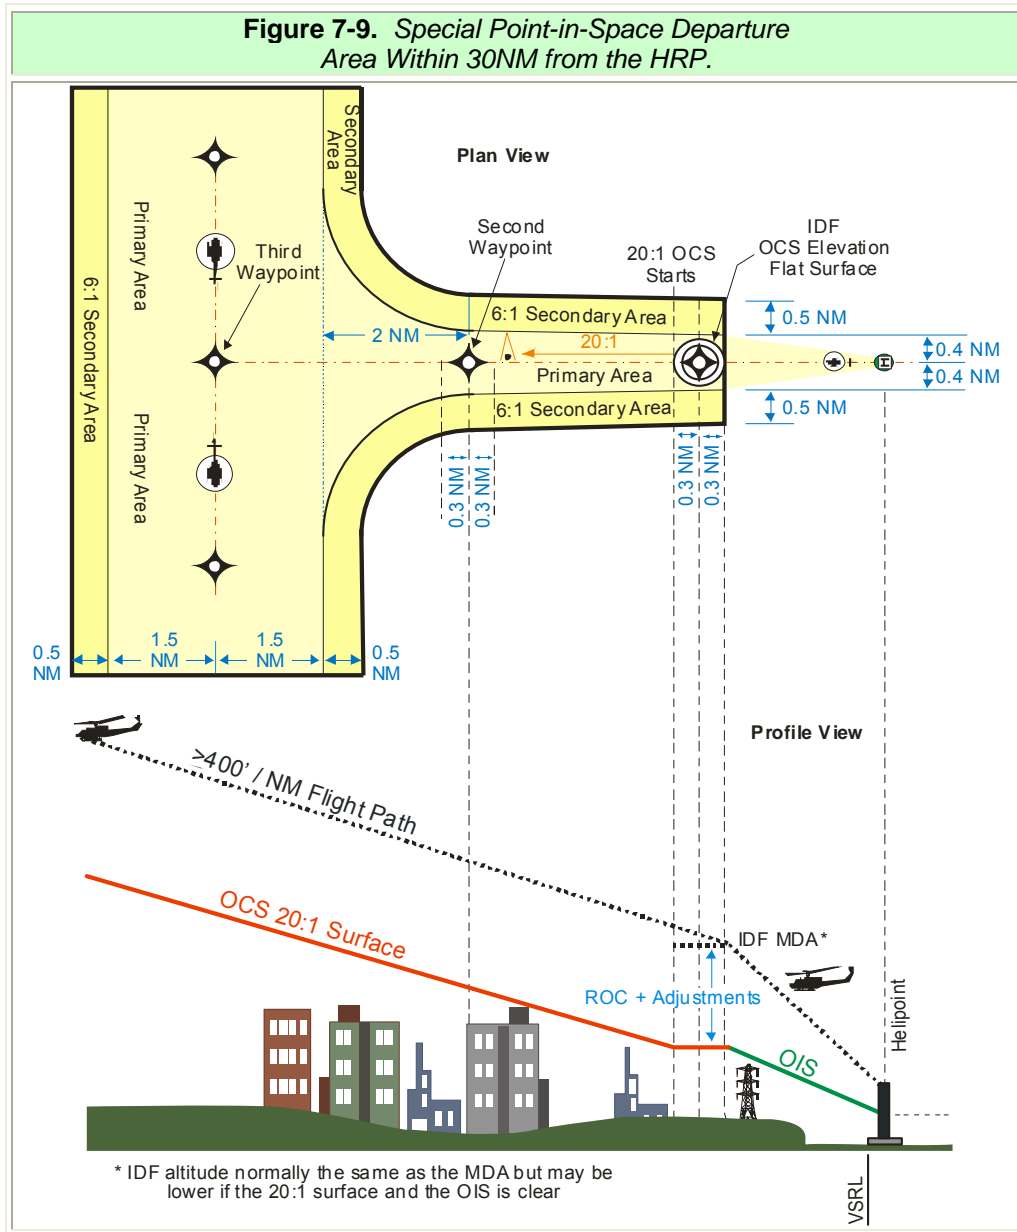

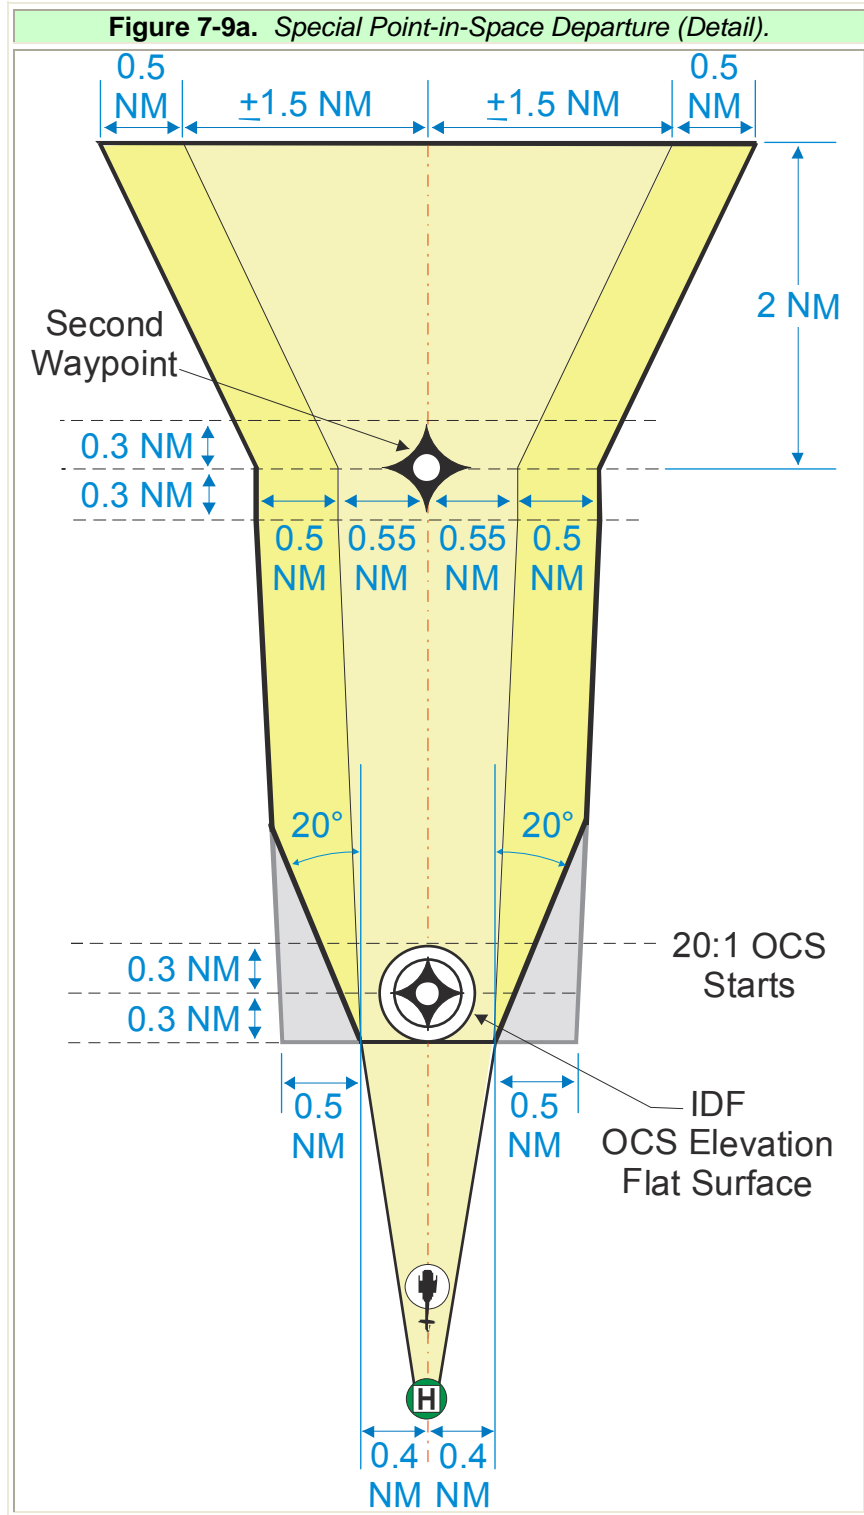

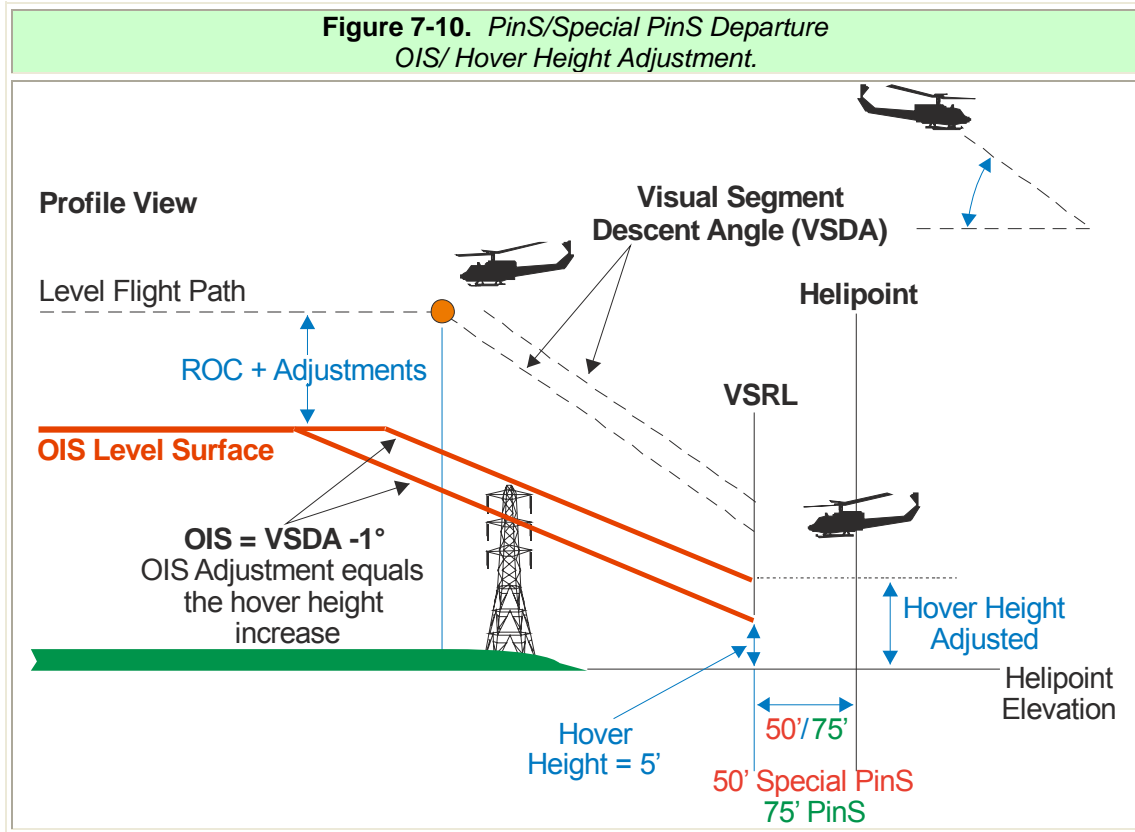

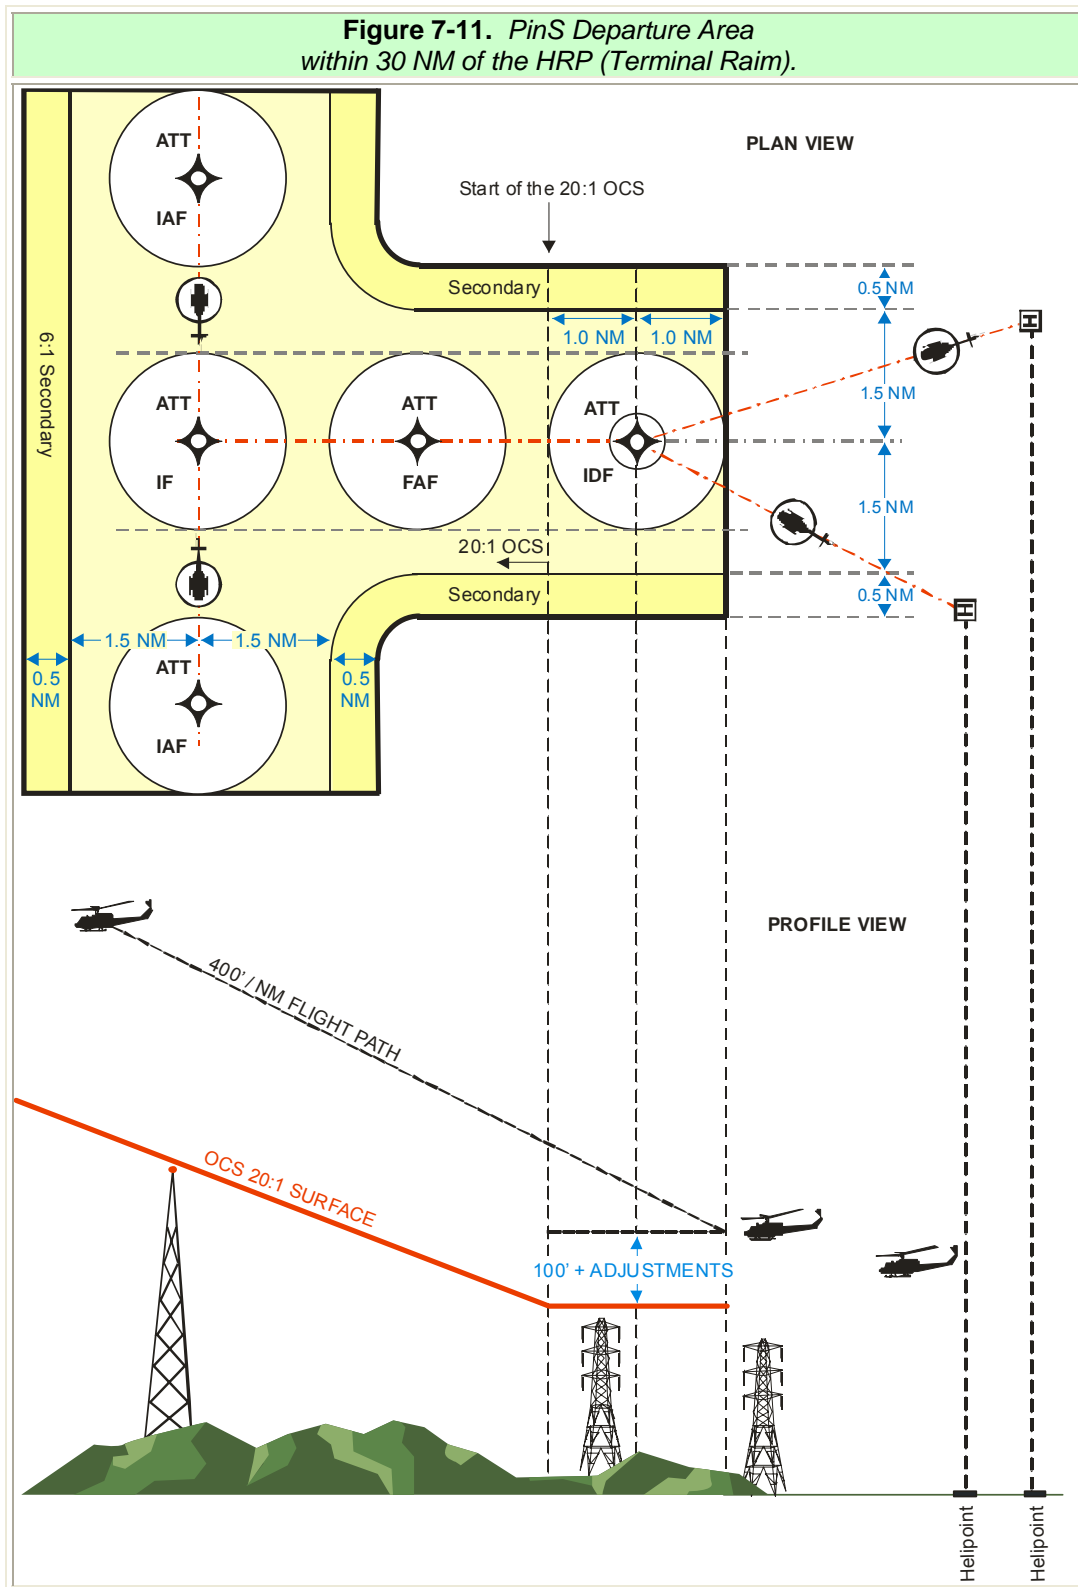

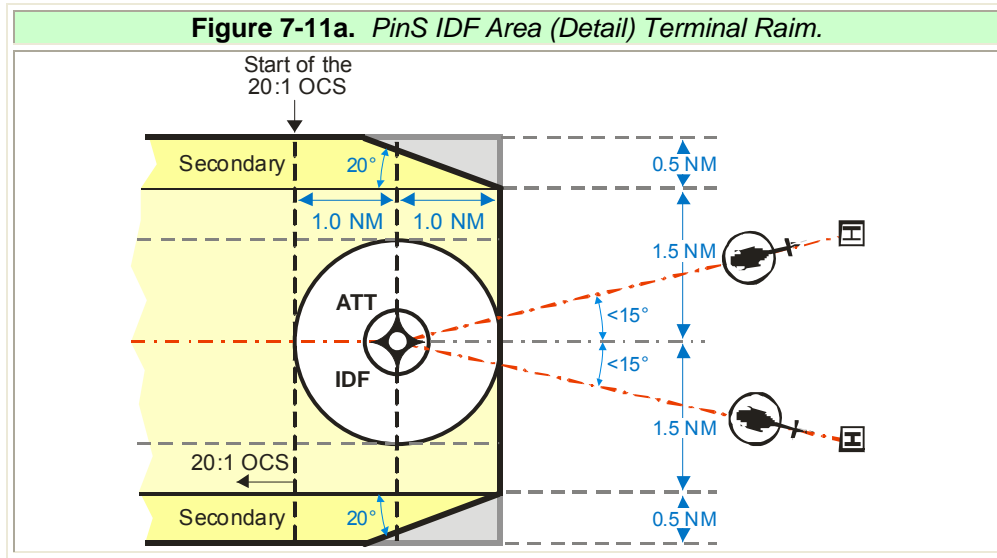

Chapter 8. Minimums for Helicopter Nonprecision GPS Approaches and Departures

8.1 Application.

Minimums specified for Category “A” aircraft in *Order 8260.3, Volume 1, chapter 3*, apply to helicopter **GPS** procedures, except as follow: *Paragraph 311* does not apply. For helicopter procedures to heliports or heliports, substitute “heliport elevation” for “airport elevation” or “touchdown zone elevation.”

8.1.1 Altitudes for *IFR* Approaches to *IFR* Heliports.

Order 8260.3B, Volume 1, paragraph 321 applies, except change 40:1 to 20:1. *Paragraph 322* does not apply. Heliport minimums are referenced to the heliport elevation (**HE**).

8.1.2 Visibilities for *IFR* Approaches to *IFR* Heliports and Runways.

8.1.2 a. **Approaches to Lighted Heliports.** Apply *Order 8260.3, Volume 1, paragraph 1127a(2)*.

8.1.2 b. **Approaches to Runways.** See *Order 8260.3, Volume 1, paragraphs 1127a (1) and 1128*.

Note 1: For all procedures where obstacles penetrate paragraph 251 visual surfaces, visibility credit for approach lighting systems must not reduce published visibility to values less than the values specified by paragraph 251 (3/4 or 1 SM as appropriate).

Note 2: For USA, when analyzing the visual position of the final approach segment and a penalty is encountered when applying the basic criteria in Order 8260.3, Volume 1, paragraph 251b, apply 20:1 vice 34:1 and 10:1 vice 20:1.

8.1.2 c. **No-Light Visibility.** Apply *Order 8260.3, Volume 1, paragraph 1127a*. MINIMUM visibility must not be less than the distance from the plotted position of the **MAP** to the heliport.

8.1.2 d. **Credit for Lights.** Where a heliport approach lighting system (**HALS**) is installed, the visibility may be reduced by $\frac{1}{4}$ **SM** to a value not less than $\frac{1}{4}$ **SM**.

Note: Annotate the procedure to indicate minimum no-light visibility applicable if HALS is inoperative.

8.1.3 IFR to a VFR Heliport (IVH) (Proceed Visually).

8.1.3 a. The **MINIMUM visibility** is $\frac{3}{4}$ *SM*. If the height above surface (*HAS*) exceeds 800 ft, the **MINIMUM visibility** is 1 *SM*. The **MINIMUM visibility** must not be less than the distance from the plotted position of the *MAP* to the heliport.

8.1.3 b. PINS Approach (Proceed VFR). Required on FAA FORM 8260-10.

Note: "PROCEED VFR." The minimums at the time of conducting the approach are the highest:

- *published on the chart*
- *required by the operating rule*
- *Operations Specifications(OpsSpecs)*

8.1.4 Departures from VFR Heliports.

8.1.4 a. Chart departure minimums from *VFR* heliports no lower than those contained in *table 8-1*.

Table 8-1. Heliport Departure Minimums.		
DEPARTURE PROCEDURE	CEILING	VISIBILITY
Proceed visually from VFR heliport (IVH).	Equal to the MDA raised to the next 100-ft increment.	Equal to the distance from the heliport to the IDF, but not less than $\frac{3}{4}$ <i>SM</i> .
Proceed VFR from VFR heliport (PinS)	Minimums are dependent on the rules that apply to the specific operator, e.g., 14 CFR 91, OpSpec, LOA, etc.	Minimums are dependent on the rules that apply to the specific operator, e.g., 14 CFR 91, OpSpecs, LOA, etc.

8.1.5 Departure Minimums from IFR Heliports and Runways.

8.1.5 a. Unless otherwise specified, the standard Part 97 takeoff departure visibility from a runway is $\frac{1}{2}$ *SM*.

8.1.5 b. Where obstacles 1 *SM* or less from the *DER* or *FATO* edge penetrates the 20:1 *OCS*:

8.1.5 b. (1) Publish standard departure minimums with a required *CG* (*see paragraph 7.4.9*) to a specified altitude (*see paragraph 7.4.10*), and

- 8.1.5** **b.** (2) Publish a ceiling and visibility to see and avoid the obstacle(s), and/or
- 8.1.5** **b.** (3) Develop a specific textual or graphic route to avoid obstacle(s).
- 8.1.5** **c.** **Where obstacles more than 1 SM** from the *DER* penetrate the 20:1 *OCS*:
- 8.1.5** **c.** (1) Publish standard departure minimums with a required climb gradient to a specified altitude, or develop a specified textual graphic departure route to avoid the obstacle(s).
- 8.1.5** **d.** **Ceiling and Visibility.**
- 8.1.5** **d.** (1) Specify a ceiling value equal to the height of the highest penetrating obstacle above heliport or airport elevation rounded to the next higher 100-ft increment. The ceiling value when specified must be at least 300 ft.
- 8.1.5** **d.** (2) Specify a visibility value equal to the distance measured directly from the *FATO* edge or *DER* to the obstacle, rounded to the next higher reportable value. The visibility when specified must be at least 1 *SM*.
- 8.1.5** **e.** **Military Minimums.** Departure minimums for military operations are contained in the appropriate service directives.
- 8.1.6** **Lighting Systems for Helicopter *GPS* Instrument Approach Procedures.**
- 8.1.6** **a.** **Helicopter Instrument Lighting System (*HILS*).** A *HILS* is recommended for all helicopter *GPS* approach operations to a heliport. An approved runway lighting system is adequate for approaches to runways. A *HILS*, when installed, must be aligned with the *MAP* to heliport course.
- 8.1.6** **b.** **Helicopter Approach Lighting System (*HALS*).** A *HALS* is necessary for locations desiring lower visibility minimums for approaches designed to heliports.

THIS PAGE INTENTIONALLY LEFT BLANK

Chapter 9. Wide Area Augmentation System (WAAS) Localizer Performance (LP) Criteria

9.1 General.

Use the criteria in *chapter 4* for the construction of the initial and intermediate segments up to the **FAF**, and *chapter 6* criteria for the missed approach segment construction (see *paragraph 9.7 for connection at the MAP*). The **WAAS LP** criteria apply to the final approach only. For all other segments apply **GPS** criteria except where noted for a turn at the **FAF**, and missed approach constructions that are different. This implementation of **WAAS** does not include a glidepath function for these procedures. Criteria in this chapter provide a narrower obstacle evaluation area (**OEA**) in the instrument flight rule (**IFR**) final approach segment (**FAS**), and obstacle identification surface (**OIS**) in the visual segment. The segment lengths and descent rate/gradients are the same as *chapter 5*. The intermediate segment begins with the same width at the **GPS** intermediate fix (**IF**), reference *chapter 4*, tailored to the beginning width of the **WAAS FAS**, reference *paragraph 9.3* at the **FAF**. Apply *paragraphs 5.4 through 5.6* in the design of the approaches in the visual/visual flight rule (**VFR**) segments and apply this chapter for the **IFR FAS OEA** and **FAS** required obstacle clearance (**ROC**). Apply an **OIS**, reference *paragraph 5.4*, with the reduced width, reference *paragraph 9.9*. Apply *paragraph 5.4* for the analysis of the **VFR** area of a Point in Space (**PinS**) (Proceed **VFR**) approach.

Figure 9-1 depicts the basic configuration for determining the Flight Path Alignment Point (**FPAP**) and fictitious helipoint (**FHP**) coordinates. Locate the **FHP** 2,600 ft from the missed approach point (**MAP**). The **FPAP** is a point defined by the World Geodetic System 1984 (**WGS-84**) latitude, longitude, and is located 9,023 ft from the **FHP**.

9.2 **Minimums.** Apply *chapter 8*.

9.3 **Use The Following Steps for WAAS LP Procedure Construction:**

Step 1: Determine the **FAS** course alignment, **MAP**, **FHP**, and **FPAP** coordinates.

Step 2: Calculate the distance from the **FHP** to the **PFAF** (D_{PFAF}) using *formula 9-1*. Calculate the width of primary and secondary areas at any distance from **FHP** to the earliest point the **PFAF** can be received using *formulas 9-2 and 9-3* (see *figure 9-3*).

Formula 9-1. LP PFAF (D_{PFAF}).		
$D_{PFAF} = \frac{\ln\left(\frac{r + \text{alt}}{r + \text{FHP}_{\text{elev}} + \text{HCH}}\right) \cdot r}{\tan\left(\theta \cdot \frac{\pi}{180}\right)}$		
Where alt = minimum intermediate segment altitude FHP _{elev} = FHTP MSL elevation HCH = HCH value r = 20890537 θ = glidepath angle		
$(\ln((r+\text{alt})/(r+\text{FHP}_{\text{elev}}+\text{HCH}))*r)/\tan(\theta*\pi/180)$		
Calculator		
FHP _{elev}		Click here to calculate
HCH		
θ		
alt		
D_{PFAF}		

Step 3: After constructing the **IFR** final trapezoid area, analyze the **FAS** by determining the controlling obstacle within the **IFR** final segment by applying the **ROC** in *paragraph 9.3* and determining the minimum descent altitude (**MDA**).

Step 4: When constructing an **IFR** to a **VFR** heliport procedure (**IVH**, Proceed Visually), or an **IFR** approach to a **VFR** runway procedure (**IVR**, proceed visually), apply *chapter 5* criteria for the visual segment, but construct the narrower **OIS** in accordance with *paragraph 9.9* of this chapter.

Step 5: When constructing a **PinS** (Proceed **VFR**) approach, apply the criteria in *chapter 5* for the **VFR** segment and adjust the **MDA** of the **IFR** segment after an analysis of the **VFR** segment if required.

Step 6: Construct the missed approach using *paragraph 9.11*, and *chapter 6*.

9.4

Determine **FAS** Course Alignment, **FPAP** and **FHP** Coordinates.

The **FAS** course determines the positional relationship between the **FPAP** and the **FHP**. Calculate the **FPAP** latitude and longitude coordinates using the **MAP** as a starting point after determining the final approach course (**FAC**) of the procedure. Use the direct program and extend the **FAS** course as an azimuth at a distance of 2,600 ft from the **MAP** to determine the **FHP** coordinates. Extend this course 9,023 ft beyond the **FHP** to calculate the coordinates of the **FPAP** (see *figure 9-1* and *table 9-1*).

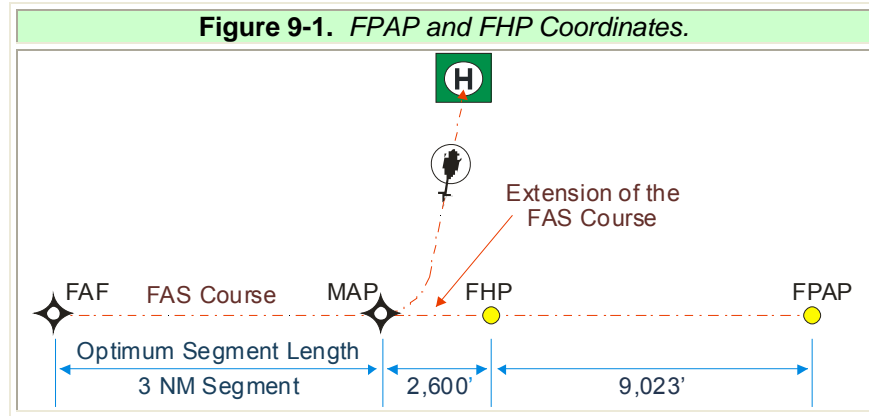




Table 9-1. FPAP Information.

FPAP Distance from FHP	± Splay	± Width	Length Offset
9,023 ft	2.0°	350 ft (106.75 m)*	0

*Round result to the nearest 0.25 m.

9.4.1 Area.

The **FAS OEA** begins at the earliest **FAF** position and ends at the latest **MAP** position (see figure 9-2). The **FAF** and **MAP** along-track tolerance (**ATT**) is 131.234 ft (40 m). Apply 250 ft of **ROC** in the primary area. The secondary area is 250 ft at the primary boundary tapering uniformly to zero at the outer edge. The beginning width closest to the **FHP** for the primary area is 867.79 ft and for the secondary areas 468.60 ft (see figures 9-2 and 9-3). Calculate the widths at 2,600 ft from the FHP using the formulas in paragraph 9.3.

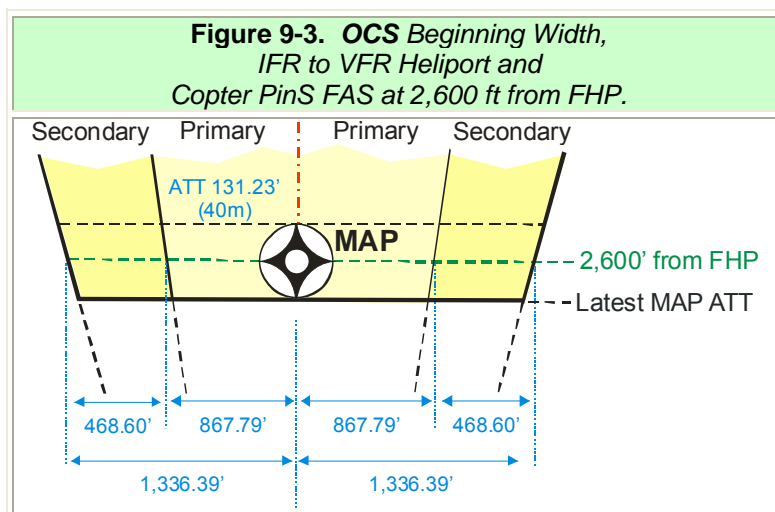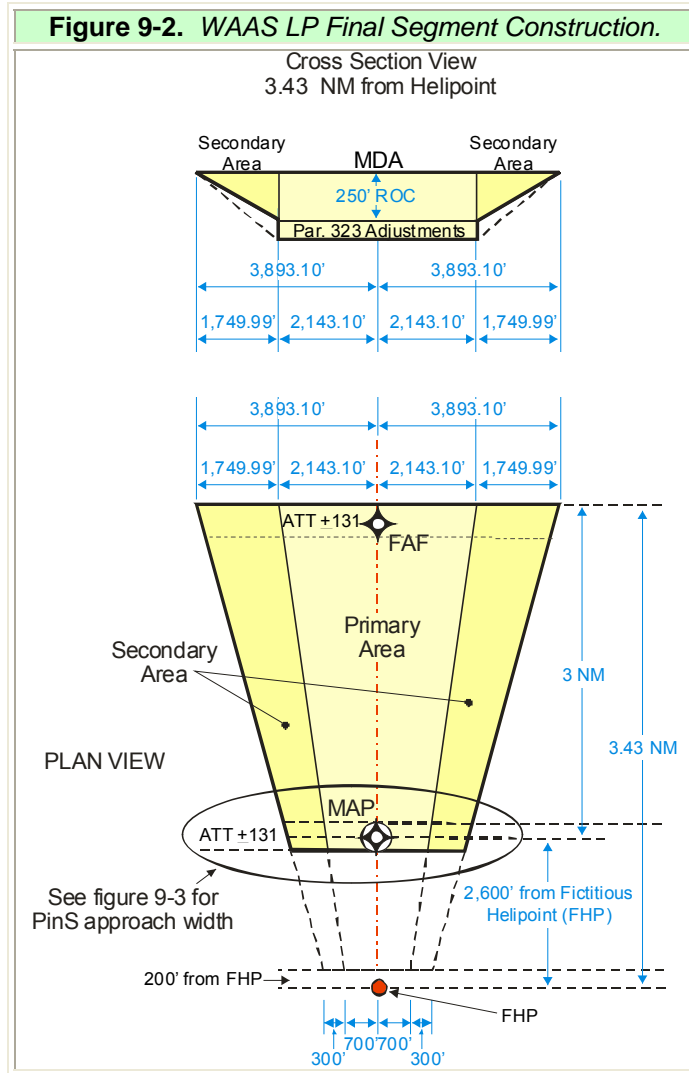

9.4.1 a. Length.

The STANDARD *IFR* segment length *FAF* to *MAP* is 3 *NM* but is also determined by descent gradient. The MINIMUM length is 2 *NM*, and the MAXIMUM length is 10 *NM*.

9.4.1 b. The primary width (D_p) is 867.79 ft either side of *FAC* at the origin, and expands uniformly to 4934.07 ft either side of the course 60,761.15 ft (10 *NM*) from the *FHP*. Calculate the perpendicular distance (ft) from *FAC* to the “W” surface boundary at any distance (d_{FHP}) using formula 9-2:

Formula 9-2. $\frac{1}{2}$ Width of Primary (D_p).		
$D_p = 1/2 \text{ Primary Area Width (ft)} = 0.0699139 (d_{FHP} - 200) + 700$ $d_{FHP} = \text{Distance from FHP, along course}$		
0.0699139*(d_{FHP} -200)+700		
Calculator		
d_{FHP}		Click here to calculate
D_p		

9.4.1 c. The perpendicular distance from *FAC* to outer secondary boundary (D_s) is 1,336.39 ft at the origin, and expands uniformly to 9,488.37 ft at 60,761.15 ft (10 *NM*) from the *FHP*. Calculate D_s using formula 9-3:

Formula 9-3. Perpendicular Distance (D_s).		
$D_s = \text{Secondary Boundary Dist. (ft)} = 0.140162 (d_{FHP} - 200) + 1000$ Where $D_s = \text{Course to Outer Secondary Distance}$ $d_{FHP} = \text{Distance from FHP, along course}$		
0.140162*(d_{FHP} - 200) + 1000		
Calculator		
d_{FHP}		Click here to calculate
D_s		

9.5 Required Obstacle Clearance (*ROC*).

Primary *ROC* is 250 ft. The *MDA* can be no lower than the controlling obstacle height adjusted for obstacle accuracy tolerance (see Order 8260.19, appendix 2) plus the *ROC* value plus adjustments rounded to the next higher 20-ft increment. Calculate secondary area *ROC* using formula 9-4.

Formula 9-4. Secondary Area ROC ($ROC_{secondary}$).		
$ROC_{secondary} = (250+adj) \cdot \left(1 - \frac{d_{primary}}{W_s}\right)$		
Where adj = TERPS para 323 adjustments $d_{primary}$ = perpendicular distance (ft) from primary area edge W_s = Secondary Area Width		
$(250+adj) \cdot (1 - d_{primary}/W_s)$		
Calculator		
adj		Click here to calculate
$d_{primary}$		
W_s		
$ROC_{secondary}$		

9.6 Final Segment Stepdown Fixes (*SDF*).

An *SDF* may be applied where the *MDA* can be lowered 60 ft, or a visibility reduction can be achieved.

9.6.1 *TERPS*, Volume 1, paragraph 289 applies, with the following exceptions:

9.6.1 a. **Establish step-down fix locations** in 0.10 *NM* increments.

9.6.1 b. **The minimum distance** between stepdown fixes is 1 *NM*.

9.6.1 c. **Establish stepdown fix altitudes** using 20-ft increments, rounded to the next HIGHER 20-ft increment. For example, 2104 becomes 2120.

9.6.1 d. **Where a Remote Altimeter Setting Source (*RASS*) adjustment is in use**, the published stepdown fix altitude must be established no lower than the altitude required for the greatest amount of adjustment (i.e., the published minimum altitude must incorporate the greatest amount of *RASS* adjustment required).

9.6.1 e. **Descent gradient:** Chapter 5 paragraphs 5.2.2a, 5.2.2b, and 5.2.2f apply.

9.6.1 f. **Obstacles eliminated from consideration** (3.5:1 area) under this paragraph must be noted in the procedure documentation.

Note: Where turns are designed at the *FAF*, the 3.5:1 *OIS* starts at *ATT* distance prior to the angle bisector, and extends 1 *NM* parallel to the *FAS* centerline (see figure 9-4).

9.6.1 g. Use *formula 5-3 in paragraph 5.2.2 concerning TERPS paragraph 289* to determine the *OIS* elevation at an obstacle and minimum fix altitude based on an obstacle height.

9.6.1 h. To mitigate surface penetrations:

- Remove obstruction, or
- Reduce obstruction height, or
- Adjust the *MDA*, or
- Combination of options.

9.7 ***FAS* Descent Angle/Gradient.**

Apply chapter 5, paragraphs 5.2.2a. and 5.2.2b.

9.8 **Turns at the *FAF*.**

MAXIMUM turn at the *FAF* is 30 degrees. When a *FAF* turn is constructed, MINIMUM *FAS* length is 3 *NM* for turns greater than 15 degrees. Where the *LP* intermediate course is not an extension of the *FAC*, use the following construction (*see figure 9-4*).


Step 1: Construct **AA'** perpendicular to the intermediate course 2 *NM* prior the *FAF*.

Step 2: Construct **BB'** perpendicular to the intermediate course extended 1 *NM* past the *FAF*.

Step 3: Construct the inside turn boundaries by connecting the points of intersection of **AA'** with the turn side intermediate segment boundaries with the intersection of **BB'** with the turn side final segment boundaries.


Step 4: Connect lines from the point of intersection of **AA'** and the outside primary and secondary intermediate segment boundaries to the final segment primary and secondary final segment lines at a point perpendicular to the final course at the *FAF*.

The final segment evaluation extends to a point *ATT* prior to the angle bisector. The intermediate segment evaluation extends *ATT* past the angle bisector. Evaluate the area within *ATT* of the angle bisector for both the final and intermediate segments.

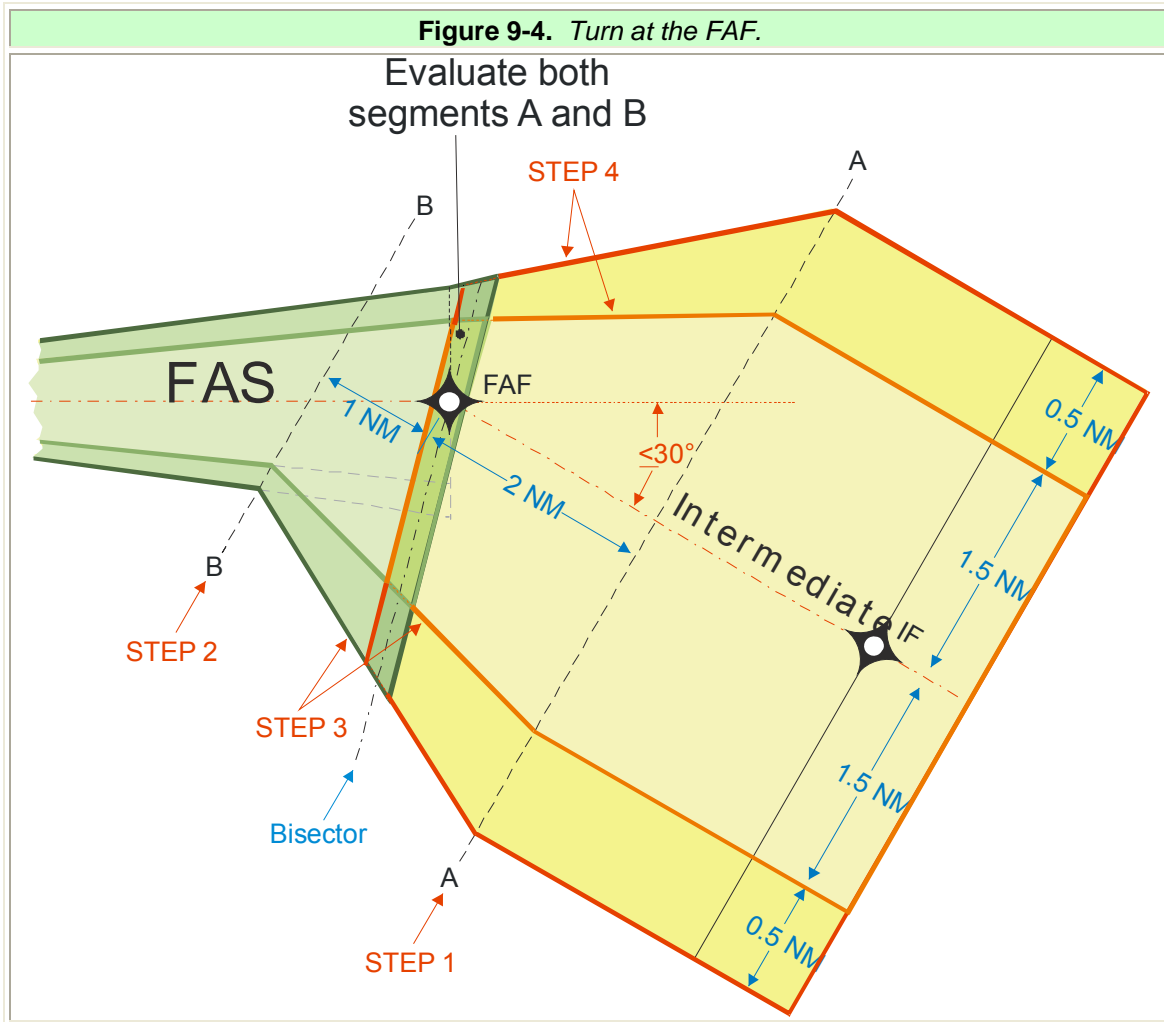

9.9 IFR Approach to a VFR Heliport (IVH) or IFR to a VFR Runway (IVR).

Apply *paragraphs 5.4 through 5.6* and the criteria in this chapter for the **IFR** final segment **OEA**. Construct the **IFR FAS** by applying *paragraph 9.2*. The **OIS** width is like the **IFR** final segment primary area width at the latest point the **MAP** can be received (± 867.79 ft) then narrows to the **VSRL** width (*see figure 9-5*).

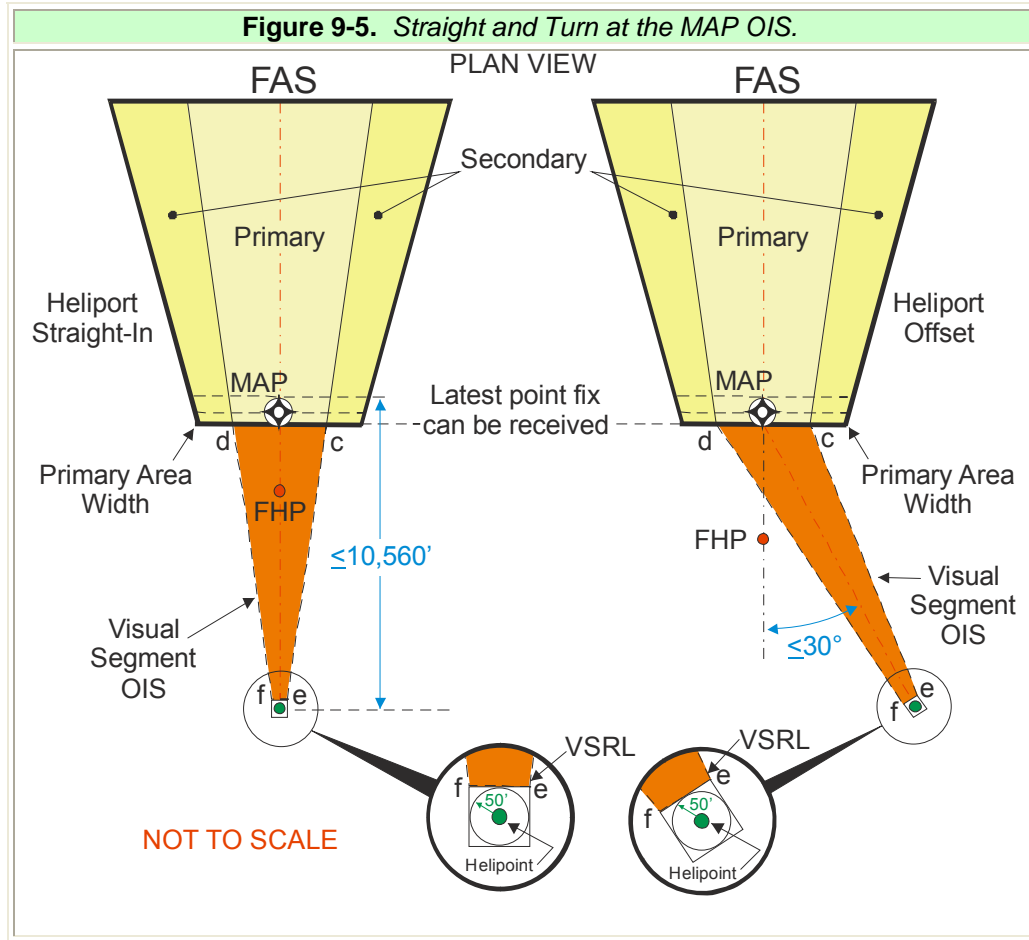

9.10 PinS Approach.

Apply *paragraph 5.5* and the criteria in this chapter for the **IFR** final segment **OEA**. Apply paragraphs in this chapter to determine a preliminary **MDA** based on the **FAS** and *paragraph 5.5* for the **VFR** segment analysis. The final **MDA** may require adjustment based on the **VFR** segment for a public procedure.

9.11 Missed Approach.

Construct the missed approach using *chapter 6* criteria.

THIS PAGE INTENTIONALLY LEFT BLANK

Appendix 1. Conditions and Assumptions For Special Copter GPS Airways

The following conditions must be inserted on *FAA Form 8260-10* for providing guidance and criteria for helicopter special *Global Positioning System (GPS)* en route criteria.

- 1. The maximum** route length is 65 *nautical miles (NM)*.
- 2. Route operation** requires setting the Course Deviation Indicator (*CDI*) scaling to ± 1.0 *NM* full-scale deflection to reduce *flight technical error (FTE)*.
- 3. Any navigational aids (NAVAIDs)**, that are determined by Air Traffic to be mandatory for transition to the conventional navigation system, must be identified and verified operational prior to dispatch.
- 4. Predicted receiver autonomous integrity monitoring (RAIM)** is checked with the Flight Service Station and found satisfactory prior to dispatch.
- 5. The Principle Operations, Maintenance, and Avionics Inspectors (POI, PMI, and PAI)** must ensure the helicopter avionics navigation and communications suites are appropriate for the proposed routes. These suites must be installed and operated in accordance with HBAT 95-02, *Guidance for Using GPS Equipment for IFR En Route and Terminal Operations and for Nonprecision Instrument Approaches*, and AC 20-138, *Airworthiness Approval of Global Positioning System (GPS) Navigation Equipment for Use as a VFR and IFR Supplemental Navigation System*.
- 6. The Operator's Training Program** and General Operations Manual must be revised, as necessary, to provide pilots and other personnel with guidance for use of these routes, including, but not limited to, operational policies, procedures and practices, limitations, and flight crew responsibilities and qualification standards.
- 7. A letter of agreement between the operator** and the appropriate air traffic control facility or facilities must be established. It must contain, but is not limited to provisions for:
 - a. Flight plan generation**, activation, and delivery procedures.
 - b. Air Traffic and operator/pilot responsibilities** when radar contact has been established with helicopters on these routes.
 - c. Air Traffic and operator/pilot responsibilities** when radar contact has not been established, or has been lost with helicopters operating on these routes.
 - d. Primary and back-up communication procedures.**
 - e. Lost communications procedures.**
 - f. Detailed procedures for transition** to the conventional en route structure if *GPS* navigation capability is lost.

THIS PAGE INTENTIONALLY LEFT BLANK

Appendix 2. TERPS Standard Formulas for Geodetic Calculations

1.0 Purpose.

The ellipsoidal formulas contained in this document must be used in determining **RNAV** flight path (**GPS, RNP, WAAS, LAAS**) fixes, courses, and distance between fixes.

Notes:

Algorithms and methods are described for calculating geodetic locations (latitudes and longitudes) on the World Geodetic System of 1984 (**WGS-84**) ellipsoid, resulting from intersections of geodesic and non-geodesic paths. These algorithms utilize existing distance and azimuth calculation methods to compute intersections and tangent points needed for area navigation procedure construction. The methods apply corrections to an initial spherical approximation until the error is less than the maximum allowable error, as specified by the user.

Several constants are required for ellipsoidal calculations. First, the ellipsoidal parameters must be specified. For the **WGS-84** ellipsoid, these are:

$$\begin{aligned} a &= \text{semi-major axis} = 6,378,137.0 \text{ m} \\ b &= \text{semi-minor axis} = 6,356,752.314245 \text{ m} \\ 1/f &= \text{inverse flattening} = 298.257223563 \end{aligned}$$

Note that the semi-major axis is derived from the semi-minor axis and flattening parameters using the relation $b = a(1 - f)$.

Second, an earth radius is needed for spherical approximations. The appropriate radius is the geometric mean of the **WGS-84** semi-major and semi-minor axes. This gives

$$\text{SPHERE_RADIUS (r)} = \sqrt{ab} = 6,367,435.679716 \text{ m .}$$

Perform calculations with at least 15 significant digits.

For the purpose of determining geodetic positions, perform sufficient iterations to converge within 1 cm in distance and 0.002 arc seconds in bearing.

2.0 Introduction.


The algorithms needed to calculate geodetic positions on the earth for the purpose of constructing and analyzing Terminal Instrument Procedures (*TERPS*) require the following geodetic calculations, some of which are illustrated in *figure A2-1*:

- 1: Find the destination latitude and longitude, given starting latitude and longitude as well as distance and starting azimuth (often referred to as the “direct” or “forward” calculation).
- 2: Compute the geodesic arc length between two points, along with the azimuth of the geodesic at either point (often referred to as the “inverse” calculation).
- 3: Given a point on a geodesic, find a second geodesic that is perpendicular to the given geodesic at that point.
- 4: Given two geodesics, find their intersection point. (Labeled “4”)
- 5: Given two constant-radius arcs, find their intersection point(s). (Labeled “5”)
- 6: Given a geodesic and a separate point, find the point on the geodesic nearest the given point. (Labeled “6”)
- 7: Given a geodesic and an arc, find their intersection point(s). (Labeled “7”)
- 8: Given two geodesics and a radius value, find the arc of the given radius that is tangent to both geodesics and the points where tangency occurs. (Labeled “8”)
- 9: Given an arc and a point, determine the geodesic(s) tangent to the arc through the point and the point(s) where tangency occurs. (Labeled “9”)
- 10: Given an arc and a geodesic, determine the geodesic(s) that are tangent to the arc and perpendicular to the given geodesic and the point(s) where tangency occurs. (Labeled “10”)
- 11: Compute the length of an arc.
- 12: Determine whether a given point lies on a particular geodesic.
- 13: Determine whether a given point lies on a particular arc.

The following algorithms have been identified as required for analysis of *TERPS* procedures that use locus of points curves:

- 14: Given a geodesic and a locus, find their intersection point.
- 15: Given a fixed-radius arc and a locus, find their intersection point(s). (Labeled “15”)
- 16: Given two loci, find their intersection.
- 17: Given two loci and a radius, find the center of the arc tangent to both loci and the points of tangency. (Labeled “17”)

The algorithm prototypes and parameter descriptions are given below using a C-like syntax. However, the algorithm steps are described in pseudo-code to maintain clarity and readability.

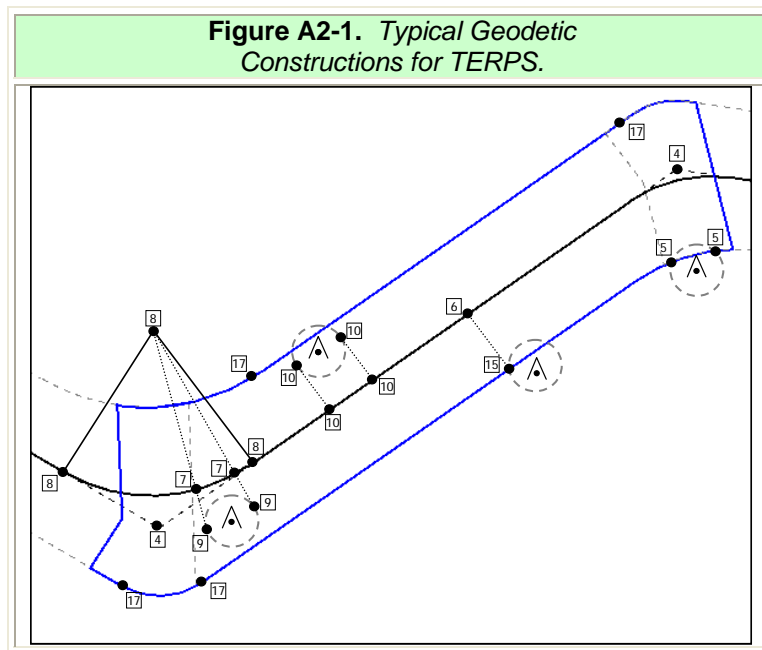

Numbers refer to the algorithm in the list above that would be used to solve for the point.

2.1 Data Structures.

2.1.1 Geodetic Locations.

For convenience, one structure is used for both components of a geodetic coordinate. This is referred to as an `LLPoint`, which is declared as follows using C syntax:

```
typedef struct {
    latitude;
    longitude;
} LLPoint;
```

2.1.2 Geodesic Curves.

A geodesic curve is the minimal-length curve connecting two geodetic locations. Since the planar geodesic is a straight line, we will often informally refer to a geodesic as a “line.” Geodesics will be represented in data using two LLPoint structures.

2.1.3 Fixed Radius Arc.

A geodetic arc can be defined by a center point and radius distance. The circular arc is then the set (or locus) of points whose distance from the center point is equal to the radius. If an arc subtends an angle of less than 360 degrees, then its start azimuth, end azimuth, and orientation must be specified. The orientation is represented using a value of ± 1 , with +1 representing a counterclockwise arc and -1 representing a clockwise arc. The distance between the start and end points must be checked. If it is less than a predetermined tolerance value, then the arc will be treated like a complete circle.

2.1.4 Locus of Points Relative to a Geodesic.

A locus of points relative to a geodesic is the set of all points such that the perpendicular distance from the geodesic is defined by a continuous function $w(P)$ which maps each point P on the geodesic to a real number. For the purposes of procedure design, $w(P)$ will be either a constant value or a linear function of the distance from P to geodesic start point. In the algorithms that follow, a locus of points is represented using the following C structure:


```
typedef struct {
    LLPoint geoStart; /* start point of geodesic */
    LLPoint geoEnd; /* end point of geodesic */
    LLPoint locusStart; /* start point of locus */
    LLPoint locusEnd; /* end point of locus */
    double startDist; /* distance from geodesic
                       * to locus at geoStart */
    double endDist; /* distance from geodesic
                    * to locus at geoEnd */
    int lineType; /* 0, 1 or 2 */
} Locus;
```

The startDist and endDist parameters define where the locus lies in relation to the defining geodesic. If endDist=startDist, then the locus will be described as being “parallel” to the geodesic, while if endDist≠startDist, then the locus is “splayed.” Furthermore, the sign of the distance parameter determines which side of the geodesic the locus is on. The algorithms described in this paper assume the following convention: if the distance to the locus is positive, then the locus lies to the

right of the geodesic; if the distance is negative, then the locus lies to the left. These directions are relative to the direction of the geodesic as viewed from the `geoStart` point. See *figure A2-2* for an illustration.

If memory storage is limited, then either the `startDist/endDist` or `locusStart/locusEnd` elements may be omitted from the structure, since one may be calculated from the other. However, calculating them once upon initialization and then storing them will reduce computation time.

The `lineType` attribute is used to specify the locus's extent. If it is set to 0 (zero), then the locus exists only between `geoStart` and `geoEnd`. If `lineType=1`, then the locus begins at `geoStart` but extends beyond `geoEnd`. If `lineType=2`, then the locus extends beyond both `geoStart` and `geoEnd`.

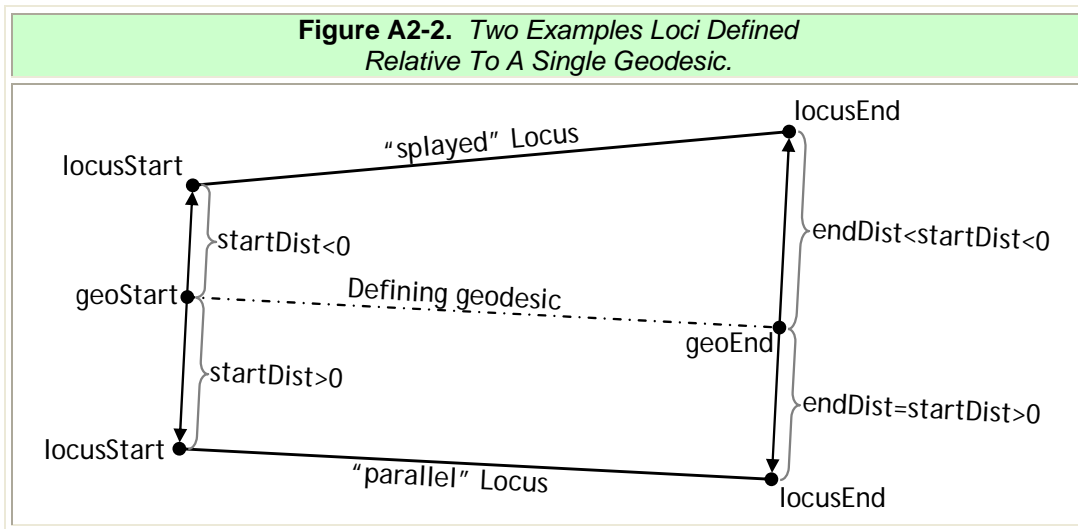

3.0 Basic Calculations.

3.1 Iterative Approach.

For most of the intersection and projection methods listed below, an initial approximation is iteratively improved until the calculated error is less than the required accuracy. The iterative schemes employ a basic secant method, relying upon a linear approximation of the error as a function of one adjustable parameter.

To begin the iteration, two starting solutions are found and used to initialize a pair of two-element arrays. The first array stores the two most recent values of the parameter being adjusted in the solution search. This array is named `distarray` when the search parameter is the distance from a known point. It is named `crsarray` when the search parameter is an angle measured against the azimuth of a known geodesic. The second array (named `errarray` in the algorithms below) stores the error values corresponding to the two most recent parameter values. Thus, these arrays store a linear representation of the error function. The next solution in each iteration is found by solving for the root of that linear function using the `findLinearRoot` function:

```
void findLinearRoot(double x[2], double y[2],
                  double* root) {
    if (x[0] == x[1]) {
        /* function has duplicate x values, no root */
        /* NOTE: NAN is a macro defined in math.h. It
         is required for any IEEE-compliant C
         environment */
        root = NAN;
    } else if (y[0] == y[1]) {
        if (y[0]*y[1] == 0.0) {
            *root = x[0];
        } else {
            /* function is non-zero constant, no root */
            root = NAN;
        }
    } else {
        *root = -y[0]*(x[1]-x[0])/(y[1]-y[0]) + x[0]
    }
}
```

This function returns the value of the search parameter for which the linear error approximation is zero. The returned root is used as the next value in the adjustable parameter and the corresponding error value is calculated. Then the parameter and error arrays are updated and another new root is found.


This iteration scheme works well for the algorithms described in this paper. Convergence is achieved very quickly because each starting solution is very close to the final solution, where the error is well approximated by a linear function.

3.2 Starting Solutions.

Starting solutions must be provided to start iterating toward a precise solution. Initial solutions may be found in all cases by using spherical triangles to approximate the geodetic curves being analyzed, and then solve for unknown distance and azimuth values using spherical trigonometry formulas.

3.2.1 Spherical Direction Intersect.

Given two points A and B and two bearings A to C and B to C, find C.

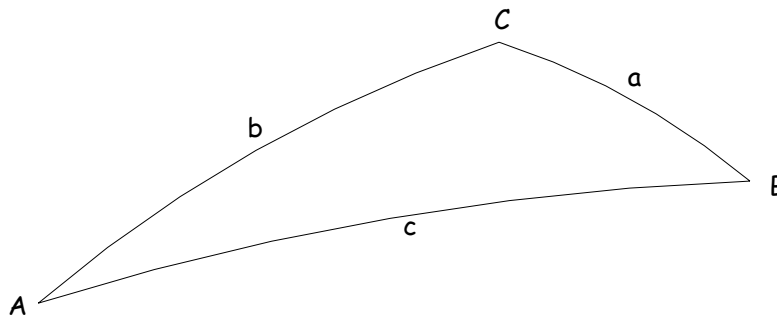

Run *Inverse* to find arc length from A to B and bearings A to B and B to A.

Compute differences of bearings to find angles A and B of the spherical triangle ABC.

More than one valid solution may result. Choose the solution closest to the original points.

Apply the spherical triangle formulas to find the angle C and arc lengths from A to C and from B to C:


$$C = \cos^{-1} \left(-\cos(A) \cdot \cos(B) + \sin(A) \cdot \sin(B) \cos \left(\frac{c}{R} \right) \right),$$

$$a = R \cdot \cos^{-1} \left(\frac{\cos(A) + \cos(B) \cdot \cos(C)}{\sin(B) \cdot \sin(C)} \right), \quad b = R \cdot \cos^{-1} \left(\frac{\cos(B) + \cos(A) \cdot \cos(C)}{\sin(A) \cdot \sin(C)} \right).$$

Note: If distances *a* or *b* result from a reciprocal bearing, assign appropriate negative sign(s).

Run *Direct* from A to find C. Use given bearing and computed length b.

3.2.2 Spherical Distance Intersection.

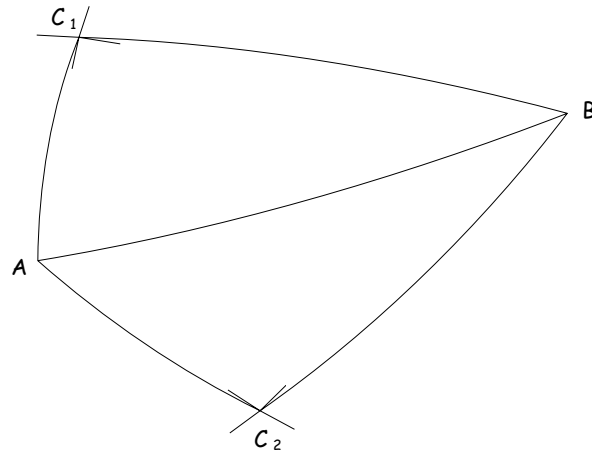

Given A, B and distances AC and BC, find C_1 and C_2 .

Run *Inverse* to find length and bearings between A and B.

Use spherical triangles to find angles $A = \angle BAC_1 = \angle BAC_2$, $B = \angle ABC_1 = \angle ABC_2$, and $C = \angle BC_1A = \angle BC_2A$:

$$A = \cos^{-1} \left(\frac{\cos\left(\frac{a}{R}\right) - \cos\left(\frac{b}{R}\right)\cos\left(\frac{c}{R}\right)}{\sin\left(\frac{b}{R}\right)\sin\left(\frac{c}{R}\right)} \right), \quad B = \cos^{-1} \left(\frac{\cos\left(\frac{b}{R}\right) - \cos\left(\frac{a}{R}\right)\cos\left(\frac{c}{R}\right)}{\sin\left(\frac{a}{R}\right)\sin\left(\frac{c}{R}\right)} \right),$$

$$\text{and } C = \cos^{-1} \left(\frac{\cos\left(\frac{c}{R}\right) - \cos\left(\frac{a}{R}\right)\cos\left(\frac{b}{R}\right)}{\sin\left(\frac{a}{R}\right)\sin\left(\frac{b}{R}\right)} \right).$$

Run *Direct* from A to find C_1 and C_2 .


To compute the bearing from A to C_1 , start with the bearing from A to B and subtract angle A.

To compute the bearing from A to C_2 , start with the bearing from A to B and add angle A.

Use *Inverse* and spherical triangle formulas to get remaining bearings.


3.2.3 Spherical Tangent Point.

In both cases of the tangent point, distances are signed according to the following sign legend:

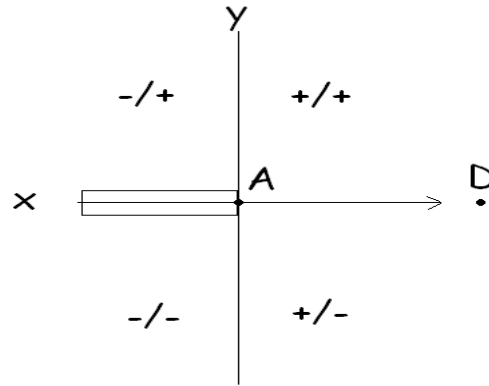

Where the arrow indicates the bearing from the first point A to the target point D.

3.2.4 Two Points and a Bearing Case.

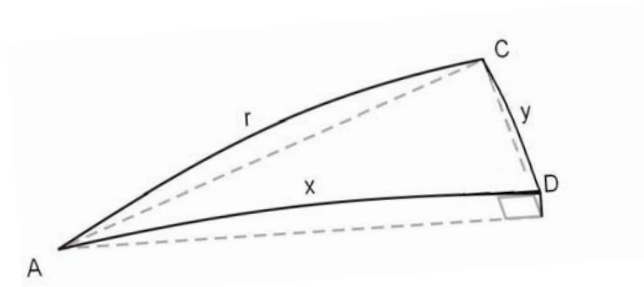

Given two points, A and C, and a bearing from the first point (A). Find the point D along the given bearing extended which is closest to C.

Run *Inverse* to find length and bearings between A and C.

Find difference in bearings to compute angle A.


Use right spherical triangles to calculate y and x:

$$y = R \sin^{-1} \left(\sin\left(\frac{r}{R}\right) \sin(A) \right),$$

$$x = R \cos^{-1} \left(\cos\left(\frac{r}{R}\right) / \cos\left(\frac{y}{R}\right) \right).$$

Run *Direct* from A to find D using given bearing and computed length x.

3.2.5 Given Three Points Case.

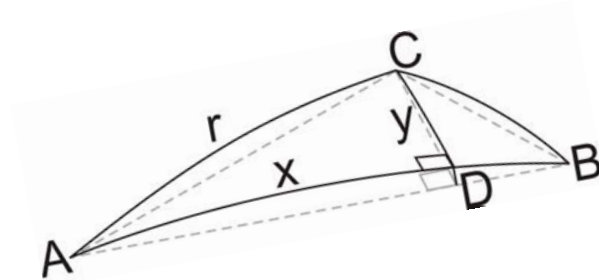

Given three points (A, B, C), find the point (D) on the geodesic line from the first two points which is the perpendicular foot from the third point.

Use *Inverse* to determine bearing from A to B.

Use *Inverse* to determine bearing and length from A to C.

Find the difference in bearings to determine angle A.

Use right spherical triangles to find the lengths x and y:

$$y = R \sin^{-1} \left(\sin\left(\frac{r}{R}\right) \sin(A) \right),$$

$$x = R \cos^{-1} \left(\cos\left(\frac{r}{R}\right) / \cos\left(\frac{y}{R}\right) \right).$$

Use *Direct* to calculate D from A using the computed bearing from A to B and computed distance x.

3.3 Tolerances.

Two different convergence tolerances must be supplied so that the algorithms cease iterating once the error becomes sufficiently small. The first tolerance parameter is used in the forward and inverse routines; it is referred to as `eps` in the algorithm descriptions. The second parameter, labeled `tol`, is used in the intersection and projection routines to limit the overall error in the solution. Since the intersection and projection routines make multiple calls to the inverse and forward algorithms, the `eps` parameter should be several orders of magnitude smaller than the `tol` parameter to ensure that the iteration methods return correct results. Empirical studies have shown that `eps = 0.5e-13` and `tol = 1.0e-9` work well.

Finally, a maximum iteration count and convergence tolerances must be supplied to ensure that no algorithms can remain in an infinite loop if convergence is not reached. This parameter can be set by the programmer, but should be greater than five to ensure that all of the algorithms can reach convergence.

3.4 Direct and Inverse Algorithms.

The Direct and Inverse cases utilize formulae from T. Vincenty's, *Survey Review XXIII, No. 176, April 1975: Direct and Inverse Solutions of Geodesics on the Ellipsoid with Application of Nested Equations.*

Vincenty's notation is annotated below:

a, b , major and minor semi axes of the ellipsoid.

f , flattening = $\frac{a-b}{a}$.

ϕ , geodetic latitude, positive north of the equator.

L , difference in longitude, positive east.

s , length of the geodesic.

α_1, α_2 , bearings of the geodesic, clockwise from north; α_2 in the direction P_1P_2 produced.

α , bearing of the geodesic at the equator.

$u^2 = \frac{a^2 - b^2}{b^2} \cos^2 \alpha$.

U , reduced latitude, defined by $\tan U = (1 - f) \tan \phi$.

λ , difference in longitude on the auxiliary sphere.

σ , angular distance P_1P_2 , on the sphere.

σ_1 , angular distance on the sphere from the equator to P_1 .

σ_m , angular distance on the sphere from the equator to the midpoint of the line.

3.4.1 Vincenty's Direct Formula.

$$\tan \sigma_1 = \frac{\tan U_1}{\cos \alpha_1} \quad (1)$$

$$\sin \alpha = \cos U_1 \sin \alpha_1. \quad (2)$$

$$A = 1 + \frac{u^2}{16384} \left\{ 4096 + u^2 \left[-768 + u^2 (320 - 175u^2) \right] \right\} \quad (3)$$

$$B = \frac{u^2}{1024} \left\{ 256 + u^2 \left[-128 + u^2 (74 - 47u^2) \right] \right\} \quad (4)$$

$$2\sigma_m = 2\sigma_1 + \sigma \quad (5)$$

$$\Delta\sigma = B \sin \sigma \left\{ \cos(2\sigma_m) + \frac{1}{4} B \left[\cos(\sigma) (2 \cos^2(2\sigma_m) - 1) - \frac{1}{6} B \cos(2\sigma_m) (4 \sin^2 \sigma - 3) (4 \cos^2(2\sigma_m) - 3) \right] \right\} \quad (6)$$

$$\sigma = \frac{s}{bA} + \Delta\sigma \quad (7)$$

Equations (5), (6), and (7) are iterated until there is a negligible change in σ . The first approximation of σ is the first term of (7).

Note 1: For 1 cm accuracy, σ can change no more than $1.57e-009$.

$$\tan \phi_2 = \frac{\sin U_1 \cos \sigma + \cos U_1 \sin \sigma \cos \alpha_1}{(1-f) \left[\sin^2 \alpha + (\sin U_1 \sin \sigma - \cos U_1 \cos \sigma \cos \alpha_1)^2 \right]^{\frac{1}{2}}} \quad (8)$$

$$\tan \lambda = \frac{\sin \sigma \sin \alpha_1}{\cos U_1 \cos \sigma - \sin U_1 \sin \sigma \cos \alpha_1} \quad (9)$$

$$C = \frac{f}{16} \cos^2 \alpha \left[4 + f (4 - 3 \cos^2 \alpha) \right] \quad (10)$$

$$L = \lambda - (1-C) f \sin \alpha \left\{ \sigma + C \sin \sigma \left[\cos(2\sigma_m) + C \cos \sigma (2 \cos^2(2\sigma_m) - 1) \right] \right\} \quad (11)$$

$$\tan \alpha_2 = \frac{\sin \alpha}{-\sin U_1 \sin \sigma + \cos U_1 \cos \sigma \cos \alpha_1} \quad (12)$$

The latitude is found by computing the arctangent of (8) and α_2 is found by computing the arctangent of (12).

3.4.2 Vincenty's Inverse Formula.

$$\lambda = L \text{ (first approximation)} \quad (13)$$

$$\sin^2 \sigma = (\cos U_2 \sin \lambda)^2 + (\cos U_1 \sin U_2 - \sin U_1 \cos U_2 \cos \lambda)^2 \quad (14)$$

$$\cos \sigma = \sin U_1 \sin U_2 + \cos U_1 \cos U_2 \cos \lambda \quad (15)$$

$$\tan \sigma = \frac{\sin \sigma}{\cos \sigma} \quad (16)$$

$$\sin \alpha = \frac{\cos U_1 \cos U_2 \sin \lambda}{\sin \sigma} \quad (17)$$

$$\cos(2\sigma_m) = \cos \sigma - \frac{2 \sin U_1 \sin U_2}{\cos^2 \alpha} \quad (18)$$

λ is obtained by equations (10) and (11). This procedure is iterated starting with equation (14) until the change in λ is negligible. *See Note 1.*

$$s = bA(\sigma - \Delta\sigma) \quad (19)$$

Where $\Delta\sigma$ comes from equations (3), (4), and (6)

$$\tan \alpha_1 = \frac{\cos U_2 \sin \lambda}{\cos U_1 \sin U_2 - \sin U_1 \cos U_2 \cos \lambda} \quad (20)$$

$$\tan \alpha_2 = \frac{\cos U_1 \sin \lambda}{\cos U_1 \sin U_2 \cos \lambda - \sin U_1 \cos U_2} \quad (21)$$

The inverse formula may give no solution over a line between two nearly antipodal points. This will occur when λ , as computed by (11), is greater than π in absolute value. To find α_1, α_2 , compute the arctangents of (20) and (21).

3.5 Geodesic Oriented at Specified Angle.

In *TERPS* procedure design, it is often required to find a geodesic that lies at a prescribed angle to another geodesic. For instance, the end lines of an obstacle evaluation area (*OEA*) are typically projected from the flight path at a prescribed angle. Since the azimuth of a geodesic varies over the length of the curve, the angle between two geodesics must be measured by comparing the azimuth of each geodesic at the point where they intersect. Keeping that in mind, the following pseudo code represents an algorithm that will calculate the correct azimuth at the intersection. The desired geodesic is then defined by the azimuth returned and the given intersection point.

3.5.1 Input/Output.

double azimuthAtAngle(LLPoint **startPt**, LLPoint **intxPt**,
double **angle**, double **eps**)
returns a double representing the azimuth of the intersecting geodesic, where the
inputs are:

LLPoint startPt	=	Coordinates of start point of given geodesic
LLPoint intxPt	=	Coordinates of intersection of given and desired geodesics
double angle	=	Angle between given geodesic and desired geodesic at intersection point ($\pm\pi/2$ for perpendicular lines)
double eps	=	Convergence parameter for forward/inverse algorithms

3.5.2 Algorithm Steps.

See *figure A2-3* for an illustration of quantities.


STEP 1: Use the *inverse algorithm* to calculate the azimuth required to follow the given geodesic from **intxPt** to **startPt**. Use **intxPt** as the starting point and **startPt** as the destination point. Denote the computed azimuth by **intxAz**.

STEP 2: Convert the **intxAz** to its reciprocal: $\text{intxAz} = \text{intxAx} + \pi$.

STEP 3: Add the desired change in azimuth to get the azimuth of the new geodesic:
 $\text{newAzimuth} = \text{intxAz} + \text{angle}$.

STEP 4: Return the calculated azimuth.

Note that if **angle** is positive, then the new geodesic will lie to the right of the given geodesic (from the perspective of standing at the start point and facing toward the end point); otherwise, the new geodesic will lie to the left.

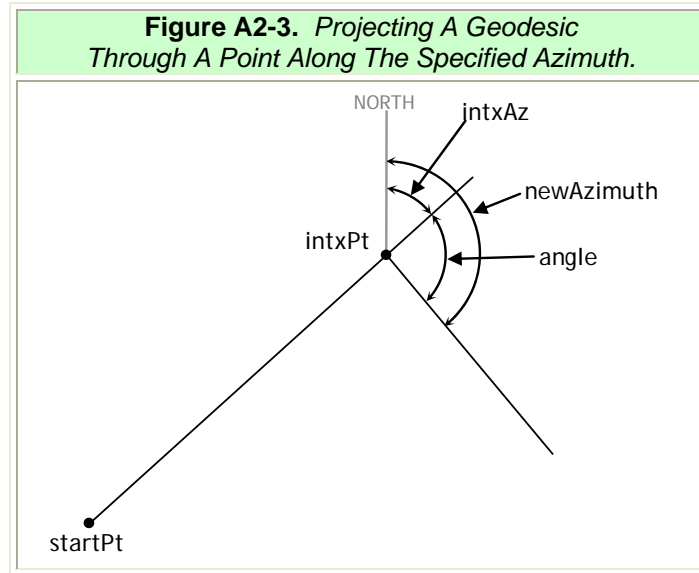

3.6 Determine If Point Lies on Geodesic.

This algorithm returns a non-zero (true) value if a point lies on and within the bounds of a given geodesic. The bounds of the geodesic are specified by two pieces of information: the end point coordinates and an integer length code. If the length code is set to 0, then the geodesic is understood to exist only between its start and end points, so a value of true will be returned only if the test point also lies between the start and end points. If the length code is set to 1, then the geodesic is understood to extend beyond its end point to a distance of one half of earth's circumference from its end point. If the length code is set to 2, then the geodesic is understood to extend clear around the globe.

3.6.1 Input/Output.

`int WGS84PtIsOnGeodesic(LLPoint startPt, LLPoint endPt, LLPoint testPt, int lengthCode, double tol)` returns an integer value indicating whether `testPt` lies on geodesic, where the inputs are:

<code>LLPoint startPt</code>	=	Geodetic coordinate of line start point
<code>LLPoint endPt</code>	=	Geodetic coordinate of line end point
<code>LLPoint testPt</code>	=	Geodetic coordinate of point to test
<code>int lengthCode</code>	=	Integer that specifies extent of line. 0: geodesic exists only between <code>startPt</code> and <code>endPt</code> . 1: geodesic extends beyond <code>endPt</code> .

double tol = Maximum difference allowed in distance
 double eps = Convergence parameter for forward/inverse algorithms

3.6.2 Algorithm Steps.

See *figure A2-4* for an illustration of the variables.

STEP 1: Use *inverse algorithm* to calculate the distance from `startPt` to `testPt`. Denote this value by `dist13`.

STEP 2: Use *inverse algorithm* to calculate the azimuth and distance from `startPt` to `endPt`. Denote these values by `crs12` and `dist12`, respectively.


STEP 3: Use *direct algorithm* to project a point from `startPt`, along `crs12`, a distance equal to `dist13`. Denote this point by `testPt2`.

STEP 4: Use *inverse algorithm* `WGS84InvDist` to calculate distance from `testPt` to `testPt2`. This distance is the error.

STEP 5: Examine error to determine whether `testPt` lies on the geodesic within `tol` as follows:

- a. If (`error ≤ tol`) then
 - i. If (`lengthCode > 0`) or (`dist13-dist12 ≤ tol`) then
 1. `onLine = true`
 - ii. else
 1. `onLine = false`
 - iii. end if
- b. Else if (`lengthCode = 2`)
 - i. Use the *direct algorithm* to project point from `startPt`, along `crs12+π` a distance `dist13`. Again, denote this point again by `testPt2`.
 - ii. Use the *inverse algorithm* to recalculate error, which is the distance from `testPt` to `testPt2`.

- iii. If $(\text{error} \leq \text{tol})$ then $\text{onLine} = \text{true}$.
 - iv. Else $\text{onLine} = \text{false}$.
 - v. End if.
- c. Else.
- i. $\text{onLine} = \text{false}$.
- d. End if.

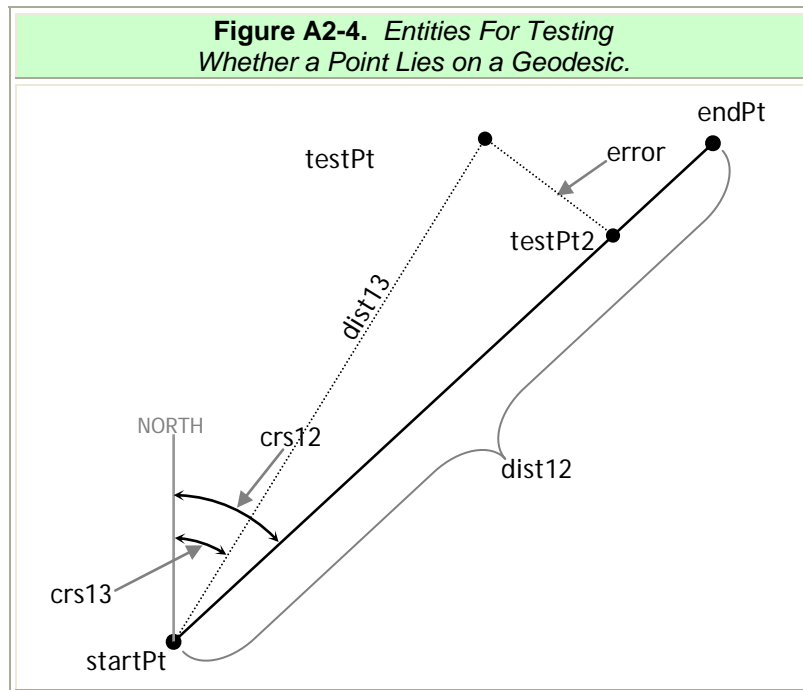

3.7 Determine If Point Lies on Arc.

This algorithm returns a non-zero (true) value if the sample point lies on and between the bounds of the given arc. The arc is defined by its center point, radius, start azimuth, end azimuth, and orientation. A positive orientation parameter indicates that the arc is traversed in a counterclockwise sense, while a negative orientation parameter indicates that the arc is traversed clockwise. This algorithm is used in conjunction with the arc intersection functions (*Algorithms 4.2, 4.3, and 4.6*) to determine whether the computed intersections lie within the bounds of the desired arc.

3.7.1 Input/Output.

`int WGS84PtIsOnArc(LLPoint center, double radius, double startCrs, double endCrs, int orient, LLPoint testPt, double tol)` returns an integer value indicating whether `testPt` lies on arc, where the inputs are:

<code>LLPoint center</code>	=	Geodetic coordinates of arc center
<code>double radius</code>	=	Arc radius
<code>double startCrs</code>	=	True azimuth from center to start of arc
<code>double endCrs</code>	=	True azimuth from center to end of arc
<code>int orient</code>	=	Orientation of the arc [+1 for counter-clockwise; -1 for clockwise]
<code>LLPoint testPt</code>	=	Geodetic coordinate of point to test
<code>double tol</code>	=	Maximum error allowed in solution
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithms

3.7.2 Algorithm Steps.

See *figure A2-5* for an illustration of the variables.

STEP 1: Use *inverse algorithm* to calculate distance and azimuth from center to `testPt`. Denote values as `dist` and `crs`, respectively.


STEP 2: If $(\text{abs}(\text{dist} - \text{radius}) > \text{tol})$ then `testPt` is not correct distance from center.

a. `onArc = false`.

STEP 3: else.

- a. Use *Algorithm Attachment A.1* to calculate the angle subtended by the full arc. Denote this value by `arcExtent`.
- b. If (`arcExtent = 360°`) then
 - i. `onArc = true`.
- c. else.
 - i. Use the *inverse algorithm* to calculate the azimuth from center to `testPt`. Denote this value by `testCrS`.
 - ii. Use *Algorithm Attachment A.1* to calculate the angle subtended by and arc starting at `startCrS`, but ending at `testCrS`, with the same orientation. Denote this value by `subExtent`.
 - iii. If (`subExtent ≤ arcExtent`) then traversing arc from `startCrS` to `endCrS`, one would encounter `testPt`, so it must lie on arc.
 1. `onArc = true`.
- d. end if.

STEP 4: end if.

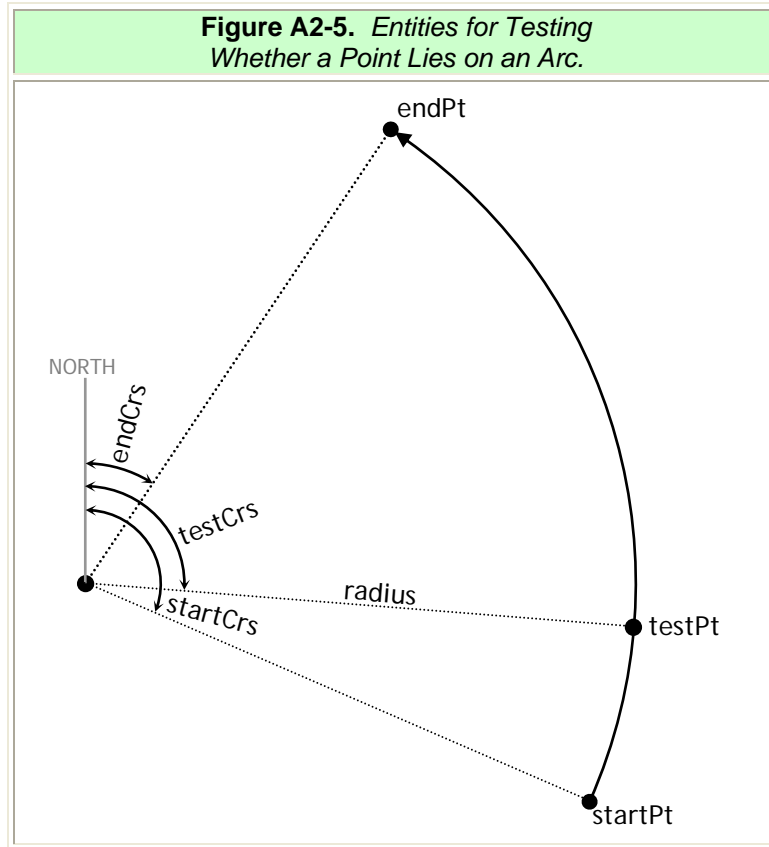

3.8 Calculate Length of Fixed Radius Arc.

A fixed radius arc on an ellipsoid does not generally lie in a plane. Therefore, the length of the arc cannot be computed using the usual formula for the circumference of a circle. The following algorithm takes the approach of dividing the arc into many sub-arcs. Three points are then calculated on each sub-arc. Since any three points in space uniquely determine both a plane and an arc, the three points on each sub-arc are used to calculate the radius and subtended angle of the planar arc that contains all three points. The length of the approximating planar arc is then calculated for each sub-arc. The sum of the sub-arc lengths approaches the length of the original arc as the number of sub-arc increases (and each sub-arc's length decreases).

A simpler method that is sufficiently accurate for arcs with radius less than about 300 nautical miles (*NM*) is described in *section 6.4*.

3.8.1 Input/Output.

```
double WGS84DiscretizedArcLength (LLPoint center, double
radius, double startCrs, double endCrs, int orient, int
*n, double tol)
```

returns a double precision value representing the length of the arc, where the inputs are:

LLPoint center	=	Geodetic coordinates of arc center
double radius	=	Arc radius
double startCrs	=	True azimuth from center to start of arc
double endCrs	=	True azimuth from center to end of arc
int orient	=	Orientation of the arc [+1 for counter-clockwise; -1 for clockwise]
int *n	=	Reference to integer used to return number of steps in discretized arc
double tol	=	Maximum allowed error
double eps	=	Convergence parameter for forward/inverse algorithms

3.8.2 Algorithm Steps.

See *figure A2-6* for an illustration of the variables.

STEP 1: Set initial number of sub-arcs to use. The fixed value $n = 16$ has been found through trial-and-error to be a good starting value. Alternatively, the initial value of n may be calculated based on the arc's subtended angle and its radius (i.e., its approximate arc length).

STEP 2: Convert center point to Earth-Centered, Earth-Fixed (**ECEF**) coordinates, v_0 , according to *Algorithm 6.1*.

STEP 3: Compute subtended angle, $subtAngle$, using *Algorithm Attachment A.1*.

STEP 4: Set iteration count, $k = 0$.

STEP 5: Do while $k = 0$ or $((error > tol) \text{ and } (k \leq maximumIterationCount))$.

- a. Calculate subtended angle of each sub-arc, $\theta = \text{subtAngle}/n$.
- b. Use *direct algorithm* from center, using startCrs and distance radius, to project start point of arc. Denote this point by p1.
- c. Convert p1 to **ECEF** coordinates. Denote this vector by v1.
- d. Initialize arcLength = 0.
- e. For $i = 0$ to n .
 - i. Compute azimuth from arc center to end point of sub-arc number i :
 $\theta = \text{startCrs} + i * d\theta$.
 - ii. Use *direct algorithm* from center, using azimuth $\theta + 0.5 * d\theta$ and distance radius, to project middle point of sub-arc. Denote this point by p2.
 - iii. Convert p2 to **ECEF** coordinate v2.
 - iv. Use *direct algorithm* from center, using azimuth $\theta + d\theta$ and distance radius, to project endpoint of sub-arc. Denote this point by p2.
 - v. Convert p2 to **ECEF** coordinate v2.
 - vi. Subtract v2 from v1 to find chord vector between p1 and p2. Denote this vector by chord1. Compute $x1 = |\text{chord1}|$.
 - vii. Subtract v2 from v3 to find chord vector between p3 and p2. Denote this vector by chord2. Compute $x2 = |\text{chord2}|$.
 - viii. Compute dot product of chord1 and chord2. Denote this value as d.
 - ix. Use the following calculation to compute the length L of the sub-arc: (see figure A2-7)

$$\xi = \frac{d}{x_1 x_2}$$

$$\sigma = \sqrt{1 - \xi^2}$$

$$R = \frac{x_2 \sqrt{(x_1/x_2 - \xi)^2 + \sigma^2}}{2\sigma}$$

$$A = 2(\pi - \cos^{-1} \xi)$$



$$L = R \cdot A$$

Note that since the arc length is a planar (not geodetic) calculation, the subtended angle A is not equal to d theta.

- x. Add L to cumulative `arcLength` to get total length of sub-arcs through sub-arc number i : `arcLength = arcLength + L`.
- f. end for loop.
- g. Compute error, which is the change in length calculation between this iteration and the last: `error = abs(arcLength - oldLength)`.
- h. Increment the iteration count: `k = k + 1`.
- i. Double the number of sub-arcs: `n = 2*n`.
- j. Save the current length for comparison with the next iteration: `oldLength = arcLength`.

STEP 6: End while loop.

STEP 7: Return `arcLength`.

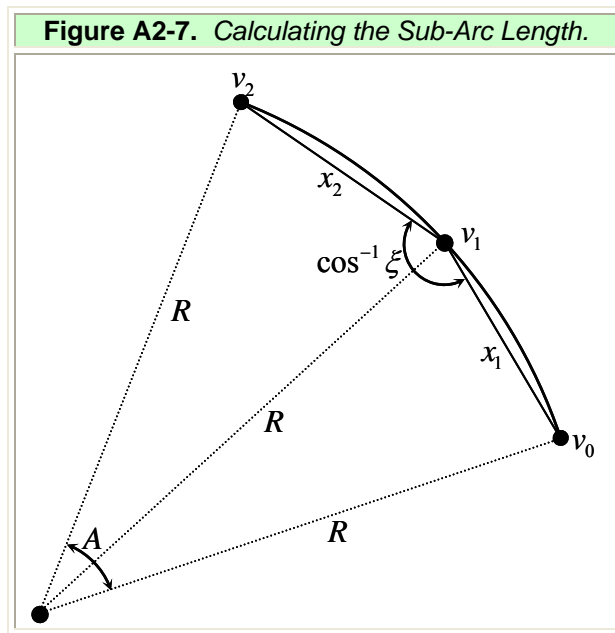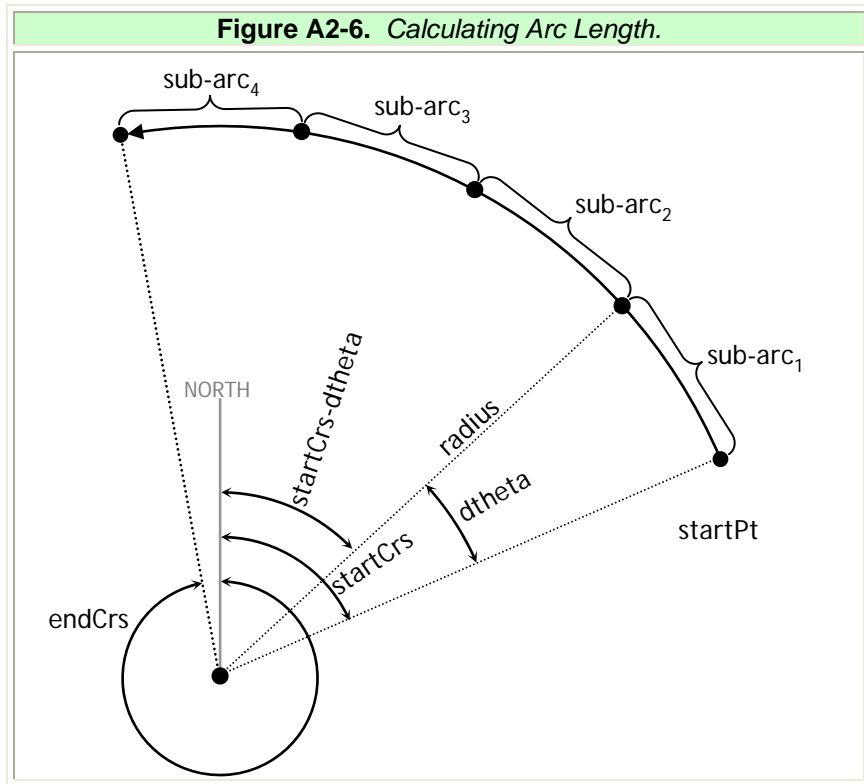

3.9 Find Distance from Defining Geodesic to Locus.

When computing a position on a locus of points, it is necessary to solve for the distance from the defining geodesic to the locus. This distance is constant if the locus is designed to be “parallel” to the defining geodesic. However, it is necessary to allow the locus distance to vary linearly with distance along the geodesic, since in some cases the locus will splay away from the defining geodesic. To account for this, we have included `startDist` and `endDist` attributes in the `Locus` structure defined above. For a given point on the geodesic (or given distance from the geodesic start point), the distance to the locus can then be calculated.

The two algorithms described below carry out the computation of locus distance for different input parameters. If the distance from the geodesic start point to the point of interest is known, then `WGS84DistToLocusD` may be used to calculate the locus distance. If instead a point on the defining geodesic is given, the `WGS84DistToLocusP` may be used. The latter algorithm simply computes the distance from the geodesic start point to the given point and then invokes the former algorithm. Therefore, steps are described for `WGS84DistToLocusD` only.

3.9.1 Input/Output.

`double WGS84DistToLocusD (Locus loc, double distance, double eps)` returns the distance from the defining geodesic to the locus at the given distance from `loc.geoStart`, where the inputs are:

<code>Locus loc</code>	=	Locus of interest
<code>double distance</code>	=	Distance from locus start point to point where distance is to be computed
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithms

`double WGS84DistToLocusP (Locus loc, LLPoint geoPt, double tol, double eps)` returns the distance from the defining geodesic to the locus at the given point, where the inputs are:

<code>Locus loc</code>	=	Locus of interest
<code>LLPoint geoPt</code>	=	Point on defining geodesic
<code>double tol</code>	=	Maximum allowable error
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithm

3.9.2 Algorithm Steps.

The following steps are followed if the distance from `loc.geoStart` is given. If a point on the geodesic (`geoPt`) is given instead, then first use the inverse algorithm to compute the distance from `geoPt` to `loc.geoStart` and then follow the following steps (note that distance must be signed negative if the locus's line type is 2 and `geoPt` is farther from `geoEnd` than it is from `geoStart`):

STEP 1: Use the *inverse function* to compute the length of the locus's defining geodesic. Denote this value as `geoLen`.

STEP 2: If (`geoLen = 0`) then `distToLoc = 0.0`

STEP 3: Else: $\text{distToLoc} = \text{loc.startDist} + \frac{\text{distance}}{\text{geoLen}} * (\text{loc.endDist} - \text{loc.startDist})$

STEP 4: End if

STEP 5: Return `distToLoc`

3.10 Project Point on Locus from Point on Defining Geodesic.

Given a point on the defining geodesic, this algorithm computes the corresponding point on the locus.

3.10.1 Input/Output.

`LLPoint WGS84PointOnLocusP (Locus loc, LLPoint geoPt, double tol, double eps)` returns the point on the locus that is abeam the given point, where the inputs are:

<code>Locus loc</code>	=	Locus of Interest
<code>LLPoint geoPt</code>	=	Point on defining geodesic
<code>double tol</code>	=	Maximum allowable error
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithms

3.10.2 Algorithm Steps.

STEP 1: Use *Algorithm 3.9* (with point input) to determine the distance from `geoPt` to the locus. Denote this distance as `distp`.

STEP 2: If (`distp = 0`) return `geoPt`

STEP 3: Use the *inverse algorithm* to compute the course from `geoPt` to the start point of the defining geodesic. Denote this value as `fcrs`.

STEP 4: If (`distp > 0.0`) then the locus lies to the right of the geodesic. Let

$$\text{tempcrs} = \text{fcrs} - \frac{\pi}{2}$$

STEP 5: Else, the locus lies to the left of the geodesic. Let $\text{tempcrs} = \text{fcrs} + \frac{\pi}{2}$

STEP 6: End if

STEP 7: Use the *direct algorithm* to project a point along `tempcrs`, distance `abs(distp)` from `geoPt`. Denote the point as `ptOnLoc`.

STEP 8: Return `ptOnLoc`.

3.11 Determine if Point Lies on Locus.

This algorithm compares the position of a given point with the position of the corresponding point on the locus. The corresponding point on the locus is found by projecting the given point onto the locus's defining geodesic curve, computing the correct distance from there to the locus, and then projecting a point at that distance perpendicular to the geodesic. If distance from the corresponding point to the given point is less than the error tolerance, then a reference to the projected point on the geodesic is returned. Otherwise a null reference is returned.

An alternative implementation could simply return true or false, rather than references. However, it is more efficient to return the projected point as this is often needed in subsequent calculations.

3.11.1 Input/Output.

LLPoint* WGS84PtIsOnLocus (Locus **loc**, LLPoint **testPt**, double **tol**) returns a reference to the projection of **testPt** on the locus's defining geodesic if **testPt** lies on the locus and NULL otherwise, where the inputs are:

Locus loc	=	Locus of Interest
LLPoint testPt	=	Point to test against locus
Double tol	=	Maximum allowable error
Double eps	=	Convergence parameter for forward/inverse algorithms

3.11.2 Algorithm Steps.

See *figure A2-8* for an illustration of the variables.

STEP 1: Use the *inverse algorithm* to calculate the course from the start point (**geoStart**) of the locus's defining geodesic to its end point (**geoEnd**). Denote this value as **fcrs**.


STEP 2: Use *Algorithm 5.1* to project **testPt** onto the locus's defining geodesic. Denote the projected point as **projPt**.

STEP 3: Use *Algorithm 3.6* to determine whether **projPt** lies on the locus's defining geodesic. If it does not, then return 0 (false).

STEP 4: Use *Algorithm 3.11* to compute the point on the locus corresponding to **projPt**. Denote this point by **compPt**.

STEP 5: Use the *inverse algorithm* to calculate **error**, the distance between **projPt** and **compPt**.

STEP 6: If (**error** < **tol**) then return reference to **projPt**. Otherwise, return NULL.

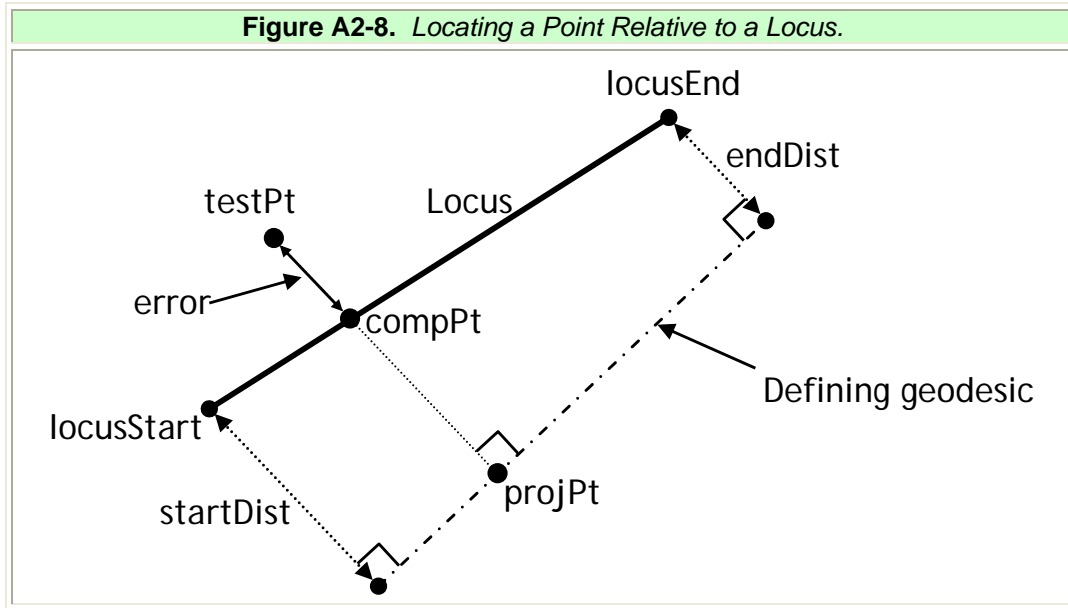

3.12 Compute Course of Locus

This algorithm is analogous to the inverse algorithm for a geodesic. It is used by other locus algorithms when the direction of the locus is needed.

3.12.1 Input/Output.

`double WGS84LocusCrsAtPoint (Locus loc, LLPoint testPt, LLPoint* geoPt, double* perpCrs, double tol)` returns the course of the locus at the given point. Also sets values of calculation byproducts, including the corresponding point on the locus's geodesic and the course from the given point toward the geodesic point, where the inputs are:

<code>Locus loc</code>	=	Locus of Interest
<code>LLPoint testPt</code>	=	Point at which course will be calculated
<code>LLPoint* geoPt</code>	=	Projection of <code>testPt</code> on defining geodesic
<code>double* perpCrs</code>	=	Course for <code>testPt</code> to <code>geoPt</code>
<code>double tol</code>	=	Maximum allowable error
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithms

3.12.2 Algorithm Steps.

See *figure A2-9* for an illustration of the variables.


- STEP 1: Use *Algorithm 3.11* to determine whether `testPt` lies on `loc`. This same step will return a reference to the projection of `testPt` onto the defining geodesic. Denote this reference as `geoPt`.
- STEP 2: If (`geoPt = NULL`) then `testPt` is not a valid point at which to calculate the locus's course. Return -1.0. (Valid course values are in the range $[0, 2\pi]$.)
- STEP 3: Use the *inverse algorithm* to calculate the course and distance from `testPt` to `geoPt`, denoted by `perpCrS` and `perpDist`, respectively.
- STEP 4: Use *Algorithm 3.9* to calculate `distToLoc`, the distance from the geodesic to the locus at `geoPt`. This step is required to determine which side of the geodesic the locus lies on because `perpDist` will always be positive.
- STEP 5: Calculate the slope of the locus relative to the geodesic:

$$\text{slope} = \frac{(\text{loc.endDist} - \text{loc.startDist})}{\text{geoLen}}$$
- STEP 6: Convert the slope to angular measure in radians:

$$\text{slope} = \text{atan}(\text{slope})$$
- STEP 7: Adjust the value of the perpendicular course by `slope`. This accounts for how the locus is approaching or receding from the geodesic:

$$\text{perpCrS} = \text{perpCrS} + \text{slope}$$
- STEP 8: If (`distToLoc < 0`), then `testPt` lies to the left of the geodesic, so `perpCrS` points to the right of the locus's course:

$$\text{locCrS} = \text{perpCrS} - \pi/2$$
- STEP 9: Else, `testPt` lies to the right of the geodesic so `perpCrS` points to the left of the locus's course: $\text{locCrS} = \text{perpCrS} + \pi/2$
- STEP 10: Return `locCrS`

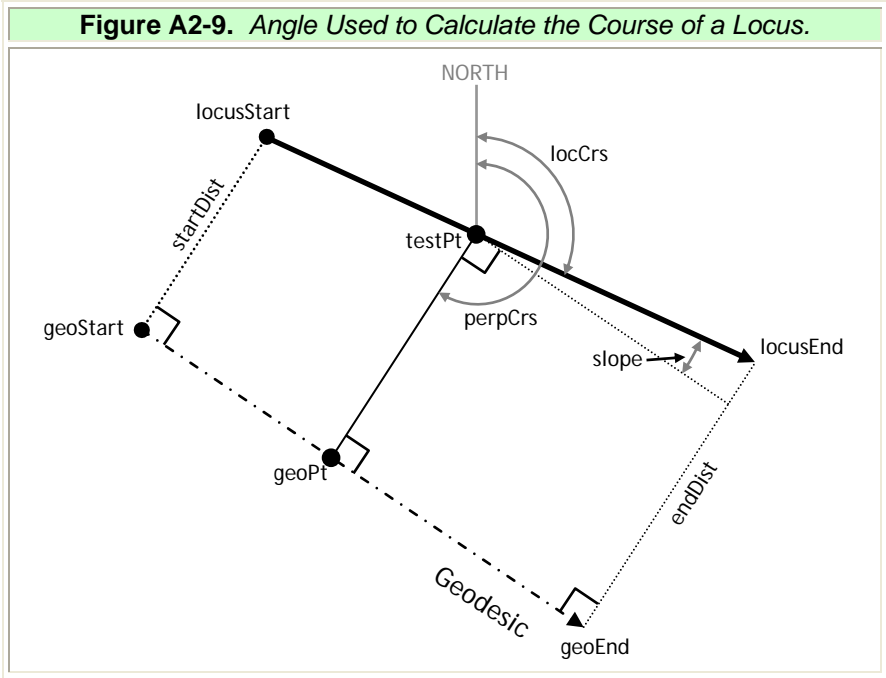

4.0 Intersections.

4.1 Intersection of Two Geodesics.

The following algorithm computes the coordinates where two geodesic curves intersect. Each geodesic is defined by its starting coordinates and azimuth at that coordinate. The algorithm returns a single set of coordinates if the geodesics intersect and returns a null solution (no coordinates) if they do not.

4.1.1 Input/Output.

`LLPoint* WGS84CrsIntersect(LLPoint point1, double az13, double* az31, double* dist13, LLPoint point2, double az23, double* az32, double* dist23, double tol)` returns a reference to an `LLPoint` structure that contains the intersection coordinates, where the inputs are:

<code>LLPoint point1</code>	=	Start point of first geodesic
<code>double az13</code>	=	Azimuth of first geodesic at point1
<code>double* az31</code>	=	Reference to reverse azimuth of first geodesic at point3 (this is calculated and returned)
<code>double* dist13</code>	=	Reference to distance between point1 and point3 (calculated and returned)
<code>LLPoint point2</code>	=	Start point of second geodesic
<code>double az23</code>	=	Azimuth of second geodesic at point2
<code>double* az32</code>	=	Reference to reverse azimuth of second geodesic at point3 (this is calculated and returned)
<code>double* dist23</code>	=	Reference to distance between point2 and point3 (calculated and returned)
<code>double tol</code>	=	Maximum error allowed in solution
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithms

4.1.2 Algorithm Steps.

See *figure A2-10* for an illustration of the variables.

STEP 1: Use *inverse algorithm* to calculate distance, azimuth and reverse azimuth from point1 to point2. Denote these values by `dist12`, `crs12` and `crs21`, respectively.

- STEP 2: Calculate the difference in angle between $crs12$ and $crs13$, denoted by $angle1$.
- STEP 3: Calculate the difference in angle between $crs21$ and $crs23$, denoted by $angle2$.
- STEP 4: If $(\sin(angle1)*\sin(angle2) < 0)$ then the courses lay on opposite sides of the $point1$ - $point2$ line and cannot intersect in this hemisphere.
- Return no intersection.
- STEP 5: Else if $(angle2 < tol)$ or $(angle1 < tol)$ then the two geodesics are identical and there is no single unique intersection (there are infinite intersections).
- Return no intersection.
- STEP 6: End if.
- STEP 7: Locate the approximate intersection point, $point3$, using a spherical earth model. See the documents referenced in *section 3.2* methods to accomplish this.
- STEP 8: Use the *inverse algorithm* to calculate $dist13$, the distance from $point1$ to $point3$.
- STEP 9: Use the *inverse algorithm* to calculate $dist23$, the distance from $point2$ to $point3$.
- STEP 10: If $dist13 < tol$, then the intersection point is very close to $point1$. Calculation errors may lead to treating the point as if it were beyond the end of the geodesic. Therefore, it is helpful to move $point1$ a small distance along the geodesic.
- Use the *direct algorithm* to move $point1$ from its original coordinates, 1 NM along azimuth $crs13+\pi$.
 - Use the *inverse algorithm* to calculate the azimuth $crs13$ for the geodesic from the new $point1$.
- STEP 11: Repeat steps 10, 10(a), and 10(b) for $point2$ and $crs23$.
- STEP 12: If $(dist23 < dist13)$ then the intersection point is closer to $point2$ than $point1$. In this case, the iterative scheme will be more accurate if we swap $point1$ and $point2$. This is because we iterate by projecting the

approximate point onto the geodesic from `point1` and then calculating the error in azimuth from `point2`. If the distance from `point2` to the intersection is small, then small errors in distance can correspond to large errors in azimuth, which will lead to slow convergence. Therefore, we swap the points so that we are always measuring azimuth errors farther from the geodesic starting point.

- a. `newPt = point1`
- b. `point1 = point2`
- c. `point2 = newPt`
- d. `acrs13 = crs13`
- e. `crs13 = crs23`
- f. `crs23 = acrs13`
- g. `dist13 = dist23`; We only need one distance so the other is not saved.
- h. `swapped = 1`; This is a flag that is set so that the solutions can be swapped back after they are found.

STEP 13: End if

STEP 14: Initialize the distance array: `distarray[0] = dist13`. Errors in azimuth from `point2` will be measured as a function of distance from `point1`. The two most recent distances from `point1` are stored in a two element array. This array is initialized with the distance from `point1` to `point3`:

STEP 15: Use the *direct algorithm* to project `point3` onto the geodesic from `point1`. Use `point1` as the starting point, and a distance of `distarray[0]` and azimuth of `crs13`.

STEP 16: Use the *inverse algorithm* to measure the azimuth `acrs23` from `point2` to `point3`.

STEP 17: Initialize the error array:
`errarray[0] = signedAzimuthDifference(acrs23, crs23)`.

See *Algorithm 6.1* for an explanation of the `signedAzimuthDifference` function; `errarray[0]` will be in the range $(-\pi, \pi]$.

- STEP 18: Initialize the second element of the distance array using a logical guess:
`distarray[1]=1.01*dist13.`
- STEP 19: Use the *direct algorithm* to project the second approximation of `point3` onto the geodesic from `point1`. Use `point1` as the starting point, and a distance of `distarray[1]` and azimuth of `crs13`.
- STEP 20: Use the *inverse algorithm* to measure the azimuth `acrs23` from `point2` to `point3`.
- STEP 21: Initialize the error array (*see Algorithm 6.1*):
`errarray[1] = signedAzimuthDifference(acrs23, crs23).`
- STEP 22: Initialize `k = 0`
- STEP 23: Do while (`k=0`) or (`(error > tol) and (k ≤ maximumIterationCount)`)
- a. Use *linear approximation* to find root of `errarray` as a function of `distarray`. This gives an improved approximation to `dist13`.
 - b. Use the *direct algorithm* to project the next approximation of the intersection point, `newPt`, onto the geodesic from `point1`. Use `point1` as the starting point, and a distance of `dist13` (calculated in previous step) and azimuth of `crs13`.
 - c. Use *inverse algorithm* to calculate the azimuth `acrs23` from `point2` to `newPt`.
 - d. Use the *inverse algorithm* to compute the distance from `newPt` to `point3` (the previous estimate). Denote this value as the error for this iteration.
 - e. Update `distarray` and `errarray` with new values:
`distarray[0] = distarray[1]`
`distarray[1] = dist13`
`errarray[0] = errarray[1]`
`errarray[1] = signedAzimuthDifference(acrs23, crs23)`
(See Algorithm 6.1)
 - f. Increment `k`: `k = k + 1`


g. Set `point3 = newPt`.

STEP 24: End while loop.

STEP 25: Check if `k` reached `maximumIterationCount`. If so, then the algorithm may not have converged, so an error message should be displayed.

STEP 26: The distances and azimuths from `point1` and `point2` to `point3` are available at the end of this function, since they were calculated throughout the iteration. It may be beneficial to return them with the `point3` coordinates, since they may be needed by the calling function. If this is done, and if `swapped = 1`, then the original identities of `point1` and `point2` were exchanged and the azimuths and distances must be swapped again before they are returned.

STEP 27: Return `point3`.

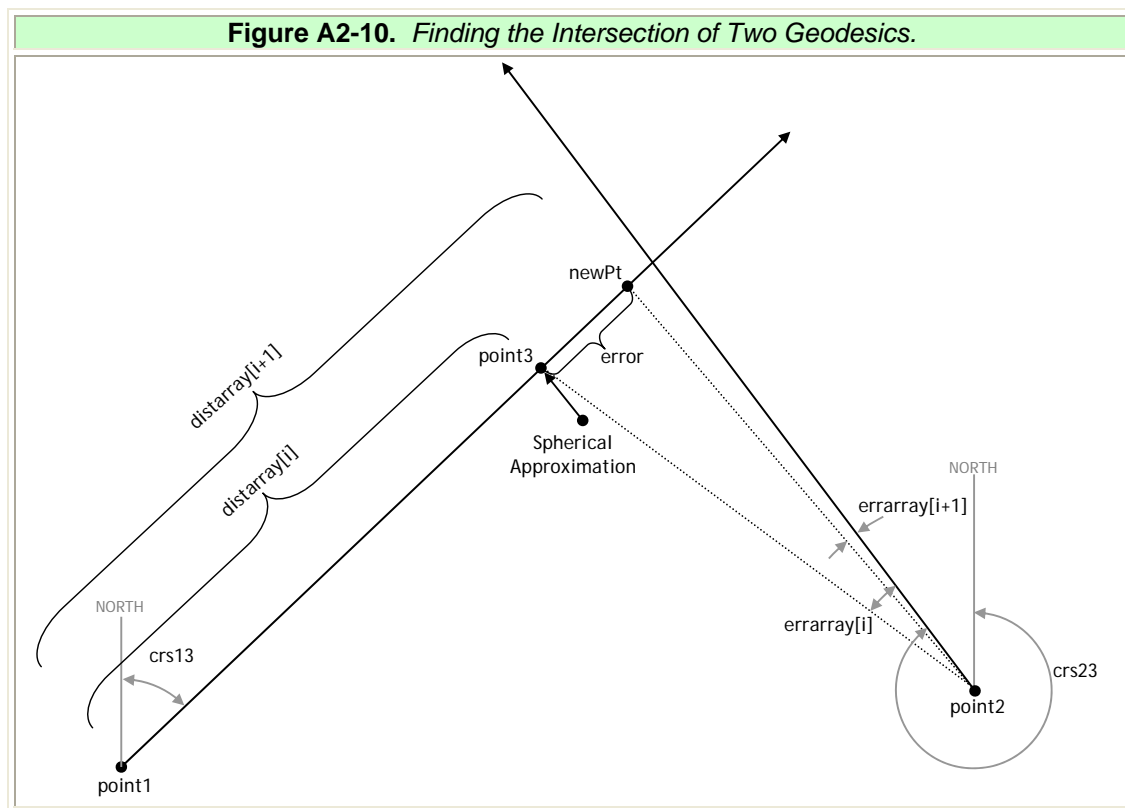

4.2 Intersection of Two Arcs.

The following algorithm computes the intersection points of two arcs. Each arc is defined by its center point coordinates and radius. The algorithm will return a null solution (no points) if the arcs do not intersect; it will return a single set of coordinates

if the arcs intersect tangentially; and it will return two sets of coordinates if the arcs overlap.

4.2.1 Input/Output.

LLPoint* WGS84ArcIntersect(LLPoint **center1**, double **radius1**, LLPoint **center2**, double **radius2**, int* **n**, double **tol**) returns a reference to an LLPoint structure array that contains the coordinates of the intersection(s), where the inputs are:

LLPoint center1	=	Geodetic coordinates of first arc center
double radius1	=	Radius of first arc in nautical miles
LLPoint center2	=	Geodetic coordinates of second arc center
double radius2	=	Radius of second arc in nautical miles
int* n	=	Reference to integer number of intersection points returned
double tol	=	Maximum error allowed in solution
double eps	=	Convergence parameter for forward/inverse algorithms

4.2.2 Algorithm Steps.

See *figure A2-11* for an illustration of the variables.

This algorithm treats the arcs as full circles. Once the intersections of the circles are found, then each intersection point may be tested and discarded if it does not lie within the bounds of the arc.

STEP 1: Use *inverse algorithm* to calculate the distance and azimuth between center1 and center2. Denote these values as *dist12* and *crs12*, respectively.

STEP 2: If $(\text{radius1} + \text{radius2} - \text{dist12} + \text{tol} < 0)$ or $(\text{abs}(\text{radius1} - \text{radius2}) > \text{dist12})$ then the circles are spaced such that they do not intersect. If the first conditional is true, then the arcs are too far apart. If the second conditional is true, then one arc is contained within the other.

a. Return no intersections.

STEP 3: Else if $(\text{abs}(\text{radius1} + \text{radius2} - \text{dist12}) \leq \text{tol})$ then the circles are tangent to each other and intersect in exactly one point.

- a. Use *direct algorithm* to project point from `center1`, along `crs12`, distance `radius1`.
- b. Return projected point.

STEP 4: End if

STEP 5: Calculate approximate intersection points, `point1` and `point2`, according to *section 3.2*.

STEP 6: Iterate to improve approximation to `point1`:

- a. `k = 0`
- b. Use *inverse algorithm* to find azimuth from `center2` to `point1`, denote this value as `crs2x`.
- c. Use *direct algorithm* to move `point1` along `crs2x` to circumference of circle 2. Use `center2` as starting point, `crs2x` as azimuth, `radius2` as distance.
- d. Use *inverse algorithm* to compute distance and azimuth from `center1` to `point1`. Denote these values as `dist1x` and `crs1x`, respectively.
- e. Compute error at this iteration step: `error = radius1 - dist1x`.
- f. Initialize arrays to store error as function of course from `center1`:
`errarray[1] = error`
`crsarray[1] = crs1x`
- g. While (`k ≤ maximumIterationCount`) and (`abs(error) > tol`), improve approximation
 - i. Use *direct function* to move `point1` along `crs1x` to circumference of circle1. Use `center1` as starting point, `crs1x` as azimuth, and `radius1` as distance. Note that `crs1x` was calculated as last step in previous iteration.
 - ii. Use *inverse function* to find azimuth from `center2` to `point1`, `crs2x`.
 - iii. Use *direct function* to move `point1` along `crs2x` to circumference of circle2. Use `center2` as starting point, `crs2x` as azimuth, and `radius2` as distance.


- iv. Use *inverse algorithm* to compute distance and azimuth from `center1` to `point1`. Denote these values as `dist1x` and `crs1x`, respectively.
- v. Update function arrays:
`crsarray[0] = crsarray[1]`
`crsarray[1] = crs1x`
`errarray[0] = errarray[1]`
`errarray[1] = r1 - dist1x`
- vi. Use *linear root finder* to find the azimuth value that corresponds to zero error. Update the variable `crs1x` with this root value.
- vii. Increment `k`: `k = k + 1`
- h. End while loop.

STEP 7: Store `point1` in array to be returned: `intx[0] = point1`.

STEP 8: Repeat step 6 for approximation `point2`.

STEP 9: Store `point2` in array to be returned: `intx[1] = point2`.

STEP 10: Return array `intx`.

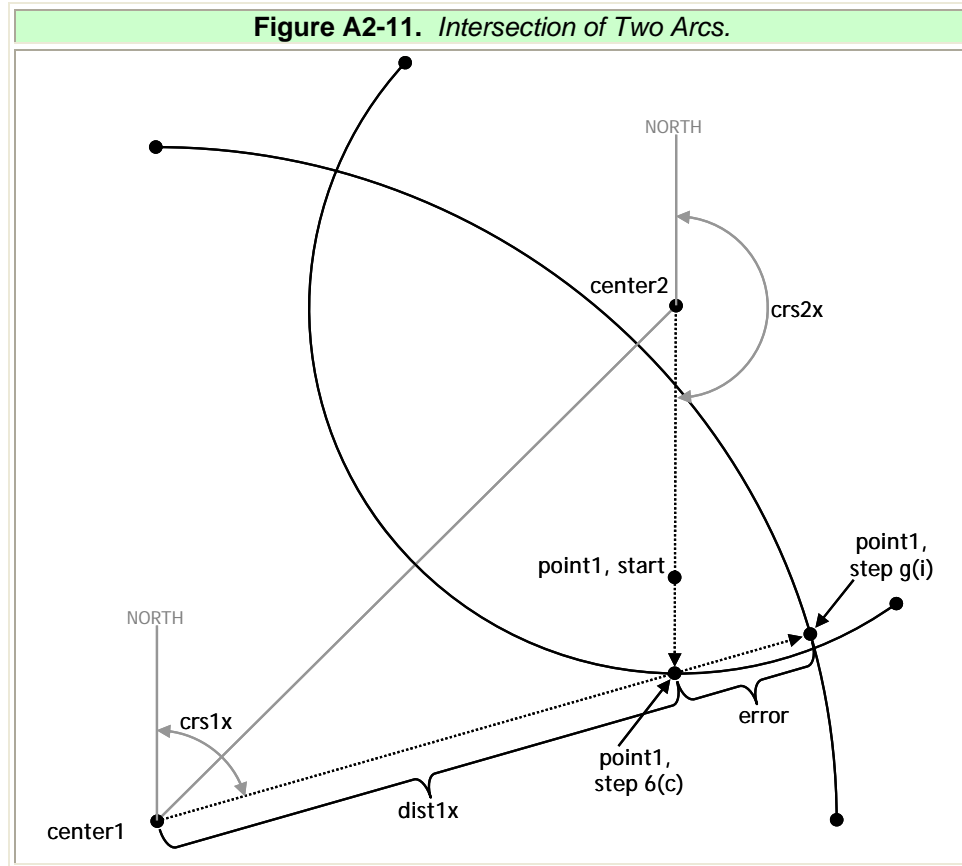

4.3 Intersections of Arc and Geodesic.

The following algorithm computes the point where a geodesic intersects an arc. The geodesic is defined by its starting coordinates and azimuth. The arc is defined by its center point coordinates and radius. The algorithm will return a null solution (no points) if the arc and geodesic do not intersect; it will return a single set of coordinates if the arc and geodesic intersect tangentially; and it will return two sets of coordinates if the arc and geodesic overlap.

4.3.1 Input/Output.

`LLPoint* WGS84GeodesicArcIntersect(LLPoint pt1, double crs1, LLPoint center, double radius, int* n, double tol)`
 returns a reference to an `LLPoint` structure array that contains the coordinates of the intersection(s), where the inputs are:

<code>LLPoint pt1</code>	=	Geodetic coordinates of start point of geodesic
<code>doulbe crs1</code>	=	Initial azimuth of geodesic at start point
<code>LLPoint center</code>	=	Geodetic coordinates of arc center point
<code>double radius</code>	=	Arc radius in nautical miles

`int* n` = Reference to number of intersection points returned
`double tol` = Maximum error allowed in solution
`double eps` = Convergence parameter for forward/inverse algorithms

4.3.2 Algorithm Steps.

This algorithm treats the arc and geodesic as unbounded. Once intersection points are found, they must be tested using *Algorithms 3.6 and 3.7* to determine which, if any, lie within the curves' bounds. This algorithm fails if the arc and geodesic describe the same great circle. A test for this case is embedded in step 7. See *figure A2-12* for an illustration of the variable names.

STEP 1: Use *Algorithm 5.1* to find the perpendicular projection point from arc center point (`center`) to the geodesic defined by starting point `pt1` and azimuth `crs1`. Denote this point by `perpPt`.

STEP 2: Use the *inverse algorithm* to calculate the distance from `center` to `perpPt`. Denote this value by `perpDist`.

STEP 3: If (`abs(perpDist - radius) < tol`), then the geodesic is tangent to the arc and intersection point is at `perpPt`.

a. Return `intx[0] = perpPt`

STEP 4: Else if (`perpDist > radius`) then geodesic passes too far from center of circle; there is no intersection.

a. Return empty array.

STEP 5: End if

STEP 6: Use *inverse algorithm* to calculate azimuth of the geodesic at `perpPt`. Denote the azimuth from `perpPt` to `pt1` as `crs`.

STEP 7: Use *spherical triangle approximation* to find distance from `perpPt` to one intersection points. Since the spherical triangle formed from `center`, `perpPt`, and either intersection point has a right angle at the `perpPt` vertex, the distance from `perpPt` to either intersection is:

$$\text{dist} = \text{SPHERE_RADIUS} * \text{acos}(\text{cos}(\text{radius} / \text{SPHERE_RADIUS}) / \text{cos}(\text{perpDist} / \text{SPHERE_RADIUS}))$$

where SPHERE_RADIUS is the radius of the spherical earth approximation. Note that a test must be performed so that if $\cos(\text{perpDist}/\text{SPHERE_RADIUS}) = 0$, then no solution is returned

STEP 8: Find ellipsoidal approximation $\text{intx}[0]$ to first intersection by starting at perpPt and using direct algorithm with distance dist and azimuth crs . This will place $\text{intx}[0]$ on the geodesic.

STEP 9: Initialize iteration count $k = 0$.

STEP 10: Use *inverse algorithm* to calculate the distance from center to $\text{intx}[0]$. Denote this value by radDist . In the same calculation, calculate azimuth from $\text{intx}[0]$ to center. Denote this value by rcrs ; it will be used to improve the solution.

STEP 11: Calculate error for this iteration: $\text{error} = \text{radius} - \text{radDist}$

STEP 12: Initialize arrays that will hold distance and error function values so that linear interpolation may be used to improve approximation:
 $\text{distarray}[0] = \text{dist}$
 $\text{errarray}[0] = \text{error}$

STEP 13: Do one iterative step using spherical approximation near intersection point (see figure A2-13).

a. Use the *inverse algorithm* to calculate the azimuth from $\text{intx}[0]$ to perpPt . Denote this value by bcrs .

b. Compute the angle between the arc's radial line and the geodesic at $\text{intx}[0]$. This is depicted by B in A2-13:

$$B = \text{abs}(\text{signedAzimuthDifference}(\text{bcrs}, \text{rcrs}) + \pi - \theta)$$

See *Algorithm 6.1* for an explanation of "signedAzimuthDifference."

c. Calculate the angle opposite the radial error:

$$A = \text{acos}\left(\sin(B) \cos\left(\frac{\text{abs}(\text{error})}{\text{SPHERE_RADIUS}}\right)\right)$$

d. If $(\text{abs}(\sin(A)) < \text{tol})$ then the triangle is nearly isosceles, so use simple formula for correction term c : $c = \text{error}$

e. Else, if $(\text{abs}(A) < \text{tol})$ then the error is very small, so use flat approximation: $c = \text{error}/\cos(B)$

- f. Else, use a spherical triangle approximation for c :

$$c = \text{SPHERE_RADIUS} * \text{asin} \left(\frac{\sin(\text{error}/\text{SPHERE_RADIUS})}{\sin(A)} \right)$$
- g. End if
- h. If ($\text{error} > 0$), then $\text{intx}[0]$ is inside the circle, so approximation must be moved away from perpPt : $\text{dist} = \text{dist} + c$
- i. Else $\text{dist} = \text{dist} - c$
- j. End if
- k. Use the *direct algorithm* to move $\text{intx}[0]$ closer to solution. Use perpPt as the starting point with distance dist and azimuth crs .
- l. Use the *inverse algorithm* to calculate the distance from center to $\text{intx}[0]$. Denote this value again radDist .
- m. Initialize second value of distarray and errarray :

$$\begin{aligned} \text{distarray}[1] &= \text{dist} \\ \text{errarray}[1] &= \text{radius} - \text{radDist} \end{aligned}$$

STEP 14: Do while ($\text{abs}(\text{error}) > \text{tol}$) and ($k < \text{maximumIterationCount}$)

- a. Use a *linear root finder* to find the distance value that corresponds to zero error. Update the variable dist with this root value.
- b. Use the *direct algorithm* again to move $\text{intx}[0]$ closer to solution. Use perpPt as the starting point with distance dist and azimuth crs .
- c. Use the *inverse algorithm* to calculate the distance from center to $\text{intx}[0]$. Denote this value radDist .
- d. Update distarray and errarray with the new values:

$$\begin{aligned} \text{distarray}[0] &= \text{distarray}[1] \\ \text{errarray}[0] &= \text{errarray}[1] \\ \text{distarray}[1] &= \text{dist} \\ \text{errarray}[1] &= \text{radius} - \text{radDist} \end{aligned}$$
- e. Increment the iteration count: $k = k + 1$



STEP 15: End while loop

STEP 16: Prepare variables to solve for second solution, `intx[1]`.

- a. Second solution lies on other side of `perpPt`, so set `crs = crs + π` .
- b. Use *direct algorithm* to find `intx[1]`. Start at `perpPt`, using `crs` for the azimuth and `dist` for the distance, since the distance from `perpPt` to `intx[0]` is a very good approximation to the distance from `perpPt` to `intx[1]`.
- c. Use *inverse algorithm* to calculate `radDist`, the distance from center to `intx[1]`.
- d. Initialize the error function array:
`errarray[0] = radius - radDist`.

STEP 17: Repeat steps 13 through 15 to improve solution for `intx[1]`

STEP 18: Return `intx[0]` and `intx[1]`

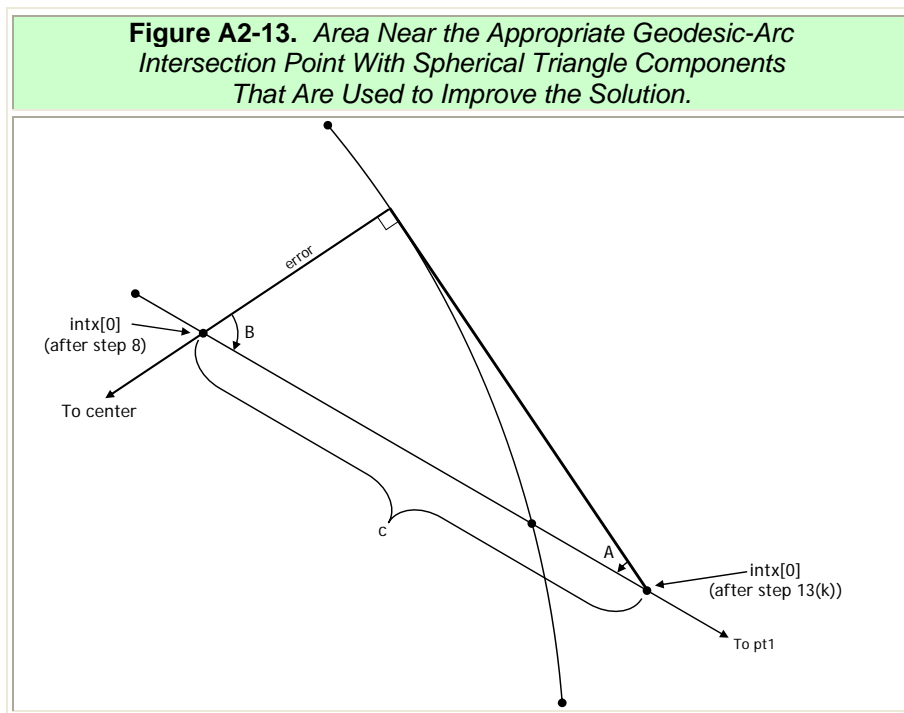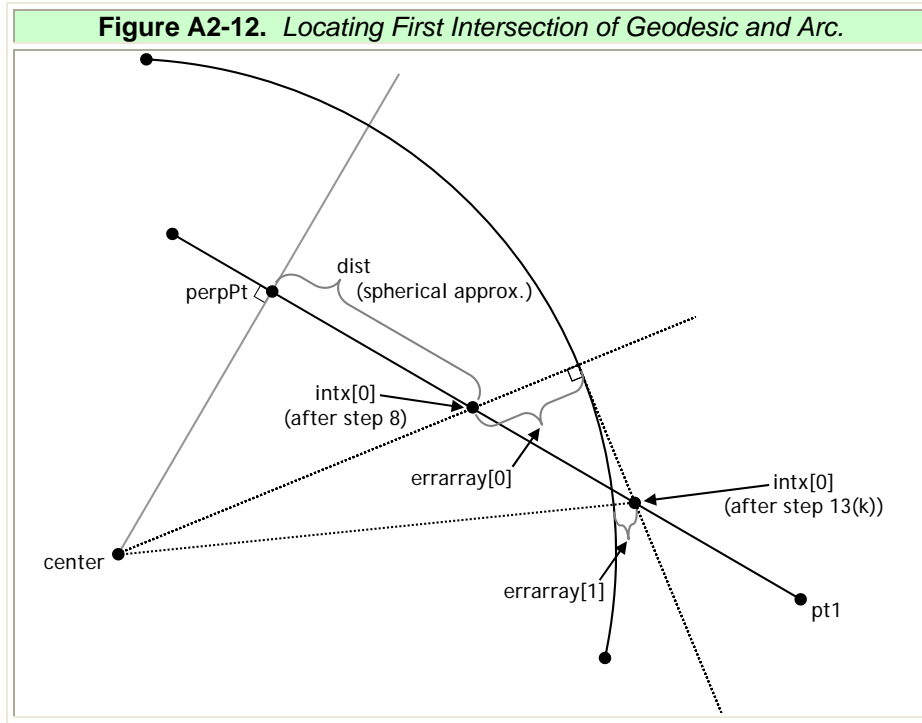

4.4 Arc Tangent to Two Geodesics.

This algorithm is useful for finding flight path arcs, such as fitting a fly-by turn or radius-to-fix (RF) leg between two track-to-fix (TF) legs. Note that for the arc to be

tangent to both the incoming and the outgoing geodesics, the two tangent points must be different distances from the geodesics' intersection point.

4.4.1 Input/Output.

LLPoint* WGS84TangentFixedRadiusArc(LLPoint **pt1**, double **crs12**, LLPoint **pt3**, double **crs3**, double **radius**, int* **dir**, double **tol**) returns a reference to an LLPoint structure array that contains the coordinates of the center point and both tangent points of the arc that is tangent to both given geodesic, where the inputs are:

LLPoint pt1	=	Geodetic coordinates of start point of first geodesic
double crs12	=	Azimuth of first geodesic at pt1
LLPoint pt3	=	Geodetic coordinates of end point of second geodesic
double crs3	=	Azimuth of second geodesic at pt3
double radius	=	Radius of desired arc
int* dir	=	Reference to an integer that represents direction of turn. dir = 1 for left hand turn dir = -1 for right hand turn
double tol	=	Maximum error allowed in solution
double eps	=	Convergence parameter for forward/inverse algorithms

4.4.2 Algorithm Steps.

See *figure A2-14* for an illustration of the variable names.

STEP 1: Use *Algorithm 4.1* to locate the intersection point of the given geodesics. The first geodesic has azimuth *crs12* at *pt1*, while the second geodesic has azimuth *crs3* at *pt3*. Denote their intersection point by *pt2*.

STEP 2: If intersection point *pt2* is not found, then no tangent arc can be found.

a. Return empty array.

STEP 3: End if

STEP 4: Use the *inverse algorithm* to calculate the distance from *pt1* to *pt2* (denoted by *dist12*). Also calculate the azimuth at *pt2* to go from *pt2* to *pt1*. Denote this value by *crs21*.

STEP 5: Use the *inverse algorithm* to compute the azimuth at pt2 to go from pt2 to pt3. Denote this value by `crs23`.

STEP 6: Calculate angle between courses at pt2 (see Algorithm 6.1). Denote this value by `vertexAngle`:

$$\text{vertexAngle} = \text{signedAzimuthDifference}(\text{crs21}, \text{crs23})$$

STEP 7: If $\text{abs}(\sin(\text{vertexAngle})) < \text{tol}$, then either there is no turn or the turn is 180 degrees. In either case, no tangent arc can be found.

a. Return empty array.

STEP 8: Else if `vertexAngle > 0` then course changes direction to the right: `dir = -1`

STEP 9: Else, the course changes direction to the left: `dir = 1`

STEP 10: End if

STEP 11: Use spherical triangle calculations to compute the approximate distance from pt2 to the points where the arc is tangent to either geodesic. Denote this distance by `DTA`:

a. $A = \text{vertexAngle}/2$

b. If $(\text{radius} > \text{SPHERE_RADIUS} * A)$ then no arc of the required radius will fit between the given geodesics

i. Return empty array

c. End if

d.
$$\text{DTA} = \text{SPHERE_RADIUS} * \text{asin}\left(\frac{\tan\left(\frac{\text{radius}}{\text{SPHERE_RADIUS}}\right)}{\tan(A)}\right)$$

STEP 12: Use the calculated `DTA` value to calculate the distance from pt1 to the approximate tangent point on the first geodesic:

$$\text{distToStart} = \text{dist12} - \text{DTA}$$

STEP 13: Initialize the iteration count: `k = 0`

STEP 14: Initialize the error measure: `error = 0.0`

STEP 15: Do while (k = 0) or ((abs(error) > tol) and (k ≤ maximumIterationCount))

- a. Adjust the distance to tangent point based on current error value (this has no effect on first pass through, because error = 0):

$$\text{distToStart} = \text{distToStart} - \frac{\text{error}}{\sin(\text{vertexAngle})}$$

- b. Use the *direct algorithm* to project startPt distance distToStart from pt1. Use pt1 as the starting point with azimuth of crs12 and distance of distToStart.
- c. Use the *inverse algorithm* to compute azimuth of geodesic at startPt. Denote this value by perpCrs.
- d. If (dir < 0), then the tangent arc must curve to the right. Add $\pi/2$ to perpCrs to get the azimuth from startPt to center of arc:

$$\text{perpCrs} = \text{perpCrs} + \frac{\pi}{2}$$

- e. Else, the tangent arc must curve to the left. Subtract $\pi/2$ from perpCrs to get the azimuth from startPt to center of arc:

$$\text{perpCrs} = \text{perpCrs} - \frac{\pi}{2}$$

- f. End if.
- g. Use the *direct algorithm* to locate the arc center point, centerPt. Use startPt as the starting point, perpCrs for the azimuth, and radius for the distance.
- h. Use *Algorithm 5.1* to project centerPt to the second geodesic. Denote the projected point by endPt. This is approximately where the arc will be tangent to the second geodesic.
- i. Use the *inverse algorithm* to calculate the distance from centerPt to endPt. Denote this distance by perpDist.
- j. Calculate the tangency error: error = radius - perpDist. This error value will be compared against the required tolerance parameter. If its magnitude is greater than tol, then it will be used to adjust the position of startPt until both startPt and endPt are the correct distance from centerPt.

STEP 16: End while.


STEP 17: Assign the calculated points to output array

`intx[0] = centerPt`

`intx[1] = startPt`

`intx[2] = endPt`

STEP 18: Return intx.

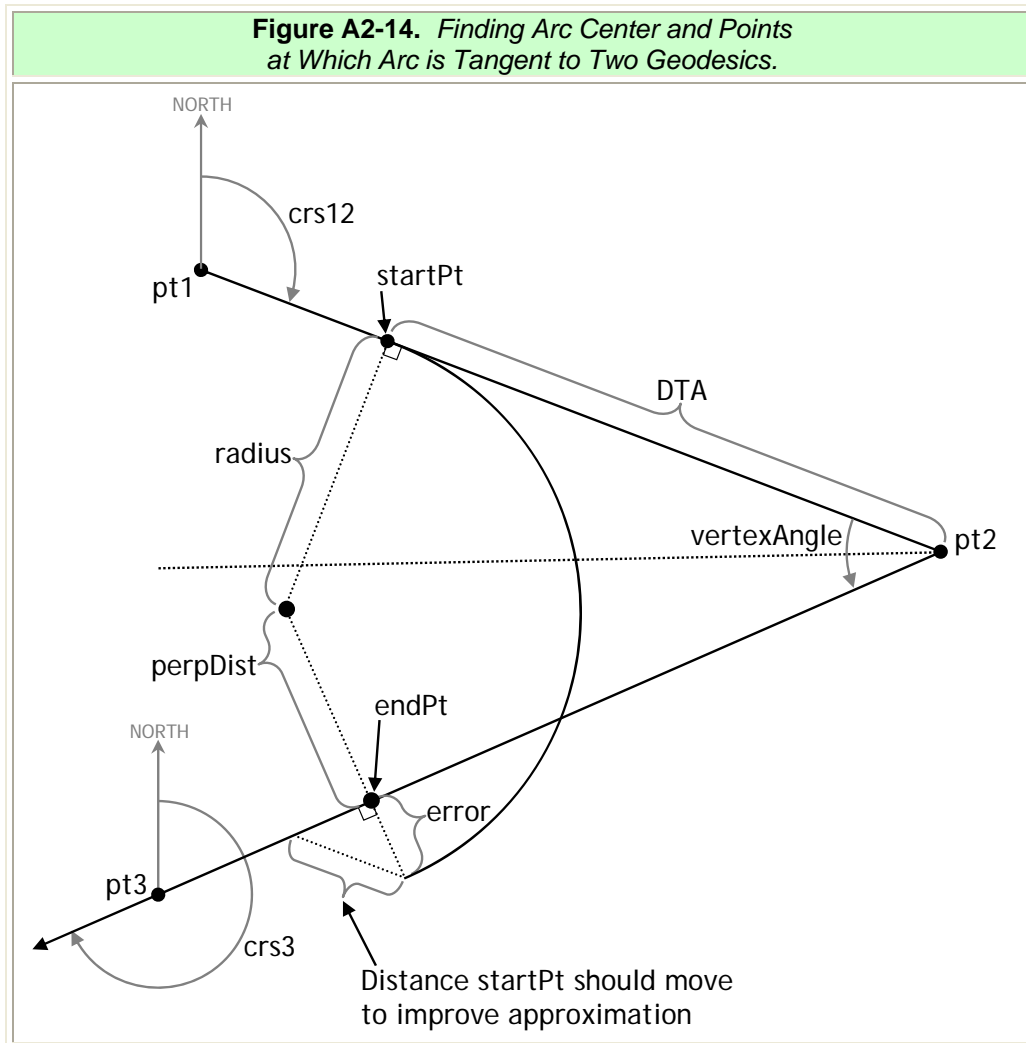

4.5 Intersections of Geodesic and Locus.

This algorithm is useful for finding the corner points of *TF* subsegment's *OEA*, where a parallel (represented as a locus of points) intersects the geodesic end line.

4.5.1 Input/Output.

`LLPoint* WGS84GeoLocusIntersect(LLPoint gStart, LLPoint gEnd, Locus loc, double tol)` returns a reference to an `LLPoint` structure array that contains the coordinates of the intersection point., where the inputs are:

<code>LLPoint gStart</code>	=	Geodetic coordinates of start point of geodesic
<code>LLPoint gEnd</code>	=	Geodetic coordinates of end point of geodesic
<code>Locus loc</code>	=	Structure defining locus of points
<code>double tol</code>	=	Maximum error allowed in solution
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithms

4.5.2 Algorithm Steps.

See *figure A2-15* for an illustration of the variable names.

STEP 1: Use the *geodesic intersection algorithm (Algorithm 4.1)* to find a first approximation to the point where the given geodesic and locus intersect. Use the start and end coordinates of the locus along with the start and end coordinates of given geodesic as inputs to the geodesic intersection algorithm. This will erroneously treat the locus as a geodesic; however, the calculated intersection will be close to the desired intersection. The geodesic intersection algorithm will return the approximate intersection point, `pt1`, along with the courses and distances from the `pt1` to the start points of the locus and given geodesic. Denote these courses and distances as `crs31`, `dist13`, `crs32`, `dist23`, respectively.

STEP 2: If `pt1` is not found, then the locus and geodesic do not intersect.

a. Return empty point.

STEP 3: End if

STEP 4: Use the *inverse algorithm* to calculate the course from `gStart` to `gEnd`. Denote this value as `fcrs`. This value is needed by the direct algorithm to locate new points on the given geodesic.

- STEP 5: Use the *inverse algorithm* to calculate the distance and course from `pt1` to `gStart`. Denote these value as `distBase` and `crsBase`, respectively.
- STEP 6: Use the *inverse algorithm* to calculate the forward course for the locus's defining geodesic. Denote this value as `tcrs`. This value is needed to project the approximate point onto the defining geodesic in order to calculate the appropriate locus distance.
- STEP 7: Use *Algorithm 5.1* to project `pt1` onto the locus's defining geodesic. Use `pt1`, `loc.geoStart`, and `tcrs` as inputs. Denote the returned point as `pInt`, the returned course as `crsFromPt`, and the returned distance as `distFromPt`.
- STEP 8: Use *Algorithm 3.9* to calculate the distance from the defining geodesic to the locus at `pInt`. Denote this value as `distLoc`. Note that `distLoc` may be positive or negative, depending on which side of defining geodesic the locus lies.
- STEP 9: Calculate the distance from `pt1` to the locus. This is the initial error:
`errarray[1] = distFromPt - abs(distLoc)`.
- STEP 10: Save the initial distance from `gStart` to the approximate point:
`distarray[1] = distBase`. We will iterate to improve the approximation by finding a new value for `distBase` that makes `errarray` zero.
- STEP 11: Calculate a new value of `distBase` that will move `pt1` closer to the locus. This is done by approximating the region where the given geodesic and locus intersect as a right Euclidean triangle and estimating the distance from the current `pt1` position to the locus (*see figure A2-16*).
- a. Calculate the angle between the geodesic from `pt1` to `pInt` and the geodesic from `pt1` to `gStart`:
`theta = abs(signedAzimuthDifference(crsFromPt,crsBase))`

- b. Calculate a new value for `distBase`:

$$\text{distBase} = \text{distBase} - \frac{\text{errarray}[1]}{\cos(\text{theta})}$$



STEP 12: Initialize the iteration count: `k = 0`.

STEP 13: Do while (`abs(errarray[1] > tol)` and (`k < maxIterationCount`))

- a. Use `gStart`, `fcrs`, and the updated value of `distBase` in the direct algorithm to update the value of `pt1`.
- b. Save the current values of `errarray` and `distarray`:
`errarray[0] = errarray[1]`
`distarray[0] = distarray[1]`
- c. Set `distarray[1] = distBase`.
- d. Repeat steps 7, 8, and 9 to calculate the distance from `pt1` to the locus, `distloc`, and the corresponding update to `errarray[1]`.
- e. Use a linear root finder with `distarray` and `errarray` to find the distance value that makes the error zero. Update `distBase` with this root value.

STEP 14: End while

STEP 15: Return `pt1`.

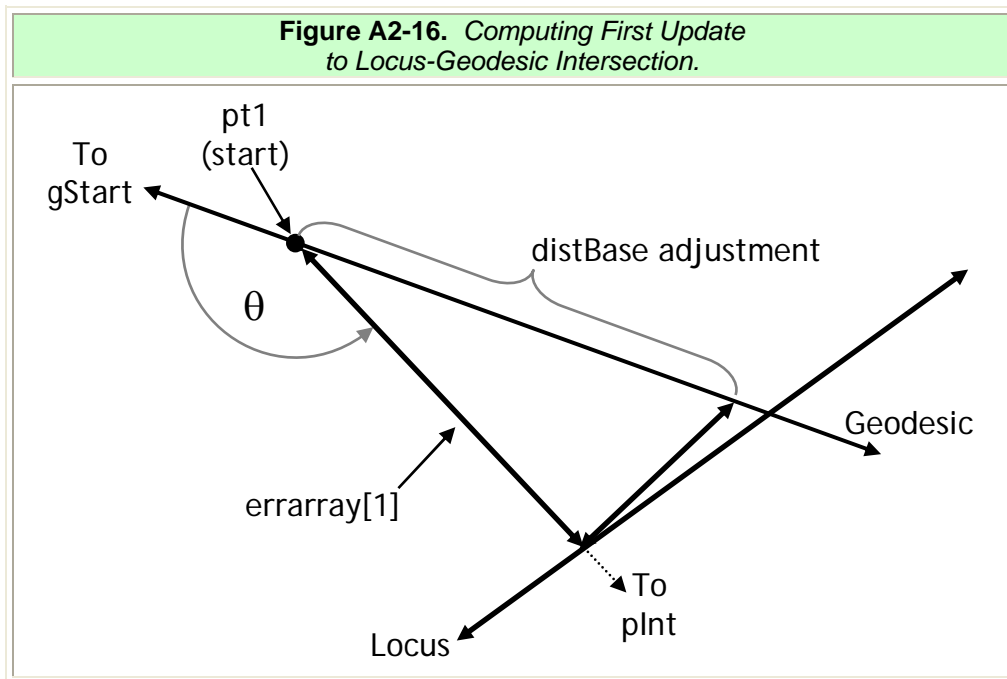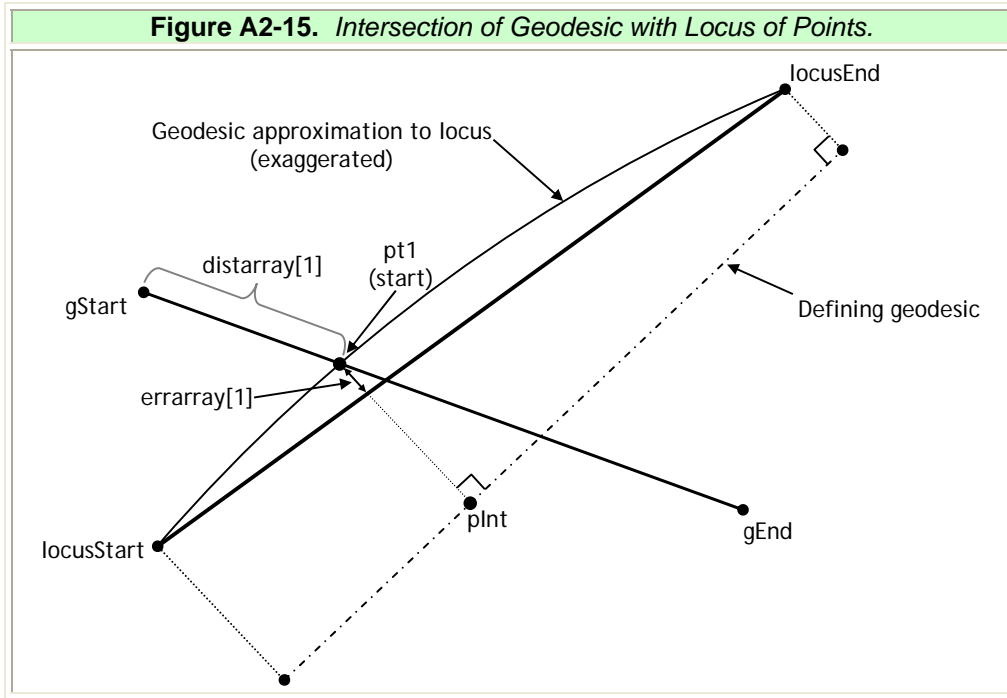

4.6 Intersections of Arc and Locus.

This algorithm solves for the intersection of a fixed radius arc and a locus. It is very similar to Algorithm 4.3, which computes the intersections of an arc and a geodesic. It begins by treating the locus as a geodesic and applying Algorithm 4.3 to find approximate intersection points. The approximation is improved by traveling along the locus, measuring the distance to the arc center at each point. The difference between this distance and the given arc radius is the error. The error is modeled as a series of linear functions of position on the locus. The root of each function gives the next approximation to the intersection. Iteration stops when the error is less than the specified tolerance.

4.6.1 Input/Output.

`LLPoint* WGS84LocusArcIntersect(Locus loc, LLPoint center, double radius, int* n, double tol)` returns a reference to an `LLPoint` structure array that contains the coordinates of the intersection(s), where the inputs are:

<code>Locus loc</code>	=	Locus of interest
<code>LLPoint center</code>	=	Geodetic coordinates of arc
<code>double radius</code>	=	Arc radius
<code>int* n</code>	=	Number of intersections found
<code>double tol</code>	=	Maximum error allowed in solution
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithms

4.6.2 Algorithm Steps.

See *figure A2-17* for an illustration of the variables.

STEP 1: Initialize number of intersections: `n = 0`

STEP 2: Use the inverse algorithm to compute the course from `loc.locusStart` to `loc.locusEnd`. Denote this value as `fcrs`.

STEP 3: Use *Algorithm 4.3* to find the point(s) where the arc intersects the geodesic joining `loc.locusStart` and `loc.locusEnd`. Denote the set of intersections as `intx` and the count of these intersections as `n1`. This gives a first approximation to the intersections of the arc and the locus.

STEP 4: If (`n1 = 0`), then no approximate intersections were found. Return `NULL`.

STEP 5: Use the inverse algorithm to compute the course and distance from `loc.geoStart` to `loc.geoEnd`. Store these values as `gcrs` and `gdist`, respectively.

STEP 6: For `i=0, i<n1`

- a. Use *Algorithm 5.1* to project `intx[0]` to the locus's defining geodesic. Denote the projected point as `perpPt`.
- b. Use the *inverse algorithm* to calculate `distbase`, the distance from `perpPt` to `loc.geoStart`.
- c. Use *Algorithm 3.10* to project `locPt` onto the locus from `perpPt`.
- d. Use the *inverse algorithm* to calculate `distCenter`, the distance from `locPt` to center.
- e. Calculate the error and store it in an array:
`errarray[1] = distCenter - radius`
- f. If `(abs(errarray[1]) < tol)`, then `locPt` is close enough to the circle. Set `intx[n] = locPt`, `n = n+1`, and continue to the end of the for loop, skipping steps g through l below.
- g. Save the current value of `distbase` to an array: `distarray[1] = distbase`
- h. Initialize the iteration count: `k = 0`
- i. Perturb `distbase` by a small amount to generate a second point at which to measure the error: `newDistbase = 1.001*distbase`.
- j. Do while (`k < maxIterationCount`) and `(abs(errarray[1]) > tol)`
 - i. Project `perpPt` on the defining geodesic a distance `newDistbase` along course `gcrs` from `loc.geoStart`.
 - ii. Use *Algorithm 3.10* to project `locPt` onto the locus from `perpPt`.
 - iii. Use the inverse algorithm to calculate `distCenter`, the distance from `locPt` to center.
 - iv. Calculate the error: `error = distCenter - radius`


- v. Update the distance and error arrays:


```

      distarray[0] = distarray[1]
      distarray[1] = newDistbase
      errarray[0] = errarray[1]
      errarray[1] = error
      
```
- vi. Use a linear root finder with `distarray` and `errarray` to find the distance value that makes the error zero. Update `newDistbase` with this root value.
- k. End while
- l. If `locPt` is on the locus according to *Algorithm 3.11*, then
 - i. copy `locPt` to the output array: `intx[n] = locPt`.
 - ii. Update the count of intersection points found: `n = n + 1`.

STEP 7: End for loop

STEP 8: Return `intx`

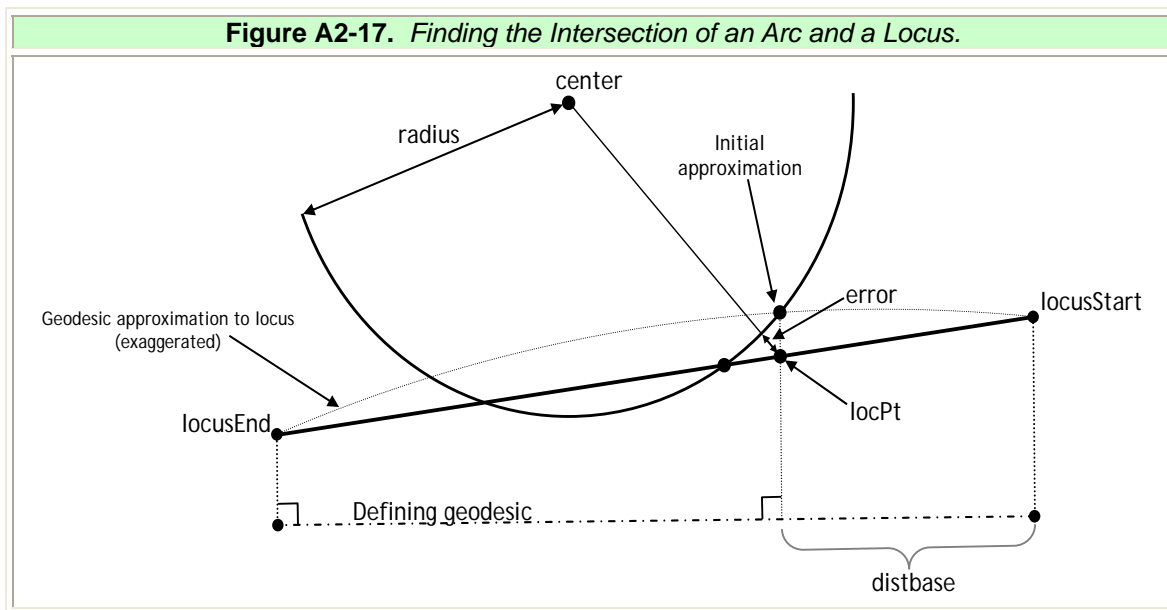

4.7 Intersections of Two Loci.

4.7.1 Input/Output.

LLPoint* WGS84LocusIntersect(Locus **loc1**, Locus **loc2**, double **tol**) returns a reference to an LLPoint structure array that contains the intersection coordinates, where the inputs are:

Locus **loc1** = First locus of interest
 Locus **loc2** = Second locus of interest
 Double **tol** = Maximum error allowed in solution
 Double **eps** = Convergence parameter for forward/inverse algorithms

4.7.2 Algorithm Steps.

See *figure A2-18* for an illustration of the variables and calculation steps.

STEP 1: Use the *inverse algorithm* to calculate the course of the geodesic approximation to **loc1**. Use **loc1.locusStart** and **loc1.locusEnd** as start and end points. Denote this course as **crs1**.

STEP 2: Use the *inverse algorithm* to calculate the course of the geodesic approximation to **loc2**. Use **loc2.locusStart** and **loc2.locusEnd** as start and end points. Denote this course as **crs2**.

STEP 3: Use **loc1.locusStart**, **crs1**, **loc2.locusStart**, and **crs2** as input to *Algorithm 4.1* to calculate an approximate solution to the locus intersection. Denote the approximate intersection point at **p1**.

STEP 4: If (**p1** = NULL), then the loci do not intersect, so return NULL.

STEP 5: Use the *inverse algorithm* to calculate the course of **loc1**'s defining geodesic. Use **loc1.geoStart** and **loc1.geoEnd** as the start and end points, and denote the course as **tcrs1**.

STEP 6: Project **p1** to the geodesic of **loc1** using *Algorithm 5.1* with **loc1.geoStart** and **tcrs1** as input parameters. Store the projected point as **pint1**.

STEP 7: If (**pint1** = NULL), then no projected point was found so return NULL.

STEP 8: Use the *inverse algorithm* to calculate **distbase**, the distance from **loc1.geoStart** to **pint1**.

STEP 9: Initialize iteration counter: **k** = 0

STEP 10: Do while (**k** = 0) or ((**k** < **maxIterationCount**) and (**fabs(error)** > **tol**))

- a. If ($k > 0$) then apply direct algorithm to project new `pint1` on `loc1`. Use starting point `loc1.geoStart`, course `tcrs1`, and distance `distbase`.
- b. Use *Algorithm 3.10* to project a point on `loc1` from the current `pint1`. Denote the projected point as `ploc1`.
- c. Project `ploc1` to the geodesic of `loc2` using *Algorithm 5.1* with `loc2.geoStart` and `tcrs2` as input parameters. Store the projected point as `pint2`.
- d. Use *Algorithm 3.10* to project a point on `loc2` from `pint2`. Denote the projected point as `ploc2`. If `ploc1` were truly at the intersection of the `loci`, then `ploc2` and `ploc1` would be the same point. The distance between them measures the error at this calculation step.
- e. Compute the error by using the inverse algorithm to calculate the distance between `ploc1` and `ploc2`.
- f. Update the error and distance arrays and store the current values:



```
errarray[0] = errarray[1]
errarray[1] = error
distarray[0] = distarray[1]
distarray[1] = distbase
```
- g. If ($k = 0$), then project `ploc2` onto `loc1` to get a new estimate of `distbase`:
 - i. Project `ploc2` to the geodesic of `loc1` using *Algorithm 5.1* with `loc1.geoStart` and `tcrs1` as input parameters. Store the projected point as `pint1`.
 - ii. Use the *inverse algorithm* to calculate `distbase`, the distance from `loc1.geoStart` to `pint1`.
- h. Else,
 - i. Use a *linear root finder* with `distarray` and `errarray` to find the distance value that makes the error zero. Update `distbase` with this root value. This is possible only after the first update step because two values are required in each array.
- i. End if
- j. Increment iteration count: $k = k + 1$

STEP 11: End while

STEP 12: Use *Algorithm 3.11* with inputs of `loc1` and `ploc1` to determine if `ploc1` lies on the `loc1`. If not, return NULL.

STEP 13: Use *Algorithm 3.11* with inputs of `loc2` and `ploc1` to determine if `ploc1` lies on the `loc2`. If not, return NULL.

STEP 14: Return `ploc1`.

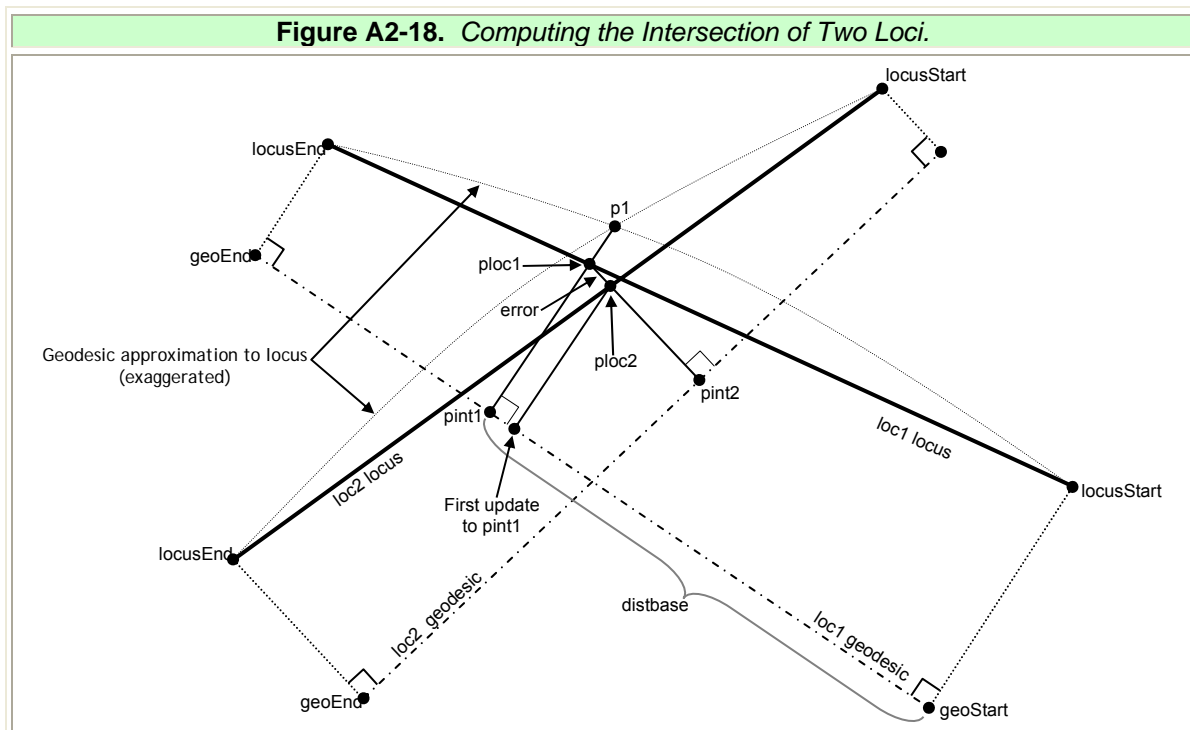

4.8 Arc Tangent to Two Loci.

Computing a tangent arc of a given radius to two loci is very similar to fitting an arc to two geodesics. The following algorithm uses the same basic logic as *Algorithm 4.4*.

4.8.1 Input/Output.

`LLPoint* WGS84LocusTanFixedRadiusArc(Locus loc1, Locus loc2, double radius, int* dir, double tol)` returns a reference to an `LLPoint` structure array that contains the coordinates of the center point and both tangent points of the arc that is tangent to both given loci, where the inputs are:

Locus `loc1` = Structure defining first locus

Locus `loc2` = Structure defining second locus

double radius	=	Radius of desired arc
int* dir	=	Reference to an integer that represents direction of turn. dir = 1 for left hand turn dir = -1 for right hand turn
double tol	=	Maximum error allowed in solution
double eps	=	Convergence parameter for forward/inverse algorithms

4.8.2 Algorithm Steps.

See *figure A2-19*.

STEP 1: Use *inverse algorithm* to calculate `crs12`, the course from `loc1.locusStart` to `loc1.locusEnd`.

STEP 2: Use *inverse algorithm* to calculate `gcrs1` and `geoLen1`, the course and distance from `loc1.geoStart` to `loc1.geoEnd`.

STEP 3: Use *inverse algorithm* to calculate `crs32`, the course from `loc2.locusEnd` to `loc2.locusStart`. Convert `crs32` to its reciprocal: $crs32 = crs32 + \pi$.

STEP 4: Apply *Algorithm 4.4* to find the arc tangent to the geodesic approximations to `loc1` and `loc2`. Use `loc1.locusStart`, `crs12`, `loc2.locusEnd`, `crs32`, and `radius` as input parameter. Denote the array of points returned as `intx`. `intx[0]` will be the approximate arc center point, `intx[1]` will be the tangent point near `loc1`, and `intx[2]` will be the tangent point near `loc2`. Also returned will be the direction of the arc, `dir`.

STEP 5: If (`intx = NULL`) then there is no tangent arc. Return `NULL`.

STEP 6: Calculate the approximate angle at the vertex where `loc1` and `loc2` intersect. This will be used only to estimate the first improvement to the tangent point `intx[1]`. Thus we use an efficient spherical triangles approximation (see *figure A2-20*):

- a. Use the *spherical inverse function* to calculate the `rgrs1`, the course from `intx[0]` (the approximate arc center) to `intx[1]` (the approximate tangent point on `loc1`).

- b. Use the *spherical inverse function* to calculate the `rcrs2`, the course from `intx[0]` to `intx[2]` (the other approximate tangent point).
- c. Calculate the angle difference between `rcrs1` and `rcrs2`:

$$\text{angle} = \text{abs}(\text{signedAzimuthDifference}(\text{rcrs1}, \text{rcrs2}))$$
- d.
$$\text{vertexAngle} = 2 * \text{acos} \left(\sin \left(\frac{\text{angle}}{2} \right) \cos \left(\frac{\text{radius}}{\text{SPHERE_RADIUS}} \right) \right)$$

STEP 7: Calculate the inclination angle of `loc1` relative to its geodesic:

$$\text{locAngle} = \text{atan} \left[\frac{(\text{loc1.endDist} - \text{loc1.startDist})}{\text{geoLen1}} \right]$$

STEP 8: Apply *Algorithm 5.1* to project `intx[1]` onto the defining geodesic of `loc1`. Use `loc1.geoStart` and `gcrs1` as input parameters. Denote the projected point as `geoPt1`.

STEP 9: Use the *inverse algorithm* to compute `distbase`, the distance from `loc1.geoStart` to `geoPt1`.

STEP 10: Initialize the iteration count: `k = 0`

STEP 11: Do while (`k = 0`) or (`(k < maxIterationCount) and (fabs(error) > tol)`)



- a. If (`k > 0`), then we need to find new `intx[1]` from current value of `distbase`:
 - i. Use *direct algorithm* with starting point `loc1.geoStart`, course `gcrs1`, and distance `distbase` to project point `geoPt1`
- b. End If
- c. Use *Algorithm 3.10* to project a point on `loc1` from the current `geoPt1`. Denote the projected point as `intx[1]`.
- d. Use *Algorithm 3.12* to calculate `lcrs1`, the course of `loc1` at `intx[1]`.
- e. Convert `lcrs1` into the correct perpendicular course toward the arc center (note that `dir > 0` indicates a left-hand turn): $\text{lcrs1} = \text{lcrs1} - \text{dir} * \frac{\pi}{2}$

- f. Use the *direct algorithm* with starting point `intx[1]`, course `lcrs1`, and distance `radius` to project the arc center point, `intx[0]`.
- g. Use *Algorithm 5.2* to project `intx[0]` onto `loc2`. Reassign `intx[2]` as the projected point.
- h. Use the *inverse algorithm* to calculate `r2`, the distance from `intx[0]` to `intx[2]`
- i. Calculate the error: `error = r2 - radius`
- j. Update the distance and error function arrays:
`distarray[0] = distarray[1]`
`distarray[1] = distbase`
`errarray[0] = errarray[1]`
`errarray[1] = error`
- k. If (`k = 0`), then estimate better `distbase` value using spherical approximation and calculated error:

$$\text{distbase} = \text{distbase} + \text{error} * \frac{\cos(\text{locAngle})}{\sin(\text{vertexAngle})}$$
- l. Else, use a linear root finder with `distarray` and `errarray` to find the distance value that makes the error zero. Update `distbase` with this root value.
- m. End if

STEP 12: End while

STEP 13: Return `intx`.

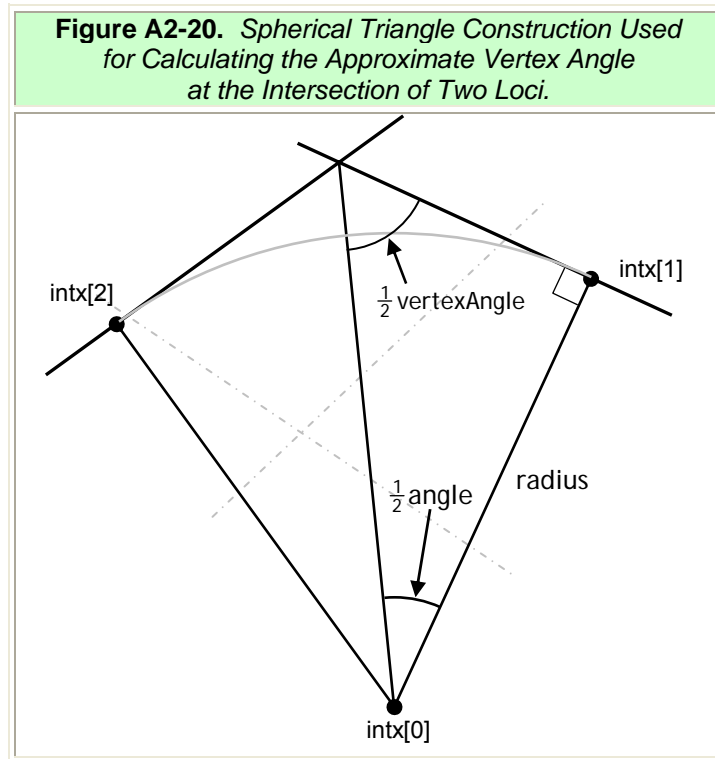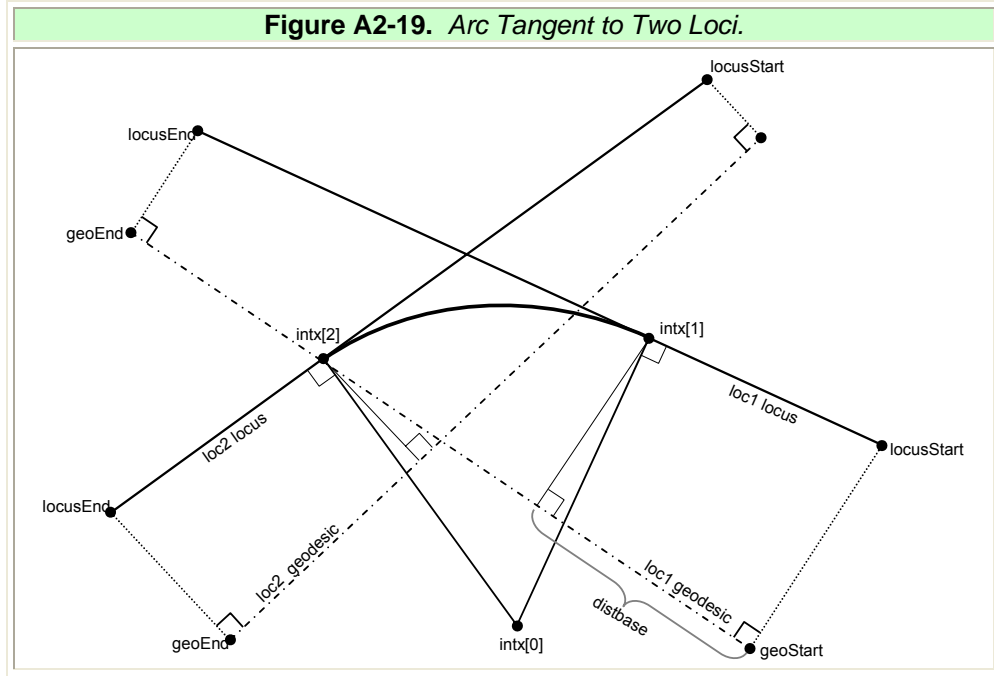

5.0 Projections.

5.1 Project Point to Geodesic.

This algorithm is used to determine the shortest distance from a point to a geodesic. It also locates the point on the geodesic that is nearest the given point.

5.1.1 Input/Output.

`LLPoint* WGS84PerpIntercept(LLPoint pt1, double crs13, LLPoint pt2, double* crsFromPoint, double* distFromPoint, double tol)` returns a reference to an `LLPoint` structure that contains the coordinates of the projected point, where the inputs are:

<code>LLPoint pt1</code>	=	Coordinates of geodesic start point
<code>double crs13</code>	=	Initial azimuth of geodesic at start point
<code>LLPoint pt2</code>	=	Coordinates of point to be projected to geodesic
<code>double* crsFromPoint</code>	=	Reference to value that will store the course from pt2 to projected point
<code>double* distFromPoint</code>	=	Reference to value that will store the distance from pt2 to projected point
<code>double tol</code>	=	Maximum error allowed in solution
<code>double eps</code>	=	Convergence parameter for forward/inverse algorithms

5.1.2 Algorithm Steps.

This algorithm treats the geodesic as unbounded, so that projected points that lie “behind” the geodesic starting point `pt1` will be returned. If it is desired to limit solutions to those that lie along the forward direction of the given geodesic, then *step 5* may be modified to return a null solution (see *figure A2-21*).

STEP 1: Use the inverse algorithm to calculate the distance, azimuth, and reverse azimuth from point1 to point2. Denote these values as `dist12`, `crs12`, and `crs21`, respectively.

- STEP 2: Calculate the angle between the given geodesic and the geodesic between $pt1$ and $pt2$. This is accomplished using signedAzimuthDifference function (see Algorithm 6.1)
- $$angle = \text{abs}(\text{signedAzimuthDifference}(crs13, crs12)).$$
- STEP 3: If ($dist12 \leq tol$), then $pt2$, $pt1$, and projected point $pt3$ are all the same point.
- STEP 4: Calculate $dist13$, the approximate distance from $pt1$ to the projected point $pt3$, using a spherical triangles approximation (see figure A2-22):
- a. $a = dist12 / SPHERE_RADIUS$
 - b. $dist13 = SPHERE_RADIUS \cdot \text{atan}[(\tan a) \cdot \text{abs}(\cos(angle))]$.
(Note, the $\text{abs}()$ function handles the case when $angle > \pi/2$, and should be faster than checking the sign of $angle$ using a conditional.)
- STEP 5: If $angle > \pi/2$, then $pt3$ is behind $pt1$, so we need to move $pt1$ back along the geodesic (redefining the geodesic parameters in the process) so that the projected point will fall forward of $pt1$.
- a. Use the direct algorithm to place a point behind $pt1$ on the given geodesic. Use $pt1$ as the starting point, $dist13 + 1.0$ nautical miles as the distance, and $crs13 + \pi$ as the azimuth. Denote this new point as $newPt1$.
 - b. Redefine $dist13$ as the distance from $newPt1$ to the approximate projection point. Since we moved $newPt1$ to $dist13 + 1.0$ nautical miles behind $pt1$, the new approximation to $dist13$ is simply 1.0 nautical miles, so set $dist13 = 1.0$.
 - c. Use the inverse algorithm to recalculate the initial azimuth of the geodesic at $newPt1$. Use $newPt1$ as the start point and $pt1$ as the end point. Update $crs13$ with this value.
 - d. Set $pt1 = newPt1$.
- STEP 6: Else, if $\text{abs}(dist13) < 1.0$, then the projected point is less than 1.0 nautical miles from $pt1$. In this case, numerical accuracy may be limited and it is beneficial to move the start point of the geodesic backwards a significant distance. We have achieved good results using 1.0 nautical miles.
- a. Use the direct algorithm to place a point behind $pt1$ on the given geodesic. Use $pt1$ as the starting point, 1.0 nautical miles as the

distance, and $\text{crs13} + \pi$ as the azimuth. Denote this new point as newPt1 .

- b. Redefine dist13 as the distance from newPt1 to the approximate projection point. Since we moved newPt1 1.0 nautical miles behind pt1 , the new approximation to dist13 is 1.0 nautical miles greater than the original approximation, so set $\text{dist13} = \text{dist13} + 1.0$.
- c. Use the inverse algorithm to recalculate the initial azimuth of the geodesic at newPt1 . Use newPt1 as the start point and pt1 as the end point. Update crs13 with this value.
- d. Set $\text{pt1} = \text{newPt1}$.

STEP 7: End If

STEP 8: Use the direct algorithm to project a point on the given geodesic distance dist13 from pt1 . Use pt1 for the starting point, dist13 for distance, and crs13 for azimuth. Denote the computed point by pt3 .

STEP 9: Use the inverse algorithm to calculate the azimuth crs31 from pt3 to pt1 .

STEP 10: Use the inverse algorithm to calculate the azimuth crs32 and distance dist23 from pt3 to pt2

STEP 11: Calculate the angle between the geodesics that intersect at pt3 , and cast that angle into the range $[0, \pi]$ using the following formula (see Algorithm 6.1): $\text{angle} = \text{abs}(\text{signedAzimuthDifference}(\text{crs31}, \text{crs32}))$

STEP 12: Calculate the error and store it as the first element in the error function array: $\text{errarray}[0] = \text{angle} - \pi/2$

STEP 13: Store the current distance from pt1 to pt3 in the distance function array: $\text{distarray}[0] = \text{dist13}$

STEP 14: A second distance/error value must be calculated before linear interpolation may be used to improve the solution. The following formula may be used: $\text{distarray}[1] = \text{distarray}[0] + \text{errarray}[0] \cdot \text{dist23}$

STEP 15: Use direct algorithm to project point on the given geodesic distance $\text{distarray}[1]$ from pt1 . Use pt1 for the starting point, $\text{distarray}[1]$ for distance, and crs13 for azimuth. Denote the computed point by pt3 .

STEP 16: Use the inverse algorithm to calculate the azimuth $crs31$ from $pt3$ to $pt1$.

STEP 17: Use the inverse algorithm to calculate the azimuth $crs32$ from $pt3$ to $pt2$.

STEP 18: Calculate the error in angle (see Algorithm 06.1):

$$errarray[1] = \text{abs}(\text{signedAzimuthDifference}(crs31, crs32)) - \frac{\pi}{2}$$

STEP 19: Initialize the iteration count: $k = 0$

STEP 20: Do while ($k = 0$) or ($(\text{error} > \text{tol})$ and ($k < \text{maxIterationCount}$))

- a. Use linear approximation to find root of $errarray$ as a function of $distarray$. This gives an improved approximation to $dist13$.
- b. Use direct algorithm to project point on the given geodesic distance $dist13$ from $pt1$. Use $pt1$ for the starting point, $dist13$ for distance, and $crs13$ for azimuth. Denote the computed point by $pt3$.
- c. Use the inverse algorithm to calculate the azimuth $crs31$ from $pt3$ to $pt1$.
- d. Use the inverse algorithm to calculate the distance $dist23$, azimuth $crs32$, and reverse azimuth $crs23$ from $pt3$ to $pt2$.
- e. Update $distarray$ and $errarray$ with the new values:

$$\begin{aligned} distarray[0] &= distarray[1] \\ errarray[0] &= errarray[1] \\ distarray[1] &= dist13 \\ errarray[1] &= \text{abs}(\text{signedAzimuthDifference}(crs31, crs32)) - \frac{\pi}{2} \end{aligned}$$
 (see Algorithm 6.1 for and explanation of "signedAzimuthDifference")
- f. Calculate the difference between the two latest distance values. This serves as the error function for measuring convergence:



$$\text{error} = \text{abs}(distarray[1] - distarray[0])$$

STEP 21: End while

STEP 22: Set $crsToPoint = crs32$

STEP 23: Set $distToPoint = dist23$

STEP 24: Return pt3

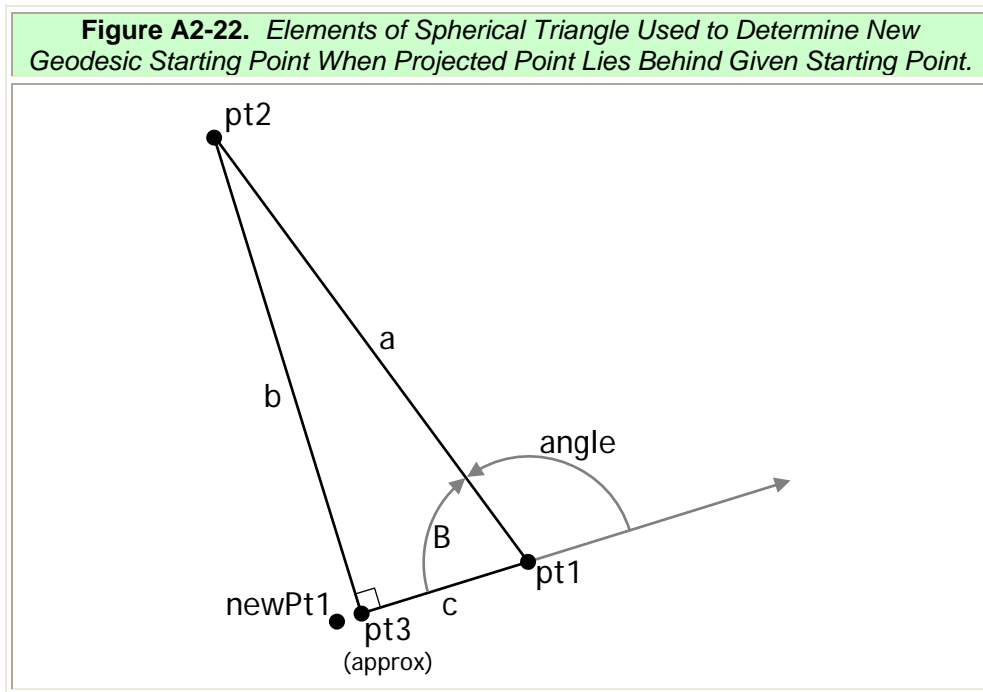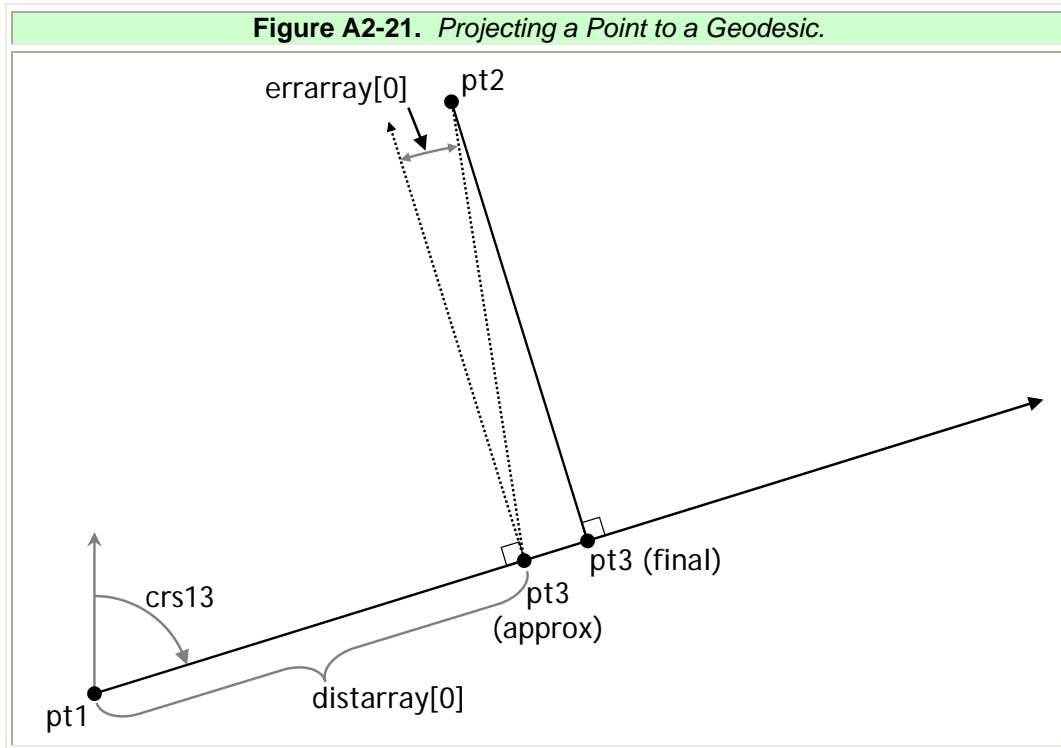

5.2 Project Point to Locus.

This algorithm returns the point on a locus nearest the given sample point. It is used in *Algorithm 4.8* to calculate an arc tangent to two loci.

5.2.1 Input/Output.

LLPoint* WGS84LocusPerpIntercept(Locus loc, LLPoint pt2, double* crsFromPoint, double* distFromPoint, double tol) returns a reference to an LLPoint structure that contains the coordinates of the projected point, where the inputs are:

Locus loc	=	Locus structure to which point will be projected
LLPoint pt2	=	Coordinates of point to be projected to locus
double* crsFromPoint	=	Reference to value that will store the course from pt2 to projected point
double* distFromPoint	=	Reference to value that will store the distance from pt2 to projected point
double tol	=	Maximum error allowed in solution
double eps	=	Convergence parameter for forward/inverse algorithms

5.2.2 Algorithm Steps.

See *figure A2-23* for an illustration of the variables.

STEP 1: Use the *inverse algorithm* to compute gcrs and gdist, the course and distance from loc.geoStart to loc.geoEnd.

STEP 2: If $(\text{abs}(\text{loc.startDist} - \text{loc.endDist}) < \text{tol})$, then the locus is “parallel” to its defining geodesic. In this case, the projected point on the locus will lie on the geodesic joining pt2 with its projection on the defining geodesic, and the calculation is simplified:

- a. Apply *Algorithm 5.1* to project pt2 onto the defining geodesic of loc. Use loc.geoStart, gcrs, and pt2 as input parameters. The intersection point, geoPt, will be returned along with the course and distance from pt2 to geoPt. Denote the course and distance values as crsFromPoint and distFromPoint, respectively.
- b. Use *Algorithm 3.10* to project a point locPt on the locus from perpPt on the geodesic.

- c. Use the *inverse algorithm* to recalculate `distFromPoint` as the distance between `pt2` and `locPt`.
- d. Return `locPt`.

STEP 3: End If

STEP 4: Use the *inverse algorithm* to compute `lcrs`, the course from `loc.locusStart` to `loc.locusEnd`.

STEP 5: Use *Algorithm 5.1* to project `pt2` onto the geodesic approximation of the locus. Pass `loc.locusStart`, `lcrs`, and `pt2` as parameters. Denote the computed point as `locPt`. (In general, this point will not exactly lie on the locus. We will adjust its position so that it is on the locus in a subsequent step.)

STEP 6: Calculate the locus inclination angle, relative to its geodesic:

$$\text{locAngle} = \text{atan}\left(\frac{\text{loc.startDist} - \text{loc.endDist}}{\text{gdist}}\right)$$

STEP 7: Use *Algorithm 5.1* to project `locPt` onto the locus's defining geodesic. Pass `loc.geoStart`, `gcrs`, and `locPt` as parameters. Denote the computed point as `geoPt`.

STEP 8: Use the *inverse function* to calculate the distance from `loc.geoStart` to `geoPt`. Store this value as `distarray[1]`.

STEP 9: Initialize the iteration count: `k=0`


STEP 10: Do while (`k = 0`) or (`abs(errarray[1]) > tol`) and (`k < maxIterationCount`)

- a. Use *Algorithm 3.10* with `distarray[1]` to project a point onto the locus. Reassign `locPt` as this point.
- b. Use *Algorithm 3.12* to recompute `lcrs`, the course of the locus at `locPt`.
- c. Use the *inverse algorithm* to compute `crsToPoint` and `distToPoint`, the course and distance from `locPt` to `pt2`.
- d. Compute the signed angle between the locus and the geodesic from `locPt` to `pt2`:
 $\text{angle} = \text{abs}(\text{signedAzimuthDifference}(\text{lcrs}, \text{crsToPoint}))$

- e. Store the approximate error as $errarray[1] = -distToPoint * \cos(\text{angle})$
This converts the error in angle into an error in distance which can be compared to `tol`.
- f. If $(\text{abs}(errarray[1]) < \text{tol})$, then the approximation is close enough, so return `locPt`.
- g. If $(k = 0)$ then a direct calculation is used to improve the approximation: $\text{newDist} = \text{distarray}[1] + errarray[1] * \cos(\text{locAngle})$
- h. Else, use a *linear root finder* with `distarray` and `errarray` to solve for the distance value that makes the error zero. Denote this value as `newDist`.
- i. End If
- j. Update the distance and error arrays:
 $\text{distarray}[0] = \text{distarray}[1]$
 $errarray[0] = errarray[1]$
 $\text{distarray}[1] = \text{newDist}$

STEP 11: End while

STEP 12: Return `locPt`

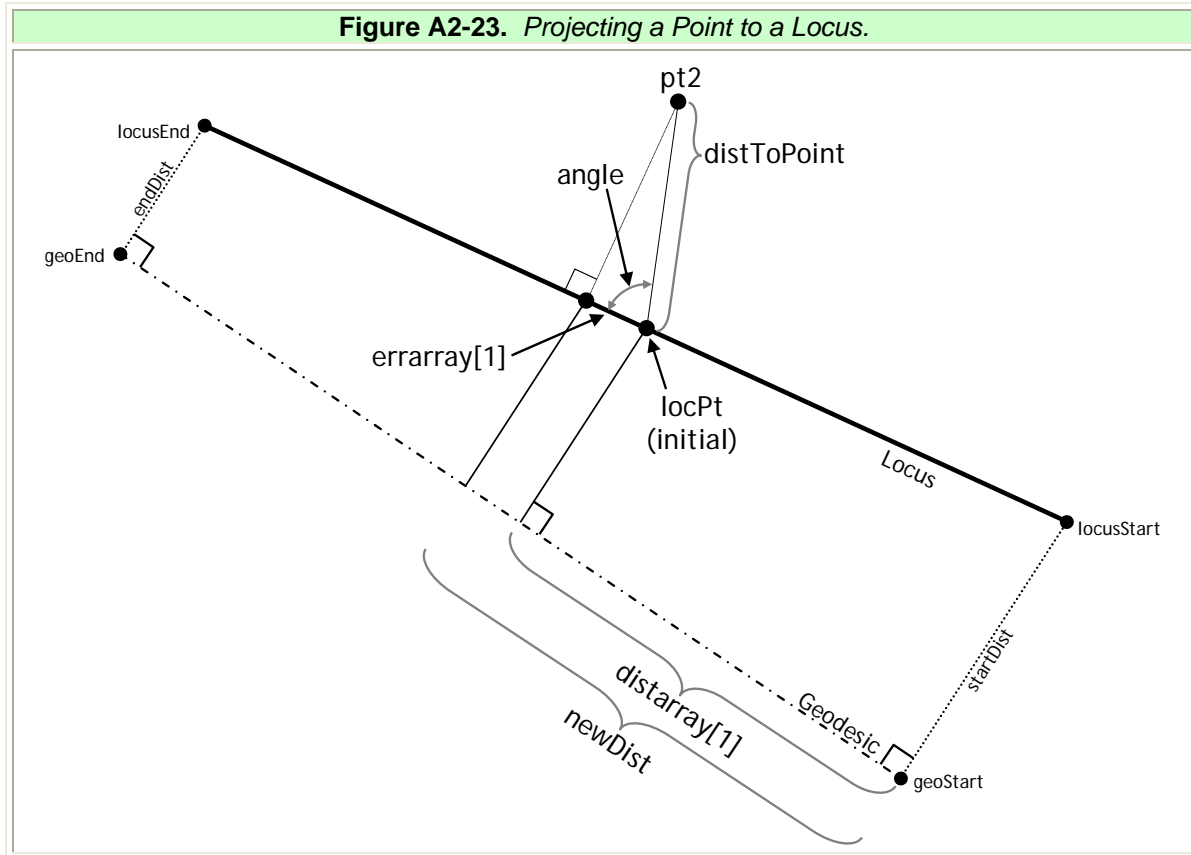

5.3 Tangent Projection from Point to Arc.

This projection is used in obstacle evaluation when finding the point on an **RF** leg or fly-by turn path where the distance to an obstacle must be measured.

5.3.1 Input/Output.

`LLPoint* WGS84PointToArcTangents(LLPoint point, LLPoint center, double radius, int* n, double tol)` returns a reference to an `LLPoint` structure that contains the coordinates of the points where geodesics through `point` are tangent to arc, where the inputs are:

<code>LLPoint point</code>	=	Point from which lines will be tangent to arc
<code>LLPoint center</code>	=	Geodetic centerpoint coordinates of arc
<code>double radius</code>	=	Radius of arc
<code>int* n</code>	=	Reference to number of tangent points found (0, 1, or 2)
<code>double tol</code>	=	Maximum error allowed in solution

double eps = Convergence parameter for forward/inverse algorithms

5.3.2 Algorithm Steps.

This algorithm treats the arc as a complete circle, so either zero or two tangent points will be returned. If the arc is bounded and two tangent points are found, then each point must be tested using *Algorithm 3.7* to determine whether they lie within the arc's bounds. (See figure A2-24)

STEP 1: Use the *inverse algorithm* to calculate the distance, azimuth, and reverse azimuth from point to center. Denote these values by `crsToCenter`, `crsFromCenter`, and `distToCenter`, respectively.

STEP 2: If $\text{abs}(\text{distToCenter} - \text{radius}) < \text{tol}$, then point lies on the arc and is a tangent point.

- a. Set `n = 1`
- b. Return `tanPt = point`

STEP 3: Else, if $\text{distToCenter} < \text{radius}$, then point lies inside of the arc and no tangent points exist.

- a. Return no solution.

STEP 4: End if

STEP 5: There must be two tangent points on the circle, so set `n = 2`

STEP 6: Use spherical trigonometry to compute approximate tangent points.

- a. $a = \text{distToCenter} / \text{SPHERE_RADIUS}$
- b. $b = \text{radius} / \text{SPHERE_RADIUS}$
- c. $c = \text{acos}(\tan(b) / \tan(a))$.

This is the approximate angle between the geodesic that joins `point` with `center` and the geodesic that joins `center` with either tangent point.

STEP 7: Initialize iteration count: `k = 0`


STEP 8: Do while (`k = 0`) or ($\text{abs}(\text{error}) > \text{tol}$ and `k < maxIterationCount`)

- a. Use the *direct algorithm* to locate `tanPt [0]` on arc. Use `center` as the starting point, `radius` as the distance, and `courseFromCenter+C` as the azimuth.
- b. Use the inverse algorithm to calculate the azimuth from `tanPt [0]` to `center`. Denote this value as `radCrs`.
- c. Use the *inverse algorithm* to calculate the azimuth from `tanPt [0]` to `point`. Denote this value as `tanCrs`.
- d. Use the function in *Algorithm 6.1* to calculate the angle between the two courses and cast it into the range $(-\pi, \pi]$:
$$\text{diff} = \text{signedAzimuthDifference}(\text{radCrs}, \text{tanCrs})$$
- e. Compute the error: $\text{error} = \text{abs}(\text{diff}) - \frac{\pi}{2}$
- f. Adjust the value of `C` to improve the approximation: $C = C + \text{error}$
- g. Increment the iteration count: $k = k + 1$

STEP 9: End while loop.

STEP 10: Repeat steps 7-9 to solve for `tanPt [1]`. In each iteration; however, use `crsFromPoint-C` for azimuth in step 8(a).

STEP 11: Return `tanPt [0]` and `tanPt [1]`

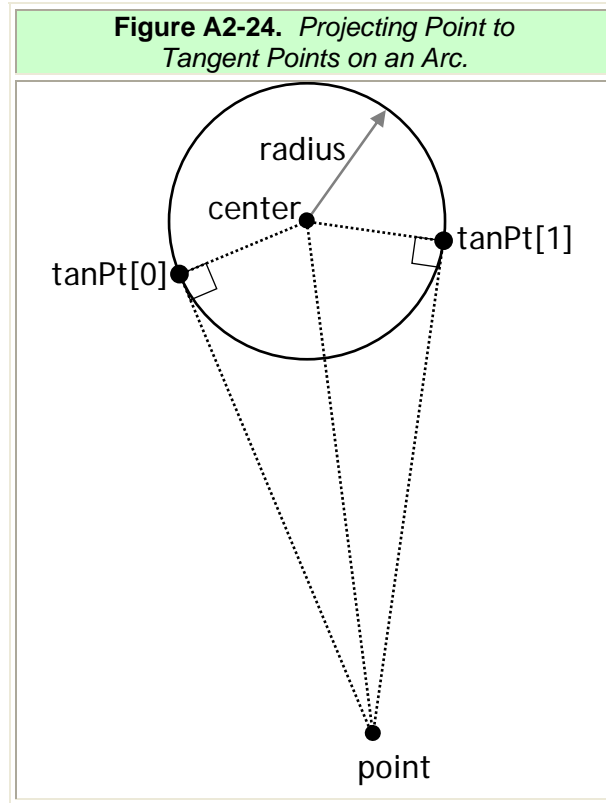

5.4 Project Arc to Geodesic.

This algorithm is used for obstacle evaluation when finding a point on the straight portion of *TF* leg where distance to an obstacle must be measured.

5.4.1 Input/Output.

`void WGS84PerpTangentPoints(LLPoint lineStart, double crs, LLPoint center, double radius, LLPoint linePts[2], LLPoint tanPts[2], double tol)` returns no output, where input values are:

<code>LLPoint lineStart</code>	=	Start point of geodesic to which arc tangent points will be projected
<code>double crs</code>	=	Initial course of geodesic
<code>LLPoint center</code>	=	Geodetic coordinates of arc center
<code>double radius</code>	=	Arc radius
<code>LLPoint linePts</code>	=	Array of projected points on geodesic
<code>LLPoint tanPts</code>	=	Array of tangent points on arc

double tol = Maximum error allowed in solution

double eps = Convergence parameter for forward/inverse algorithms

5.4.2 Algorithm Steps.

See *figure A2-25* for an illustration of the variable names.

STEP 1: Use the *inverse algorithm* to calculate the distance, azimuth, and reverse azimuth from `lineStart` to `center`. Denote these values as `distStartToCenter`, `crsStartToCenter`, and `crsCenterToStart`, respectively.

STEP 2: Compute the angle between the given geodesic and the geodesic that joins `lineStart` to `center` (see *Algorithm 6.1*):
 $\text{angle1} = \text{signedAzimuthDifference}(\text{crs}, \text{crsStartToCenter})$

STEP 3: If $\text{abs}(\text{distStartToCenter} * (\text{crsStartToCenter} - \text{crs})) < \text{tol}$, then `center` lies on the given geodesic, which is a diameter of the circle. In this case, the tangent points and project points are the same.

- a. Use the *direct algorithm* to compute `tanPts[0]`. Use `lineStart` as the starting point, `crs` as the azimuth, and `distStartToCenter - radius` as the distance.
- b. Use the *direct algorithm* to compute `tanPts[0]`. Use `lineStart` as the starting point, `crs` as the azimuth, and `distStartToCenter + radius` as the distance.
- c. Set `linePts[0] = tanPts[0]`
- d. Set `linePts[1] = tanPts[1]`
- e. Return all four points.

STEP 4: End if

STEP 5: Use *Algorithm 5.1* to project `center` to the geodesic defined by `lineStart` and `crs`. Denote the projected point by `perpPt`.

STEP 6: Use the *inverse algorithm* to calculate the distance, azimuth, and reverse azimuth from `perpPt` to `lineStart`. Denote these values by `dist12` and `crs21`, respectively.

STEP 7: Set `delta = radius`

STEP 8: Initialize iteration count: $k = 0$

STEP 9: Do while ($k = 0$) or ($\text{abs}(\text{error}) > \text{tol}$ and $k < \text{maxIterationCount}$)

- a. Use the *direct algorithm* to compute $\text{linePts}[0]$. Use perpPt as the starting point, delta as the distance, and $\text{crs21} + \pi$ as the azimuth.
- b. Use the *inverse algorithm* to calculate the course from $\text{linePts}[0]$ to perpPt . Denote this value by strCrs .
- c. Calculate the azimuth, perpCrs , from $\text{linePts}[0]$ to the desired position of $\text{tanPts}[0]$. The azimuth depends upon which side of the line the circle lies, which is given by the sign of angle1 :

$$\text{perpCrs} = \text{strCrs} - \text{sign}(\text{angle1}) * \pi / 2.$$
- d. Use *Algorithm 5.1* to project center onto the geodesic passing through $\text{linePts}[0]$ at azimuth perpCrs . Algorithm 5.1 will return the projected point, $\text{tanPts}[0]$, along with the distance from center to $\text{tanPts}[0]$. Denote this distance by radDist .
- e. Calculate the error, the amount that radDist differs from radius:


$$\text{error} = \text{radDist} - \text{radius}$$
- f. Adjust the distance from lineStart to $\text{linePts}[0]$:

$$\text{delta} = \text{delta} - \text{error}$$
- g. Increment the iteration count: $k = k + 1$

STEP 10: End while loop.

STEP 11: Repeat steps 7-10 to solve for $\text{linePts}[1]$ and $\text{tanPts}[1]$. In each iteration; however, use crs21 for azimuth in step a). Note that using the final delta value for the first iteration in the search for $\text{linePts}[1]$ will make the code more efficient (i.e., don't repeat *step 7*).

STEP 12: Return $\text{linePts}[0]$, $\text{linePts}[1]$, $\text{tanPts}[0]$, and $\text{tanPts}[1]$.

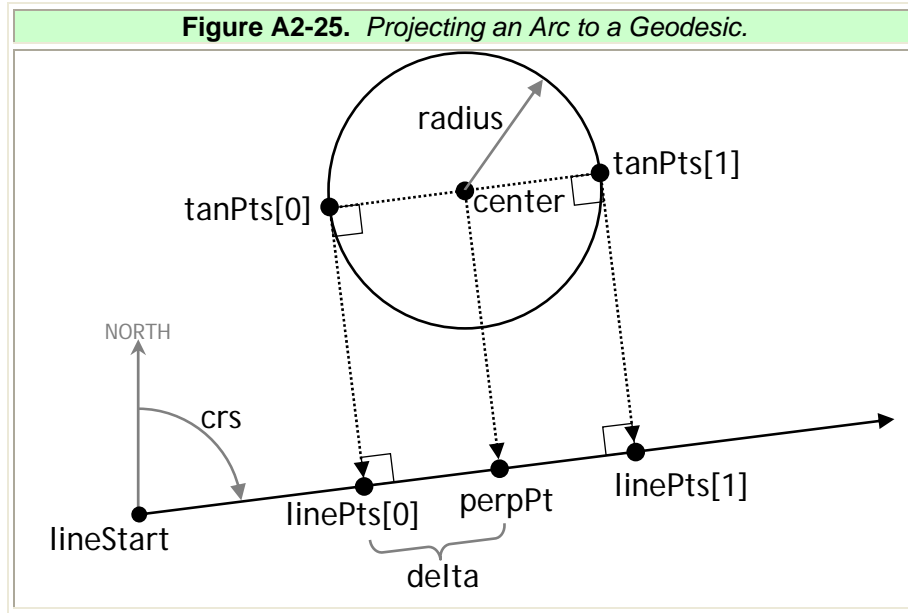

Attachment A - Useful Functions.

Attachment B - Calculate Angular Arc Extent.

When calculating the angle subtended by an arc, one must take into account the possibility that the arc crosses the northern branch cut, where $0^\circ = 360^\circ$. The following algorithm accounts for this case.

5.4.3 Input/Output.

`double WGS84GetArcExtent(double startCrs, double endCrs, int orientation, double tol)` returns a double precision value containing the arc's subtended angle, where the input values are:

`double startCrs` = Azimuth from center to start point of arc

`double endCrs` = Azimuth from center to end point of arc

`int orientation` = Integer that indicates the direction in which the arc is traversed to go from `startCrs` to `endCrs`.
`orientation = 1` if the arc is traversed counter-clockwise,
`orientation = -1` if the arc is traversed clockwise.

`double tol` = Maximum error allowed in calculations

`double eps` = Convergence parameter for forward/inverse algorithms

5.4.4 Algorithm Steps.

STEP 1: If `(abs(startCrs-endCrs) < tol)` return $2*\pi$

STEP 2: If `orientation < 0`, then orientation is clockwise. Cast the arc into a positive orientation so only one set of calculations is required

- a. `temp = startCrs`
- b. `startCrs = endCrs`
- c. `endCrs = temp`

STEP 3: End if

STEP 4: If `startCrs > endCrs`, then `angle = startCrs - endCrs`

STEP 5: Else `angle = 2*\pi + startCrs - endCrs`

STEP 6: End if

STEP 7: If `orientation < 0`, then `angle = -angle`

STEP 8: Return angle

6.0 Converting Geodetic Latitude/Longitude to *ECEF* Coordinates.

Geodetic coordinates may be converted to rectilinear *ECEF* coordinates using the following formulae¹. Given geodetic latitude φ , geodetic longitude θ , semi-major axis a and flattening parameter f , calculate the square of the eccentricity

$$e^2 = f(2 - f)$$

and the curvature in the prime vertical:

$$N = \frac{a}{\sqrt{1 - e^2 \sin^2 \varphi}}$$

The *ECEF* coordinates are then

$$\begin{aligned} x &= N \cos \varphi \cos \theta \\ y &= N \cos \varphi \sin \theta \\ z &= N(1 - e^2) \sin \varphi \end{aligned}$$

6.1 Signed Azimuth Difference.

It is often necessary to calculate the signed angular difference in azimuth between two geodesics at the point where they intersect. The following functions casts the difference between two geodesics into the range $[-\pi, \pi)$:

$$\text{signedAzimuthDifference}(a_1, a_2) = \text{mod}(a_1 - a_2 + \pi, 2\pi) - \pi$$

This function returns the angle between the two geodesics as if the geodesic that is oriented along azimuth a_1 were on the positive x -axis and the geodesic oriented along azimuth a_2 passed through the origin. In other words, if

$\text{signedAzimuthDifference}(a_1, a_2) > 0$ azimuth a_2 is to the left when standing at the geodesics' intersection point and facing in the direction of azimuth a_1 .

The mod function in the definition of `signedAzimuthDifference` must always return a non-negative value. Note that the C language's built in `fmod` function does not have this behavior, so a replacement must be supplied. The following code suffices:

```
double mod(double a, double b) {
  a = fmod(a, b);
  if (a < 0.0) a = a + b;
  return a;
}
```

6.2 Approximate Fixed Radius Arc Length.

Algorithm 3.8 describes a method for computing the length of an arc to high precision. The following algorithm provides a solution accurate to 1 centimeter for an arc whose radius is less than about 300 nautical miles (*NM*). This algorithm approximates the ellipsoid at the center of the arc in question with a “best fit” sphere, whose radius is

¹ Dana, Peter H., “Coordinate Conversion Geodetic Latitude, Longitude, and Height to ECEF, X, Y, Z”, <http://www.colorado.edu/geography/gcraft/notes/datum/gif/llhxyz.gif>, 11 February, 2003

computed as the geometric mean of the meridional and prime-vertical curvatures at the arc's center.

Given the arc center's latitude θ , the ellipsoidal semi-major axis a and flattening f , compute the local radius of curvature R as follows:

$$e^2 = f(2 - f)$$

$$M = \frac{a(1 - e^2)}{(1 - e^2 \sin^2 \theta)^{\frac{3}{2}}}$$

$$N = \frac{a}{\sqrt{1 - e^2 \sin^2 \theta}}$$

$$R = \sqrt{MN}$$

If the radius and subtended angle of the of the constant radius arc are r and A , respectively, then the length of the arc is given by:

$$L = AR \sin\left(\frac{r}{R}\right)$$

Test results for this formula and comparisons to *Algorithm 3.8* are given in *section 7.7*.

Attachment C**7.0 Sample Function Test Results.**

The following pages provide test inputs with expected outputs. This data is included here to make it easy to verify that an independent implementation of these algorithms produces the same results. All of these results were obtained using the tolerance parameter $\text{tol} = 1.0e-9$ and forward/inverse convergence parameter $\text{eps} = 0.5e-13$.

Test results are not included for those algorithms that are fairly straightforward applications of other algorithms, such as 3.9, 3.10, and 3.11.

WGS84 Direct Test Results

Test Identifier	Starting Latitude	Starting Longitude	Distance (NM)	Initial Azimuth (degrees)	Computed Destination Latitude	Computed Destination Longitude
test1	40:10:24.50000N	70:12:45.60000W	200.0	90.0	40:05:30.77099N	65:52:03.22158W
test2	40:10:24.50000N	70:12:45.60000W	200.0	0.0	43:30:29.87690N	70:12:45.60000W
test3	40:10:24.50000N	70:12:45.60000W	200.0	180.0	36:50:12.19034N	70:12:45.60000W
test4	40:10:24.50000N	70:12:45.60000W	200.0	270.0	40:05:30.77099N	74:33:27.97842W
test5	40:10:24.50000N	70:12:45.60000W	200.0	46.0	42:26:44.93817N	66:58:26.80185W
test6	40:10:24.50000N	70:12:45.60000W	200.0	127.0	38:06:56.47029N	66:50:21.71131W
test7	40:10:24.50000N	70:12:45.60000W	200.0	199.0	37:00:37.63806N	71:34:01.15378W
test8	40:10:24.50000N	70:12:45.60000W	200.0	277.0	40:29:56.05779N	74:33:04.77416W
test9	40:10:24.50000N	70:12:45.60000W	2.0	90.0	40:10:24.47060N	70:10:09.05140W
test10	40:10:24.50000N	70:12:45.60000W	2.0	0.0	40:12:24.58831N	70:12:45.60000W
test11	40:10:24.50000N	70:12:45.60000W	2.0	180.0	40:08:24.41100N	70:12:45.60000W
test12	40:10:24.50000N	70:12:45.60000W	2.0	270.0	40:10:24.47060N	70:15:22.14860W
test13	40:10:24.50000N	70:12:45.60000W	2.0	46.0	40:11:47.90520N	70:10:52.95004W
test14	40:10:24.50000N	70:12:45.60000W	2.0	127.0	40:09:12.20998N	70:10:40.61155W
test15	40:10:24.50000N	70:12:45.60000W	2.0	199.0	40:08:30.95052N	70:13:36.54366W
test16	40:10:24.50000N	70:12:45.60000W	2.0	277.0	40:10:39.10616N	70:15:20.99098W
test17	40:10:24.50000N	70:12:45.60000W	3000.0	90.0	24:30:24.17902N	13:01:17.08239W
test18	40:10:24.50000N	70:12:45.60000W	3000.0	0.0	89:58:28.94717N	109:47:14.40000E
test19	40:10:24.50000N	70:12:45.60000W	3000.0	180.0	10:00:44.08298S	70:12:45.60000W
test20	40:10:24.50000N	70:12:45.60000W	3000.0	270.0	24:30:24.17902N	127:24:14.11761W
test21	40:10:24.50000N	70:12:45.60000W	3000.0	46.0	55:17:03.30750N	4:30:00.21623E
test22	40:10:24.50000N	70:12:45.60000W	3000.0	127.0	3:28:31.38990N	32:28:57.95936W
test23	40:10:24.50000N	70:12:45.60000W	3000.0	199.0	8:09:04.17050S	84:46:29.97795W
test24	40:10:24.50000N	70:12:45.60000W	3000.0	277.0	29:06:16.65778N	130:30:47.88401W
test25	50:10:52.50000N	123:06:57.10000W	200.0	90.0	50:03:56.42973N	117:56:18.19536W
test26	50:10:52.50000N	123:06:57.10000W	200.0	0.0	53:30:36.93183N	123:06:57.10000W
test27	50:10:52.50000N	123:06:57.10000W	200.0	180.0	46:51:01.16657N	123:06:57.10000W
test28	50:10:52.50000N	123:06:57.10000W	200.0	270.0	50:03:56.42973N	128:17:36.00464W
test29	50:10:52.50000N	123:06:57.10000W	200.0	46.0	52:25:49.36941N	119:11:51.80053W
test30	50:10:52.50000N	123:06:57.10000W	200.0	127.0	48:06:24.18375N	119:08:33.75213W
test31	50:10:52.50000N	123:06:57.10000W	200.0	199.0	47:01:13.78683N	124:42:04.78016W
test32	50:10:52.50000N	123:06:57.10000W	200.0	277.0	50:28:19.21956N	128:17:55.21964W
test33	50:10:52.50000N	123:06:57.10000W	2.0	90.0	50:10:52.45833N	123:03:50.41132W
test34	50:10:52.50000N	123:06:57.10000W	2.0	0.0	50:12:52.37823N	123:06:57.10000W
test35	50:10:52.50000N	123:06:57.10000W	2.0	180.0	50:08:52.62108N	123:06:57.10000W
test36	50:10:52.50000N	123:06:57.10000W	2.0	270.0	50:10:52.45833N	123:10:03.78868W
test37	50:10:52.50000N	123:06:57.10000W	2.0	46.0	50:12:15.75291N	123:04:42.74250W
test38	50:10:52.50000N	123:06:57.10000W	2.0	127.0	50:09:40.32859N	123:04:28.06612W
test39	50:10:52.50000N	123:06:57.10000W	2.0	199.0	50:08:59.14786N	123:07:57.83998W
test40	50:10:52.50000N	123:06:57.10000W	2.0	277.0	50:11:07.06846N	123:10:02.41284W
test41	50:10:52.50000N	123:06:57.10000W	3000.0	90.0	29:37:18.55208N	61:31:12.91277W
test42	50:10:52.50000N	123:06:57.10000W	3000.0	0.0	80:00:57.51620N	56:53:02.90000E
test43	50:10:52.50000N	123:06:57.10000W	3000.0	180.0	0:02:43.03479N	123:06:57.10000W
test44	50:10:52.50000N	123:06:57.10000W	3000.0	270.0	29:37:18.55208N	175:17:18.71277E

test45	50:10:52.50000N	123:06:57.10000W	3000.0	46.0	56:40:22.79938N	33:42:20.71403W
test46	50:10:52.50000N	123:06:57.10000W	3000.0	127.0	11:23:14.37898N	84:34:26.55554W
test47	50:10:52.50000N	123:06:57.10000W	3000.0	199.0	1:35:14.22889N	137:32:13.52544W
test48	50:10:52.50000N	123:06:57.10000W	3000.0	277.0	33:39:39.03338N	171:08:27.87014E
test49	42:44:32.10000N	66:27:19.60000E	200.0	90.0	42:39:10.81410N	70:58:29.15259E
test50	42:44:32.10000N	66:27:19.60000E	200.0	0.0	46:04:32.07438N	66:27:19.60000E
test51	42:44:32.10000N	66:27:19.60000E	200.0	180.0	39:24:25.11928N	66:27:19.60000E
test52	42:44:32.10000N	66:27:19.60000E	200.0	270.0	42:39:10.81410N	61:56:10.04741E
test53	42:44:32.10000N	66:27:19.60000E	200.0	46.0	45:00:33.43147N	69:50:07.10761E
test54	42:44:32.10000N	66:27:19.60000E	200.0	127.0	40:40:50.71563N	69:57:17.17656E
test55	42:44:32.10000N	66:27:19.60000E	200.0	199.0	39:34:47.61048N	65:03:08.96220E
test56	42:44:32.10000N	66:27:19.60000E	200.0	277.0	43:03:35.51327N	61:56:24.98803E
test57	42:44:32.10000N	66:27:19.60000E	2.0	90.0	42:44:32.06784N	66:30:02.45101E
test58	42:44:32.10000N	66:27:19.60000E	2.0	0.0	42:46:32.13452N	66:27:19.60000E
test59	42:44:32.10000N	66:27:19.60000E	2.0	180.0	42:42:32.06478N	66:27:19.60000E
test60	42:44:32.10000N	66:27:19.60000E	2.0	270.0	42:44:32.06784N	66:24:36.74899E
test61	42:44:32.10000N	66:27:19.60000E	2.0	46.0	42:45:55.46641N	66:29:16.78884E
test62	42:44:32.10000N	66:27:19.60000E	2.0	127.0	42:43:19.84058N	66:29:29.61668E
test63	42:44:32.10000N	66:27:19.60000E	2.0	199.0	42:42:38.60108N	66:26:26.60774E
test64	42:44:32.10000N	66:27:19.60000E	2.0	277.0	42:44:46.69688N	66:24:37.95230E
test65	42:44:32.10000N	66:27:19.60000E	3000.0	90.0	25:52:49.48262N	124:39:55.85184E
test66	42:44:32.10000N	66:27:19.60000E	3000.0	0.0	87:25:13.54228N	113:32:40.40000W
test67	42:44:32.10000N	66:27:19.60000E	3000.0	180.0	7:25:57.78702S	66:27:19.60000E
test68	42:44:32.10000N	66:27:19.60000E	3000.0	270.0	25:52:49.48262N	8:14:43.34816E
test69	42:44:32.10000N	66:27:19.60000E	3000.0	46.0	55:52:47.54426N	144:47:50.12500E
test70	42:44:32.10000N	66:27:19.60000E	3000.0	127.0	5:30:44.95719N	104:18:35.77997E
test71	42:44:32.10000N	66:27:19.60000E	3000.0	199.0	5:39:14.93608S	51:58:13.27568E
test72	42:44:32.10000N	66:27:19.60000E	3000.0	277.0	30:21:08.45258N	4:52:35.40656E
test73	31:12:52.30000N	125:28:47.50000E	200.0	90.0	31:09:21.00038N	129:21:55.26637E
test74	31:12:52.30000N	125:28:47.50000E	200.0	0.0	34:33:15.83037N	125:28:47.50000E
test75	31:12:52.30000N	125:28:47.50000E	200.0	180.0	27:52:22.52362N	125:28:47.50000E
test76	31:12:52.30000N	125:28:47.50000E	200.0	270.0	31:09:21.00038N	121:35:39.73363E
test77	31:12:52.30000N	125:28:47.50000E	200.0	46.0	33:30:10.60726N	128:20:48.89100E
test78	31:12:52.30000N	125:28:47.50000E	200.0	127.0	29:10:03.77133N	128:31:13.43437E
test79	31:12:52.30000N	125:28:47.50000E	200.0	199.0	28:02:57.01708N	124:15:14.09016E
test80	31:12:52.30000N	125:28:47.50000E	200.0	277.0	31:33:48.07660N	121:36:24.04854E
test81	31:12:52.30000N	125:28:47.50000E	2.0	90.0	31:12:52.27886N	125:31:07.43524E
test82	31:12:52.30000N	125:28:47.50000E	2.0	0.0	31:14:52.56685N	125:28:47.50000E
test83	31:12:52.30000N	125:28:47.50000E	2.0	180.0	31:10:52.03253N	125:28:47.50000E
test84	31:12:52.30000N	125:28:47.50000E	2.0	270.0	31:12:52.27886N	125:26:27.56476E
test85	31:12:52.30000N	125:28:47.50000E	2.0	46.0	31:14:15.83349N	125:30:28.18558E
test86	31:12:52.30000N	125:28:47.50000E	2.0	127.0	31:11:39.90782N	125:30:39.23361E
test87	31:12:52.30000N	125:28:47.50000E	2.0	199.0	31:10:58.58265N	125:28:01.95668E
test88	31:12:52.30000N	125:28:47.50000E	2.0	277.0	31:13:06.93605N	125:26:28.60187E
test89	31:12:52.30000N	125:28:47.50000E	3000.0	90.0	19:27:03.05786N	179:41:20.83695E
test90	31:12:52.30000N	125:28:47.50000E	3000.0	0.0	81:07:29.93181N	125:28:47.50000E
test91	31:12:52.30000N	125:28:47.50000E	3000.0	180.0	18:59:46.09922S	125:28:47.50000E
test92	31:12:52.30000N	125:28:47.50000E	3000.0	270.0	19:27:03.05786N	71:16:14.16305E

test93	31:12:52.30000N	125:28:47.50000E	3000.0	46.0	52:04:30.90569N	171:09:46.53647W
test94	31:12:52.30000N	125:28:47.50000E	3000.0	127.0	3:37:54.96189S	163:12:50.99996E
test95	31:12:52.30000N	125:28:47.50000E	3000.0	199.0	16:50:15.39672S	110:24:43.33889E
test96	31:12:52.30000N	125:28:47.50000E	3000.0	277.0	24:24:11.81091N	69:01:02.24210E
test97	49:10:24.50000S	75:12:45.60000W	200.0	90.0	49:03:42.87631S	70:08:25.93407W
test98	49:10:24.50000S	75:12:45.60000W	200.0	0.0	45:50:31.05302S	75:12:45.60000W
test99	49:10:24.50000S	75:12:45.60000W	200.0	180.0	52:30:11.00366S	75:12:45.60000W
test100	49:10:24.50000S	75:12:45.60000W	200.0	270.0	49:03:42.87631S	80:17:05.26593W
test101	49:10:24.50000S	75:12:45.60000W	200.0	46.0	46:48:17.31010S	71:43:18.85029W
test102	49:10:24.50000S	75:12:45.60000W	200.0	127.0	51:06:09.21946S	70:59:16.31551W
test103	49:10:24.50000S	75:12:45.60000W	200.0	199.0	52:18:31.88478S	76:58:48.10816W
test104	49:10:24.50000S	75:12:45.60000W	200.0	277.0	48:39:31.53843S	80:12:23.46911W
test105	49:10:24.50000S	75:12:45.60000W	2.0	90.0	49:10:24.45978S	75:09:42.72995W
test106	49:10:24.50000S	75:12:45.60000W	2.0	0.0	49:08:24.60011S	75:12:45.60000W
test107	49:10:24.50000S	75:12:45.60000W	2.0	180.0	49:12:24.39920S	75:12:45.60000W
test108	49:10:24.50000S	75:12:45.60000W	2.0	270.0	49:10:24.45978S	75:15:48.47005W
test109	49:10:24.50000S	75:12:45.60000W	2.0	46.0	49:09:01.18981S	75:10:34.11555W
test110	49:10:24.50000S	75:12:45.60000W	2.0	127.0	49:11:36.63156S	75:10:19.49448W
test111	49:10:24.50000S	75:12:45.60000W	2.0	199.0	49:12:17.86267S	75:13:45.17447W
test112	49:10:24.50000S	75:12:45.60000W	2.0	277.0	49:10:09.84830S	75:15:47.09213W
test113	49:10:24.50000S	75:12:45.60000W	3000.0	90.0	29:08:15.41939S	14:06:51.81153W
test114	49:10:24.50000S	75:12:45.60000W	3000.0	0.0	0:58:06.24146N	75:12:45.60000W
test115	49:10:24.50000S	75:12:45.60000W	3000.0	180.0	81:01:11.20478S	104:47:14.40000E
test116	49:10:24.50000S	75:12:45.60000W	3000.0	270.0	29:08:15.41939S	136:18:39.38847W
test117	49:10:24.50000S	75:12:45.60000W	3000.0	46.0	7:52:38.83544S	41:28:29.05694W
test118	49:10:24.50000S	75:12:45.60000W	3000.0	127.0	52:04:51.42106S	7:52:24.35518E
test119	49:10:24.50000S	75:12:45.60000W	3000.0	199.0	73:51:36.66725S	168:08:53.56896E
test120	49:10:24.50000S	75:12:45.60000W	3000.0	277.0	25:11:20.18815S	132:13:38.05215W
test121	43:10:45.70000S	123:42:43.40000W	200.0	90.0	43:05:19.50216S	119:09:38.75232W
test122	43:10:45.70000S	123:42:43.40000W	200.0	0.0	39:50:39.63379S	123:42:43.40000W
test123	43:10:45.70000S	123:42:43.40000W	200.0	180.0	46:30:44.75296S	123:42:43.40000W
test124	43:10:45.70000S	123:42:43.40000W	200.0	270.0	43:05:19.50216S	128:15:48.04768W
test125	43:10:45.70000S	123:42:43.40000W	200.0	46.0	40:49:05.78329S	120:33:14.53881W
test126	43:10:45.70000S	123:42:43.40000W	200.0	127.0	45:07:29.89631S	119:57:05.47191W
test127	43:10:45.70000S	123:42:43.40000W	200.0	199.0	46:19:13.99376S	125:16:37.84869W
test128	43:10:45.70000S	123:42:43.40000W	200.0	277.0	42:41:04.43281S	128:11:59.62018W
test129	43:10:45.70000S	123:42:43.40000W	2.0	90.0	43:10:45.66735S	123:39:59.39209W
test130	43:10:45.70000S	123:42:43.40000W	2.0	0.0	43:08:45.67398S	123:42:43.40000W
test131	43:10:45.70000S	123:42:43.40000W	2.0	180.0	43:12:45.72532S	123:42:43.40000W
test132	43:10:45.70000S	123:42:43.40000W	2.0	270.0	43:10:45.66735S	123:45:27.40791W
test133	43:10:45.70000S	123:42:43.40000W	2.0	46.0	43:09:22.30610S	123:40:45.46715W
test134	43:10:45.70000S	123:42:43.40000W	2.0	127.0	43:11:57.91229S	123:40:32.37455W
test135	43:10:45.70000S	123:42:43.40000W	2.0	199.0	43:12:39.18273S	123:43:36.82325W
test136	43:10:45.70000S	123:42:43.40000W	2.0	277.0	43:10:31.04038S	123:45:26.17463W
test137	43:10:45.70000S	123:42:43.40000W	3000.0	90.0	26:06:37.08296S	65:19:15.88930W
test138	43:10:45.70000S	123:42:43.40000W	3000.0	0.0	6:59:37.06995N	123:42:43.40000W
test139	43:10:45.70000S	123:42:43.40000W	3000.0	180.0	86:59:08.38590S	56:17:16.60000E
test140	43:10:45.70000S	123:42:43.40000W	3000.0	270.0	26:06:37.08296S	177:53:49.08930E

test141	43:10:45.70000S	123:42:43.40000W	3000.0	46.0	2:51:33.84923S	90:17:19.02340W
test142	43:10:45.70000S	123:42:43.40000W	3000.0	127.0	50:58:42.47481S	48:01:25.22327W
test143	43:10:45.70000S	123:42:43.40000W	3000.0	199.0	75:32:45.23169S	140:44:35.89858E
test144	43:10:45.70000S	123:42:43.40000W	3000.0	277.0	21:49:17.43560S	178:34:03.34260W
test145	30:13:55.50000S	54:53:17.40000E	200.0	90.0	30:10:32.24599S	58:44:04.46955E
test146	30:13:55.50000S	54:53:17.40000E	200.0	0.0	26:53:23.96278S	54:53:17.40000E
test147	30:13:55.50000S	54:53:17.40000E	200.0	180.0	33:34:20.90547S	54:53:17.40000E
test148	30:13:55.50000S	54:53:17.40000E	200.0	270.0	30:10:32.24599S	51:02:30.33045E
test149	30:13:55.50000S	54:53:17.40000E	200.0	46.0	27:52:57.82170S	57:35:36.72392E
test150	30:13:55.50000S	54:53:17.40000E	200.0	127.0	32:12:18.30198S	58:01:31.85506E
test151	30:13:55.50000S	54:53:17.40000E	200.0	199.0	33:23:02.92727S	53:35:33.92865E
test152	30:13:55.50000S	54:53:17.40000E	200.0	277.0	29:46:10.92312S	51:05:09.54001E
test153	30:13:55.50000S	54:53:17.40000E	2.0	90.0	30:13:55.47966S	54:55:35.92341E
test154	30:13:55.50000S	54:53:17.40000E	2.0	0.0	30:11:55.21431S	54:53:17.40000E
test155	30:13:55.50000S	54:53:17.40000E	2.0	180.0	30:15:55.78508S	54:53:17.40000E
test156	30:13:55.50000S	54:53:17.40000E	2.0	270.0	30:13:55.47966S	54:50:58.87659E
test157	30:13:55.50000S	54:53:17.40000E	2.0	46.0	30:12:31.93209S	54:54:57.02201E
test158	30:13:55.50000S	54:53:17.40000E	2.0	127.0	30:15:07.87646S	54:55:08.05224E
test159	30:13:55.50000S	54:53:17.40000E	2.0	199.0	30:15:49.22963S	54:52:32.28676E
test160	30:13:55.50000S	54:53:17.40000E	2.0	277.0	30:13:40.82086S	54:50:59.91478E
test161	30:13:55.50000S	54:53:17.40000E	3000.0	90.0	18:52:29.86498S	108:49:20.15190E
test162	30:13:55.50000S	54:53:17.40000E	3000.0	0.0	19:58:48.22673N	54:53:17.40000E
test163	30:13:55.50000S	54:53:17.40000E	3000.0	180.0	80:08:58.44983S	54:53:17.40000E
test164	30:13:55.50000S	54:53:17.40000E	3000.0	270.0	18:52:29.86498S	0:57:14.64810E
test165	30:13:55.50000S	54:53:17.40000E	3000.0	46.0	7:58:13.96628N	88:37:37.35172E
test166	30:13:55.50000S	54:53:17.40000E	3000.0	127.0	46:16:23.75384S	116:51:12.92431E
test167	30:13:55.50000S	54:53:17.40000E	3000.0	199.0	71:41:54.15847S	2:36:27.57861E
test168	30:13:55.50000S	54:53:17.40000E	3000.0	277.0	14:01:56.87883S	3:23:24.56420E
test169	71:03:45.50000S	155:13:37.40000E	200.0	90.0	70:47:04.46404S	165:21:13.27121E
test170	71:03:45.50000S	155:13:37.40000E	200.0	0.0	67:44:32.20108S	155:13:37.40000E
test171	71:03:45.50000S	155:13:37.40000E	200.0	180.0	74:22:54.50904S	155:13:37.40000E
test172	71:03:45.50000S	155:13:37.40000E	200.0	270.0	70:47:04.46404S	145:06:01.52879E
test173	71:03:45.50000S	155:13:37.40000E	200.0	46.0	68:37:38.70618S	161:47:11.03268E
test174	71:03:45.50000S	155:13:37.40000E	200.0	127.0	72:51:42.35787S	164:14:58.08728E
test175	71:03:45.50000S	155:13:37.40000E	200.0	199.0	74:09:55.67082S	151:16:06.01068E
test176	71:03:45.50000S	155:13:37.40000E	200.0	277.0	70:23:23.03906S	145:22:23.31016E
test177	71:03:45.50000S	155:13:37.40000E	2.0	90.0	71:03:45.39916S	155:19:45.39068E
test178	71:03:45.50000S	155:13:37.40000E	2.0	0.0	71:01:45.98931S	155:13:37.40000E
test179	71:03:45.50000S	155:13:37.40000E	2.0	180.0	71:05:45.01026S	155:13:37.40000E
test180	71:03:45.50000S	155:13:37.40000E	2.0	270.0	71:03:45.39916S	155:07:29.40932E
test181	71:03:45.50000S	155:13:37.40000E	2.0	46.0	71:02:22.42883S	155:18:01.80054E
test182	71:03:45.50000S	155:13:37.40000E	2.0	127.0	71:04:57.35874S	155:18:31.58931E
test183	71:03:45.50000S	155:13:37.40000E	2.0	199.0	71:05:38.48847S	155:11:37.40237E
test184	71:03:45.50000S	155:13:37.40000E	2.0	277.0	71:03:30.83602S	155:07:32.22736E
test185	71:03:45.50000S	155:13:37.40000E	3000.0	90.0	37:33:28.76348S	130:07:28.60879W
test186	71:03:45.50000S	155:13:37.40000E	3000.0	0.0	21:04:35.11214S	155:13:37.40000E
test187	71:03:45.50000S	155:13:37.40000E	3000.0	180.0	59:09:32.80147S	24:46:22.60000W
test188	71:03:45.50000S	155:13:37.40000E	3000.0	270.0	37:33:28.76348S	80:34:43.40879E

MM/DD/YY

8260.42B

test189	71:03:45.50000S	155:13:37.40000E	3000.0	46.0	25:50:57.88581S	167:05:40.45264W
test190	71:03:45.50000S	155:13:37.40000E	3000.0	127.0	49:25:34.58238S	94:31:25.79851W
test191	71:03:45.50000S	155:13:37.40000E	3000.0	199.0	57:40:40.95961S	2:56:35.65351E
test192	71:03:45.50000S	155:13:37.40000E	3000.0	277.0	35:23:25.31483S	86:40:04.05968E

WGS84 Inverse Test Results

Test Identifier	Starting Latitude	Starting Longitude	Destination Latitude	Destination Longitude	Computed Azimuth (degrees)	Computed Reverse Azimuth (degrees)	Computed Distance (NM)
test1	40:10:24.50000N	70:12:45.60000W	40:05:30.77099N	65:52:03.22158W	90.00000	272.80147	200.00000
test2	40:10:24.50000N	70:12:45.60000W	43:30:29.87690N	70:12:45.60000W	0.00000	180.00000	200.00000
test3	40:10:24.50000N	70:12:45.60000W	36:50:12.19034N	70:12:45.60000W	180.00000	0.00000	200.00000
test4	40:10:24.50000N	70:12:45.60000W	40:05:30.77099N	74:33:27.97842W	270.00000	87.19853	200.00000
test5	40:10:24.50000N	70:12:45.60000W	42:26:44.93817N	66:58:26.80185W	46.00000	228.13861	200.00000
test6	40:10:24.50000N	70:12:45.60000W	38:06:56.47029N	66:50:21.71131W	127.00000	309.13021	200.00000
test7	40:10:24.50000N	70:12:45.60000W	37:00:37.63806N	71:34:01.15378W	199.00000	18.15487	200.00000
test8	40:10:24.50000N	70:12:45.60000W	40:29:56.05779N	74:33:04.77416W	277.00000	94.19092	200.00000
test9	40:10:24.50000N	70:12:45.60000W	40:10:24.47060N	70:10:09.05140W	90.00000	270.02805	2.00000
test10	40:10:24.50000N	70:12:45.60000W	40:12:24.58831N	70:12:45.60000W	0.00000	180.00000	2.00000
test11	40:10:24.50000N	70:12:45.60000W	40:08:24.41100N	70:12:45.60000W	180.00000	0.00000	2.00000
test12	40:10:24.50000N	70:12:45.60000W	40:10:24.47060N	70:15:22.14860W	270.00000	89.97195	2.00000
test13	40:10:24.50000N	70:12:45.60000W	40:11:47.90520N	70:10:52.95004W	46.00000	226.02019	2.00000
test14	40:10:24.50000N	70:12:45.60000W	40:09:12.20998N	70:10:40.61155W	127.00000	307.02239	2.00000
test15	40:10:24.50000N	70:12:45.60000W	40:08:30.95052N	70:13:36.54366W	199.00000	18.99087	2.00000
test16	40:10:24.50000N	70:12:45.60000W	40:10:39.10616N	70:15:20.99098W	277.00000	96.97215	2.00000
test17	40:10:24.50000N	70:12:45.60000W	24:30:24.17902N	13:01:17.08239W	90.00000	302.81413	3000.00000
test18	40:10:24.50000N	70:12:45.60000W	89:58:28.94717N	109:47:14.40000E	0.00000	0.00000	3000.00000
test19	40:10:24.50000N	70:12:45.60000W	10:00:44.08298S	70:12:45.60000W	180.00000	0.00000	3000.00000
test20	40:10:24.50000N	70:12:45.60000W	24:30:24.17902N	127:24:14.11761W	270.00000	57.18587	3000.00000
test21	40:10:24.50000N	70:12:45.60000W	55:17:03.30750N	4:30:00.21623E	46.00000	285.35933	3000.00000
test22	40:10:24.50000N	70:12:45.60000W	3:28:31.38990N	32:28:57.95936W	127.00000	322.25100	3000.00000
test23	40:10:24.50000N	70:12:45.60000W	8:09:04.17050S	84:46:29.97795W	199.00000	14.57444	3000.00000
test24	40:10:24.50000N	70:12:45.60000W	29:06:16.65778N	130:30:47.88401W	277.00000	60.28734	3000.00000
test25	50:10:52.50000N	123:06:57.10000W	50:03:56.42973N	117:56:18.19536W	90.00000	273.97445	200.00000
test26	50:10:52.50000N	123:06:57.10000W	53:30:36.93183N	123:06:57.10000W	0.00000	180.00000	200.00000
test27	50:10:52.50000N	123:06:57.10000W	46:51:01.16657N	123:06:57.10000W	180.00000	0.00000	200.00000
test28	50:10:52.50000N	123:06:57.10000W	50:03:56.42973N	128:17:36.00464W	270.00000	86.02555	200.00000
test29	50:10:52.50000N	123:06:57.10000W	52:25:49.36941N	119:11:51.80053W	46.00000	229.05914	200.00000
test30	50:10:52.50000N	123:06:57.10000W	48:06:24.18375N	119:08:33.75213W	127.00000	310.00613	200.00000
test31	50:10:52.50000N	123:06:57.10000W	47:01:13.78683N	124:42:04.78016W	199.00000	17.81022	200.00000
test32	50:10:52.50000N	123:06:57.10000W	50:28:19.21956N	128:17:55.21964W	277.00000	93.00968	200.00000
test33	50:10:52.50000N	123:06:57.10000W	50:10:52.45833N	123:03:50.41132W	90.00000	270.03983	2.00000
test34	50:10:52.50000N	123:06:57.10000W	50:12:52.37823N	123:06:57.10000W	0.00000	180.00000	2.00000
test35	50:10:52.50000N	123:06:57.10000W	50:08:52.62108N	123:06:57.10000W	180.00000	0.00000	2.00000
test36	50:10:52.50000N	123:06:57.10000W	50:10:52.45833N	123:10:03.78868W	270.00000	89.96017	2.00000
test37	50:10:52.50000N	123:06:57.10000W	50:12:15.75291N	123:04:42.74250W	46.00000	226.02867	2.00000
test38	50:10:52.50000N	123:06:57.10000W	50:09:40.32859N	123:04:28.06612W	127.00000	307.03179	2.00000
test39	50:10:52.50000N	123:06:57.10000W	50:08:59.14786N	123:07:57.83998W	199.00000	18.98704	2.00000
test40	50:10:52.50000N	123:06:57.10000W	50:11:07.06846N	123:10:02.41284W	277.00000	96.96046	2.00000
test41	50:10:52.50000N	123:06:57.10000W	29:37:18.55208N	61:31:12.91277W	90.00000	312.48202	3000.00000
test42	50:10:52.50000N	123:06:57.10000W	80:00:57.51620N	56:53:02.90000E	0.00000	360.00000	3000.00000
test43	50:10:52.50000N	123:06:57.10000W	0:02:43.03479N	123:06:57.10000W	180.00000	0.00000	3000.00000
test44	50:10:52.50000N	123:06:57.10000W	29:37:18.55208N	175:17:18.71277E	270.00000	47.51798	3000.00000

test45	50:10:52.50000N	123:06:57.10000W	56:40:22.79938N	33:42:20.71403W	46.00000	303.05928	3000.00000
test46	50:10:52.50000N	123:06:57.10000W	11:23:14.37898N	84:34:26.55554W	127.00000	328.48986	3000.00000
test47	50:10:52.50000N	123:06:57.10000W	1:35:14.22889N	137:32:13.52544W	199.00000	12.06222	3000.00000
test48	50:10:52.50000N	123:06:57.10000W	33:39:39.03338N	171:08:27.87014E	277.00000	49.84895	3000.00000
test49	42:44:32.10000N	66:27:19.60000E	42:39:10.81410N	70:58:29.15259E	90.00000	273.06555	200.00000
test50	42:44:32.10000N	66:27:19.60000E	46:04:32.07438N	66:27:19.60000E	360.00000	180.00000	200.00000
test51	42:44:32.10000N	66:27:19.60000E	39:24:25.11928N	66:27:19.60000E	180.00000	0.00000	200.00000
test52	42:44:32.10000N	66:27:19.60000E	42:39:10.81410N	61:56:10.04741E	270.00000	86.93445	200.00000
test53	42:44:32.10000N	66:27:19.60000E	45:00:33.43147N	69:50:07.10761E	46.00000	228.34339	200.00000
test54	42:44:32.10000N	66:27:19.60000E	40:40:50.71563N	69:57:17.17656E	127.00000	309.32917	200.00000
test55	42:44:32.10000N	66:27:19.60000E	39:34:47.61048N	65:03:08.96220E	199.00000	18.07623	200.00000
test56	42:44:32.10000N	66:27:19.60000E	43:03:35.51327N	61:56:24.98803E	277.00000	93.92550	200.00000
test57	42:44:32.10000N	66:27:19.60000E	42:44:32.06784N	66:30:02.45101E	90.00000	270.03070	2.00000
test58	42:44:32.10000N	66:27:19.60000E	42:46:32.13452N	66:27:19.60000E	360.00000	180.00000	2.00000
test59	42:44:32.10000N	66:27:19.60000E	42:42:32.06478N	66:27:19.60000E	180.00000	0.00000	2.00000
test60	42:44:32.10000N	66:27:19.60000E	42:44:32.06784N	66:24:36.74899E	270.00000	89.96930	2.00000
test61	42:44:32.10000N	66:27:19.60000E	42:45:55.46641N	66:29:16.78884E	46.00000	226.02210	2.00000
test62	42:44:32.10000N	66:27:19.60000E	42:43:19.84058N	66:29:29.61668E	127.00000	307.02451	2.00000
test63	42:44:32.10000N	66:27:19.60000E	42:42:38.60108N	66:26:26.60774E	199.00000	18.99001	2.00000
test64	42:44:32.10000N	66:27:19.60000E	42:44:46.69688N	66:24:37.95230E	277.00000	96.96952	2.00000
test65	42:44:32.10000N	66:27:19.60000E	25:52:49.48262N	124:39:55.85184E	90.00000	305.21226	3000.00000
test66	42:44:32.10000N	66:27:19.60000E	87:25:13.54228N	113:32:40.40000W	360.00000	0.00000	3000.00000
test67	42:44:32.10000N	66:27:19.60000E	7:25:57.78702S	66:27:19.60000E	180.00000	0.00000	3000.00000
test68	42:44:32.10000N	66:27:19.60000E	25:52:49.48262N	8:14:43.34816E	270.00000	54.78774	3000.00000
test69	42:44:32.10000N	66:27:19.60000E	55:52:47.54426N	144:47:50.12500E	46.00000	289.76179	3000.00000
test70	42:44:32.10000N	66:27:19.60000E	5:30:44.95719N	104:18:35.77997E	127.00000	323.83257	3000.00000
test71	42:44:32.10000N	66:27:19.60000E	5:39:14.93608S	51:58:13.27568E	199.00000	13.92399	3000.00000
test72	42:44:32.10000N	66:27:19.60000E	30:21:08.45258N	4:52:35.40656E	277.00000	57.70460	3000.00000
test73	31:12:52.30000N	125:28:47.50000E	31:09:21.00038N	129:21:55.26637E	90.00000	272.01250	200.00000
test74	31:12:52.30000N	125:28:47.50000E	34:33:15.83037N	125:28:47.50000E	0.00000	180.00000	200.00000
test75	31:12:52.30000N	125:28:47.50000E	27:52:22.52362N	125:28:47.50000E	180.00000	360.00000	200.00000
test76	31:12:52.30000N	125:28:47.50000E	31:09:21.00038N	121:35:39.73363E	270.00000	87.98750	200.00000
test77	31:12:52.30000N	125:28:47.50000E	33:30:10.60726N	128:20:48.89100E	46.00000	227.53504	200.00000
test78	31:12:52.30000N	125:28:47.50000E	29:10:03.77133N	128:31:13.43437E	127.00000	308.52956	200.00000
test79	31:12:52.30000N	125:28:47.50000E	28:02:57.01708N	124:15:14.09016E	199.00000	18.39361	200.00000
test80	31:12:52.30000N	125:28:47.50000E	31:33:48.07660N	121:36:24.04854E	277.00000	94.98210	200.00000
test81	31:12:52.30000N	125:28:47.50000E	31:12:52.27886N	125:31:07.43524E	90.00000	270.02014	2.00000
test82	31:12:52.30000N	125:28:47.50000E	31:14:52.56685N	125:28:47.50000E	0.00000	180.00000	2.00000
test83	31:12:52.30000N	125:28:47.50000E	31:10:52.03253N	125:28:47.50000E	180.00000	360.00000	2.00000
test84	31:12:52.30000N	125:28:47.50000E	31:12:52.27886N	125:26:27.56476E	270.00000	89.97986	2.00000
test85	31:12:52.30000N	125:28:47.50000E	31:14:15.83349N	125:30:28.18558E	46.00000	226.01450	2.00000
test86	31:12:52.30000N	125:28:47.50000E	31:11:39.90782N	125:30:39.23361E	127.00000	307.01608	2.00000
test87	31:12:52.30000N	125:28:47.50000E	31:10:58.58265N	125:28:01.95668E	199.00000	18.99345	2.00000
test88	31:12:52.30000N	125:28:47.50000E	31:13:06.93605N	125:26:28.60187E	277.00000	96.98000	2.00000
test89	31:12:52.30000N	125:28:47.50000E	19:27:03.05786N	179:41:20.83695E	90.00000	294.84102	3000.00000
test90	31:12:52.30000N	125:28:47.50000E	81:07:29.93181N	125:28:47.50000E	0.00000	180.00000	3000.00000
test91	31:12:52.30000N	125:28:47.50000E	18:59:46.09922S	125:28:47.50000E	180.00000	360.00000	3000.00000
test92	31:12:52.30000N	125:28:47.50000E	19:27:03.05786N	71:16:14.16305E	270.00000	65.15898	3000.00000

test93	31:12:52.30000N	125:28:47.50000E	52:04:30.90569N	171:09:46.53647W	46.00000	271.27816	3000.00000
test94	31:12:52.30000N	125:28:47.50000E	3:37:54.96189S	163:12:50.99996E	127.00000	316.76433	3000.00000
test95	31:12:52.30000N	125:28:47.50000E	16:50:15.39672S	110:24:43.33889E	199.00000	16.92311	3000.00000
test96	31:12:52.30000N	125:28:47.50000E	24:24:11.81091N	69:01:02.24210E	277.00000	68.81857	3000.00000
test97	49:10:24.50000S	75:12:45.60000W	49:03:42.87631S	70:08:25.93407W	90.00000	266.16411	200.00000
test98	49:10:24.50000S	75:12:45.60000W	45:50:31.05302S	75:12:45.60000W	0.00000	180.00000	200.00000
test99	49:10:24.50000S	75:12:45.60000W	52:30:11.00366S	75:12:45.60000W	180.00000	0.00000	200.00000
test100	49:10:24.50000S	75:12:45.60000W	49:03:42.87631S	80:17:05.26593W	270.00000	93.83589	200.00000
test101	49:10:24.50000S	75:12:45.60000W	46:48:17.31010S	71:43:18.85029W	46.00000	223.40538	200.00000
test102	49:10:24.50000S	75:12:45.60000W	51:06:09.21946S	70:59:16.31551W	127.00000	303.75602	200.00000
test103	49:10:24.50000S	75:12:45.60000W	52:18:31.88478S	76:58:48.10816W	199.00000	20.36902	200.00000
test104	49:10:24.50000S	75:12:45.60000W	48:39:31.53843S	80:12:23.46911W	277.00000	100.76518	200.00000
test105	49:10:24.50000S	75:12:45.60000W	49:10:24.45978S	75:09:42.72995W	90.00000	269.96156	2.00000
test106	49:10:24.50000S	75:12:45.60000W	49:08:24.60011S	75:12:45.60000W	0.00000	180.00000	2.00000
test107	49:10:24.50000S	75:12:45.60000W	49:12:24.39920S	75:12:45.60000W	180.00000	0.00000	2.00000
test108	49:10:24.50000S	75:12:45.60000W	49:10:24.45978S	75:15:48.47005W	270.00000	90.03844	2.00000
test109	49:10:24.50000S	75:12:45.60000W	49:09:01.18981S	75:10:34.11555W	46.00000	225.97237	2.00000
test110	49:10:24.50000S	75:12:45.60000W	49:11:36.63156S	75:10:19.49448W	127.00000	306.96929	2.00000
test111	49:10:24.50000S	75:12:45.60000W	49:12:17.86267S	75:13:45.17447W	199.00000	19.01253	2.00000
test112	49:10:24.50000S	75:12:45.60000W	49:10:09.84830S	75:15:47.09213W	277.00000	97.03815	2.00000
test113	49:10:24.50000S	75:12:45.60000W	29:08:15.41939S	14:06:51.81153W	90.00000	228.53270	3000.00000
test114	49:10:24.50000S	75:12:45.60000W	0:58:06.24146N	75:12:45.60000W	0.00000	180.00000	3000.00000
test115	49:10:24.50000S	75:12:45.60000W	81:01:11.20478S	104:47:14.40000E	180.00000	180.00000	3000.00000
test116	49:10:24.50000S	75:12:45.60000W	29:08:15.41939S	136:18:39.38847W	270.00000	131.46730	3000.00000
test117	49:10:24.50000S	75:12:45.60000W	7:52:38.83544S	41:28:29.05694W	46.00000	208.40144	3000.00000
test118	49:10:24.50000S	75:12:45.60000W	52:04:51.42106S	7:52:24.35518E	127.00000	238.15368	3000.00000
test119	49:10:24.50000S	75:12:45.60000W	73:51:36.66725S	168:08:53.56896E	199.00000	130.11219	3000.00000
test120	49:10:24.50000S	75:12:45.60000W	25:11:20.18815S	132:13:38.05215W	277.00000	134.10803	3000.00000
test121	43:10:45.70000S	123:42:43.40000W	43:05:19.50216S	119:09:38.75232W	90.00000	266.88737	200.00000
test122	43:10:45.70000S	123:42:43.40000W	39:50:39.63379S	123:42:43.40000W	0.00000	180.00000	200.00000
test123	43:10:45.70000S	123:42:43.40000W	46:30:44.75296S	123:42:43.40000W	180.00000	0.00000	200.00000
test124	43:10:45.70000S	123:42:43.40000W	43:05:19.50216S	128:15:48.04768W	270.00000	93.11263	200.00000
test125	43:10:45.70000S	123:42:43.40000W	40:49:05.78329S	120:33:14.53881W	46.00000	223.88618	200.00000
test126	43:10:45.70000S	123:42:43.40000W	45:07:29.89631S	119:57:05.47191W	127.00000	304.37967	200.00000
test127	43:10:45.70000S	123:42:43.40000W	46:19:13.99376S	125:16:37.84869W	199.00000	20.10232	200.00000
test128	43:10:45.70000S	123:42:43.40000W	42:41:04.43281S	128:11:59.62018W	277.00000	100.05767	200.00000
test129	43:10:45.70000S	123:42:43.40000W	43:10:45.66735S	123:39:59.39209W	90.00000	269.96883	2.00000
test130	43:10:45.70000S	123:42:43.40000W	43:08:45.67398S	123:42:43.40000W	0.00000	180.00000	2.00000
test131	43:10:45.70000S	123:42:43.40000W	43:12:45.72532S	123:42:43.40000W	180.00000	0.00000	2.00000
test132	43:10:45.70000S	123:42:43.40000W	43:10:45.66735S	123:45:27.40791W	270.00000	90.03117	2.00000
test133	43:10:45.70000S	123:42:43.40000W	43:09:22.30610S	123:40:45.46715W	46.00000	225.97759	2.00000
test134	43:10:45.70000S	123:42:43.40000W	43:11:57.91229S	123:40:32.37455W	127.00000	306.97509	2.00000
test135	43:10:45.70000S	123:42:43.40000W	43:12:39.18273S	123:43:36.82325W	199.00000	19.01016	2.00000
test136	43:10:45.70000S	123:42:43.40000W	43:10:31.04038S	123:45:26.17463W	277.00000	97.03094	2.00000
test137	43:10:45.70000S	123:42:43.40000W	26:06:37.08296S	65:19:15.88930W	90.00000	234.37420	3000.00000
test138	43:10:45.70000S	123:42:43.40000W	6:59:37.06995N	123:42:43.40000W	0.00000	180.00000	3000.00000
test139	43:10:45.70000S	123:42:43.40000W	86:59:08.38590S	56:17:16.60000E	180.00000	180.00000	3000.00000
test140	43:10:45.70000S	123:42:43.40000W	26:06:37.08296S	177:53:49.08930E	270.00000	125.62580	3000.00000

test141	43:10:45.70000S	123:42:43.40000W	2:51:33.84923S	90:17:19.02340W	46.00000	211.73748	3000.00000
test142	43:10:45.70000S	123:42:43.40000W	50:58:42.47481S	48:01:25.22327W	127.00000	247.60161	3000.00000
test143	43:10:45.70000S	123:42:43.40000W	75:32:45.23169S	140:44:35.89858E	199.00000	108.26051	3000.00000
test144	43:10:45.70000S	123:42:43.40000W	21:49:17.43560S	178:34:03.34260W	277.00000	128.69292	3000.00000
test145	30:13:55.50000S	54:53:17.40000E	30:10:32.24599S	58:44:04.46955E	90.00000	268.06441	200.00000
test146	30:13:55.50000S	54:53:17.40000E	26:53:23.96278S	54:53:17.40000E	0.00000	180.00000	200.00000
test147	30:13:55.50000S	54:53:17.40000E	33:34:20.90547S	54:53:17.40000E	180.00000	360.00000	200.00000
test148	30:13:55.50000S	54:53:17.40000E	30:10:32.24599S	51:02:30.33045E	270.00000	91.93559	200.00000
test149	30:13:55.50000S	54:53:17.40000E	27:52:57.82170S	57:35:36.72392E	46.00000	224.68558	200.00000
test150	30:13:55.50000S	54:53:17.40000E	32:12:18.30198S	58:01:31.85506E	127.00000	305.37336	200.00000
test151	30:13:55.50000S	54:53:17.40000E	33:23:02.92727S	53:35:33.92865E	199.00000	19.68306	200.00000
test152	30:13:55.50000S	54:53:17.40000E	29:46:10.92312S	51:05:09.54001E	277.00000	98.90168	200.00000
test153	30:13:55.50000S	54:53:17.40000E	30:13:55.47966S	54:55:35.92341E	90.00000	269.98063	2.00000
test154	30:13:55.50000S	54:53:17.40000E	30:11:55.21431S	54:53:17.40000E	0.00000	180.00000	2.00000
test155	30:13:55.50000S	54:53:17.40000E	30:15:55.78508S	54:53:17.40000E	180.00000	360.00000	2.00000
test156	30:13:55.50000S	54:53:17.40000E	30:13:55.47966S	54:50:58.87659E	270.00000	90.01937	2.00000
test157	30:13:55.50000S	54:53:17.40000E	30:12:31.93209S	54:54:57.02201E	46.00000	225.98607	2.00000
test158	30:13:55.50000S	54:53:17.40000E	30:15:07.87646S	54:55:08.05224E	127.00000	306.98452	2.00000
test159	30:13:55.50000S	54:53:17.40000E	30:15:49.22963S	54:52:32.28676E	199.00000	19.00631	2.00000
test160	30:13:55.50000S	54:53:17.40000E	30:13:40.82086S	54:50:59.91478E	277.00000	97.01923	2.00000
test161	30:13:55.50000S	54:53:17.40000E	18:52:29.86498S	108:49:20.15190E	90.00000	246.00043	3000.00000
test162	30:13:55.50000S	54:53:17.40000E	19:58:48.22673N	54:53:17.40000E	0.00000	180.00000	3000.00000
test163	30:13:55.50000S	54:53:17.40000E	80:08:58.44983S	54:53:17.40000E	180.00000	0.00000	3000.00000
test164	30:13:55.50000S	54:53:17.40000E	18:52:29.86498S	0:57:14.64810E	270.00000	113.99957	3000.00000
test165	30:13:55.50000S	54:53:17.40000E	7:58:13.96628N	88:37:37.35172E	46.00000	218.90713	3000.00000
test166	30:13:55.50000S	54:53:17.40000E	46:16:23.75384S	116:51:12.92431E	127.00000	265.83428	3000.00000
test167	30:13:55.50000S	54:53:17.40000E	71:41:54.15847S	2:36:27.57861E	199.00000	63.35732	3000.00000
test168	30:13:55.50000S	54:53:17.40000E	14:01:56.87883S	3:23:24.56420E	277.00000	117.80900	3000.00000
test169	71:03:45.50000S	155:13:37.40000E	70:47:04.46404S	165:21:13.27121E	90.00000	260.42680	200.00000
test170	71:03:45.50000S	155:13:37.40000E	67:44:32.20108S	155:13:37.40000E	360.00000	180.00000	200.00000
test171	71:03:45.50000S	155:13:37.40000E	74:22:54.50904S	155:13:37.40000E	180.00000	360.00000	200.00000
test172	71:03:45.50000S	155:13:37.40000E	70:47:04.46404S	145:06:01.52879E	270.00000	99.57320	200.00000
test173	71:03:45.50000S	155:13:37.40000E	68:37:38.70618S	161:47:11.03268E	46.00000	219.84014	200.00000
test174	71:03:45.50000S	155:13:37.40000E	72:51:42.35787S	164:14:58.08728E	127.00000	298.41826	200.00000
test175	71:03:45.50000S	155:13:37.40000E	74:09:55.67082S	151:16:06.01068E	199.00000	22.77938	200.00000
test176	71:03:45.50000S	155:13:37.40000E	70:23:23.03906S	145:22:23.31016E	277.00000	106.30428	200.00000
test177	71:03:45.50000S	155:13:37.40000E	71:03:45.39916S	155:19:45.39068E	90.00000	269.90331	2.00000
test178	71:03:45.50000S	155:13:37.40000E	71:01:45.98931S	155:13:37.40000E	360.00000	180.00000	2.00000
test179	71:03:45.50000S	155:13:37.40000E	71:05:45.01026S	155:13:37.40000E	180.00000	0.00000	2.00000
test180	71:03:45.50000S	155:13:37.40000E	71:03:45.39916S	155:07:29.40932E	270.00000	90.09669	2.00000
test181	71:03:45.50000S	155:13:37.40000E	71:02:22.42883S	155:18:01.80054E	46.00000	225.93054	2.00000
test182	71:03:45.50000S	155:13:37.40000E	71:04:57.35874S	155:18:31.58931E	127.00000	306.92270	2.00000
test183	71:03:45.50000S	155:13:37.40000E	71:05:38.48847S	155:11:37.40237E	199.00000	19.03153	2.00000
test184	71:03:45.50000S	155:13:37.40000E	71:03:30.83602S	155:07:32.22736E	277.00000	97.09595	2.00000
test185	71:03:45.50000S	155:13:37.40000E	37:33:28.76348S	130:07:28.60879W	90.00000	204.21144	3000.00000
test186	71:03:45.50000S	155:13:37.40000E	21:04:35.11214S	155:13:37.40000E	360.00000	180.00000	3000.00000
test187	71:03:45.50000S	155:13:37.40000E	59:09:32.80147S	24:46:22.60000W	180.00000	180.00000	3000.00000
test188	71:03:45.50000S	155:13:37.40000E	37:33:28.76348S	80:34:43.40879E	270.00000	155.78856	3000.00000

test189	71:03:45.50000S	155:13:37.40000E	25:50:57.88581S	167:05:40.45264W	46.00000	195.07128	3000.00000
test190	71:03:45.50000S	155:13:37.40000E	49:25:34.58238S	94:31:25.79851W	127.00000	203.51009	3000.00000
test191	71:03:45.50000S	155:13:37.40000E	57:40:40.95961S	2:56:35.65351E	199.00000	168.59567	3000.00000
test192	71:03:45.50000S	155:13:37.40000E	35:23:25.31483S	86:40:04.05968E	277.00000	156.67990	3000.00000

WGS84PtsOnGeodesic Test Results

Test Identifier	Geodesic Start Point Latitude	Geodesic Start Point Longitude	Geodesic End Point Latitude	Geodesic End Point Longitude	Test Point Latitude	Test Point Longitude	Length Code	Result
test1	40:10:24.50000N	70:12:45.60000W	42:04:35.80000N	68:12:34.70000W	41:32:28.56417N	68:47:19.47018W	0	1
test2	40:10:24.50000N	70:12:45.60000W	42:04:35.80000N	68:12:34.70000W	42:04:35.80000N	68:12:34.70000W	0	1
test3	40:10:24.50000N	70:12:45.60000W	42:04:35.80000N	68:12:34.70000W	41:47:53.25338N	68:30:44.96922W	0	1
test4	40:10:24.50000N	70:12:45.60000W	42:04:35.80000N	68:12:34.70000W	41:26:00.91053N	68:54:13.28237W	0	1
test5	40:10:24.50000N	70:12:45.60000W	42:04:35.80000N	68:12:34.70000W	41:09:22.65915N	69:11:50.60000W	0	1
test6	40:10:24.50000N	70:12:45.60000W	42:04:35.80000N	68:12:34.70000W	40:10:24.50000N	70:12:45.60000W	0	1
test7	42:04:35.80000N	68:12:34.70000W	40:10:24.50000N	70:12:45.60000W	42:04:35.80000N	68:12:34.70000W	0	1
test8	42:04:35.80000N	68:12:34.70000W	40:10:24.50000N	70:12:45.60000W	41:09:22.65915N	69:11:50.60000W	0	1
test9	42:04:35.80000N	68:12:34.70000W	40:10:24.50000N	70:12:45.60000W	40:10:24.50000N	70:12:45.60000W	0	1
test10	42:04:35.80000N	68:12:34.70000W	40:10:24.50000N	70:12:45.60000W	38:47:17.80000N	69:11:50.60000W	0	0
test11	42:04:35.80000N	68:12:34.70000W	40:10:24.50000N	70:12:45.60000W	39:35:17.80000N	69:11:50.60000W	0	0
test12	42:04:35.80000N	68:12:34.70000W	40:10:24.50000N	70:12:45.60000W	44:47:17.80000N	69:11:50.60000W	0	0
test13	40:10:24.50000N	68:12:45.60000E	42:04:35.80000N	70:12:34.70000E	41:47:17.80000N	68:11:50.60000E	0	0
test14	40:10:24.50000N	68:12:45.60000E	42:04:35.80000N	70:12:34.70000E	42:04:35.80000N	70:12:34.70000E	0	1
test15	40:10:24.50000N	68:12:45.60000E	42:04:35.80000N	70:12:34.70000E	41:47:18.13124N	69:53:49.92815E	0	1
test16	40:10:24.50000N	68:12:45.60000E	42:04:35.80000N	70:12:34.70000E	40:29:59.59453N	68:32:40.35274E	0	1
test17	40:10:24.50000N	68:12:45.60000E	42:04:35.80000N	70:12:34.70000E	40:29:10.95567N	68:31:50.60000E	0	1
test18	40:10:24.50000N	68:12:45.60000E	42:04:35.80000N	70:12:34.70000E	40:10:24.50000N	68:12:45.60000E	0	1
test19	42:04:35.80000N	70:12:34.70000E	40:10:24.50000N	68:12:45.60000E	40:43:56.24806N	68:47:00.28971E	0	1
test20	42:04:35.80000N	70:12:34.70000E	40:10:24.50000N	68:12:45.60000E	41:07:48.28268N	69:11:50.60000E	0	1
test21	42:04:35.80000N	70:12:34.70000E	40:10:24.50000N	68:12:45.60000E	40:10:24.50000N	68:12:45.60000E	0	1
test22	42:04:35.80000N	70:12:34.70000E	40:10:24.50000N	68:12:45.60000E	40:27:32.30453N	68:30:09.76991E	0	1
test23	42:04:35.80000N	70:12:34.70000E	40:10:24.50000N	68:12:45.60000E	38:47:17.80000N	72:11:50.60000E	0	0
test24	42:04:35.80000N	70:12:34.70000E	40:10:24.50000N	68:12:45.60000E	43:47:17.80000N	72:11:50.60000E	0	0
test25	41:50:24.50000S	70:12:45.60000W	39:55:35.80000S	68:12:34.70000W	40:12:17.80000S	69:11:50.60000W	0	0
test26	41:50:24.50000S	70:12:45.60000W	39:55:35.80000S	68:12:34.70000W	39:55:35.80000S	68:12:34.70000W	0	1
test27	41:50:24.50000S	70:12:45.60000W	39:55:35.80000S	68:12:34.70000W	40:12:53.41991S	68:30:06.40714W	0	1
test28	41:50:24.50000S	70:12:45.60000W	39:55:35.80000S	68:12:34.70000W	40:34:15.03903S	68:52:01.67681W	0	1
test29	41:50:24.50000S	70:12:45.60000W	39:55:35.80000S	68:12:34.70000W	40:53:18.36384S	69:11:50.60000W	0	1
test30	41:50:24.50000S	70:12:45.60000W	39:55:35.80000S	68:12:34.70000W	41:50:24.50000S	70:12:45.60000W	0	1
test31	39:55:35.80000S	68:12:34.70000W	41:50:24.50000S	70:12:45.60000W	41:50:24.50000S	70:12:45.60000W	0	1
test32	39:55:35.80000S	68:12:34.70000W	41:50:24.50000S	70:12:45.60000W	40:53:18.36384S	69:11:50.60000W	0	1
test33	39:55:35.80000S	68:12:34.70000W	41:50:24.50000S	70:12:45.60000W	41:50:24.50000S	70:12:45.60000W	0	1
test34	39:55:35.80000S	68:12:34.70000W	41:50:24.50000S	70:12:45.60000W	42:12:17.80000S	69:11:50.60000W	0	0
test35	39:55:35.80000S	68:12:34.70000W	41:50:24.50000S	70:12:45.60000W	38:12:17.80000S	69:11:50.60000W	0	0
test36	39:55:35.80000S	68:12:34.70000W	41:50:24.50000S	70:12:45.60000W	43:12:17.80000S	69:11:50.60000W	0	0
test37	41:50:24.50000S	68:12:45.60000E	39:55:35.80000S	70:12:34.70000E	40:12:17.80000S	68:11:50.60000E	0	0
test38	41:50:24.50000S	68:12:45.60000E	39:55:35.80000S	70:12:34.70000E	39:55:35.80000S	70:12:34.70000E	0	1
test39	41:50:24.50000S	68:12:45.60000E	39:55:35.80000S	70:12:34.70000E	40:13:19.06538S	69:54:40.06070E	0	1
test40	41:50:24.50000S	68:12:45.60000E	39:55:35.80000S	70:12:34.70000E	40:11:49.41238S	69:56:11.14294E	0	1

test41	41:50:24.50000S	68:12:45.60000E	39:55:35.80000S	70:12:34.70000E	40:54:53.06605S	69:11:50.60000E	0	1
test42	41:50:24.50000S	68:12:45.60000E	39:55:35.80000S	70:12:34.70000E	41:50:24.50000S	68:12:45.60000E	0	1
test43	39:55:35.80000S	70:12:34.70000E	41:50:24.50000S	68:12:45.60000E	39:55:35.80000S	70:12:34.70000E	0	1
test44	39:55:35.80000S	70:12:34.70000E	41:50:24.50000S	68:12:45.60000E	41:47:33.72993S	68:15:50.60000E	0	1
test45	39:55:35.80000S	70:12:34.70000E	41:50:24.50000S	68:12:45.60000E	41:50:24.50000S	68:12:45.60000E	0	1
test46	39:55:35.80000S	70:12:34.70000E	41:50:24.50000S	68:12:45.60000E	43:29:17.80000S	69:11:50.60000E	0	0
test47	39:55:35.80000S	70:12:34.70000E	41:50:24.50000S	68:12:45.60000E	38:29:17.80000S	69:11:50.60000E	0	0
test48	39:55:35.80000S	70:12:34.70000E	41:50:24.50000S	68:12:45.60000E	41:49:17.80000S	69:11:50.60000E	0	0

WGS84PtsOnArc Test Results

Test Identifier	Arc Center Latitude	Arc Center Longitude	Arc Radius	Arc Start Azimuth	Arc End Azimuth	Arc Direction	Test Point Latitude	Test Point Longitude	Result
test1	40:10:24.50000N	70:12:45.60000W	100.0	90.0	100.0	-1	39:55:12.84696N	68:04:03.03796W	1
test2	40:10:24.50000N	70:12:45.60000W	100.0	100.0	90.0	1	40:04:24.98785N	68:02:37.73455W	1
test3	40:10:24.50000N	70:12:45.60000W	100.0	100.0	90.0	1	40:27:01.27947N	68:03:50.83114W	0
test4	40:10:24.50000N	70:12:45.60000W	100.0	20.0	120.0	-1	39:39:01.64315N	68:09:21.02760W	1
test5	40:10:24.50000N	70:12:45.60000W	100.0	355.0	10.0	-1	41:50:27.82240N	70:11:34.70000W	1
test6	40:10:24.50000N	70:12:45.60000W	100.0	15.0	350.0	1	41:50:27.82240N	70:11:34.70000W	1
test7	40:10:24.50000N	70:12:45.60000W	100.0	15.0	350.0	-1	41:50:27.82240N	70:11:34.70000W	0
test8	40:10:24.50000N	70:12:45.60000W	100.0	250.0	300.0	-1	40:22:32.07141N	72:22:27.11102W	1
test9	40:10:24.50000N	70:12:45.60000W	100.0	330.0	200.0	1	41:12:48.70166N	71:55:32.15119W	1
test10	40:10:24.50000N	70:12:45.60000W	100.0	200.0	230.0	-1	38:51:33.35407N	68:53:10.34405W	0
test11	40:10:24.50000N	70:12:45.60000E	100.0	90.0	100.0	-1	39:57:28.59246N	72:21:55.36432E	1
test12	40:10:24.50000N	70:12:45.60000E	100.0	100.0	90.0	1	40:04:25.10140N	72:22:53.47612E	1
test13	40:10:24.50000N	70:12:45.60000E	100.0	100.0	90.0	1	40:26:53.80980N	72:21:41.88661E	0
test14	40:10:24.50000N	70:12:45.60000E	100.0	20.0	120.0	-1	39:39:10.70047N	72:16:14.18085E	1
test15	40:10:24.50000N	70:12:45.60000E	100.0	355.0	10.0	-1	41:50:27.82240N	70:11:34.70000E	1
test16	40:10:24.50000N	70:12:45.60000E	100.0	15.0	350.0	1	41:50:27.82240N	70:11:34.70000E	1
test17	40:10:24.50000N	70:12:45.60000E	100.0	15.0	350.0	-1	41:50:27.82240N	70:11:34.70000E	0
test18	40:10:24.50000N	70:12:45.60000E	100.0	250.0	300.0	-1	40:22:28.60052N	68:03:03.59248E	1
test19	40:10:24.50000N	70:12:45.60000E	100.0	330.0	200.0	1	41:13:31.30530N	68:30:43.58125E	1
test20	40:10:24.50000N	70:12:45.60000E	100.0	200.0	230.0	-1	39:05:41.34977N	71:51:29.95766E	0
test21	40:10:24.50000S	70:12:45.60000E	100.0	90.0	100.0	-1	40:12:40.39213S	72:23:13.39076E	1
test22	40:10:24.50000S	70:12:45.60000E	100.0	100.0	90.0	1	40:04:25.10140S	72:22:53.47612E	0
test23	40:10:24.50000S	70:12:45.60000E	100.0	100.0	90.0	1	39:39:10.70047S	72:16:14.18085E	0
test24	40:10:24.50000S	70:12:45.60000E	100.0	20.0	120.0	-1	40:26:53.80980S	72:21:41.88661E	1
test25	40:10:24.50000S	70:12:45.60000E	100.0	355.0	10.0	-1	38:30:19.45513S	70:11:34.70000E	1
test26	40:10:24.50000S	70:12:45.60000E	100.0	15.0	350.0	1	38:30:19.45513S	70:11:34.70000E	1
test27	40:10:24.50000S	70:12:45.60000E	100.0	15.0	350.0	-1	38:30:19.45513S	70:11:34.70000E	0
test28	40:10:24.50000S	70:12:45.60000E	100.0	250.0	300.0	-1	40:23:20.88344S	68:03:11.35606E	1
test29	40:10:24.50000S	70:12:45.60000E	100.0	330.0	200.0	1	39:47:33.58163S	68:06:05.87892E	1
test30	40:10:24.50000S	70:12:45.60000E	100.0	200.0	230.0	-1	41:45:30.73148S	70:53:47.69121E	0
test31	40:10:24.50000S	70:12:45.60000W	100.0	90.0	100.0	-1	40:12:32.98018S	68:02:17.71481W	1
test32	40:10:24.50000S	70:12:45.60000W	100.0	100.0	90.0	1	40:04:11.30750S	68:02:39.04105W	0
test33	40:10:24.50000S	70:12:45.60000W	100.0	100.0	90.0	1	39:23:12.36192S	68:18:22.61369W	0
test34	40:10:24.50000S	70:12:45.60000W	100.0	20.0	120.0	-1	40:39:21.80200S	68:07:26.05449W	1
test35	40:10:24.50000S	70:12:45.60000W	100.0	355.0	10.0	-1	38:30:19.45513S	70:11:34.70000W	1
test36	40:10:24.50000S	70:12:45.60000W	100.0	15.0	350.0	1	38:30:19.45513S	70:11:34.70000W	1
test37	40:10:24.50000S	70:12:45.60000W	100.0	15.0	350.0	-1	38:30:19.45513S	70:11:34.70000W	0
test38	40:10:24.50000S	70:12:45.60000W	100.0	250.0	300.0	-1	40:23:44.12558S	72:22:16.19656W	1
test39	40:10:24.50000S	70:12:45.60000W	100.0	330.0	200.0	1	39:54:28.73386S	72:21:18.43758W	1
test40	40:10:24.50000S	70:12:45.60000W	100.0	200.0	230.0	-1	41:29:48.15752S	68:52:34.09229W	0

WGS84PtsOnLocus Test Results

Test Identifier	Geodesic Start Latitude	Geodesic Start Longitude	Geodesic End Latitude	Geodesic End Longitude	Locus Start Latitude	Locus Start Longitude	Locus End Latitude	Locus End Longitude	Locus Start Distance (nm)	Locus End Distance (mm)	Test Point Latitude	Test Point Longitude	Result
test1	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:55:05.0078 2N	70:51:34.00000 W	42:55:01.7725 9N	70:24:20.8836 8N	-0.5	-0.5	42:55:05.0017 5N	70:50:23.28330 W	1
test2	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:55:05.0078 2N	70:51:34.00000 W	42:55:01.7725 9N	70:24:20.8836 8N	-0.5	-0.5	42:55:05.0077 1N	70:51:24.71201 W	1
test3	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:55:35.0155 9N	70:51:34.00000 W	42:55:31.7799 3N	70:24:20.6635 6N	-1.0	-1.0	42:55:35.0077 6N	70:50:13.66761 W	1
test4	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:52:34.9683 0N	70:51:34.00000 W	42:52:19.7321 9N	70:24:22.0712 7N	2.0	2.2	42:52:34.0141 3N	70:49:26.93090 W	1
test5	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:57:35.0462 4N	70:51:34.00000 W	42:53:31.7503 1N	70:24:21.5436 7N	-3.0	1.0	42:56:58.6919 6N	70:47:27.05896 W	1
test6	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:50:34.9359 0N	70:51:34.00000 W	42:50:31.7045 5N	70:24:22.8620 5N	4.0	4.0	42:50:34.8184 3N	70:46:22.99515 W	1
test7	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:59:35.0761 8N	70:51:34.00000 W	42:59:01.8300 8N	70:24:19.1210 9N	-5.0	-4.5	42:59:28.7760 9N	70:45:58.16124 W	1
test8	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:48:34.9027 9N	70:51:34.00000 W	42:48:07.6668 0N	70:24:23.9152 2N	6.0	6.4	42:48:27.5379 7N	70:43:32.97138 W	1
test9	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	43:01:35.1054 3N	70:51:34.00000 W	43:01:31.8645 9N	70:24:18.0175 4N	-7.0	-7.0	43:01:34.9363 5N	70:45:20.32134 W	1
test10	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:46:34.8689 9N	70:51:34.00000 W	42:53:31.7503 1N	70:24:21.5436 7N	8.0	1.0	42:48:36.3742 8N	70:43:41.44040 W	1
test11	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:55:05.0078 2N	70:51:34.00000 W	42:55:01.7725 9N	70:24:20.8836 8N	-0.5	-0.5	42:53:60.0000 0N	70:50:23.28330 W	0
test12	42:54:35.0000 0N	70:51:34.00000 W	42:54:31.7652 1N	70:24:21.10373 W	42:46:34.8689 9N	70:51:34.00000 W	42:46:31.6410 8N	70:24:24.6165 8N	8.0	8.0	42:42:00.0000 0N	70:43:42.62942 W	0
test13	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:54:04.9921 4S	70:51:34.00000 W	42:54:01.7577 8S	70:24:21.3237 3S	-0.5	-0.5	42:54:04.9860 8S	70:50:23.30236 W	1
test14	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:54:04.9921 4S	70:51:34.00000 W	42:54:01.7577 8S	70:24:21.3237 3S	-0.5	-0.5	42:54:04.9920 4S	70:51:24.70232 W	1
test15	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:55:35.0155 9S	70:51:34.00000 W	42:55:31.7799 3S	70:24:20.6635 6S	1.0	1.0	42:55:35.0077 6S	70:50:13.66761 W	1
test16	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:52:34.9683 0S	70:51:34.00000 W	42:52:19.7321 9S	70:24:22.0712 7S	-2.0	-2.2	42:52:34.0141 3S	70:49:26.93090 W	1
test17	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:57:35.0462 4S	70:51:34.00000 W	42:53:31.7503 1S	70:24:21.5436 7S	3.0	-1.0	42:56:58.6919 6S	70:47:27.05896 W	1
test18	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:50:34.9359 0S	70:51:34.00000 W	42:50:31.7045 5S	70:24:22.8620 5S	-4.0	-4.0	42:50:34.8184 3S	70:46:22.99515 W	1
test19	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:59:35.0761 8S	70:51:34.00000 W	42:59:01.8300 8S	70:24:19.1210 9S	5.0	4.5	42:59:28.7760 9S	70:45:58.16124 W	1
test20	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:48:34.9027 9S	70:51:34.00000 W	42:48:07.6668 0S	70:24:23.9152 2S	-6.0	-6.4	42:48:27.5379 7S	70:43:32.97138 W	1
test21	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	43:01:35.1054 3S	70:51:34.00000 W	43:01:31.8645 9S	70:24:18.0175 4S	7.0	7.0	43:01:34.9363 5S	70:45:20.32134 W	1
test22	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:46:34.8689 9S	70:51:34.00000 W	42:53:31.7503 1S	70:24:21.5436 7S	-8.0	-1.0	42:48:36.3742 8S	70:43:41.44040 W	1

test23	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:54:04.9921 4S	70:51:34.00000 W	42:54:01.7577 8S	70:24:21.3237 3S	-0.5	-0.5	42:53:60.0000 0S	70:50:23.30236 W	0
test24	42:54:35.0000 0S	70:51:34.00000 W	42:54:31.7652 1S	70:24:21.10373 W	42:46:34.8689 9S	70:51:34.00000 W	42:46:31.6410 8S	70:24:24.6165 8S	-8.0	-8.0	42:42:00.0000 0S	70:43:42.62942 W	0

WGS84LocusCrsAtPoint Test Results

Test Identifier	Input	Geodesic Start Latitude	Geodesic Start Longitude	Geodesic End Latitude	Geodesic End Longitude	Locus Start Latitude	Locus Start Longitude	Locus End Latitude	Locus End Longitude	Locus Start Distance (nm)	Locus End Distance (nm)	Test Point Latitude	Test Point Longitude
	Output	Geodesic Point Latitude	Geodesic Point Longitude	Locus Azimuth at Test Point (degrees)	Azimuth from Test Point to Geodesic Point (degrees)								
Test1	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	42:55:05.00782N	70:51:34.0000W	42:55:01.77259N	70:24:20.88368N	-0.5	-0.5	42:55:05.00175N	70:50:23.28330W
	Output	42:54:34.99393N	70:50:23.29283W	180.01337	90.01337								
Test2	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	42:55:05.00782N	70:51:34.0000W	42:55:01.77259N	70:24:20.88368N	-0.5	-0.5	42:55:05.00771N	70:51:24.71201W
	Output	42:54:34.9990N	70:51:24.71327W	180.00176	90.00176								
Test3	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	42:55:35.01559N	70:51:34.0000W	42:55:31.77993N	70:24:20.66356N	-1.0	-1.0	42:55:35.00776N	70:50:13.66761W
	Output	42:54:34.99218N	70:50:13.68926W	180.01519	90.01519								
Test4	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	42:52:34.96830N	70:51:34.0000W	42:52:19.73219N	70:24:22.07127N	2.0	2.2	42:52:34.01413N	70:49:26.93090W
	Output	42:54:34.98039N	70:49:26.86188W	0.59697	90.59697								
Test5	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	42:57:35.04624N	70:51:34.0000W	42:53:31.75031N	70:24:21.54367N	-3.0	1.0	42:56:58.69196N	70:47:27.05896W
	Output	42:54:34.92612N	70:47:27.21838W	191.35663	101.35663								
Test6	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	42:50:34.93590N	70:51:34.0000W	42:50:31.70455N	70:24:22.86205N	4.0	4.0	42:50:34.81843N	70:46:22.99515W
	Output	42:54:34.88240N	70:46:22.65989W	0.05882	90.05882								
Test7	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	42:59:35.07618N	70:51:34.0000W	42:59:01.83008N	70:24:19.12109N	-5.0	-4.5	42:59:28.77609N	70:45:58.16124W
	Output	42:54:34.86353N	70:45:58.60448W	181.49561	91.49561								
Test8	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	42:48:34.90279N	70:51:34.0000W	42:48:07.66680N	70:24:23.91522N	6.0	6.4	42:48:27.53797N	70:43:32.97138W
	Output	42:54:34.71836N	70:43:32.17826W	1.23674	91.23674								
test9	Input	42:54:35.0000N	70:51:34.0000W	42:54:31.76521N	70:24:21.10373W	43:01:35.10543N	70:51:34.0000W	43:01:31.86459N	70:24:18.01754N	-7.0	-7.0	43:01:34.93635N	70:45:20.32134W
	Output	42:54:34.83124N	70:45:21.02628W	180.07067	90.07067								

Test10	Input	42:54:35.00 000N	70:51:34.000 00W	42:54:31.76 521N	70:24:21.103 73W	42:46:34.86 899N	70:51:34.000 00W	42:53:31.75 031N	70:24:21.54 367N	8.0	1.0	42:48:36.37 428N	70:43:41.440 40W
	Output	42:54:34.72 821N	70:43:40.679 98W	-19.20067	70.79933								
Test11	Input	42:54:35.00 000N	70:51:34.000 00W	42:54:31.76 521N	70:24:21.103 73W	42:55:05.00 782N	70:51:34.000 00W	42:55:01.77 259N	70:24:20.88 368N	-0.5	-0.5	42:55:05.00 175N	70:50:23.283 30W
	Output	42:54:34.99 393N	70:50:23.292 83W	180.01337	90.01337								
Test12	Input	42:54:35.00 000N	70:51:34.000 00W	42:54:31.76 521N	70:24:21.103 73W	42:46:34.86 899N	70:51:34.000 00W	42:46:31.64 108N	70:24:24.61 658N	8.0	8.0	42:46:34.59 884N	70:43:42.629 42W
	Output	42:54:34.72 928N	70:43:41.613 15W	0.08915	90.08915								
Test13	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:54:04.99 214S	70:51:34.000 00W	42:54:01.75 778S	70:24:21.32 373S	-0.5	-0.5	42:54:04.98 608S	70:50:23.302 36W
	Output	42:54:34.99 393S	70:50:23.292 83W	179.98663	89.98663								
Test14	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:54:04.99 214S	70:51:34.000 00W	42:54:01.75 778S	70:24:21.32 373S	-0.5	-0.5	42:54:04.99 204S	70:51:24.702 32W
	Output	42:54:34.99 990S	70:51:24.701 07W	179.99824	89.99824								
Test15	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:55:35.01 559S	70:51:34.000 00W	42:55:31.77 993S	70:24:20.66 356S	1.0	1.0	42:55:35.00 776S	70:50:13.667 61W
	Output	42:54:34.99 218S	70:50:13.689 26W	359.98481	89.98481								
Test16	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:52:34.96 830S	70:51:34.000 00W	42:52:19.73 219S	70:24:22.07 127S	-2.0	-2.2	42:52:34.01 413S	70:49:26.930 90W
	Output	42:54:34.98 039S	70:49:26.861 88W	179.40303	89.40303								
Test17	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:57:35.04 624S	70:51:34.000 00W	42:53:31.75 031S	70:24:21.54 367S	3.0	-1.0	42:56:58.69 196S	70:47:27.058 96W
	Output	42:54:34.92 612S	70:47:27.218 38W	348.64337	78.64337								
Test18	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:50:34.93 590S	70:51:34.000 00W	42:50:31.70 455S	70:24:22.86 205S	-4.0	-4.0	42:50:34.81 843S	70:46:22.995 15W
	Output	42:54:34.88 240S	70:46:22.659 89W	179.94118	89.94118								
Test19	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:59:35.07 618S	70:51:34.000 00W	42:59:01.83 008S	70:24:19.12 109S	5.0	4.5	42:59:28.77 609S	70:45:58.161 24W
	Output	42:54:34.86 353S	70:45:58.604 48W	358.50439	88.50439								
Test20	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:48:34.90 279S	70:51:34.000 00W	42:48:07.66 680S	70:24:23.91 522S	-6.0	-6.4	42:48:27.53 797S	70:43:32.971 38W
	Output	42:54:34.71 836S	70:43:32.178 26W	178.76326	88.76326								
Test21	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	43:01:35.10 543S	70:51:34.000 00W	43:01:31.86 459S	70:24:18.01 754S	7.0	7.0	43:01:34.93 635S	70:45:20.321 34W
	Output	42:54:34.83 124S	70:45:21.026 28W	359.92933	89.92933								
Test22	Input	42:54:35.00	70:51:34.000	42:54:31.76	70:24:21.103	42:46:34.86	70:51:34.000	42:53:31.75	70:24:21.54	-8.0	-1.0	42:48:36.37	70:43:41.440

	t	000S	00W	521S	73W	899S	00W	031S	367S			428S	40W
	Output	42:54:34.72 821S	70:43:40.679 98W	199.20067	109.20067								
Test23	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:54:04.99 214S	70:51:34.000 00W	42:54:01.75 778S	70:24:21.32 373S	-0.5	-0.5	42:54:04.98 608S	70:50:23.302 36W
	Output	42:54:34.99 393S	70:50:23.292 83W	179.98663	89.98663								
Test24	Input	42:54:35.00 000S	70:51:34.000 00W	42:54:31.76 521S	70:24:21.103 73W	42:46:34.86 899S	70:51:34.000 00W	42:46:31.64 108S	70:24:24.61 658S	-8.0	-8.0	42:46:34.59 884S	70:43:42.629 42W
	Output	42:54:34.72 928S	70:43:41.613 15W	179.91085	89.91085								

WGS84DiscretizedArcLength Test Results

Test Identifier	Arc Center Latitude	Arc Center Longitude	Arc Radius	Start Azimuth	End Azimuth	Direction	Computed Arc Length (Algorithm 0) (nm)	Direct Computation Result (Section 6.4) (nm)	Difference (meters)
test1	38:13:25.10000N	77:54:23.40000W	5.0	91.0	226.0	-1	11.780968	11.780968	1.60e-007
test2	38:13:25.10000N	77:54:23.40000W	5.0	91.0	226.0	1	19.634947	19.634947	2.60e-008
test3	38:13:25.10000N	77:54:23.40000W	5.0	0.0	0.0	1	31.415915	31.415915	2.17e-007
test4	38:13:25.10000N	77:54:23.40000W	50.0	0.0	0.0	1	314.148211	314.148211	2.83e-006
test5	38:13:25.10000N	77:54:23.40000W	100.0	0.0	0.0	1	628.230102	628.230102	4.62e-005
test6	38:13:25.10000N	77:54:23.40000W	150.0	0.0	0.0	1	942.179365	942.179365	3.33e-004
test7	38:13:25.10000N	77:54:23.40000W	200.0	0.0	0.0	1	1255.929721	1255.929722	1.39e-003
test8	38:13:25.10000N	77:54:23.40000W	250.0	0.0	0.0	1	1569.414934	1569.414936	4.23e-003
test9	38:13:25.10000N	77:54:23.40000W	300.0	0.0	0.0	1	1882.568820	1882.568826	1.05e-002
test10	38:13:25.10000N	77:54:23.40000W	350.0	0.0	0.0	1	2195.325269	2195.325282	2.27e-002
test11	38:13:25.10000N	77:54:23.40000W	400.0	0.0	0.0	1	2507.618252	2507.618275	4.42e-002
test12	38:13:25.10000N	77:54:23.40000W	450.0	0.0	0.0	1	2819.381836	2819.381879	7.95e-002
test13	38:13:25.10000N	77:54:23.40000W	500.0	0.0	0.0	1	3130.550201	3130.550274	1.34e-001
test14	30:34:17.18000N	105:40:50.70000W	4.0	30.0	340.0	1	3.490658	3.490658	1.27e-008
test15	30:34:17.18000N	105:40:50.70000W	4.0	30.0	340.0	-1	21.642078	21.642078	7.24e-008
test16	30:34:17.18000N	105:40:50.70000W	4.0	0.0	0.0	1	25.132736	25.132736	7.62e-008
test17	30:34:17.18000N	105:40:50.70000W	4.0	0.0	0.0	-1	25.132736	25.132736	7.63e-008
test18	30:34:17.18000N	105:40:50.70000E	4.0	30.0	340.0	1	3.490658	3.490658	1.23e-008
test19	30:34:17.18000N	105:40:50.70000E	4.0	30.0	340.0	-1	21.642078	21.642078	7.28e-008
test20	30:34:17.18000N	105:40:50.70000E	4.0	0.0	0.0	1	25.132736	25.132736	7.63e-008
test21	30:34:17.18000N	105:40:50.70000E	4.0	0.0	0.0	-1	25.132736	25.132736	7.62e-008
test22	30:34:17.18000S	105:40:50.70000E	4.0	30.0	340.0	1	3.490658	3.490658	2.65e-008
test23	30:34:17.18000S	105:40:50.70000E	4.0	30.0	340.0	-1	21.642078	21.642078	7.89e-008
test24	30:34:17.18000S	105:40:50.70000E	4.0	0.0	0.0	1	25.132736	25.132736	7.62e-008
test25	30:34:17.18000S	105:40:50.70000E	4.0	0.0	0.0	-1	25.132736	25.132736	7.62e-008
test26	30:34:17.18000S	105:40:50.70000W	4.0	30.0	340.0	1	3.490658	3.490658	2.65e-008
test27	30:34:17.18000S	105:40:50.70000W	4.0	30.0	340.0	-1	21.642078	21.642078	7.89e-008
test28	30:34:17.18000S	105:40:50.70000W	4.0	0.0	0.0	1	25.132736	25.132736	7.62e-008
test29	30:34:17.18000S	105:40:50.70000W	4.0	0.0	0.0	-1	25.132736	25.132736	7.62e-008
test30	30:34:17.18000N	105:40:50.70000W	40.0	30.0	340.0	1	34.905798	34.905798	9.65e-005
test31	30:34:17.18000N	105:40:50.70000W	40.0	30.0	340.0	-1	216.415945	216.415946	9.71e-005
test32	30:34:17.18000N	105:40:50.70000W	40.0	0.0	0.0	1	251.321743	251.321743	5.82e-007
test33	30:34:17.18000N	105:40:50.70000W	40.0	0.0	0.0	-1	251.321743	251.321743	5.82e-007
test34	00:04:00.00000N	90:33:72.0000W	11.1	136.0	380.0	1	22.472820	22.472820	7.34e-008
test35	00:04:00.00000N	90:33:72.0000W	11.1	136.0	380.0	-1	47.270415	47.270415	3.17e-007
test36	00:04:00.00000N	90:33:72.0000W	11.1	0.0	0.0	1	69.743235	69.743235	4.14e-007
test37	00:04:00.00000N	90:33:72.0000W	11.1	136.0	20.0	1	22.472820	22.472820	7.34e-008
test38	00:04:00.00000N	90:33:72.0000W	11.1	136.0	20.0	-1	47.270415	47.270415	3.17e-007
test39	00:04:00.00000N	90:33:72.0000W	11.1	0.0	0.0	1	69.743235	69.743235	4.14e-007
test40	80:00:00.00000N	90:33:72.0000W	11.1	136.0	20.0	1	22.472821	22.472821	2.25e-007
test41	80:00:00.00000N	90:33:72.0000W	11.1	136.0	20.0	-1	47.270416	47.270416	7.27e-007
test42	80:00:00.00000N	90:33:72.0000W	11.1	0.0	0.0	1	69.743237	69.743237	9.51e-007

WGS84CrsIntersect Test Results

Test Identifier	Point 1 Latitude	Point 1 Longitude	Point 2 Latitude	Point 2 Longitude	Azimuth at Point 2 (degrees)	Azimuth from Intersection to Point 1 (degrees)	Distance to Point 1 from Intersection (nm)	Azimuth at Point 2 (degrees)	Azimuth from Intersection to Point 2 (degrees)	Distance to Point 2 from Intersection (nm)	Intersection Latitude	Intersection Longitude
test1	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	90.0	271.09328	77.96062	187.0	6.79842	115.70425	40:09:39.8358 8N	68:31:04.02698 W
test2	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	90.0	273.49211	249.49410	127.0	309.24501	197.11484	40:02:47.6253 9N	64:47:40.82715 W
test3	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	180.0	0.00000	2400.88568	183.0	2.22965	2517.34979	0:01:16.52501 N	70:12:45.60000 W
test4	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	175.0	355.32391	298.99250	190.0	9.07914	417.80313	35:12:07.9008 0N	69:41:00.06384 W
test5	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	175.0	173.09453	979.39618	170.0	166.54243	877.94705	56:24:04.1050 2N	72:44:22.05038 W
test6	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	170.0	352.06299	1472.94791	175.0	356.13925	1574.29532	15:50:52.8475 8N	65:55:13.50649 W
test7	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	140.0	321.55556	182.84945	175.0	355.30205	256.71971	37:48:35.7038 7N	67:44:28.20017 W
test8	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	35.0	216.45257	170.25572	200.0	200.13304	25.67248	42:28:43.1818 6N	68:00:48.75631 W
test9	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	35.0	215.81864	98.37315	225.0	44.50036	47.79193	41:30:38.3729 1N	68:57:39.59637 W
test10	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	40.0	221.23764	131.59286	200.0	19.92283	15.13463	41:50:21.9114 3N	68:19:36.20912 W
test11	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	40.0	221.33298	141.28719	170.0	350.01830	7.04762	41:57:39.1815 7N	68:11:02.27771 W
test12	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	190.0	9.32285	315.31940	200.0	18.05830	449.41589	34:59:10.9227 0N	71:19:18.57958 W
test13	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	230.0	232.66774	233.26393	250.0	251.36850	95.79181	42:36:17.8566 5N	66:10:46.71710 W
test14	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	300.0	117.24240	217.12520	270.0	85.84998	277.49771	41:54:31.9685 6N	74:24:39.29939 W
test15	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	320.0	135.96039	394.31108	300.0	114.50787	390.41454	45:03:45.8575 4N	76:10:13.00551 W
test16	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	30.0	211.06420	143.97676	300.0	119.74072	19.87930	42:14:30.0763 0N	68:35:51.38889 W
test17	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	30.0	211.32507	177.09156	0.0	180.00000	38.22767	42:42:50.2660 2N	68:12:40.70000 W
test18	40:10:24.5000 0N	70:12:45.60000 W	42:04:35.8000 0N	68:12:40.70000 W	20.0	202.00674	361.27463	10.0	190.65118	226.90835	45:47:51.2680 0N	67:16:23.97908 W
test19	40:10:24.5000 0S	70:12:45.60000 W	38:04:35.8000 0S	68:12:40.70000 W	90.0	268.92420	76.71333	187.0	7.21051	125.94256	40:09:41.2534 3S	68:32:41.62303 W
test20	40:10:24.5000 0S	70:12:45.60000 W	38:04:35.8000 0S	68:12:40.70000 W	90.0	266.46490	252.57903	127.0	304.80422	200.97896	40:02:36.2730 6S	64:43:40.26353 W
test21	40:10:24.5000	70:12:45.60000	38:04:35.8000	68:12:40.70000	180.0	0.00000	1101.097	183.0	4.51831	1229.277	58:30:33.9088	70:12:45.60000

	OS	W	OS	W			25			14	3S	W
test22	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	175.0	354.6684 0	244.3791 2	190.0	10.99389	375.3399 1	44:13:53.4208 OS	69:43:09.64545 W
test23	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	175.0	176.0715 0	1613.099 44	170.0	171.9168 5	1500.622 55	13:17:28.7861 3S	72:31:44.37321 W
test24	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	170.0	346.5975 7	915.3811 8	175.0	353.1172 0	1027.966 38	55:06:51.9932 3S	65:38:55.06563 W
test25	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	140.0	318.3463 2	173.4655 1	175.0	354.6736 1	258.0259 7	42:21:45.9161 9S	67:42:22.30757 W
test26	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	35.0	213.6247 4	181.7958 0	200.0	199.8852 0	26.04680	37:40:05.0377 1S	68:01:27.49821 W
test27	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	35.0	214.0330 0	125.4253 2	225.0	45.29430	31.67886	38:26:57.8047 3S	68:41:11.55669 W
test28	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	40.0	218.8389 1	134.4067 5	200.0	20.10452	23.26402	38:26:28.4278 8S	68:22:48.33817 W
test29	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	40.0	218.7115 5	149.8818 4	170.0	349.9774 4	9.94061	38:14:23.7925 3S	68:10:29.24046 W
test30	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	190.0	10.58888	220.3768 9	200.0	21.89034	366.6713 0	43:47:20.0839 7S	71:05:33.40366 W
test31	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	230.0	227.5691 6	241.3832 4	250.0	248.8525 0	95.09771	37:31:08.1738 1S	66:20:20.79110 W
test32	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	300.0	123.0199 6	262.8714 0	270.0	94.18427	322.4826 2	37:52:47.6582 0S	75:00:21.64521 W
test33	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	320.0	143.7337 6	481.8931 0	300.0	124.8185 5	472.5686 9	33:50:26.3510 1S	76:24:08.89427 W
test34	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	30.0	208.9666 1	155.7949 4	300.0	120.2223 3	19.80226	37:54:39.0707 1S	68:34:20.89766 W
test35	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	30.0	208.7459 9	191.4541 0	0.0	180.0000 0	41.16601	37:23:22.9781 6S	68:12:40.70000 W
test36	40:10:24.5000 OS	70:12:45.60000 W	38:04:35.8000 OS	68:12:40.70000 W	20.0	198.1775 7	450.5605 9	10.0	189.3900 6	304.5480 2	33:03:55.9155 5S	67:09:49.72585 W
test37	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	90.0	268.9259 6	76.58779	187.0	7.21051	125.9449 3	40:09:41.3948 5S	69:52:39.75365 E
test38	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	90.0	266.4665 0	252.4636 0	127.0	304.8040 8	200.9914 3	40:02:36.7003 OS	73:41:41.93617 E
test39	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	180.0	360.0000 0	1100.012 45	183.0	4.51599	1228.188 96	58:29:28.9764 5S	68:12:45.60000 E
test40	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	175.0	354.6690 2	243.9689 6	190.0	10.99261	374.9238 9	44:13:28.9171 2S	68:42:18.37446 E
test41	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	175.0	176.0709 1	1610.923 21	170.0	171.9156 3	1498.429 64	13:19:39.6265 8S	65:53:56.00212 E
test42	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	170.0	346.6021 0	914.5607 8	175.0	353.1195 0	1027.162 53	55:06:04.1975 9S	72:46:16.27258 E
test43	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	140.0	318.3483 7	173.2619 8	175.0	354.6738 3	257.8732 4	42:21:36.7885 4S	70:42:57.94500 E
test44	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	35.0	213.6283 9	181.2824 0	200.0	199.8871 8	25.59220	37:40:30.7171 2S	70:23:42.21581 E
test45	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	35.0	214.0295 9	125.8876 1	225.0	45.28920	31.13428	38:26:34.7941 OS	69:44:39.40243 E

test46	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	40.0	218.8420 1	134.0315 8	200.0	20.10593	23.57520	38:26:45.9790 4S	70:02:24.89276 E
test47	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	40.0	218.7129 3	149.7132 6	170.0	349.9771 3	10.07419	38:14:31.6935 3S	70:14:53.93008 E
test48	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	190.0	10.58725	219.8166 0	200.0	21.88681	366.0777 6	43:46:47.0357 7S	67:20:06.32333 E
test49	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	230.0	227.5679 5	241.5124 0	250.0	248.8496 2	95.33926	37:31:02.9386 E	72:05:17.59883 E
test50	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	300.0	123.0197 5	262.8518 4	270.0	94.18239	322.3365 2	37:52:48.2984 0S	63:25:10.79761 E
test51	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	320.0	143.7321 8	481.6535 0	300.0	124.8154 6	472.2303 3	33:50:37.9632 2S	62:01:32.51590 E
test52	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	30.0	208.9670 2	155.7298 6	300.0	120.2210 6	19.68914	37:54:42.4907 5S	69:51:07.91279 E
test53	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	30.0	208.7476 4	191.1834 6	0.0	180.0000 0	40.92873	37:23:37.2326 5S	70:12:40.70000 E
test54	40:10:24.5000 OS	68:12:45.60000 E	38:04:35.8000 OS	70:12:40.70000 E	20.0	198.1805 7	449.6742 8	10.0	189.3915 7	303.6945 1	33:04:46.5374 0S	71:15:21.73045 E
test55	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	90.0	271.0915 3	77.83566	187.0	6.79843	115.7018 5	40:09:39.9789 3N	69:54:17.39524 E
test56	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	90.0	273.4902 2	249.3582 9	127.0	309.2448 7	197.1017 6	40:02:48.1219 7N	73:37:39.78188 E
test57	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	180.0	360.0000 0	2396.683 05	183.0	2.22965	2513.143 98	0:05:29.92696 N	68:12:45.60000 E
test58	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	175.0	355.3233 8	298.4366 8	190.0	9.08018	417.2421 3	35:12:41.1916 1N	68:44:27.81826 E
test59	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	175.0	173.0968 5	978.6223 8	170.0	166.5470 2	877.1571 7	56:23:18.1079 9N	65:41:19.19227 E
test60	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	170.0	352.0615 5	1470.738 41	175.0	356.1385 5	1572.102 01	15:53:04.6965 2N	72:29:58.69976 E
test61	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	140.0	321.5537 0	182.6172 4	175.0	355.3018 6	256.5372 3	37:48:46.6282 6N	70:40:52.06822 E
test62	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	35.0	216.4489 2	169.8518 3	200.0	200.1312 3	25.32646	42:28:23.6827 5N	70:24:22.98760 E
test63	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	35.0	215.8236 2	98.95285	225.0	44.50715	47.13287	41:31:06.5899 3N	69:28:18.70067 E
test64	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	40.0	221.2345 5	131.2770 7	200.0	19.92155	15.38722	41:50:07.6564 1N	70:05:38.28221 E
test65	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	40.0	221.3314 7	141.1334 4	170.0	350.0186 0	7.16484	41:57:32.2517 0N	70:14:20.75633 E
test66	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	190.0	9.32443	314.4794 1	200.0	18.06144	448.5440 4	35:00:00.7367 3N	67:06:22.55872 E
test67	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	230.0	232.6692 0	233.3841 0	250.0	251.3718 0	96.01994	42:36:22.2305 8N	72:14:52.24641 E
test68	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	300.0	117.2421 8	217.1421 4	270.0	85.85158	277.3905 3	41:54:32.4340 3N	64:00:50.69032 E
test69	40:10:24.5000 ON	68:12:45.60000 E	42:04:35.8000 ON	70:12:40.70000 E	320.0	135.9619 1	394.1797 6	300.0	114.5113 2	390.1869 8	45:03:40.1939 4N	62:15:25.92213 E
test70	40:10:24.5000	68:12:45.60000	42:04:35.8000	70:12:40.70000	30.0	211.0637	143.9165	300.0	119.7420	19.77535	42:14:26.9810	69:49:37.30186

	0N	E	0N	E		3	6		8		6N	E
test71	40:10:24.5000 0N	68:12:45.60000 E	42:04:35.8000 0N	70:12:40.70000 E	30.0	211.3232 2	176.8599 4	0.0	180.0000 0	38.02981	42:42:38.3910 8N	70:12:40.70000 E
test72	40:10:24.5000 0N	68:12:45.60000 E	42:04:35.8000 0N	70:12:40.70000 E	20.0	202.0030 9	360.7041 5	10.0	190.6494 9	226.3701 5	45:47:19.5403 5N	71:08:48.89165 E

WGS84ArcIntersect Test Results

Test Identifier	Arc 1 Center Latitude	Arc 1 Center Longitude	Arc 1 Radius	Arc 2 Center Latitude	Arc 2 Center Longitude	Arc 2 Radius	Intersection 1 Latitude	Intersection 1 Longitude	Intersection 2 Latitude	Intersection 2 Longitude
test1	40:10:24.50000N	70:12:45.60000W	100.0	52:04:35.80000N	68:12:40.70000W	270.0	N/A	N/A	N/A	N/A
test2	40:10:24.50000N	70:12:45.60000W	500.0	42:04:35.80000N	68:12:40.70000W	10.0	N/A	N/A	N/A	N/A
test3	0:00:00.00000N	0:00:00.00000E	150.0	0:00:00.00000N	4:59:27.60000W	150.0	0:00:36.09395S	2:29:43.80000W	0:00:36.09395N	2:29:43.80000W
test4	40:10:24.50000N	70:12:45.60000W	500.0	52:04:35.80000N	68:12:40.70000W	270.0	48:22:59.73249N	72:12:38.32104W	47:52:02.19529N	65:45:38.36390W
test5	40:10:24.50000N	70:12:45.60000W	500.0	52:04:35.80000N	68:12:40.70000W	500.0	46:29:29.71744N	77:40:33.97739W	45:10:28.61546N	61:09:37.26553W
test6	40:10:24.50000N	70:12:45.60000W	500.0	52:04:35.80000N	68:12:40.70000W	1000.0	36:14:44.69990N	60:52:32.48344W	37:48:21.06721N	80:28:07.28278W
test7	40:10:24.50000N	70:12:45.60000W	500.0	52:04:35.80000N	68:12:40.70000W	1200.0	32:04:17.90465N	67:44:28.29488W	32:37:16.67926N	74:36:44.61637W
test8	40:10:24.50000N	70:12:45.60000W	500.0	52:04:35.80000N	68:12:40.70000W	1300.0	N/A	N/A	N/A	N/A
test9	40:10:24.50000N	70:12:45.60000W	500.0	52:04:35.80000N	68:12:40.70000W	10.0	N/A	N/A	N/A	N/A
test10	40:10:24.50000S	70:12:45.60000W	500.0	52:04:35.80000S	68:12:40.70000W	270.0	47:52:02.19529S	65:45:38.36390W	48:22:59.73249S	72:12:38.32104W
test11	40:10:24.50000S	70:12:45.60000W	500.0	52:04:35.80000S	68:12:40.70000W	500.0	45:10:28.61546S	61:09:37.26553W	46:29:29.71744S	77:40:33.97739W
test12	40:10:24.50000S	70:12:45.60000W	500.0	52:04:35.80000S	68:12:40.70000W	1000.0	37:48:21.06721S	80:28:07.28278W	36:14:44.69990S	60:52:32.48344W
test13	40:10:24.50000S	70:12:45.60000W	500.0	52:04:35.80000S	68:12:40.70000W	1200.0	32:37:16.67926S	74:36:44.61637W	32:04:17.90465S	67:44:28.29488W
test14	40:10:24.50000S	70:12:45.60000W	500.0	52:04:35.80000S	68:12:40.70000W	1300.0	N/A	N/A	N/A	N/A
test15	40:10:24.50000S	70:12:45.60000W	500.0	52:04:35.80000S	68:12:40.70000W	10.0	N/A	N/A	N/A	N/A
test16	40:10:24.50000S	70:12:45.60000E	500.0	52:04:35.80000S	68:12:40.70000E	270.0	48:22:59.73249S	72:12:38.32104E	47:52:02.19529S	65:45:38.36390E
test17	40:10:24.50000S	70:12:45.60000E	500.0	52:04:35.80000S	68:12:40.70000E	500.0	46:29:29.71744S	77:40:33.97739E	45:10:28.61546S	61:09:37.26553E
test18	40:10:24.50000S	70:12:45.60000E	500.0	52:04:35.80000S	68:12:40.70000E	1000.0	36:14:44.69990S	60:52:32.48344E	37:48:21.06721S	80:28:07.28278E
test19	40:10:24.50000S	70:12:45.60000E	500.0	52:04:35.80000S	68:12:40.70000E	1200.0	32:04:17.90465S	67:44:28.29488E	32:37:16.67926S	74:36:44.61637E
test20	40:10:24.50000S	70:12:45.60000E	500.0	52:04:35.80000S	68:12:40.70000E	1300.0	N/A	N/A	N/A	N/A
test21	40:10:24.50000S	70:12:45.60000E	500.0	52:04:35.80000S	68:12:40.70000E	10.0	N/A	N/A	N/A	N/A
test22	40:10:24.50000N	70:12:45.60000E	500.0	52:04:35.80000N	68:12:40.70000E	270.0	47:52:02.19529N	65:45:38.36390E	48:22:59.73249N	72:12:38.32104E
test23	40:10:24.50000N	70:12:45.60000E	500.0	52:04:35.80000N	68:12:40.70000E	500.0	45:10:28.61546N	61:09:37.26553E	46:29:29.71744N	77:40:33.97739E
test24	40:10:24.50000N	70:12:45.60000E	500.0	52:04:35.80000N	68:12:40.70000E	1000.0	37:48:21.06721N	80:28:07.28278E	36:14:44.69990N	60:52:32.48344E
test25	40:10:24.50000N	70:12:45.60000E	500.0	52:04:35.80000N	68:12:40.70000E	1200.0	32:37:16.67926N	74:36:44.61637E	32:04:17.90465N	67:44:28.29488E
test26	40:10:24.50000N	70:12:45.60000E	500.0	52:04:35.80000N	68:12:40.70000E	1300.0	N/A	N/A	N/A	N/A
test27	40:10:24.50000N	70:12:45.60000E	500.0	52:04:35.80000N	68:12:40.70000E	10.0	N/A	N/A	N/A	N/A
test28	6:10:24.50000S	70:12:45.60000E	500.0	6:04:35.80000N	68:12:40.70000E	500.0	0:57:26.91899S	63:41:24.65688E	0:51:39.75573N	74:44:00.46476E
test29	90:00:00.00000N	70:12:45.60000E	500.0	78:04:35.80000N	68:12:40.70000E	500.0	81:42:32.06863N	112:26:25.42164E	81:42:32.06863N	23:58:55.97836E
test30	90:00:00.00000S	70:12:45.60000E	500.0	78:04:35.80000S	68:12:40.70000E	500.0	81:42:32.06863S	23:58:55.97836E	81:42:32.06863S	112:26:25.42164E

WGS84GeodesicArcIntersect Test Results

Test Identifier	Geodesic Start Latitude	Geodesic Start Longitude	Geodesic Azimuth	Arc Center Latitude	Arc Center Longitude	Arc Radius	Intersection 1 Latitude	Intersection 1 Longitude	Intersection 2 Latitude	Intersection 2 Longitude
test1	40:04:35.80000N	67:12:40.70000W	350.0	40:10:24.50000N	70:12:45.60000W	100.0	N/A	N/A	N/A	N/A
test2	40:04:35.80000N	67:12:40.70000W	200.0	40:10:24.50000N	70:12:45.60000W	100.0	N/A	N/A	N/A	N/A
test3	40:04:35.80000N	68:12:40.70000W	325.0	40:10:24.50000N	70:12:45.60000W	100.0	39:55:07.50121N	68:04:04.19322W	41:49:07.05128N	69:51:08.02313W
test4	40:04:35.80000N	67:12:40.70000W	270.0	40:10:24.50000N	70:12:45.60000W	100.0	40:04:25.03104N	68:02:37.73049W	39:57:42.51976N	72:21:57.92383W
test5	40:04:35.80000N	67:12:40.70000W	300.0	40:10:24.50000N	70:12:45.60000W	100.0	40:26:58.44233N	68:03:50.25317W	41:41:50.22946N	71:06:22.56112W
test6	40:04:35.80000N	67:12:40.70000W	240.0	40:10:24.50000N	70:12:45.60000W	100.0	39:39:05.08426N	68:09:19.50227W	38:31:25.09106N	70:31:48.24036W
test7	42:54:35.80000N	70:11:34.70000W	180.0	40:10:24.50000N	70:12:45.60000W	100.0	41:50:27.82240N	70:11:34.70000W	38:30:19.45513N	70:11:34.70000W
test8	42:54:35.80000N	70:11:34.70000W	148.0	40:10:24.50000N	70:12:45.60000W	100.0	41:37:21.88671N	69:07:30.61751W	40:14:53.46014N	68:02:21.53739W
test9	42:54:35.80000N	70:11:34.70000W	211.0	40:10:24.50000N	70:12:45.60000W	100.0	41:40:11.55047N	71:10:59.87403W	40:05:20.45327N	72:22:58.34527W
test10	40:24:35.80000N	75:11:34.70000W	90.0	40:10:24.50000N	70:12:45.60000W	100.0	40:22:32.07141N	72:22:27.11102W	40:11:17.30268N	68:02:17.43363W
test11	40:24:35.80000N	75:11:34.70000W	71.0	40:10:24.50000N	70:12:45.60000W	100.0	41:12:48.70166N	71:55:32.15119W	41:44:39.12385N	69:28:24.56005W
test12	40:24:35.80000N	75:11:34.70000W	117.0	40:10:24.50000N	70:12:45.60000W	100.0	38:58:10.68147N	71:42:17.04664W	38:34:08.21242N	70:48:01.94345W
test13	37:09:35.80000N	70:21:34.70000W	0.0	40:10:24.50000N	70:12:45.60000W	100.0	38:30:33.27210N	70:21:34.70000W	41:50:14.67279N	70:21:34.70000W
test14	37:09:35.80000N	70:21:34.70000W	34.0	40:10:24.50000N	70:12:45.60000W	100.0	38:51:33.35407N	68:53:10.34405W	39:40:46.86281N	68:08:35.72134W
test15	37:09:35.80000N	70:21:34.70000W	331.0	40:10:24.50000N	70:12:45.60000W	100.0	38:53:33.43923N	71:35:33.98874W	39:55:14.26604N	72:21:28.46764W
test16	40:04:35.80000N	73:12:40.70000E	350.0	40:10:24.50000N	70:12:45.60000E	100.0	N/A	N/A	N/A	N/A
test17	40:04:35.80000N	73:12:40.70000E	200.0	40:10:24.50000N	70:12:45.60000E	100.0	N/A	N/A	N/A	N/A
test18	40:04:35.80000N	72:12:40.70000E	315.0	40:10:24.50000N	70:12:45.60000E	100.0	39:57:28.59246N	72:21:55.36432E	41:49:06.70033N	69:51:05.23564E
test19	40:04:35.80000N	73:12:40.70000E	270.0	40:10:24.50000N	70:12:45.60000E	100.0	40:04:25.10140N	72:22:53.47612E	39:57:42.95307N	68:03:33.19723E
test20	40:04:35.80000N	73:12:40.70000E	300.0	40:10:24.50000N	70:12:45.60000E	100.0	40:26:53.80980N	72:21:41.88661E	41:41:48.45569N	69:19:03.39492E
test21	40:04:35.80000N	73:12:40.70000E	240.0	40:10:24.50000N	70:12:45.60000E	100.0	39:39:10.70047N	72:16:14.18085E	38:31:26.01350N	69:53:35.03132E
test22	42:54:35.80000N	70:11:34.70000E	180.0	40:10:24.50000N	70:12:45.60000E	100.0	41:50:27.82240N	70:11:34.70000E	38:30:19.45513N	70:11:34.70000E
test23	42:54:35.80000N	70:11:34.70000E	148.0	40:10:24.50000N	70:12:45.60000E	100.0	41:38:51.44804N	71:14:26.22964E	40:11:43.96597N	72:23:13.80920E
test24	42:54:35.80000N	70:11:34.70000E	211.0	40:10:24.50000N	70:12:45.60000E	100.0	41:38:52.66082N	69:11:07.98528E	40:08:17.38700N	68:02:21.75495E
test25	40:24:35.80000N	65:11:34.70000E	90.0	40:10:24.50000N	70:12:45.60000E	100.0	40:22:28.60052N	68:03:03.59248E	40:11:08.47196N	72:23:13.71817E
test26	40:24:35.80000N	65:11:34.70000E	71.0	40:10:24.50000N	70:12:45.60000E	100.0	41:13:31.30530N	68:30:43.58125E	41:44:55.52500N	70:56:05.26696E
test27	40:24:35.80000N	65:11:34.70000E	117.0	40:10:24.50000N	70:12:45.60000E	100.0	38:55:28.33410N	68:47:03.42056E	38:35:19.72896N	69:32:28.24986E
test28	37:09:35.80000N	70:21:34.70000E	0.0	40:10:24.50000N	70:12:45.60000E	100.0	38:30:33.27210N	70:21:34.70000E	41:50:14.67279N	70:21:34.70000E
test29	37:09:35.80000N	70:21:34.70000E	31.0	40:10:24.50000N	70:12:45.60000E	100.0	39:05:41.34977N	71:51:29.95766E	39:31:54.37145N	72:12:37.10649E
test30	37:09:35.80000N	70:21:34.70000E	331.0	40:10:24.50000N	70:12:45.60000E	100.0	38:39:57.65316N	69:17:30.06177E	40:20:03.37282N	68:02:45.21636E
test31	40:04:35.80000S	73:12:40.70000E	350.0	40:10:24.50000S	70:12:45.60000E	100.0	N/A	N/A	N/A	N/A
test32	40:04:35.80000S	73:12:40.70000E	200.0	40:10:24.50000S	70:12:45.60000E	100.0	N/A	N/A	N/A	N/A
test33	40:04:35.80000S	72:12:40.70000E	315.0	40:10:24.50000S	70:12:45.60000E	100.0	40:12:40.39213S	72:23:13.39076E	38:30:19.48047S	70:13:59.97421E
test34	40:04:35.80000S	73:12:40.70000E	270.0	40:10:24.50000S	70:12:45.60000E	100.0	40:04:25.10140S	72:22:53.47612E	39:57:42.95307S	68:03:33.19723E
test35	40:04:35.80000S	73:12:40.70000E	300.0	40:10:24.50000S	70:12:45.60000E	100.0	39:39:10.70047S	72:16:14.18085E	38:31:26.01350S	69:53:35.03132E
test36	40:04:35.80000S	73:12:40.70000E	240.0	40:10:24.50000S	70:12:45.60000E	100.0	40:26:53.80980S	72:21:41.88661E	41:41:48.45569S	69:19:03.39492E
test37	38:04:35.80000S	70:11:34.70000E	180.0	40:10:24.50000S	70:12:45.60000E	100.0	38:30:19.45513S	70:11:34.70000E	41:50:27.82240S	70:11:34.70000E
test38	38:04:35.80000S	70:11:34.70000E	148.0	40:10:24.50000S	70:12:45.60000E	100.0	38:31:34.10858S	70:33:03.48677E	40:38:16.13339S	72:18:29.56104E
test39	38:04:35.80000S	70:11:34.70000E	211.0	40:10:24.50000S	70:12:45.60000E	100.0	38:31:47.32219S	69:50:45.35130E	40:40:24.17522S	68:07:50.24284E
test40	40:24:35.80000S	65:51:34.70000E	90.0	40:10:24.50000S	70:12:45.60000E	100.0	40:23:20.88344S	68:03:11.35606E	40:13:31.47512S	72:23:12.41522E
test41	40:24:35.80000S	65:51:34.70000E	71.0	40:10:24.50000S	70:12:45.60000E	100.0	39:47:33.58163S	68:06:05.87892E	38:46:58.13955S	71:24:05.30746E
test42	40:24:35.80000S	65:51:34.70000E	117.0	40:10:24.50000S	70:12:45.60000E	100.0	41:34:54.09546S	69:02:08.00210E	41:46:21.53454S	69:35:18.59270E

test43	43:09:35.80000S	70:21:34.70000E	0.0	40:10:24.50000S	70:12:45.60000E	100.0	41:50:14.67279S	70:21:34.70000E	38:30:33.27210S	70:21:34.70000E
test44	43:09:35.80000S	70:21:34.70000E	34.0	40:10:24.50000S	70:12:45.60000E	100.0	N/A	N/A	N/A	N/A
test45	43:09:35.80000S	70:21:34.70000E	335.0	40:10:24.50000S	70:12:45.60000E	100.0	41:44:46.94173S	69:28:53.61272E	39:33:21.66496S	68:12:06.66151E
test46	40:04:35.80000S	67:12:40.70000W	350.0	40:10:24.50000S	70:12:45.60000W	100.0	N/A	N/A	N/A	N/A
test47	40:04:35.80000S	67:12:40.70000W	200.0	40:10:24.50000S	70:12:45.60000W	100.0	N/A	N/A	N/A	N/A
test48	40:04:35.80000S	68:12:40.70000W	315.0	40:10:24.50000S	70:12:45.60000W	100.0	40:12:32.98018S	68:02:17.71481W	38:30:19.55929S	70:11:21.32978W
test49	40:04:35.80000S	67:12:40.70000W	270.0	40:10:24.50000S	70:12:45.60000W	100.0	40:04:25.03104S	68:02:37.73049W	39:57:42.51976S	72:21:57.92383W
test50	40:04:35.80000S	67:12:40.70000W	300.0	40:10:24.50000S	70:12:45.60000W	100.0	39:39:05.08426S	68:09:19.50227W	38:31:25.09106S	70:31:48.24036W
test51	40:04:35.80000S	67:12:40.70000W	240.0	40:10:24.50000S	70:12:45.60000W	100.0	40:26:58.44233S	68:03:50.25317W	41:41:50.22946S	71:06:22.56112W
test52	38:04:35.80000S	70:11:34.70000W	180.0	40:10:24.50000S	70:12:45.60000W	100.0	38:30:19.45513S	70:11:34.70000W	41:50:27.82240S	70:11:34.70000W
test53	38:04:35.80000S	70:11:34.70000W	148.0	40:10:24.50000S	70:12:45.60000W	100.0	38:31:55.04879S	69:49:49.11075W	40:36:19.17675S	68:06:20.78959W
test54	38:04:35.80000S	70:11:34.70000W	211.0	40:10:24.50000S	70:12:45.60000W	100.0	38:31:27.49080S	70:32:08.75118W	40:42:18.41652S	72:16:54.09843W
test55	40:24:35.80000S	74:11:34.70000W	90.0	40:10:24.50000S	70:12:45.60000W	100.0	40:23:44.12558S	72:22:16.19656W	40:14:45.41675S	68:02:21.20257W
test56	40:24:35.80000S	74:11:34.70000W	71.0	40:10:24.50000S	70:12:45.60000W	100.0	39:54:28.73386S	72:21:18.43758W	38:51:32.35724S	68:53:12.00023W
test57	40:24:35.80000S	74:11:34.70000W	117.0	40:10:24.50000S	70:12:45.60000W	100.0	41:17:23.70708S	71:50:29.04635W	41:50:26.40135S	70:15:52.05998W
test58	43:09:35.80000S	70:21:34.70000W	0.0	40:10:24.50000S	70:12:45.60000W	100.0	41:50:14.67279S	70:21:34.70000W	38:30:33.27210S	70:21:34.70000W
test59	43:09:35.80000S	70:21:34.70000W	34.0	40:10:24.50000S	70:12:45.60000W	100.0	41:29:48.15752S	68:52:34.09229W	40:34:48.23070S	68:05:51.32589W
test60	43:09:35.80000S	70:21:34.70000W	331.0	40:10:24.50000S	70:12:45.60000W	100.0	41:27:45.66110S	71:36:19.10893W	40:21:28.52278S	72:22:35.77672W

WGS84TangentFixedRadiusArc Test Results

Test Identifier	Geodesic 1 Start Latitude	Geodesic 1 Start Longitude	Geodesic 1 Azimuth	Geodesic 2 Start Latitude	Geodesic 2 Start Longitude	Geodesic 2 Azimuth	Arc Radius	Arc Direction	Arc Center Latitude	Arc Center Longitude	Tangent Point 1 Latitude	Tangent Point 1 Longitude	Tangent Point 2 Latitude	Tangent Point 2 Longitude
test1	40:10:24.5000N	70:12:45.6000W	90.0	42:04:35.8000N	68:12:34.7000W	7.0	75.0	1	41:25:26.56571N	69:59:17.04094W	40:10:23.74429N	69:59:31.88877W	41:17:07.03907N	68:20:18.39888W
test2	40:10:24.5000N	70:12:45.6000W	90.0	42:04:35.8000N	68:12:34.7000W	307.0	25.0	1	40:31:46.79892N	66:27:03.20189W	40:06:47.06612N	66:28:25.95221W	40:51:25.07414N	66:06:41.57854W
test3	40:10:24.5000N	70:12:45.6000W	180.0	42:04:35.8000N	68:12:34.7000W	10.0	25.0	1	37:49:18.52460N	69:41:12.45766W	37:49:22.75065N	70:12:45.60000W	37:45:17.76097N	69:10:04.65398W
test4	40:10:24.5000N	70:12:45.6000W	175.0	42:04:35.8000N	68:12:34.7000W	10.0	20.0	1	37:58:58.93078N	69:32:51.13441W	37:57:20.15294N	69:58:03.52834W	37:55:45.22180N	69:07:53.72716W
test5	40:10:24.5000N	70:12:45.6000W	140.0	42:04:35.8000N	68:12:34.7000W	355.0	30.0	1	39:24:32.81954N	68:33:23.26170W	39:05:36.47498N	69:03:21.38752W	39:27:10.17660N	67:54:49.02689W
test6	40:10:24.5000N	70:12:45.6000W	35.0	42:04:35.8000N	68:12:34.7000W	20.0	50.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
test7	40:10:24.5000N	70:12:45.6000W	35.0	42:04:35.8000N	68:12:34.7000W	45.0	50.0	-1	40:57:48.66322N	68:07:20.87268W	41:27:16.30680N	69:00:53.40061W	41:33:03.54197N	68:54:23.62947W
test8	40:10:24.5000N	70:12:45.6000W	40.0	42:04:35.8000N	68:12:34.7000W	20.0	10.0	1	41:55:40.79274N	68:31:10.13947W	41:49:05.67932N	68:21:05.52942W	41:52:16.83907N	68:18:34.47631W
test9	40:10:24.5000N	70:12:45.6000W	40.0	42:04:35.8000N	68:12:34.7000W	350.0	5.0	1	41:59:13.16537N	68:18:06.96458W	41:55:55.15030N	68:13:04.79341W	42:00:05.41038N	68:11:30.78144W
test10	40:10:24.5000N	70:12:45.6000W	190.0	42:04:35.8000N	68:12:34.7000W	20.0	15.0	1	38:10:11.23560N	70:20:17.73040W	38:12:44.89584N	70:39:02.59725W	38:05:21.93366N	70:02:17.49744W
test11	40:10:24.5000N	70:12:45.6000W	300.0	42:04:35.8000N	68:12:34.7000W	90.0	15.0	-1	41:43:02.57956N	73:12:06.06904W	41:29:47.49856N	73:21:29.21152W	41:58:01.44478N	73:13:16.42120W
test12	40:10:24.5000N	70:12:45.6000W	320.0	42:04:35.8000N	68:12:34.7000W	120.0	50.0	-1	42:22:04.52412N	71:13:56.01200W	41:49:17.86811N	72:04:39.94655W	43:06:10.85660N	70:41:56.46903W
test13	40:10:24.5000N	70:12:45.6000W	30.0	42:04:35.8000N	68:12:34.7000W	120.0	15.0	-1	41:54:13.54118N	68:28:45.14229W	42:01:57.90713N	68:45:58.79336W	42:07:14.26829N	68:18:43.75999W
test14	40:10:24.5000N	70:12:45.6000W	30.0	42:04:35.8000N	68:12:34.7000W	180.0	10.0	-1	42:07:16.10426N	68:26:00.95597W	42:12:26.23456N	68:37:31.72202W	42:07:16.89107N	68:12:34.70000W
test15	40:10:24.5000N	70:12:45.6000W	20.0	42:04:35.8000N	68:12:34.7000W	190.0	20.0	-1	42:33:38.00509N	68:33:07.56179W	42:40:47.45417N	68:58:25.31418W	42:30:11.24393N	68:06:28.78422W
test16	40:10:24.5000S	70:12:45.6000W	90.0	38:04:35.8000S	68:12:34.7000W	7.0	75.0	1	38:55:19.66495S	69:57:30.23681W	40:10:23.45763S	69:57:13.42772W	39:05:15.38970S	68:22:08.10115W
test17	40:10:24.5000S	70:12:45.6000W	90.0	38:04:35.8000S	68:12:34.7000W	307.0	25.0	1	39:41:24.87800S	66:18:33.94822W	40:06:24.60062S	66:17:08.09870W	39:21:05.93754S	65:59:42.39589W
test18	40:10:24.5000S	70:12:45.6000W	180.0	38:04:35.8000S	68:12:34.7000W	10.0	25.0	1	41:48:21.64034S	69:39:19.85614W	41:48:26.50432S	70:12:45.60000W	41:53:01.81471S	69:06:28.19550W
test19	40:10:24.5000S	70:12:45.6000W	175.0	38:04:35.8000S	68:12:34.7000W	10.0	20.0	1	41:53:23.0849S	69:33:48.78224W	41:55:13.61589S	70:00:29.02018W	41:57:06.70642S	69:07:29.45776W
test20	40:10:24.5000S	70:12:45.6000W	140.0	38:04:35.8000S	68:12:34.7000W	355.0	30.0	1	40:53:21.50747S	68:32:50.30433W	41:13:01.31780S	69:02:47.99272W	40:50:44.90598S	67:53:26.70965W
test21	40:10:24.5000S	70:12:45.6000W	35.0	38:04:35.8000S	68:12:34.7000W	20.0	50.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
test22	40:10:24.5000S	70:12:45.6000W	35.0	38:04:35.8000S	68:12:34.7000W	45.0	50.0	-1	38:59:07.56471S	67:51:47.61471W	38:31:17.23471S	68:44:54.62471W	38:23:43.49471S	68:36:56.20471W

	000S	000W		000S	000W				203S	082W	392S	547W	887S	242W
test23	40:10:24.50 000S	70:12:45.60 000W	40.0	38:04:35.80 000S	68:12:34.70 000W	20.0	10.0	1	38:21:17.65 803S	68:33:50.38 808W	38:27:34.84 485S	68:23:56.35 353W	38:24:44.64 049S	68:21:54.05 514W
test24	40:10:24.50 000S	70:12:45.60 000W	40.0	38:04:35.80 000S	68:12:34.70 000W	350.0	5.0	1	38:12:57.08 171S	68:17:09.17 935W	38:16:05.07 958S	68:12:12.22 289W	38:12:05.00 846S	68:10:54.32 298W
test25	40:10:24.50 000S	70:12:45.60 000W	190.0	38:04:35.80 000S	68:12:34.70 000W	20.0	15.0	1	41:21:05.57 583S	70:09:04.40 926W	41:18:28.19 792S	70:28:40.65 479W	41:26:30.42 675S	69:50:29.08 027W
test26	40:10:24.50 000S	70:12:45.60 000W	300.0	38:04:35.80 000S	68:12:34.70 000W	90.0	15.0	-1	38:11:39.46 782S	73:47:56.44 226W	38:24:20.78 704S	73:58:07.81 572W	37:56:40.09 827S	73:46:48.10 003W
test27	40:10:24.50 000S	70:12:45.60 000W	320.0	38:04:35.80 000S	68:12:34.70 000W	120.0	50.0	-1	37:18:22.45 450S	71:50:53.37 418W	37:49:40.64 492S	72:39:57.99 848W	36:35:56.07 395S	71:17:47.86 633W
test28	40:10:24.50 000S	70:12:45.60 000W	30.0	38:04:35.80 000S	68:12:34.70 000W	120.0	15.0	-1	38:15:18.86 600S	68:27:05.40 167W	38:08:02.37 874S	68:43:44.12 803W	38:02:19.38 377S	68:17:33.22 322W
test29	40:10:24.50 000S	70:12:45.60 000W	30.0	38:04:35.80 000S	68:12:34.70 000W	180.0	10.0	-1	38:02:17.85 831S	68:25:14.17 729W	37:57:27.29 149S	68:36:18.51 623W	38:02:18.53 972S	68:12:34.70 000W
test30	40:10:24.50 000S	70:12:45.60 000W	20.0	38:04:35.80 000S	68:12:34.70 000W	190.0	20.0	-1	37:17:13.88 439S	68:27:34.64 341W	37:10:42.09 265S	68:51:15.15 355W	37:20:43.05 501S	68:02:53.31 084W
test31	40:10:24.50 000S	68:12:45.60 000E	90.0	38:04:35.80 000S	70:12:34.70 000E	7.0	75.0	1	38:55:19.71 316S	68:27:39.15 441E	40:10:23.50 671S	68:27:55.56 302E	39:05:15.43 802S	70:03:01.29 112E
test32	40:10:24.50 000S	68:12:45.60 000E	90.0	38:04:35.80 000S	70:12:34.70 000E	307.0	25.0	1	39:41:25.57 535S	72:06:36.70 261E	40:06:25.30 217S	72:08:02.42 702E	39:21:06.63 156S	72:25:28.25 205E
test33	40:10:24.50 000S	68:12:45.60 000E	180.0	38:04:35.80 000S	70:12:34.70 000E	10.0	25.0	1	41:46:59.98 555S	68:46:10.63 681E	41:47:04.84 568S	68:12:45.60 000E	41:51:40.05 992S	69:19:01.62 673E
test34	40:10:24.50 000S	68:12:45.60 000E	175.0	38:04:35.80 000S	70:12:34.70 000E	10.0	20.0	1	41:52:26.37 245S	68:51:35.20 384E	41:54:16.88 004S	68:24:55.35 570E	41:56:09.94 304S	69:17:54.15 406E
test35	40:10:24.50 000S	68:12:45.60 000E	140.0	38:04:35.80 000S	70:12:34.70 000E	355.0	30.0	1	40:53:00.52 340S	69:52:16.78 699E	41:12:40.22 975S	69:22:19.13 720E	40:50:23.93 467S	70:31:40.17 600E
test36	40:10:24.50 000S	68:12:45.60 000E	35.0	38:04:35.80 000S	70:12:34.70 000E	20.0	50.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
test37	40:10:24.50 000S	68:12:45.60 000E	35.0	38:04:35.80 000S	70:12:34.70 000E	45.0	50.0	-1	38:58:15.99 199S	70:34:27.34 186E	38:30:25.98 705S	69:41:20.68 237E	38:22:52.33 996S	69:49:18.75 679E
test38	40:10:24.50 000S	68:12:45.60 000E	40.0	38:04:35.80 000S	70:12:34.70 000E	20.0	10.0	1	38:21:56.65 274S	69:51:00.76 931E	38:28:13.89 538S	70:00:54.83 463E	38:25:23.66 587S	70:02:57.19 466E
test39	40:10:24.50 000S	68:12:45.60 000E	40.0	38:04:35.80 000S	70:12:34.70 000E	350.0	5.0	1	38:13:14.64 955S	70:08:04.12 833E	38:16:22.65 986S	70:13:01.09 183E	38:12:22.57 289S	70:14:19.00 895E
test40	40:10:24.50 000S	68:12:45.60 000E	190.0	38:04:35.80 000S	70:12:34.70 000E	20.0	15.0	1	41:19:48.53 358S	68:16:44.73 461E	41:17:11.20 581S	67:57:08.86 172E	41:25:13.27 841S	68:35:19.75 280E
test41	40:10:24.50 000S	68:12:45.60 000E	300.0	38:04:35.80 000S	70:12:34.70 000E	90.0	15.0	-1	38:11:40.61 138S	64:37:37.05 220E	38:24:21.93 390S	64:27:25.68 277E	37:56:41.23 801S	64:38:45.31 315E
test42	40:10:24.50 000S	68:12:45.60 000E	320.0	38:04:35.80 000S	70:12:34.70 000E	120.0	50.0	-1	37:18:44.79 574S	66:35:00.43 984E	37:50:03.14 293S	65:45:55.73 018E	36:36:18.21 450S	67:08:05.70 311E
test43	40:10:24.50 000S	68:12:45.60 000E	30.0	38:04:35.80 000S	70:12:34.70 000E	120.0	15.0	-1	38:15:26.42 644S	69:58:20.50 710E	38:08:09.92 689S	69:41:41.76 083E	38:02:26.92 225S	70:07:52.65 334E
test44	40:10:24.50 000S	68:12:45.60 000E	30.0	38:04:35.80 000S	70:12:34.70 000E	180.0	10.0	-1	38:02:49.25 073S	69:59:55.13 263E	37:57:58.65 008S	69:48:50.73 899E	38:02:49.93 235S	70:12:34.70 000E
test45	40:10:24.50 000S	68:12:45.60 000E	20.0	38:04:35.80 000S	70:12:34.70 000E	190.0	20.0	-1	37:19:00.32 748S	69:57:10.89 521E	37:12:28.38 650S	69:33:29.89 561E	37:22:29.58 087S	70:21:52.79 009E
test46	40:10:24.50 000N	68:12:45.60 000E	90.0	42:04:35.80 000N	70:12:34.70 000E	7.0	75.0	1	41:25:26.60 664N	68:25:52.36 461E	40:10:23.78 448N	68:25:37.91 699E	41:17:07.07 993N	70:04:51.00 769E

test47	40:10:24.50 000N	68:12:45.60 000E	90.0	42:04:35.80 000N	70:12:34.70 000E	307.0	25.0	1	40:31:47.54 306N	71:58:04.95 738E	40:06:47.80 578N	71:56:42.34 739E	40:51:25.82 191N	72:18:26.57 839E
test48	40:10:24.50 000N	68:12:45.60 000E	180.0	42:04:35.80 000N	70:12:34.70 000E	10.0	25.0	1	37:51:10.80 607N	68:44:19.53 963E	37:51:15.03 684N	68:12:45.60 000E	37:47:09.94 546N	69:15:28.10 850E
test49	40:10:24.50 000N	68:12:45.60 000E	175.0	42:04:35.80 000N	70:12:34.70 000E	10.0	20.0	1	38:00:10.41 235N	68:52:32.81 783E	37:58:31.60 944N	68:27:20.01 909E	37:56:56.65 308N	69:17:30.61 773E
test50	40:10:24.50 000N	68:12:45.60 000E	140.0	42:04:35.80 000N	70:12:34.70 000E	355.0	30.0	1	39:24:56.40 398N	69:51:43.36 317E	39:05:59.95 608N	69:21:45.17 977E	39:27:33.77 651N	70:30:17.81 305E
test51	40:10:24.50 000N	68:12:45.60 000E	35.0	42:04:35.80 000N	70:12:34.70 000E	20.0	50.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
test52	40:10:24.50 000N	68:12:45.60 000E	35.0	42:04:35.80 000N	70:12:34.70 000E	45.0	50.0	-1	40:58:50.90 375N	70:19:10.81 896E	41:28:19.01 585N	69:25:37.89 916E	41:34:06.34 313N	69:32:08.06 055E
test53	40:10:24.50 000N	68:12:45.60 000E	40.0	42:04:35.80 000N	70:12:34.70 000E	20.0	10.0	1	41:55:09.03 646N	69:53:43.95 858E	41:48:33.97 658N	70:03:48.54 891E	41:51:45.11 040N	70:06:19.53 131E
test54	40:10:24.50 000N	68:12:45.60 000E	40.0	42:04:35.80 000N	70:12:34.70 000E	350.0	5.0	1	41:58:57.74 099N	70:07:06.10 358E	41:55:39.73 901N	70:12:08.27 010E	41:59:49.98 252N	70:13:42.26 099E
test55	40:10:24.50 000N	68:12:45.60 000E	190.0	42:04:35.80 000N	70:12:34.70 000E	20.0	15.0	1	38:11:57.14 712N	68:05:36.93 299E	38:14:30.86 947N	67:46:51.62 699E	38:07:07.73 150N	68:23:37.55 015E
test56	40:10:24.50 000N	68:12:45.60 000E	300.0	42:04:35.80 000N	70:12:34.70 000E	90.0	15.0	-1	41:43:03.43 894N	65:13:22.97 799E	41:29:48.35 505N	65:03:59.84 075E	41:58:02.30 748N	65:12:12.70 228E
test57	40:10:24.50 000N	68:12:45.60 000E	320.0	42:04:35.80 000N	70:12:34.70 000E	120.0	50.0	-1	42:21:48.75 747N	67:11:53.44 646E	41:49:02.23 303N	66:21:09.56 547E	43:05:54.90 302N	67:43:53.33 289E
test58	40:10:24.50 000N	68:12:45.60 000E	30.0	42:04:35.80 000N	70:12:34.70 000E	120.0	15.0	-1	41:54:06.60 769N	69:56:40.44 962E	42:01:50.95 973N	69:39:26.81 837E	42:07:07.31 140N	70:06:41.86 897E
test59	40:10:24.50 000N	68:12:45.60 000E	30.0	42:04:35.80 000N	70:12:34.70 000E	180.0	10.0	-1	42:06:49.39 078N	69:59:08.53 808E	42:11:59.48 512N	69:47:37.82 330E	42:06:50.17 739N	70:12:34.70 000E
test60	40:10:24.50 000N	68:12:45.60 000E	20.0	42:04:35.80 000N	70:12:34.70 000E	190.0	20.0	-1	42:32:22.60 485N	69:51:44.28 487E	42:39:31.91 024N	69:26:26.96 605E	42:28:55.91 068N	70:18:22.54 478E

WGS84GeoLocusIntersect Test Results

Test Identifier	Geodesic Input	Geodesic Start Latitude	Geodesic Start Longitude	Geodesic End Latitude	Geodesic End Longitude						
	Locus Input	Locus Geodesic Start Latitude	Locus Geodesic Start Longitude	Locus Geodesic End Latitude	Locus Geodesic End Longitude	Locus Start Latitude	Locus Start Longitude	Locus End Latitude	Locus End Longitude	Locus Start Distance (nm)	Locus End Distance (nm)
	Output	Intersection Latitude	Intersection Longitude								
test1	Geodesic Input	43:47:17.8000 0N	69:11:50.6000 0W	39:34:35.8000 0N	69:12:34.7000 0W						
	Locus Input	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:34:51.0899 7N	70:54:12.4935 8W	42:29:44.8698 0N	68:54:29.5954 1W	-40.0	-40.0
	Output	42:13:22.2144 7N	69:12:07.6754 0W								
test2	Geodesic Input	41:47:17.8000 0N	69:11:50.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W						
	Locus Input	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:16:32.5468 3N	70:23:04.5187 6W	42:10:54.5106 7N	68:23:00.3023 2W	-10.0	-10.0
	Output	41:57:19.7904 5N	68:37:45.0785 8W								
test3	Geodesic Input	41:47:17.8000 0N	69:11:50.6000 0W	41:47:17.8000 0N	65:12:34.7000 0W						
	Locus Input	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:01:10.7013 8N	69:57:20.7013 2W	41:58:16.1381 7N	68:02:11.1632 1W	15.0	10.0
	Output	41:48:04.2439 4N	68:12:34.3229 9W								
test4	Geodesic Input	41:47:17.8000 0N	69:11:50.6000 0W	39:36:04.5000 0N	67:26:41.2000 0W						
	Locus Input	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:03:01.6262 4N	70:00:25.3480 4W	41:53:11.7282 8N	67:53:53.8147 1W	12.0	18.0
	Output	41:11:48.4012 8N	68:42:35.0157 7W								
test5	Geodesic Input	41:47:17.8000 0N	69:11:50.6000 0W	39:36:04.5000 0N	69:11:50.6000 0W						
	Locus Input	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:17:46.0449 3N	70:25:08.5260 3W	42:10:54.5106 7N	68:23:00.3023 2W	-12.0	-10.0
	Output	41:26:42.3321 3N	69:11:50.6000 0W								
test6	Geodesic Input	41:47:17.8000 0N	69:11:50.6000 0W	40:10:24.5000 0N	70:12:45.6000 0W						
	Locus Input	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:16:32.5468 3N	70:23:04.5187 6W	42:17:12.2636 1N	68:33:27.9794 9W	-10.0	-20.0
	Output	41:09:26.3350 3N	69:36:02.5956 5W								
test7	Geodesic Input	38:47:17.8000 0N	69:11:50.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W						

	Locus Input	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:58:16.1381 7N	68:02:11.1632 2W	40:01:10.7013 8N	69:57:20.7013 2W	-10.0	-15.0
	Output	41:40:37.8302 5N	68:20:06.2633 0W								
test8	Geodesic Input	38:47:17.8000 0N	69:11:50.6000 0W	41:36:04.5000 0N	69:11:50.6000 0W						
	Locus Input	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	42:12:10.1380 9N	68:25:05.6714 7W	40:16:32.5468 3N	70:23:04.5187 6W	12.0	10.0
	Output	41:27:24.3094 7N	69:11:50.6000 0W								
test9	Geodesic Input	39:47:17.8000 0N	69:11:50.6000 0W	41:10:24.5000 0N	70:12:45.6000 0W						
	Locus Input	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:55:44.0085 9N	67:58:02.3247 7W	40:04:15.5303 7N	70:02:28.5382 3W	-14.0	-10.0
	Output	40:25:30.2029 5N	69:39:29.1545 4W								
test10	Geodesic Input	39:47:17.8000 0N	69:11:50.6000 0W	41:05:17.8000 0N	72:11:50.6000 0W						
	Locus Input	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:39:11.5109 4N	67:31:12.8528 1W	39:48:49.1084 0N	69:36:53.9576 0W	-40.0	-35.0
	Output	39:55:22.6825 0N	69:29:41.6206 7W								
test11	Geodesic Input	39:47:17.8000 0N	68:31:50.6000 0W	39:47:17.8000 0N	72:11:50.6000 0W						
	Locus Input	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:35:59.9254 6N	67:26:04.9158 8W	39:39:30.5435 3N	69:21:38.7068 5W	-45.0	-50.0
	Output	39:47:49.9182 7N	69:13:40.3936 7W								
test12	Geodesic Input	40:47:17.8000 0N	68:31:50.6000 0W	39:15:17.8000 0N	72:11:50.6000 0W						
	Locus Input	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:40:28.0804 1N	67:33:16.1694 9W	39:42:36.9560 7N	69:26:43.3345 6W	-38.0	-45.0
	Output	40:51:17.2023 2N	68:21:40.0023 1W								
test13	Geodesic Input	41:47:17.8000 0N	68:11:50.6000 0E	42:34:35.8000 0N	69:12:34.7000 0E						
	Locus Input	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:34:48.3409 8N	67:31:15.9527 5E	42:30:56.9433 7N	69:28:29.9691 1E	-40.0	-42.0
	Output	N/A	N/A								
test14	Geodesic Input	41:47:17.8000 0N	68:11:50.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E						
	Locus Input	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:16:31.8626 3N	68:02:25.9906 4E	42:12:09.2928 5N	70:00:02.8081 5E	-10.0	-12.0
	Output	42:01:21.0540 6N	69:48:40.1433 4E								
test15	Geodesic Input	41:47:17.8000 0N	68:11:50.6000 0E	41:47:17.8000 0N	69:12:34.7000 0E						
	Locus Input	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:34:48.3409 8N	67:31:15.9527 5E	42:29:04.5727 8N	69:31:40.1006 1E	-40.0	-39.0

	Output	41:47:21.7281 2N	68:46:38.5155 7E								
test16	Geodesic Input	41:47:17.8000 0N	67:11:50.6000 0E	39:36:04.5000 0N	69:26:41.2000 0E						
	Locus Input	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:16:31.8626 3N	68:02:25.9906 4E	42:09:38.2818 2N	70:04:13.7700 3E	-10.0	-8.0
	Output	40:37:49.7168 3N	68:24:40.0172 9E								
test17	Geodesic Input	41:47:17.8000 0N	68:31:50.6000 0E	39:34:35.8000 0N	68:31:50.6000 0E						
	Locus Input	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:07:20.4715 0N	68:17:54.7083 4E	42:03:20.0840 7N	70:14:39.7258 8E	5.0	2.0
	Output	40:21:38.9851 9N	68:31:50.6000 0E								
test18	Geodesic Input	41:47:17.8000 0N	68:41:50.6000 0E	40:10:24.5000 0N	68:12:45.6000 0E						
	Locus Input	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:16:31.8626 3N	68:02:25.9906 4E	42:07:44.9228 6N	70:07:21.7738 9E	-10.0	-5.0
	Output	40:31:50.2065 4N	68:19:04.0475 2E								
test19	Geodesic Input	38:47:17.8000 0N	68:11:50.6000 0E	42:04:35.8000 0N	69:12:34.7000 0E						
	Locus Input	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:59:32.7079 7N	70:20:54.3088 5E	40:04:16.2125 5N	68:23:03.3537 3E	-8.0	-10.0
	Output	40:21:27.3228 7N	68:40:03.9922 6E								
test20	Geodesic Input	38:47:17.8000 0N	69:11:50.6000 0E	41:36:04.5000 0N	69:11:50.6000 0E						
	Locus Input	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	42:01:26.4387 8N	70:17:47.1100 5E	40:07:57.2956 6N	68:16:52.9237 4E	-5.0	-4.0
	Output	41:00:37.2269 9N	69:11:50.6000 0E								
test21	Geodesic Input	39:47:17.8000 0N	69:11:50.6000 0E	41:10:24.5000 0N	68:12:45.6000 0E						
	Locus Input	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	42:00:48.5380 0N	70:18:49.5302 3E	40:01:11.7238 9N	68:28:11.5371 3E	-6.0	-15.0
	Output	40:22:24.9352 4N	68:47:13.1053 5E								
test22	Geodesic Input	38:47:17.8000 0N	72:11:50.6000 0E	40:05:17.8000 0N	69:11:50.6000 0E						
	Locus Input	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:39:14.3045 5N	70:53:59.6280 6E	39:44:31.5476 6N	68:55:47.7851 1E	-40.0	-42.0
	Output	40:03:55.5261 6N	69:15:09.8638 4E								
test23	Geodesic Input	39:47:17.8000 0N	72:11:50.6000 0E	39:47:17.8000 0N	68:11:50.6000 0E						
	Locus Input	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:42:25.3115 2N	70:48:50.7979 6E	39:44:31.5476 6N	68:55:47.7851 1E	-35.0	-42.0
	Output	39:47:56.9679	68:58:57.6908								

		8N	7E								
test24	Geodesic Input	41:47:17.8000 0N	72:01:50.6000 0E	40:15:17.8000 0N	69:01:50.6000 0E						
	Locus Input	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:45:36.0858 1N	70:43:41.4599 3E	39:50:42.7543 3N	68:45:35.9178 6E	-30.0	-32.0
	Output	40:24:52.2396 3N	69:19:46.8195 9E								
test25	Geodesic Input	40:32:17.8000 0S	69:31:50.6000 0W	39:45:35.8000 0S	68:32:34.7000 0W						
	Locus Input	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:47:14.9917 2S	70:17:56.7067 3W	39:37:07.2624 6S	68:43:14.9169 5W	-5.0	-30.0
	Output	40:15:45.4197 2S	69:10:37.4206 1W								
test26	Geodesic Input	40:12:17.8000 0S	69:11:50.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W						
	Locus Input	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:44:05.2480 5S	70:23:07.3045 6W	39:48:13.3652 7S	68:24:52.7554 6W	-10.0	-12.0
	Output	40:03:21.1648 3S	68:39:49.2081 5W								
test27	Geodesic Input	40:12:17.8000 0S	69:11:50.6000 0W	40:12:17.8000 0S	65:12:34.7000 0W						
	Locus Input	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:40:55.2698 1S	70:28:17.3946 4W	39:44:31.6564 9S	68:31:00.7972 1W	-15.0	-18.0
	Output	40:12:30.9062 6S	68:58:24.7194 6W								
test28	Geodesic Input	40:12:17.8000 0S	69:11:50.6000 0W	42:05:35.8000 0S	67:26:34.7000 0W						
	Locus Input	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:51:02.3733 4S	70:11:43.3174 9W	39:56:49.4111 6S	68:10:31.4344 2W	1.0	2.0
	Output	40:35:40.8131 3S	68:50:43.6999 6W								
test29	Geodesic Input	40:12:17.8000 0S	69:11:50.6000 0W	42:25:35.8000 0S	69:11:50.6000 0W						
	Locus Input	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:51:40.2372 3S	70:10:41.0145 6W	39:57:26.2029 9S	68:09:29.7741 1W	2.0	3.0
	Output	40:57:17.6228 9S	69:11:50.6000 0W								
test30	Geodesic Input	40:12:17.8000 0S	69:11:50.6000 0W	41:50:24.5000 0S	70:12:45.6000 0W						
	Locus Input	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:40:55.2698 1S	70:28:17.3946 4W	39:43:17.6810 7S	68:33:03.3321 3W	-15.0	-20.0
	Output	40:43:15.1312 0S	69:30:42.1630 9W								
test31	Geodesic Input	43:12:17.8000 0S	69:11:50.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W						
	Locus Input	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	39:58:39.7591 1S	68:07:26.3984 1W	41:51:40.2372 3S	70:10:41.0145 6W	-5.0	-2.0
	Output	40:06:31.2891 6S	68:15:42.7811 0W								

test32	Geodesic Input	43:12:17.8000 0S	69:11:50.6000 0W	40:55:35.8000 0S	69:11:50.6000 0W						
	Locus Input	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:00:30.0243 5S	68:04:21.1970 5W	41:54:49.4146 1S	70:05:29.1934 6W	-8.0	-7.0
	Output	41:05:16.1967 0S	69:11:50.6000 0W								
test33	Geodesic Input	42:12:17.8000 0S	69:11:50.6000 0W	40:50:24.5000 0S	70:12:45.6000 0W						
	Locus Input	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	39:48:13.3652 7S	68:24:52.7554 6W	41:44:05.2480 5S	70:23:07.3045 6W	12.0	10.0
	Output	41:16:14.1218 6S	69:53:51.9828 3W								
test34	Geodesic Input	42:12:17.8000 0S	69:11:50.6000 0W	40:45:17.5000 0S	72:11:50.6000 0W						
	Locus Input	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:13:56.0936 0S	67:41:37.9819 4W	42:06:08.4822 9S	69:46:42.3928 7W	-30.0	-25.0
	Output	41:59:37.9145 3S	69:39:10.9123 1W								
test35	Geodesic Input	42:12:17.8000 0S	69:11:50.6000 0W	42:12:17.8000 0S	72:11:50.6000 0W						
	Locus Input	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:20:00.9982 1S	67:31:15.3738 3W	42:14:16.9856 5S	69:33:04.4385 8W	-40.0	-38.0
	Output	42:12:31.3088 9S	69:31:07.4285 9W								
test36	Geodesic Input	40:12:17.8000 0S	67:11:50.6000 0W	41:30:17.8000 0S	70:11:50.6000 0W						
	Locus Input	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:01:06.7610 2S	68:03:19.4264 9W	41:55:27.2216 4S	70:04:26.7678 7W	-9.0	-8.0
	Output	41:03:44.0940 8S	69:08:30.8154 4W								
test37	Geodesic Input	40:42:17.8000 0S	68:11:50.6000 0E	39:52:35.8000 0S	69:12:34.7000 0E						
	Locus Input	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:25:04.6826 4S	67:31:27.8664 2E	39:30:21.5500 1S	69:30:40.9995 3E	-40.0	-41.0
	Output	40:15:33.0873 5S	68:44:47.5589 1E								
test38	Geodesic Input	40:12:17.8000 0S	68:11:50.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E						
	Locus Input	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:40:56.3220 3S	67:57:12.6583 9E	39:49:27.8779 9S	70:02:18.7824 2E	-15.0	-10.0
	Output	39:58:31.8412 8S	69:52:29.2974 2E								
test39	Geodesic Input	40:12:17.8000 0S	68:11:50.6000 0E	40:12:17.8000 0S	72:12:34.7000 0E						
	Locus Input	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:47:15.3430 2S	68:07:34.1112 6E	39:51:18.3506 3S	70:05:23.3657 7E	-5.0	-7.0
	Output	40:13:16.8917 9S	69:43:44.0319 0E								
test40	Geodesic Input	38:01:17.8000	68:11:50.6000	40:12:17.8000	69:56:34.7000						

	ic Input	OS	OE	OS	OE						
	Locus Input	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:40:56.3220 3S	67:57:12.6583 9E	39:44:32.8834 3S	69:54:07.3624 3E	-15.0	-18.0
	Output	39:55:56.2019 9S	69:43:03.9371 8E								
test41	Geodesic Input	38:01:17.8000 0S	69:11:50.6000 0E	41:12:17.8000 0S	69:11:50.6000 0E						
	Locus Input	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:40:56.3220 3S	67:57:12.6583 9E	39:43:19.0439 4S	69:52:04.6894 3E	-15.0	-20.0
	Output	40:25:31.9506 2S	69:11:50.6000 0E								
test42	Geodesic Input	38:01:17.8000 0S	69:11:50.6000 0E	41:50:24.5000 0S	68:12:45.6000 0E						
	Locus Input	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:40:56.3220 3S	67:57:12.6583 9E	39:44:32.8834 3S	69:54:07.3624 3E	-15.0	-18.0
	Output	41:17:14.5926 9S	68:21:44.5433 8E								
test43	Geodesic Input	43:29:17.8000 0S	68:11:50.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E						
	Locus Input	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	40:10:51.5757 9S	70:38:22.5258 4E	42:09:14.4414 0S	68:44:05.2763 0E	-25.0	-30.0
	Output	41:34:33.3590 0S	69:18:28.6928 5E								
test44	Geodesic Input	42:29:17.8000 0S	69:11:50.6000 0E	38:55:35.8000 0S	68:11:50.6000 0E						
	Locus Input	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	40:00:29.4769 5S	70:20:48.7528 2E	41:56:04.3853 8S	68:22:07.5649 9E	-8.0	-9.0
	Output	41:26:23.0050 8S	68:53:29.0887 3E								
test45	Geodesic Input	42:29:17.8000 0S	69:11:50.6000 0E	40:50:24.5000 0S	68:12:45.6000 0E						
	Locus Input	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	39:57:25.9978 7S	70:15:39.8321 9E	41:53:33.4202 2S	68:17:57.5984 6E	-3.0	-5.0
	Output	41:34:00.9006 6S	68:38:24.2439 6E								
test46	Geodesic Input	40:29:17.8000 0S	70:11:50.6000 0E	38:45:07.5000 0S	67:11:50.6000 0E						
	Locus Input	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	39:58:02.7121 0S	70:16:41.5796 0E	41:52:17.8805 9S	68:15:52.7378 4E	-4.0	-3.0
	Output	40:19:41.2420 9S	69:54:30.1130 8E								

WGS84LocusArcIntersect Test Results

Test Identifier	Locus Inputs	Locus Geodesic Start Latitude	Locus Geodesic Start Longitude	Locus Geodesic End Latitude	Locus Geodesic End Longitude	Locus Start Latitude	Locus Start Longitude	Locus End Latitude	Locus End Longitude	Locus Start Distance	Locus End Distance
	Arc Inputs	Arc Center Latitude	Arc Center Longitude	Arc Radius							
	Outputs	Intersection 1 Latitude	Intersection 1 Longitude	Intersection 2 Latitude	Intersection 2 Longitude						
test1	LocusInputs	40:04:35.8000 0N	67:12:40.7000 0W	44:59:45.9208 8N	68:26:00.2113 7W	39:56:32.2458 3N	68:10:17.8928 7W	44:49:00.821 97N	69:41:53.8588 0W	-45.0	-55.0
	ArcInputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	41:16:20.9748 3N	68:33:49.6470 6W	N/A	N/A						
test2	LocusInputs	40:04:35.8000 0N	67:12:40.7000 0W	35:21:11.7476 2N	69:17:59.1245 0W	40:19:46.7625 7N	68:07:58.2868 6W	35:38:35.678 60N	70:21:53.8095 3W	45.0	55.0
	ArcInputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	38:52:37.3211 0N	68:51:25.9239 8W	N/A	N/A						
test3	LocusInputs	40:04:35.8000 0N	68:12:40.7000 0W	44:06:29.0814 5N	72:11:23.8327 9W	40:10:19.7105 4N	68:01:59.5268 0W	44:15:37.901 40N	71:54:52.5090 7W	10.0	15.0
	ArcInputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	40:10:40.4839 2N	68:02:17.7464 3W	41:44:11.1114 4N	69:26:43.2997 3W						
test4	LocusInputs	40:04:35.8000 0N	67:12:40.7000 0W	39:53:37.8685 2N	73:42:48.0144 0W	39:24:33.8481 0N	67:12:40.7000 0W	39:13:42.172 01N	73:39:02.8520 8W	-40.0	-40.0
	ArcInputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	39:24:15.4516 0N	68:17:38.6312 6W	39:18:24.7960 5N	72:03:32.0122 7W						
test5	LocusInputs	40:04:35.8000 0N	67:12:40.7000 0W	42:25:59.2966 6N	73:03:41.4214 0W	39:47:15.0303 5N	67:25:39.0489 4W	42:03:31.246 36N	73:18:28.5544 1W	-20.0	-25.0
	ArcInputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	40:02:54.5608 6N	68:02:47.1264 1W	41:27:12.3325 5N	71:37:11.7522 3W						
test6	LocusInputs	40:04:35.8000 0N	67:12:40.7000 0W	37:26:38.4937 4N	72:39:00.0419 7W	40:24:30.8080 2N	67:27:43.9750 8W	37:47:30.860 22N	72:56:21.9550 9W	23.0	25.0
	ArcInputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	40:09:14.2959 5N	68:02:19.6287 9W	38:40:57.6987 7N	71:10:40.2263 3W						
test7	LocusInputs	42:54:35.8000 0N	70:11:34.7000 0W	37:54:23.2544 9N	70:11:34.7000 0W	42:54:34.6354 6N	69:55:14.9526 5W	37:54:22.705 15N	70:00:12.3933 1W	-12.0	-9.0
	ArcInputs	40:10:24.5000	70:12:45.6000	100.0							

		0N	0W								
	Outputs	41:49:41.8125 3N	69:56:23.6694 5W	38:30:50.3527 2N	69:59:38.8532 8W						
test8	LocusInp uts	42:54:35.8000 0N	70:11:34.7000 0W	38:36:54.7497 0N	66:48:53.1121 0W	42:45:33.4587 9N	70:31:08.9200 1W	38:25:55.700 18N	67:13:10.9719 1W	17.0	22.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	41:48:11.2142 8N	69:44:43.2787 9W	39:41:58.4778 9N	68:08:06.4480 2W						
test9	LocusInp uts	42:54:35.8000 0N	70:11:34.7000 0W	38:34:20.9298 5N	73:28:27.3739 7W	42:47:21.8889 5N	69:55:16.8235 1W	38:30:28.695 75N	73:19:31.7971 7W	-14.0	-8.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	41:47:15.3317 5N	70:45:57.1355 6W	39:49:26.3001 6N	72:19:59.9361 4W						
test10	LocusInp uts	40:24:35.8000 0N	75:11:34.7000 0W	40:13:30.1326 0N	68:39:33.2928 9W	40:09:35.1524 9N	75:11:34.7000 0W	39:53:32.477 81N	68:41:28.2940 0W	15.0	20.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	40:05:22.1852 8N	72:22:58.4868 8W	N/A	N/A						
test11	LocusInp uts	40:24:35.8000 0N	75:11:34.7000 0W	41:52:02.6308 8N	68:51:37.8257 1W	40:17:01.5793 1N	75:08:10.5002 1W	41:46:14.448 89N	68:49:34.6745 8W	8.0	
	Arclnputs	6.0	40:10:24.5000 0N								
	Outputs	70:12:45.6000 0W	100.0	41:03:30.8815 9N	72:04:03.6671 7W	41:40:47.0691 6N	69:16:07.9330 3W				
test12	LocusInp uts	40:24:35.8000 0N	75:11:34.7000 0W	37:59:52.6040 3N	69:33:17.7337 1W	40:34:24.0808 0N	75:05:01.4892 4W	38:11:04.655 06N	69:24:54.6459 8W	-11.0	-13.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	39:22:31.1091 7N	72:06:39.1575 8W	38:30:24.5213 7N	70:07:20.1753 1W						
test13	LocusInp uts	37:09:35.8000 0N	70:21:34.7000 0W	42:09:50.6694 2N	70:21:34.7000 0W	37:09:34.1097 3N	70:01:33.7441 6W	42:09:49.715 95N	70:06:47.2225 4W	16.0	11.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	38:30:36.7511 3N	70:02:54.7744 7W	41:50:21.1627 0N	70:06:25.6778 3W						
test14	LocusInp uts	37:09:35.8000 0N	70:21:34.7000 0W	41:15:08.9818 0N	66:39:17.4351 8W	37:14:37.7729 8N	70:30:55.3685 5W	41:19:17.778 92N	66:46:46.4276 2W	-9.0	-7.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							
	Outputs	38:40:34.8682 1N	69:15:50.3909 0W	39:59:51.9250 0N	68:03:11.5422 7W						
test15	LocusInp uts	37:09:35.8000 0N	70:21:34.7000 0W	41:29:39.4876 1N	73:34:58.7850 0W	37:15:24.5696 0N	70:08:25.9039 6W	41:34:48.499 58N	73:23:33.8085 4W	12.0	10.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0W	100.0							

	Outputs	38:40:27.4572 7N	71:09:21.2458 7W	40:18:13.2691 4N	72:22:56.8090 3W						
test16	LocusInputs	40:04:35.8000 0N	73:12:40.7000 0E	44:59:45.9208 8N	71:59:21.1886 3E	39:48:00.1582 7N	71:17:40.2047 2E	44:43:50.982 19N	70:09:07.2484 8E	-90.0	-80.0
	ArclInputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	41:46:00.6833 6N	70:51:43.5240 2E	N/A	N/A						
test17	LocusInputs	40:04:35.8000 0N	73:12:40.7000 0E	35:21:11.7476 2N	71:07:22.2755 0E	40:36:07.6515 1N	71:15:28.1772 7E	35:49:22.227 73N	69:22:33.0676 0E	95.0	90.0
	ArclInputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	38:30:43.2022 6N	70:24:16.3655 8E	N/A	N/A						
test18	LocusInputs	40:04:35.8000 0N	72:12:40.7000 0E	43:30:53.4568 5N	67:21:10.0978 4E	40:14:29.4896 2N	72:25:36.3511 1E	43:49:30.216 72N	67:44:10.0992 6E	14.0	25.0
	ArclInputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	40:16:35.4902 3N	72:23:04.1901 2E	41:49:56.0391 3N	70:26:23.1796 2E						
test19	LocusInputs	40:04:35.8000 0N	73:12:40.7000 0E	39:53:37.8685 2N	66:42:33.3856 0E	39:32:34.2606 2N	73:12:40.7000 0E	39:28:40.604 61N	66:44:54.6155 0E	-32.0	-25.0
	ArclInputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	39:33:23.2077 9N	72:13:25.3583 8E	39:31:28.7112 4N	68:13:08.4293 0E						
test20	LocusInputs	40:04:35.8000 0N	73:12:40.7000 0E	42:25:59.2966 6N	67:21:39.9786 0E	39:55:03.5626 8N	73:05:31.7978 6E	42:17:00.316 04N	67:15:43.8652 9E	-11.0	-10.0
	ArclInputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	40:13:44.9057 2N	72:23:12.0645 1E	41:35:55.7136 9N	69:04:18.2553 8E						
test21	LocusInputs	40:04:35.8000 0N	73:12:40.7000 0E	37:26:38.4937 4N	67:46:21.3580 3E	40:15:51.4884 9N	73:04:11.2378 5E	37:39:10.229 38N	67:35:57.3759 9E	13.0	15.0
	ArclInputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	39:57:08.5482 8N	72:21:51.6052 7E	38:36:13.7012 4N	69:29:05.9172 8E						
test22	LocusInputs	42:54:35.8000 0N	70:11:34.7000 0E	37:54:23.2544 9N	70:11:34.7000 0E	42:54:17.1683 4N	71:16:53.4845 0E	37:54:09.521 52N	71:08:26.1207 5E	-48.0	-45.0
	ArclInputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	41:38:47.5615 0N	71:14:35.8700 8E	38:40:33.8191 8N	71:09:38.0482 7E						
test23	LocusInputs	42:54:35.8000 0N	70:11:34.7000 0E	38:36:54.7497 8N	73:34:16.2879 0E	42:45:33.4587 9N	69:52:00.4799 9E	38:26:55.822 63N	73:12:10.6557 4E	17.0	20.0
	ArclInputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	41:48:29.4306	70:38:53.2169	39:41:45.9624	72:17:19.7266						

		6N	6E	1N	9E						
test24	LocusInp uts	42:54:35.8000 0N	70:11:34.7000 0E	38:34:20.9298 5N	66:54:42.0260 3E	42:46:50.8063 2N	70:29:02.2793 8E	38:26:06.617 68N	67:13:38.9838 6E	-15.0	-17.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	41:47:43.4019 6N	69:42:02.5004 1E	39:42:31.1481 6N	68:07:53.5097 7E						
test25	LocusInp uts	40:24:35.8000 0N	65:11:34.7000 0E	40:13:30.1326 0N	71:43:36.1071 1E	39:57:34.6063 8N	65:11:34.7000 0E	39:41:33.836 75N	71:40:32.6380 2E	27.0	32.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	39:53:11.0887 5N	68:04:30.9394 0E	N/A	N/A						
test26	LocusInp uts	40:24:35.8000 0N	65:11:34.7000 0E	41:52:02.6308 8N	71:31:31.5742 9E	40:13:14.4277 8N	65:16:40.7150 7E	41:41:24.264 79N	71:35:17.0690 7E	12.0	11.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	40:58:28.4060 6N	68:17:39.1668 3E	41:37:44.2769 8N	71:17:08.4632 2E						
test27	LocusInp uts	40:24:35.8000 0N	65:11:34.7000 0E	37:59:52.6040 3N	70:49:51.6662 9E	40:38:51.3523 9N	65:21:07.2755 6E	38:11:56.325 57N	70:58:53.5592 9E	-16.0	-14.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	39:25:51.8708 6N	68:16:33.7600 2E	38:30:27.4268 2N	70:19:30.2173 2E						
test28	LocusInp uts	37:09:35.8000 0N	70:21:34.7000 0E	42:09:50.6694 2N	70:21:34.7000 0E	37:09:12.0321 4N	71:36:38.0418 9E	42:09:20.381 91N	71:44:56.4178 6E	60.0	62.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	38:56:06.4922 9N	71:39:23.3095 9E	41:22:52.7168 1N	71:43:31.9281 9E						
test29	LocusInp uts	37:09:35.8000 0N	70:21:34.7000 0E	41:24:05.8131 5N	73:46:45.5983 0E	37:14:44.7226 5N	70:10:50.5808 7E	41:28:28.203 39N	73:37:51.0786 4E	-10.0	-8.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	38:45:47.1679 3N	71:21:43.1653 7E	40:00:12.6274 2N	72:22:22.7926 6E						
test30	LocusInp uts	37:09:35.8000 0N	70:21:34.7000 0E	41:29:39.4876 1N	67:08:10.6150 0E	37:17:49.4571 8N	70:40:12.7566 2E	41:37:22.578 04N	67:25:18.7593 8E	17.0	15.0
	Arclnputs	40:10:24.5000 0N	70:12:45.6000 0E	100.0							
	Outputs	38:32:19.4432 9N	69:47:05.3648 1E	40:42:42.1017 9N	68:08:47.2353 3E						
test31	LocusInp uts	40:04:35.8000 0S	73:12:40.7000 0E	35:08:30.4250 8S	72:09:14.0235 6E	40:07:30.9990 7S	72:50:51.1749 2E	35:11:43.385 67S	71:45:09.3074 1E	-17.0	-20.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	N/A	N/A	N/A	N/A						
test32	LocusInp	40:04:35.8000	73:12:40.7000	44:45:10.4951	70:48:49.9031	39:47:12.8682	72:11:43.6127	44:24:55.275	69:38:47.3187	50.0	54.0

	uts	0S	0E	9S	2E	3S	1E	06S	9E		
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	41:39:29.0062 7S	71:12:51.3478 2E	N/A	N/A						
test33	LocusInp uts	40:04:35.8000 0S	72:12:40.7000 0E	36:27:08.3818 2S	67:49:48.4732 3E	40:05:18.2547 6S	72:11:45.4206 7E	36:28:29.216 23S	67:47:58.3980 9E	-1.0	-2.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	38:30:19.5107 2S	70:11:27.2805 5E	N/A	N/A						
test34	LocusInp uts	40:04:35.8000 0S	73:12:40.7000 0E	39:53:37.8685 2S	66:42:33.3856 0E	39:09:33.0448 3S	73:12:40.7000 0E	39:08:42.682 17S	66:46:46.3932 7E	55.0	45.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	39:11:05.7225 7S	71:57:05.4938 2E	39:11:02.2519 3S	68:28:29.0564 6E						
test35	LocusInp uts	40:04:35.8000 0S	73:12:40.7000 0E	37:26:38.4937 4S	67:46:21.3580 3E	40:15:51.4884 9S	73:04:11.2378 5E	37:36:39.957 75S	67:38:02.4512 4E	-13.0	-12.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	39:56:39.8330 7S	72:21:46.0648 1E	38:35:25.4801 4S	69:32:05.8006 5E						
test36	LocusInp uts	40:04:35.8000 0S	73:12:40.7000 0E	42:25:59.2966 6S	67:21:39.9786 0E	39:48:07.1044 4S	73:00:21.1133 6E	42:10:42.839 13S	67:11:35.5881 6E	19.0	17.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	40:04:47.0450 2S	72:22:55.4861 7E	41:31:16.7205 9S	68:55:09.2053 0E						
test37	LocusInp uts	38:04:35.8000 0S	70:11:34.7000 0E	43:04:47.8144 1S	70:11:34.7000 0E	38:04:34.4626 3S	70:29:18.5182 4E	43:04:45.463 40S	70:34:46.5016 0E	-14.0	-17.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	38:31:11.6240 1S	70:29:45.3465 2E	41:49:14.9963 0S	70:33:18.3380 7E						
test38	LocusInp uts	38:04:35.8000 0S	70:11:34.7000 0E	42:16:02.9504 1S	73:45:33.8554 4E	38:24:06.7176 1S	69:31:39.7345 5E	42:32:52.832 50S	73:12:02.2158 0E	37.0	30.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	38:33:41.5692 4S	69:39:34.0270 9E	41:11:49.9870 5S	71:56:32.1518 8E						
test39	LocusInp uts	38:04:35.8000 0S	70:11:34.7000 0E	42:18:57.4280 8S	66:43:26.9596 8E	38:15:23.2324 3S	70:34:25.8761 4E	42:27:09.694 05S	67:00:23.7756 2E	-21.0	-15.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	38:30:35.9106 6S	70:22:22.1225 5E	40:59:38.8952 1S	68:18:29.6020 1E						
test40	LocusInp uts	40:24:35.8000 0S	65:51:34.7000 0E	40:13:30.1326 0S	72:23:36.1071 1E	41:39:38.4501 7S	65:51:34.7000 0E	41:23:21.122 81S	72:30:27.6781 5E	75.0	70.0

	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	41:34:42.1110 6S	69:01:43.3183 3E	41:26:48.1377 9S	71:37:49.3828 9E						
test41	LocusInp uts	40:24:35.8000 0S	65:51:34.7000 0E	38:37:15.5353 8S	71:53:43.6411 6E	40:27:26.1043 2S	65:52:51.4715 7E	38:39:06.230 77S	71:54:43.1077 3E	3.0	
	Arclnputs	2.0	40:10:24.5000 0S								
	Outputs	70:12:45.6000 0E	100.0	39:50:38.6690 8S	68:05:10.5848 0E	38:48:21.6506 9S	71:26:44.4188 8E				
test42	LocusInp uts	40:24:35.8000 0S	65:51:34.7000 0E	42:31:36.1455 2S	71:53:17.5828 3E	40:22:48.7982 3S	65:52:45.9883 8E	42:30:40.897 88S	71:53:49.2875 8E	-2.0	-1.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	41:30:04.0142 3S	68:53:01.2773 2E	41:48:16.7975 5S	69:45:17.5474 1E						
test43	LocusInp uts	43:09:35.8000 0S	70:21:34.7000 0E	38:09:24.0356 7S	70:21:34.7000 0E	43:09:34.9842 3S	70:35:14.4778 9E	38:09:23.481 39S	70:32:59.3315 8E	10.0	
	Arclnputs	9.0	40:10:24.5000 0S	70:12:45.6000 0E							
	Outputs	100.0	41:49:05.4784 7S	70:34:35.6215 4E	38:31:34.7265 0S	70:33:08.4696 7E					
test44	LocusInp uts	42:09:35.8000 0S	70:21:34.7000 0E	37:57:18.9334 8S	73:53:33.1311 0E	42:09:02.2298 1S	70:20:27.8274 2E	37:56:47.343 14S	73:52:28.6114 7E	-1.0	-1.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	41:48:28.5019 9S	70:38:59.2761 8E	39:50:56.9292 4S	72:20:25.6434 0E						
test45	LocusInp uts	43:09:35.8000 0S	70:21:34.7000 0E	38:35:33.3063 6S	67:40:00.7556 4E	43:11:17.1429 0S	70:16:37.3742 6E	38:36:20.673 40S	67:37:40.0887 8E	-4.0	-2.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0E	100.0							
	Outputs	41:43:03.8495 0S	69:22:56.0764 5E	39:36:34.4286 3S	68:10:29.0862 3E						
test46	LocusInp uts	40:04:35.8000 0S	67:12:40.7000 0W	35:08:30.4250 8S	68:16:07.3764 4W	40:11:50.9765 8S	68:07:56.5874 8W	35:15:37.841 00S	69:10:20.6204 3W	-43.0	-45.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	39:22:25.6380 7S	68:18:55.9855 9W	N/A	N/A						
test47	LocusInp uts	40:04:35.8000 0S	67:12:40.7000 0W	44:45:10.4951 9S	69:36:31.4968 8W	39:48:58.6020 3S	68:07:33.4683 6W	44:28:43.554 20S	70:33:39.4991 9W	45.0	44.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	41:33:34.0401 0S	68:59:26.8628 6W	N/A	N/A						
test48	LocusInp uts	40:04:35.8000 0S	68:12:40.7000 0W	36:27:08.3818 2S	72:35:32.9267 7W	39:55:23.2157 5S	68:00:43.7999 1W	36:19:43.284 47S	72:25:28.6458 3W	13.0	11.0
	Arclnputs	40:10:24.5000	70:12:45.6000	100.0							

		0S	0W								
	Outputs	39:52:21.9892 9S	68:04:43.1350 5W	38:32:16.8257 1S	69:47:22.0623 3W						
test49	LocusInp uts	40:04:35.8000 0S	67:12:40.7000 0W	39:53:37.8685 2S	73:42:48.0144 0W	39:52:35.2435 1S	67:12:40.7000 0W	39:43:38.981 59S	73:41:51.3189 0W	12.0	10.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	39:52:39.5690 3S	68:04:38.7058 4W	39:47:22.4378 0S	72:19:21.7385 6W						
test50	LocusInp uts	40:04:35.8000 0S	67:12:40.7000 0W	37:26:38.4937 4S	72:39:00.0419 7W	40:12:23.6530 5S	67:18:33.1054 1W	37:33:19.536 73S	72:44:32.3991 0W	-9.0	-8.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	39:51:22.1708 7S	68:04:58.7312 4W	38:33:52.8622 5S	70:46:51.0549 5W						
test51	LocusInp uts	40:04:35.8000 0S	67:12:40.7000 0W	42:25:59.2966 6S	73:03:41.4214 0W	39:54:11.5185 1S	67:20:28.4948 1W	42:17:54.228 55S	73:09:01.9993 6W	12.0	
	Arclnputs	9.0	40:10:24.5000 0S	70:12:45.6000 0W							
	Outputs	100.0	40:12:56.7452 6S	68:02:18.0598 0W	41:36:12.1797 0S	71:20:37.1459 8W					
test52	LocusInp uts	38:04:35.8000 0S	70:11:34.7000 0W	43:04:47.8144 1S	70:11:34.7000 0W	38:04:33.8280 6S	70:33:06.4772 2W	43:04:45.984 03S	70:32:02.7621 6W	17.0	15.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	38:31:33.7683 5S	70:33:00.7342 1W	41:49:21.9263 0S	70:32:18.7801 8W						
test53	LocusInp uts	38:04:35.8000 0S	70:11:34.7000 0W	42:16:02.9504 1S	66:37:35.5445 6W	38:08:18.3689 2S	70:19:06.1664 2W	42:18:51.947 05S	66:43:09.5742 2W	7.0	
	Arclnputs	5.0	40:10:24.5000 0S								
	Outputs	70:12:45.6000 0W	100.0	38:30:44.0931 5S	70:01:02.1551 2W	40:43:33.7987 1S	68:09:09.8591 4W				
test54	LocusInp uts	38:04:35.8000 0S	70:11:34.7000 0W	42:18:57.4280 8S	73:39:42.4403 2W	38:11:17.1184 4S	69:57:26.6712 6W	42:24:58.669 38S	73:27:17.2069 4W	-13.0	-11.0
	Arclnputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	38:30:19.2704 6S	70:12:08.8825 1W	40:55:39.9262 8S	72:09:46.0694 1W						
test55	LocusInp uts	40:24:35.8000 0S	74:11:34.7000 0W	40:13:30.1326 0S	67:39:33.2928 9W	40:31:36.0887 9S	74:11:34.7000 0W	40:18:29.530 53S	67:39:04.3669 0W	7.0	
	Arclnputs	5.0	40:10:24.5000 0S								
	Outputs	70:12:45.6000 0W	100.0	40:30:09.4866 7S	72:20:57.9109 9W	40:19:54.8752 3S	68:02:44.2857 5W				
test56	LocusInp uts	40:24:35.8000 0S	74:11:34.7000 0W	38:37:15.5353 8S	68:09:25.7588 4W	40:29:19.6318 8S	74:09:26.6875 4W	38:40:01.575 10S	68:07:56.5399 1W	5.0	
	Arclnputs	3.0	40:10:24.5000 0S								

	Outputs	70:12:45.6000 0W	100.0	39:59:27.5984 5S	72:22:15.8536 4W	38:53:50.9894 3S	68:49:29.9986 7W				
test57	LocusInputs	40:24:35.8000 0S	74:11:34.7000 0W	42:31:36.1455 2S	68:09:51.8171 7W	40:18:21.2380 9S	74:07:25.4644 6W	42:26:04.620 97S	68:06:41.8210 4W	-7.0	-6.0
	ArclInputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	41:05:49.4322 5S	72:02:08.1952 3W	41:49:47.0223 0S	69:57:20.4136 2W						
test58	LocusInputs	43:09:35.8000 0S	70:21:34.7000 0W	38:09:24.0356 7S	70:21:34.7000 0W	43:09:34.6253 0S	70:05:10.9676 0W	38:09:23.351 38S	70:08:53.9985 0W	12.0	10.0
	ArclInputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	41:50:20.7257 3S	70:06:13.8396 6W	38:30:22.2401 6S	70:08:39.6534 0W						
test59	LocusInputs	43:09:35.8000 0S	70:21:34.7000 0W	38:57:14.6046 1S	66:46:39.4688 2W	43:06:47.8649 6S	70:27:14.2560 0W	38:55:40.030 26S	66:49:55.8331 7W	-5.0	-3.0
	ArclInputs	40:10:24.5000 0S	70:12:45.6000 0W	100.0							
	Outputs	41:36:12.3850 7S	69:04:54.5032 6W	40:25:02.1678 4S	68:03:28.1370 5W						
test60	LocusInputs	43:09:35.8000 0S	70:21:34.7000 0W	38:44:26.1773 4S	73:27:19.4204 0W	43:06:11.8293 0S	70:13:13.2659 7W	38:42:09.850 51S	73:21:37.8696 1W	7.0	
	ArclInputs	5.0	40:10:24.5000 0S								
	Outputs	70:12:45.6000 0W	100.0	41:36:07.2264 7S	71:20:47.9604 4W	40:08:27.7810 7S	72:23:09.8858 2W				
test61	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:55:05.0078 2N	70:51:34.0000 0W	42:55:01.772 59N	70:24:20.8836 8W	-0.5	-0.5
	ArclInputs	42:54:35.0000 0N	70:51:34.0000 0W								
	Outputs	1.0	42:55:05.0017 5N	70:50:23.2833 0W	N/A	N/A					
test62	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:55:05.0078 2N	70:51:34.0000 0W	42:55:01.772 59N	70:24:20.8836 8W	-0.5	-0.5
	ArclInputs	42:54:35.0000 0N	70:50:14.0000 0W								
	Outputs	1.0	42:55:05.0077 1N	70:51:24.7120 1W	42:55:04.9802 6N	70:49:03.2664 4W					
test63	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:55:35.0155 9N	70:51:34.0000 0W	42:55:31.779 93N	70:24:20.6635 6W	-1.0	-1.0
	ArclInputs	42:55:35.0000 0N	70:48:52.0000 0W								
	Outputs	1.0	42:55:35.0077 6N	70:50:13.6676 1W	42:55:34.9435 8N	70:47:30.3324 4W					
test64	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:52:34.9683 0N	70:51:34.0000 0W	42:52:31.735 23N	70:24:21.9833 6W	2.0	
	ArclInputs	2.0	42:53:05.0000 0N								
	Outputs	70:47:32.0000	1.5	42:52:34.9488	70:49:27.3891	42:52:34.8133	70:45:36.6763				

		0W		4N	4W	2N	2W				
test65	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:57:35.0462 4N	70:51:34.0000 0W	42:57:31.808 85N	70:24:19.7825 1W	-3.0	-3.0
	ArclInputs	42:56:35.0000 0N	70:46:12.0000 0W								
	Outputs	1.0	42:57:34.9240 4N	70:46:16.5022 7W	42:57:34.9168 7N	70:46:07.3243 2W					
test66	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:50:34.9359 0N	70:51:34.0000 0W	42:50:31.704 55N	70:24:22.8620 5W	4.0	
	ArclInputs	4.0	42:51:35.0000 0N								
	Outputs	70:44:52.0000 0W	1.5	42:50:34.8184 3N	70:46:22.9951 5W	42:50:34.6409 8N	70:43:21.2222 5W				
test67	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:59:35.0761 8N	70:51:34.0000 0W	42:59:31.837 07N	70:24:18.9005 0W	-5.0	-5.0
	ArclInputs	42:58:35.0000 0N	70:43:32.0000 0W								
	Outputs	2.0	42:59:34.9358 4N	70:45:53.6482 1W	42:59:34.6045 8N	70:41:10.0928 1W					
test68	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:48:34.9027 9N	70:51:34.0000 0W	42:48:31.673 17N	70:24:23.7397 8W	6.0	
	ArclInputs	6.0	42:49:35.0000 0N								
	Outputs	70:42:12.0000 0W	1.5	42:48:34.6329 0N	70:43:42.7194 9W	42:48:34.3855 6N	70:40:41.5853 8W				
test69	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	43:01:35.1054 3N	70:51:34.0000 0W	43:01:31.864 59N	70:24:18.0175 4W	-7.0	-7.0
	ArclInputs	43:00:05.0000 0N	70:43:32.0000 0W								
	Outputs	2.0	43:01:34.9363 5N	70:45:20.3213 4W	43:01:34.6829 1N	70:41:43.2892 1W					
test70	LocusInputs	42:54:35.0000 0N	70:51:34.0000 0W	42:54:31.7652 1N	70:24:21.1037 3W	42:46:34.8689 9N	70:51:34.0000 0W	42:46:31.641 08N	70:24:24.6165 8W	8.0	
	ArclInputs	8.0	42:47:35.0000 0N								
	Outputs	70:42:12.0000 0W	1.5	42:46:34.5988 4N	70:43:42.6294 2W	42:46:34.3516 2N	70:40:41.6754 5W				

WGS84LocusIntersect Test Results

Test Identifier	Locus 1 Input s	Locus 1 Geodesic Start Latitude	Locus 1 Geodesic Start Longitude	Locus 1 Geodesic End Latitude	Locus 1 Geodesic End Longitude	Locus 1 Start Latitude	Locus 1 Start Longitude	Locus 1 End Latitude	Locus 1 End Longitude	Locus 1 Start Distance	Locus 1 End Distance
	Locus 2 Input s	Locus 2 Geodesic Start Latitude	Locus 2 Geodesic Start Longitude	Locus 2 Geodesic End Latitude	Locus 2 Geodesic End Longitude	Locus 2 Start Latitude	Locus 2 Start Longitude	Locus 2 End Latitude	Locus 2 End Longitude	Locus 2 Start Distance	Locus 2 End Distance
	Output	Intersection Latitude	Intersection Longitude								
test1	Locus 1 Input s	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:34:51.0899 7N	70:54:12.4935 8W	42:29:44.8698 0N	68:54:29.5954 1W	-40.0	-40.0
	Locus 2 Input s	43:47:17.8000 0N	69:11:50.6000 0W	39:34:35.8000 0N	69:12:34.7000 0W	43:47:17.1676 6N	69:39:27.2347 9W	39:34:35.4551 7N	69:38:26.6752 8W	20.0	20.0
	Output	41:48:06.5241 6N	69:38:56.6040 0W								
test2	Locus 1 Input s	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:16:32.5468 3N	70:23:04.5187 6W	42:10:54.5106 7N	68:23:00.3023 2W	-10.0	-10.0
	Locus 2 Input s	41:47:17.8000 0N	69:11:50.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	41:37:59.8802 5N	69:06:54.9891 8W	41:55:15.3956 3N	68:07:46.3891 7W	10.0	10.0
	Output	41:41:38.5201 9N	68:54:37.0039 0W								
test3	Locus 1 Input s	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:01:10.7013 8N	69:57:20.7013 2W	41:58:16.1381 7N	68:02:11.1632 1W	15.0	10.0
	Locus 2 Input s	41:47:17.8000 0N	69:11:50.6000 0W	41:47:17.8000 0N	65:12:34.7000 0W	41:37:17.6777 5N	69:11:32.0456 2W	41:32:17.6097 7N	65:13:02.4957 5W	10.0	15.0
	Output	41:36:57.4329 2N	68:23:48.5601 0W								
test4	Locus 1 Input s	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:03:01.6262 4N	70:00:25.3480 4W	41:53:11.7282 8N	67:53:53.8147 1W	12.0	18.0
	Locus 2 Input s	41:47:17.8000 0N	69:11:50.6000 0W	39:36:04.5000 0N	67:26:41.2000 0W	41:52:34.9417 4N	69:00:29.1444 3W	39:42:12.8489 4N	67:13:19.9927 3W	-10.0	-12.0

	Output	41:20:04.4625 8N	68:32:58.4065 5W								
test5	Locu s 1 Input s	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:17:46.0449 3N	70:25:08.5260 3W	42:10:54.5106 7N	68:23:00.3023 2W	-12.0	-10.0
	Locu s 2 Input s	41:47:17.8000 0N	69:11:50.6000 0W	39:36:04.5000 0N	69:11:50.6000 0W	41:47:16.0501 1N	68:51:47.4998 8W	39:36:03.6284 5N	68:57:36.7133 8W	-15.0	-11.0
	Output	41:44:55.2592 2N	68:51:53.9657 8W								
test6	Locu s 1 Input s	40:10:24.5000 0N	70:12:45.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	40:16:32.5468 3N	70:23:04.5187 6W	42:17:12.2636 1N	68:33:27.9794 9W	-10.0	-20.0
	Locu s 2 Input s	41:47:17.8000 0N	69:11:50.6000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:49:02.2422 2N	69:16:39.5521 7W	40:12:31.9150 0N	70:18:40.0683 8W	4.0	5.0
	Output	40:44:08.2182 5N	69:58:43.8293 7W								
test7	Locu s 1 Input s	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:58:16.1381 7N	68:02:11.1632 2W	40:01:10.7013 8N	69:57:20.7013 2W	-10.0	-15.0
	Locu s 2 Input s	38:47:17.8000 0N	69:11:50.6000 0W	42:04:35.8000 0N	68:12:34.7000 0W	38:50:20.0384 9N	69:29:19.7500 3W	42:09:21.4152 1N	68:40:03.6747 2W	-14.0	-21.0
	Output	41:03:48.9093 7N	68:56:49.9517 3W								
test8	Locu s 1 Input s	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	42:12:10.1380 9N	68:25:05.6714 7W	40:16:32.5468 3N	70:23:04.5187 6W	12.0	10.0
	Locu s 2 Input s	38:47:17.8000 0N	69:11:50.6000 0W	41:36:04.5000 0N	69:11:50.6000 0W	38:47:17.4570 7N	69:20:47.7572 6W	41:36:03.5650 7N	69:26:30.3233 2W	-7.0	-11.0
	Output	41:13:51.0104 3N	69:25:43.4742 2W								
test9	Locu s 1 Input s	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:55:44.0085 9N	67:58:02.3247 7W	40:04:15.5303 7N	70:02:28.5382 3W	-14.0	-10.0
	Locu s 2 Input s	38:47:17.8000 0N	69:11:50.6000 0W	40:10:24.5000 0N	70:12:45.6000 0W	38:59:28.6538 7N	68:43:52.4133 2W	40:20:21.2677 0N	69:50:05.4418 8W	25.0	20.0

	Output	40:17:45.1343 4N	69:47:54.6864 5W								
test10	Locu s 1 Input s	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:39:11.5109 4N	67:31:12.8528 1W	39:48:49.1084 0N	69:36:53.9576 0W	-40.0	-35.0
	Locu s 2 Input s	38:47:17.8000 0N	69:11:50.6000 0W	40:05:17.8000 0N	72:11:50.6000 0W	39:47:44.1723 0N	68:26:14.2059 5W	41:02:28.8540 6N	71:31:12.0259 2W	70.0	65.0
	Output	40:08:19.8280 5N	69:15:22.3249 8W								
test11	Locu s 1 Input s	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:35:59.9254 6N	67:26:04.9158 8W	39:39:30.5435 3N	69:21:38.7068 5W	-45.0	-50.0
	Locu s 2 Input s	38:47:17.8000 0N	68:31:50.6000 0W	38:47:17.8000 0N	72:11:50.6000 0W	40:22:21.4225 5N	68:29:21.1058 2W	40:07:20.9579 6N	72:13:56.0319 2W	95.0	80.0
	Output	40:21:46.0977 1N	68:40:43.7978 3W								
test12	Locu s 1 Input s	42:04:35.8000 0N	68:12:34.7000 0W	40:10:24.5000 0N	70:12:45.6000 0W	41:40:28.0804 1N	67:33:16.1694 9W	39:42:36.9560 7N	69:26:43.3345 6W	-38.0	-45.0
	Locu s 2 Input s	38:47:17.8000 0N	68:31:50.6000 0W	37:15:17.8000 0N	72:11:50.6000 0W	40:08:26.7293 9N	69:25:11.9334 6W	38:40:51.7713 9N	73:12:28.7597 3W	91.0	98.0
	Output	N/A	N/A								
test13	Locu s 1 Input s	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:34:48.3409 8N	67:31:15.9527 5E	42:30:56.9433 7N	69:28:29.9691 1E	-40.0	-42.0
	Locu s 2 Input s	41:47:17.8000 0N	68:11:50.6000 0E	42:34:35.8000 0N	69:12:34.7000 0E	41:17:38.5789 7N	68:53:19.8260 4E	42:03:10.5022 8N	69:56:00.7853 3E	43.0	45.0
	Output	N/A	N/A								
test14	Locu s 1 Input s	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:16:31.8626 3N	68:02:25.9906 4E	42:12:09.2928 5N	70:00:02.8081 5E	-10.0	-12.0
	Locu s 2 Input s	41:47:17.8000 0N	68:11:50.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	41:32:35.4823 1N	68:15:50.2484 6E	41:48:50.4711 7N	70:16:21.8070 9E	15.0	16.0

	Output	41:42:45.7526 0N	69:29:17.3042 9E								
test15	Locu s 1 Input s	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:34:48.3409 8N	67:31:15.9527 5E	42:29:04.5727 8N	69:31:40.1006 1E	-40.0	-39.0
	Locu s 2 Input s	41:47:17.8000 0N	68:11:50.6000 0E	41:47:17.8000 0N	69:12:34.7000 0E	41:57:18.0553 9N	68:11:45.8662 9E	41:56:18.0306 4N	69:12:38.9592 3E	-10.0	-9.0
	Output	41:56:37.0676 2N	68:56:31.2985 6E								
test16	Locu s 1 Input s	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:16:31.8626 3N	68:02:25.9906 4E	42:09:38.2818 2N	70:04:13.7700 3E	-10.0	-8.0
	Locu s 2 Input s	41:47:17.8000 0N	67:11:50.6000 0E	39:36:04.5000 0N	69:26:41.2000 0E	41:50:25.6189 4N	67:17:03.5345 1E	39:39:42.6864 8N	69:32:52.0080 0E	-5.0	-6.0
	Output	40:42:15.6690 2N	68:29:20.0061 3E								
test17	Locu s 1 Input s	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:07:20.4715 0N	68:17:54.7083 4E	42:03:20.0840 7N	70:14:39.7258 8E	5.0	2.0
	Locu s 2 Input s	41:47:17.8000 0N	68:31:50.6000 0E	39:34:35.8000 0N	68:31:50.6000 0E	41:47:17.7922 2N	68:30:30.3929 2E	39:34:35.7352 3N	68:27:57.8038 0E	1.0	3.0
	Output	40:18:31.3117 1N	68:28:47.2260 9E								
test18	Locu s 1 Input s	40:10:24.5000 0N	68:12:45.6000 0E	42:04:35.8000 0N	70:12:34.7000 0E	40:16:31.8626 3N	68:02:25.9906 4E	42:07:44.9228 6N	70:07:21.7738 9E	-10.0	-5.0
	Locu s 2 Input s	41:47:17.8000 0N	68:41:50.6000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:46:10.2267 8N	68:48:21.2823 7E	40:09:05.3082 9N	68:20:23.6852 4E	-5.0	-6.0
	Output	40:41:23.8055 8N	68:29:32.6277 4E								
test19	Locu s 1 Input s	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:59:32.7079 7N	70:20:54.3088 5E	40:04:16.2125 5N	68:23:03.3537 3E	-8.0	-10.0
	Locu s 2 Input s	38:47:17.8000 0N	68:11:50.6000 0E	42:04:35.8000 0N	69:12:34.7000 0E	38:45:43.5422 8N	68:20:33.9873 4E	42:02:42.6772 7N	69:23:00.9583 2E	7.0	8.0

	Output	40:36:11.7226 0N	68:54:48.3960 6E								
test20	Locu s 1 Input s	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	42:01:26.4387 8N	70:17:47.1100 5E	40:07:57.2956 6N	68:16:52.9237 4E	-5.0	-4.0
	Locu s 2 Input s	38:47:17.8000 0N	69:11:50.6000 0E	41:36:04.5000 0N	69:11:50.6000 0E	38:47:17.7720 1N	69:14:24.0736 3E	41:36:04.4304 6N	69:15:50.5251 4E	2.0	3.0
	Output	41:04:06.9429 7N	69:15:33.5551 7E								
test21	Locu s 1 Input s	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	42:00:48.5380 0N	70:18:49.5302 3E	40:06:06.7955 3N	68:19:58.2220 0E	-6.0	-7.0
	Locu s 2 Input s	38:47:17.8000 0N	69:11:50.6000 0E	40:10:24.5000 0N	68:12:45.6000 0E	38:49:41.1280 2N	69:17:27.8536 1E	40:13:19.8610 3N	68:19:36.0001 8E	5.0	6.0
	Output	40:08:53.2734 3N	68:22:44.4858 7E								
test22	Locu s 1 Input s	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:39:14.3045 5N	70:53:59.6280 6E	39:48:51.4871 6N	68:48:39.6699 5E	-40.0	-35.0
	Locu s 2 Input s	38:47:17.8000 0N	72:11:50.6000 0E	40:05:17.8000 0N	69:11:50.6000 0E	39:00:16.4273 8N	72:21:30.4059 5E	40:27:19.1913 8N	69:27:20.3440 9E	15.0	25.0
	Output	40:26:06.2537 5N	69:29:53.1140 3E								
test23	Locu s 1 Input s	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:42:25.3115 2N	70:48:50.7979 6E	39:48:14.3800 2N	68:49:40.8840 6E	-35.0	-36.0
	Locu s 2 Input s	39:47:17.8000 0N	72:11:50.6000 0E	39:47:17.8000 0N	69:11:50.6000 0E	40:27:19.2540 3N	72:12:43.2781 0E	40:25:19.1880 8N	69:11:00.5804 2E	40.0	38.0
	Output	40:25:42.0926 1N	69:27:47.1856 7E								
test24	Locu s 1 Input s	42:04:35.8000 0N	70:12:34.7000 0E	40:10:24.5000 0N	68:12:45.6000 0E	41:45:36.0858 1N	70:43:41.4599 3E	39:50:42.7543 3N	68:45:35.9178 6E	-30.0	-32.0
	Locu s 2 Input s	41:47:17.8000 0N	72:11:50.6000 0E	40:15:17.8000 0N	69:11:50.6000 0E	42:14:05.9248 1N	71:48:22.0642 0E	40:42:18.3300 9N	68:46:57.6206 2E	32.0	33.0

	Output	41:38:45.6196 1N	70:36:24.0717 0E								
test25	Locu s 1 Input s	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:25:01.8880 7S	70:54:00.2690 1W	39:34:01.7159 5S	68:48:20.0298 8W	-40.0	-35.0
	Locu s 2 Input s	40:12:17.8000 0S	69:11:50.6000 0W	39:25:35.8000 0S	68:12:34.7000 0W	40:37:33.3002 7S	68:38:14.1693 6W	39:51:57.4501 1S	67:37:07.0531 6W	36.0	38.0
	Output	N/A	N/A								
test26	Locu s 1 Input s	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:44:05.2480 5S	70:23:07.3045 6W	39:48:13.3652 7S	68:24:52.7554 6W	-10.0	-12.0
	Locu s 2 Input s	40:12:17.8000 0S	69:11:50.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	40:07:35.3452 1S	69:14:03.2237 5W	39:49:58.2074 0S	68:15:18.0372 7W	-5.0	-6.0
	Output	39:54:52.2421 6S	68:31:25.5935 3W								
test27	Locu s 1 Input s	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:40:55.2698 1S	70:28:17.3946 4W	39:44:31.6564 9S	68:31:00.7972 1W	-15.0	-18.0
	Locu s 2 Input s	40:12:17.8000 0S	69:11:50.6000 0W	40:12:17.8000 0S	65:12:34.7000 0W	40:02:17.5025 4S	69:11:33.0485 9W	40:01:17.4718 0S	65:12:54.0018 4W	-10.0	-11.0
	Output	40:02:33.1706 0S	68:48:36.2281 2W								
test28	Locu s 1 Input s	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:51:02.3733 4S	70:11:43.3174 9W	39:56:49.4111 6S	68:10:31.4344 2W	1.0	2.0
	Locu s 2 Input s	40:12:17.8000 0S	69:11:50.6000 0W	42:05:35.8000 0S	67:26:34.7000 0W	40:10:35.7133 1S	69:08:37.0796 3W	42:03:15.7465 4S	67:22:12.9443 9W	-3.0	-4.0
	Output	40:33:04.1739 9S	68:47:59.7102 5W								
test29	Locu s 1 Input s	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:51:40.2372 3S	70:10:41.0145 6W	39:57:26.2029 9S	68:09:29.7741 1W	2.0	3.0
	Locu s 2 Input s	40:12:17.8000 0S	69:11:50.6000 0W	42:25:35.8000 0S	69:11:50.6000 0W	40:12:17.6822 8S	69:06:37.3581 3W	42:25:35.6011 9S	69:05:05.5212 9W	-4.0	-5.0

	Output	40:51:57.1088 3S	69:06:10.7401 3W								
test30	Locu s 1 Input s	41:50:24.5000 0S	70:12:45.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	41:40:55.2698 1S	70:28:17.3946 4W	39:43:17.6810 7S	68:33:03.3321 3W	-15.0	-20.0
	Locu s 2 Input s	40:12:17.8000 0S	69:11:50.6000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:11:27.3049 7S	69:14:12.6876 4W	41:49:06.8626 6S	70:16:22.8494 9W	2.0	3.0
	Output	40:52:52.4060 4S	69:40:09.5855 2W								
test31	Locu s 1 Input s	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	39:58:39.7591 1S	68:07:26.3984 1W	41:51:40.2372 3S	70:10:41.0145 6W	-5.0	-2.0
	Locu s 2 Input s	43:12:17.8000 0S	69:11:50.6000 0W	39:55:35.8000 0S	68:12:34.7000 0W	43:08:10.8260 4S	69:35:47.3723 5W	39:52:20.4527 2S	68:31:36.2910 2W	-18.0	-15.0
	Output	40:33:38.4360 3S	68:44:35.4019 6W								
test32	Locu s 1 Input s	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:00:30.0243 5S	68:04:21.1970 5W	41:54:49.4146 1S	70:05:29.1934 6W	-8.0	-7.0
	Locu s 2 Input s	43:12:17.8000 0S	69:11:50.6000 0W	40:55:35.8000 0S	69:11:50.6000 0W	43:12:17.5957 4S	69:05:00.4091 4W	40:55:35.5283 3S	69:03:55.6633 8W	5.0	6.0
	Output	40:57:49.8565 7S	69:03:56.6928 3W								
test33	Locu s 1 Input s	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:05:23.6594 1S	67:56:06.5168 1W	42:01:07.0566 0S	69:55:04.0151 7W	-16.0	-17.0
	Locu s 2 Input s	43:12:17.8000 0S	69:11:50.6000 0W	41:50:24.5000 0S	70:12:45.6000 0W	43:05:27.1130 0S	68:55:09.5575 6W	41:41:47.3066 4S	69:51:38.3996 3W	14.0	18.0
	Output	41:51:43.9270 2S	69:45:04.4481 8W								
test34	Locu s 1 Input s	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:32:07.9811 9S	67:10:24.5596 0W	42:24:53.3228 0S	69:15:09.5121 9W	-60.0	-55.0
	Locu s 2 Input s	43:12:17.8000 0S	69:11:50.6000 0W	41:45:17.5000 0S	72:11:50.6000 0W	42:12:48.7174 1S	68:21:45.1793 7W	40:42:57.9486 1S	71:16:28.5124 9W	70.0	75.0

	Output	42:00:18.1729 6S	68:47:07.7527 2W								
test35	Locu s 1 Input s	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:20:00.9982 1S	67:31:15.3738 3W	42:14:16.9856 5S	69:33:04.4385 8W	-40.0	-38.0
	Locu s 2 Input s	43:12:17.8000 0S	69:11:50.6000 0W	43:12:17.8000 0S	72:11:50.6000 0W	41:57:17.0731 2S	69:13:38.6955 8W	41:52:16.9886 5S	72:09:55.4492 2W	75.0	80.0
	Output	41:57:16.4355 7S	69:14:20.4102 2W								
test36	Locu s 1 Input s	39:55:35.8000 0S	68:12:34.7000 0W	41:50:24.5000 0S	70:12:45.6000 0W	40:50:11.2981 1S	66:38:54.2320 3W	42:51:30.1510 3S	68:29:23.5167 3W	-90.0	-98.0
	Locu s 2 Input s	41:12:17.8000 0S	67:11:50.6000 0W	42:30:17.8000 0S	70:11:50.6000 0W	40:07:50.5927 8S	68:02:20.2247 0W	41:21:13.0029 7S	71:02:42.7457 6W	75.0	78.8
	Output	N/A	N/A								
test37	Locu s 1 Input s	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:25:04.6826 4S	67:31:27.8664 2E	39:30:21.5500 1S	69:30:40.9995 3E	-40.0	-41.0
	Locu s 2 Input s	40:12:17.8000 0S	68:11:50.6000 0E	39:22:35.8000 0S	69:12:34.7000 0E	40:26:04.9362 1S	68:30:47.9679 6E	39:34:51.5879 8S	69:29:36.4934 0E	20.0	18.0
	Output	40:02:03.4349 8S	68:58:38.1547 4E								
test38	Locu s 1 Input s	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:40:56.3220 3S	67:57:12.6583 9E	39:49:27.8779 9S	70:02:18.7824 2E	-15.0	-10.0
	Locu s 2 Input s	40:12:17.8000 0S	68:11:50.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	40:10:19.3774 9S	68:11:24.6095 9E	39:52:38.8777 9S	70:11:50.6796 1E	-2.0	-3.0
	Output	39:55:03.7590 7S	69:56:15.2088 6E								
test39	Locu s 1 Input s	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:47:15.3430 2S	68:07:34.1112 6E	39:51:18.3506 3S	70:05:23.3657 7E	-5.0	-7.0
	Locu s 2 Input s	40:12:17.8000 0S	68:11:50.6000 0E	40:12:17.8000 0S	72:12:34.7000 0E	40:02:17.5044 0S	68:12:08.2592 7E	40:00:17.4431 1S	72:12:13.5192 0E	-10.0	-12.0

	Output	40:02:27.4222 5S	69:54:26.2922 9E								
test40	Locu s 1 Input s	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:40:56.3220 3S	67:57:12.6583 9E	39:44:32.8834 3S	69:54:07.3624 3E	-15.0	-18.0
	Locu s 2 Input s	38:01:17.8000 0S	68:11:50.6000 0E	40:12:17.8000 0S	69:56:34.7000 0E	38:01:49.0630 3S	68:10:45.7608 6E	40:13:22.2509 6S	69:54:22.5298 9E	1.0	2.0
	Output	39:57:32.7447 6S	69:41:29.8226 4E								
test41	Locu s 1 Input s	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:40:56.3220 3S	67:57:12.6583 9E	39:43:19.0439 4S	69:52:04.6894 3E	-15.0	-20.0
	Locu s 2 Input s	38:01:17.8000 0S	69:11:50.6000 0E	41:12:17.8000 0S	69:11:50.6000 0E	38:01:17.7931 9S	69:13:06.5304 4E	41:12:17.7695 2S	69:14:29.5812 5E	-1.0	-2.0
	Output	40:23:10.1576 3S	69:14:07.4397 3E								
test42	Locu s 1 Input s	41:50:24.5000 0S	68:12:45.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	41:40:56.3220 3S	67:57:12.6583 9E	39:44:32.8834 3S	69:54:07.3624 3E	-15.0	-18.0
	Locu s 2 Input s	38:01:17.8000 0S	69:11:50.6000 0E	41:50:24.5000 0S	68:12:45.6000 0E	38:00:55.0262 1S	69:09:21.4992 2E	41:49:48.3843 0S	68:08:49.6956 6E	2.0	3.0
	Output	41:22:22.7750 2S	68:16:27.4783 6E								
test43	Locu s 1 Input s	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	40:10:51.5757 9S	70:38:22.5258 4E	42:09:14.4414 0S	68:44:05.2763 0E	-25.0	-30.0
	Locu s 2 Input s	43:29:17.8000 0S	68:11:50.6000 0E	39:55:35.8000 0S	70:12:34.7000 0E	43:30:05.8626 2S	68:14:21.6632 4E	39:56:44.0461 0S	70:16:11.2661 3E	2.0	3.0
	Output	41:25:37.2397 1S	69:27:12.7189 5E								
test44	Locu s 1 Input s	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	40:00:29.4769 5S	70:20:48.7528 2E	41:56:04.3853 8S	68:22:07.5649 9E	-8.0	-9.0
	Locu s 2 Input s	43:29:17.8000 0S	68:11:50.6000 0E	39:55:35.8000 0S	68:11:50.6000 0E	43:29:16.9748 8S	68:25:34.8046 9E	39:55:34.9183 9S	68:26:08.5148 4E	10.0	11.0

	Output	41:52:35.5433 9S	68:25:50.1207 7E								
test45	Locu s 1 Input s	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	40:01:42.8040 3S	70:22:52.4496 9E	41:57:19.8108 1S	68:24:12.6710 4E	-10.0	-11.0
	Locu s 2 Input s	43:29:17.8000 0S	69:11:50.6000 0E	41:50:24.5000 0S	68:12:45.6000 0E	43:23:08.2692 0S	69:30:36.9790 6E	41:43:36.3125 0S	68:33:35.1944 9E	15.0	17.0
	Output	41:46:49.2592 2S	68:35:22.6806 0E								
test46	Locu s 1 Input s	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	40:44:05.6230 9S	71:35:48.6236 3E	42:39:04.1763 4S	69:34:51.5364 1E	-80.0	-78.0
	Locu s 2 Input s	43:29:17.8000 0S	69:11:50.6000 0E	41:45:07.5000 0S	66:11:50.6000 0E	42:55:41.1691 6S	69:46:17.7245 7E	41:10:04.6593 2S	66:49:24.8624 3E	42.0	45.0
	Output	N/A	N/A								
test47	Locu s 1 Input s	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	40:24:48.9416 7S	71:02:16.7393 7E	42:21:42.9132 1S	69:05:08.7091 7E	-48.0	-50.0
	Locu s 2 Input s	42:09:17.8000 0S	70:11:50.6000 0E	42:09:17.8000 0S	66:11:50.6000 0E	41:24:17.2934 9S	70:10:26.5343 0E	41:20:17.2305 4S	66:13:22.0442 9E	45.0	49.0
	Output	41:24:17.3247 0S	70:03:47.7950 5E								
test48	Locu s 1 Input s	39:55:35.8000 0S	70:12:34.7000 0E	41:50:24.5000 0S	68:12:45.6000 0E	40:50:05.0655 9S	71:46:21.2980 6E	42:51:59.9928 5S	69:57:19.4976 2E	-90.0	-99.0
	Locu s 2 Input s	42:29:17.8000 0S	69:11:50.6000 0E	44:01:17.8000 0S	66:11:50.6000 0E	41:48:42.5624 1S	68:32:33.3747 6E	43:15:31.5444 6S	65:29:49.9212 9E	50.0	55.0
	Output	N/A	N/A								

WGS84LocusTanFixedRadiusArc Test Results

Test Identifier	Locus 1 Input	Locus 1 Geodesic Start Latitude	Locus 1 Geodesic Start Longitude	Locus 1 Geodesic End Latitude	Locus 1 Geodesic End Longitude	Locus 1 Start Latitude	Locus 1 Start Longitude	Locus 1 End Latitude	Locus 1 End Longitude	Locus 1 Start Distance (nm)	Locus 1 End Distance (nm)	
	Locus 2 Input	Locus 2 Geodesic Start Latitude	Locus 2 Geodesic Start Longitude	Locus 2 Geodesic End Latitude	Locus 2 Geodesic End Longitude	Locus 2 Start Latitude	Locus 2 Start Longitude	Locus 2 End Latitude	Locus 2 End Longitude	Locus 2 Start Distance (nm)	Locus 2 End Distance (nm)	Arc Radius (nm)
	Output	Arc Direction	Arc Center Latitude	Arc Center Longitude	Tangent Point 1 Latitude	Tangent Point 1 Longitude	Tangent Point 2 Latitude	Tangent Point 2 Longitude				
test1	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	40:05:30.770 99N	65:52:03.221 58W	40:11:24.544 24N	70:12:45.600 00W	40:06:30.744 30N	65:51:59.399 53W	-1.0	-1.0	
	Locus 2 Inputs	38:45:52.615 65N	68:43:43.428 97W	42:04:35.800 00N	68:12:34.700 00W	38:45:59.577 64N	68:44:59.624 33W	42:04:43.107 40N	68:13:54.671 12W	-1.0	-1.0	2.0
	Output	1	40:12:42.909 80N	68:34:26.170 64W	40:10:42.842 03N	68:34:29.058 90W	40:12:28.742 86N	68:31:50.631 89W				
test2	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	40:05:30.770 99N	65:52:03.221 58W	40:11:24.544 24N	70:12:45.600 00W	40:07:30.717 40N	65:51:55.575 62W	-1.0	-2.0	
	Locus 2 Inputs	38:45:52.615 65N	68:43:43.428 97W	42:04:35.800 00N	68:12:34.700 00W	38:46:06.525 83N	68:46:15.823 80W	42:04:43.107 40N	68:13:54.671 12W	-2.0	-1.0	2.0
	Output	1	40:13:05.945 59N	68:35:07.044 02W	40:11:05.868 17N	68:35:09.129 78W	40:12:51.197 87N	68:32:31.582 71W				
test3	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	40:05:30.770 99N	65:52:03.221 58W	40:09:24.455 59N	70:12:45.600 00W	40:04:30.797 47N	65:52:07.041 76W	1.0	1.0	
	Locus 2 Inputs	38:45:52.615 65N	68:43:43.428 97W	42:04:35.800 00N	68:12:34.700 00W	38:45:45.639 86N	68:42:27.237 74W	42:04:28.477 12N	68:11:14.733 98W	1.0	1.0	3.0
	Output	1	40:11:41.867 65N	68:33:16.759 39W	40:08:41.765 92N	68:33:21.140 59W	40:11:20.556 56N	68:29:23.522 19W				
test4	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	40:05:30.770 99N	65:52:03.221 58W	40:09:24.455 59N	70:12:45.600 00W	40:03:30.823 74N	65:52:10.860 08W	1.0	2.0	
	Locus 2 Inputs	38:45:52.615 65N	68:43:43.428 97W	42:04:35.800 00N	68:12:34.700 00W	38:45:38.650 27N	68:41:11.050 62W	42:04:28.477 12N	68:11:14.733 98W	2.0	1.0	2.0
	Outputs	1	40:10:16.886 71N	68:31:25.719 47W	40:08:16.832 27N	68:31:29.476 43W	40:10:03.248 71N	68:28:50.192 80W				
test5	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	40:05:30.770 99N	65:52:03.221 58W	40:11:24.544 24N	70:12:45.600 00W	40:06:30.744 30N	65:51:59.399 53W	-1.0	-1.0	

	Locus 2 Inputs	38:45:52.615 65N	68:43:43.428 97W	42:04:35.800 00N	68:12:34.700 00W	38:45:45.639 86N	68:42:27.237 74W	42:04:28.477 12N	68:11:14.733 98W	1.0	1.0	2.0
	Outputs	1	40:12:40.653 68N	68:31:48.782 39W	40:10:40.586 99N	68:31:51.747 66W	40:12:26.428 00N	68:29:13.254 21W				
test6	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	40:05:30.770 99N	65:52:03.221 58W	40:11:24.544 24N	70:12:45.600 00W	40:07:30.717 40N	65:51:55.575 62W	-1.0	-2.0	
	Locus 2 Inputs	39:01:03.206 12N	64:47:37.885 16W	41:04:35.800 00N	68:12:34.700 00W	38:59:30.112 07N	64:49:15.158 95W	41:03:47.851 19N	68:13:22.435 86W	-2.0	-1.0	2.0
	Outputs	1	40:11:11.478 12N	66:48:27.886 28W	40:09:11.456 03N	66:48:33.100 50W	40:12:45.838 78N	66:46:51.019 20W				
test7	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	36:50:12.190 34N	70:12:45.600 00W	40:10:24.470 60N	70:10:09.051 40W	36:50:12.183 82N	70:11:30.856 98W	-2.0	-1.0	
	Locus 2 Inputs	38:10:03.489 78N	71:19:20.313 30W	41:04:35.800 00N	69:12:34.700 00W	38:10:32.285 15N	71:20:27.085 81W	41:05:35.812 05N	69:14:52.148 42W	-1.0	-2.0	3.0
	Outputs	1	40:02:07.334 83N	70:06:18.248 80W	40:02:08.387 28N	70:10:12.593 88W	40:00:39.589 07N	70:02:53.618 27W				
test8	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	36:50:55.829 85N	69:51:03.262 40W	40:10:14.004 41N	70:15:21.546 23W	36:50:50.822 61N	69:52:17.756 45W	2.0	1.0	
	Locus 2 Inputs	38:02:20.089 09N	70:59:31.553 24W	41:04:35.800 00N	69:12:34.700 00W	38:01:55.782 14N	70:58:22.104 46W	41:03:45.031 32N	69:10:10.925 36W	1.0	2.0	2.0
	Outputs	1	39:33:03.947 33N	70:08:17.798 94W	39:32:52.952 67N	70:10:52.284 75W	39:32:13.764 21N	70:05:56.864 47W				
test9	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	37:35:08.049 87N	67:31:03.267 43W	40:11:41.674 10N	70:10:45.639 05W	37:35:45.282 80N	67:30:04.026 42W	-2.0	-1.0	
	Locus 2 Inputs	37:45:08.920 78N	67:50:36.686 93W	41:04:35.800 00N	68:12:34.700 00W	37:45:03.921 63N	67:51:52.078 35W	41:04:25.305 11N	68:15:12.760 89W	-1.0	-2.0	3.0
	Outputs	1	38:09:11.856 36N	67:58:23.767 23W	38:07:20.135 32N	68:01:22.776 21W	38:09:27.920 01N	67:54:36.468 55W				
test10	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	42:52:36.591 94N	67:36:46.624 23W	40:09:15.600 15N	70:10:37.398 89W	42:52:00.699 38N	67:35:41.228 61W	2.0	1.0	
	Locus 2 Inputs	39:55:58.224 92N	69:41:27.775 37W	43:04:35.800 00N	68:12:34.700 00W	39:56:37.332 95N	69:43:55.282 80W	43:04:56.318 78N	68:13:51.636 78W	-2.0	-1.0	2.0
	Outputs	1	41:21:07.174 87N	69:07:28.710 56W	41:19:57.562 77N	69:05:18.906 22W	41:20:26.728 78N	69:04:58.698 14W				
test11	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	42:41:33.376 50N	67:18:27.472 57W	40:11:41.674 10N	70:14:45.560 95W	42:42:13.471 96N	67:19:28.019 14W	-2.0	-1.0	
	Locus	38:47:21.082	67:28:11.049	42:04:35.800	68:12:34.700	38:47:40.921	67:25:39.675	42:04:46.215	68:11:15.351	2.0	1.0	2.0

	2 Inputs	27N	43W	00N	00W	31N	82W	51N	30W			
	Outputs	1	42:00:55.564 89N	68:13:02.909 37W	41:59:35.847 42N	68:11:02.562 25W	42:01:16.982 68N	68:10:24.500 96W				
test12	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	36:53:06.456 88N	70:56:01.642 36W	40:10:34.919 46N	70:14:02.688 42W	36:53:26.367 62N	70:58:29.160 09W	1.0	2.0	
	Locus 2 Inputs	37:29:19.581 28N	71:54:04.490 05W	40:04:35.800 00N	69:12:34.700 00W	37:28:05.079 86N	71:52:06.219 43W	40:03:57.199 27N	69:11:34.832 83W	2.0	1.0	2.0
	Outputs	1	38:53:33.203 66N	70:29:18.124 52W	38:53:54.263 04N	70:31:49.447 79W	38:52:17.757 84N	70:27:18.546 19W				
test13	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	41:46:39.602 65N	74:04:18.294 68W	40:08:40.492 57N	70:14:03.841 14W	41:45:46.340 67N	74:04:55.276 67W	-2.0	-1.0	
	Locus 2 Inputs	40:59:32.625 80N	72:36:48.383 18W	41:04:35.800 00N	68:12:34.700 00W	41:00:32.585 02N	72:36:52.381 81W	41:06:35.869 47N	68:12:34.700 00W	-1.0	-2.0	2.0
	Outputs	-1	40:59:45.331 28N	72:06:21.690 23W	40:58:00.362 64N	72:07:38.620 39W	41:01:45.254 31N	72:06:29.561 62W				
test14	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	43:02:23.578 55N	67:56:26.256 58W	40:09:24.433 55N	70:10:30.058 11W	43:01:52.206 97N	67:55:16.512 06W	2.0	1.0	
	Locus 2 Inputs	43:40:32.943 22N	72:11:18.241 39W	42:04:35.800 00N	68:12:34.700 00W	43:42:19.591 29N	72:10:02.385 29W	42:05:27.780 65N	68:11:54.406 31W	-2.0	-1.0	2.0
	Outputs	-1	42:12:06.973 04N	68:32:37.780 57W	42:13:08.443 40N	68:34:56.482 41W	42:13:50.862 69N	68:31:16.863 80W				
test15	Locus 1 Inputs	40:10:24.500 00N	70:12:45.600 00W	39:30:57.684 85N	65:58:09.515 26W	40:11:23.631 81N	70:12:32.004 53W	39:32:54.838 06N	65:57:35.357 82W	-1.0	-2.0	
	Locus 2 Inputs	41:23:57.635 85N	67:49:25.737 53W	38:04:35.800 00N	68:12:34.700 00W	41:24:03.117 84N	67:50:45.132 38W	38:04:46.243 10N	68:15:06.102 22W	1.0	2.0	2.0
	Outputs	-1	39:51:21.557 10N	68:04:58.824 54W	39:53:19.411 10N	68:04:28.855 74W	39:51:10.298 89N	68:02:23.689 37W				
test16	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	40:05:30.770 99S	65:52:03.221 58W	40:11:24.544 24S	70:12:45.600 00W	40:07:30.717 40S	65:51:55.575 62W	1.0	2.0	
	Locus 2 Inputs	41:23:11.704 67S	68:44:56.512 07W	38:04:35.800 00S	68:12:34.700 00W	41:23:27.023 65S	68:42:18.386 98W	38:04:43.113 48S	68:11:19.277 04W	2.0	1.0	2.0
	Outputs	1	40:09:04.418 61S	68:32:58.982 77W	40:11:04.496 07S	68:32:56.834 33W	40:09:18.875 49S	68:30:23.618 82W				
test17	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	40:05:30.770 99S	65:52:03.221 58W	40:09:24.455 59S	70:12:45.600 00W	40:03:30.823 74S	65:52:10.860 08W	-1.0	-2.0	
	Locus 2 Inputs	40:51:02.568 24S	65:49:04.579 09W	38:04:35.800 00S	68:12:34.700 00W	40:52:10.594 42S	65:51:14.904 08W	38:05:08.509 46S	68:13:38.436 18W	-2.0	-1.0	2.0

	Inputs											
	Outputs	1	40:03:14.478 49S	66:37:33.384 95W	40:05:14.445 65S	66:37:26.294 02W	40:02:07.807 89S	66:35:23.422 43W				
test18	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	43:30:29.876 90S	70:12:45.600 00W	40:10:24.470 60S	70:10:09.051 40W	43:30:29.868 64S	70:11:23.152 09W	-2.0	-1.0	
	Locus 2 Inputs	40:56:44.386 23S	70:24:30.082 51W	38:04:35.800 00S	68:12:34.700 00W	40:56:13.101 74S	70:25:37.657 28W	38:03:35.713 46S	68:14:46.283 92W	-1.0	-2.0	3.0
	Outputs	1	40:25:56.597 23S	70:06:18.828 40W	40:25:55.848 92S	70:10:14.547 14W	40:27:29.089 86S	70:02:56.519 01W				
test19	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	43:29:41.803 26S	69:48:49.551 37W	40:10:34.937 24S	70:15:21.559 54W	43:29:47.302 91S	69:50:11.635 25W	2.0	1.0	
	Locus 2 Inputs	40:46:58.965 10S	70:43:33.361 04W	38:04:35.800 00S	68:12:34.700 00W	40:47:34.755 34S	70:42:29.939 66W	38:05:44.686 44S	68:10:30.177 29W	1.0	2.0	2.0
	Outputs	1	40:13:25.078 66S	70:12:23.800 09W	40:13:36.121 95S	70:14:59.803 79W	40:14:36.571 01S	70:10:17.905 79W				
test20	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	42:41:33.376 50S	67:18:27.472 57W	40:09:07.291 11S	70:10:45.714 53W	42:40:53.272 07S	67:17:26.947 63W	-2.0	-1.0	
	Locus 2 Inputs	41:23:57.635 85S	68:49:25.737 53W	38:04:35.800 00S	69:12:34.700 00W	41:24:03.117 84S	68:50:45.132 38W	38:04:46.243 10S	69:15:06.102 22W	-1.0	-2.0	3.0
	Outputs	1	41:11:40.445 78S	68:56:19.657 74W	41:13:37.479 45S	68:59:20.932 78W	41:11:23.248 99S	68:52:22.321 54W				
test21	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	37:24:53.776 02S	67:48:48.292 35W	40:11:33.360 17S	70:10:37.326 86W	37:25:26.924 44S	67:47:45.478 85W	2.0	1.0	
	Locus 2 Inputs	40:23:45.261 80S	71:17:39.828 70W	38:04:35.800 00S	68:12:34.700 00W	40:22:17.492 77S	71:19:27.002 96W	38:03:53.323 48S	68:13:28.422 49W	-2.0	-1.0	2.0
	Outputs	-1	38:19:04.226 08S	68:29:21.213 74W	38:17:57.687 53S	68:31:28.147 15W	38:17:38.591 51S	68:31:08.128 37W				
test22	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	37:35:08.049 87S	67:31:03.267 43W	40:09:07.291 11S	70:14:45.485 47W	37:34:30.808 62S	67:32:02.492 05W	-2.0	-1.0	
	Locus 2 Inputs	41:21:34.316 10S	67:26:28.970 88W	38:04:35.800 00S	68:12:34.700 00W	41:21:12.424 83S	67:23:52.292 53W	38:04:25.363 03S	68:11:19.870 10W	2.0	1.0	2.0
	Outputs	1	38:11:04.159 43S	68:12:22.746 71W	38:12:19.771 40S	68:10:24.461 67W	38:10:42.677 13S	68:09:53.007 75W				
test23	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	43:27:18.010 78S	71:00:24.952 85W	40:10:14.066 28S	70:14:02.681 87W	43:26:56.045 70S	71:03:06.913 12W	1.0	2.0	
	Locus 2 Inputs	42:35:45.277 80S	72:06:36.630 38W	40:04:35.800 00S	69:12:34.700 00W	42:37:05.450 79S	72:04:35.690 54W	40:05:14.392 06S	69:11:34.814 05W	2.0	1.0	2.0

	Outputs	1	41:09:00.289 76S	70:25:29.091 05W	41:08:38.535 06S	70:28:05.303 41W	41:10:18.257 57S	70:23:28.270 22W				
test24	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	38:26:46.467 74S	73:53:15.484 61W	40:12:08.492 21S	70:14:03.907 52W	38:27:37.217 79S	73:53:56.335 33W	-2.0	-1.0	
	Locus 2 Inputs	38:59:53.214 74S	73:29:12.959 94W	39:04:35.800 00S	69:12:34.700 00W	38:58:53.224 54S	73:29:09.342 42W	39:02:35.688 26S	69:12:34.700 00W	-1.0	-2.0	2.0
	Outputs	-1	39:02:21.677 93S	72:38:46.919 55W	39:04:03.709 82S	72:40:08.199 04W	39:00:21.629 99S	72:38:41.871 65W				
test25	Locus 1 Inputs	40:10:24.500 00S	70:12:45.600 00W	37:15:52.751 97S	68:07:31.780 07W	40:11:24.522 18S	70:10:29.991 73W	37:16:21.590 37S	68:06:25.839 60W	2.0	1.0	
	Locus 2 Inputs	36:21:10.677 74S	71:47:01.134 06W	38:04:35.800 00S	68:12:34.700 00W	36:19:28.943 58S	71:45:42.083 55W	38:03:43.779 56S	68:11:56.713 84W	-2.0	-1.0	2.0
	Outputs	-1	37:57:02.695 88S	68:31:21.637 89W	37:56:05.076 32S	68:33:34.749 30W	37:55:19.155 11S	68:30:04.714 14W				
test26	Locus 1 Inputs	40:10:24.500 00S	68:12:45.600 00E	40:05:30.770 99S	72:33:27.978 42E	40:11:24.544 24S	68:12:45.600 00E	40:07:30.717 40S	72:33:35.624 38E	1.0	2.0	
	Locus 2 Inputs	41:23:11.704 67S	69:40:12.887 93E	38:04:35.800 00S	70:12:34.700 00E	41:23:27.023 65S	69:42:51.013 02E	38:04:43.113 48S	70:13:50.122 96E	2.0	1.0	2.0
	Outputs	1	40:09:04.647 98S	69:52:10.380 91E	40:11:04.725 55S	69:52:12.518 66E	40:09:19.104 87S	69:54:45.745 00E				
test27	Locus 1 Inputs	40:10:24.500 00S	68:12:45.600 00E	40:05:30.770 99S	72:33:27.978 42E	40:09:24.455 59S	68:12:45.600 00E	40:03:30.823 74S	72:33:20.339 92E	-1.0	-2.0	
	Locus 2 Inputs	40:51:02.568 24S	72:36:04.820 91E	38:04:35.800 00S	70:12:34.700 00E	40:52:10.594 42S	72:33:54.495 92E	38:05:08.509 46S	70:11:30.963 82E	-2.0	-1.0	2.0
	Outputs	1	40:03:15.216 15S	71:47:36.655 50E	40:05:15.183 67S	71:47:43.736 13E	40:02:08.545 36S	71:49:46.618 23E				
test28	Locus 1 Inputs	40:10:24.500 00S	68:12:45.600 00E	43:30:29.876 90S	68:12:45.600 00E	40:10:24.470 60S	68:15:22.148 60E	43:30:29.868 64S	68:14:08.047 91E	-2.0	-1.0	
	Locus 2 Inputs	40:56:44.386 23S	68:00:39.317 49E	38:04:35.800 00S	70:12:34.700 00E	40:56:13.101 74S	67:59:31.742 72E	38:03:35.713 46S	70:10:23.116 08E	-1.0	-2.0	3.0
	Outputs	1	40:25:28.598 97S	68:19:12.510 23E	40:25:27.850 71S	68:15:16.818 63E	40:27:01.081 04S	68:22:34.804 66E				
test29	Locus 1 Inputs	40:10:24.500 00S	68:12:45.600 00E	43:29:41.803 26S	68:36:41.648 63E	40:10:34.937 24S	68:10:09.640 46E	43:29:47.302 91S	68:35:19.564 75E	2.0	1.0	
	Locus 2 Inputs	40:46:58.965 10S	67:41:36.038 96E	38:04:35.800 00S	70:12:34.700 00E	40:47:34.755 34S	67:42:39.460 34E	38:05:44.686 44S	70:14:39.222 71E	1.0	2.0	2.0
	Outputs	1	40:13:05.036	68:13:04.979	40:13:16.079	68:10:28.987	40:14:16.523	68:15:10.868				

	ts		69S	01E	09S	97E	26S	66E				
test30	Locus 1 Inputs	40:10:24.50000S	68:12:45.60000E	42:41:33.37650S	71:07:03.72743E	40:09:07.29111S	68:14:45.48547E	42:40:53.27207S	71:08:04.25237E	-2.0	-1.0	
	Locus 2 Inputs	41:23:57.63585S	69:35:43.66247E	38:04:35.80000S	69:12:34.70000E	41:24:03.11784S	69:34:24.26762E	38:04:46.24310S	69:10:03.29778E	-1.0	-2.0	3.0
	Outputs	1	41:11:18.77346S	69:28:47.00130E	41:13:15.79650S	69:25:45.73071E	41:11:01.57821S	69:32:44.31595E				
test31	Locus 1 Inputs	40:10:24.50000S	68:12:45.60000E	37:24:53.77602S	70:36:42.90765E	40:11:33.36017S	68:14:53.87314E	37:25:26.92444S	70:37:45.72115E	2.0	1.0	
	Locus 2 Inputs	40:23:45.26180S	67:07:29.57130E	38:04:35.80000S	70:12:34.70000E	40:22:17.49277S	67:05:42.39704E	38:03:53.32348S	70:11:40.97751E	-2.0	-1.0	2.0
	Outputs	-1	38:18:15.29786S	69:56:51.27653E	38:17:08.77155S	69:54:44.35635E	38:16:49.67907S	69:55:04.36125E				
test32	Locus 1 Inputs	40:10:24.50000S	68:12:45.60000E	37:35:08.04987S	70:54:27.93257E	40:09:07.29111S	68:10:45.71453E	37:34:30.80862S	70:53:28.70795E	-2.0	-1.0	
	Locus 2 Inputs	41:21:34.31610S	70:58:40.42912E	38:04:35.80000S	70:12:34.70000E	41:21:12.42483S	71:01:17.10747E	38:04:25.36303S	70:13:49.52990E	2.0	1.0	2.0
	Outputs	1	38:11:21.50667S	70:12:50.64310E	38:12:37.12356S	70:14:48.93082E	38:11:00.02297S	70:15:20.39160E				
test33	Locus 1 Inputs	40:10:24.50000S	68:12:45.60000E	43:27:18.01078S	67:25:06.24715E	40:10:14.06628S	68:11:28.51813E	43:26:56.04570S	67:22:24.28688E	1.0	2.0	
	Locus 2 Inputs	42:35:45.27780S	66:18:32.76962E	40:04:35.80000S	69:12:34.70000E	42:37:05.45079S	66:20:33.70946E	40:05:14.39206S	69:13:34.58595E	2.0	1.0	2.0
	Outputs	1	41:08:35.70113S	68:00:08.09319E	41:08:13.94866S	67:57:31.89648E	41:09:53.66093S	68:02:08.91061E				
test34	Locus 1 Inputs	40:10:24.50000S	68:12:45.60000E	38:26:46.46774S	64:32:15.71539E	40:12:08.49221S	68:11:27.29248E	38:27:37.21779S	64:31:34.86467E	-2.0	-1.0	
	Locus 2 Inputs	38:59:53.21474S	64:55:56.44006E	39:04:35.80000S	69:12:34.70000E	38:58:53.22454S	64:56:00.05758E	39:02:35.68826S	69:12:34.70000E	-1.0	-2.0	2.0
	Outputs	-1	39:02:22.26616S	65:46:45.49514E	39:04:04.29828S	65:45:24.21595E	39:00:22.21794S	65:46:50.53225E				
test35	Locus 1 Inputs	40:10:24.50000S	68:12:45.60000E	37:15:52.75197S	70:17:59.41993E	40:11:24.52218S	68:15:01.20827E	37:16:21.59037S	70:19:05.36040E	2.0	1.0	
	Locus 2 Inputs	36:21:10.67774S	66:38:08.26594E	38:04:35.80000S	70:12:34.70000E	36:19:28.94358S	66:39:27.31645E	38:03:43.77956S	70:13:12.68616E	-2.0	-1.0	2.0
	Outputs	-1	37:57:10.38318S	69:54:04.25802E	37:56:12.76197S	69:51:51.14391E	37:55:26.83944S	69:55:21.17757E				

test36	Locus 1 Inputs	40:10:24.50000N	68:12:45.60000E	40:05:30.77099N	72:33:27.97842E	40:09:24.45559N	68:12:45.60000E	40:03:30.82374N	72:33:20.33992E	1.0	2.0	
	Locus 2 Inputs	38:52:47.19234N	68:57:43.98857E	42:04:35.80000N	70:12:34.70000E	38:52:13.67562N	69:00:11.54546E	42:04:18.24336N	70:13:51.74273E	2.0	1.0	2.0
	Outputs	1	40:10:43.92255N	69:26:42.17253E	40:08:43.85504N	69:26:39.21907E	40:10:10.37031N	69:29:12.48839E				
test37	Locus 1 Inputs	40:10:24.50000N	68:12:45.60000E	40:05:30.77099N	72:33:27.97842E	40:11:24.54424N	68:12:45.60000E	40:07:30.71740N	72:33:35.62438E	-1.0	-2.0	
	Locus 2 Inputs	39:13:29.53578N	72:28:55.25646E	42:04:35.80000N	70:12:34.70000E	39:12:28.52052N	72:26:42.26184E	42:04:03.98622N	70:11:26.38299E	-2.0	-1.0	2.0
	Outputs	1	40:11:08.56456N	71:38:56.66811E	40:09:08.54388N	71:38:51.39855E	40:12:09.97080N	71:41:11.24340E				
test38	Locus 1 Inputs	40:10:24.50000N	68:12:45.60000E	36:50:12.19034N	68:12:45.60000E	40:10:24.47060N	68:15:22.14860E	36:50:12.18382N	68:14:00.34302E	-2.0	-1.0	
	Locus 2 Inputs	39:10:02.81529N	68:04:02.52380E	42:04:35.80000N	70:12:34.70000E	39:10:31.56185N	68:02:54.78528E	42:05:35.80077N	70:10:15.11366E	-1.0	-2.0	3.0
	Outputs	1	39:39:58.78561N	68:19:02.28704E	39:39:59.83137N	68:15:09.19344E	39:38:32.84035N	68:22:27.11164E				
test39	Locus 1 Inputs	40:10:24.50000N	68:12:45.60000E	36:50:55.82985N	68:34:27.93760E	40:10:14.00441N	68:10:09.65377E	36:50:50.82261N	68:33:13.44355E	2.0	1.0	
	Locus 2 Inputs	39:19:02.15978N	67:44:48.14899E	42:04:35.80000N	70:12:34.70000E	39:18:29.10241N	67:45:52.68873E	42:03:26.92161N	70:14:46.65709E	1.0	2.0	2.0
	Outputs	1	39:55:11.69116N	68:14:35.29494E	39:55:00.63826N	68:11:59.99070E	39:54:04.52166N	68:16:44.57011E				
test40	Locus 1 Inputs	40:10:24.50000N	68:12:45.60000E	37:35:08.04987N	70:54:27.93257E	40:11:41.67410N	68:14:45.56095E	37:35:45.28280N	70:55:27.17358E	-2.0	-1.0	
	Locus 2 Inputs	38:45:10.91527N	69:34:50.91008E	42:04:35.80000N	69:12:34.70000E	38:45:05.92527N	69:33:34.47694E	42:04:25.30587N	69:09:54.18228E	-1.0	-2.0	3.0
	Outputs	1	39:08:09.55199N	69:27:04.93864E	39:06:16.31747N	69:24:05.04175E	39:08:25.58999N	69:30:55.36592E				
test41	Locus 1 Inputs	40:10:24.50000N	68:12:45.60000E	42:52:36.59194N	70:48:44.57577E	40:09:15.60015N	68:14:53.80111E	42:52:00.69938N	70:49:49.97139E	2.0	1.0	
	Locus 2 Inputs	39:40:36.03510N	67:09:25.73456E	42:04:35.80000N	70:12:34.70000E	39:41:57.92929N	67:07:32.03241E	42:05:18.23971N	70:11:37.71848E	-2.0	-1.0	2.0
	Outputs	-1	41:42:57.59835N	69:45:22.81427E	41:44:07.68026N	69:43:12.69417E	41:44:22.45121N	69:43:29.43785E				
test42	Locus	40:10:24.500	68:12:45.600	42:41:33.376	71:07:03.727	40:11:41.674	68:10:45.639	42:42:13.471	71:06:03.180	-2.0	-1.0	

	1 Inputs	00N	00E	50N	43E	10N	05E	96N	86E			
	Locus 2 Inputs	38:47:21.082 27N	70:56:58.350 57E	42:04:35.800 00N	70:12:34.700 00E	38:47:40.921 31N	70:59:29.724 18E	42:04:46.215 51N	70:13:54.048 70E	2.0	1.0	2.0
	Output s	1	42:00:40.360 69N	70:12:10.192 54E	41:59:20.648 42N	70:14:10.537 96E	42:01:01.777 07N	70:14:48.590 80E				
test43	Locus 1 Inputs	40:10:24.500 00N	68:12:45.600 00E	36:53:06.456 88N	67:29:29.557 64E	40:10:34.919 46N	68:11:28.511 58E	36:53:26.367 62N	67:27:02.039 91E	1.0	2.0	
	Locus 2 Inputs	37:29:19.581 28N	66:31:04.909 95E	40:04:35.800 00N	69:12:34.700 00E	37:28:05.079 86N	66:33:03.180 57E	40:03:57.199 27N	69:13:34.567 17E	2.0	1.0	2.0
	Output s	1	38:54:00.302 76N	67:56:19.259 60E	38:54:21.364 33N	67:53:47.920 86E	38:52:44.849 07N	67:58:18.842 32E				
test44	Locus 1 Inputs	40:10:24.500 00N	68:12:45.600 00E	41:46:39.602 65N	64:21:12.905 32E	40:08:40.492 57N	68:11:27.358 86E	41:45:46.340 67N	64:20:35.923 33E	-2.0	-1.0	
	Locus 2 Inputs	40:59:32.625 80N	64:48:21.016 82E	41:04:35.800 00N	69:12:34.700 00E	41:00:32.585 02N	64:48:17.018 19E	41:06:35.869 47N	69:12:34.700 00E	-1.0	-2.0	2.0
	Output s	-1	41:01:38.016 65N	66:14:41.465 26E	40:59:52.998 91N	66:13:24.616 88E	41:03:37.995 84N	66:14:35.281 50E				
test45	Locus 1 Inputs	40:10:24.500 00N	68:12:45.600 00E	43:02:23.578 55N	70:29:04.943 42E	40:09:24.433 55N	68:15:01.141 89E	43:01:52.206 97N	70:30:14.687 94E	2.0	1.0	
	Locus 2 Inputs	43:40:32.943 22N	66:13:51.158 61E	42:04:35.800 00N	70:12:34.700 00E	43:42:19.591 29N	66:15:07.014 71E	42:05:27.780 65N	70:13:14.993 69E	-2.0	-1.0	2.0
	Output s	-1	42:11:59.998 55N	69:52:47.824 75E	42:13:01.467 06N	69:50:29.125 65E	42:13:43.885 07N	69:54:08.746 43E				

WGS84PerpIntercept Test Results

Test Identifier	Geodesic Start Latitude	Geodesic Start Longitude	Geodesic Azimuth (degrees)	Test Point Latitude	Test Point Longitude	Azimuth From Test Point To Intercept (degrees)	Distance From Test Point To Intercept (nm)	Intercept Latitude	Intercept Longitude
test1	40:10:24.50000N	70:12:45.60000W	38.0	42:04:35.80000N	68:12:40.70000W	129.31642	0.41489	42:04:20.02035N	68:12:14.84062W
test2	40:10:24.50000N	70:12:45.60000W	62.0	42:04:35.80000N	68:12:40.70000W	153.29737	59.66462	41:11:10.62477N	67:37:10.15895W
test3	40:10:24.50000N	70:12:45.60000W	90.0	42:04:35.80000N	68:12:40.70000W	181.29165	115.13091	40:09:25.68132N	68:16:03.75475W
test4	40:10:24.50000N	70:12:45.60000W	127.0	42:04:35.80000N	68:12:40.70000W	218.31581	145.78046	40:09:07.48064N	70:10:32.43942W
test5	40:10:24.50000N	70:12:45.60000W	150.0	42:04:35.80000N	68:12:40.70000W	241.33453	135.01795	40:58:00.14293N	70:49:04.80560W
test6	40:10:24.50000N	70:12:45.60000W	0.0	42:04:35.80000N	68:12:40.70000W	271.34146	89.41691	42:05:38.63720N	70:12:45.60000W
test7	40:10:24.50000N	70:12:45.60000W	335.0	42:04:35.80000N	68:12:40.70000W	246.33745	129.70818	41:10:42.02846N	70:50:01.67112W
test8	40:10:24.50000N	70:12:45.60000W	305.0	42:04:35.80000N	68:12:40.70000W	216.31402	145.61723	40:06:15.57774N	70:05:03.11962W
test9	40:10:24.50000N	70:12:45.60000W	180.0	38:04:35.80000N	72:12:40.70000W	88.76710	94.68092	38:05:36.99418N	70:12:45.60000W
test10	40:10:24.50000N	70:12:45.60000W	230.0	38:04:35.80000N	72:12:40.70000W	318.72576	34.59985	38:30:34.10445N	72:41:45.37882W
test11	40:10:24.50000N	70:12:45.60000W	270.0	38:04:35.80000N	72:12:40.70000W	358.70998	124.63008	40:09:18.54080N	72:16:20.21715W
test12	40:10:24.50000S	70:12:45.60000W	38.0	38:04:35.80000S	68:12:40.70000W	126.73606	2.00964	38:05:47.98305S	68:10:38.28715W
test13	40:10:24.50000S	70:12:45.60000W	62.0	38:04:35.80000S	68:12:40.70000W	150.71427	65.51427	39:01:40.59903S	67:31:33.29933W
test14	40:10:24.50000S	70:12:45.60000W	90.0	38:04:35.80000S	68:12:40.70000W	178.70822	124.62717	40:09:18.36107S	68:09:00.88927W
test15	40:10:24.50000S	70:12:45.60000W	127.0	38:04:35.80000S	68:12:40.70000W	215.73655	156.61476	40:10:50.64448S	70:12:00.36233W
test16	40:10:24.50000S	70:12:45.60000W	150.0	38:04:35.80000S	68:12:40.70000W	238.75798	144.43973	39:17:48.31169S	70:51:45.99999W
test17	40:10:24.50000S	70:12:45.60000W	0.0	38:04:35.80000S	68:12:40.70000W	268.76542	94.80986	38:05:37.16104S	70:12:45.60000W
test18	40:10:24.50000S	70:12:45.60000W	335.0	38:04:35.80000S	68:12:40.70000W	243.76128	138.61172	39:04:08.70412S	70:52:19.87385W
test19	40:10:24.50000S	70:12:45.60000W	305.0	38:04:35.80000S	68:12:40.70000W	213.73448	156.49404	40:13:57.58564S	70:06:08.18853W
test20	40:10:24.50000S	70:12:45.60000W	180.0	42:04:35.80000S	72:12:40.70000W	91.33964	89.29531	42:05:38.46633S	70:12:45.60000W
test21	40:10:24.50000S	70:12:45.60000W	230.0	42:04:35.80000S	72:12:40.70000W	321.30417	30.78578	41:40:30.62405S	72:38:21.72071W
test22	40:10:24.50000S	70:12:45.60000W	270.0	42:04:35.80000S	72:12:40.70000W	1.28990	115.12817	40:09:25.84116S	72:09:17.92603W
test23	40:10:24.50000S	68:12:45.60000E	38.0	38:04:35.80000S	70:12:40.70000E	126.73774	2.11300	38:05:51.69739S	70:14:49.40745E
test24	40:10:24.50000S	68:12:45.60000E	62.0	38:04:35.80000S	70:12:40.70000E	150.71599	65.57735	39:01:43.94797S	70:53:50.37701E
test25	40:10:24.50000S	68:12:45.60000E	90.0	38:04:35.80000S	70:12:40.70000E	178.70998	124.63008	40:09:18.54080S	70:16:20.21715E
test26	40:10:24.50000S	68:12:45.60000E	127.0	38:04:35.80000S	70:12:40.70000E	215.73831	156.53943	40:10:46.85840S	68:13:24.28550E
test27	40:10:24.50000S	68:12:45.60000E	150.0	38:04:35.80000S	70:12:40.70000E	238.75971	144.32946	39:17:44.81540S	67:33:42.64546E
test28	40:10:24.50000S	68:12:45.60000E	0.0	38:04:35.80000S	70:12:40.70000E	268.76710	94.68092	38:05:36.99418S	68:12:45.60000E
test29	40:10:24.50000S	68:12:45.60000E	335.0	38:04:35.80000S	70:12:40.70000E	243.76299	138.49604	39:04:05.58767S	67:33:09.49758E
test30	40:10:24.50000S	68:12:45.60000E	305.0	38:04:35.80000S	70:12:40.70000E	213.73624	156.42241	40:13:53.89461S	68:19:16.11563E
test31	40:10:24.50000S	72:12:45.60000E	180.0	42:04:35.80000S	70:12:40.70000E	91.34146	89.41691	42:05:38.63720S	72:12:45.60000E
test32	40:10:24.50000S	72:12:45.60000E	230.0	42:04:35.80000S	70:12:40.70000E	321.30598	30.70974	41:40:34.16471S	69:47:03.52290E
test33	40:10:24.50000S	72:12:45.60000E	270.0	42:04:35.80000S	70:12:40.70000E	1.29165	115.13091	40:09:25.68132S	70:16:03.75475E
test34	40:10:24.50000N	68:12:45.60000E	38.0	42:04:35.80000N	70:12:40.70000E	129.31459	0.50899	42:04:16.44172N	70:13:12.42516E
test35	40:10:24.50000N	68:12:45.60000E	62.0	42:04:35.80000N	70:12:40.70000E	153.29558	59.71928	41:11:07.73298N	70:48:13.29934E
test36	40:10:24.50000N	68:12:45.60000E	90.0	42:04:35.80000N	70:12:40.70000E	181.28990	115.12817	40:09:25.84116N	70:09:17.92603E
test37	40:10:24.50000N	68:12:45.60000E	127.0	42:04:35.80000N	70:12:40.70000E	218.31405	145.70504	40:09:10.93426N	68:14:52.79291E
test38	40:10:24.50000N	68:12:45.60000E	150.0	42:04:35.80000N	70:12:40.70000E	241.33274	134.91123	40:58:03.16688N	67:36:24.05438E
test39	40:10:24.50000N	68:12:45.60000E	0.0	42:04:35.80000N	70:12:40.70000E	271.33964	89.29531	42:05:38.46633N	68:12:45.60000E
test40	40:10:24.50000N	68:12:45.60000E	335.0	42:04:35.80000N	70:12:40.70000E	246.33565	129.59677	41:10:44.67776N	67:35:27.86348E
test41	40:10:24.50000N	68:12:45.60000E	305.0	42:04:35.80000N	70:12:40.70000E	216.31226	145.54520	40:06:18.96327N	68:20:21.80300E

MM/DD/YY

8260.42B

test42	40:10:24.50000N	72:12:45.60000E	180.0	38:04:35.80000N	70:12:40.70000E	88.76542	94.80986	38:05:37.16104N	72:12:45.60000E
test43	40:10:24.50000N	72:12:45.60000E	230.0	38:04:35.80000N	70:12:40.70000E	318.72407	34.51477	38:30:30.24106N	69:43:40.27830E
test44	40:10:24.50000N	72:12:45.60000E	270.0	38:04:35.80000N	70:12:40.70000E	358.70822	124.62717	40:09:18.36107N	70:09:00.88927E

WGS84LocusPerpIntercept Test Results

Test Identifier	Inputs	Locus Geodesic Start Latitude	Locus Geodesic Start Longitude	Locus Geodesic End Latitude	Locus Geodesic End Longitude	Locus Start Latitude	Locus Start Longitude	Locus End Latitude	Locus End Longitude	Locus Start Distance (nm)	Locus End Distance (nm)	Test Point Latitude	Test Point Longitude
	Outputs	Azimuth From Test Point To Intercept (degrees)	Distance From Test Point To Intercept (nm)	Intercept Latitude	Intercept Longitude								
test1	Inputs	40:10:24.5000N	70:12:45.6000W	42:46:07.45918N	67:25:36.90158W	40:11:01.46238N	70:13:47.29029W	42:46:45.90859N	67:26:39.45541W	-1.0	-1.0	42:04:35.8000N	68:12:34.7000W
	Outputs	309.31753	0.64273	42:05:00.24258N	68:13:14.76673W								
test2	Inputs	40:10:24.5000N	70:12:45.6000W	42:46:07.45918N	67:25:36.90158W	40:09:47.52843N	70:11:43.92830W	42:45:29.00021N	67:24:34.36924W	1.0	1.0	42:04:35.8000N	68:12:34.7000W
	Outputs	129.31753	1.35727	42:03:44.17073N	68:11:10.11749W								
test3	Inputs	40:10:24.5000N	70:12:45.6000W	42:46:07.45918N	67:25:36.90158W	40:09:47.52843N	70:11:43.92830W	42:44:50.53170N	67:23:31.85839W	1.0	2.0	42:04:35.8000N	68:12:34.7000W
	Outputs	129.60401	2.08646	42:03:15.94272N	68:10:25.22603W								
test4	Inputs	40:10:24.5000N	70:12:45.6000W	42:46:07.45918N	67:25:36.90158W	40:11:01.46238N	70:13:47.29029W	42:47:24.34843N	67:27:42.03074W	-1.0	-2.0	42:04:35.8000N	68:12:34.7000W
	Outputs	309.03106	1.37192	42:05:27.64952N	68:14:00.58323W								
test5	Inputs	40:10:24.5000N	70:12:45.6000W	41:40:24.61603N	66:17:03.91251W	40:11:17.51431N	70:13:22.35551W	41:42:13.03866N	66:18:12.69511W	-1.0	-2.0	42:04:35.8000N	68:12:34.7000W
	Outputs	153.01195	57.96492	41:12:49.81350N	67:37:43.49832W								
test6	Inputs	40:10:24.5000N	70:12:45.6000W	40:05:30.77099N	65:52:03.22158W	40:08:24.41100N	70:12:45.6000W	40:04:30.79747N	65:52:07.04176W	2.0	1.0	42:04:35.8000N	68:12:34.7000W
	Outputs	181.00609	116.68342	40:07:51.80394N	68:15:14.93906W								
test7	Inputs	40:10:24.5000N	70:12:45.6000W	38:06:56.47029N	66:50:21.71131W	40:12:00.39619N	70:11:11.34983W	38:08:29.64659N	66:48:45.71750W	-2.0	-2.0	42:04:35.8000N	68:12:34.7000W
	Outputs	218.31689	143.82663	40:10:41.23180N	70:08:54.51269W								
test8	Inputs	40:10:24.5000N	70:12:45.6000W	37:15:52.75197N	68:07:31.78007W	40:09:54.47230N	70:13:53.37924W	37:14:55.04445N	68:09:43.61910W	1.0	2.0	40:04:35.8000N	69:12:34.7000W
	Outputs	240.93040	38.37214	39:45:48.10411N	69:56:04.27064W								
test9	Inputs	40:10:24.5000N	70:12:45.6000W	43:25:53.95085N	69:15:43.32087W	40:10:36.97688N	70:14:02.16772W	43:26:20.17044N	69:18:24.04024W	-1.0	-2.0	42:04:35.8000N	68:12:34.7000W
	Outputs	283.05132	65.25203	42:18:48.35558N	69:38:15.57457W								

test1 0	Input s	40:10:24.5 0000N	70:12:45.60 000W	43:30:29.8 7690N	70:12:45.60 000W	40:10:24.4 7060N	70:10:09.05 140W	43:30:29.8 6864N	70:11:23.15 209W	2.0	1.0	42:04:35.8 0000N	68:12:34.70 000W
	Outp uts	271.05601	88.06612	42:05:12.2 8968N	70:10:50.66 239W								
test1 1	Input s	40:10:24.5 0000N	70:12:45.60 000W	43:29:41.8 0326N	70:36:41.64 863W	40:10:19.2 5950N	70:14:03.57 478W	43:29:30.7 5486N	70:39:25.80 395W	-1.0	-2.0	42:04:35.8 0000N	68:12:34.70 000W
	Outp uts	266.05671	100.72052	41:56:20.9 4047N	70:27:13.96 006W								
test1 2	Input s	40:10:24.5 0000N	70:12:45.60 000W	42:10:25.7 8109N	73:44:43.81 529W	40:11:11.8 1273N	70:11:57.40 023W	42:11:14.5 3862N	73:43:56.74 833W	1.0	1.0	42:04:35.8 0000N	69:12:34.70 000W
	Outp uts	218.66979	116.72692	40:32:44.2 7479N	70:48:14.72 623W								
test1 3	Input s	40:10:24.5 0000N	70:12:45.60 000W	36:50:12.1 9034N	70:12:45.60 000W	40:10:24.4 9265N	70:11:27.32 569W	36:50:12.1 6424N	70:10:16.11 397W	-1.0	-2.0	38:04:35.8 0000N	72:12:34.70 000W
	Outp uts	88.48154	96.22417	38:06:05.7 7988N	70:10:42.38 354W								
test1 4	Input s	40:10:24.5 0000N	70:12:45.60 000W	37:58:59.0 8359N	73:26:32.36 055W	40:11:56.4 8089N	70:14:26.26 527W	37:59:43.6 9324N	73:27:23.18 593W	2.0	1.0	38:04:35.8 0000N	72:12:34.70 000W
	Outp uts	318.44031	35.88843	38:31:24.8 4927N	72:42:54.95 851W								
test1 5	Input s	40:10:24.5 0000N	70:12:45.60 000W	40:05:30.7 7099N	74:33:27.97 842W	40:08:24.4 1100N	70:12:45.60 000W	40:04:30.7 9747N	74:33:24.15 824W	-2.0	-1.0	38:04:35.8 0000N	72:12:34.70 000W
	Outp uts	358.99772	123.10364	40:07:47.6 7496N	72:15:23.10 907W								
test1 6	Input s	20:10:24.5 0000N	70:12:45.60 000W	22:47:42.8 8332N	67:59:32.62 915W	20:11:01.5 7566N	70:13:35.86 376W	22:48:20.6 1693N	68:00:23.22 901W	-1.0	-1.0	22:04:35.8 0000N	68:12:34.70 000W
	Outp uts	308.72881	18.49323	22:16:11.6 8878N	68:28:07.95 660W								
test1 7	Input s	20:10:24.5 0000N	70:12:45.60 000W	22:47:42.8 8332N	67:59:32.62 915W	20:09:47.4 2031N	70:11:55.34 284W	22:47:05.1 4519N	67:58:42.03 703W	1.0	1.0	22:04:35.8 0000N	68:12:34.70 000W
	Outp uts	308.72881	16.49323	22:14:56.5 0252N	68:26:26.90 385W								
test1 8	Input s	20:10:24.5 0000N	70:12:45.60 000W	22:47:42.8 8332N	67:59:32.62 915W	20:09:47.4 2031N	70:11:55.34 284W	22:46:27.4 0256N	67:57:51.45 264W	1.0	2.0	22:04:35.8 0000N	68:12:34.70 000W
	Outp uts	309.01529	15.69835	22:14:30.2 9919N	68:25:43.56 946W								
test1 9	Input s	20:10:24.5 0000N	70:12:45.60 000W	22:47:42.8 8332N	67:59:32.62 915W	20:11:01.5 7566N	70:13:35.86 376W	22:48:58.3 4604N	68:01:13.83 660W	-1.0	-2.0	22:04:35.8 0000N	68:12:34.70 000W
	Outp uts	308.44233	19.28768	22:16:37.0 0430N	68:28:51.98 766W								
test2 0	Input s	20:10:24.5 0000N	70:12:45.60 000W	21:42:55.0 4997N	67:03:07.16 284W	20:11:17.6 7400N	70:13:15.54 639W	21:44:42.4 7168N	67:04:05.42 224W	-1.0	-2.0	22:04:35.8 0000N	68:12:34.70 000W
	Outp uts	152.41757	46.88028	21:22:52.1 6995N	67:49:19.19 587W								
test2 1	Input s	20:10:24.5 0000N	70:12:45.60 000W	20:08:16.1 0563N	66:40:11.24 376W	20:08:24.0 5152N	70:12:45.60 000W	20:07:15.8 9488N	66:40:12.60 255W	2.0	1.0	22:04:35.8 0000N	68:12:34.70 000W
	Outp uts	180.40439	115.88931	20:08:17.3 9840N	68:13:26.84 791W								
test2	Input	20:10:24.5	70:12:45.60	18:08:16.6	67:25:03.87	20:12:00.6	70:11:28.81	18:09:51.6	67:23:46.42	-2.0	-2.0	22:04:35.8	68:12:34.70

2	s	0000N	000W	0075N	343W	8945N	766W	3861N	707W			0000N	000W
	Outputs	217.71425	156.60521	19:59:44.5 1317N	69:54:16.80 106W								
test2 3	Inputs	20:10:24.5 0000N	70:12:45.60 000W	17:16:01.6 1500N	68:28:18.10 827W	20:09:54.3 8551N	70:13:40.83 341W	17:15:02.3 8476N	68:30:07.30 583W	1.0	2.0	20:04:35.8 0000N	69:12:34.70 000W
	Outputs	240.62790	47.41380	19:41:09.8 0503N	69:56:21.99 784W								
test2 4	Inputs	20:10:24.5 0000N	70:12:45.60 000W	23:26:37.8 6400N	69:27:33.93 765W	20:10:37.0 1823N	70:13:47.98 905W	23:27:03.4 5735N	69:29:41.45 246W	-1.0	-2.0	22:04:35.8 0000N	68:12:34.70 000W
	Outputs	282.46352	87.05417	22:23:01.2 3192N	69:44:17.95 270W								
test2 5	Inputs	20:10:24.5 0000N	70:12:45.60 000W	23:31:06.9 3560N	70:12:45.60 000W	20:10:24.4 8716N	70:10:38.03 712W	23:31:06.9 3179N	70:11:40.31 639W	2.0	1.0	22:04:35.8 0000N	68:12:34.70 000W
	Outputs	270.46647	110.19089	22:04:46.7 8090N	70:11:13.20 586W								
test2 6	Inputs	20:10:24.5 0000N	70:12:45.60 000W	23:30:20.0 6967N	70:31:42.81 974W	20:10:19.2 4793N	70:13:49.13 814W	23:30:09.3 1498N	70:33:52.85 078W	-1.0	-2.0	22:04:35.8 0000N	68:12:34.70 000W
	Outputs	265.46611	122.69379	21:53:59.0 0085N	70:24:06.45 107W								
test2 7	Inputs	20:10:24.5 0000N	70:12:45.60 000W	22:12:35.6 9228N	73:02:34.77 881W	20:11:11.9 5601N	70:12:06.32 892W	22:13:23.7 9135N	73:01:55.88 211W	1.0	1.0	22:04:35.8 0000N	69:12:34.70 000W
	Outputs	218.36943	123.21147	20:27:18.8 1236N	70:34:01.01 617W								
test2 8	Inputs	20:10:24.5 0000N	70:12:45.60 000W	16:49:37.4 9349N	70:12:45.60 000W	20:10:24.4 9679N	70:11:41.81 856W	16:49:37.4 8292N	70:10:40.49 187W	-1.0	-2.0	18:04:35.8 0000N	72:12:34.70 000W
	Outputs	89.09350	115.76556	18:05:47.8 6911N	70:11:03.51 621W								
test2 9	Inputs	20:10:24.5 0000N	70:12:45.60 000W	18:00:09.4 6178N	72:53:29.02 106W	20:11:56.7 6327N	70:14:07.60 925W	18:00:55.0 0817N	72:54:10.22 384W	2.0	1.0	18:04:35.8 0000N	72:12:34.70 000W
	Outputs	319.05008	23.26620	18:22:13.6 4861N	72:28:36.69 646W								
test3 0	Inputs	20:10:24.5 0000N	70:12:45.60 000W	20:08:16.1 0563N	73:45:19.95 624W	20:08:24.0 5152N	70:12:45.60 000W	20:07:15.8 9488N	73:45:18.59 745W	-2.0	-1.0	18:04:35.8 0000N	72:12:34.70 000W
	Outputs	359.59765	123.21213	20:08:16.8 2998N	72:13:29.86 100W								

WGS84PointToArcTangents

Test Identifier	Point Latitude	Point Longitude	Arc Center Latitude	Arc Center Longitude	Arc Radius	Tangent Point 1 Latitude	Tangent Point 1 Longitude	Tangent Point 2 Latitude	Tangent Point 2 Longitude
test1	40:04:35.80000 N	68:12:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	N/A	N/A	N/A	N/A
test2	40:04:35.80000 N	67:12:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	38:58:50.99979 N	68:42:19.92957 W	41:17:02.57149 N	68:34:37.49185 W
test3	40:04:35.80000 N	60:42:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	38:33:51.49399 N	69:38:46.59230 W	41:48:38.13537 N	69:47:36.01065 W
test4	40:04:35.80000 N	47:18:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	38:32:36.38289 N	69:45:21.56093 W	41:50:24.89752 N	70:17:02.95660 W
test5	42:54:35.80000 N	70:11:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	41:10:08.36776 N	68:27:18.83665 W	41:10:59.53083 N	71:57:22.47464 W
test6	64:54:35.80000 N	70:11:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	40:15:27.76756 N	68:02:23.12392 W	40:15:31.95981 N	72:23:07.86461 W
test7	52:54:35.80000 N	70:11:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	40:21:58.95584 N	68:02:59.46118 W	40:22:10.22316 N	72:22:30.19164 W
test8	40:24:35.80000 N	75:11:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	41:43:51.26621 N	70:59:57.14126 W	38:44:18.56935 N	71:18:35.69631 W
test9	40:24:35.80000 N	85:11:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	41:50:23.42412 N	70:17:57.13255 W	38:33:20.77969 N	70:44:13.68450 W
test10	40:24:35.80000 N	80:11:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	41:49:34.92720 N	70:30:17.76805 W	38:34:51.79348 N	70:51:10.47505 W
test11	37:09:35.80000 N	70:21:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	39:17:29.76121 N	72:02:47.41811 W	39:11:04.58987 N	68:28:26.79906 W
test12	30:09:35.80000 N	70:21:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	39:53:58.01340 N	72:21:11.40785 W	39:51:26.97905 N	68:04:57.44757 W
test13	25:09:35.80000 N	70:21:34.70000 W	40:10:24.50000 N	70:12:45.60000 W	100.0	39:59:12.99136 N	72:22:13.50689 W	39:57:25.86494 N	68:03:36.34196 W
test14	40:04:35.80000 N	72:12:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	N/A	N/A	N/A	N/A
test15	40:04:35.80000 N	73:12:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	38:58:59.31128 N	71:43:22.32134E	41:16:52.48137 N	71:51:05.39764E
test16	40:04:35.80000 N	80:12:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	38:33:38.85748 N	70:45:44.00068E	41:48:54.91998 N	70:35:56.19986E
test17	40:04:35.80000 N	85:12:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	38:32:40.44989 N	70:40:33.55927E	41:50:14.09817 N	70:21:45.92010E
test18	42:54:35.80000 N	70:11:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	41:10:59.53083 N	71:57:22.47464E	41:10:08.36776 N	68:27:18.83666E
test19	52:54:35.80000 N	70:11:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	40:22:10.22315 N	72:22:30.19164E	40:21:58.95586 N	68:02:59.46118E
test20	57:54:35.80000 N	70:11:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	40:18:20.82175 N	72:22:56.15166E	40:18:13.61636 N	68:02:34.42092E
test21	40:24:35.80000 N	65:11:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	41:43:58.89962 N	69:26:00.45951E	38:44:06.31619 N	69:07:22.38700E
test22	40:24:35.80000 N	55:11:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	41:50:23.55695 N	70:07:38.55861E	38:33:20.46158 N	69:41:19.14594E

test23	40:24:35.80000 N	60:11:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	41:49:35.71820 N	69:55:21.25651E	38:34:50.41383 N	69:34:26.43627E
test24	37:09:35.80000 N	70:21:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	39:11:04.58989 N	68:28:26.79904E	39:17:29.76123 N	72:02:47.41812E
test25	32:09:35.80000 N	70:21:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	39:47:00.76207 N	68:06:16.51285E	39:50:03.52790 N	72:20:10.72389E
test26	27:09:35.80000 N	70:21:34.70000E	40:10:24.50000 N	70:12:45.60000E	100.0	39:55:34.77439 N	68:03:58.36606E	39:57:35.60852 N	72:21:56.65907E
test27	40:04:35.80000S	72:12:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	N/A	N/A	N/A	N/A
test28	40:04:35.80000S	73:12:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	41:16:52.48137S	71:51:05.39763E	38:58:59.31128S	71:43:22.32134E
test29	40:04:35.80000S	83:12:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	41:49:55.55059S	70:26:29.37475E	38:32:53.74966S	70:41:49.38811E
test30	40:04:35.80000S	80:12:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	41:48:54.91998S	70:35:56.19985E	38:33:38.85748S	70:45:44.00069E
test31	38:04:35.80000S	70:11:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	38:49:55.28970S	71:29:33.42172E	38:50:48.30732S	68:54:26.10830E
test32	28:04:35.80000S	70:11:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	39:55:27.43830S	72:21:31.28285E	39:55:44.66533S	68:03:56.29379E
test33	33:04:35.80000S	70:11:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	39:45:36.78731S	72:18:46.32802E	39:46:03.95424S	68:06:35.51577E
test34	40:24:35.80000S	65:51:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	38:48:24.38501S	68:58:41.71027E	41:41:16.63837S	69:17:31.03298E
test35	40:24:35.80000S	60:51:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	38:35:16.36317S	69:32:41.49524E	41:49:20.73591S	69:53:01.97091E
test36	40:24:35.80000S	55:51:34.70000E	40:10:24.50000S	70:12:45.60000E	100.0	38:33:26.36693S	69:40:49.11846E	41:50:20.97633S	70:06:20.58405E
test37	43:09:35.80000S	69:38:25.30000E	40:10:24.50000S	70:12:45.60000E	100.0	40:52:32.16687S	68:13:48.41601E	41:16:01.63700S	71:52:03.48811E
test38	48:09:35.80000S	69:38:25.30000E	40:10:24.50000S	70:12:45.60000E	100.0	40:25:12.33606S	68:03:29.94912E	40:34:39.67829S	72:19:42.54233E
test39	53:09:35.80000S	69:38:25.30000E	40:10:24.50000S	70:12:45.60000E	100.0	40:19:08.92651S	68:02:39.52957E	40:24:28.22924S	72:22:08.94257E
test40	40:04:35.80000S	68:12:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	N/A	N/A	N/A	N/A
test41	40:04:35.80000S	66:47:25.30000 W	40:10:24.50000S	70:12:45.60000 W	100.0	41:26:06.94082S	68:46:38.84215 W	38:51:27.83161S	68:53:19.53080 W
test42	40:04:35.80000S	56:47:25.30000 W	40:10:24.50000S	70:12:45.60000 W	100.0	41:50:00.49059S	70:00:06.82169 W	38:32:50.15608S	69:44:01.95578 W
test43	40:04:35.80000S	59:47:25.30000 W	40:10:24.50000S	70:12:45.60000 W	100.0	41:49:07.32741S	69:51:10.22069 W	38:33:29.54331S	69:40:33.17198 W
test44	38:04:35.80000S	70:11:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	38:50:48.30732S	68:54:26.10830 W	38:49:55.28969S	71:29:33.42171 W
test45	28:04:35.80000S	70:11:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	39:55:44.66533S	68:03:56.29379 W	39:55:27.43828S	72:21:31.28285 W
test46	33:04:35.80000S	70:11:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	39:46:03.95424S	68:06:35.51577 W	39:45:36.78730S	72:18:46.32802 W
test47	40:24:35.80000S	74:11:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	38:51:54.10807S	71:32:55.13292 W	41:39:02.49151S	71:13:58.65781 W
test48	40:24:35.80000S	84:11:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	38:33:30.19485S	70:45:01.28168 W	41:50:19.19941S	70:19:56.15761 W
test49	40:24:35.80000S	80:11:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	38:34:51.79347S	70:51:10.47504 W	41:49:34.92720S	70:30:17.76806 W
test50	43:09:35.80000S	70:21:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	41:02:16.59197S	72:05:02.69299 W	41:08:20.56609S	68:25:37.35380 W
test51	48:09:35.80000S	70:21:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	40:28:45.82853S	72:21:17.78853 W	40:31:11.70040S	68:04:49.12313 W
test52	53:09:35.80000S	70:21:34.70000 W	40:10:24.50000S	70:12:45.60000 W	100.0	40:21:08.09707S	72:22:38.37153 W	40:22:30.13116S	68:03:03.81110 W

WGS84PerpTangentPoints Test Results

Test Identifier	Geodesic Start Latitude	Geodesic Start Longitude	Geodesic Azimuth (degrees)	Arc Center Latitude	Arc Center Longitude	Arc Radius	Intercept 1 Latitude	Intercept 1 Longitude	Intercept 2 Latitude	Intercept 2 Longitude	Tangent Point 1 Latitude	Tangent Point 1 Longitude	Tangent Point 2 Latitude	Tangent Point 2 Longitude
test1	40:04:35.80000N	65:12:40.70000W	350.0	40:10:24.50000N	70:12:45.60000W	50.0	41:45:15.42301N	65:36:23.05394W	40:06:32.80959N	65:13:07.57044W	40:59:04.91370N	70:27:57.32812W	39:21:40.43861N	69:58:02.47943W
test2	40:04:35.80000N	65:12:40.70000W	200.0	40:10:24.50000N	70:12:45.60000W	50.0	38:14:05.43205N	66:03:35.08024W	39:48:31.53705N	65:20:15.65454W	39:22:29.68372N	70:31:27.94338W	40:58:17.46091N	69:53:43.69995W
test3	40:04:35.80000N	68:12:40.70000W	325.0	40:10:24.50000N	70:12:45.60000W	100.0	42:13:23.37083N	70:14:57.87719W	39:30:24.62906N	67:41:50.28458W	41:30:34.37380N	71:31:37.17040W	38:49:17.65513N	68:57:04.57474W
test4	40:04:35.80000N	65:12:40.70000W	270.0	40:10:24.50000N	70:12:45.60000W	50.0	39:55:02.92066N	71:16:44.98301W	40:00:38.90564N	69:06:53.45783W	40:07:17.85127N	71:17:50.28392W	40:12:54.82728N	69:07:35.57088W
test5	40:04:35.80000N	65:12:40.70000W	300.0	40:10:24.50000N	70:12:45.60000W	50.0	42:06:05.22048N	70:09:48.79496W	41:20:00.99595N	68:11:12.42020W	40:32:38.56283N	71:11:21.28560W	39:47:38.67195N	69:14:49.94129W
test6	40:04:35.80000N	65:12:40.70000W	240.0	40:10:24.50000N	70:12:45.60000W	50.0	37:57:45.76917N	69:38:55.15062W	38:51:12.13212N	67:51:14.22782W	39:42:50.60770N	71:07:01.04721W	40:37:35.17545N	69:17:48.54937W
test7	44:54:35.80000N	70:11:34.70000W	180.0	40:10:24.50000N	70:12:45.60000W	50.0	39:20:22.07307N	70:11:34.70000W	41:00:26.50523N	70:11:34.70000W	39:20:22.06721N	70:12:44.75738W	41:00:26.49902N	70:12:46.49381W
test8	44:54:35.80000N	70:11:34.70000W	148.0	40:10:24.50000N	70:12:45.60000W	50.0	40:44:55.03008N	66:49:02.96925W	42:11:35.30495N	67:55:46.12774W	39:27:50.18529N	69:38:39.28546W	40:52:46.19633N	70:47:39.16449W
test9	44:54:35.80000N	70:11:34.70000W	211.0	40:10:24.50000N	70:12:45.60000W	50.0	40:39:20.90907N	73:30:31.26204W	42:06:51.06530N	72:25:51.03824W	39:27:22.55669N	70:45:52.63953W	40:53:14.53640N	69:38:52.20992W
test10	40:24:35.80000N	75:11:34.70000W	90.0	40:10:24.50000N	70:12:45.60000W	50.0	40:15:00.17740N	69:06:59.49277W	40:20:38.68482N	71:17:28.91405W	40:07:17.14968N	69:07:40.97872W	40:12:55.02357N	71:17:55.61784W
test11	40:24:35.80000N	75:11:34.70000W	71.0	40:10:24.50000N	70:12:45.60000W	50.0	41:42:40.03737N	69:38:05.90758W	41:14:59.29549N	71:45:59.60155W	40:23:40.58611N	69:09:45.81981W	39:56:32.34252N	71:15:19.64207W
test12	40:24:35.80000N	75:11:34.70000W	117.0	40:10:24.50000N	70:12:45.60000W	50.0	38:21:19.52582N	70:19:44.57750W	39:10:39.07842N	72:11:03.63508W	39:45:02.93329N	69:16:42.08956W	40:35:20.61719N	71:09:29.12730W
test13	37:09:35.80000N	70:21:34.70000W	0.0	40:10:24.50000N	70:12:45.60000W	50.0	41:00:26.84065N	70:21:34.70000W	39:20:22.39722N	70:21:34.70000W	41:00:26.49479N	70:12:38.92986W	39:20:22.07107N	70:12:51.88818W
test14	37:09:35.80000N	70:21:34.70000W	34.0	40:10:24.50000N	70:12:45.60000W	50.0	39:57:02.53883N	67:53:34.67323W	38:35:09.95589N	69:07:43.83953W	40:51:46.48176N	69:35:52.67111W	39:28:52.04803N	70:48:56.68220W
test15	37:09:35.80000N	70:21:34.70000W	331.0	40:10:24.50000N	70:12:45.60000W	50.0	40:07:42.80472N	72:30:57.33906W	38:41:00.31862N	71:26:24.86130W	40:54:09.57283N	70:44:34.61853W	39:26:31.66858N	69:41:34.39676W
test16	40:04:35.80000N	75:12:34.70000E	350.0	40:10:24.50000N	70:12:45.60000E	50.0	41:45:12.67315N	74:48:53.01070E	40:06:30.07882N	75:12:08.45696E	40:59:04.94944N	69:57:34.06882E	39:21:40.40510N	70:27:28.53420E
test17	40:04:35.80000N	75:12:34.70000E	200.0	40:10:24.50000N	70:12:45.60000E	50.0	38:14:08.75549N	74:21:41.80893E	39:48:34.82983N	75:05:01.29260E	39:22:29.72463N	69:54:03.08054E	40:58:17.41786N	70:31:47.68622E
test18	40:04:35.80000N	72:12:34.70000E	315.0	40:10:24.50000N	70:12:45.60000E	100.0	42:02:53.59978N	69:31:25.90082E	39:43:08.75530N	72:40:17.05485E	41:18:51.03968N	68:36:46.64551E	39:00:35.86938N	71:45:27.62796E
test19	40:04:35.80000N	73:12:34.70000E	270.0	40:10:24.50000N	70:12:45.60000E	50.0	40:00:17.63529N	69:08:04.99603E	40:03:39.33076N	71:18:12.14247E	40:08:25.20509N	69:07:35.90168E	40:11:47.29572N	71:17:58.51179E
test20	40:04:35.80000N	73:12:34.70000E	300.0	40:10:24.50000N	70:12:45.60000E	50.0	41:28:31.69569N	69:52:44.13264E	40:40:49.88638N	71:49:00.24598E	40:33:41.08619N	69:14:51.20890E	39:46:37.81172N	71:09:59.27305E
test22	40:04:35.80000N	73:12:34.70000E	240.0	40:10:24.50000N	70:12:45.60000E	50.0	38:39:26.700947	70:09:47.393132	39:31:32.715930	71:59:30.394345	39:43:45.691744	40:36:38.710828		

1	80000N	70000E		50000N	60000E	0	28959N	67412E	39864N	22696E	18199N	08525E	84939N	77660E
test2	42:54:35. 80000N	70:11:34. 70000E	180.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	39:20:22. 07307N	70:11:34. 70000E	41:00:26. 50523N	70:11:34. 70000E	39:20:22. 06721N	70:12:44. 75738E	41:00:26. 49902N	70:12:46. 49381E
test2	42:54:35. 80000N	70:11:34. 70000E	148.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	40:12:21. 71012N	72:22:44. 76027E	41:38:14. 00626N	71:14:56. 56898E	39:27:51. 50743N	70:46:54. 69271E	40:52:45. 72705N	69:37:51. 05930E
test2	42:54:35. 80000N	70:11:34. 70000E	211.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	40:10:13. 49744N	68:03:47. 64473E	41:36:57. 43421N	69:09:38. 18678E	39:27:25. 16505N	69:39:32. 86210E	40:53:12. 66240N	70:46:43. 04537E
test2	40:24:35. 80000N	65:11:34. 70000E	90.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	40:14:52. 70121N	71:18:31. 30185E	40:20:33. 87049N	69:08:02. 27516E	40:07:15. 81920N	71:17:50. 10192E	40:12:56. 35847N	69:07:35. 65928E
test2	40:24:35. 80000N	65:11:34. 70000E	71.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	41:43:07. 73081N	70:47:18. 27558E	41:15:29. 46607N	68:39:22. 65865E	40:23:39. 25925N	71:15:45. 84597E	39:56:33. 64852N	69:10:11. 05812E
test2	40:24:35. 80000N	65:11:34. 70000E	117.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	38:20:32. 33083N	70:05:08. 22153E	39:09:53. 57178N	68:13:51. 51407E	39:45:01. 83231N	71:08:48. 26146E	40:35:21. 75120N	69:16:02. 91762E
test2	37:09:35. 80000N	70:21:34. 70000E	0.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	41:00:26. 84065N	70:21:34. 70000E	39:20:22. 39722N	70:21:34. 70000E	41:00:26. 49479N	70:12:38. 92986E	39:20:22. 07107N	70:12:51. 88818E
test2	37:09:35. 80000N	70:21:34. 70000E	31.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	40:01:09. 54385N	72:36:33. 75760E	38:36:16. 81276N	71:28:10. 67923E	40:53:16. 92717N	70:46:33. 80034E	39:27:23. 36126N	69:39:36. 80041E
test3	37:09:35. 80000N	70:21:34. 70000E	331.0	40:10:24. 50000N	70:12:45. 60000E	50. 0	40:13:21. 86911N	68:07:53. 03613E	38:46:42. 27396N	69:12:35. 67163E	40:54:04. 71013N	69:40:45. 15677E	39:26:36. 29194N	70:44:07. 71534E
test3	40:14:35. 80000S	76:12:34. 70000E	350.0	40:10:24. 50000S	70:12:45. 60000E	40. 0	38:52:44. 97680S	75:54:07. 21038E	40:11:52. 39692S	76:11:57. 12656E	39:30:36. 53650S	70:07:10. 29772E	40:50:12. 39327S	70:18:21. 70242E
test3	40:04:35. 80000S	75:12:34. 70000E	200.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	42:16:12. 64050S	74:07:57. 72436E	40:42:17. 22780S	74:54:32. 53991E	40:56:18. 37182S	69:46:38. 66583E	39:24:22. 40493S	70:38:11. 32653E
test3	40:04:35. 80000S	72:12:34. 70000E	315.0	40:10:24. 50000S	70:12:45. 60000E	100. 0	38:09:45. 50471S	69:49:01. 12662E	40:32:44. 31824S	72:49:35. 77432E	38:57:32. 89527S	68:44:05. 92033E	41:22:09. 83417S	71:44:30. 08384E
test3	40:04:35. 80000S	73:12:34. 70000E	270.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	40:00:17. 63529S	69:08:04. 99603E	40:03:39. 33076S	71:18:12. 14247E	40:08:25. 20509S	69:07:35. 90168E	40:11:47. 29572S	71:17:58. 51179E
test3	40:04:35. 80000S	73:12:34. 70000E	300.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	38:39:26. 28959S	70:09:47. 67412E	39:31:32. 39864S	71:59:30. 22696E	39:43:45. 18199S	69:17:44. 08525E	40:36:38. 84939S	71:08:28. 77660E
test3	40:04:35. 80000S	73:12:34. 70000E	240.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	41:28:31. 69569S	69:52:44. 13264E	40:40:49. 88638S	71:49:00. 24598E	40:33:41. 08619S	69:14:51. 20890E	39:46:37. 81172S	71:09:59. 27305E
test3	38:04:35. 80000S	70:11:34. 70000E	180.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	41:00:26. 50523S	70:11:34. 70000E	39:20:22. 07307S	70:11:34. 70000E	41:00:26. 49902S	70:12:46. 49381E	39:20:22. 06721S	70:12:44. 75738E
test3	38:04:35. 80000S	70:11:34. 70000E	148.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	40:17:07. 13084S	72:00:20. 55877E	38:52:56. 85946S	70:50:18. 83964E	40:52:45. 70508S	70:47:40. 18638E	39:27:53. 54845S	69:38:32. 22868E
test3	38:04:35. 80000S	70:11:34. 70000E	211.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	40:18:46. 00666S	68:25:41. 54164E	38:53:38. 70009S	69:33:47. 56507E	40:53:14. 02637S	69:38:51. 10513E	39:27:25. 77604S	70:45:59. 66955E
test4	40:24:35. 80000S	65:51:34. 70000E	90.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	40:16:52. 78726S	71:18:36. 57794E	40:21:48. 85747S	69:08:01. 28224E	40:07:38. 35059S	71:17:52. 01922E	40:12:33. 75700S	69:07:34. 45828E
test4	40:24:35. 80000S	65:51:34. 70000E	71.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	38:59:21. 92563S	70:45:28. 67998E	39:36:03. 21874S	68:45:36. 55313E	39:51:34. 97299S	71:13:03. 49121E	40:28:43. 60957S	69:11:55. 38110E
test4	40:24:35. 80000S	65:51:34. 70000E	117.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	42:01:19. 14270S	70:19:39. 19192E	41:19:26. 82819S	68:18:23. 75678E	40:30:35. 82765S	71:12:35. 50340E	39:49:40. 20801S	69:13:32. 78935E
test4	43:09:35. 80000S	69:38:25. 30000E	0.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	39:20:27. 07217S	69:38:25. 30000E	41:00:31. 67824S	69:38:25. 30000E	39:20:22. 12663S	70:12:21. 11372E	41:00:26. 43381S	70:13:11. 57361E
test4	43:09:35. 80000S	69:38:25. 30000E	34.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	40:10:58. 21027S	72:13:54. 61283E	41:35:13. 91157S	71:02:44. 04238E	39:28:37. 32353S	70:48:27. 91118E	69:41:59. 02911S	69:36:16. 97478E
test4	43:09:35. 80000S	69:38:25. 30000E	335.0	40:10:24. 50000S	70:12:45. 60000E	50. 0	40:06:15. 66891S	67:47:39. 73289E	41:37:39. 92668S	68:41:26. 00208E	39:25:07. 21618S	69:45:10. 03499E	40:55:33. 61492S	70:41:01. 20850E

test4 6	40:24:35. 80000S	65:12:40. 70000W	350.0	40:10:24. 50000S	70:12:45. 60000W	40. 0	38:58:11. 44004S	65:32:11. 35937W	40:17:14. 24083S	65:14:22. 36760W	39:30:39. 49061S	70:18:54. 59385W	40:50:09. 33911S	70:06:34. 13853W
test4 7	40:04:35. 80000S	67:12:40. 70000W	200.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	41:43:04. 52714S	68:00:35. 08875W	40:09:08. 86953S	67:14:50. 23285W	40:56:45. 65430S	70:37:27. 46544W	39:23:56. 63322S	69:48:40. 85141W
test4 8	40:04:35. 80000S	68:12:40. 70000W	315.0	40:10:24. 50000S	70:12:45. 60000W	100. 0	38:09:39. 42011S	70:36:21. 58383W	40:32:38. 43897S	67:35:47. 44055W	38:57:32. 70200S	71:41:25. 01247W	41:22:10. 04449S	68:41:01. 39841W
test4 9	40:04:35. 80000S	66:47:19. 30000W	270.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	39:59:20. 91374S	71:17:19. 47416W	40:03:11. 27515S	69:07:15. 00811W	40:08:10. 83970S	71:17:54. 39452W	40:12:01. 69154S	69:07:33. 13622W
test5 0	40:04:35. 80000S	66:47:19. 30000W	300.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	38:30:35. 82998S	70:08:06. 75040W	39:22:59. 34750S	68:18:50. 55549W	39:43:33. 42333S	71:07:37. 37083W	40:36:50. 98023S	69:17:12. 16414W
test5 1	40:04:35. 80000S	66:47:19. 30000W	240.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	41:36:36. 30412S	70:27:37. 90336W	40:49:14. 86902S	68:30:52. 22885W	40:33:27. 89443S	71:10:48. 90600W	39:46:50. 64641S	69:15:22. 88056W
test5 2	38:04:35. 80000S	70:11:34. 70000W	180.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	41:00:26. 50523S	70:11:34. 70000W	39:20:22. 07307S	70:11:34. 70000W	41:00:26. 49902S	70:12:46. 49381W	39:20:22. 06721S	70:12:44. 75738W
test5 3	38:04:35. 80000S	70:11:34. 70000W	148.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	40:16:18. 90281S	68:23:29. 95567W	38:52:08. 17125S	69:33:30. 08556W	40:52:46. 41906S	69:37:52. 49907W	39:27:52. 86878S	70:46:57. 54788W
test5 4	38:04:35. 80000S	70:11:34. 70000W	211.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	40:19:33. 41765S	71:58:06. 74176W	38:54:26. 53851S	70:49:59. 19702W	40:53:13. 33180S	70:46:41. 59808W	39:27:26. 43690S	69:39:30. 09147W
test5 5	40:24:35. 80000S	74:11:34. 70000W	90.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	40:17:53. 93865S	69:06:53. 05426W	40:22:24. 75464S	71:17:31. 47355W	40:07:50. 95861S	69:07:38. 20443W	40:12:21. 11411S	71:17:57. 31644W
test5 6	40:24:35. 80000S	74:11:34. 70000W	71.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	39:05:20. 87464S	69:36:38. 15858W	39:41:42. 34805S	71:36:49. 98435W	39:51:46. 35643S	69:12:21. 64904W	40:28:31. 97625S	71:13:41. 67519W
test5 7	40:24:35. 80000S	74:11:34. 70000W	117.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	41:54:54. 96618S	70:02:37. 71975W	41:12:42. 82714S	72:03:28. 17431W	40:30:47. 80049S	69:13:02. 54949W	39:49:28. 51990S	71:11:51. 36671W
test5 8	43:09:35. 80000S	70:21:34. 70000W	0.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	39:20:22. 39722S	70:21:34. 70000W	41:00:26. 84065S	70:21:34. 70000W	39:20:22. 07107S	70:12:51. 88818W	41:00:26. 49479S	70:12:38. 92986W
test5 9	43:09:35. 80000S	70:21:34. 70000W	34.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	40:20:09. 24057S	67:53:40. 37644W	41:44:20. 61162S	69:05:11. 16171W	39:28:45. 24018S	69:36:47. 75179W	40:51:50. 71125S	70:49:30. 38048W
test6 0	43:09:35. 80000S	70:21:34. 70000W	331.0	40:10:24. 50000S	70:12:45. 60000W	50. 0	40:10:21. 52153S	72:30:11. 26250W	41:38:48. 88727S	71:28:25. 57541W	39:26:35. 31407S	70:44:05. 41422W	40:54:03. 53921S	69:40:42. 41911W

The following individuals contributed to this Appendix:

Alan Jones, AFS-420

Dr. Michael Mills, The MITRE Corporation

Dr. Richard Snow, The MITRE Corporation

M. Jane Henry, Innovative Solutions International, Inc.

Dr. Dave Stapleton, Innovative Solutions International, Inc.

THIS PAGE INTENTIONALLY LEFT BLANK

Appendix 3. Conditions and Assumptions for Special PinS Departure Criteria

The following conditions must be inserted on *FAA Form 8260-10*, for providing guidance and criteria for helicopter *point-in-space (PinS)* departure procedures.

The Helipoint or *Helipoint Reference Point (HRP)* coordinates must be contained in the navigation receiver database. For *PinS* departures the procedure must be retrievable by the procedure name from the avionics database and conform to the charted procedure. The *PinS* departure criteria require the navigational receiver to achieve a terminal *receiver autonomous integrity monitoring (RAIM)* of 1.0 *nautical mile (NM)*. If the Special *PinS* departure obstacle clearance areas are to be applied, then the following operations must be completed successfully prior to flying the departure:

Step 1: For TSO-C129A receivers for the departure heliport either perform an approach *RAIM* prediction for the departure time or check with Flight Service Station.

Step 2: Set the course deviation indicator (*CDI*) scaling to 0.3 *NM* to reduce *FTE*. For helicopters equipped with a flight management system (*FMS*) or an *electronic flight information system (EFIS)* that are unable to display ± 0.3 *NM* full scale, the lateral deviation must be coupled to the flight director roll command bar or the autopilot roll axis (TSO C129-C1).

Step 3: Perform a position verification check with the helicopter over the *final approach and takeoff area (FATO)* center to verify the navigation performance. With the navigation receiver, verify the distance is within ± 0.0 *NM* of the distance to the *initial departure fix (IDF)*. The 0.0 readout may reflect up to a 304-ft error from the center of the *FATO* if the navigation receiver rounds up in 0.05-*NM* increments.

After passing the second departure fix waypoint (normally the *final approach fix (FAF)* on the approach), the *CDI* scaling may be set to 1.0 *NM*.

Airspeed: Must accelerate to at least V_{mini} prior to entering *instrument meteorological conditions (IMC)* at the *IDF*. Maximum speed is limited to 70 *KIAS* until passing the waypoint equivalent to the approach *FAF*. Maximum speed is limited to 90 *knot indicated airspeed (KIAS)* to the waypoint equivalent to the instrument approach fix (*IAF*).

These procedures require *operations specifications (OpSpecs)* approval for Part 135 operations and *letter of authorization (LOA)* for Part 91 operations. Obstacle avoidance, clearance from other aircraft, and compliance with the appropriate minimums during the climb from the heliport to the *IDF* is the responsibility of the pilot. The obstacle clearances are based on specific climb gradients and ground speed. In the visual segment, the pilot must accelerate the helicopter to the minimum speed requirement for instrument flight (V_{mini}) prior to the *IDF*.

The principal operations inspector (***POI***) must determine, by the operator's helicopter flight manual, the helicopter manufacturer, or the Rotorcraft Directorate's Office (ASW-100), if the helicopter can meet the visual and ***IFR*** segment climb gradients. These performance determinations must be under the worst expected conditions for the helicopter weight, density altitude, and wind. POIs needing assistance in determining helicopter performance capabilities should contact the Rotorcraft Director's Office ASW-100, telephone number (817) 222-5101.

Appendix 4. Conditions and Assumptions for Special Sector and Diverse Departure Criteria from Civil *IFR* Heliports

The following conditions must be inserted on *FAA Form 8260-10*, for providing guidance and criteria for Special Sector and Diverse departure procedures.

The *Heliport Reference Point (HRP)* coordinates must be contained in the navigation receiver database. For Sector and Diverse departures the manual loading of waypoints is authorized. If the Special Sector and Diverse departure obstacle clearance areas are to be applied, then the following operations must be completed successfully prior to flying the departure:

Step 1: For TSO-C129A receivers for the departure heliport, either perform an approach *received autonomous integrity monitoring (RAIM)* prediction for the departure time or check with the Flight Service Station.

Step 2: Set the *course deviation indicator (CDI)* scaling to 1.0 *nautical mile (NM)* to reduce *flight technical error (FTE)*. This is the accuracy with which the helicopter is controlled as measured by the indicated aircraft position with respect to the indicated command or desired position.

Step 3: Perform a position verification check with the helicopter over the *final approach takeoff area (FATO)* center to verify the navigation performance. With the navigation receiver, verify the distance is within ± 0.0 *NM* of the distance to the *initial departure fix (IDF)*. The 0.0 readout may reflect up to a 304 ft error from the center of the *FATO* if the navigation receiver rounds up in 0.05-*NM* increments. At 30 *NM* from the *heliport reference point (HRP)*, the *CDI* scaling may be set to the appropriate en route scaling.

These procedures require *operations specifications (OpSpecs)* approval for Part 135 operations and *letter of authorization (LOA)* for Part 91 operations. The obstacle clearances are based on specific climb gradients and ground speed. The helicopter must also accelerate to the minimum *knot indicated airspeed (KIAS)* for instrument flight (V_{mini}) prior to *instrument meteorological conditions (IMC)*.

The *principal operations inspector (POI)* must determine by the operator's helicopter flight manual, the helicopter manufacturer, or the Rotorcraft Directorate's Office (ASW-100) if the helicopter can meet the *instrument flight rule (IFR)* segment climb gradients. These performance determinations must be under the worst expected conditions for the helicopter weight, density altitude, and wind. *POIs* needing assistance in determining helicopter performance capabilities should contact the Rotorcraft Director's Office ASW-100, telephone number (817) 222-5101.

THIS PAGE INTENTIONALLY LEFT BLANK

Appendix 5. Conditions and Assumptions for Special Helicopter GPS Holding

The following conditions must be inserted on *FAA Form 8260-2* for providing guidance and criteria for special helicopter *Global Positioning System (GPS)* holding.

1. **The course to the holding fix** must be within – 40 degrees to + 140 degrees of the holding course reciprocal to ensure either a teardrop or direct entry.
2. **Where appropriate to accommodate either a teardrop** or direct entry, use a nonstandard holding pattern (left turns).
3. Use **Pattern D** for holding below 4,000 ft *mean sea level (MSL)*.
4. Use **Pattern E** for holding 4,000 ft thru 10,000 ft *MSL*.
5. **Holding airspeed is 90 knot indicated airspeed (KIAS).**
6. Use **3 nautical mile (NM) leg lengths.**
7. **Pilot Training Required:**
 - a. **Maintain 90 knots during holding** to minimize turn radius and wind drift.
 - b. **All holding entries** require either a direct or teardrop entry to prevent exceeding protected airspace on the non-holding side.
 - c. **Patterns below 4,000 ft MSL:** Remain within 2.5 *NM* of the holding course on the holding side and 1.8 *NM* on the non-holding side.
 - d. **Patterns 4,000 ft thru 10,000 ft MSL:** Remain within 2.8 *NM* of the holding course on the holding side and 1.9 *NM* on the non-holding side.

THIS PAGE INTENTIONALLY LEFT BLANK

Directive Feedback Information

Please submit any written comments or recommendation for improving this directive, or suggest new items or subjects to be added to it. Also, if you find an error, please tell us about it.

Subject: Order 8260.42B, Helicopter Area Navigation Instrument Procedure Construction

To: Directive Management Officer, _____

(Please check all appropriate line items)

- An error (procedural or typographical) has been noted in paragraph _____ on page _____ .
- Recommend paragraph _____ on page _____ be changed as follows:
(attached separate sheet if necessary)
- In a future change to this order, please include coverage on the following subject
(briefly describe what you want added):

Other comments:

I would like to discuss the above. Please contact me.

Submitted by: _____ Date: _____

Telephone Number: _____ Routing Symbol: _____