

Fabrication of a microfluidic flow-through immunoassay for simultaneous detection of multiple proteins

Nicole Y. Morgan, Alyssa C. Henry, T.M. Phillips, T.J. Pohida, P.D. Smith (NIH); M. Gaitan, L. Locascio (NIST)



Abstract

We have developed a chip-based microfluidic device for multi-analyte immunoaffinity capture and detection of proteins. The immediate motivation is an epidemiological study of the immune response to the Human Papilloma Virus (HPV), for which the simultaneous isolation and detection of multiple proteins from a large number of microlier samples of cervical secretions is required. Using the microfabrication facilities at NIST, we are able to make micrometer-scale glass-encapsulated microfluidic systems with any desired two-dimensional configuration. The prototype devices consist of a long glass-encapsulated channel, 50 μm x 15 μm x 30 cm, with a serpentine pattern. Side ports are used for electroosmotic loading of different biotinylated antibodies into each segment of the channel. These antibodies bind to streptavidin that has been covalently bonded to the channel walls via an imine linkage. The robust attachment of the antibodies allows them to be used for multiple sample runs; after each run, the antibody-antigen interaction can be disrupted by an acidic buffer gradient, leaving the tethered antibodies ready for reuse. After the antibodies have been immobilized, the sample under analysis flows through the entire device. Electrical control of the sample flow permits adjustment of the residence time in each segment in order to optimize binding. The channel device architecture has several advantages over existing array technology: the proteins are detected by single-point capture, and much smaller sample volumes can be used.

Overview and objectives

Why microfluidics?

- Smaller** – System volumes less than a microliter are possible, allowing detection of smaller amounts of analyte.
- Faster** – Diffusion-mediated processes happen more quickly in a smaller system. Multiplexing measurements is more easily accomplished.
- Cheaper** – With smaller systems, use of expensive reagents (e.g., capture ligands) is greatly reduced.


Develop microfluidic expertise in-house

Focus on specific applications that require extensive customization or integration into a measurement system.

Initial goal – develop microfluidic device for immunoaffinity analysis of small samples


Simultaneous detection of multiple analytes using specific binding interactions.
With a system volume of $1 \mu\text{L}$, detection of 10pg/mL concentration \rightarrow sub-picogram detection capability
Integrate with optical detection instrumentation.

Device operation – schematic

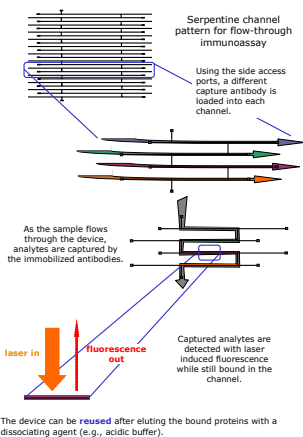

Interagency collaboration


This area is ideally suited for a collaboration between researchers at NIST and NIH. Microfluidics is an active area of research at NIST Gaithersburg. Device fabrication typically employs techniques and equipment first developed for the semiconductor industry. These facilities, and the technical expertise to operate them, already exist just up the road from NIH.

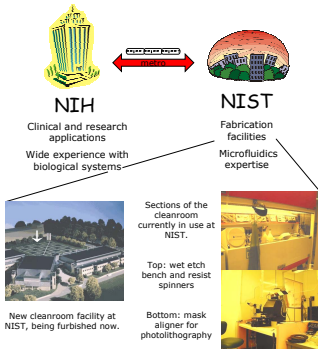

Initial strategy





- Initial devices are made from **silicon/glass**:
- system and fabrication techniques are well-characterized.
 - chemistry for biomedical applications better understood.
 - easier to incorporate circuit elements in future applications.
- Control flow with both **pressure and voltage**:
- pressure-driven flow (vacuum) for initial chemistry
 - electrokinetic flow of sample through device permits better control, less dilution of sample plug during measurement.
- Attach antibodies with **avidin-biotin chemistry**:
- antibodies strongly linked to surface so devices can be reused
 - well-established and widely used chemistry
- Detect bound molecules with **LIF inside channels**:
- laser-induced fluorescence of tagged proteins allow single-point capture
 - detecting proteins bound in channels gives the most signal, but potentially higher background.

Prototype device




Making glass-encapsulated channels

Starting material: 3" diameter silicon wafers with oxide
Techniques for silicon processing are well-characterized
Future possibility of adding on-chip electrical elements

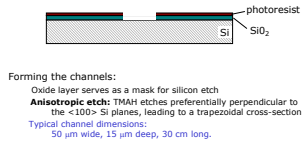


Connecting to the channels

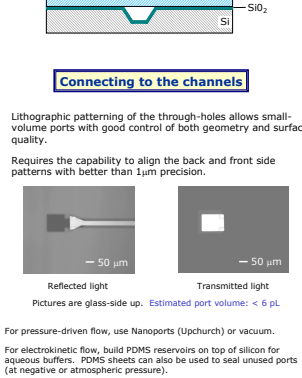


Tethering Antibodies in Microchannels

This device requires a robust and general method for tethering antibodies to the microchannel walls. Using a streptavidin-biotin linkage has several advantages:
Biotinylated antibodies are available commercially.
Attachment of biotinylated antibodies to the streptavidin-coated surface is the same for different antibodies.
Attached antibodies are positioned off of the surface, with functional antigenic binding sites accessible.
But first, the streptavidin must be covalently linked to the surface.

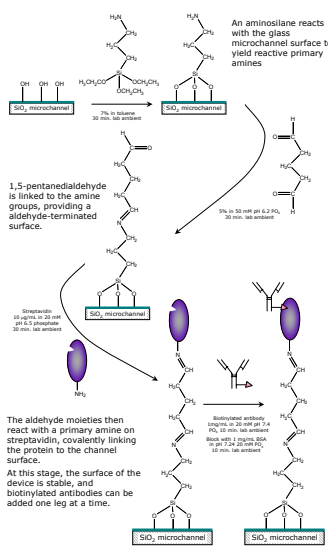


Detection of bound analytes

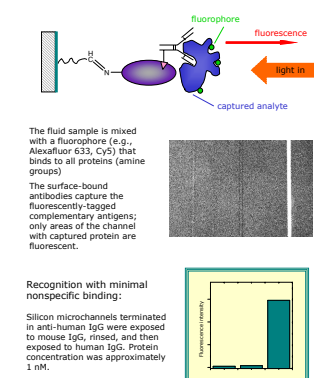


Reusing the capture antibodies


Releasing captured antigens
The interactions between the antigen and the antibody can be disrupted by rinsing with a mildly acidic buffer. The surface-bound antibodies can then be used again for the next sample.

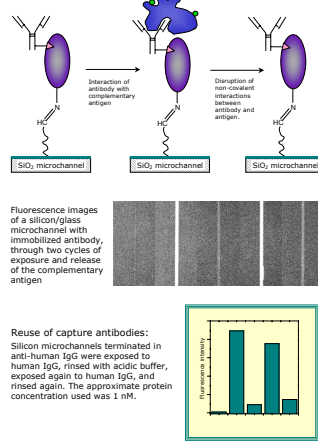

Towards quantitative detection




Controlling fluid flow



Tracking fluid flow

Orange arrows indicate direction of flow for two stages of sample injection.
Fluid flow in the prototype device is monitored using sulforhodamine B in 20 mM phosphate buffer, pH 7.4.

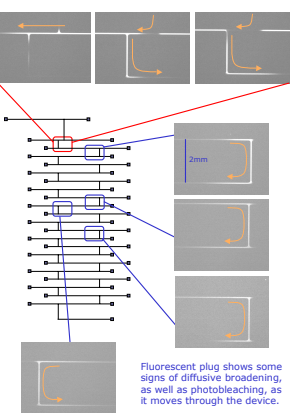

Current status

- Device fabrication:**
Made prototype devices with glass-encapsulated channels and lithographic back-side ports.
Arrays of straight channels permit rapid parallel tests of attachment chemistry.
- Flow control:**
Have shown independent control of flow in different channels. Have demonstrated both pressure-driven and electro-osmotic flow in these channels.
Electrical control of flow permits detailed control of injected sample plug.
EOF mobilities: bare SiO_2 , $\mu_{\text{EOF}} = 3.5 \times 10^{-4} \text{ cm}^2/\text{V}\cdot\text{s}$.
aminated channel $\mu_{\text{EOF}} = -1.7 \times 10^{-4} \text{ cm}^2/\text{V}\cdot\text{s}$.
- Attachment chemistry:**
Robust tethering of antibodies to microchannel surfaces. Molecular recognition of complementary antigens with minimal non-specific interactions.
Demonstrated reuse of immobilized capture antibodies.

Future directions

- Short-term goals:**
Quantitative characterization of functionalized surfaces. Further optimize quantitation of analyte capture. Begin reliability/reusability testing. Integration into whole-chip detection system.
- Long-term possibilities:**
Incorporate additional on-chip functionality, such as detection hardware or labeling chemistry. Explore the use of plastics for biomedical applications of microfluidics. Other clinical and research applications.