

CRADA facts

DEPARTMENT OF ENERGY
OFFICE OF FOSSIL ENERGY

GAS STREAM cleanup
PROJECT

FLUIDIZED-BED REACTOR AND HOT GAS CLEANUP FACILITY

CONTACT POINTS

TECHNICAL:

John M. Rockey

Chemical Engineer

Office: (304) 285-4711

E-Mail: jrocke@metc.doe.gov

ADMINISTRATIVE:

Dr. Rodney Anderson

Technology Transfer
Program Manager

Office: (304) 285-4709

E-Mail: rander@metc.doe.gov

Ms. Lisa Jarr

Patent Advisor

Office: (304) 285-4555

E-Mail: ljarr@metc.doe.gov

MAIL ADDRESS:

U.S. Department of Energy
P.O. Box 880
3610 Collins Ferry Road
Morgantown, WV 26507-0880
FAX: (304) 285-4469

Capabilities

As part of the Morgantown Energy Technology Center's (METC) Advanced Gasification and Hot Gas Cleanup Facility, a 907 kg (1 ton) coal-per-day (10-inch inside diameter) jetting fluidized-bed gasifier provides realistic fuel gas for testing and developing high-temperature, high-pressure components and processes in a reducing (gasification) and oxidizing (combustion) environment. Operated mainly as a gasifier, the 0.25-m (10-inch) diameter reactor produces up to 227 kg/hr (500 lb/hr) of coal gas at 866 K (1,100 °F) and 30 atmospheres (425 psig) for downstream testing. The raw coal gas is sampled for major and trace species and sent to a filter vessel capable of operating at 894 K (1,150 °F) and 20 atmospheres (290 psig) of pressure. After particulate removal, the gas can be independently controlled to up to five sampling or reaction vessels including fluid-bed desulfurization, transport desulfurization, chloride, alkali, or other contaminant removal or recovery processes. The fluid-bed desulfurizer is capable of being isolated, purged, and exposed to an oxidizing environment for sorbent regeneration or other oxidation reaction. Isokinetic hazardous air pollutant (HAPS) monitoring is provided at the upstream and downstream of particulate removal.

Over the past three years, 1,200 hours of operation have been completed in support of six separate Cooperative Research and Development Agreements (CRADAs). These research agreements have been in the areas of candle filters and materials testing, direct sulfur recovery from sorbent regeneration tail gases, and gasifier development.

Currently, four additional CRADAs are in development. Three of these are in further testing and development of candle filters, and the fourth is in support of the desulfurization process at the Sierra Pacific Piñon Pine, Integrated Gasification Combined Cycle (IGCC) power plant.

Opportunities

- Provide testing for advanced IGCC
 - Filtration experiments at 1,150 °F, 20 atm
 - Cyclic (reducing/oxidizing) reaction atmosphere for sorbent testing
 - Slipstreams for contaminants removal
- Provide testing for advanced PFBC
 - Filtration experiments at 1,600 °F, 30 atm
- Hardware and operational control strategy testing

FLUIDIZED-BED REACTOR AND HOT GAS CLEANUP FACILITY

The Facility

METC's **Fluid-Bed Gasifier** and the **Modular Gas Cleanup Rig (MGCR)** combined form the **METC Gasification and Hot Gas Cleanup Facility**.

This unique facility is used to develop and test components, and to test technologies suitable for Integrated Gasification, Combined-Cycle — or IGCC — power-plant systems.

The **MGCR** is mainly used to test components, such as desulfurization sorbents, hot particulate-removal filters, and filter materials.

Testing is done at a pressure of 300 pounds per square inch and a temperature up to 1,150 °F.

The **Fluid-Bed Gasifier** is at product development unit (PDU) scale.

The 10-inch diameter reactor gasifies 80 pounds per hour of coal to produce 300 pounds per hour — or 5,000 standard cubic feet per hour — of combustible, low-Btu coal gas.


The gas is produced at high temperature — 1,700 °F — and high pressure — 425 pounds per square inch.

METC hopes to use this Gasification and Hot Gas Cleanup Facility to facilitate commercialization of advanced power systems that can significantly reduce pollutants while increasing fuel efficiency — at the lowest possible costs.

The uniqueness of the combined Modular Gas Cleanup Rig and Fluid-Bed Gasifier is that testing is done with **real coal gas** that has a realistic composition and contains the trace metals and species inherent in the feed coal.



METC's **Modular Gas Cleanup Rig (MGCR)**, at left, and **Fluid-Bed Gasifier**, on the right, combined form the **METC Gasification and Hot Gas Cleanup Facility**.

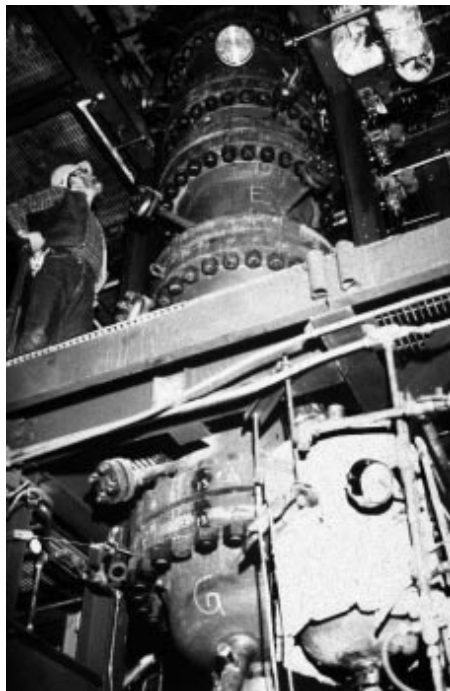

METC's Fluid-Bed Gasifier



MGCR Particulate Removal and Desulfurization Equipment



The Control Room for the Fluid-Bed Gasifier