

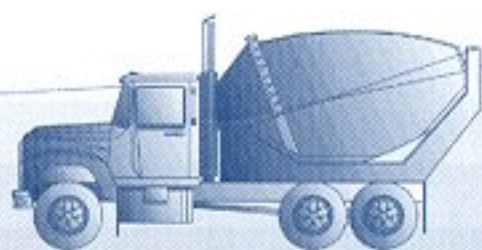


NIOSH

CONSTRUCTION WORKERS: IT'S NOT JUST DUST!

...PREVENT SILICOSIS

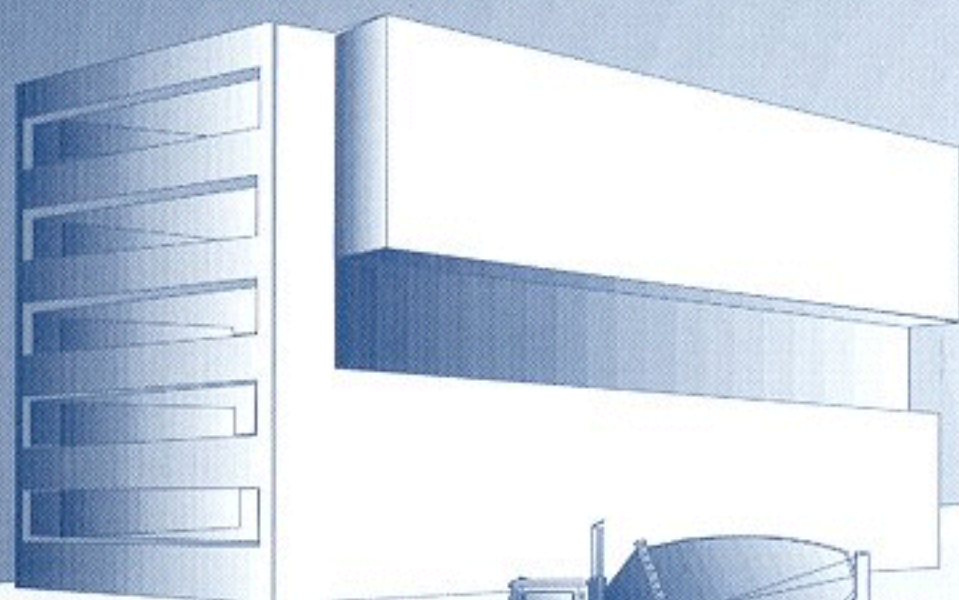

U.S. DEPARTMENT OF HEALTH AND HUMAN SERVICES
Public Health Service
Centers for Disease Control and Prevention
National Institute for Occupational Safety and Health

CDC
CENTERS FOR DISEASE CONTROL
AND PREVENTION



SILICOSIS HAS TAKEN A SERIOUS TOLL IN THE UNITED STATES, AFFECTING WORKERS IN MANY SETTINGS. HERE IS A REAL-LIFE STORY...

A West Virginia driller will not see his 10 year old daughter grow up. He will not be there when she gets married. He will not be there when she starts a family of her own. During the fall of 1988 a driller in his late 40s had chest pain. He went to a hospital in Morgantown, West Virginia, where the doctors told him he had silicosis (lung damage). He continued to work and support his family as many workers do. He died from silicosis during the spring of 1994 after 18 years of drilling. After his death his lungs were examined. His lungs were hard because of all the dust in them. It was difficult to cut them even with a scalpel.

Thousands of people are exposed to crystalline silica dust at work every day.

Early Deaths From Dust

Don't Let It Happen To You!

- 42 year old construction worker in Pennsylvania
- 37 year old construction worker in Ohio
- 49 year old construction laborer in Oklahoma
- 41 year old construction worker in Indiana
- 44 year old construction laborer in North Carolina
- 39 year old construction painter in Ohio

WHAT IS SILICOSIS?

Silicosis is permanent lung damage caused by breathing dust containing extremely fine particles of crystalline silica. Crystalline silica is found in materials such as concrete, masonry and rock. When these materials are made into a fine dust and suspended in the air, breathing in these fine particles can produce lung damage. Silicosis can be totally disabling and may lead to death.

SYMPTOMS OF SILICOSIS:

- Initially there may be no symptoms.
- Later there may be difficulty in breathing and cough may be present.
- Other symptoms may include fever, weight loss, and night sweats.

See a physician if you experience these symptoms and suspect that you are exposed to crystalline silica. All workers breathing crystalline silica dust should have a medical examination.

HOW DO CONSTRUCTION WORKERS GET EXPOSED?

Concrete and masonry products contain silica sand. Since concrete and masonry are primary building materials, there are numerous ways for construction workers to be exposed.

SOME ACTIVITIES IN WHICH SILICA DUST MAY BE PRESENT IN THE AIR INCLUDE:

- Abrasive blasting using silica sand as the abrasive.
- Abrasive blasting of concrete.
- Chipping, hammering, and drilling rock.
- Crushing, loading, hauling, and dumping rock.
- Chipping, hammering, drilling, sawing, and grinding concrete or masonry.
- Demolition of concrete and masonry structures.
- Dry sweeping or pressurized air blowing of concrete or sand dust.

HOW IS SILICOSIS PREVENTED?

The key to silicosis prevention is to prevent dust from being in the air. The Occupational Safety and Health Administration (OSHA) requires dust to be controlled whenever possible. A simple control may work.

Example: A water hose to wet dust down at the point of generation. Here are some steps you can take to protect yourself:

- Always use the dust control system and keep it in good maintenance.
- When sawing concrete or masonry use saws that provide water to the blade.
- During rock drilling use water through the drill stem to reduce the amount of dust in the air.
- Use dust collection systems which are available for many types of dust generating equipment. Use local exhaust ventilation to prevent dust from being released into the air.
- Minimize exposures to nearby workers by using good work practices.
- Use abrasives containing less than 1% crystalline silica during abrasive blasting to prevent harmful quartz dust from being released in the air.
- Measure dust levels in the air.

Respirators should only be used until adequate dust controls are in place. Respirators should not be the primary method of protection. If controls cannot keep dust levels below the NIOSH Recommended Exposure Level (REL) then respirators should be used. Select respirators that provide enough protection. Keeping respirators fit for use requires continual maintenance. When respirators are used, OSHA requires employers to establish a comprehensive respiratory protection program. Respiratory protection programs are outlined in the NIOSH *Guide to Industrial Respiratory Protection*.

MEDICAL EXAMINATIONS:

- All workers breathing crystalline silica dust should have a medical examination.
- Chest X-ray (classified according to the 1980 International Labour Office (ILO) International Classification of Radiographs of Pneumoconioses).
- Pulmonary function test.
- Annual evaluation for TB (tuberculosis).

WANT MORE INFORMATION?

Three NIOSH Silicosis Alerts available:

- *Preventing Silicosis and Deaths in Construction Workers*
- *Preventing Silicosis and Deaths from Sandblasting*
- *Preventing Silicosis and Deaths in Rock Drillers*

For free copies call NIOSH at 1-800-35-NIOSH

Your Comments

The National Institute for Occupational Safety and Health (NIOSH) requests assistance in controlling exposures of construction workers to respirable crystalline silica. The need is urgent to inform construction workers, coworkers, and construction managers about the respiratory hazards associated with respirable crystalline silica.

Your comments on how best to inform construction workers about this preventable disease are welcomed. Please send your comments to:

Ken Linch
Industrial Hygienist
NIOSH
Division of Respiratory Disease Studies
1095 Willowdale Road
Morgantown, West Virginia 26505-2888

DEPARTMENT OF

HEALTH AND HUMAN SERVICES

Public Health Service

Centers for Disease Control and Prevention

National Institute for

Occupational Safety and Health

1095 Willowdale Road, MS _____

Morgantown, West Virginia 26505-2888

Official Business

Penalty for Private Use \$300

PLACE

POSTAGE

HERE