

GTSP Annual Report for 2003

Prepared by Bob Keeley ([keeley@meds-sdmm.dfo-mpo.gc.ca](mailto:keeley@meds-sdmm.dfo-mpo.gc.ca)), Charles Sun (NODC) and Loic Petit de la Villeon (SISMER).

## 1.0 Introduction

The Global Temperature Salinity Profile Project (GTSP) is a joint World Meteorological Organization (WMO), and Intergovernmental Oceanographic Commission (IOC) project. Functionally, GTSP reports to the Joint Commission on Oceanography and Marine Meteorology (JCOMM), a body sponsored by WMO and IOC and to the IOC's International Oceanographic Data and Information Exchange committee (IODE).

Development of the GTSP (then called the Global Temperature-Salinity Pilot Project) began in 1989. The short-term goal was to respond to the needs of the Tropical Ocean and Global Atmosphere (TOGA) Experiment and the World Ocean Circulation Experiment (WOCE) for temperature and salinity data. The longer term goal was to develop and implement an end to end data management system for temperature and salinity data and other associated types of profiles, which could serve as a model for future oceanographic data management systems.

GTSP began operation in November 1990. The first version of the GTSP Project Plan was published in the same year. Since that time, there have been many developments and some changes in direction including a decision by IOC/WMO to end the pilot phase and implement GTSP as a permanent project.

GTSP played a key role in the WOCE Upper Ocean Thermal Data Assembly Centre and contributed to the final WOCE Data Resource DVD Version 3. GTSP is also an accepted part of the GOOS and a participant in CLIVAR. GTSP participants are also a part of a QC intercomparison Pilot Study of the Global Ocean Data Assimilation Experiment (GODAE).

Many nations contribute data to the GTSP and without their contributions the project could not exist. Contributions to the data management portion of GTSP are provided by Australia, Canada, France, Germany, Japan and the USA. Scientists and data managers in these countries contribute their time and resources to ensure the continuing functioning of the project.

## 2.0 Objectives

The objectives of the GTSP are as follows.

1. To provide a timely and complete data and information base of ocean temperature and salinity profile data of known and documented quality in support of global and local research programmes, national and international operational oceanography, and of other national requirements.
2. To improve data capture, data analysis, and exchange systems for temperature and salinity profile data by encouraging more participation by member states, by locating new sources of data from existing and new instruments and implementing the systems to capture and deliver the data, by taking full advantage of new computer and communications technologies, and by developing new services and products to enhance the usefulness of the GTSP to clients and member states of IODE.
3. To develop and implement data flow monitoring systems to improve the capture and timeliness of GTSP real time and delayed mode data, and to distribute information on the timeliness and completeness of GTSP data bases so that bottlenecks in the data flow can

be identified and addressed.

4. To improve the state of databases of oceanographic temperature and salinity profile data by developing and applying improved quality control systems, by implementing new data centre tests for QC as appropriate for new instrumentation; by working with the scientific partners of GTSP to train data centre staff and transfer scientific QC methods to the centres, and by feeding information on recurring errors to data collectors and submitters so that problems can be corrected at the source.
5. To facilitate the development and provision of a wide variety of useful data analyses, data and information products, and data sets to the GTSP community of research, engineering, and operational clients.

### 3.0 GTSP Operations

Figure 1 presents the data flows of national and international programmes within which GTSP is placed. The boxes in the Figure represent generic centres. A given international JCOMM or IODE centre may fit within several boxes in carrying out its national and international responsibilities. The following sections discuss this figure in terms of essential elements of the GTSP.

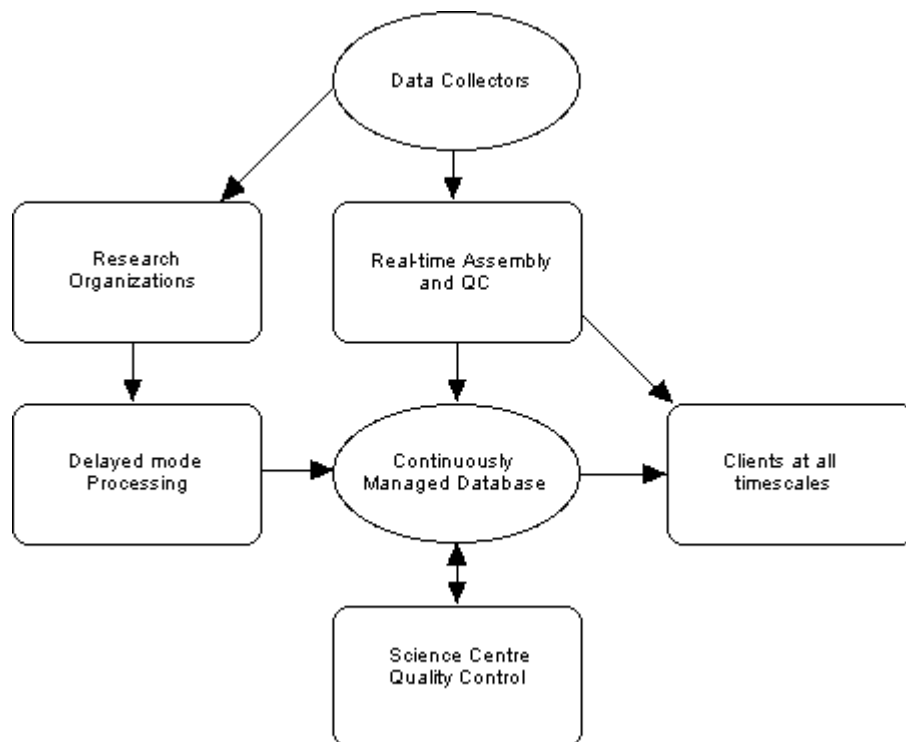


Figure 1: GTSP data flow

#### 3.1 Near Real Time and Operational Time Frame Data Acquisition

Near real time data acquisition within GTSP depends on the GTS of the World Weather Watch of WMO and the telecommunications arrangements for BATHY and TESAC data established by JCOMM. Copies of other real time or operational time frame data sets are acquired from any other available sources via the Internet or other computer networks. The goal is to ensure that the most complete operational time frame data set is captured.

Figure 2 is a graphic representation of the GTSP operational time frame data flow. The "data collectors" in the top boxes follow one of two procedures. In the first case the data are provided to GTS centres that place them on the GTS within minutes to days of their collection. In the second case the data are supplied to a national organization that forwards them to the real time centre in MEDS within a few days to a month of its collection.

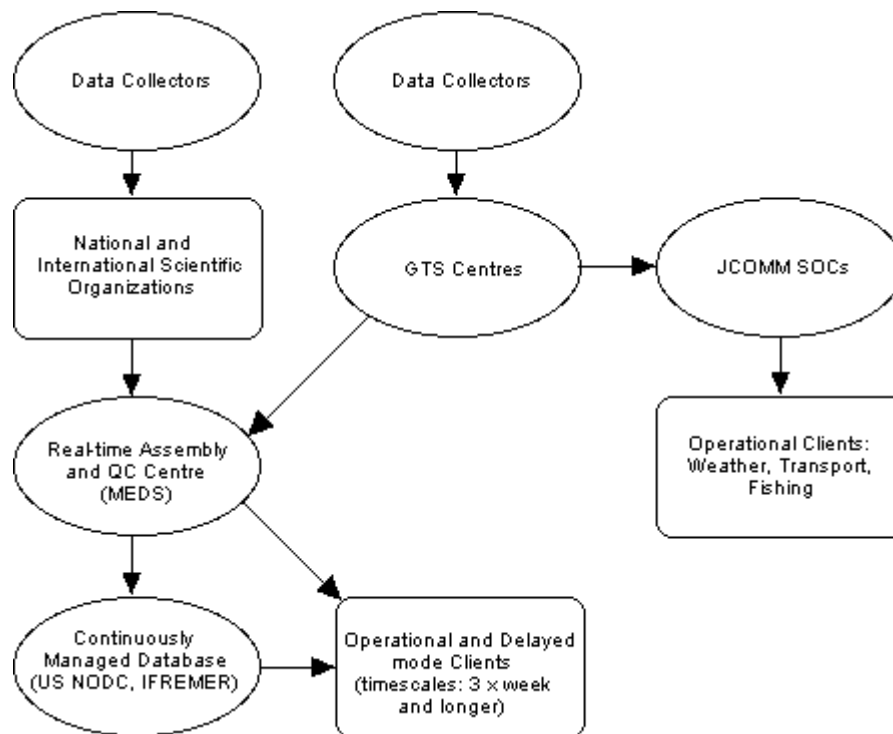


Figure 2: Real-time data flow

The real time data that are circulated on the GTS are acquired by MEDS and the Specialized Oceanographic Centres (SOCs) of JCOMM and by users of real time data who have access to the GTS. These users include meteorological and oceanographic centres that issue forecasts and warnings, centres that provide ship routing services, and centres that prepare real time products for the fishing industry.

MEDS compiles the global data set from the various sources, applies the documented GTSP QC and duplicates removal procedures, and forwards the data to the US NODC three times per week. At NODC the data are added to the continuously managed database (CMD) on the same schedule. There are also several clients that receive copies of the data sent from MEDS three times per week. These are clients who do not need the data within hours but rather within a few days. By getting the data from the GTSP Centre in MEDS they save having to operate computer systems to do quality control and duplicate removal.

The regular route for real-time data to the box marked "Operational Clients" in Figures 1 and 2 is not affected by GTSP. This route provides for uninterrupted flow of data for weather and operational forecasting through the national weather services of member states. These centres need the data in hours rather than days.

### 3.2 Delayed Mode Data Acquisition

GTSPP utilizes, to the extent possible, the existing IODE data network and processing system to acquire and process delayed mode data. The box entitled "Delayed Mode & Historical Data" in figure 3 shows the delayed mode data flow in graphic form. The data flow into the continuously managed database is through a "Delayed Mode QC" process. This process is analogous to the QC carried out on the real-time data and conforms to the specifications of the GTSPP QC Manual. In some cases, where appropriate arrangements can be made this QC process exists and is performed in another oceanographic data centre on behalf of NODC.

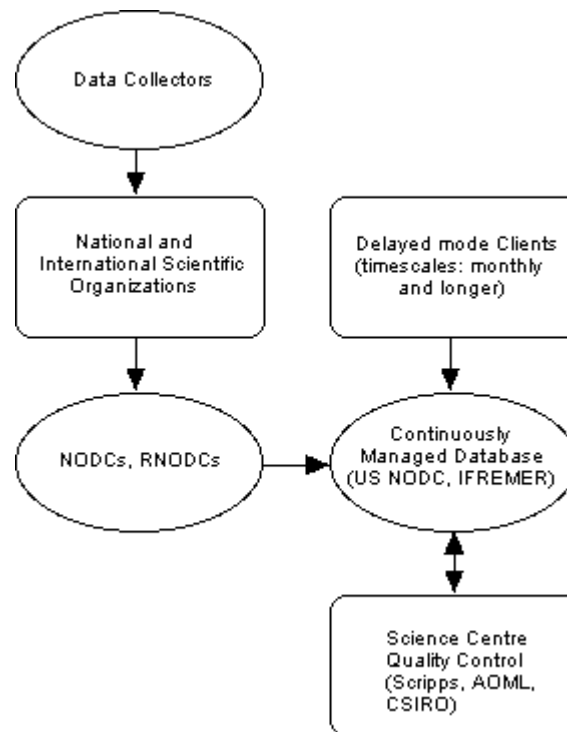


Figure 3: Delayed mode data flow

Having proceeded through the delayed mode QC process, the data then follow the same route as the real time data through the rest of the CMD process, however, on a different time schedule because of the more irregular times of arrival. During the merging of the data into the CMD, any duplicates occurring between real-time and delayed mode data sources are identified with the highest resolution copy being retained as the active CMD version.

Acquisition of delayed mode data from the Principal Investigators is a priority for the GTSPP. The goal is to get the delayed mode data into the CMD within one year or less of its collection. An excellent way for any national oceanographic data centre to support GTSPP actively is to obtain national data sets of temperature and salinity data, apply GTSPP QC procedures, and submit them to the CMD.

### 4.0 Progress to the end of 2003

The purpose of this section is to report on the performance of the GTSPP to the end of 2003 in meeting its objectives.

#### 4.1 Data Volumes

The GTSP handles all real-time and delayed mode profile data with temperature and salinity measured. Real-time data in GTSP are acquired from the Global Telecommunications System in the BATHY and TESAC codes forms supported by the WMO. Delayed mode data are contributed directly by member states of IOC.

The delivery of ocean data in real-time was initiated many years ago and administered by the IOC program called IGOSS. In 2001 operational oceanography programs of IOC and marine meteorological programs of the WMO were merged under the JCOMM. Under IGOSS, "real-time" was defined to allow data up to 30 days after collection to be included. This definition has persisted, even though the trend is to shorten considerably the delays between observation and distribution.

In JCOMM, the BATHY and TESAC code forms are the ones used most often for distribution of ocean profile data on the GTS. Figure 4 shows the progression in the use of these codes to make ocean data available. The dramatic change in mid 1999 shows the initiation of the Argo Project and the beginning of the use of TESAC to report profiles from robotic profiling floats. A review of the SOOP program in 1999 recommended a switch from broadcast sampling to line mode sampling. In principle, it was hoped that as many XBTs (exclusively reported using the BATHY code form) would be deployed along lines as formerly were deployed in broadcast mode. It is evident from the figure that the number of BATHY reports has declined since 1999 but appears to have stabilized or perhaps is slightly increasing once more.

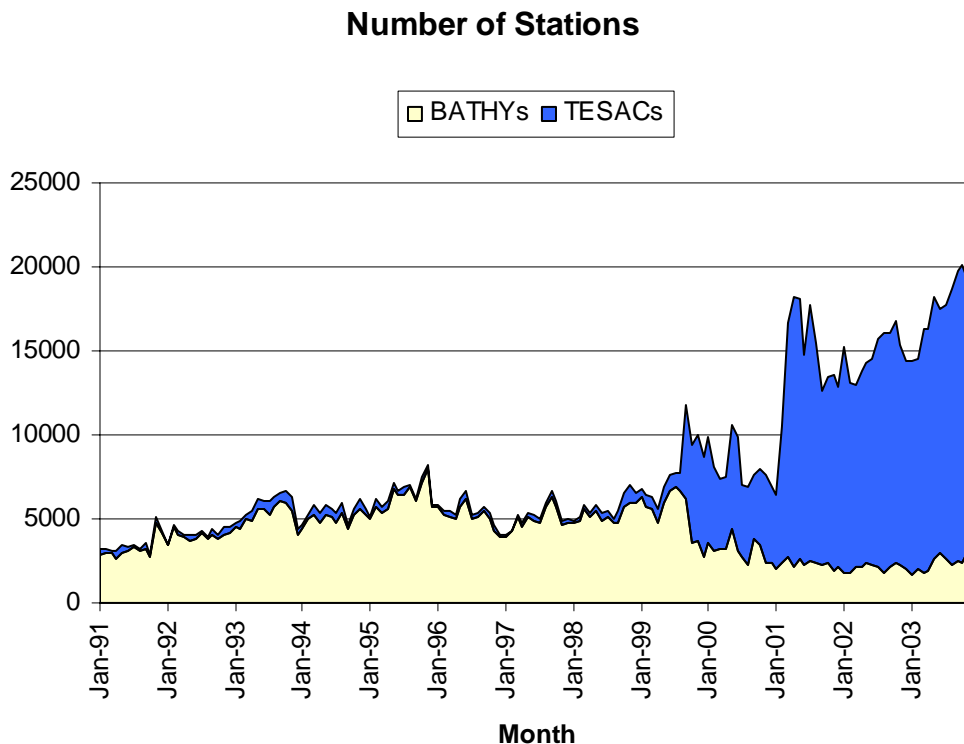


Figure 4: The number of stations reported as BATHYs and TESACs.

The next figure shows the kinds of instruments contributing data in delayed mode to the CMD. The delayed mode data in most cases are of higher vertical resolution and higher precision in measurements. These have been subdivided into a few different types and presentations made of the number of stations of each type by year. Evidently, the majority of data are from XBTs and so

have only temperature profiles. It is also evident that the volume of delayed mode data falls the closer we approach to the present. This reflects the time delays built in to higher resolution data arriving at archive centres. Later is shown the relative amounts of real-time to delayed mode data in the CMD. In some cases, real-time and delayed mode data have no difference in vertical resolution (such as for the presently operating profiling floats).

It should also be noted that there are only a very few delayed mode data from profiling floats. These were acquired during the WOCE period and are now a part of the WOCE Data Resource. The Argo data system distinguishes between real-time and delayed mode data simply by the level of quality control performed. There is no difference in either vertical resolution or measurement precision between those data provided directly to the Argo Global Data Assembly Centres in real-time and in delayed mode. The Argo data are not presented in this chart.

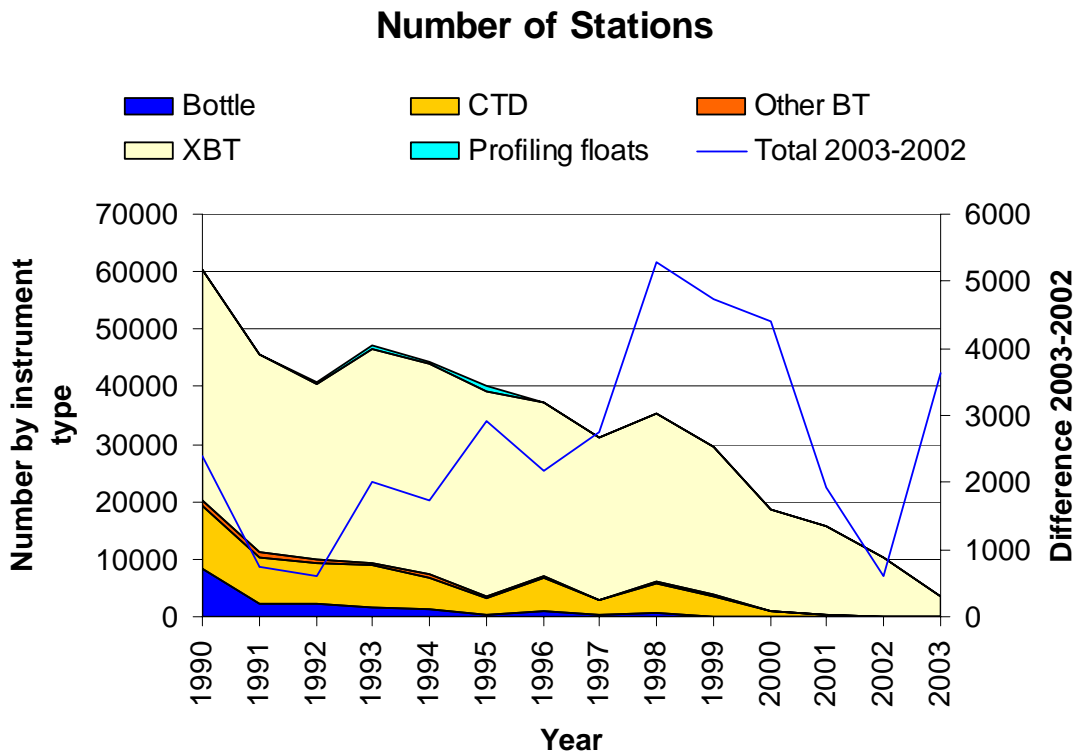


Figure 5: The number of delayed mode stations by instrument type in the CMD and differences in total numbers from 2002 to 2003.

An additional line in the chart is shown this year to highlight the change in the total number of stations in the CMD between what was present in 2002 and what is now present. The scale for this difference is on the right hand side of the chart. The largest increase has occurred for data measured in the late 1980s but also a significant number from 2003. It is important to note that older data, even collected more than 10 years ago are still entering the archives.

#### 4.2 Completeness of delivery

When the GTSP first began, it was suspected that data circulating on the GTS were lost at one or more points in the system. To test for this and to recover what might be lost, arrangements were made to have all BATHY and TESAC data gathered from the GTS at different sites and to send the data to MEDS separately from the GTS distribution. Three countries (four sites) volunteered in this effort.

In combining the data from these different sources, MEDS has to deal with the high level of duplication. It does so by assuming that duplicates will lie within 5 minutes or 15 km of each other. An examination of the recorded values in the profiles is used to determine if a duplicate exists or not. If a duplicate is found, only one of the profiles is retained. The selection of which profile is retained is based on a priority list of the sources. Figure 6 shows the numbers of stations by source that reside in the real-time archives.

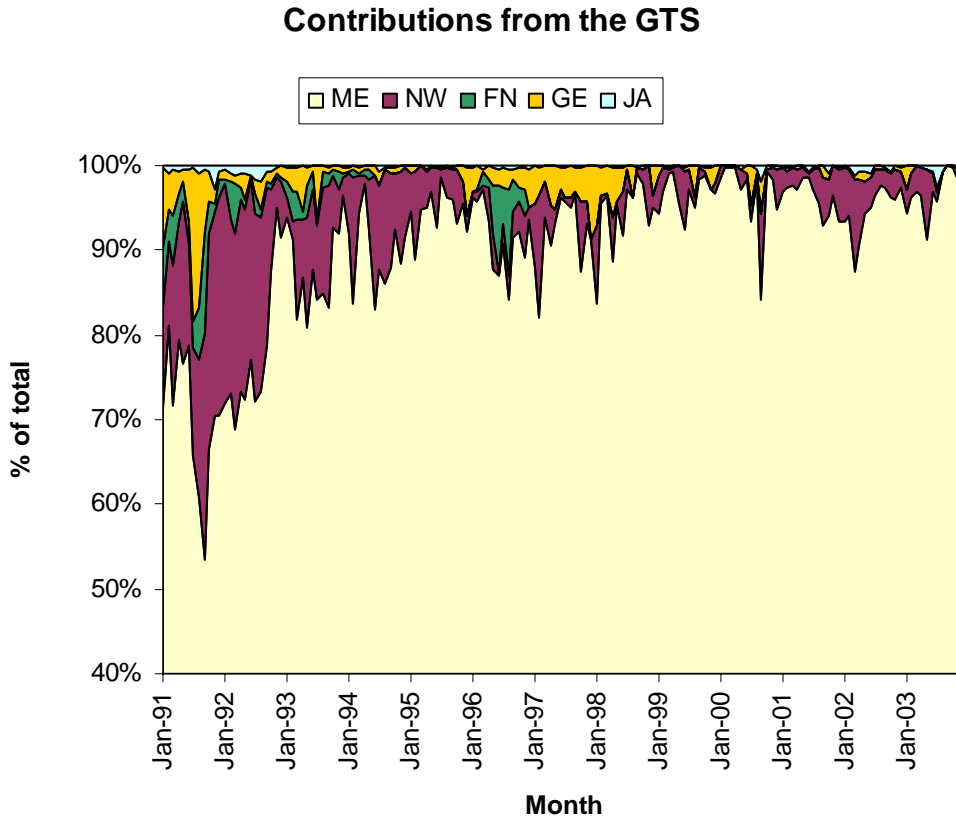


Figure 6: Contributions to the real-time archive by GTS source.

If all was working well, each of the contributors would receive exactly the same data and the figure would be all light yellow (indicating MEDS received the same data as everyone else). It is clear that this is not the case. It is also clear that there have been improvements since the beginning of GTSP, although there is still a small fraction of data appearing in data files provided from other sources that do not reach MEDS on the GTS. Some of the differences seen in more recent months stem from problems MEDS has had in its connections to the GTS. They have changed their connection and removed that problem.

Of course, there are always times when there are power interruptions or other such incidents that cause MEDS to lose part of the data flow coming directly from the GTS. In this case, having the other sites contribute data to MEDS acts as a backup and ensures no data are lost to the GTSP.

The next figures show the evolution of code forms used to report data on the GTS. Figure 7 shows that over the course of operations of the GTSP, there have been three versions of the BATHY code form used (JJXX, JJYY, JJVV). We can see that the transition to the latest form, JJVV, was dramatic at first but still only about 90% complete. The rise in the percentage of JJYY

messages in the middle of 2003 seems to be caused by a larger number of these reports from a few vessels.

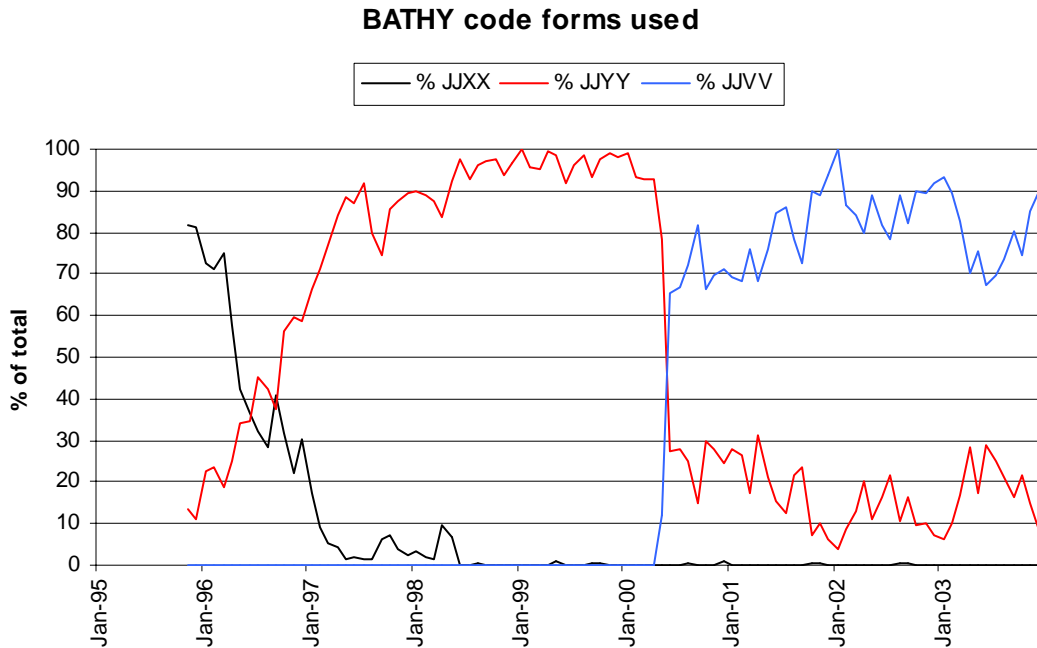


Figure 7: The percentage of total messages received using different code forms for BATHY data.

The equivalent chart for TESACs is shown in figure 8. First, there has been only two code forms used, KKXX and KKYY. Second, the changeover from the old to the new form is much better than for BATHYs. The main reason for this is that much of the data reported in TESAC are generated from automated platforms. The software is usually operating at some central location on shore (rather than distributed on ships as is the typical case for BATHYs). So, if a change needs to be made to conform to a new code form, it is a relatively simple matter to do so at a few locations and to begin to use the new form quickly.



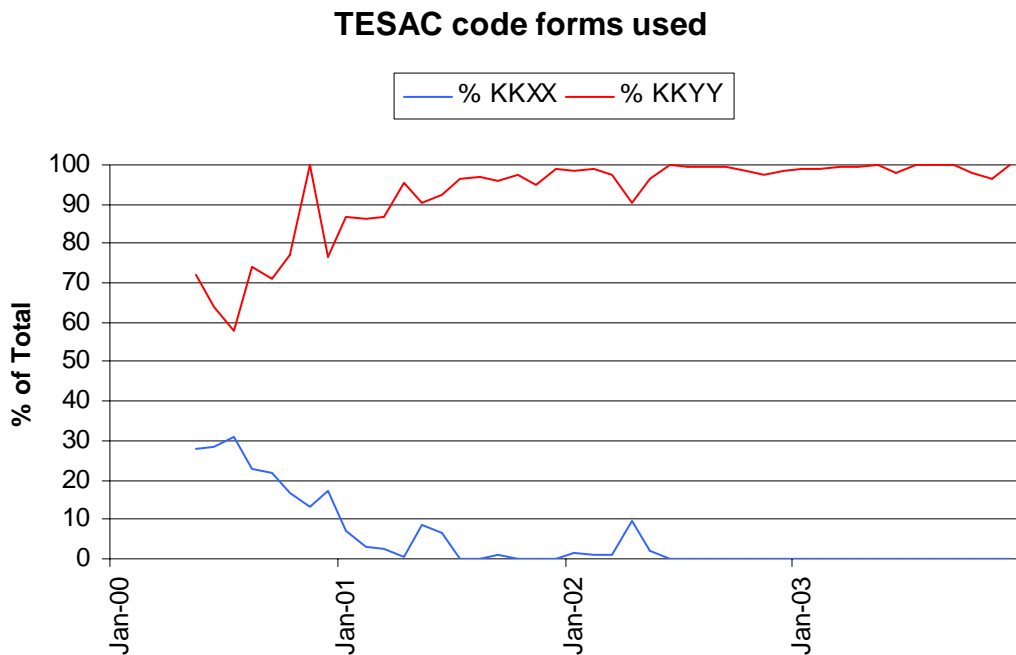


Figure 8: The percentage of total messages received using different code forms for TESAC data.

The next figure shows the relative proportion of real-time to delayed mode data present in the CMD. There are a number of things to take note of in this figure. First, GTSPP deals in both real-time and delayed mode data. While it is encouraged, by no means do all of the data available in delayed mode also arrive in real-time. This means that even though there may be a significant delayed mode contribution to the CMD these may be data that were never reported in real-time and so do not replace the real-time data.

It is evident that in only a few years have the delayed mode data arrived to replace the real-time even many years after the data collection. This shows that even though it is possible to look at time lags of delayed data coming to the CMD, figure 9 illustrates that there continue to be a significant number of high resolution stations to recover. This assumes that GTSPP is able to match the real-time data to the delayed mode profiles as they arrive. This capability is something that is touched upon as part of ongoing work reported later.

Second, as expected in the more recent years, the number of stations of delayed mode data decreases and the number of real-time increases as a proportion of the total number of stations. This, too, is typical in that it can take years for delayed mode data to reach the archives. It is precisely because of these delays that GTSPP was started and to provide the combination of real-time and delayed mode data to any user when they request the data.

Finally, the graph shows spectacular growth in the number of real-time stations from about 2000 to the present. Much of this is a direct result of the start of the Argo program. Argo profilers measure both temperature and salinity profiles usually from 2000 m to the surface. As well, there are a small number of floats now being deployed that are reporting oxygen as well. The vertical resolution varies with a typical profile having approximately 70 levels. This is all that will ever be returned from the floats and so the only difference between delayed mode and real-time profiles reported on the GTS is in increased precision of the measurements and better quality control of the data. The Argo data are also reported in real-time to the Global Data Assembly Centres of Argo, and here there is no loss of precision between real-time and delayed mode data.

## Composition of the CMD

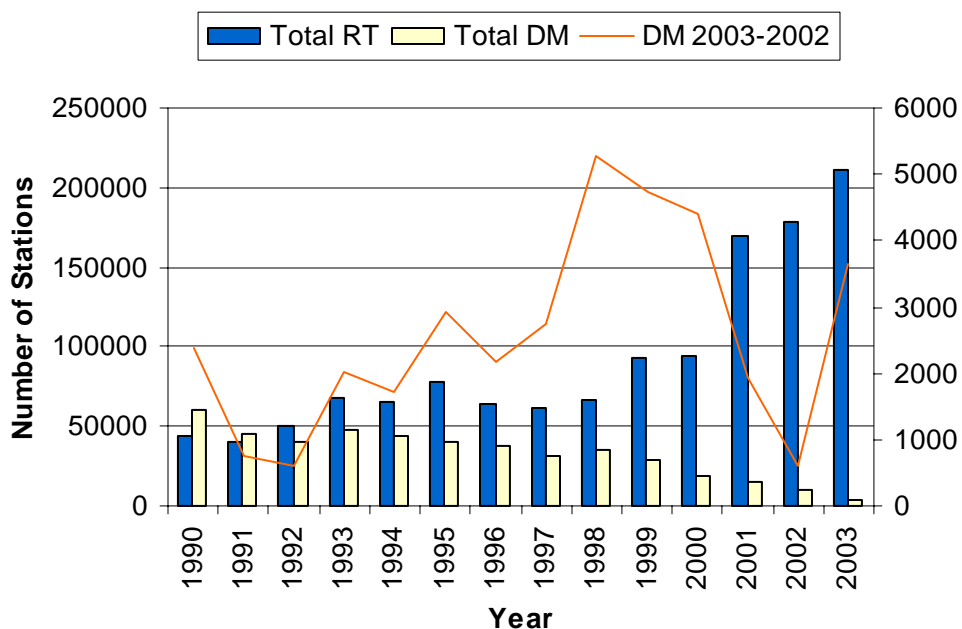


Figure 9: The volume of data in the CMD.

The red line in figure 9 shows the increase in the number of delayed mode stations that have entered the CMD (note that this is the same curve as shown in figure 5).

### 4.3 Timeliness of data

The management of data within the GTSP is organized around the idea of a Continuously Managed Database. Clients of the CMD can receive data at any time and they are of the highest quality, and highest resolution available at the time of the request. Typically, the real-time data arrive first, and so become available first. As the delayed mode data arrive, they replace the real-time data or add to the total available data.

A variety of platforms report data and each of these platforms has different systems by which data get ashore and to the GTS. While it is possible to look at the timeliness of reports as a function of the variety of platform types and instruments, it is more instructive to look at platform types that to some extent represent the extremes in timeliness. To this end, data arriving from ships can be considered the least automated (and so the slowest to arrive). At the other end are those data coming from automated platforms, of which we can take Argo as an example.

It is also possible to look at the time to get data to the GTS as well as the time to make data available from the CMD. The GTSP goal is to make data available as rapidly as possible and so it is the time to make data available that is the more important. Consequently, the difference between observation time and update time (equivalent to data being passed to GTSP clients) is what is shown here.

Another consideration is that the real-time collection and distribution of ocean profile data continues to operate on the principle that real-time is defined as any data up to 30 days after collection date. Thus, some contributors use ships to collect data, return back to their home port and then deliver data to the GTS to still make the 30 day cutoff. Although the trend these days is

to move to more rapid data dissemination, those operating under these older principles still contribute to the data flow and this will impact the timeliness statistics.

Figure 10 shows that during the first years of GTSP, roughly 10% of the data were available in the CMD 1 day after data collection. In the last year shown, 2003, this has jumped to about 40%. This is a very substantial change and much of it reflects changes in automation in data gathering and transmission. What is not evident here is that the data that are available from the CMD has undergone complete Data Centre quality control including visual inspection of every profile. More will be said about this later on in the report.

### Difference of Observation to update (ships only)

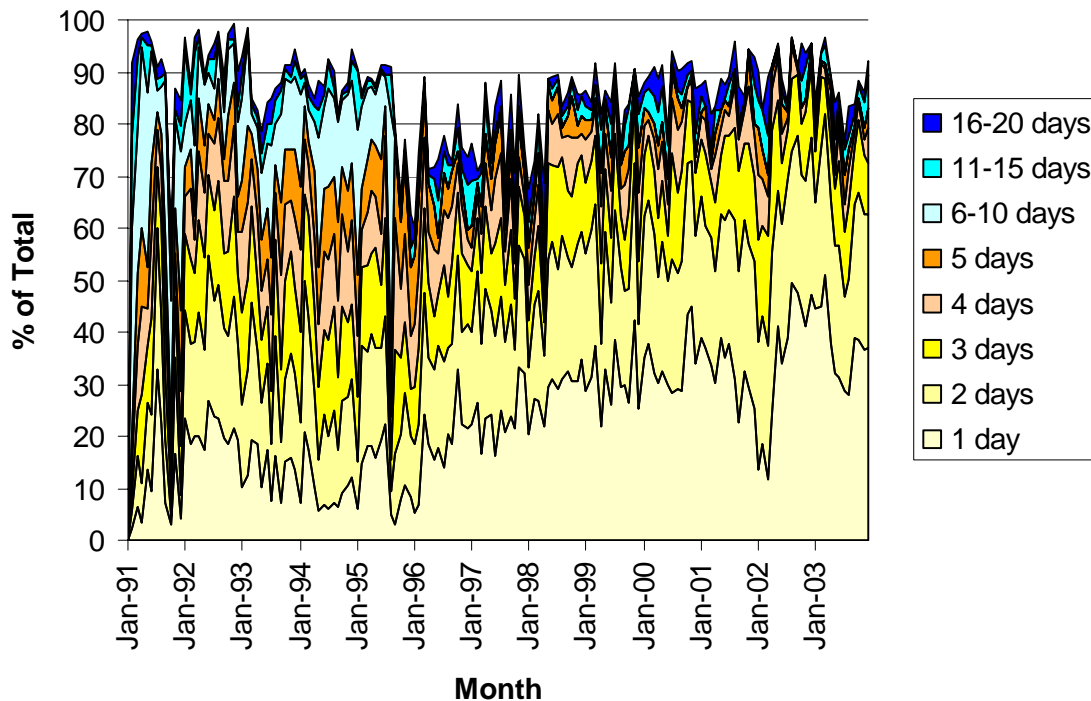


Figure 10: The time difference between observation and update to the CMD. This is generated from BATHYs only and only data reported from ships.

Figure 11 shows the same kind of display but now for profiling float data coming from the Argo project and reported as TESACs. For this chart, the time difference is measured between the bulletin time (the time the data were posted to the GTS) and the observation time. The use of profiling floats began earlier than 2000, but it was only at this time that a substantial number of floats began to be deployed. The Argo project has the stated goal to report all data to the GTS within 1 day of observation. As of the end of 2003 they were hovering about the 70% mark. This is an improvement over last year, and more improvements are expected.

In the case of Argo, fully automated QC procedures are carried out on the data prior to submission to the GTS. Some delays are experienced when profiles fail the automated procedures and manual intervention is required. Other delays are introduced when data are corrupted during transmission and must be recovered manually.

### Difference of bulletin and observation (Argo only)

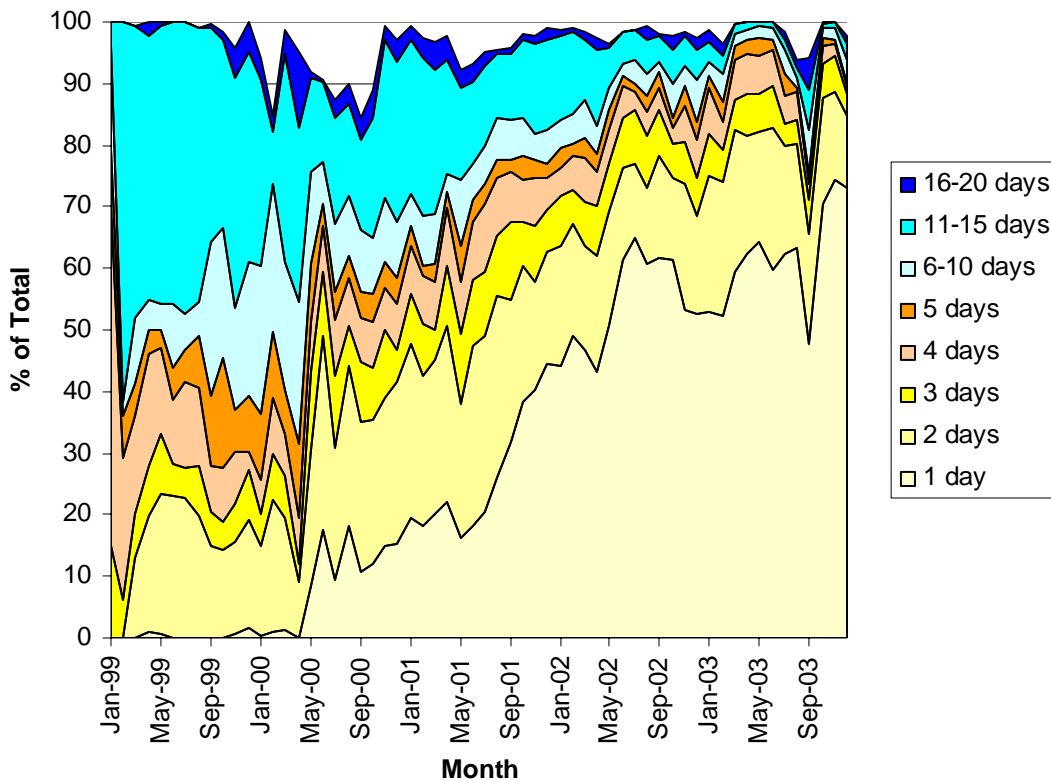


Figure 11: The time difference between observation and bulletin to the CMD. This is generated from TESACs only and only data reported from profiling floats

Of particular note in this figure is the strong dip in September of 2003. There is a similar dip in the figure 10, but it is somewhat less noticeable. The reason for this drop was the large power failure that took place in the middle of August in 2003 in both Eastern Canada and the US. This delayed work of inserting float data onto the GTS in both the US and Canada.

Dealing with timeliness of delayed mode data is more difficult. Data can be at most 30 days old (or so) for real-time distribution. Any data older than this just does not get distributed. This makes for a clean cut off time and more importantly a clear upper limit to the volume of data expected.

For delayed mode data, the oldest date could be back to the time of the Challenger Expedition in 1873. As well, there is no known limit to the volume of data that may be received in delayed mode. Both of these make it difficult to measure success in receiving delayed mode data.

Figure 12 shows statistics derived from the delayed mode data in the GTSP archives at NODC. The time axis shows the date of observation. The number of delayed mode data decrease from past to present consistent with what is shown in figure 9. It is also evident that in the early years of GTSP, it was very common for data older than 5 years to be received by the project. In the mid to late 1990s, the major fraction of the data is received when they are 2 to 3 years old. In the more recent years, the delayed mode data that have arrived tend to do so within 1-2 years of their collection date.

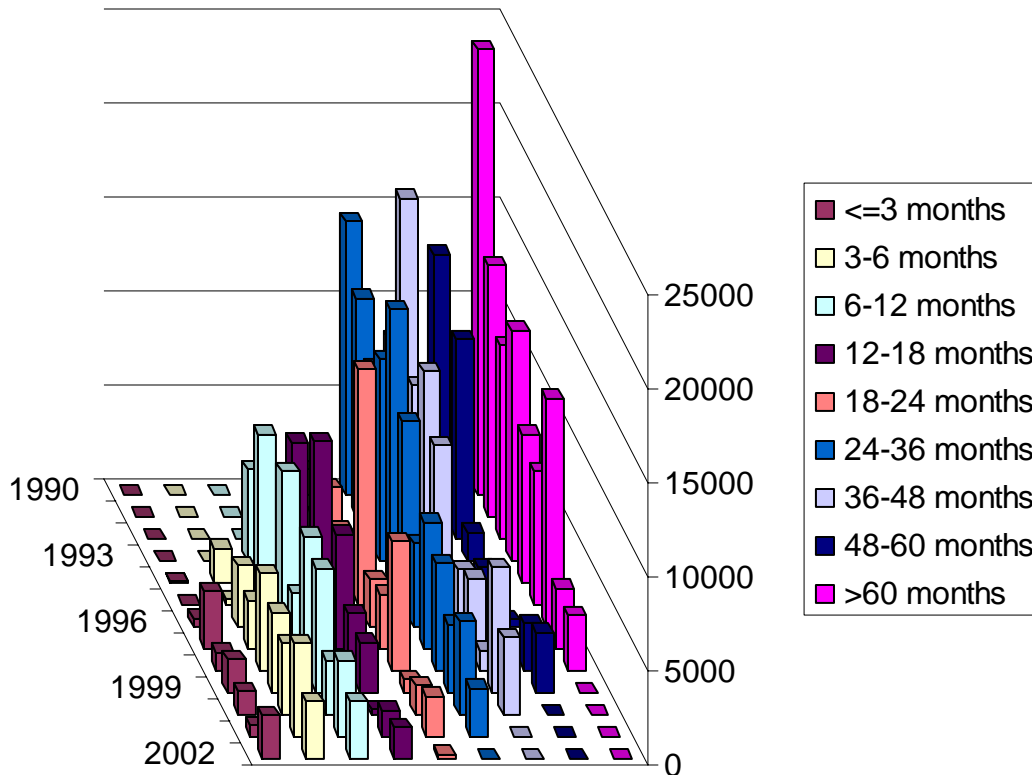


Figure 12: Timeliness of delayed mode data received at the CMD of GTSPP.

#### 4.4 Data Quality

From the start, the GTSPP agreed to standardize the quality control procedures that were used and ensure that the quality information would be managed with the data. Within the GTSPP are both data centres and centres of oceanographic scientific expertise. Data centre QC is described in IOC Manuals and Guides #22 and is available on-line at [http://www.meds-sdmm.dfo-mpo.gc.ca/ALPHAPRO/gtspp/qcmans/MG22/guide22\\_e.htm](http://www.meds-sdmm.dfo-mpo.gc.ca/ALPHAPRO/gtspp/qcmans/MG22/guide22_e.htm)

Scientific quality control is provided by collaborating science centres. CSIRO, has produced a manual describing how to examine XBT data. It is available at [http://www.meds-sdmm.dfo-mpo.gc.ca/ALPHAPRO/gtspp/qcmans/CSIRO/csiro\\_e.htm](http://www.meds-sdmm.dfo-mpo.gc.ca/ALPHAPRO/gtspp/qcmans/CSIRO/csiro_e.htm)

In 1995, an intercomparison was done between data center and science centre QC and a report may be found at [http://www.meds-sdmm.dfo-mpo.gc.ca/meds/Prog\\_Int/WOCE/WOCE\\_UOT/qcinterc\\_e.htm](http://www.meds-sdmm.dfo-mpo.gc.ca/meds/Prog_Int/WOCE/WOCE_UOT/qcinterc_e.htm)

All of the data resident in the CMD eventually passes through these two levels of scrutiny. The following figure shows the contents of the CMD where the relative volumes of data having gone through data centre QC and complete QC (science centre review) are shown.

## Assessing Data Quality

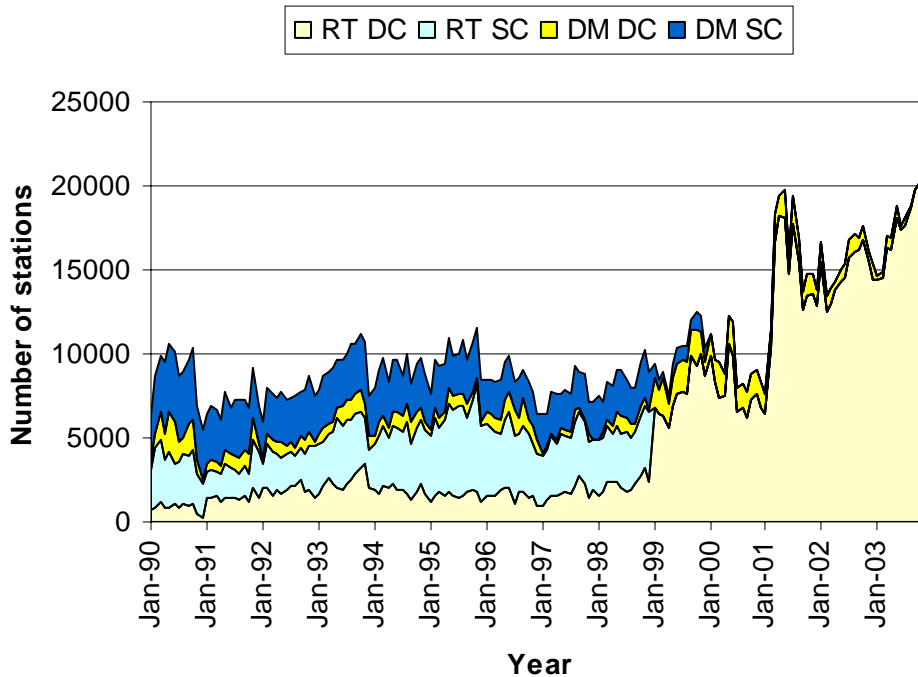


Figure 13: The numbers of real-time (RT) and delayed mode (DM) stations in the CMD having undergone quality control procedures at data centres (DC) and science centres (SC).

The review of data by science centres happens on a yearly basis, and there is always some fraction of data that escapes this process. The large jump in the numbers of stations having passed just through data centre QC in January 1999 reflects the deadlines to meet requirements for publishing the WOCE Data Resource V3. GTSP participants continue to pursue getting the data through science centre QC.

Because some users are interested in the relatively quick availability of real-time data, it is instructive to show an analysis of the results of the data centre QC process (figures 14, 15, 16). Note that flag 3 means data are suspect, flag 4 means the data are considered wrong, and flag 5 means the original value received was changed to make it consistent with other data received from the same platform.

Figure 14 displays the percentage of the total number of stations (both BATHYs and TESACs) where some problems were found in the position. There has been some improvement over time but with certain months having unusually large numbers of problems. Note that many of the position problems have been corrected. This is only done when it is possible to know the reason for the errors, or if by an examination of the problem station in the context of neighbouring stations from the same platform, it is possible to have high confidence in the change.

As can be seen, in most months, the number of stations affected are <1% of the total. This reduction is largely the consequence of the rapid rise in use of TESACs resulting from the Argo program. Much of the Argo data receives automatic quality control procedures before the data are inserted on the GTS. Because of this, the most serious errors are mostly eliminated from GTS distribution. This combines with the fact that in any month now (by the end of 2003) there are about 1000 floats operating and returning about 2500 temperature and salinity profiles. This exceeds the number of BATHYs currently reporting.

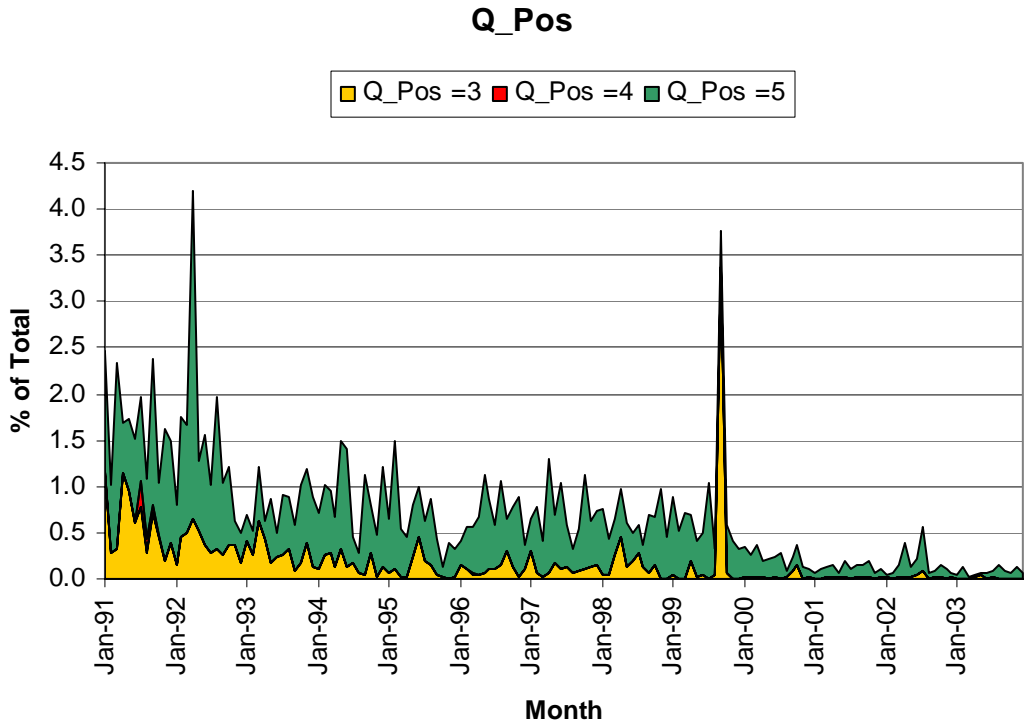


Figure 14: Percent of real-time stations with positions that had some identified problem.

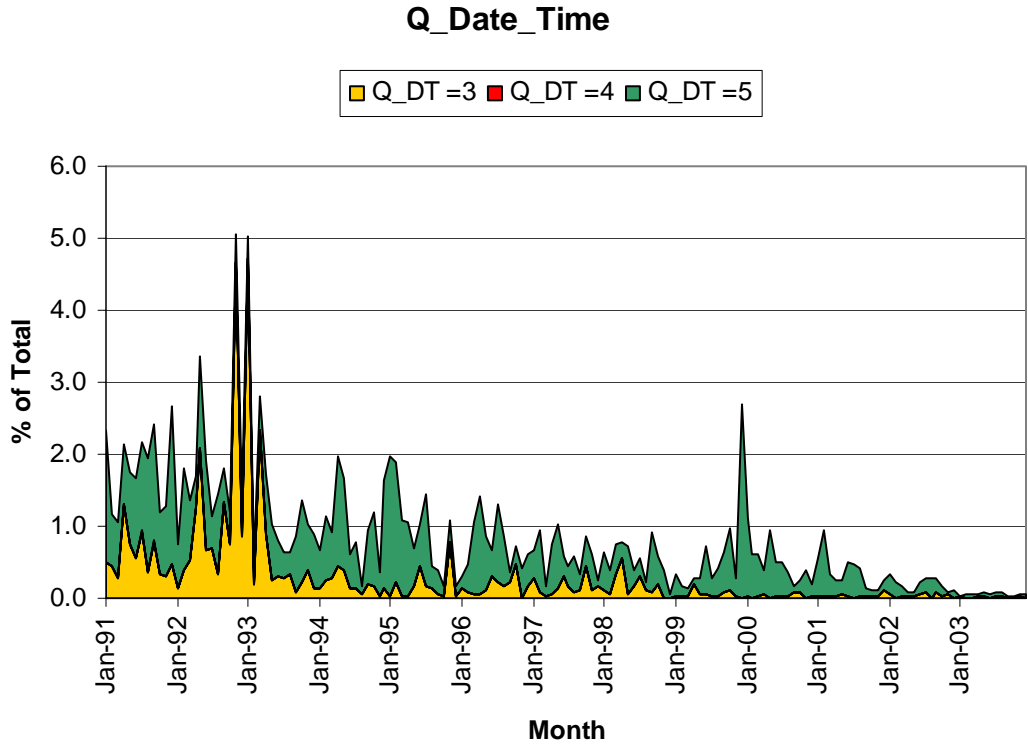


Figure 15: Percent of real-time stations with problems detected in the date or time.

Figure 15 shows that improvements continue over the time of the GTSP operations. Just as for positions, there are certain times when problems in recorded dates or times are more pronounced. Often these times are associated with the end of a year and in these cases are easily corrected. Again, the typical error rate is on the order of 1 or 2% of the total stations. In more recent months, the characteristics of the Argo data are starting to dominate the statistics. This is reflected in the steady reduction in time errors seen. In the most recent months all of the corrections noted have been for BATHY reports exclusively.

Figure 16 shows the rate of errors occurring in the BATHY and TESAC profiles themselves. A station is counted and shown if even one value in the profile appears to have a problem. There is an improvement over the course of the GTSP with a significant change in 1995 when the incidence of flag 3 was substantially reduced. In late 1993, the GTSP started to issue to operators a monthly report of problems seen in BATHYs and TESACs. At this time, BATHY reports dominated the statistics. It is tempting to interpret the reduction in errors as an impact of reporting errors back to operators. The delay between the introduction of the report and the fall in errors could be a result of the delays inherent in ship greeting activities and corrective steps being taken.

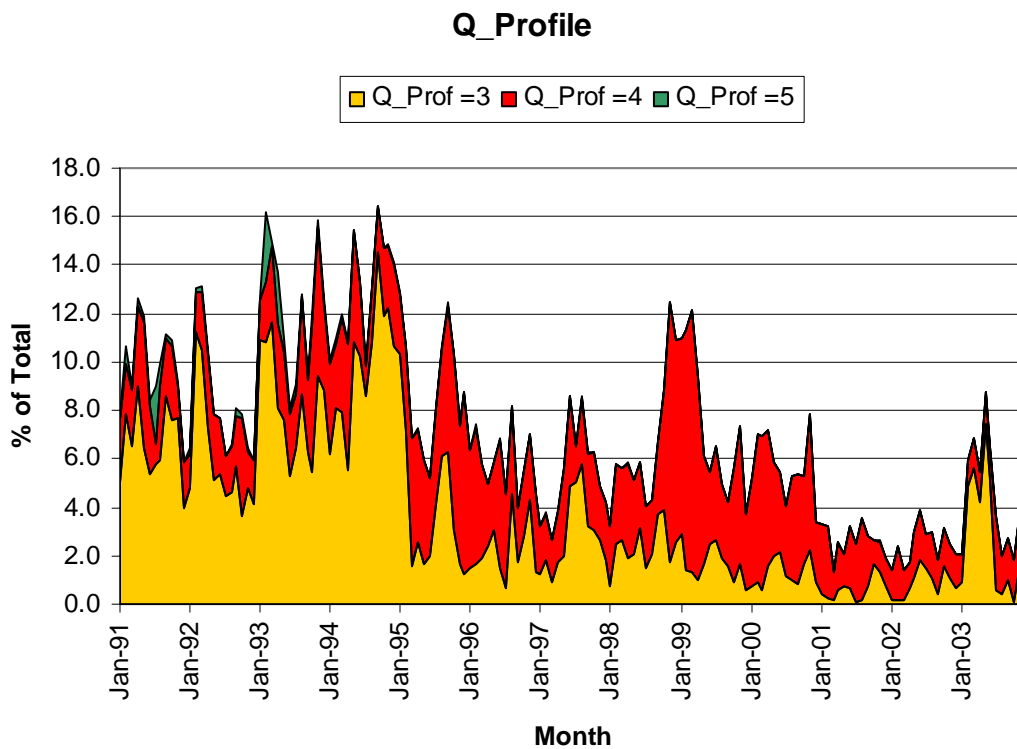


Figure 16: Percent of real-time profiles with a problem noted at one or more depths.

In more recent years, there has been a more or less steady decline in errors with another significant reduction noted about 2001. There is little doubt that this is a consequence of the number of profiles from the Argo program starting to dominate the statistics, and the automated quality control procedures reducing the number of erroneous values being reported to the GTS.

There is a noticeable spike in incidence of flags 3 and 4 in the first half of 2003. These are due to suspicious salinities reported in real-time from far western Pacific TAO buoys. Typically, the



salinity was indicating a slight decrease with depth, with no change in temperature. This caused the density inversion test in the QC software to be triggered. In particular, buoys 52079 and 52080 seemed to have the majority of the problems. It should be noted that at the TAO web site, there is no indication of salinities from these buoys in 2003.

In looking at delayed mode data that have arrived at the CMD, similar charts as for real-time can be generated. Looking at the error rates on position (figure 17), they are typically about 1.5% which is about the same as for real-time data. There are a few occasions where higher than normal rates of errors occur and these do seem to occur more often than for the real-time data. Just as for the real-time data, though, many of the errors in positions are readily correctable. Contrary to what is seen in the real-time data, there does not appear to be any systematic reduction in the rates of position errors although the error rates in the last 3 years appear to be lower than in the last half of the 1990s.

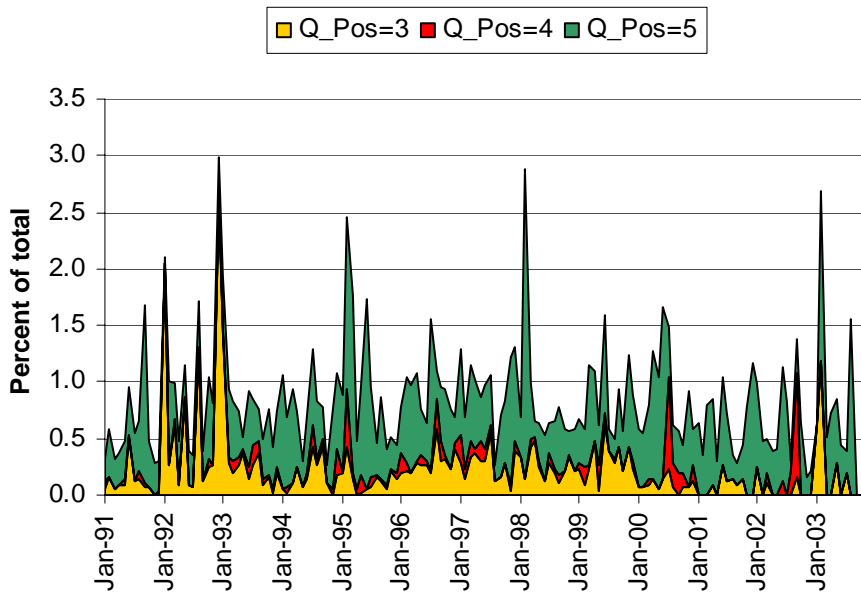


Figure 17: Percent of delayed mode stations with problems detected in the position.

The error rates in date and time (figure 18) for delayed mode data are typically on the order of a couple of percent which is quite similar to the rates seen in real-time data. We see a peculiar spike around the middle of 1996, for which there is no explanation at present. Just as for the delayed mode position errors, the error rates in the more recent years are normally lower than in the last part of the 1990s.

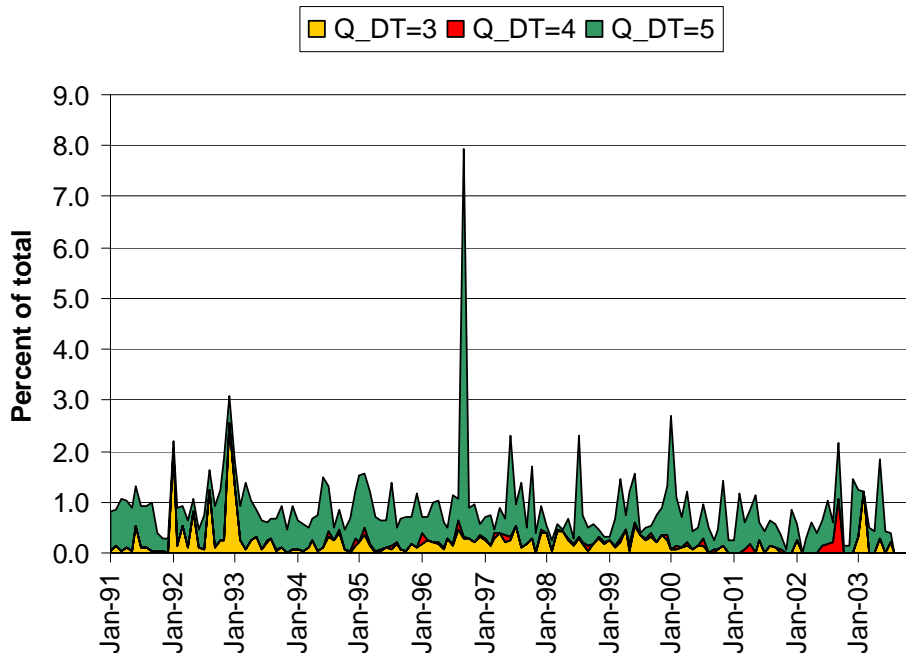


Figure 18: Percent of delayed mode stations with problems detected in the date or time.

The figures for error rates on profiles from delayed mode data have not been shown. Some data submitters choose to send all of the data collected and allow the error flagging procedures to indicate what data are useful. In some instances, profiles with data collected deeper than the design depth of the XBT, for example, show spikes that are retained in the data files. These are correctly flagged as wrong values. The consequence of this procedure, though, is that a large fraction of profiles receive at least one level with a flag indicating bad data. This tends to skew the comparison to the real-time data, where operators strive to send only reasonable data for real-time distribution.

#### 4.5 Monitoring

The GTSP has developed a number of tools that are used to monitor various aspects of the project. The displays already shown represent some of them. There are others that serve special purposes.

Each month, MEDS produces a report that summarizes the BATHY and TESAC data received from Germany, Japan, the U.S. and MEDS own connection to the GTS. This is called the preliminary International Report and is distributed by email to interested parties. A shortened version of the report is shown in Annex 1 to illustrate its content. Each month's report can also be found at

[http://www.meds-sdmm.dfo-mpo.gc.ca/meds/Prog\\_Int/GTSP/PreInt\\_e.asp](http://www.meds-sdmm.dfo-mpo.gc.ca/meds/Prog_Int/GTSP/PreInt_e.asp)

Each month, MEDS carries out a review of all of the BATHY and TESAC data received with the goal of identifying platforms with consistent failures and notifying the operators so that corrective action can take place. Each report has the five components listed here.

1. A summary report of the data received with comments made about those platforms where more than 10% of the stations had problems.
2. A map showing the location of all of the data received during that month (see a sample in annex 2a)
3. A table that shows information and summaries of QC results for every platform reporting that month

[http://www.meds-sdmm.dfo-mpo.gc.ca/meds/Prog\\_Int/WOCE/WOCE\\_UOT/ShipPerformanceReport\\_b.asp](http://www.meds-sdmm.dfo-mpo.gc.ca/meds/Prog_Int/WOCE/WOCE_UOT/ShipPerformanceReport_b.asp)

4. A map showing stations that reported on SOOP lines during the month. (see annex 2b for a sample)
5. A table identifying the platforms and SOOP lines sampled during that month (see annex 2c for a sample).

The report is sent by email to interested parties.

#### 4.6 Products

The GTSP was an important part of the WOCE Upper Ocean Thermal Data Assembly Centre. As such it contributed to the production of all versions of the WOCE Data Resource. The final version was issued in November of 2003 and the UOT portion contributed over 1 million profiles. It is possible to order a copy of the DVD set or to see all of the data on-line at [http://www.nodc.noaa.gov/woce\\_v3/](http://www.nodc.noaa.gov/woce_v3/)

The GTSP has updated its brochure that describes the program. Electronic versions are available from <http://www.nodc.noaa.gov/GTSP/document/gtspp/brochure/brochure.htm>

The functions of the GTSP are carried out by a number of centres as shown in figures 2 and 3. Web pages illustrating aspects of their contributions to the GTSP include the following.  
MEDS: [http://www.meds-sdmm.dfo-mpo.gc.ca/meds/Prog\\_Int/GTSP/GTSP\\_e.htm](http://www.meds-sdmm.dfo-mpo.gc.ca/meds/Prog_Int/GTSP/GTSP_e.htm)  
US NODC: <http://www.nodc.noaa.gov/GTSP/gtspp-home.html>

The Science centres contribute scientific expertise to improve data quality and provide advice on how the GTSP should evolve. They also use the data coming through GTSP in the creation of ocean analyses. The following URLs provide a starting point to examine more of their work.

USA – Scripps: [http://jedac.ucsd.edu/DATA\\_IMAGES/index.html](http://jedac.ucsd.edu/DATA_IMAGES/index.html)

USA – AOML: <http://www.aoml.noaa.gov/goos/>

Australia: <http://www.bom.gov.au/bmrc/ocean/JAFOOS/contents.html>

#### 4.7 Meeting JCOMM targets

Simple maps, such as shown in annex 2, show the locations of collected data. However, in order for the data to be useful in some applications, it is necessary to have a certain density of observations in space and time. JCOMM needs to measure how well its observation programmes are meeting sampling criteria for its clients.

In 1999 the Ocean Observations 99 meeting recommended that SOOP shift emphasis from broadcast to line-mode sampling. This report has already described the simple monitoring that is done by GTSP to provide a month to month visual presentation of the success of sampling along lines.

A more comprehensive analysis has been designed and implemented at the JCOMMOPS site. (See <http://www.brest.ird.fr/soopip/index.html> ).

In another development, the Ocean Observation Panel on Climate, OOPC, has set forth both time and space sampling criteria for different variables in order to meet the demands in monitoring climate. By itself, the GTSP does not assemble the necessary suite of observations to define the measurement success for all of the variables treated by OOPC. However, GTSP can deal in those areas that require profiles of temperature and salinity.

The OOPC requirements for measurements of upper ocean temperature and salinity require at least one observation every 30 days. For salinity, the spatial requirement is every 300 by 300 km

while for temperature it is 200 by 500 km. In the Argo programme, the optimal sampling target has been set to be a T and S profile every 10 days and every 300 by 300 km. The GTSP handles virtually all of the ocean profile measurements including those originating from the moored equatorial buoys. It is possible to examine the contributions from the different sources as well as derive a composite sampling density map for temperature and salinity. Before Argo began, the sampling was highly variable in both space and time. With the development of Argo, the sampling is becoming more uniform.

In figure 4 the number of BATHY and TESAC reports handled by the GTSP as a function of time is shown. The figure in annex 2a shows the spatial distribution of the data received in a recent month. It is desirable to take both this spatial and temporal sampling and convert it to a figure that shows how well the present sampling program meets certain targets. The most well defined target for the broad scale sampling of the ocean is that defined by OOPC and more recently by Argo. For demonstration purposes, an estimate has been made of the density of T and S profiles by applying a Gaussian weighting function to the array of locations of data normalized by the same weights applied to a regular array of the size 300 x 300 km. So density = observed weight/reference weight. Both a single 10 day period and a period of 1 year are used to show the contrasts. A more detailed explanation of how the maps are generated is provided in annex 3.

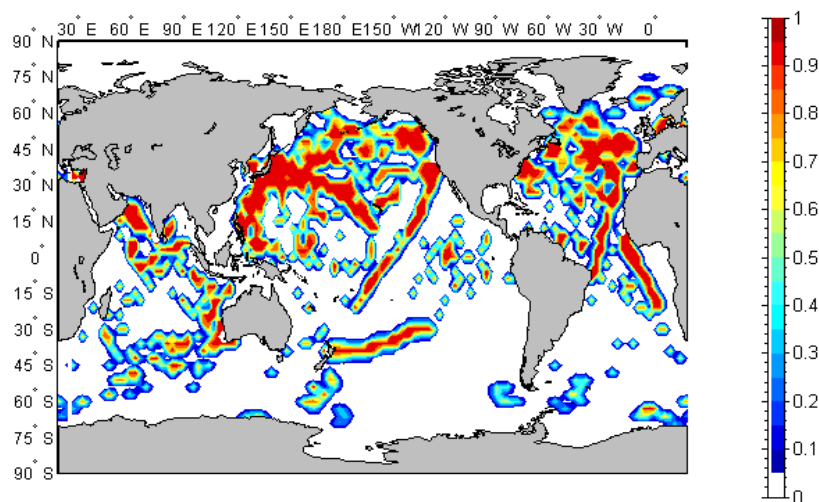


Figure 19: Density of temperature profiles sampled in a single 10 day period (May, 2003).

Figure 19 shows how well sampled the oceans are for just temperature profiles and in a single 10 day period in May, 2003. It is evident that along ship tracks the sampling goal is met. Also, in places where profiling floats are operating, and depending on their spacing, sampling is approaching the 100 percent desired. It is completely predictable, that for most of the ocean, the sampling goals are not being met. Because of variations in the number of data, there will be variations in these density maps from one 10 day period to the next. Within this limitation, a single map gives an approximate idea of how well the climate observing goals are being met at that time.

In figure 20 below, the same criterion for sampling have been applied but now applied to a full year of data. In order for a particular area to be well sampled, it must have a profile in every 10 day period and every array cell over the course of the entire year. The most obvious result is a poorer success rate for meeting the observation goals. There are a few areas, such as the north eastern Pacific, where profiling floats have been operating for a long enough period of time that they are actually meeting the sampling targets consistently over a full year. It is also true that along regularly sampled ship lines, such as off western Australia, the sampling is in the 60 to 80% range of the target. In other areas, such as off the coast of Chile, even though there are profiling floats now operating, they have not been doing so long enough to have a measurable impact over a year.

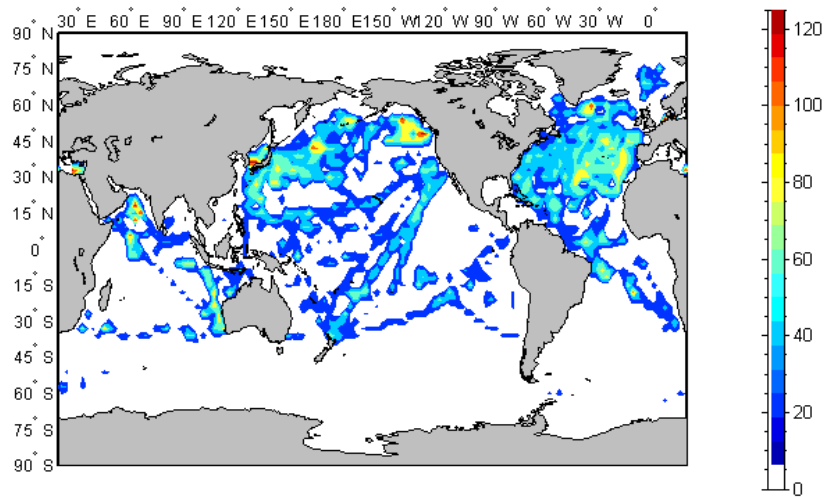


Figure 20: Density of temperature profiles sampled over the course of one year (May 2002 to April, 2003).

The same analysis has been carried out but this time requiring both temperature and salinity profiles to be present. Figures 21 and 22 are the result.

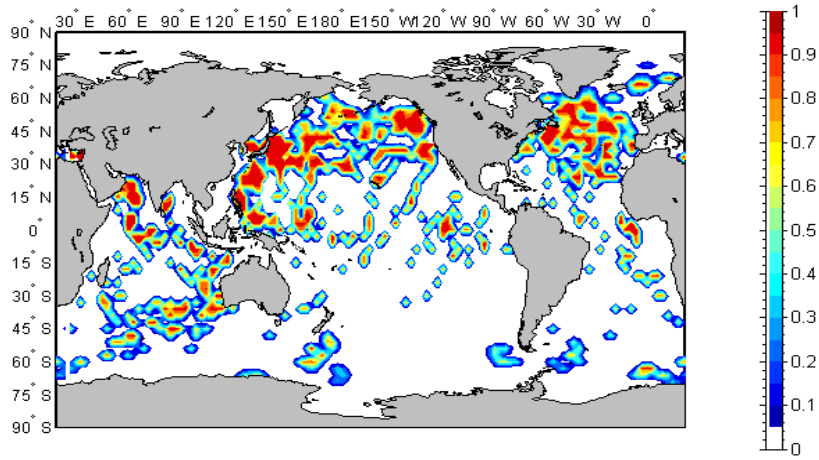


Figure 21: Density of temperature and salinity profiles sampled in a single 10 day period (May, 2003).

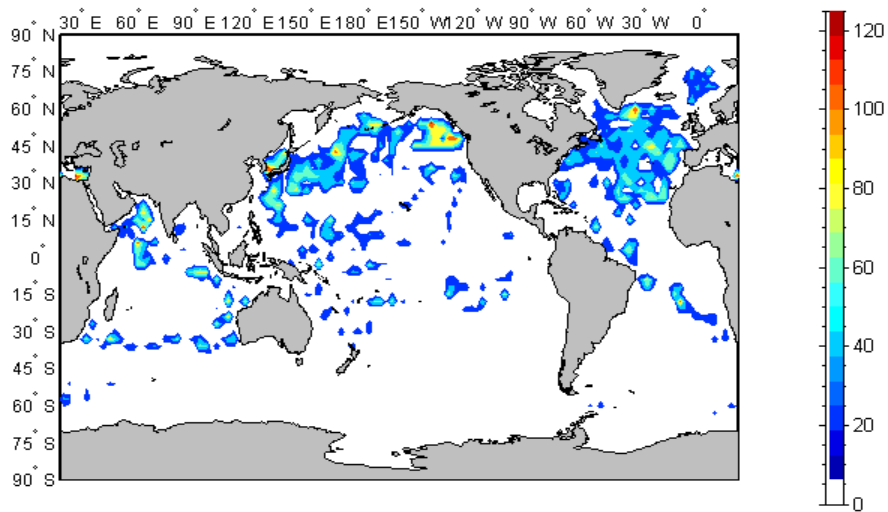


Figure 22: Density of temperature profiles sampled over the course of one year (May 2003 to April, 2003).

There are similar features as for temperature alone, except, of course, since there are fewer temperature and salinity measurements, the maps show even fewer areas where the sampling targets are being met. In this case, except for a few areas, the sampling is provided entirely from profiling floats.

Such figures are one way to show how well JCOMM programs are meeting the sampling requirements of clients. As long as clients can specify their needs in some quantifiable way, it should be possible to create a display that indicates how well the goal is being met. It is important for JCOMM to work with clients to quantify their requirements, and then to translate these into metrics against which the observational programs of JCOMM are measured.

## 5.0 Partnerships

### 5.1 Argo

Argo data are presently being handled by the GTSP system and so are entering the global archives in the same way as other data reported on the GTS and then in delayed mode. However, there is a closer association with Argo than this. The Argo data system relies on individual data assembly centers (DACs) to manage and contribute data both to the GTS and to the global data servers of Argo. Not all DACs begin operations with all capabilities in place. For some, the insertion of data to the GTS is handled by Service ARGOS while the contribution of the data to the global servers is delayed. GTSP contributes the real-time data (having passed through GTSP quality control procedures) to the global servers to provide at least a reduced form of the data at these servers until the originating DAC can start to send the data on their own. At the beginning of Argo, the GTS data contributed almost 30% to the data set at the GDACs. As of Nov, 2003 the contribution was closer to 3%.

The quality control procedures of the GTSP were the starting point of the automated procedures employed in the Argo program. Although the GTSP procedures had been developed for XBT data, with suitable modifications they are reasonably effective at catching errors in float data.

The main data centers operating in GTSP all have a significant role in Argo. The experience gained in organizing the GTSP has been used in the design and implementation of many parts of the Argo data system.

### 5.2 JCOMM and GOOS

GTSP started as a jointly sponsored program of WMO and IOC and so when JCOMM was formed it was adopted by the new commission. It reports through the Data Management Program Area but also contributes to the Ship Observation Team meetings. The experience in data management gained from GTSP operations has been invaluable. It is an operational program that put in place a large number of elements to ensure broad support. It continues to contribute this experience in the deliberations that JCOMM are undertaking to assemble a global observation system.

In the early days of GOOS, GTSP was recognized as an important program that was delivering on some components needed. It was for this reason that it was accepted as an Initial Observing System component.

GTSP provides the infrastructure support in data management that is required to move the data from collectors to users in the time frames and with the level of quality and consistency that is needed. It therefore supports both JCOMM and GOOS needs.

### 5.3 CLIVAR

GTSPSP acted as the data system in support of the WOCE Upper Ocean Thermal Data Assembly Centre. This was a natural extension to the support provided for SOOPIP. Because of this participation, GTSPSP is taking part in CLIVAR. Initial contributions will be quite similar to that provided during WOCE. As the requirements for CLIVAR become clearer and different needs are expressed, operations of GTSPSP will adjust.

## 6.0 Actions

### 6.1 Implementing a Unique Data Identifier

One of the most difficult problems faced by the GTSPSP has been in matching real-time and delayed mode data from the same original observation. The problems stem from reduced vertical and measurement resolution reported in real-time messages and from uncertainties in positions and times as demonstrated by the levels of position and time errors shown earlier. The delayed mode data may have these errors corrected and so matching real-time to delayed mode is not simply a matter of matching ship identifier, position and time. The GTSPSP developed software that considers detailed comparisons of individual station data when real-time and delayed mode positions are within 5 km distance and 15 minutes of time to each other. It assumes that errors in these quantities are not large. In a number of cases, the assumption is borne out, but not in every case. So, although a degree of success has been attained in matching real-time and delayed mode data, there is still room for improvement.

A new strategy was discussed at a GTSPSP meeting in 2002. It was inspired by the Ocean Information Technology Pilot Project being undertaken by JCOMM and IODE. The solution was suggested by colleagues in Australia and hinges upon the use of a cyclic redundancy check (CRC) calculation. Since then, the GTSPSP and the SEAS program in the US have been cooperating to install the necessary software to implement the solution.

The CRC will be incorporated into the US SEAS system. The CRC is a 32 bit value based on the ASCII generated BATHY message of those values following the 888 group and terminating at the equal (=) sign of the message. Development is concurrent with the development of the AOML automatic quality control software. Paul Chinn is responsible for development, test, and implementation and can be contacted at [Paul.Chinn@noaa.gov](mailto:Paul.Chinn@noaa.gov) or 301-713-2790 x 289.

When an XBT is taken, SEAS shipboard software will create a binary record of the entire data stream, metadata, and computed unique SEAS ID for archive aboard ship. This is referred to as the "complete message". The complete message is the delayed mode record sent to AOML and forwarded to NODC. SEAS shipboard software will also create a "best message" and SEAS ID for transmission to a land-based SEAS processing server.

The SEAS processing server will build two real-time messages from the best message. One is the usual BATHY record distributed on the GTS. The GTS record reaches MEDS and is incorporated into their GTSPSP operation. MEDS will compute a CRC from the BATHY message using the exact algorithm used by SEAS and attaches it to the record. The other real-time message, called a real-time "archive message", will be the same GTS record but with the SEAS ID and computed CRC of the GTS record attached. This archive record will be sent to NODC to become part of their GTSPSP data management operation.

NODC will receive two SEAS records from NOAA, the real-time archive message (SEAS ID + CRC ID) and the delayed mode complete message (SEAS ID). Comparison of the SEAS ID will complete the data flow from NOAA. NODC will also receive a GTSPSP record from MEDS which will have the same CRC computed. Comparing the GTS CRC ID of the archive message to MEDS GTSPSP record will complete the GTSPSP data flow.



## 7.0 Clients and Services

GTSPSP operates ftp and www sites. In addition, some clients require regular downloads of data and for these there is a subscription service.

### 7.1 Subscription and ftp Services

Some of GTSPSP's clients require data as soon as possible after the data have been distributed. Since MEDS operates the real-time component of data assembly and as described above, carry out quality control and duplicates resolution 3 times per week. As the updated files are sent to the CMD at the US NODC, a number of clients receive global or regional updates as well. These clients include The Australian Bureau of Meteorology, The US GODAE Server, the US NAVOCEAN, the French Coriolis Project, the NEAR-GOOS Project and WDC-D. MEDS either initiates an ftp service to place files on the client site, or places files on its own ftp site for download by the client.

A similar service is offered by the US NODC with the European Centre for Mid-range Weather Forecasting and the US National Centre of Environmental Prediction being the major clients.

Both MEDS and NODC offer data downloads on a request basis. It is normal for these to be supported on an anonymous ftp site.

### 7.2 WWW Services

NODC maintains the www site for GTSPSP and keeps access logs for the site. An analysis of web logs provides the following information about our users.

On average, more than 4300 GTSPSP pages were accessed each month in 2003. Of course, a number of these are by various "web-bots" harvesting information for web search engines such as Google. Beyond these, there were a number of references to the site from educational organizations both in the US and abroad. There were also referrals from international organizations such as the IOC and WMO.

It is difficult to know how much of the web traffic is composed of people clicking and moving on or those more genuinely interested in the page content. However, it is possible to track the size of downloads and the files of highest interest. So, over 2003 there were more than 9000 requests (about 8% of total page requests) that downloaded between 100 – 1000 kbytes (about 42% of total bytes downloaded). These download sizes represent users who are interested in the GTSPSP page contents and in the data offered through the web site. As a supplement to this, almost half of the bytes downloaded were delivered in csv (comma separated value) files and a further 25% in tarred files. Both of these file formats contain GTSPSP data.

Annex 1: An abridged version of MEDS Monthly Preliminary International Report

GTSPPE PRELIMINARY ANALYSIS OF INTERNATIONAL MONTHLY GTS DATA  
 (Data received at MEDS, US National Weather Service, BSH Germany  
 and JMA Japan)

GTSPPE Preliminary International GTS Data Flow Report, MAR 2003

STATISTICAL OVERVIEW REPORT

There were 1842 unique BATHYs and 3318 TESACs in the input file

STREAM_IDENT	GETE:	2395	TESACs	( 72.2%)
STREAM_IDENT	GEBA:	1642	BATHYs	( 89.1%)
STREAM_IDENT	MEBA:	1611	BATHYs	( 87.5%)
STREAM_IDENT	JABA:	1598	BATHYs	( 86.8%)
STREAM_IDENT	NWBA:	1730	BATHYs	( 93.9%)
STREAM_IDENT	METE:	2735	TESACs	( 82.4%)
STREAM_IDENT	NWTE:	2652	TESACs	( 79.9%)
STREAM_IDENT	JATE:	2121	TESACs	( 63.9%)

Receipt matrix by STREAM\_IDENT for BATHY and TESAC messages

	Unique	GETE	GEBA	MEBA	JABA	NWBA	METE	NWTE	JATE
GETE	44	2395	0	0	0	0	1935	2075	1660
GEBA	17	0	1642	1579	1563	1547	0	0	0
MEBA	11	0	1579	1611	1537	1517	0	0	0
JABA	1	0	1563	1537	1598	1557	0	0	0
NWBA	153	0	1547	1517	1557	1730	0	0	0
METE	333	1935	0	0	0	0	2735	2113	1634
NWTE	40	2075	0	0	0	0	2113	2652	2048
JATE	0	1660	0	0	0	0	1634	2048	2121

Difference matrix by STREAM\_IDENT for BATHY and TESAC messages

	Totals	GETE	GEBA	MEBA	JABA	NWBA	METE	NWTE	JATE
GETE	2395	0	0	0	0	0	460	320	735
GEBA	1642	0	0	63	79	95	0	0	0
MEBA	1611	0	32	0	74	94	0	0	0
JABA	1598	0	35	61	0	41	0	0	0
NWBA	1730	0	183	213	173	0	0	0	0
METE	2735	800	0	0	0	0	0	622	1101
NWTE	2652	577	0	0	0	0	539	0	604
JATE	2121	461	0	0	0	0	487	73	0

GTSPPE Preliminary International GTS Data Flow Report, MAR 2003

GTS Header	No. BATHYs	No. TESACs
SOVD01 KWBC	0	2
SOVD01 RJTD	0	3
SOVD02 CWOW	0	194
SOVD83 KWBC	0	705
SOVE01 AMMC	7	0
Etc.....		

CENTRES SUMMARY REPORT

For organization: GE

          Headers Received  
SOVD02 CWOW          185 / 194  
SOVE01 AMMC          7 / 7  
etc.....

          Headers Not Received  
SOVD01 KWBC          0 /  
SOVD01 RJTD          0 /  
etc.....

etc. for MEDS, US, Japan.

SHIP SUMMARY REPORT

Call Sign	BATHYs	TESACs	Headers
10004	108	0	SOVF01 EDZW
19019	0	4	SOVX10 KARS
3EZI6	197	0	SOVX01 KWBC
3FRY5	25	3	SOVX02 RJTD SOVX01 RJTD
3FRY9	19	0	SOVX01 KWBC

etc. for all other platforms

TIMELINESS REPORT


GTSPP Preliminary International GTS Data Flow Report, MAR 2003

Days Percent	Number	Percent of Total	Cumulative Number	Cumulative Percent
1	2498	54.1	2498	54.1
2	1039	22.5	3537	76.6
3	235	5.1	3772	81.7
4	164	3.6	3936	85.2
5	161	3.5	4097	88.7
6	110	2.4	4207	91.1
7	105	2.3	4312	93.4
8	90	1.9	4402	95.3
9	84	1.8	4486	97.1
10	30	0.6	4516	97.8
11	10	0.2	4526	98.0
12	17	0.4	4543	98.4
13	30	0.6	4573	99.0
14	8	0.2	4581	99.2
15	1	0.0	4582	99.2
16	3	0.1	4585	99.3
17	0	0.0	4585	99.3
18	3	0.1	4588	99.4
19	1	0.0	4589	99.4
20	5	0.1	4594	99.5
21	4	0.1	4598	99.6
22	6	0.1	4604	99.7
23	5	0.1	4609	99.8


24	4	0.1	4613	99.9
25	0	0.0	4613	99.9
26	3	0.1	4616	100.0
27	0	0.0	4616	100.0
28	0	0.0	4616	100.0
29	1	0.0	4617	100.0
30	1	0.0	4618	100.0

Annex 2a: A map showing locations of all BATHYs and TESACs collected in March, 2003.

BATHYs and TESACs (Mar, 2003) ( 15481 )

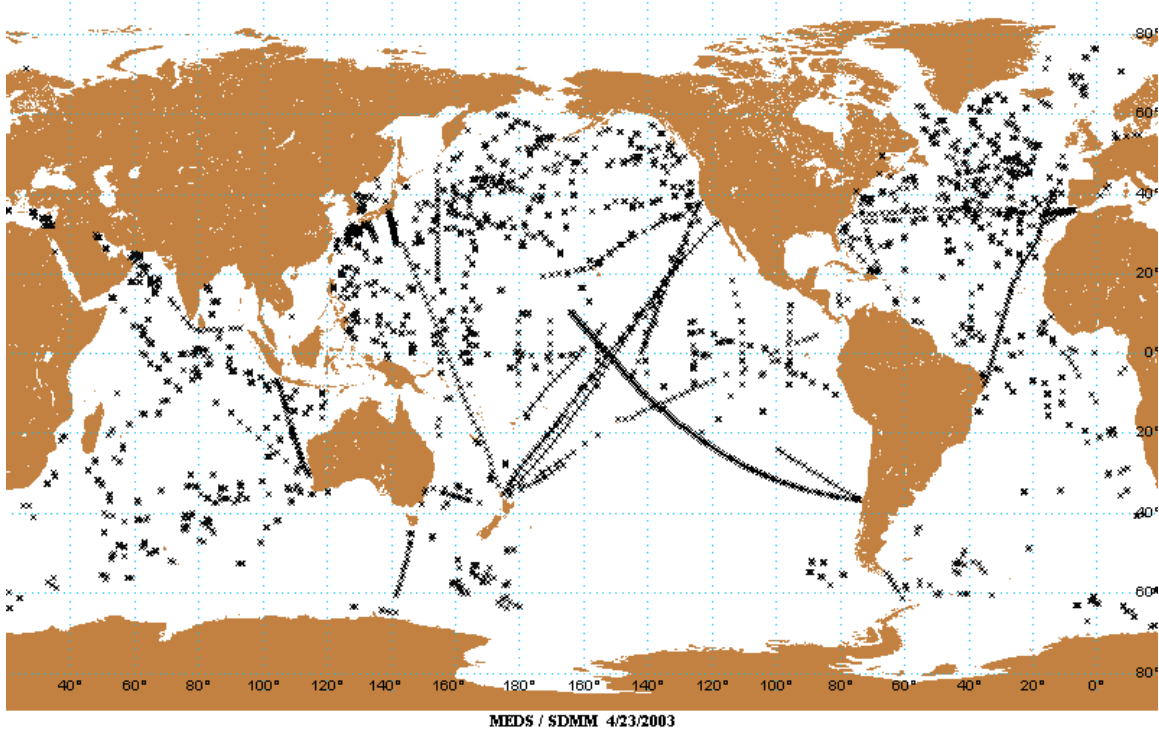

Annex 2b: A sample map showing BATHYs and TESACs that collected data along SOOP lines in March, 2003.

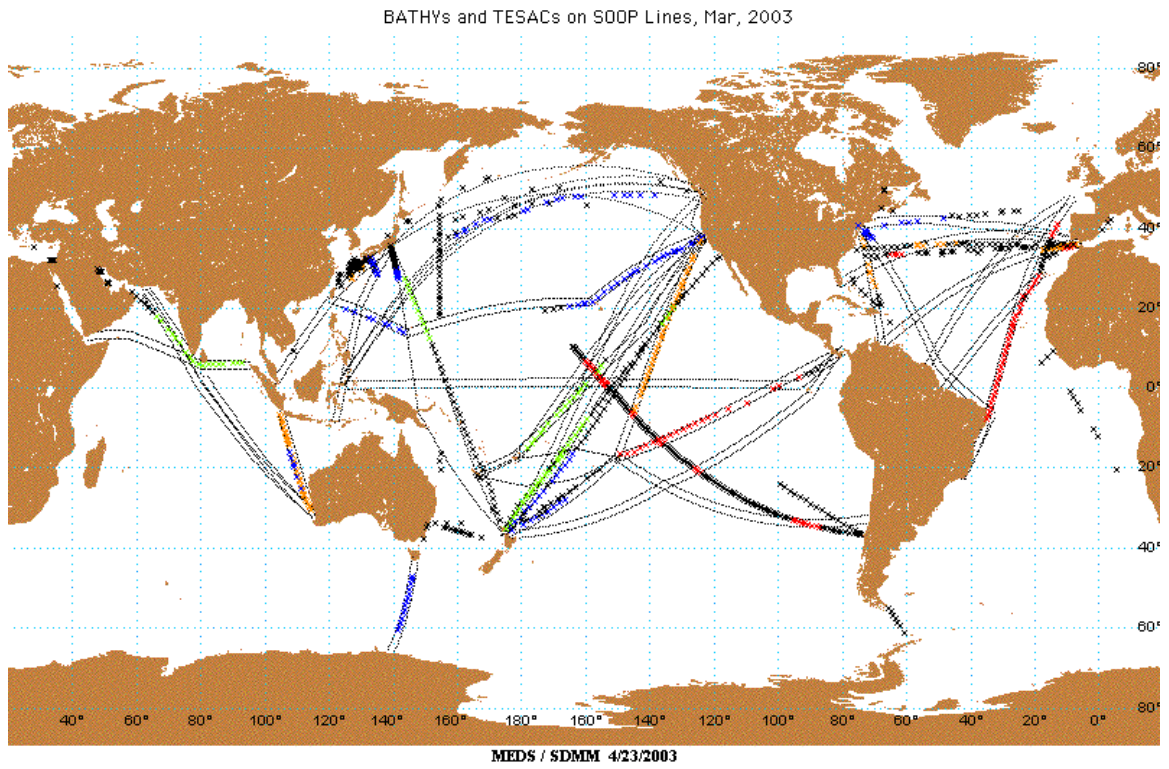

Annex 2c: A sample table indicating which ships collected data along SOOP lines in March, 2003. This table accompanies the map shown in annex 2b.

Cruise #	Total # of Stations	Stations on SOOP Line(s)	Colour	SOOP Line(s)
3EZI6 03,	185 ,	43 ,	RED,	PX99 , PX07, PX31, PX24, PX18, PX17
3FRY5 03,	24 ,	18 ,	GREEN,	IX10 , IX09
3FRY9 03,	19 ,	19 ,	ORANGE,	AX09
9VRA 03,	52 ,	23 ,	BLUE,	PX12 , PX13, PX28
DACF 03,	51 ,	40 ,	RED,	AX11 , AX20
DDGY 03,	37 ,	26 ,	GREEN,	PX12 , PX07, PX31
ELES7 03,	32 ,	32 ,	ORANGE,	IX01
ELVX4 03,	15 ,	5 ,	BLUE,	AX04
ELVZ6 03,	43 ,	21 ,	RED,	PX17
ELZT3 03,	53 ,	25 ,	GREEN,	PX18 , PX13, PX07
FHZI 03,	14 ,	14 ,	BLUE,	IX28
FNCM 03,	11 ,	4 ,	RED,	AX09
H9TO 03,	37 ,	10 ,	GREEN,	PX05
JGKL 03,	123 ,	14 ,	ORANGE,	PX49
JHLO 03,	24 ,	10 ,	BLUE,	PX05
JPBN 03,	19 ,	14 ,	BLUE,	PX11 , PX49
KIRF 03,	20 ,	10 ,	ORANGE,	AX10
KRGB 03,	61 ,	53 ,	BLUE,	PX44 , PX85, PX01, PX26, PX37
PJJU 03,	10 ,	10 ,	BLUE,	AX29
V2FA2 03,	38 ,	38 ,	ORANGE,	PX18
VKLD 03,	6 ,	6 ,	BLUE,	IX01
WAUW 03,	29 ,	4 ,	RED,	AX07
WMLG 03,	35 ,	6 ,	ORANGE,	AX07

### Annex 3: Creation of the weighted density array

The data for a single 10 day period starts with a count of the number of profiles in every 1 degree square in MEDS archives. For temperature only, we used data coming from both BATHY and TESAC code forms, while for temperature and salinity together, we only used the TESAC code form. These raw values are summed over each 3 x 3 degree square.

In each water area, the radial distance between two points is given by

$$\text{Radial distance} = [111.2\sqrt{(\Delta\varphi)^2 + (\Delta\lambda)^2 \cos^2 \lambda}] \text{ km}$$

where

The distance between two parallels = 111.2 km

The distance between any two meridians =  $[111.2 \cos \lambda]$  km

$\lambda$  is the average latitude between the two points

$\Delta\lambda$  is the absolute difference in latitude degrees

$\Delta\varphi$  is the absolute difference in longitude degrees

For every 3 x 3 degree square, these are weighted and summed for each element  $j$ , by adding the value of all other elements multiplied by a weight that decrease exponentially with the square of the distance

$$w_j = \sum_i C_{ij} e^{-x_{ij}/d^2}$$

where

$d$  is the scale (set to 200 km)

$x_{ij} = [111.2\sqrt{(\Delta\lambda)^2 + (\Delta\varphi)^2 \cos^2 \lambda}]$  km

$\Delta\lambda = \lambda_i - \lambda_j$

$\Delta\varphi = \varphi_i - \varphi_j$

This results in the actual weighted sampling array

We then do the same, assuming an ideal sampling of data; that is all 3 x 3 degrees are sampled according to the goals. The array thus obtained is the ideal weighted array. Its values range from 0 to 21, highest values are found at the highest northern latitude (87°N) for geometrical reasons and since Antarctica occupies the highest southern latitudes.

We then divide every element of the actual array by its corresponding element of the ideal weighted array. We use a coastline map to mask the land values.