

OBSTRUCTION DATA SHEET

**ODS 5065
GENERAL WILLIAM J. FOX AIRFIELD
LANCASTER, CALIFORNIA**

DIGITIZED FROM

**OC 5065
SURVEYED MARCH 1992
8TH EDITION**

**HORIZONTAL DATUM NAD83
VERTICAL DATUM NGVD29**



PREPARED AND DISTRIBUTED BY
THE NATIONAL OCEAN SERVICE
U.S. DEPARTMENT OF COMMERCE
FOR THE FEDERAL AVIATION ADMINISTRATION

ATTENTION

See SPECIAL NOTICES in "Dates of Latest Editions, Airport Obstruction Charts - Obstruction Data Sheets," for possible corrections. National Oceanic and Atmospheric Administration (NOAA) publications are available through NOAA Distribution Branch (N/CG33), National Ocean Service, Riverdale, MD 20737. Telephone: 301-436-6990.

OBSTRUCTION DATA SHEET

The Obstruction Data Sheet (ODS) provides digital obstruction and runway data for use in aircraft arrival and departure planning. This information has been obtained using field survey and photogrammetric methods by the Photogrammetry Branch of the National Ocean Service in accordance with Federal Aviation Regulations Part 77 (FAR-77), "Objects Affecting Navigable Airspace" and FAA No. 405, "Specifications - Airport Obstruction Chart and Related Products."

The ODS is a derivative of the Airport Obstruction Chart (OC). The source OC is indicated on the ODS cover. All objects, both obstructing and nonobstructing, that carry an elevation on the OC are listed in the ODS. The ODS and the OC depict a representation of objects that existed at the time of the OC field survey.


ODS information is arranged as follows:

1. Objects located in an FAR-77 approach or primary and listed with the associated runway (reference runway).
2. All objects not included in "1" above are listed with the Airport Reference Point (ARP).
3. Runway configuration and runway lengths, widths, and elevations are presented on the ODS last page.

The FAR-77 imaginary approach surfaces for which the obstruction surveys were performed are coded in the ODS as follows:


A(V) Utility runway - visual approach only
A(NP) Utility runway - nonprecision instrument approach
B(V) Nonutility runway - visual approach only
C Nonutility runway - nonprecision instrument
approach with visibility minimums greater than
3/4 mile
D Nonutility runway- nonprecision instrument approach
with visibility minimums as low as 3/4 mile
PIR Precision instrument runway
SUPLC Supplemental C underlying a B(V)

FAR-77 imaginary surface dimensions are defined on page 2 of this report.

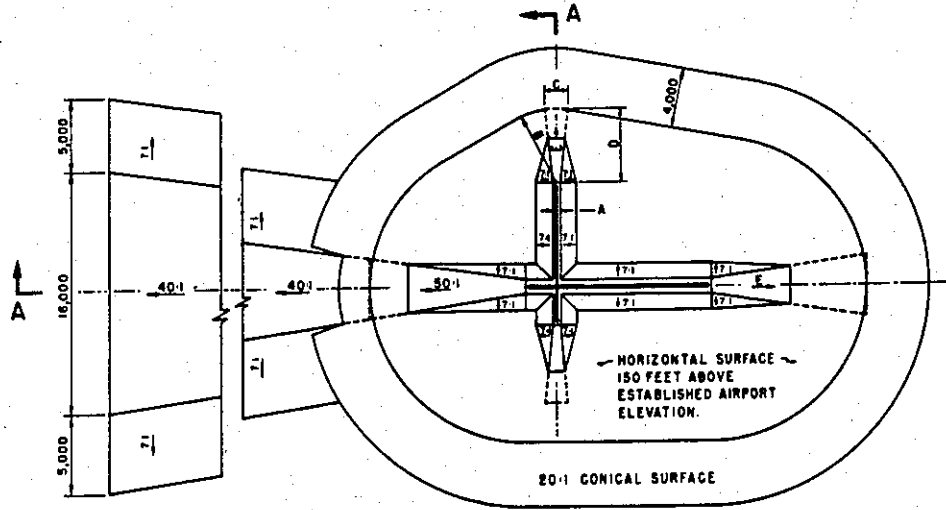

DIM	ITEM	DIMENSIONAL STANDARDS (FEET)					
		VISUAL RUNWAY		NON-PRECISION INSTRUMENT RUNWAY			PRECISION INSTRUMENT RUNWAY
		A	B	A	B		
A	WIDTH OF PRIMARY SURFACE AND APPROACH SURFACE WIDTH AT INNER END	250	500	500	500	1,000	1,000
B	RADIUS OF HORIZONTAL SURFACE	5,000	5,000	5,000	10,000	10,000	10,000
C	APPROACH SURFACE WIDTH AT END	VISUAL APPROACH		NON-PRECISION INSTRUMENT APPROACH			PRECISION INSTRUMENT APPROACH
		A	B	A	B		
D	APPROACH SURFACE LENGTH	1,250	1,500	2,000	3,500	4,000	16,000
E	APPROACH SURFACE SLOPE	50:1	50:1	50:1	34:1	34:1	°

- A- UTILITY RUNWAYS
- B- RUNWAYS LARGER THAN UTILITY
- C- VISIBILITY MINIMUMS GREATER THAN 3/4 MILE
- D- VISIBILITY MINIMUMS AS LOW AS 3/4 MILE
- ° PRECISION INSTRUMENT APPROACH SLOPE IS 50:1 FOR INNER 10,000 FEET AND 40:1 FOR AN ADDITIONAL 40,000 FEET

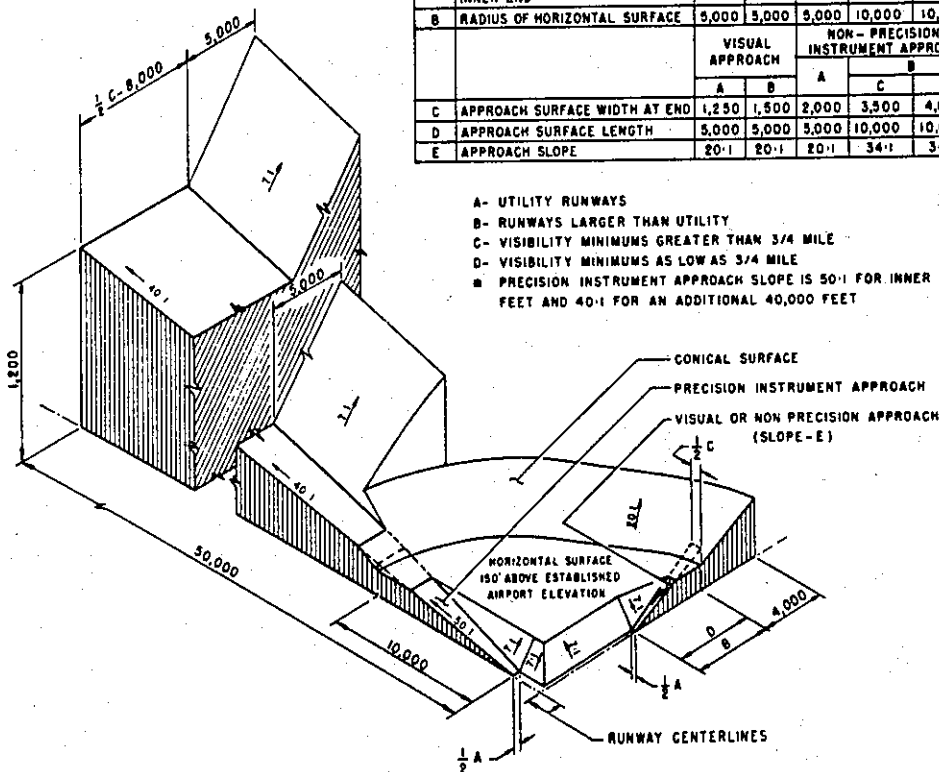

ISOMETRIC VIEW OF SECTION A-A

FAR-77 CIVIL AIRPORT
IMAGINARY SURFACES



ANNOTATION OF ODS DATA FORMAT

OC XXXX

AIRPORT ELEVATION XXXX

x¹ x² XXXX/XXXX³ XXXXXX.XXX⁴ XXXXXXXX.XXX⁴ XXXXXXXX⁵ XXXX/XXXX⁶ XXXXXX.XXX⁷ XXXXXXXX.XXX⁷

OBJECT	LAT	LONG	A ⁸	ELEV ⁹	AGL ¹⁰	HAR ¹¹	HAT ¹¹	HAA ¹¹	DEND ¹²	DTHR ¹²	DCLN ¹²	PNTR ¹³
XXXXXXXXXXXX	XXXXXX.XXX	XXXXXXXX.XXX	XX	XXXX	XXXX	XXX	XXX	XXX	XXXXX	XXXXX	XXXX	XXXX
XXXXXXXXXXXX	XXXXXX.XXX	XXXXXXXX.XXX	XX	XXXX	XXXX	XXX	XXX	XXX	XXXXX	XXXXX	XXXX	XXXX

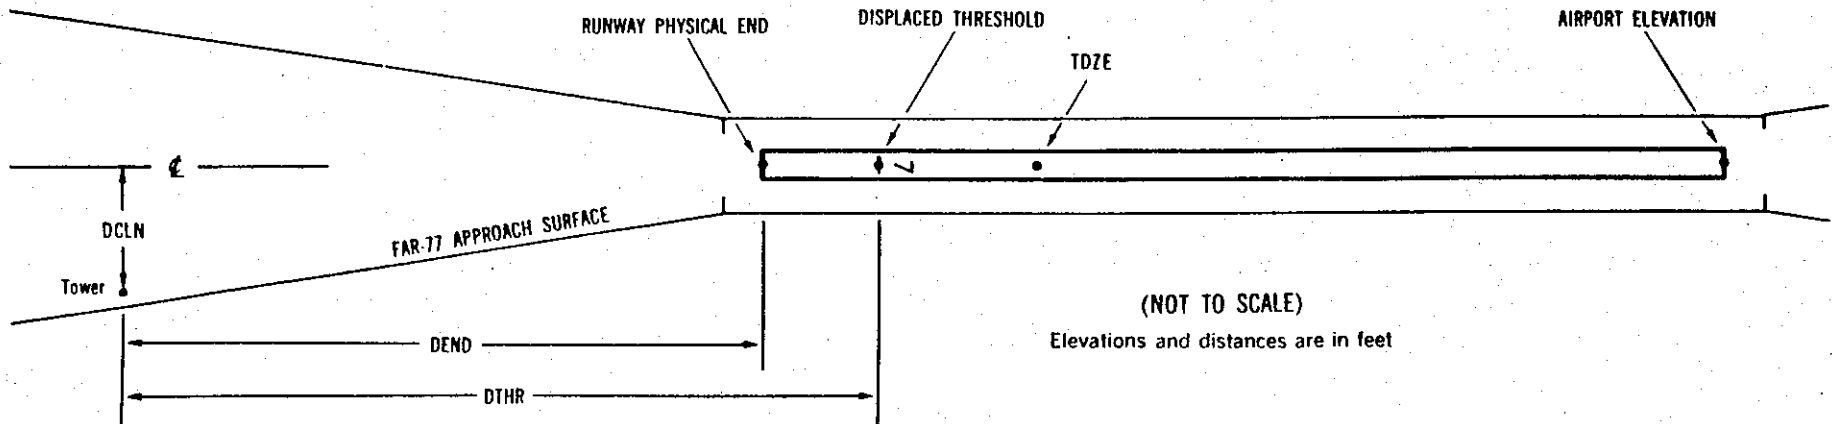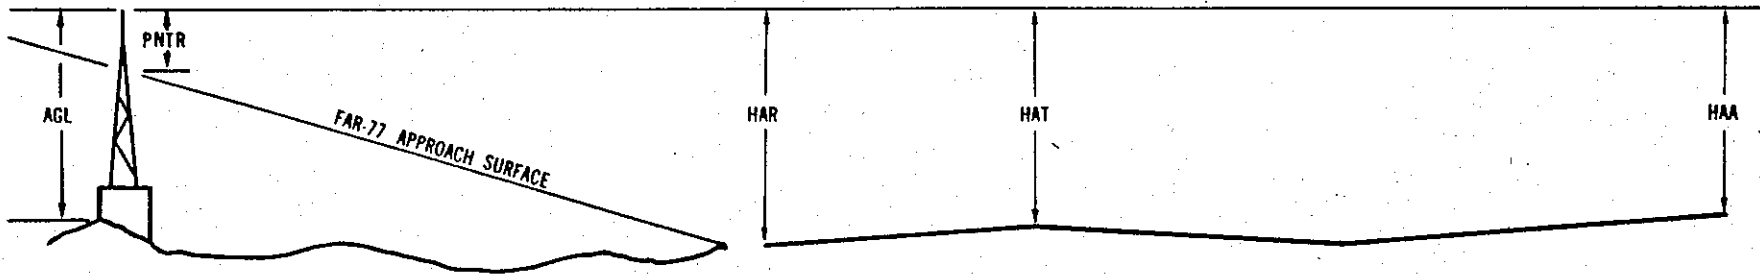

EXPLANATION OF FOOTNOTES

- 1 Data block identifier. If a runway number is entered (reference runway), this data block will contain data pertinent to the reference runway and to objects in the FAR-77 approach and primary areas of the reference runway. If ARP is entered, this data block will contain the ARP position and data relative to all objects not in an FAR-77 approach or primary area.
- 2 For the reference runway, the lowest FAR-77 approach surface for which an obstruction survey was performed. (More than one surface may be surveyed).
- 3 Elevation at approach end of reference runway/touchdown zone elevation
- 4 Latitude and longitude at approach end of reference runway
- 5 Geodetic azimuth of reference runway reckoned from north
- 6 Elevation at reference runway displaced threshold/touchdown zone elevation
- 7 Latitude and longitude at reference runway displaced threshold
- 8 Accuracy codes: Horizontal Vertical
 1 = 20 A = 2
 2 = 40 B = 5
 C = 20
- 9 Elevation above mean sea level (MSL) at top of object. This value includes 15 feet added to noninterstate roads, 17 feet added to interstate roads, and 23 feet added to railroad tracks.
- 10 Height above ground level (AGL). AGL's are provided only for manmade objects appearing on the OC and equal to or greater than 200 feet AGL. AGL accuracy is 10 feet.
- 11 HAA - Height above airport
 HAR - Height above approach end of reference runway
 HAT - Height above reference runway touchdown zone elevation
- 12 DEND - Distance along reference runway centerline from point nearest to object (perpendicular) to approach end of runway
 DTHR - Distance along reference runway centerline from point nearest to object (perpendicular) to displaced threshold
 DCLN - Distance left (L) or right (R) of reference runway centerline as observed facing forward in a landing aircraft
- A negative value for DEND or DTHR indicates that object is in primary on roll-out side of zero distance point.
- 13 PTNR - Penetration of indicated FAR-77 approach or primary surface (See footnote 2).

OC5065

AIRPORT ELEVATION 2347

6 SUPLC 2347/2347 344419.841 -1181336.717 2520357.

OBJECT	LAT	LONG	A	ELEV	AGL	HAR	HAT	HAA	DEND	DTHR	DCLN	PNTR
BUSH	344413.06	-1181400.05	1A	2353		6	6	6	2064		53R	-49

24 SUPLC 2336/2343 344435.066 -1181239.714 720429.



OBJECT	LAT	LONG	A	ELEV	AGL	HAR	HAT	HAA	DEND	DTHR	DCLN	PNTR
BUSH	344442.27	-1181223.30	1A	2337		1	-6	-10	1528		272R	-38

OC5065

AIRPORT ELEVATION 2347

ARP 344427.454 -1181308.216

OBJECT	LAT	LONG	A	ELEV	AGL	HAA	MAG BEARING	DISTANCE
ROD ON OL APBN	344419.03	-1181302.39	1A	2400		53	13611	980
ROD ON OL AMOM	344425.03	-1181256.52	1A	2375		28	8959	1006
OL ON LTD WINDSOCK	344425.92	-1181254.86	1A	2365		18	8350	1125
ANT ON OL AMOM	344419.84	-1181257.46	1A	2371		24	11630	1182
LIGHT STANDARD	344424.39	-1181254.16	1A	2373		26	9040	1213
ANT ON OL ATCT	344421.10	-1181254.17	1A	2421		74	10436	1337
ANT ON OL TWR	344425.76	-1181234.68	1A	2403		56	7924	2803

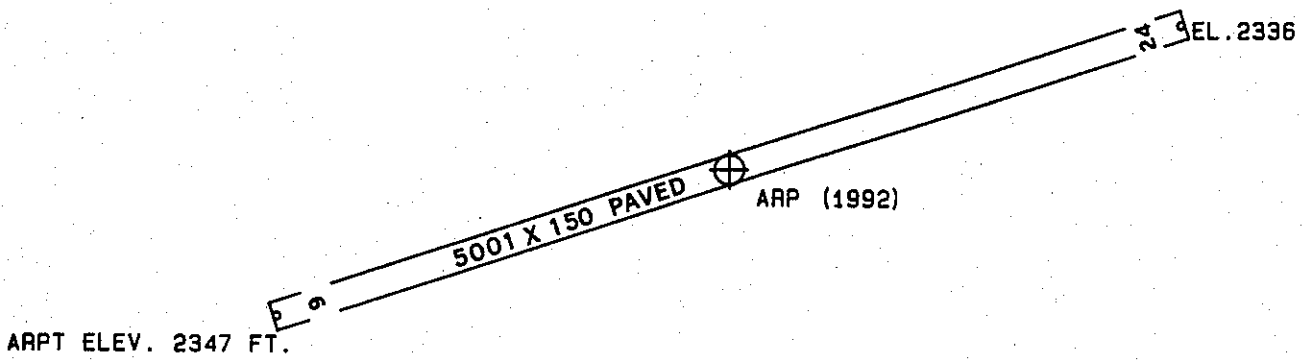

TOUCHDOWN ZONE RUNWAY ELEVATION	
6	2347
24	2343

GENERAL WILLIAM J. FOX AIRFIELD
LANCASTER, CALIFORNIA
(NOT TO SCALE)