OBSTRUCTION DATA SHEET

ODS 591
LA GRANDE / UNION COUNTY AIRPORT
LA GRANDE, OREGON

DIGITIZED FROM

OC 591 SURVEYED 29 AUGUST 1992 2ND EDITION

HORIZONTAL DATUM NAD83 VERTICAL DATUM NGVD29



PREPARED AND DISTRIBUTED BY
THE NATIONAL OCEAN SERVICE
U.S. DEPARTMENT OF COMMERCE
FOR THE FEDERAL AVIATION ADMINISTRATION

ATTENTION

See SPECIAL NOTICES in "Dates of Latest Editions, Airport Obstruction Charts - Obstruction Data Sheets," for possible corrections. National Oceanic and Atmospheric Administration (NOAA) publications are available through NOAA Distribution Branch (N/CG33), National Ocean Service, Riverdale, MD 20737. Telephone: 301-436-6990

OBSTRUCTION DATA SHEET

The Obstruction Data Sheet (ODS) provides digital obstruction and runway data for use in aircraft arrival and departure planning. This information has been obtained using field survey and photogrammetric methods by the Photogrammetry Branch of the National Ocean Service in accordance with Federal Aviation Regulations Part 77 (FAR-77), "Objects Affecting Navigable Airspace" and FAA No. 405, "Specifications - Airport Obstruction Chart and Related Products."

The ODS is a derivative of the Airport Obstruction Chart (OC). The source OC is indicated on the ODS cover. All objects, both obstructing and nonobstructing, that carry an elevation on the OC are listed in the ODS. The ODS and the OC depict a representation of objects that existed at the time of the OC field survey.

ODS information is arranged as follows:

- 1. Objects located in an FAR-77 approach or primary and listed with the associated runway (reference runway).
- 2. All objects not included in "1" above are listed with the Airport Reference Point (ARP).
- 3. Runway configuration and runway lengths, widths, and elevations are presented on the ODS last page.

The FAR-77 imaginary approach surfaces for which the obstruction surveys were performed are coded in the ODS as follows:

A(V) Utility runway - visual approach only

A(NP) Utility runway - nonprecision instrument approach

B(V) Nonutility runway - visual approach only


C Nonutility runway - nonprecision instrument approach with visibility minimums greater than 3/4 mile


D Nonutility runway- nonprecision instrument approach with visibility minimums as low as 3/4 mile

PIR Precision instrument runway

SUPLC Supplemental C underlying a B(V)

FAR-77 imaginary surface dimensions are defined on page 2 of this report.

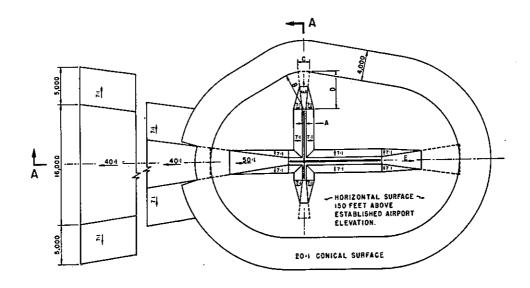


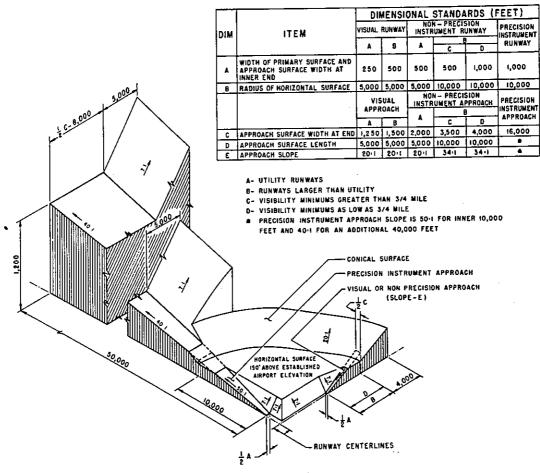

ISOMETRIC VIEW OF SECTION A-A

FAR-77 CIVIL AIRPORT IMAGINARY SURFACES

ANNOTATION OF ODS DATA FORMAT

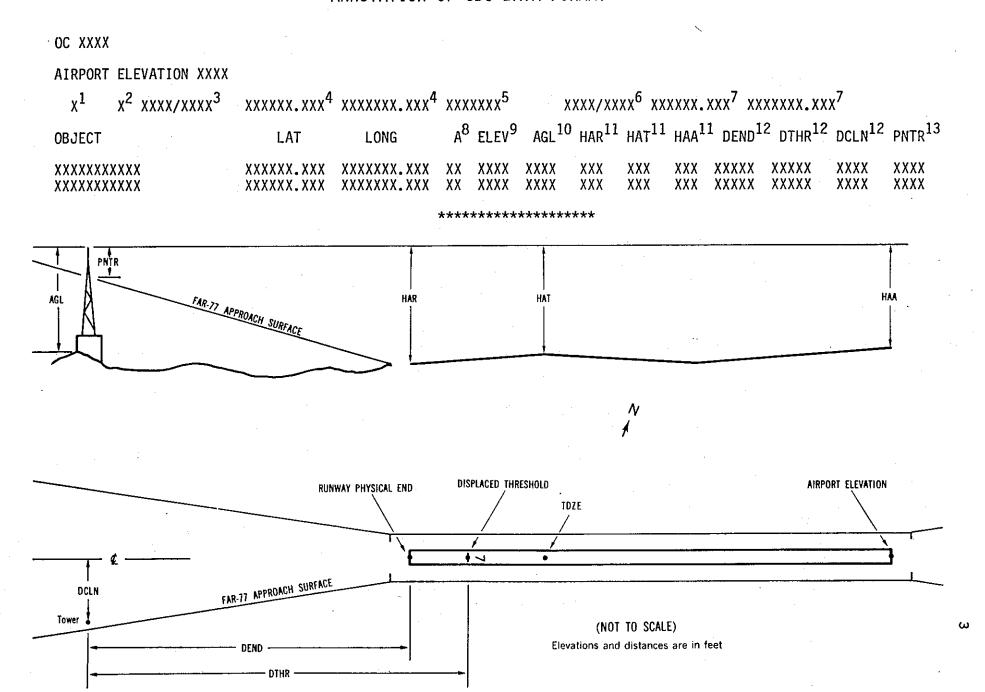

EXPLANATION OF FOOTNOTES

- Data block identifier. If a runway number is entered (reference runway), this data block will contain data pertinent to the reference runway and to objects in the FAR-77 approach and primary areas of the reference runway. If ARP is entered, this data block will contain the ARP position and data relative to all objects not in an FAR-77 approach or primary area.
- For the reference runway, the lowest FAR-77 approach surface for which an obstruction survey was performed. (More than one surface may be surveyed).
- 3 Elevation at approach end of reference runway/touchdown zone elevation
- 4 Latitude and longitude at approach end of reference runway
- 5 Geodetic azimuth of reference runway reckoned from north
- 6 Elevation at reference runway displaced threshold/touchdown zone elevation
- 7 Latitude and longitude at reference runway displace threshold

8	Accuracy co	odes:	Horizontal 1 = 20	. –	 ical 2
			2 = 40	-	5 20

- 9 Elevation above mean sea level (MSL) at top of object. This value includes 15 feet added to noninterstate roads, 17 feet added to interstate roads, and 23 feet added to railroad tracks.
- Height above ground level (AGL). AGL's are provided only for manmade objects appearing on the OC and equal to or greater than 200 feet AGL. AGL accuracy is 10 feet.
- 11 HAA Height above airport HAR - Height above approach end of reference runway HAT - Height above reference runway touchdown zone elevation
- 12 DEND Distance along reference runway centerline from point nearest to object (perpendicular) to approach end of runway
 - DTHR Distance along reference runway centerline from point nearest to object (perpendicular) to displace threshold
 - DCLN Distance left (L) or right (R) of reference runway centerline as observed facing forward in a landing aircraft

A negative value for DEND or DTHR indicates that object is in primary on roll-out side of zero distance point.

PTNR - Penetration of indicated FAR-77 approach or primary surface (See footnote 2).


AIRPORT ELEVATION 2714


12 C	2714/2714	451743.959	-1180043.07	L 1	350053	3.							
OBJECT		LAT	LONG	A	EL	AGL	HAR	HAT	HAA	DEND	DTHR	DCLN	PNTR
ROAD(N)	•	451747.73	-1180043.42	1A	2724		10	10	10	288		253L	8
										•			
	•												
30 C	2703/2707	451704.854	-1175947.710) 3	150133	•						•	
OBJECT		LAT	LONG	A	EL	AGL	HAR	HAT	HAA	DEND	DTHR	DCLN	PNTR
ROAD(N)	·	451656.29	-1175942.31	1A	2717		14	10	3	887		340L	-6
		•											
16 AV	2712/	451744.437	-1180040.316	5 1	795940	27	11/27	11 4	51739	.638 -	1180040.	315	
OBJECT		LAT	LONG	A	EL	AGL	HAR	HAT	HAA	DEND	DTHR	DCLN	PNTR
ROAD(N)		451747.75	-1180040.50	1A	2723		11	12	9	335	821	13R	4
		•											:
34 AV	2706/2710	451706.069	-1180040.310) 3	595940								
OBJECT		LAT	LONG	A	EL	AGL	HAR	HAT	HAA	DEND	DTHR	DCLN	PNTR
ROAD(N)			-1180040.32		2721	٠.	15	11	. 7	1055		1L	-27
POLE		451645.32	-1180044.57	1A	2750		44	40	36	2101		305L	-51

OC0591

AIRPORT ELEVATION 2714

ARP	451724.754	-1180025.599						
OBJECT	LAT	LONG	Α	EL	AGL	HAA	MAG BEARING	DISTANCE
ANTENNA ON OL BUILDING AIRPORT BEACON TRANSMISSION TOWER TRANSMISSION TOWER GROUND	451719.17 451657.67 451637.99 451644.54 451732.49	-1180050.15 -1180050.11 -1180335.12 -1180339.01 -1180359.44	1A 1A 1A 1A 2C	2768 2761 3601 3627 3205		54 47 887 913 491	23432 19458 23309 23600 25521	1844 3255 14353 14414 15306



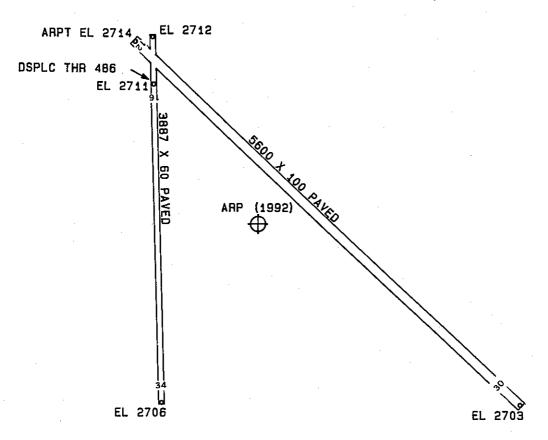

TOUCHDOWN ZONE RUNWAY ELEVATION

12 2714 30 2707 16 2711 34 2710

LA GRANDE/UNION COUNTY AIRPORT

LA GRANDE, OREGON

(NOT TO SCALE)

(ALL ELEVATIONS IN FEET)