

Role of Groundwater Flow in Tile Drain Discharge

Peter J. Vaughan,* Donald L. Suarez, Jirka Simunek, Dennis L. Corwin, and James D. Rhoades

ABSTRACT

Tile systems drain water applied to agricultural fields as irrigation and precipitation but also may intercept regional groundwater flow. Identification and characterization of the potential sources of tile water is essential for informed management of salinity and contaminants. Factors influencing tile discharge including depth of water applied, evapotranspiration, water storage, drain blockage, and interception of regional groundwater flow were evaluated to determine which may be related to a fivefold variation in cumulative tile discharge among six sumps located 100 km west of Fresno, CA. Cumulative depths drained were calculated for 5 yr of weekly irrigation, precipitation, and discharge data. Evapotranspiration and water storage were estimated using the UnsathchemGeo variably-saturated water flow model. Well water levels measured on 19 dates were spatially-averaged providing spatial variation of depth-to-water among the drained areas. Variability in depth of water drained (0.18–0.95 m) was large and was not correlated with either water applied (3.26–4.58 m, $r^2 = 0.03$) or with computed water flux from the bottom of the soil column (0.05–0.31 m, $r^2 = 0.00$). Groundwater interception by tile drains was a factor because depth-to-water was negatively correlated with discharge ($r^2 = 0.42$) and drawdown of groundwater levels by drains was relatively larger for those drained areas encountered first during regional groundwater flow. For all six sumps, drained water is likely derived from locally applied water and interception of regional groundwater flow implying that standard two-dimensional models of flow to drains, representing only water applied locally, would not be applicable to modeling of drain flows or drain-water solute concentrations.

U.S. Salinity Laboratory, 450 W. Big Springs Road, Riverside, CA 92507. Received 18 Nov. 1997. *Corresponding author (pvaughan@ussl.ars.usda.gov).

Published in J. Environ. Qual. 28:403–410 (1999).

TILE DRAINAGE in agricultural areas provides a method of regulating the depth of shallow water tables. The water drained from tile systems is frequently not reusable as irrigation water because of high salinity and contamination. Two contaminants often present in the San Joaquin Valley of California are B and Se. Disposal of tile water in this area is a necessary component of a management system that includes tile drainage. But tile water disposal raises environmental concerns such as the well-known experience of Se contamination at Kesterson reservoir in the San Joaquin Valley. The source of tile water is shallow groundwater which may be derived from water applied during irrigation of a field, from local precipitation, or it may have moved laterally to the tile drain by regional groundwater flow. The determination of the relative importance of these components is significant because drainage of irrigation water represents an economic loss. Drainage of groundwater which has moved laterally from other areas is, however, not locally controllable and cannot be factored into the local economics of production. Regulation of drain water quality is therefore a complex issue because there are, potentially both local and regional components controlling water quality.

Tile drain tubes are normally installed in parallel sets with a fixed spacing. This arrangement can be modeled by analytical techniques which lead to expressions for flow rates within tubes based on drain diameter, spacing

Abbreviations: CIMIS, California Irrigation Management Information System; GIS, geographic information system.

and various boundary conditions for water flux and hydraulic head (Kirkham, 1949, 1958; Jury, 1975a; Fipps and Skaggs, 1991). The lower boundary condition of these models is an impervious layer which permits a solution using the method of images. This assumed boundary implies that all water arriving at a drain originated at the soil surface between the drains. In the analytical solutions, certain flow paths pass through lower elevations than the elevation of the drain resulting in upwards flow to the drains. Such paths may have travel times on the order of 10 yr or more (Jury, 1975b). The utility of the impervious layer assumption is questionable under certain field conditions as, for example, in the western San Joaquin Valley. In this area, a highly permeable sand layer underlies clay-rich soils that have much lower permeability (Deverel and Gallanthine, 1989; Belitz and Phillips, 1995). Groundwater flow is from southwest to northeast and the historic record of artesian wells at the margin of the alluvial fan near the San Joaquin River (Mendenhall et al., 1916) suggested that this groundwater flow was occurring in conditions where the groundwater level was close to the surface. Groundwater levels in this area were lowered by pumping during the first half of the 20th century, but the introduction of irrigation water from northern California, through the Delta-Mendota canal, and the installation of tile drainage have again stabilized the water table at a depth of 1.5 to 3 m (Deverel and Gallanthine, 1989). Water flowing to tile drains in this area is a mixture of local irrigation water and water that has moved upwards from the sand layer (Deverel and Fujii, 1988). Evidence for this partitioning includes isotopic enrichment of $\delta^{18}\text{O}$ with depth, and decreases in tritium concentrations when compared with irrigation water sampled at the same site (Deverel and Fio, 1991). Based on water chemistry data, the proportion of drained water that arrived from greater depths was 30% for a drain at 1.8-m depth and 60% for a 2.7-m drain. Furthermore, Se concentrations indicated that the deep groundwater component had arrived from the west (Deverel and Fio, 1991).

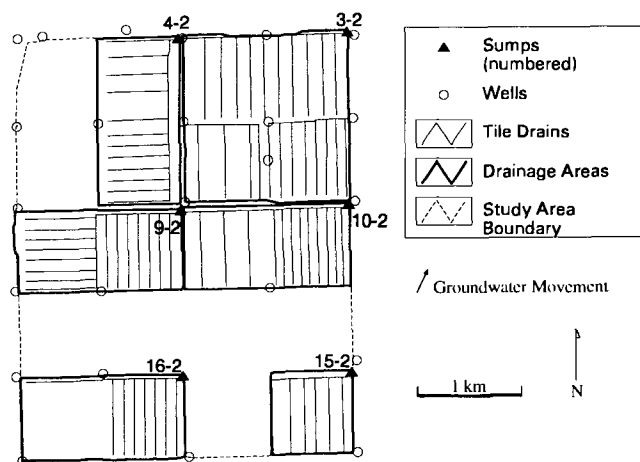


Fig. 1. Map of six drainage areas that drain to the numbered sump in the northeast corner of each area. Groundwater movement direction was a mean value computed for the entire water district using water table elevation data for 1991. Well locations are 24 of the 57 wells used in water table surface calculations.

These geochemical studies of groundwater and tile-drained water on the west side of the San Joaquin Valley indicated that a significant portion of the water appearing in tile drains was not applied to the same field, but was water that had flowed upwards from greater depths and horizontally from the west.

In this study, we examined the water budget of an irrigated agricultural area located in the same general area of the western San Joaquin Valley as the aforementioned groundwater geochemical studies (Deverel and Gallanthine, 1989; Deverel and Fio, 1991). Considering

$$w_{et} + w_{ro} + w_{dp} + \Delta w_{st} + w_{td} - w_{ip} - w_{ig} = 0 \quad [1]$$

a water balance in terms of water depth [L] for a control volume consisting of a soil column and a tile drain. Water enters the volume as irrigation, precipitation or tile interception of groundwater and leaves as evapotranspiration, runoff, deep percolation, and tile drainage. The terms are: w_{ip} depth of water applied through irrigation and precipitation, w_{et} evapotranspiration, w_{ro} runoff, w_{dp} deep percolation, w_{td} tile drainage, Δw_{st} change in soil water storage (expressed as a depth of water within a soil column of specified height), and w_{ig} groundwater interception by tile drains. Spatial variability in the depth of water drained by tile systems could be caused by spatial variability in any of the amounts represented in Eq. [1] or by some combination these terms. The question addressed here was the origin of variability in depth of water drained given these spatially-variable processes.

MATERIALS AND METHODS

Field Area

The Broadview Water District is located on the west side of the San Joaquin Valley of California approximately 100 km west of Fresno. Most of the water district is divided into quarter-sections which are square fields with area of 64.8 ha. On the borders of the water district there are also some smaller fields with irregular shapes. This study was concerned with only quarter-sections, and henceforth we will refer to quarter-sections as fields. The district maintains irrigation turnouts in the southwest corner of each field. Water supplied from these turnouts is metered with a precision of 123 m³ (0.1 acre-feet). Sumps are located in the northeast corner of certain fields for collection and disposal of water from tile-drain systems. Water draining into the sumps is pumped into drainage ditches and metered to the same precision as the irrigation water. The sumps may drain a single field, two adjacent fields, or all four fields that make up an entire section (Fig. 1). Because sumps may drain more than one field, the term *drainage area* is used to refer to the entire area drained by a sump.

Approximately 80% of the water district has tile drainage at approximately 1.8-m depth. The most common spacing of drain laterals is 91.4 m, but several other spacings are also present (Fig. 1). Maps of drains were compiled by the water district staff using data obtained from individual landowners. Six sumps were selected for analysis of irrigation and drainage, each located in the northeast corner of an entire section.

Every 2 d, cumulative flow meters for irrigation were read and weekly readings of meters on sumps were taken during the period of 1 Jan. 1991 to 1 May 1996 (the study period). Daily precipitation data, collected at the California Irrigation Management Information System (CIMIS) station 10 km east

plant transpiration under the assumption that the fractional rooting depth also represents the fraction of the evapotranspiration that is transpiration (Simunek et al., 1996). When the actual rooting depth reaches the maximum specified value, the canopy coverage of the soil is complete, the soil evaporation is zero, and the potential transpiration is equal to the potential evapotranspiration. Root water uptake at depth z was calculated using

$$T_c(z) = \alpha(h)\beta(z)T_p \quad [5]$$

where $T_c(z)$ is the rate of water removal ($\text{cm cm}^{-1} \text{d}^{-1}$) with $\beta(z)$ the normalized root distribution function (cm^{-1}). The water stress function is

$$\alpha(h) = \frac{1}{1 + (h/h_{50})^p} \quad [6]$$

where h_{50} is the pressure head causing a 50% reduction when the exponent $p = 1$ (see Simunek et al., 1996, for further details on root water uptake). The parameter h_{50} was set to -20 m and $p = 3$ in the calculations discussed here.

The UnsatchemGeo simulation of water flow in the various drainage areas was set to run over the study period. The initial condition for this simulation was volumetric soil water content, $\theta(z)$. The gravimetric soil water content was determined for samples collected at 0.3-m intervals to a depth of 1.2 m for each location (Lesch et al., 1992). A separate set of 75 measurements of bulk density taken both within the study area (Fig. 1), and in fields nearby, were kriged to obtain estimates of bulk density at sampling locations (Vaughan et al., 1996). $\theta(z)$ was computed using these estimates and was linearly interpolated between the sampling depths. The finite-element column extended to a maximum depth of 1.84 m. The time step was varied during the simulation depending on how rapidly convergence occurred during iteration of the water flow calculation. The minimum time step was 8.6 s and the maximum was 1 d. All changes in prescribed water flux at the soil surface were preceded by a gradual reduction of the time step to the minimum value.

Calculations were performed for two locations within each field. Cumulative drainage from the bottom of the modeled profile was compared with measured depths of drainage which were recorded on a weekly basis. Computed results were stored at time intervals varying from one to two days rather than at the computational time step to minimize data storage requirements. A subset of computed results was selected to match the dates when measurements were taken. Mean cumulative drainage depths for each drainage area were calculated as a simple arithmetic mean of the coincident data from all locations within the area.

Determination of Depth-to-Water

Groundwater levels throughout the study area were calculated from depth-to-water measured at 57 wells for 19 dates during the study period. These levels provided an independent data set for use in evaluating the role of groundwater in tile drainage. Because of equipment failures, the actual number of measured wells for any given date varied between 34 and 54 with a mean value of 48. The surface elevation of well sites was determined from a digital elevation model produced by the TOPOGRID¹ program (a modified version of an algorithm described by Hutchinson, 1989). Input data for the calculation

was a digital line graph file of topographic contour locations obtained from the U.S. Geological Survey. Elevation of the water table was determined, for each well, by subtracting the measured depth-to-water from the computed surface elevation. The resulting water table elevations were fitted using a third-order trend surface. Residuals for water table elevations were calculated at each well location. These residuals were kriged to provide an improved representation of each surface

$$z_{\text{est}} = z_i + z_k \quad [7]$$

(z_{est}) where z_i is estimated from the trend surface and z_k is estimated by kriging the residuals. Kriging permitted better representation of the variability at shorter distances. All kriging calculations used the ordinary kriging program (OKB2D) in the GSLIB package (Deutsch and Journel, 1992). For the water table elevations and residuals, the surfaces were represented as grids with cell size of 20 m. Spatial covariance was modeled for semivariogram data for each of the 19 dates. These models normally included a small nugget effect (mean of nugget values: 0.016 m^2) and an omnidirectional spherical model but the residuals for 2 of the 19 dates required directional modeling.

RESULTS AND DISCUSSION

During the 1948 d represented in the study period, cumulative tile drainage for the six fields was a maximum depth of 0.95 m in field 16-2 and a minimum of 0.18 m in field 9-2, a factor of five variation (Fig. 2). This variation in depth drained was also consistent over time. The main question, addressed here, was the origin of this variability in depth of water drained. Some possible contributing factors were: different amounts of irrigation water applied to the fields, different degrees of water use caused by planting different crops, spatial variability of Δw_{st} [Eq. 1], blockage of tile drains causing reduced flow and correspondingly greater deep percolation to the groundwater, lateral groundwater flow to the sump drainage area, and variation of hydraulic conductivity for different soil types causing variability in the efficiency of the drains.

Variation in cumulative depth of applied water among the drainage areas was 3.26 to 4.58 m depth, or a factor of 1.4. This was significantly less than the factor of five

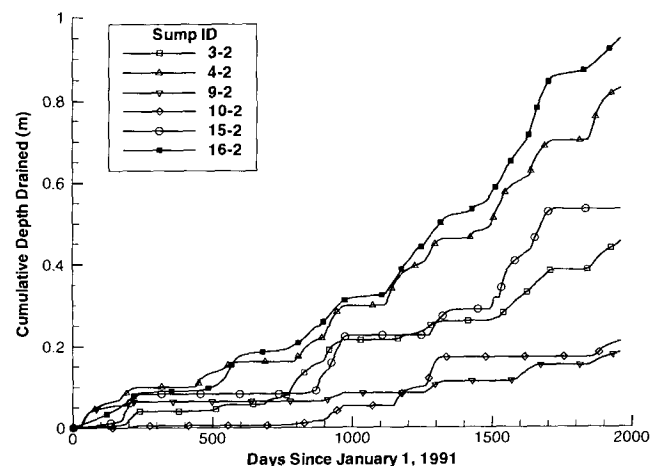


Fig. 2. Cumulative depth of water drained from six drainage areas by tile drain systems between 1 Jan. 1991 and 1 May 1996.

¹A program in the ARC/INFO software package. The use of brand names in this report is for identification purposes only and does not constitute endorsement by the USDA.

variation that occurred for the cumulative drainage depths (Fig. 3). Furthermore, the depth of water applied and depth drained for specific fields were poorly correlated (coefficient of determination, $r^2 = 0.03$). The drainage area with the greatest drainage depth had the lowest depth of applied water (16-2). Also, the greatest depth of applied water (4.6 m) was almost identical for two drainage areas (3-2 and 4-2), but the depth drained for these areas differed by a factor of 1.8. The data for drainage area 4-2 did suggest a positive correlation because 4-2 had the greatest depth of applied water and the second largest cumulative drainage. But, considering the entire data set, there was only a small, poorly-correlated variation in irrigation amount, implying that variations in drainage depths are probably better explained by other factors.

Spatial variability in water storage is likely to be significant in the analysis of cumulative drainage for short modeling periods. But variations in water storage are restricted to a finite range of soil water content implying that such variations will be less significant as the modeled time period increases. Δw_{st} [Eq. 1] is expressed as the change in depth of water over the 1.84 m modeled soil column. For the 5-yr period, computed Δw_{st} varied from a mean value of -0.11 m in drainage area 4-2 to 0.10 m in 10-2. This variation was not negligible and suggested that spatial variation of soil water storage was a potential contributing factor to the observed variations in drainage. However, the variation was not large enough to consider spatial variation in Δw_{st} as a major factor in the 0.8 m variation in cumulative drainage depth.

Compared with irrigation and precipitation amounts, the explanation of drainage variability based on spatial variation of evapotranspiration rates was less certain because there was no source of continuous evapotranspiration estimates from measured data within individual fields. However, evapotranspiration was computed by the UnsachemGeo program using the plant root water uptake module. The calculated cumulative drainage from the base of the modeled profile predicted the frac-

tion of applied water that was drained. The remaining fraction was either removed by evapotranspiration or was stored in the profile. Because this study attempted to determine whether variability in evapotranspiration could have resulted in the observed variability in drainage, a conservative assumption was that the entire computed flow entered the tile drains and appeared at the sump. This assumption was equivalent to $w_{dp} = 0$ [Eq. 1], and would tend to maximize the effect of variability in evapotranspiration. The difference between observed and modeled drainage, termed the drainage residual in this paper, was plotted to demonstrate the degree to which variability in observed drainage can be explained by the model (Fig. 4). The model made substantially better predictions of observed drainage for sumps 3-2, 9-2, and 10-2 than for sumps 4-2, 15-2, and 16-2. Predicted and observed cumulative drainage for each set of sumps, taken separately, were positively correlated. But, when the data were combined, the correlation became nonexistent ($r^2 = 0.00$). By subtracting an arbitrary 0.5-m depth from the measured depths for sumps 4-2, 15-2, and 16-2, the correlation for all six sumps was improved ($r^2 = 0.45$). This suggested that poor model performance, indicated by the nonexistent correlation, could have been caused by additional water, from some other source, that entered sumps 4-2, 15-2, and 16-2. In summary, while variations in evapotranspiration among different fields might have been a secondary contributing factor to observed variability in cumulative drainage, such variations were not a prime factor.

Variations in cumulative drainage depths could also be caused by drain blockage. Although such variations were not directly quantifiable because no data were available regarding performance of individual drain laterals, some observations of relative drainage rates were relevant. The least cumulative depths drained occurred for sumps 9-2 and 10-2 whereas the greatest depths drained occurred at sumps 4-2 and 16-2. If blockage were an important factor, then the argument would be that drains in 9-2 and 10-2 tended to have more blockage, resulting in slower flow rates. Drainage areas

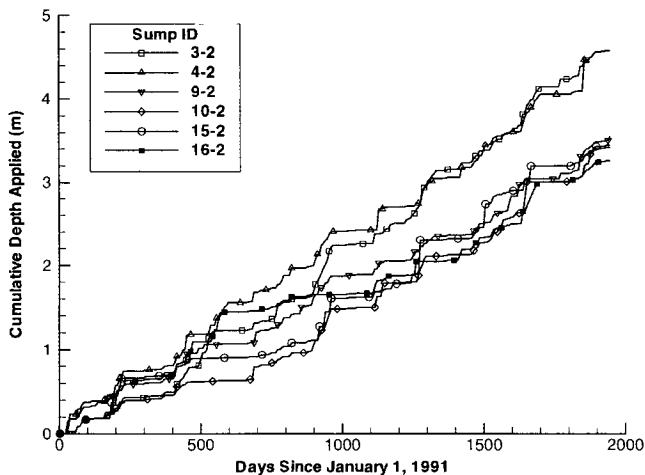


Fig. 3. Cumulative depth of water (irrigation + precipitation) applied to six drainage areas designated by the sump identification number between 1 Jan. 1991 and 1 May 1996.

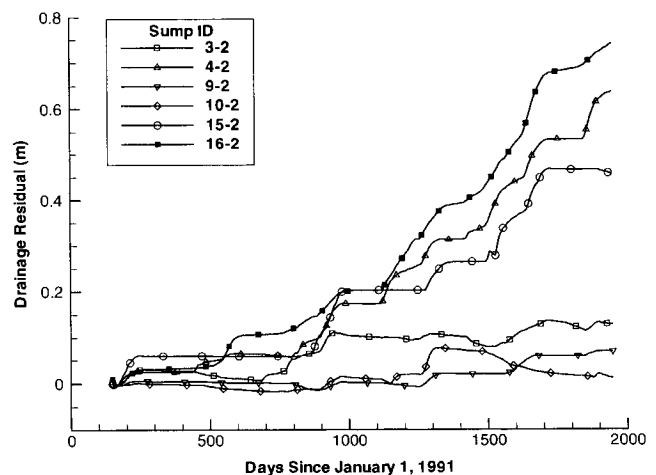


Fig. 4. Cumulative drainage depth residual (observed - calculated). Drainage depths were calculated assuming all water drained from the soil column entered the tile drains.

9-2 and 10-2, however, have the greatest density of tile drains and the slowest drainage rates (Fig. 5). It seemed unlikely that tile drain blockage would have been more significant in fields where the density of drains was greatest. Also, there was no specific evidence of substantial tile drain blockage in drainage areas 9-2 and 10-2 (David Cone, manager of the water district, 1998, personal communication). Finally, drainage area 16-2 only had a main drain running east-west at the northern end of the western field (Fig. 1), there are no tile drain laterals. This accounted for the low tile drain density in this drainage area. The lack of tile drain laterals could be thought of as a hypothetical blockage of all drains in this field except the main drain. Drainage area 16-2 had the highest cumulative depth drained, however, so the complete elimination of flow from the hypothetical set of drain laterals in half of the drainage area resulted in no reduction of cumulative drainage depths relative to other areas. This was quite surprising, but it certainly suggested that blockage of tile drain laterals was unlikely to have been an important factor in this drainage area. A more reasonable conclusion is that, over long time periods, flow within tile drains in the study area was probably not the rate-controlling factor for sump drainage rates.

The fifth possibility, groundwater flow into drains, was difficult to evaluate because the flux of groundwater into the drains cannot be calculated accurately. Instead, the approach we chose was calculation of mean depth-to-groundwater within drainage areas, and comparison of these depths with mean daily drainage. If depth-to-groundwater were a significant factor then there should have been a negative correlation between depth-to-groundwater and mean daily drainage at least for groundwater depths that were shallower than the depth of the drains. Modeling of water table elevation was done to obtain estimates of the mean depth-to-water within each drainage area for each of the 19 sets of measurements of depth-to-water. The addition of the kriged residual surface to the original third-order trend surface substantially improved the fit [Eq. 7]. The tem-

porally-averaged sum of squares taken over the 19 dates was 6.22 m^2 for the trend surface, but only 0.80 m^2 when the kriged surface was added. The kriged surface was not an exact interpolation because of the non-zero nugget effect.

Comparison of well levels and mean daily depth drained was done for the period between 1 Jan. 1991 and 2 Jan. 1996 (Fig. 6). This final date was the date of the last well-level measurement during the study period. The estimated mean depth-to-water, z_{est} [Eq. 7], was spatially averaged over each drainage area by taking the arithmetic mean for all grid cells located within the area including an areal weighting to accommodate those cells along the boundaries which are smaller than 20 by 20 m. This was done for each measurement date. These results were temporally-averaged over the 19 dates to obtain a mean depth-to-water. Resulting mean depths were likely biased from the true mean depth-to-water because the dates of the measurements did not follow a sampling strategy that would adequately characterize the seasonal fluctuations in water levels. Nonetheless, if there was spatial variation in depth-to-water that was negatively correlated with daily depth drained, such spatial variation should have been apparent even if the computed means did not represent true mean values because the seasonal fluctuations were approximately the same at all sites. The results were consistent with negative correlation of mean daily depth drained and mean depth-to-water (coefficient of determination, $r^2 = 0.42$, Fig. 6). A regression model, such as a linear model, was not plotted because the functional form of the relationship is likely to exhibit a threshold depth-to-water occurring whenever the depth-to-water is less than the depth of the bottom of the drain. A rapid increase in drain flows would be expected as the mean water table moves upwards above the drains. The data were generally consistent with a threshold model of drain flow because the three greatest depths drained occurred in drainage areas having the three smallest values of depth-to-water. However, there are not enough data to adequately characterize a threshold

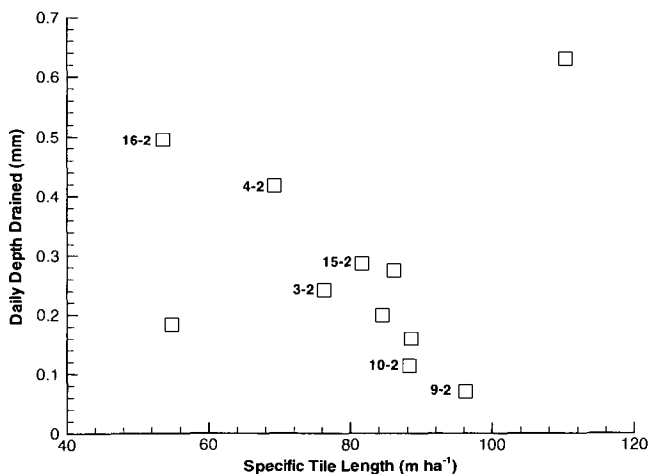


Fig. 5. Mean daily depth of water drained vs. areal density of drains for several drainage areas. Non-numbered points represent drainage areas that surrounded the study area.

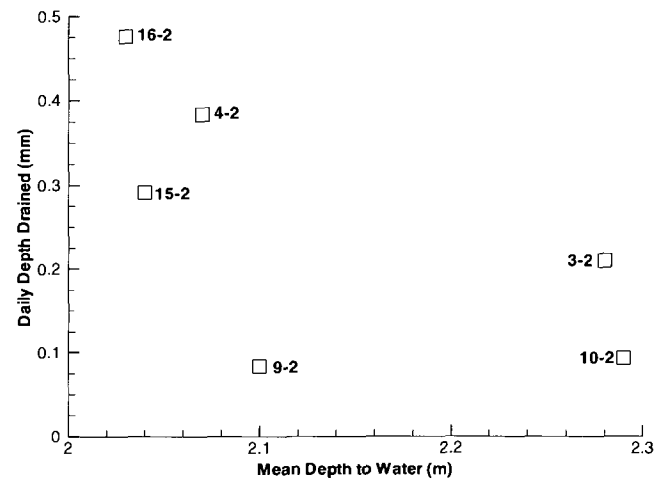


Fig. 6. Mean daily depth drained was spatially-averaged within each drainage area and temporally-averaged for the 19 dates when measurements were made.

CONCLUSIONS

In this 5-yr study of Broadview Water District irrigation and drainage records we have shown that variability in cumulative tile drain flows could not be uniquely explained by specific local variations in any one of the following factors: irrigation amount, evapotranspiration, variation in water storage, or tile drain blockage. Drainage depths that were consistently higher for certain sumps were especially difficult to rationalize on the basis of yearly irrigation amounts which were quite consistent among the various fields. All these factors, however, may have possibly contributed to the observed variability and there were probably interactions among them. Another possible explanation was variation in the fraction of nonlocal groundwater appearing at different sumps. Evidence for this was negative correlation of groundwater levels and cumulative depth drained. In addition, greater cumulative depths of drainage occurred in the two drainage areas that would be encountered first by groundwater moving in a north-northeast direction. The relatively large depth drained by one sump near the northern boundary of the water district was probably not related to lateral groundwater flow but might be explained by the greater amount of irrigation water applied to that drainage area. Because several of the possible explanations that were presented might be operable to different degrees and might exhibit interactions, it was not possible to complete a quantitative evaluation of the fractional contribution by each process. In general, caution is warranted when modeling tile-drain flow or the chemical composition of tile drain waters because mixing with groundwater that was transported laterally from other areas may be occurring. Furthermore, this study, and the earlier work cited (Deverel and Gallanthine, 1989; Deverel and Fio, 1991), suggest that any modeling of tile drain flows in this area which requires the assumption of a shallow impermeable layer and no mixing of drained irrigation water with non-local groundwater will have poor predictive capability unless it can be independently confirmed that such mixing is not occurring.

ACKNOWLEDGMENTS

We thank David G. Cone, Manager of the Broadview Water District, for providing the irrigation and drainage data utilized in this study and for consultations concerning many aspects of water management in the district.

REFERENCES

- Belitz, K., and S.P. Phillips. 1995. Alternative to agricultural drains in California's San Joaquin Valley: Results of a regional-scale hydrogeologic approach. *Water Resour. Res.* 31:1845-1862.
- Carsel, R.F., and R.S. Parrish. 1988. Developing joint probability distributions of soil water retention characteristics. *Water Resour. Res.* 24:755-769.
- Deutsch, C.V., and A.G. Journel. 1992. *GSLIB geostatistical software library and user's guide*. Oxford Univ. Press, New York.
- Deverel, S.J., and J.L. Fio. 1991. Groundwater flow and solute movement to drain laterals, western San Joaquin Valley, California 1. *Geochemical Assessment. Water Resour. Res.* 27:2233-2246.
- Deverel, S.J., and R. Fujii. 1988. Processes affecting the distribution of selenium in shallow groundwater of agricultural areas, western San Joaquin Valley, California. *Water Resour. Res.* 24:516-524.
- Deverel, S.J., and S.K. Gallanthine. 1989. Relation of salinity and selenium in shallow groundwater to hydrologic and geochemical processes, western San Joaquin Valley, California. *J. Hydrol.* 109:125-149.
- Doorenbos, J., and W.O. Pruitt. 1977. *Guidelines for predicting crop water requirements*. Irrigation and Drainage Paper 24. FAO, Rome.
- Fipps, G., and R.W. Skaggs. 1991. Simple methods for predicting flow to drains. *J. Irrig. Drain. Eng.* 117:881-896.
- Hopmans, J.W., and J.N.M. Stricker. 1989. Stochastic analysis of soil water regime in a watershed. *J. Hydrol.* 105:57-84.
- Hutchinson, M.F. 1989. A new procedure for gridding elevation and stream line data with automatic removal of spurious pits. *J. Hydrol.* 106:211-232.
- Jury, W.A. 1975a. Solute travel-time estimates for tile-drained fields: I. Theory. *Soil Sci. Soc. Am. J.* 39:1020-1024.
- Jury, W.A. 1975b. Solute travel-time estimates for tile-drained fields: II. Experimental. *Soil Sci. Soc. Am. J.* 39:1024-1028.
- Kirkham, D. 1949. Flow of ponded water into drain tubes in soil overlying an impervious layer. *Trans. Am. Geophys. Union.* 30:369-385.
- Kirkham, D. 1958. Seepage of steady rainfall through soil into drains. *Trans. Am. Geophys. Union.* 39:892-908.
- Lesch, S.M., J.D. Rhoades, and D.L. Corwin. 1992. Statistical modeling and prediction methodologies for large scale spatial soil salinity characterization: A case study using calibrated electromagnetic measurements within the Broadview Water District. *U.S. Salinity Lab. Tech. Rep. 131*. U.S. Salinity Lab., Riverside, CA.
- Mendenhall, W.C., R.B. Dole, and H. Stabler. 1916. *Ground water in the San Joaquin Valley, California*. U.S. Geol. Surv. Water Supply Paper 398. U.S. Gov. Print. Office, Washington, DC.
- Penman, H.L. 1963. *Vegetation and hydrology*. Tech. Comm. 53. Commonwealth Bureau of Soils, Harpenden, England.
- Simunek, J., and D.L. Suarez. 1994. Major ion chemistry model for variably saturated porous media. *Water Resour. Res.* 30:1115-1133.
- Simunek, J., D.L. Suarez, and M. Sejna. 1996. The Unsatchem software package for simulating the one-dimensional variably saturated water flow, heat transport, carbon dioxide production and transport, and multicomponent solute transport with major ion equilibrium and kinetic chemistry. Version 2.0. U.S. Salinity Lab. Res. Rep. 141. U.S. Salinity Lab., Riverside, CA.
- Suarez, D.L., and J. Simunek. 1994. Modeling equilibrium and kinetic major ion chemistry with CO₂ production/transport coupled to unsaturated water flow. p. 1215-1246. *In* G.W. Gee and N.R. Wing (ed.) *In-situ remediation: Scientific basis for current and future technologies*. Part 2. Thirty-third Hanford Symposium on Health and the Environment, Pasco, WA. 7-11 Nov. 1994. Batelle Press, Richland, WA.
- Suarez, D.L., and J. Simunek. 1997. UNSATCHEM: Unsaturated water and solute transport model with equilibrium and kinetic chemistry. *Soil Sci. Soc. Am. J.* 61:1633-1646.
- van Genuchten, M.Th. 1980. A closed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil Sci. Soc. Am. J.* 44:892-898.
- Vaughan, P.J., J. Simunek, D.L. Suarez, D.L. Corwin, and J.D. Rhoades. 1996. UnsatchemGeo: Modeling water flow and multicomponent solute transport in a GIS context. p. 235-246. *In* D.L. Corwin and K. Loague (ed.) *Applications of GIS to the modeling of non-point source pollutants in the vadose zone*. SSSA Spec. Publ. 48. SSSA, Madison, WI.
- Vaughan, P.J., D.L. Suarez, J. Simunek, D.L. Corwin, and J.D. Rhoades. 1997. UnsatchemGeo geographic information system software package for simulating one-dimensional water flow, heat transport, carbon dioxide transport, and multicomponent solute transport in a geographic area. Version 1. U.S. Salinity Lab. Res. Rep. 142. U.S. Salinity Lab., Riverside, CA.