

RESOURCE NOTES

NO. 4

DATE 04/30/99



CARTOGRAPHY/
MAPPING SCIENCES



FIRE



FORESTRY



GIS AND GPS



HAZARDOUS
MATERIALS



HUMAN/SOCIAL/
HISTORICAL



HYDROLOGY



NEPA COMPLIANCE



OTHERS



PUBLIC AFFAIRS



RANGE



RECREATION/
INTERPRETATION/
VISUAL RESOURCES



RIPARIAN



SOILS/GEOLOGY



THREATENED &
ENDANGERED
SPECIES



WILDLIFE BIOLOGY



LIBRARIES/RECORDS
MANAGEMENT



CADASTRAL/
LAND RECORDS

BLM's Surface Geophysical Capabilities

*By Brent Lewis, Geologist, BLM
National Applied Resource Sciences
Center (NARSC)*

As a result of the closure of the Bureau of Mines, the National Applied Resource Sciences Center (NARSC) acquired a variety of portable surface geophysical equipment and over the past year, has implemented several seismic and resistivity surveys to characterize geologic settings. These studies have been in support of environmental issues; however, similar approaches can be implemented for assessing mineral deposits or acid mine drainage issues, the latter being extensively evaluated and published by the Environmental Protection Agency (EPA No. 530-R-95 013a). The surface geophysical methods within NARSC vary but generally consist of electrical resistivity, seismic, and electromagnetics. The type(s) to use is dependent upon the survey. Surface geophysical methods provide a non-intrusive, cost-effective means of acquiring subsurface geological information. Such information may encompass lithologic composition, stratigraphic depths and thicknesses, groundwater properties, or properties of the aquifer. This Resource Note discusses electrical resistivity, whereas other geophysical methods will be addressed in future Resource Notes.

Geologic information can be inferred from geoelectrical properties of rock and sediment and the spatial distribution of these properties, both can be acquired by direct current electrical resistivity. In simple terms, this method involves the application of an electrical current to the ground via two source electrodes with the potential difference created at the

ground surface being measured between two receiving electrodes. The effective depth of a "sounding" is increased by sequentially increasing the distance between these electrodes. The further the distance, the thicker the vertical interval in which the bulk of the current flows. Recorded resistivity values can be considered the weighted average of the resistivity of all the beds down to the deepest bed detected. Differences in resistivity values occur when changes in subsurface conditions are encountered. These changes are geoelectric boundaries and typically correspond to changes in either lithologic composition, formation porosity (such as an increase in fracturing), and/or changes in groundwater chemistry. Clearly, the current prefers to flow in a bed of lower resistivity, such as clay; conversely, the more sand and gravel, the greater the resistive properties.

Depending upon objectives, a resistivity survey may be employed via several techniques or a combination of techniques, the most common being Vertical Electrical Sounding (VES) and horizontal profiling. The VES technique is analogous to electrical drilling because the result is a one-dimensional interpretation of the subsurface, similar in profile to a common drill log. This technique typically involves the correlation of multiple sample locations to produce geoelectric cross-sections from which the general stratigraphy and structural setting are identified. Horizontal profiling provides a two-dimensional profile of the subsurface, similar to viewing the wall of an excavated trench. This technique is typically used when greater detail is needed. Effective depths of any investiga-

RESOURCE NOTES are intended to be early announcements of technical and informational topics for Bureau of Land Management personnel and some of their customers.

Information in this RESOURCE NOTE is based on the opinion and experience of the author and has not been peer-reviewed. Conclusions and opinions expressed herein do not necessarily represent those of BLM.

Use of trade names does not imply U.S. Government endorsement of commercial products.

If you have received a copy of or found out about RESOURCE NOTES in an indirect way and would like to be included in future mailings, please send the following:

NAME, TITLE, MAILING ADDRESS and a list of the two or three subject areas that you are most interested in or that most directly relate to your job.

Send this information to
Phil Dittberner,
BLM, RS-140,
P.O. Box 25047,
Denver, CO. 80225-0047
or pdittber@nc1155wp.sc.blm.gov
or FAX 303-236-3508.

If you would like to prepare a RESOURCE NOTE for distribution, or you have an idea and author in mind for a good RESOURCE NOTE, please contact Phil Dittberner at 303-236-1833, FAX 303-236-3508 or pdittber@nc1155wp.sc.blm.gov with the topic and the name of writer, including an address, phone number, and e-mail address.

Thank you for your interest in RESOURCE NOTES.

tion can be customized to achieve specific objectives, however, based upon the in-house NARSC equipment, survey depths as great as 250 feet are readily achieved.

Two case studies are provided in the figures as examples of resistivity capabilities. The survey at the Sunrise Mountain Landfill in Las Vegas, Nevada, consisted of 15 VES profiles, i.e., electrical drill logs. The objective of this survey was to characterize the local stratigraphy and geological structure, e.g., faulting, in order to design a groundwater monitoring well network. Geological information from each VES (Figure 1A is an example of a single VES data set) was correlated to produce geologic cross-sections. An example of a cross-section developed through the correlation of six VES locations is provided in Figure 1B. In addition to the stratigraphic information, this survey identified several fracture zones and a nearby fault which greatly affect the strategies behind the placement of groundwater monitoring wells.

The second case study (Figure 2) utilized the "horizontal profiling" technique. This survey was implemented at the old Granby Landfill near Granby, Colorado. The objective of this survey was to identify

local stratigraphy, particularly the depth to impermeable bedrock. This required the ability to distinguish between weathered and unweathered shale [Pierre Formation]. The depth of a groundwater monitoring well was to be completed to the depth of unweathered bedrock. Resistivity results suggested this depth to vary from 24 to 34 feet across the site. Based upon the drill logs obtained after the survey, depth to impermeable bedrock was determined to range from 26 to 32 feet. Supplementary information obtained from this survey was the varied soil types of a nearby wetland.

The in-house resistivity capabilities of NARSC provide an opportunity to acquire subsurface geologic information quickly and cost-effectively. The examples provided are for environmental groundwater objectives; however, other uses may include mineral assessments, abandoned mine investigations, and archeological surveys for buried foundations or pits. If you would like more information about resistivity or the other geophysical methods now available within BLM, contact Brent Lewis at 303-236-0550 or e-mail B1Lewis@sc.blm.gov.



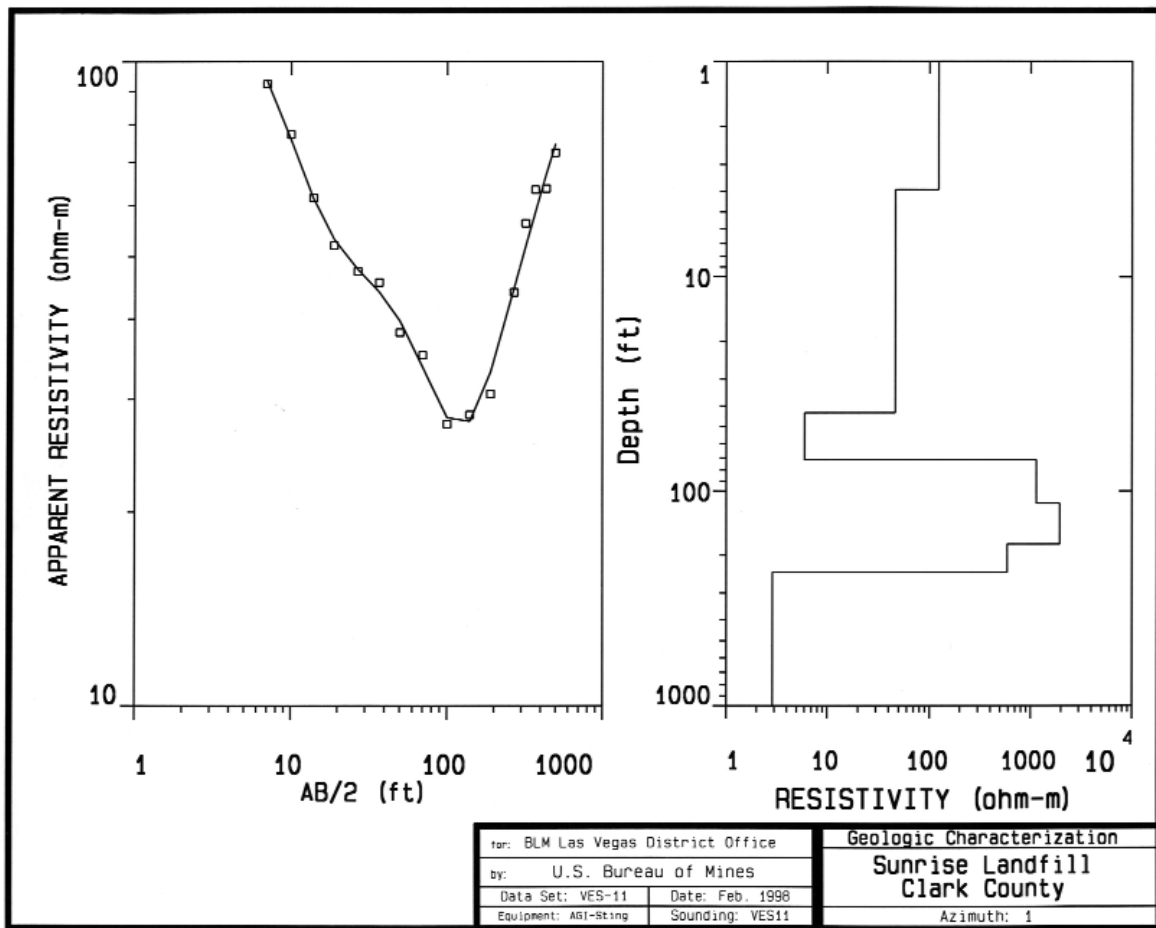


Figure 1A. A single VES dataset; illustrating the distribution of the data and depth model.



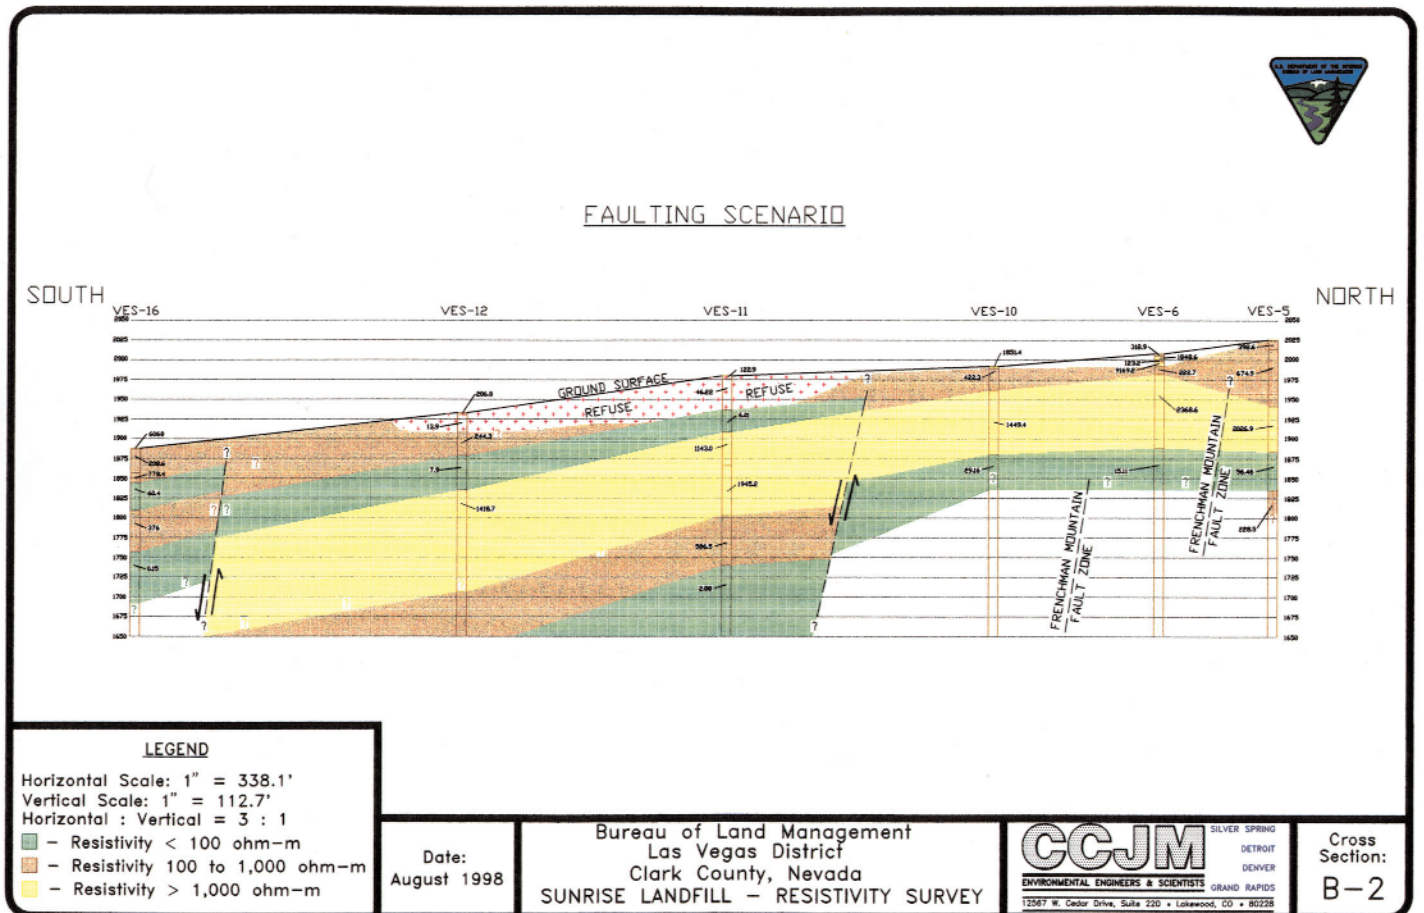


Figure 1B. Geologic cross section developed from the correlation of six VES locations.

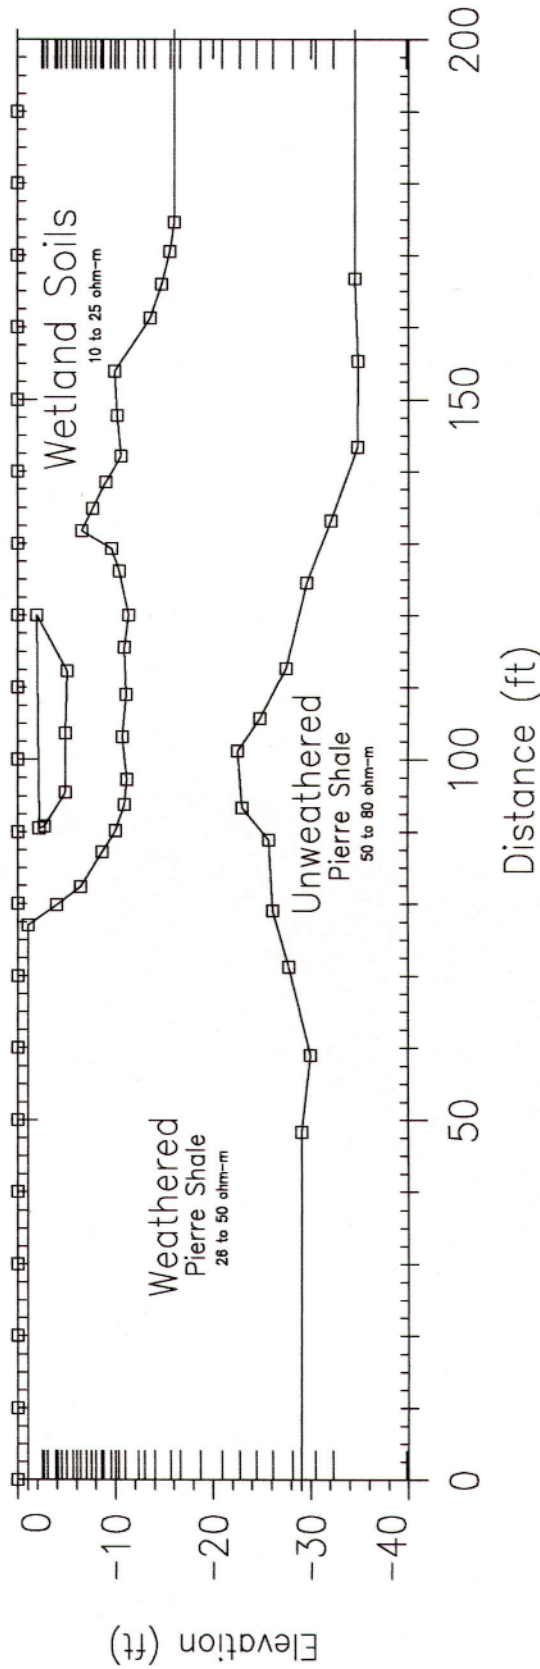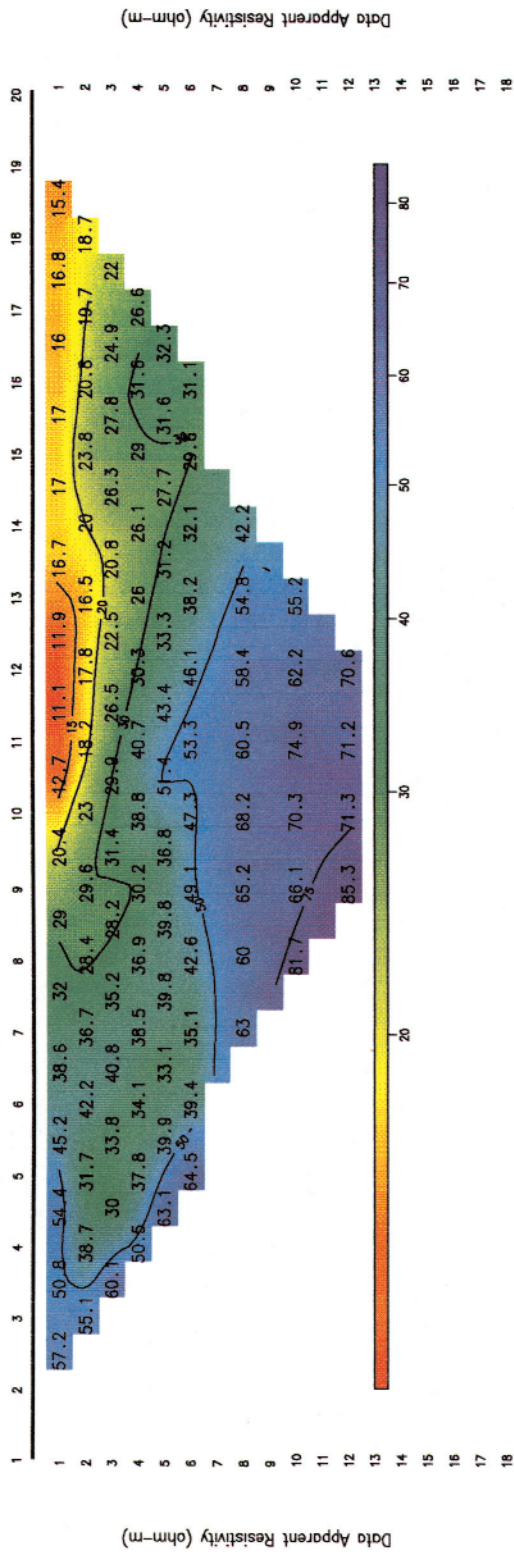

BLM Kremmling Area Office		Groundwater Investigation	
Bureau of Land Management		Old Granby Landfill Grand	
DATA SET: GSWIFT2	DATE: 98-10-14	Grid (X x Z): 125 x 47	
Array: Dipole-Dipole	a-Spacing: 10.0		

Figure 2. An example of Horizontal Profiling.