

Earthquakes in Virginia and Vicinity 1774 - 2004

By Arthur C. Tarr and Russell L. Wheeler

2006

This map summarizes two and a half centuries of earthquake activity. The seismic history consists of letters, journals, diaries, and newspaper and scholarly articles that supplement seismograph recordings (seismograms) dating from the early twentieth century to the present. All of the pre-instrumental (historical) earthquakes were large enough to be felt by people or to cause shaking damage to buildings and their contents. Later, widespread use of seismographs meant that tremors too small or distant to be felt could be detected and accurately located.

Earthquakes are a legitimate concern in Virginia and parts of adjacent States. Moderate earthquakes cause slight local damage somewhere in the map area about twice a decade on the average. Additionally, many buildings in the map area were constructed before earthquake protection was added to local building codes. The large map shows all historical and instrumentally located earthquakes from 1774 through 2004.

EARTHQUAKES

Plate tectonics cause most of the Earth's earthquakes at boundaries between moving plates. However, the map area is in the middle of the North American plate, far from plate boundaries. Eastern U.S. earthquakes occur on faults, typically kilometers underground, but usually we cannot tell which fault slips to cause an individual earthquake. Accordingly, the best guides to earthquake hazards in the map area are the earthquakes themselves, not faults or plate motions.

Our estimate of the location of an earthquake within the Earth is uncertain, typically by several kilometers or more, except where dense monitoring networks exist, such as in the urban areas of California. Uncertainties are larger where seismographs are spaced far apart, and for pre-instrumental earthquakes. Despite the uncertain locations of some earthquakes, the map shows that people in most parts of the map area have felt earthquakes over at least the last century or two.

The most common measure of earthquake size is its *magnitude* (M), which reflects the total energy released as seismic waves. There are several ways to measure magnitude. The frequently cited "Richter scale" was the first, although the name is too often applied indiscriminately. Use of different magnitude types can give slightly different values for the same earthquake. Differences of several tenths of a magnitude unit are common.

While the size of an earthquake is characterized by a single number (magnitude), the effect of seismic shaking on people, buildings, and the landscape is characterized by a quantity called *intensity* that varies spatially. Intensity is characterized by the Modified Mercalli Intensity (MMI) scale ranges from I (barely felt or not felt) to XII (total destruction) (see box at far right). MMI VI marks the onset of slight damage to poorly built structures, whereas MMI VIII or higher generally involves considerable damage to some buildings, even collapse. Maps of intensity values, such as the small maps (below and far right) of the 1897 and 2003 earthquakes, demonstrate that the intensity, highest at the place where the earthquake occurred underground, falls off with distance. As the maps illustrate, intensity also varies with local ground conditions.

EASTERN U.S. EARTHQUAKES

Earthquakes are less common east of the Rocky Mountains than in California, but because of differences in crustal properties, an eastern earthquake affects an area about ten times as large as a California earthquake of the same magnitude. A M4.0 eastern U.S. earthquake typically can be felt at many places far as 100 km (60 mi) from where it occurred, and it infrequently causes damage near its source. A M5.5 eastern U.S. earthquake usually can be felt as far as 500 km (300 mi) from where it occurred, and sometimes causes damage as far away as 40 km (25 mi).

EARTHQUAKES IN AND NEAR VIRGINIA

A pattern of Virginia and nearby seismicity (see large map) has emerged from the collection of historical records and instrumental detection and location of small earthquakes. Three loose clusters of earthquakes (seismic zones) and a small component of scattered, background seismicity contribute to the seismic hazard of Virginia and adjoining States (see Generalized Seismic Hazard map). The color and size of each earthquake symbol designates the magnitude on the large map.

The *Eastern Tennessee seismic zone* extends southwestward beyond the map area. The largest known damaging earthquake in the zone (M4.6) occurred on April 29, 2003, near Fort Payne, Alabama, was felt in westernmost Virginia. Earthquakes too small to cause damage are felt about once a year in the seismic zone, although most of them are outside the map area.

Since at least 1828, earthquakes have been reported in the *Giles County seismic zone*. The largest known damaging earthquake (M5.6) in the zone occurred in 1897. Smaller earthquakes are felt or cause light damage once or twice a decade.

Since at least 1774, people in the *Central Virginia seismic zone* have felt small earthquakes and suffered damage from infrequent larger ones. The largest known damaging earthquake in the zone (M4.8) occurred in 1875. Smaller earthquakes that cause little or no damage are felt each year or two. The February 21, 1774, Petersburg earthquake recorded by Thomas Jefferson in his memorandum book was located in this zone.

SEISMIC HAZARD

Engineers who design buildings, bridges, and other structures with earthquake resistance in mind, need to estimate the vertical and horizontal shaking from an earthquake that a structure is likely to undergo. The Generalized Seismic Hazard map (below center) portrays seismic hazard calculated by the USGS as bands of color (cooler for lower hazard, warmer colors for higher hazard). Hazard is expressed as percentage of the acceleration of gravity (*g*). In addition, the hazard value is computed for sites on firm rock for particular time intervals (here, 50 years) and probability of exceedance (here, 2%). For example, the hazard value at Roanoke is between 16% and 18%. That means that a structure built on firm rock has a 1 in 50 odds (2% probability) of undergoing ground shaking of 16%–18% (the threshold for structural damage in poorly constructed buildings) or higher in the next 50 years.

DATA SOURCES

- SIGUS and PDE earthquake catalogs: <http://neis.usgs.gov/neis/epic.html>. Search engine for all earthquake catalogs managed by the USGS National Earthquake Information Center.
- SEISSN earthquake catalog: <http://www.geol.vt.edu/outreach/vto/annofp/catalog/sann2003cat.html>.
- USGS National Seismic Hazard Maps (NSHM) project: <http://earthquake.usgs.gov/hazmaps/hazmaps/>. Overview of the NSHM project and its products.
- USGS NSHM seismic hazard data: <http://hazards.cr.usgs.gov/hazmaps/data2003/accu1/USppa2500-6.asc>.
- USGS NSHM earthquake catalog: <http://earthquake.usgs.gov/hazmaps/products/data/2002/cadoc-2202.emb2001.cc>.

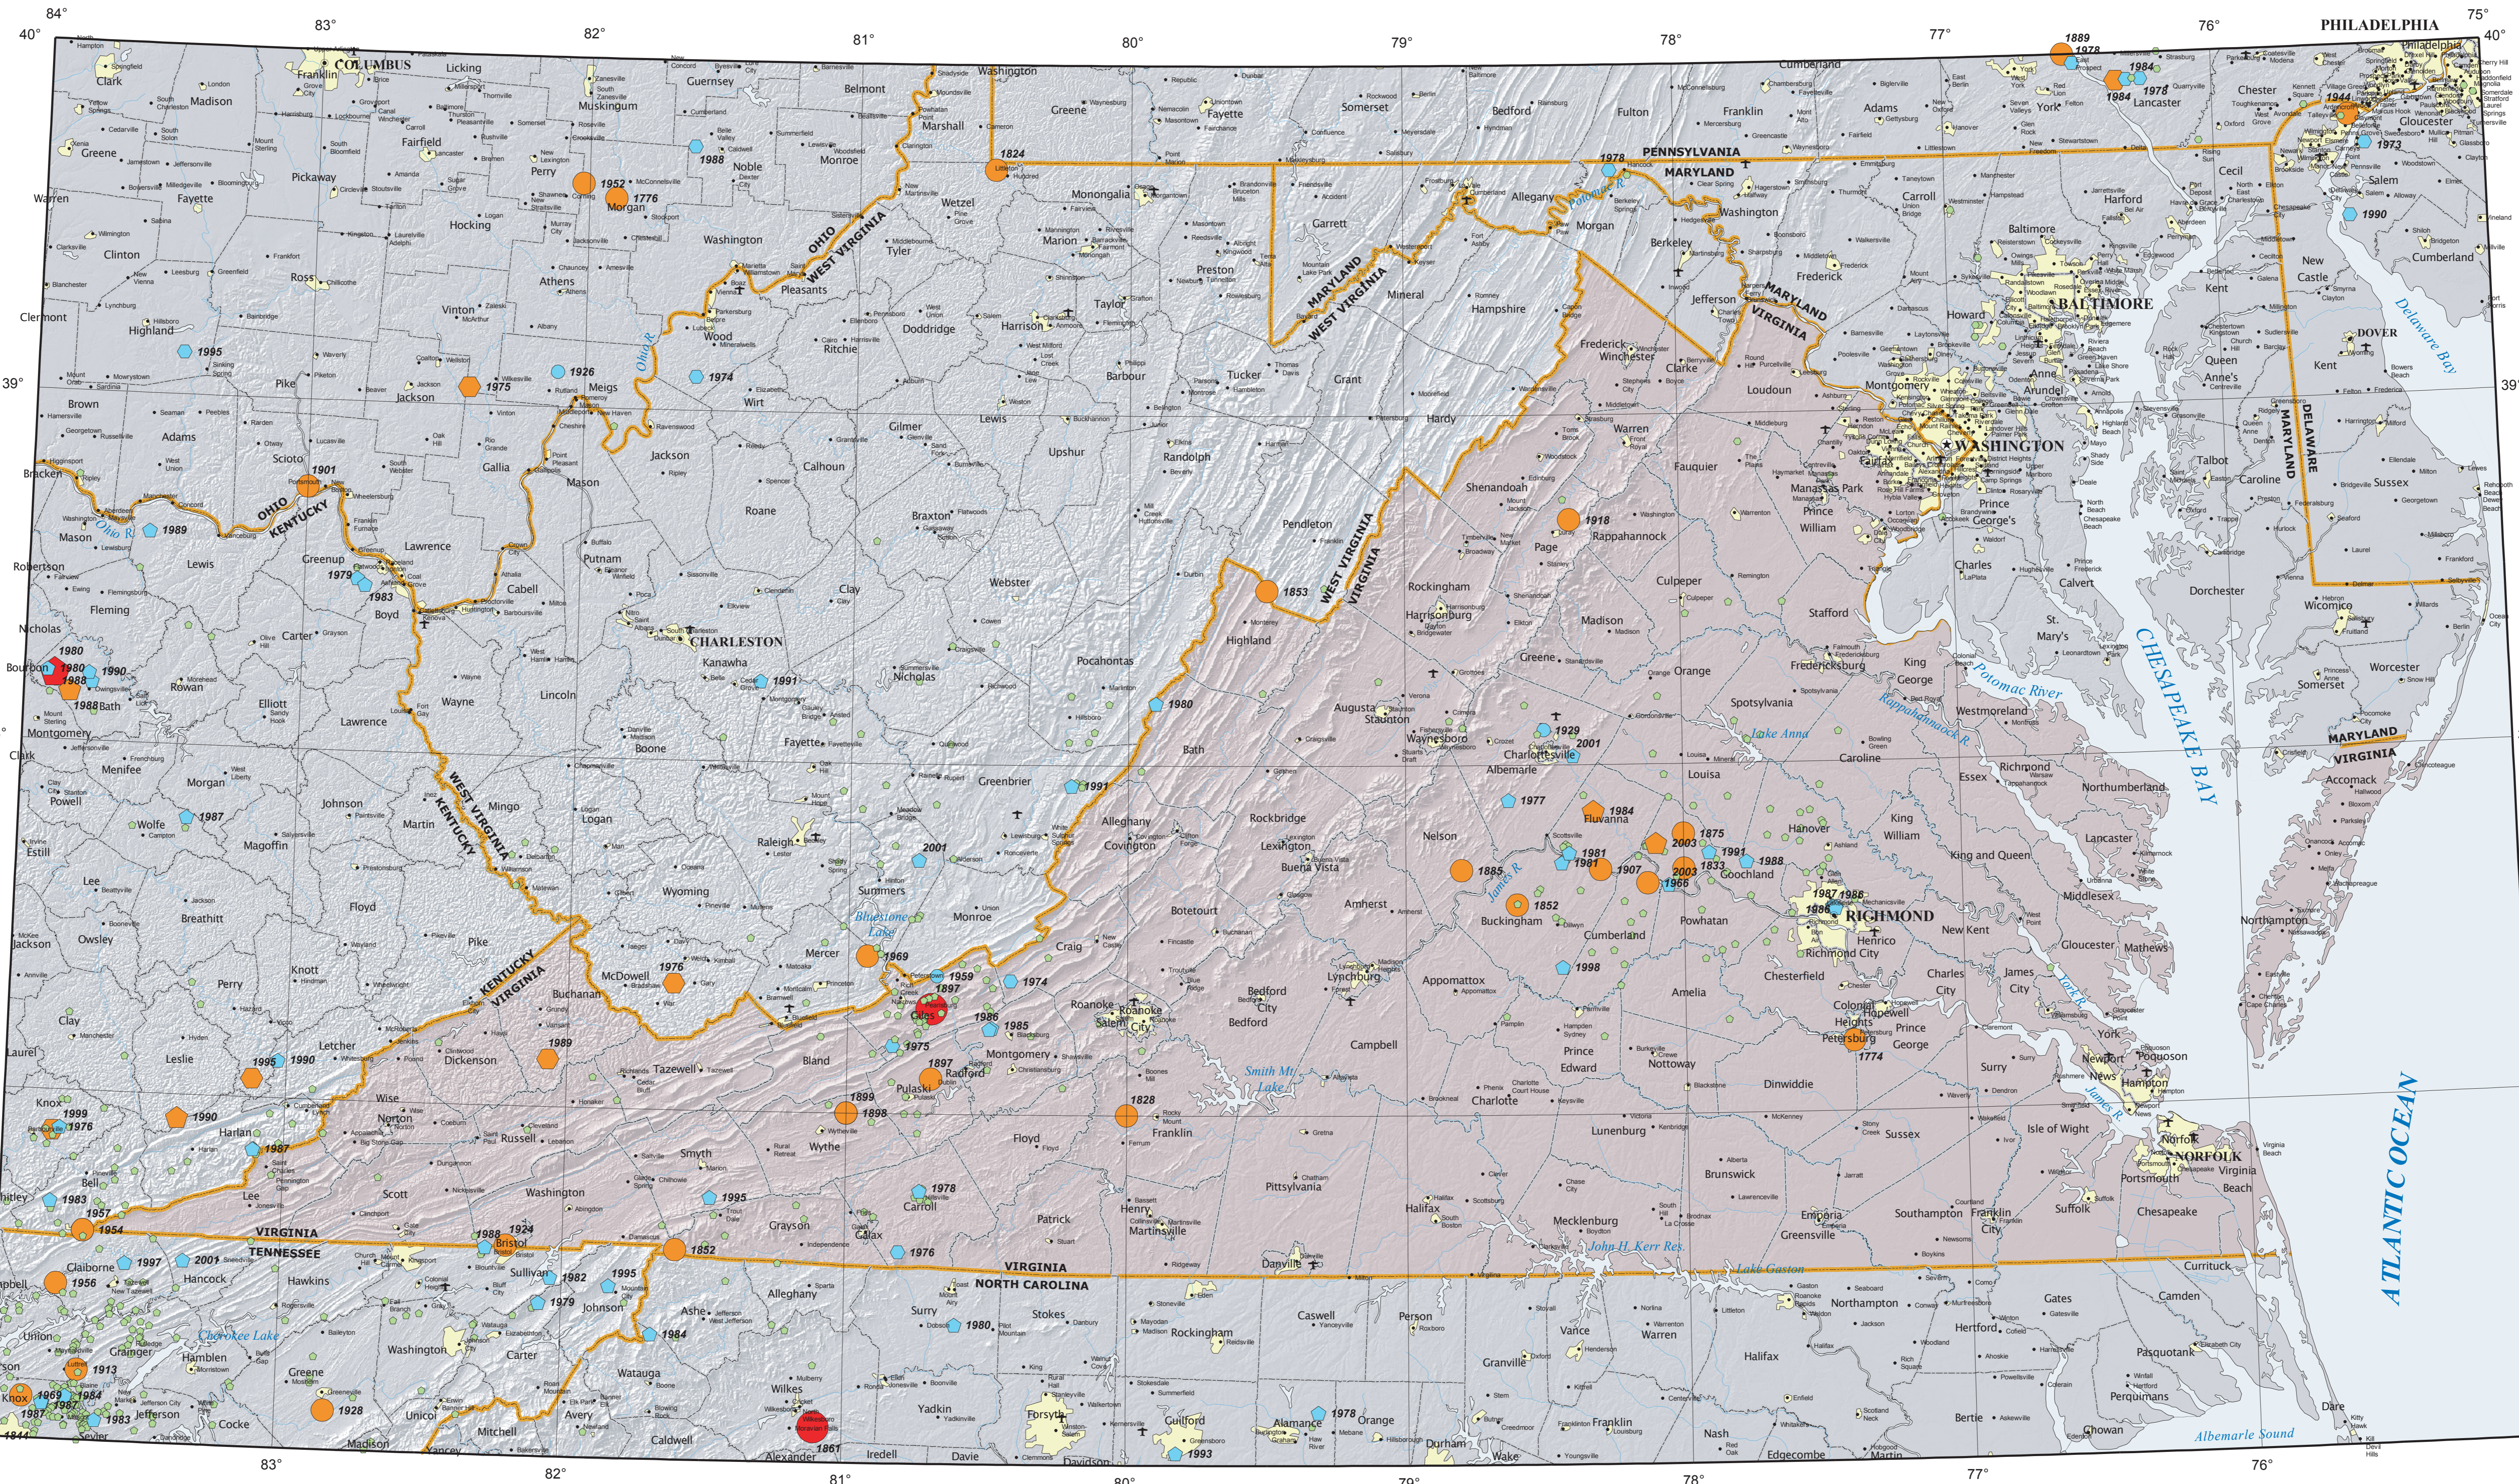


Table with 7 columns: YR, MO, DY, LAT (°N), LON (°W), MAG. Lists significant seismic events from 1774 to 2004.

- EXPLANATION: Magnitude Classes By Color, Earthquake Catalog Source, County Name, etc.
- ABBREVIATED MODIFIED MERCALLI INTENSITY SCALE: I Not felt except by a very few under especially favorable conditions...


- PSI: Foreboreck
- ME: Mine event
- TECHNICAL NOTES: The earthquakes shown on the maps were drawn from three catalogs: SIGUS, PDE, and SEISSN.

- INTENSITY AND MAGNITUDE: Intensity is a measure of the effects of shaking upon people, buildings, and in extreme cases, the landscape (see table above).


- REFERENCES CITED AND ADDITIONAL SCIENTIFIC ARTICLES: Bollinger, G.A., Johnson, A.C., Talwani, Pradeep, Long, L.T., Sheddick, K.M., Sibol, M.S., and Chapman, M.C., 1991.

- INFORMATION SOURCES ON THE WEB: (If you lack access to the World-Wide Web, your public library may have it.)

Generalized Seismic Hazard

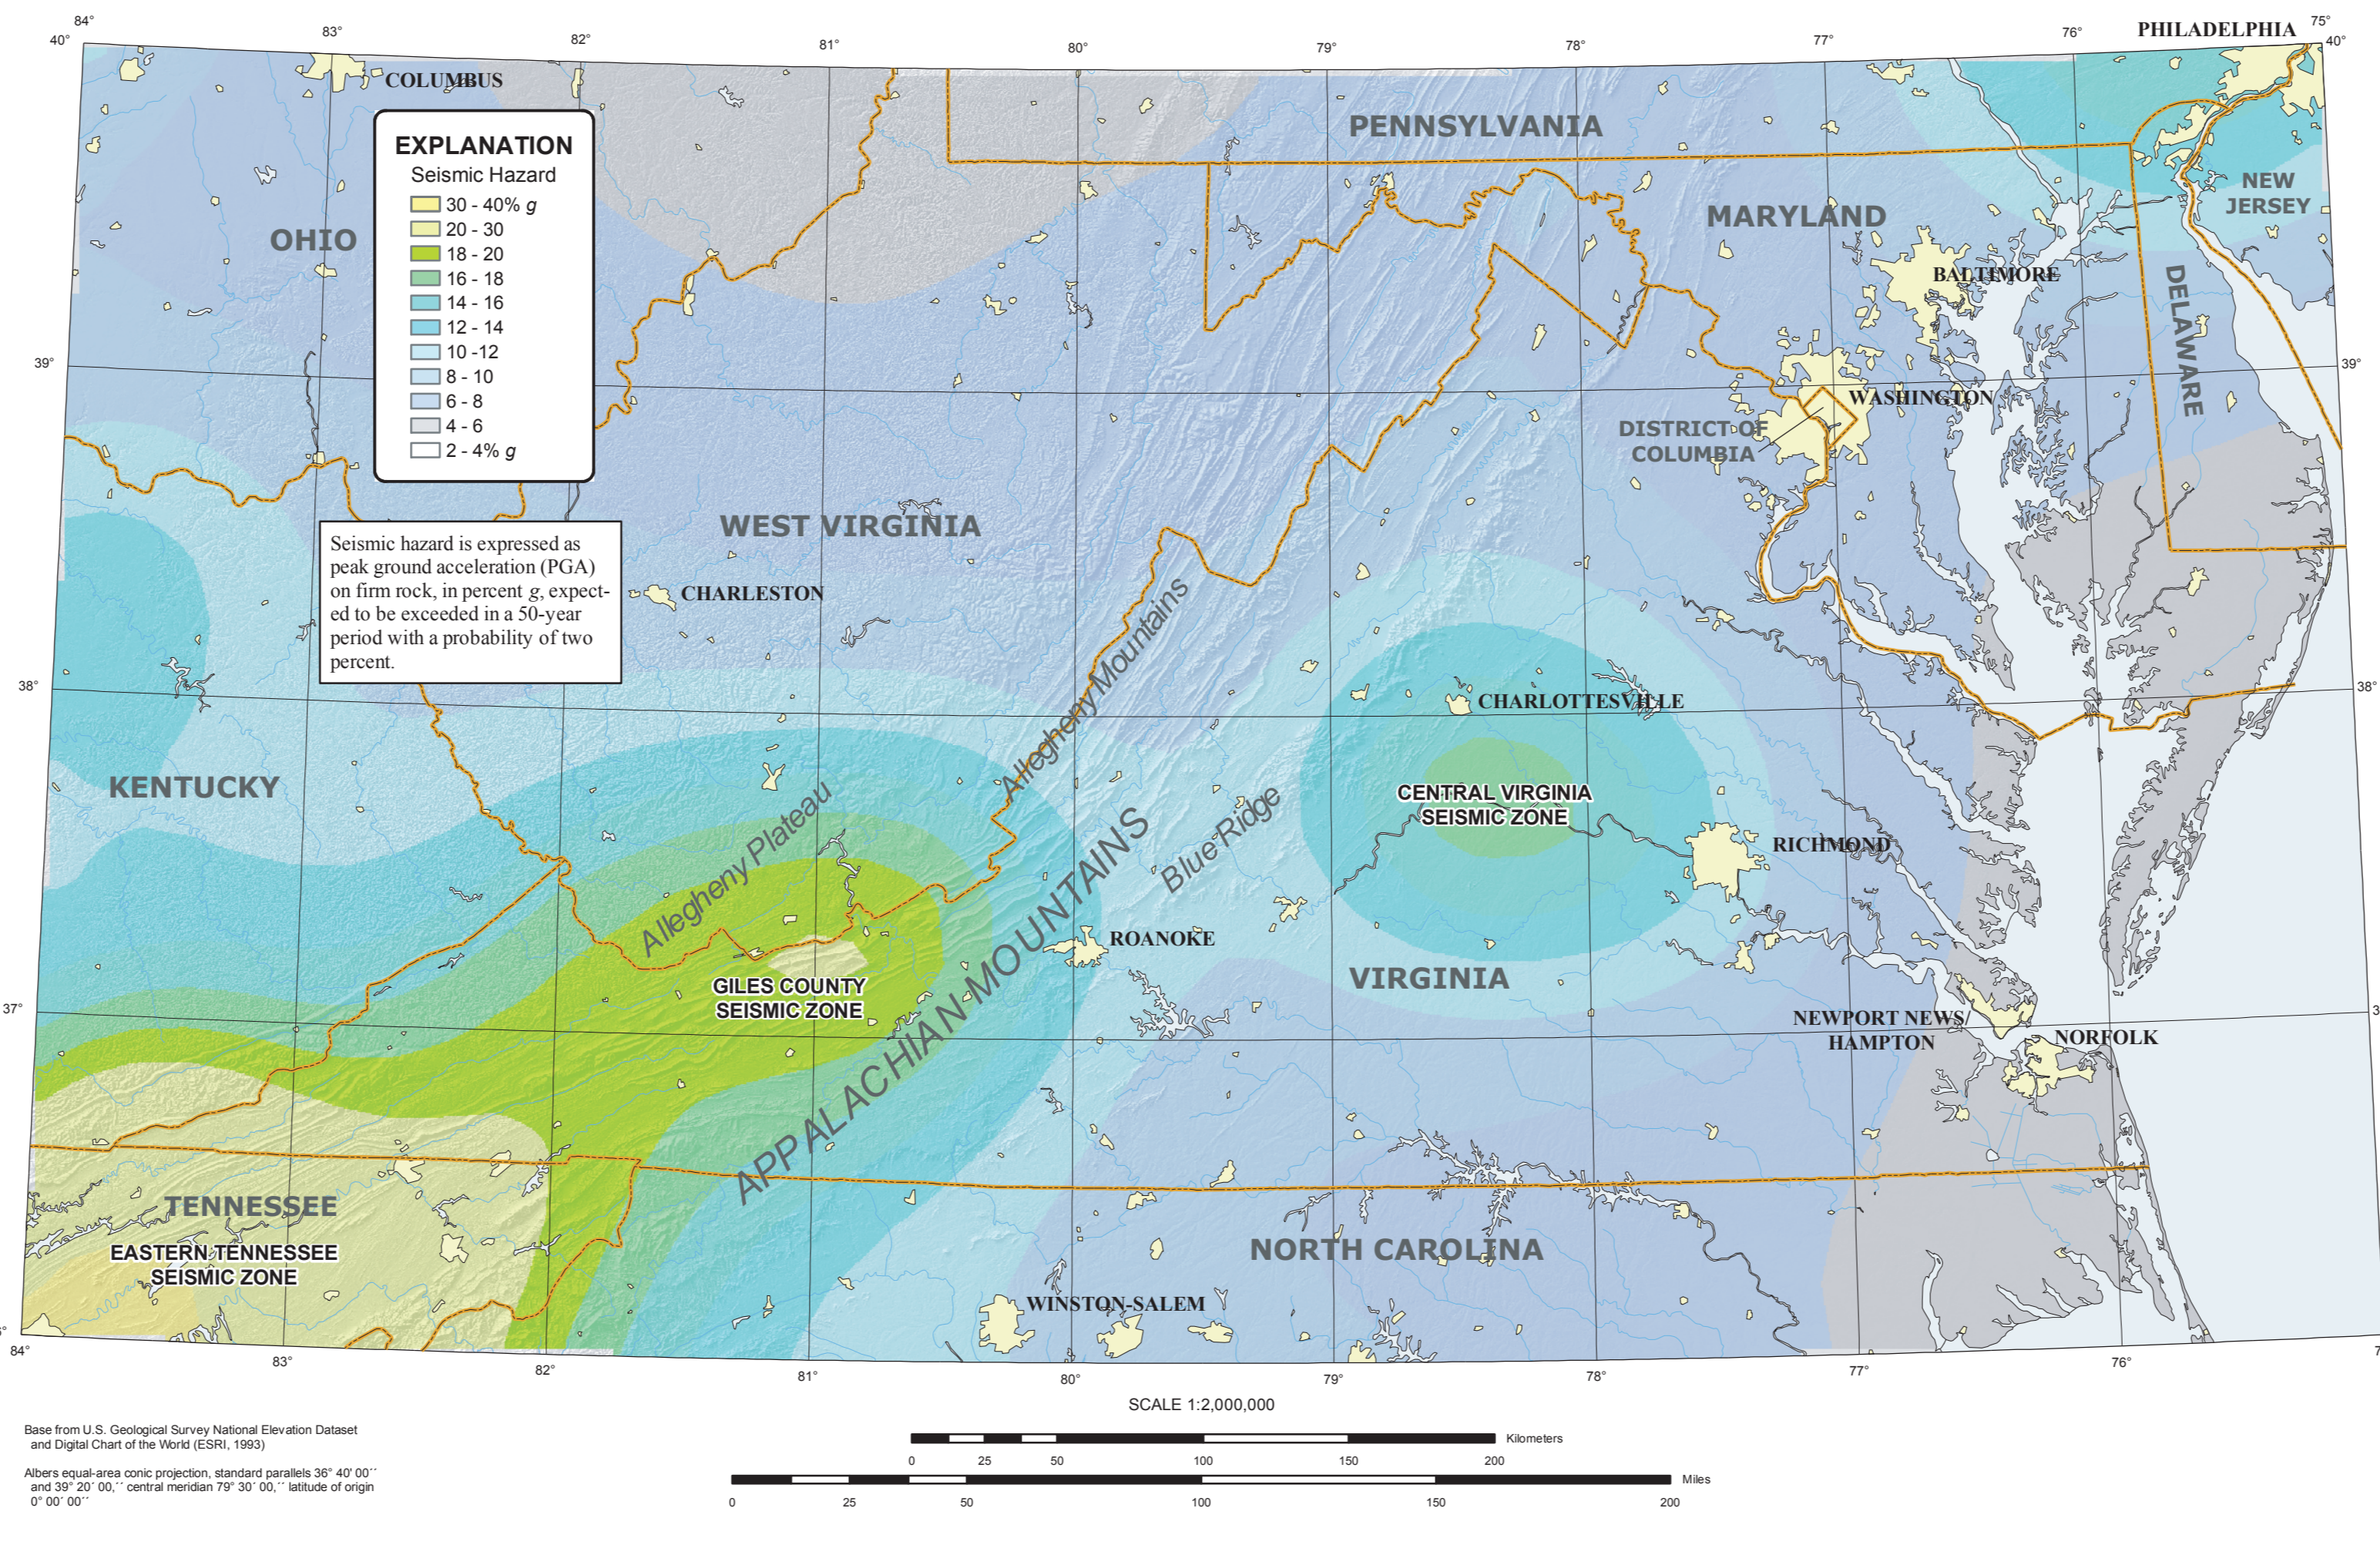

May 31, 1897, Giles County, Virginia Earthquake

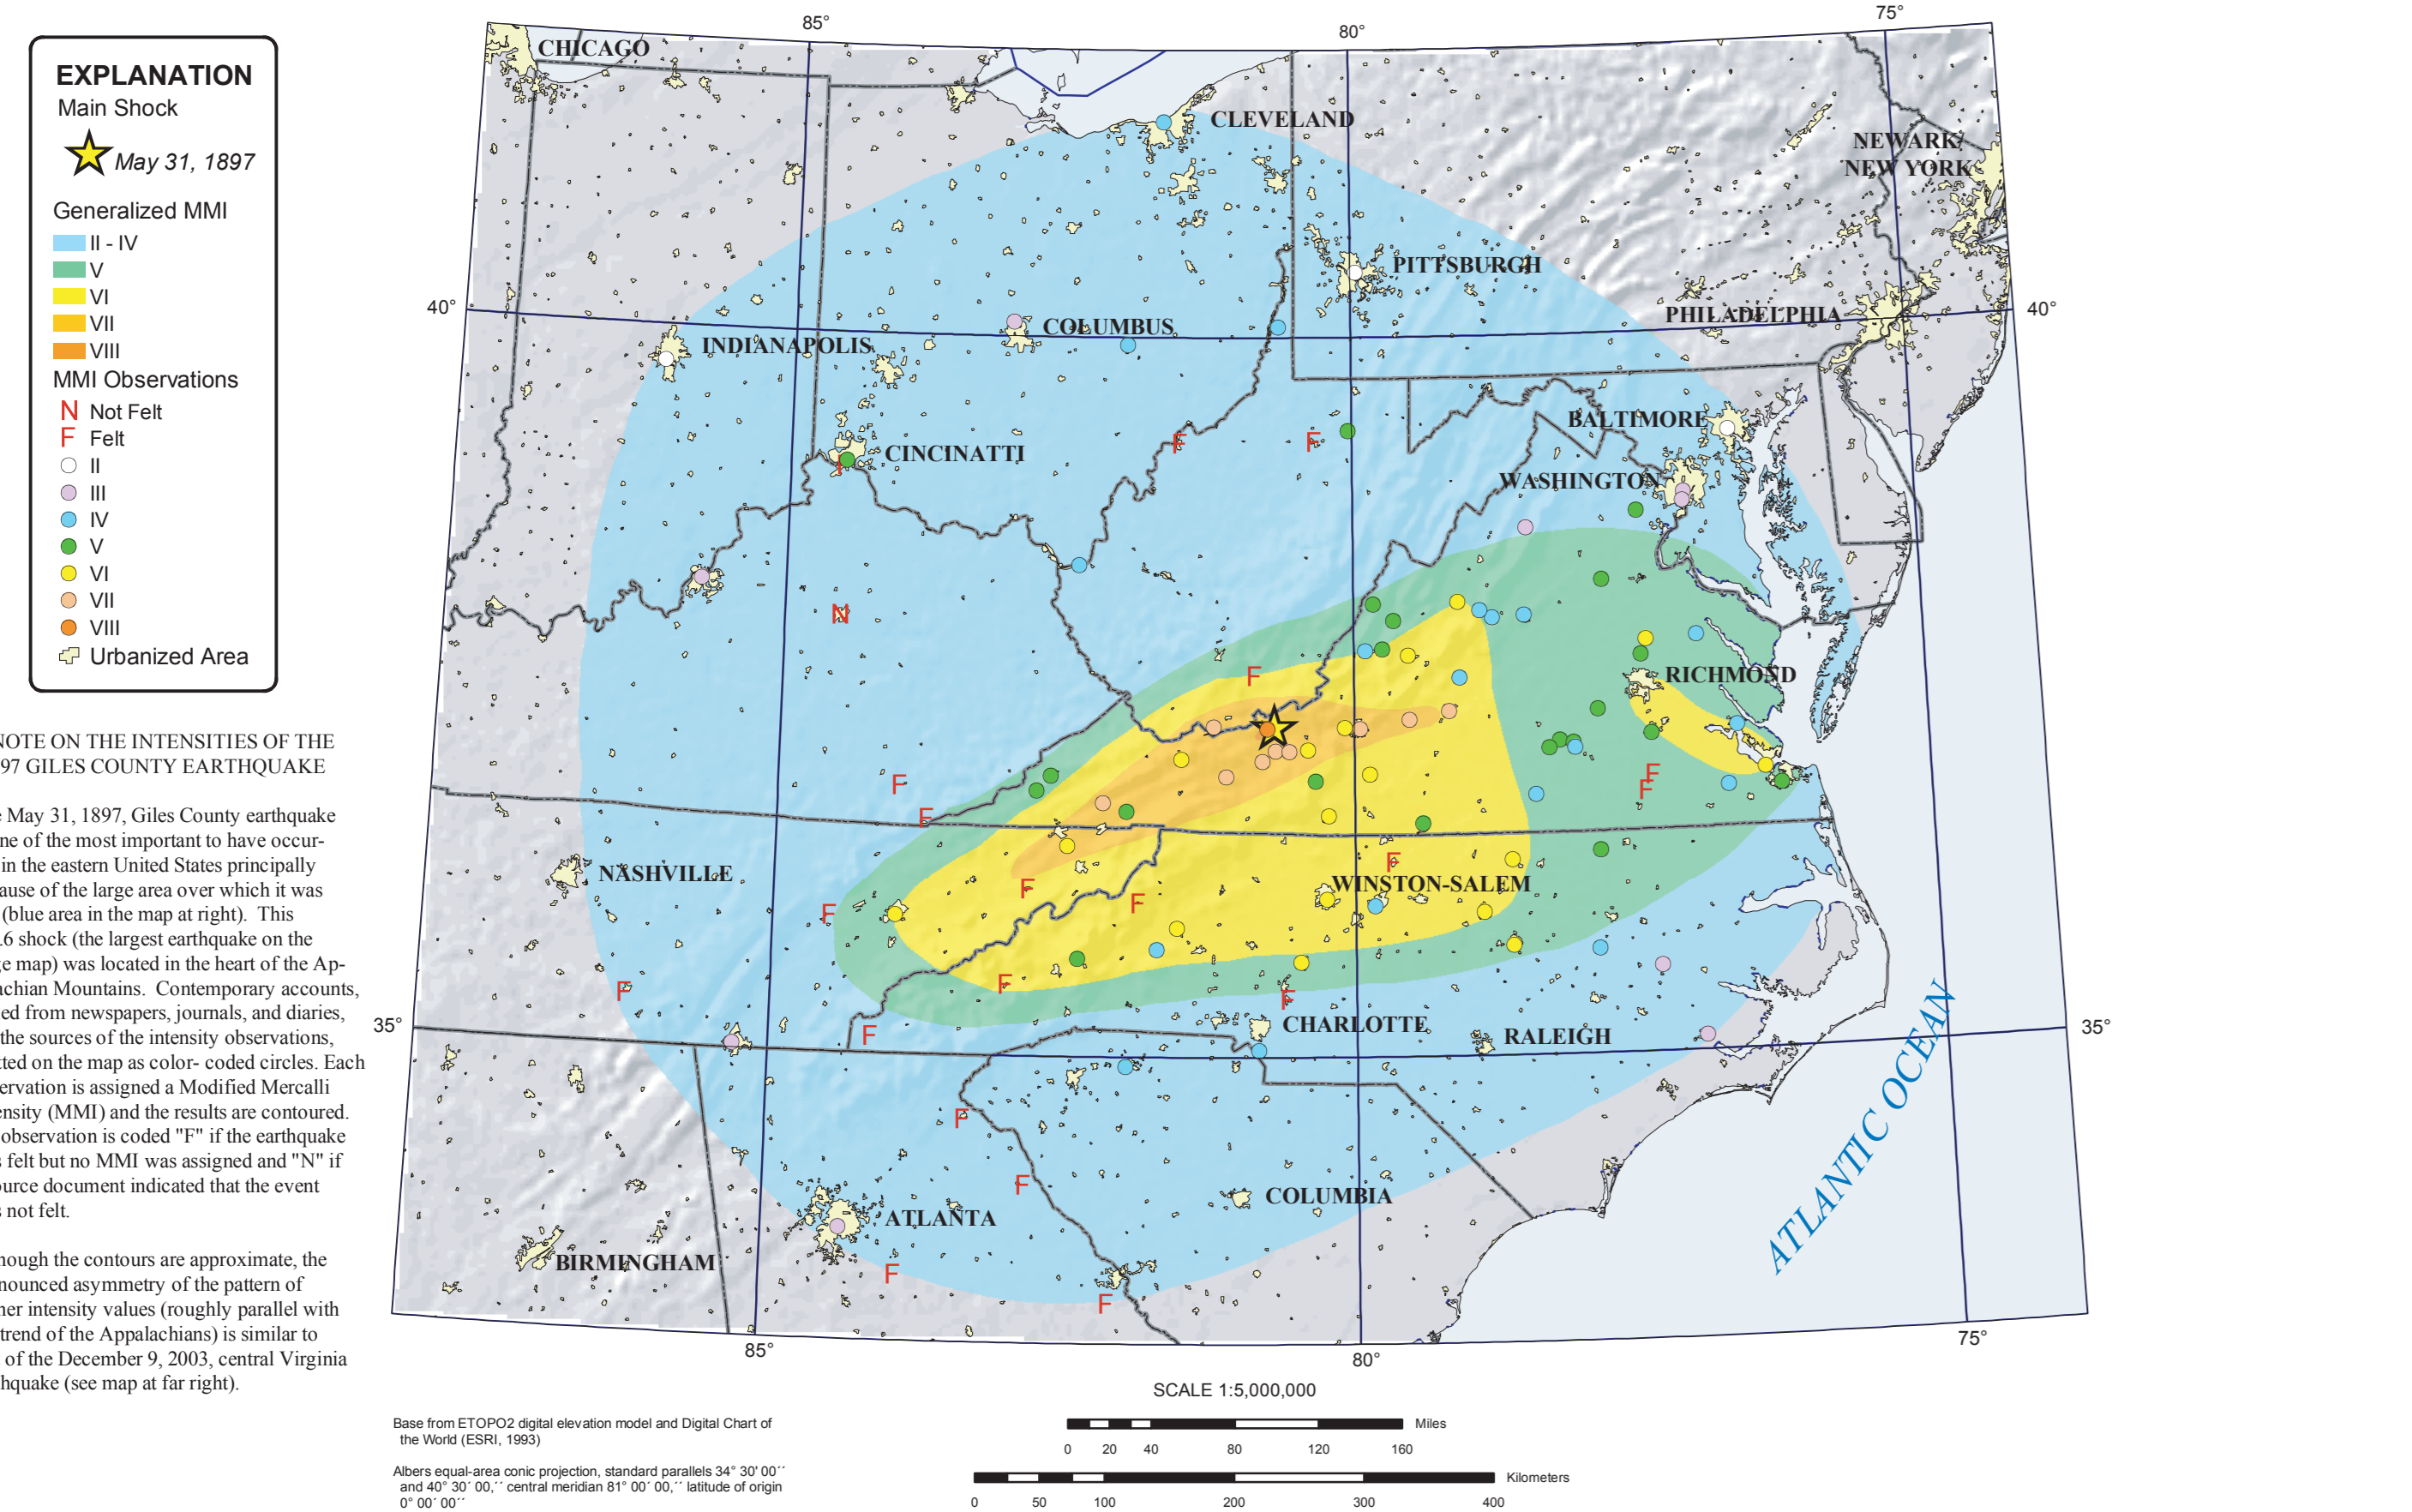

December 9, 2003, Central Virginia Earthquake

