



SITE Technology Capsule **Evaluation of Soil Amendment Technologies at the Crooksville/ Roseville Pottery Area of Concern** **STAR Organics Soil Rescue**

Introduction

In 1980, the U.S. Congress passed the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA), also known as Superfund, which is committed to protecting human health and the environment from uncontrolled hazardous waste sites. CERCLA was amended by the Superfund Amendments and Reauthorization Act (SARA) in 1986. SARA mandates implementing permanent solutions and using alternative, innovative treatment or resource recovery technologies to the maximum extent possible.

State and federal agencies and private organizations are exploring a growing number of innovative technologies for treating hazardous wastes. These new technologies are needed to remediate the more than 1,200 sites on the National Priorities List. The sites involve a broad spectrum of physical, chemical, and environmental conditions requiring diverse remedial approaches.

The U.S. Environmental Protection Agency (EPA) is engaged in a number of activities that are focused on exploring and applying innovative technologies to Superfund site remediation. One EPA initiative to accelerate the development, evaluation, and use of innovative site remediation technologies is the Superfund Innovative Technology Evaluation (SITE) Program. One of the goals of the SITE Program is to disseminate information about innovative technologies to the user community. This Technology Capsule is one of the documents the SITE Program uses to meet this goal.

EPA SITE Technology Capsules summarize the latest information available on innovative technologies. The Technology Capsules assist EPA remedial project managers, EPA on-site coordinators, contractors, and other remedial managers in evaluating site-specific information to determine a technology's applicability for site remediation.

This Technology Capsule provides information on the Star Organics, L.L.C. (Star Organics), Soil Rescue remediation fluid. Star Organics developed the technology to remediate

heavy metals in soil. The remediation fluid was evaluated in September, 1998 at a site in southeastern Ohio. The Soil Rescue remediation process was applied *in situ* to residential and industrial soils contaminated with lead from pottery factory waste.

This Technology Capsule describes the Soil Rescue remediation process and summarizes results from the SITE evaluation. The capsule includes the following information:

- Abstract
- Site Background
- Technology Description
- Evaluation Activities
- Technology Applicability
- Performance Data
- Technology Status
- Sources of Further Information

Abstract

Soil Rescue remediation fluid consists of organic phosphorus compounds and weak organic acids that bind with heavy metal contaminants in soils, sludges, and sediments. The technology is based on a chelation process where a heavy metal ion is attached to ligands in the remediation fluid to form complex metallic compounds.

The EPA SITE Program evaluated a pilot-scale, *in situ* application of the remediation fluid at two sites in September 1998. The fluid was sprayed onto the surface of the lead-contaminated soil and then was injected to a depth of 2 feet.

During the evaluation, SITE Program personnel collected untreated and treated soil samples to evaluate the technology's performance with respect to primary and secondary evaluation objectives.

The soil samples were analyzed for lead concentrations using the Toxicity Characteristic Leaching Procedure (TCLP) and in-vitro method for bioavailable lead to support two primary objectives. Primary objective 1 (P1) was to evaluate whether Soil Rescue can treat soil contaminated with lead to meet the Resource Conservation and Recovery Act (RCRA)/Hazardous and Solid Waste Amendments (HSWA) alternative universal treatment standards (UTS) for land disposal of soils contaminated with lead. The alternative UTS for soil contaminated with lead is determined from the results of the toxicity characteristic leaching procedure (TCLP). The alternative UTS is met if the concentration of lead in the TCLP extract is no higher than one of the following: (1) 7.5 milligrams per liter (mg/L), or (2) 10 percent of the lead concentration in the TCLP extract from the untreated soil. Contaminated soils with TCLP lead concentrations below the alternative UTS meet the RCRA land disposal restrictions (LDR), and thus are eligible for disposal in a land-based RCRA hazardous waste disposal unit. The alternative UTS is defined further under Title 40 of the Code of Federal Regulations (CFR), Chapter I, part 268.49 (40 CFR 268.49). To meet that objective, soil samples were collected before and after the application of Soil Rescue. The untreated and treated soil samples were analyzed for TCLP lead concentrations to evaluate whether the technology met objective P1. Analysis of the data demonstrated Soil Rescue reduced the mean TCLP lead concentration at the inactive pottery factory from 403 mg/L to 3.3 mg/L, a reduction of more than 99 percent. Therefore, the treated soil meets the alternative UTS for soil at the inactive pottery factory. Data from the trailer park were not used to evaluate P1 because TCLP lead concentrations in all treated and untreated soil samples from this location were either at or slightly higher than the detection limit of 0.05 mg/L.

Primary objective 2 (P2) was to evaluate whether Soil Rescue could decrease the soil lead bioaccessibility by 25 percent or more, as defined by the Solubility/Bioaccessibility Research Consortium's (SBRC) Simplified In-Vitro Test Method for Determining Soil Lead and Arsenic Bioavailability (simplified in vitro method [SIVM]). However, EPA Lead Sites Workgroup (LSW) and Technical Review Workgroup for lead (TRW) at this time, do not endorse an in-vitro test for determining soil lead bioaccessibility (Interstate Technology and Regulatory Cooperation [ITRC] 1997). To meet objective P2, soil samples were collected before and after the application of Soil Rescue. The soil samples were analyzed for soil lead bioaccessibility to evaluate whether the technology met objective P2. Analysis of the data demonstrates that Soil Rescue reduced the soil lead bioaccessibility by approximately 2.9 percent, which is less than the project goal of at least a 25 percent reduction in soil lead bioaccessibility. However, it was recognized early on that meeting this goal would be difficult because the SIVM test procedure used in the demonstration involves a highly acidic sample digestion process, which may be revised in the future, because it may be ex-

ceeding the acid concentrations that would be expected in human stomach fluids.

Using information obtained from the SITE evaluation, the technology developer, and other sources, an economic analysis examined 12 cost categories for a scenario in which the Soil Rescue remediation fluid was applied at full scale to treat lead-contaminated soil at a Superfund site. The cost estimate assumed the site was 1 acre in size, and the treatment was applied to a depth of 6 inches. These assumptions result in a total treated volume of approximately 807 cubic yards of soil. The estimate assumes that the site's soil characteristics and lead concentrations were similar to those encountered during the SITE evaluation. Based on these assumptions, the total costs were estimated to be \$32,500 per acre, or \$40.27 per cubic yard of soil treated. Costs for application of the Soil Rescue remediation fluid may vary significantly from this estimate, depending on site-specific factors.

The SITE Program evaluation of the Soil Rescue remediation fluid, described in detail in an Innovative Technology Evaluation Report, was based on the nine decision-making criteria used in the Superfund feasibility study process. Results of the evaluation are summarized in Table 1.

Site Background

The villages of Crooksville and Roseville, located along the Muskingum/Perry County line in southeastern Ohio, are famous for a long history of pottery production. Lead compounds were used in pottery glazes until they were replaced during the last 20 years.

In 1996, the Ohio Environmental Protection Agency (OEPA) entered into a cooperative agreement with the EPA to conduct a Geographic Initiative (GI) of the Crooksville/Roseville Pottery Area of Concern (CRPAC). The purpose of the investigation was to determine if the pottery operations in the CRPAC resulted in heavy metal contamination of the soil, groundwater, surface water, and ambient air.

Analytical results from samples collected for the GI investigation in mid-1997 identified 14 pottery waste disposal sites with significant lead contamination in shallow soil. OEPA is seeking innovative technologies that will remediate the lead in the soil in the CRPAC.

SITE Program personnel collected soil samples from four sites throughout the CRPAC in May, June, and August 1998. These samples were analyzed for TCLP lead concentrations and relative percent bioavailable lead concentrations. The analytical results and visual observations were used to characterize soil to enable selection of the evaluation sites.

The two locations selected for the SITE demonstration were an inactive pottery factory in Roseville, Ohio, and a residential trailer park, also in Roseville. The principal reasons for the selection of the inactive pottery factory in Roseville were that it appeared to have higher concentrations of lead than any of the other locations and it was more readily accessible than the other pottery factories under consideration. The trailer park was selected for the SITE demonstration primarily be-

Table 1. Evaluation of Soil Rescue Compared to the Nine Criteria for Superfund Feasibility Studies	
Criterion	Discussion
1. Overall Protection of Human Health and the Environment	The technology is expected to significantly lower the leachability of lead from soils as indicated by the TCLP results, thereby reducing the migration of lead to groundwater and the potential for exposure of all receptors to lead; however, the technology did not significantly reduce soil lead bioaccessibility.
2. Compliance with Applicable or Relevant and Appropriate Requirements (ARARs)	During the SITE demonstration, Soil Rescue reduced the mean TCLP lead concentration from 402 mg/L to 3.3 mg/L, a reduction of more than 99 percent. Further, the treated TCLP lead concentrations were less than the alternative UTS for lead in soil. Therefore, the treated soil met the land disposal restrictions (LDR) for lead contaminated soil, as specified in 40 CFR 268.49. However, the technology's ability to comply with existing federal, state, or local ARARs should be determined on a site-specific basis.
3. Long-term Effectiveness and Permanence	The analytical results of procedures for MEP lead, pH, and CEC suggest long-term chemical stability of the treated soil. The analytical results of a number of other procedures do not suggest long-term chemical stability of the treated soil. Those procedures included two types of total lead analyses, analysis for total phosphates, and analysis for SPLP phosphates. The results related to long-term effectiveness from the test for lead speciation by scanning electron microscopy and, lead speciation by sequential extraction, Eh, acid neutralization, and SPLP lead were inconclusive.
4. Short-term Effectiveness	Short-term effectiveness is high; measures for dust control and surface runoff controls may be required at some sites.
5. Reduction of Toxicity, Mobility, or Volume through Treatment	The mean TCLP lead concentration was reduced from 403 mg/L to 3.3 mg/L, reducing the mobility of the lead in the soil.
6. Implementability	The technology is relatively easy to apply. Contaminated areas can be treated with a fertilizer sprayer for treating soils to a depth of 6 inches and a pressure injection apparatus for treating depths of more than 6 inches.
7. Cost	For full-scale application of the technology at a 1-acre site contaminated with lead in the top 6 inches of soil, the estimated costs are \$32,500, or \$40.27 per yd ³ of soil treated.
8. Community Acceptance	Community acceptance of Soil Rescue likely will be a site-specific issue.
9. State Acceptance	State acceptance of Soil Rescue likely will be a site-specific issue.

cause it was a residential setting. At the time the selection was made, there was some concern that the concentrations of lead at the trailer park might be too low because they did not exceed 400 mg/kg, the residential preliminary remediation goal (PRG) for lead established by EPA (EPA 2000). However, previous field sampling conducted by OEPA with X-ray fluorescence (XRF) analyzers had indicated that total concentrations of lead in the soil at the trailer park were well above 400 mg/kg.

Technology Description

Soil Rescue remediation fluid consists of a mixture of weak organic acids and phosphoryl esters that act as metal complexing agents. In the complexation reaction, coordinate covalent bonds are formed among the metal ions, the organic acids and esters, and the soil substrate. The

remediation fluid can be applied to the surface or pressure injected to a depth of 15 feet into contaminated soil. The application can be repeated until the metal concentrations in the soil are reduced below applicable cleanup standards.

The Soil Rescue remediation fluid does not destroy or remove toxic concentrations of metals. Star Organics claims that the metal complexes formed by Soil Rescue immobilize the metal, which reduces the TCLP metal concentrations in soils to less than regulated levels, subsequently reducing the risks posed to human health and the environment.

Evaluation Activities

SITE Program personnel prepared the evaluation sites by removing the sod, tilling the soil, and collecting samples of untreated soil. Evaluation activities began on September 21,

1998. SITE Program personnel located several experimental units in the trailer park and at the inactive pottery factory. The sod was removed from the experimental units, and the units in the trailer park were tilled to a depth of 6 inches using a garden tiller. The units at the inactive pottery factory were tilled using a backhoe to a depth of 6 inches. SITE Program personnel screened the experimental units with a field XRF analyzer for total lead concentrations. The screening results were used to select the units with high lead concentrations. The Soil Rescue remediation fluid was then applied to 10 experimental units in the trailer park and one experimental unit at the inactive pottery factory. The experimental units at the trailer park measured 5 feet wide by 5 feet long, and the unit at the inactive pottery factory measured 3 feet wide by 6 feet long. Although Star Organics injected the remediation fluid to a depth of 2 feet, the depth evaluated during this evaluation was limited to 6 inches.

Sampling of untreated soil in the trailer park consisted of collecting composite soil samples from each experimental unit. The composite soil samples were formed by collecting approximately 1900 cubic centimeters of soil from five locations (each corner and the middle) of the experimental unit. The soil was collected using a stainless steel spoon or trowel and placed into a stainless steel bowl. The samples were sieved through a brass, 0.375-inch sieve into a plastic, 5-gallon bucket. All particles larger than 0.375 inch were returned to the stainless steel bowl. The percentage of the particles that did not pass through the sieve was estimated and recorded in the logbook. The composite sample was mixed in the bucket for 1 minute before the sample containers were filled.

Sampling of untreated soil at the inactive pottery factory consisted of collecting five grab samples from one experimental unit. Approximately 1,900 cubic centimeters of soil were collected for each grab sample (one sample was collected from each corner and from the middle) within the unit. The soil was collected using a stainless steel spoon or trowel and placed into a stainless steel bowl. The soil sample was sieved through a 0.375-inch sieve into a plastic, 5-gallon bucket. The percentage of the particles that did not pass through the sieve was estimated and recorded in the logbook. Each grab sample was mixed in the bucket for 1 minute before the sample containers were filled. The individual grab samples were not composited.

Star Organics applied the Soil Rescue remediation fluid after the sampling of untreated soil was completed at each experimental unit. The Soil Rescue remediation fluid was sprayed onto the surface and pressure injected into the soil. The remediation fluid was injected to a depth of two feet.

SITE Program personnel collected samples of treated soil from the experimental units a minimum of 72 hours after treatment with Soil Rescue. Samples of treated soil were collected from the trailer park using the same techniques as the untreated soil samples; at the pottery factory, however, four additional grab samples were collected from the midpoints between the corners on each side.

Technology Applicability

According to Star Organics, the Soil Rescue remediation fluid has been effective in reducing concentrations of barium, cadmium, chromium, copper, lead, mercury, selenium, and zinc. Star Organics indicated that the technology can be applied using only surface spraying where contamination is shallow (up to 6 inches) and the soil is moderately permeable.

Technology Limitations

In dense or heavily compacted soils, the remediation procedure may require soil excavation and application of the Soil Rescue remediation fluid to moisten the media, followed by mixing in a rotating cylinder. For sites with high concentrations of heavy metals, the application process may require subsequent treatments until the concentrations of heavy metals in the media are reduced to below the applicable cleanup standards.

Site Requirements

Star Organics determines a site-specific concentration of the Soil Rescue remediation fluid through bench-scale studies on soil samples. The site must be evaluated to determine the contaminant concentration throughout the site, and the concentration of other metals that may be present at the site. The site conditions, such as soil type, depth of contamination, and moisture content, must be evaluated to determine the application procedure and equipment requirements.

The remediation fluid may be applied with equipment mounted on a truck, or with common farming equipment. The site should be accessible to wheeled or tracked vehicles and have sufficient storage space for the required volume of remediation fluid. Potable water is required for equipment and personnel decontamination.

Process Residuals

Based on existing data, it appears that application of the Soil Rescue remediation fluid generates little residual wastes. The chemicals in the remediation fluid bond with the lead to form an insoluble complex. However, personal protective equipment and the decontamination fluids that contact lead-contaminated soil may require management as potentially hazardous waste.

Performance Data

Primary and secondary objectives were established for this SITE evaluation to provide criteria for evaluating technology performance. To achieve the evaluation objectives, SITE Program personnel collected untreated and treated soil samples from the experimental units.

Primary Objectives

Primary objective 1 (P1) was to evaluate whether Soil Rescue can treat soil contaminated with lead to meet the Resource Conservation and Recovery Act (RCRA)/Hazardous and Solid Waste Amendments (HSWA) alternative universal treatment standards (UTS) for land disposal of soils contaminated with lead. The alternative UTS for soil contaminated with lead is determined from the results of the toxicity characteristic leaching procedure (TCLP). The alternative UTS

is met if the concentration of lead in the TCLP extract is no higher than one of the following: (1) 7.5 milligrams per liter (mg/L), or (2) 10 percent of the lead concentration in the TCLP extract from the untreated soil. Contaminated soils with TCLP lead concentrations below the alternative UTS meet the RCRA land disposal restrictions (LDR), and thus are eligible for disposal in a land-based RCRA hazardous waste disposal unit. The alternative UTS is defined further under Title 40 of the Code of Federal Regulations (CRF), Chapter I, part 268.49 (40 CFR 268.49). To meet that objective, soil samples were collected before and after the application of Soil Rescue. The untreated and treated soil samples were analyzed for TCLP lead concentrations to evaluate whether the technology met objective P1. Analysis of the data demonstrated Soil Rescue reduced the mean TCLP lead concentration at the inactive pottery factory from 403 mg/L to 3.3 mg/L, a reduction of more than 99 percent. Therefore, the treated soil meets the alternative UTS for soil.

Primary objective 2 (P2) was to evaluate whether Soil Rescue could decrease the soil lead bioaccessibility by 25 percent or more, as defined by the Solubility/Bioaccessibility Research Consortium's (SBRC) Simplified In-Vitro Test Method for Determining Soil Lead and Arsenic Bioaccessibility (simplified in vitro method [SIVM]). However, EPA Lead Sites Workgroup (LSW) and Technical Review Workgroup for lead (TRW) at this time, do not endorse an in-vitro test for determining soil lead bioaccessibility (Interstate Technology and Regulatory Cooperation [ITRC] 1997). To meet objective P2, soil samples were collected before and after the application of Soil Rescue. The soil samples were analyzed for soil lead bioaccessibility to evaluate whether the technology met objective P2. Analysis of the data demonstrates that Soil Rescue reduced the soil lead bioaccessibility by approximately 2.9 percent, which is less than the project goal of at least a 25 percent reduction in soil lead bioaccessibility. However, it was recognized early on that meeting this goal would be difficult because the SIVM test procedure used in the demonstration involves a highly acidic sample digestion process (pH = 1.5), which may be revised in the future, because it may be exceeding the acid concentrations that would be expected in human stomach fluids.

Secondary Objectives

The secondary objectives of the demonstration were:

- S1 Evaluate the long-term chemical stability of the treated soil.
- S2 Demonstrate that the application of Soil Rescue did not increase the public health risk of exposure to lead.
- S3 Document baseline geophysical and chemical conditions in the soil before the application of Soil Rescue.
- S4 Document the operating and design parameters of Soil Rescue.

S1 was evaluated primarily by analyzing soil samples using the following analytical procedures: the multiple extraction procedure (MEP), lead speciation using a scanning electron microscope (SEM), lead speciation with a sequential extrac-

tion procedure, oxidation-reduction potential (Eh), pH, cation exchange capacity (CEC), acid neutralization capacity, total lead (as determined by two different methods), leachable lead by the synthetic precipitation leaching procedure (SPLP), total phosphates, and SPLP-leachable phosphates. The evaluation was accomplished by comparing the results of the analytical procedures on soil samples collected from both sites before and after application of Soil Rescue. Secondary objective S2 was evaluated by collecting air samples during the sod removal, tilling, and soil sampling operations and calculating exposure based on the total lead analysis of the air sample filters. Air samples were collected during the collection of untreated and treated soil samples. Secondary objective S3 was evaluated by analyzing soil samples from the experimental units at both demonstration sites for plasticity, moisture content, predominant clay type of the soil, the presence of volatile organic carbons (VOCs), semivolatile organic compounds (SVOCs), oil and grease content, and humic and fulvic acid concentrations. Secondary objective S4 was established to provide data for estimating costs associated with use of the Soil Rescue remediation fluid and was based on observations during the evaluation and data to be provided by Star Organics.

Site Evaluation Results

This section summarizes the results of the SITE evaluation and includes an evaluation of the primary and secondary objectives.

Evaluation of Objective P1

The TCLP lead concentrations from the inactive pottery factory were used to evaluate objective P1. The TCLP extraction was performed according to SW-846 Method 1311. The extracts were digested by SW-846 Method 3010A, and the lead concentration was determined using ICP-AES according to SW-846 Method 6010B. Soil samples from the inactive pottery factory were collected before and after application of the technology. The results from analyses of the treated soil were evaluated to determine if the lead in the soil was leaching at levels above the alternative UTS of 7.5 mg/L TCLP lead.

The data analysis shows that the Soil Rescue remediation fluid reduced the TCLP lead concentration to below the alternative UTS of 7.5 mg/L at the inactive pottery factory site. The technology reduced the mean TCLP lead concentration from 403 mg/L to 3.3 mg/L. Therefore, the TCLP lead concentrations were reduced by at least 90 percent. Table 2 summarizes the TCLP lead data from five sampling locations within the experimental unit at the inactive pottery factory site.

Evaluation of Objective P2

Objective P2 requires using an in-vitro test to evaluate the relative percentages of bioavailable lead in untreated and treated soils from the trailer park site. For this demonstration, the simplified in vitro method (SIVM) developed by the Solubility/Bioavailability Research Consortium (SBRC) was selected to evaluate the relative percent bioavailability of lead in soil. The SBRC consists of representatives from the federal and state regulatory agencies, academia and other research organizations, and the regulated community. The

Table 2. TCLP Lead Results from the Soil Rescue Evaluation			
Experimental Unit	Sampling Location	Untreated Soil TCLP Lead Concentration (mg/L)	Treated Soil TCLP Lead Concentration (mg/L)
U	1	453	3.2
U	2	376	3.0
U	3	411	3.6
U	4	364	3.5
U	5	411	3.1
U	6	ns	4.0
U	7	ns	2.9
U	8	ns	3.2
U	9	ns	3.2

Note:
n/s = Statistical experimental design only required five pretreatment samples for TCLP analysis. Nine grab post-treatment samples were collected instead of five to obtain a more precise estimate of the post-treatment mean.

SIVM determines the relative percent of bioavailability of lead in soil by calculating the ratio of the lead in the sample before extraction to the amount of lead that leached using an extraction solution that simulates gastric fluid. However, the EPA Lead Sites Workgroup (LSW) and the EPA Technical Review Workgroup (TRW) for lead, at this time, do not endorse an in-vitro test for determining lead bioavailability.

The relative percent bioavailable data is used to determine if the technology would reduce the risk of exposure to the bioavailable lead in the soil. The risk of exposure is determined by calculating the percent reduction in the relative percent bioavailable lead, which is calculated by dividing the relative percent bioavailable lead after the application of the technology to the relative percent bioavailable lead before the application of the technology and multiplying by 100.

The data are not intended to be used to support a risk-based cleanup level for the soil, such as a level that is determined using the EPA's Integrated Exposure Uptake Biokinetic model (IEUBK). IEUBK is used to determine if the lead exposure (from various sources) on a residential property has no more than a 5 percent probability that a child's blood lead level will exceed 10 micrograms per deciliter.

The technology decreased the relative percent bioavailable lead by approximately 2.9 percent. Although the technology did not achieve the goal of objective P2, which is reducing the relative percent bioavailable lead by 25 percent, it was recognized early on that meeting this goal would be difficult because the SIVM test procedure used in the demonstration involves a highly acidic sample digestion process. The SIVM process may be revised in the future, because it may be exceeding the acid concentrations that would be expected

in a human stomach. Table 3 summarizes the bioavailable lead data. Figure 1 compares the relative percent bioavailable lead in the residential soil before and after treatment.

Evaluation of Objective S1

Objective S1 was evaluated using the results of 11 analytical procedures that were conducted to predict the long-term chemical stability of the treated soil. Soil treated with Soil Rescue appears to exhibit overall long-term chemical stability. However, the results of some of the analytical procedures suggest that Soil Rescue does not appear to exhibit long-term chemical stability. In summary:

- Long-term soil chemical stability was indicated for soils treated by Soil Rescue at both test locations, as indicated by the analytical results of the multiple extraction procedure (MEP), pH, and cation exchange capacity (CEC) test procedures. The CEC results are considered to be qualitative, because this test was conducted on only a single sample from each location.
- Long-term chemical stability was indicated at one site, but not indicated at the other, by the analytical results of procedures for evaluating acid neutralization capacity, and leachable lead by the simulated precipitation leaching procedure (SPLP). The results from the procedure for evaluating lead speciation by sequential extraction indicated chemical stability inconclusively at one site, but not at all at the other. The results of tests on acid neutralization capacity are considered to be qualitative, because this test was conducted on only a single sample from each location.
- The analytical results from the lead speciation test by scanning electron microscopy (conducted only on

Table 3. Relative Percent Bioavailable Lead Results from the Soil Rescue Evaluation

Experimental Unit	Untreated Soil % Bioavailable Lead	Treated Soil % Bioavailable Lead
C	50.4	44.2
G	70.4	68.9
K	57.6	64.0
L	67.0	65.9
M	58.3	63.2
N	58.1	56.7
O	47.9	52.1
Q	52.5	41.8
R	46.2	50.1
T	43.8	32.5

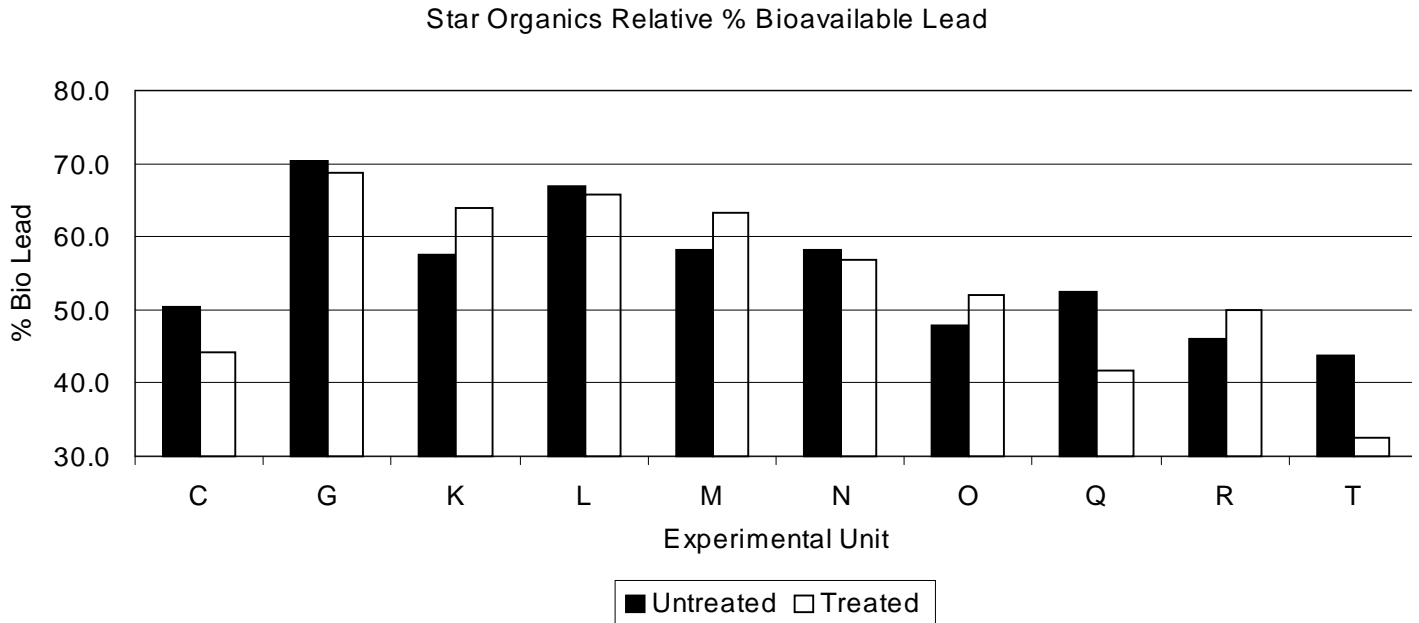


Figure 1. Relative percent bioavailable lead before and after treatment.

soils from the trailer park) were inconclusive, in that some soluble phases of lead were reduced, while the organic matter phase of lead was increased (organically bound lead can be released if the organic phase is biologically degraded by microbes in the soil).

- At both locations, long-term chemical stability was not indicated for soils treated by Soil Rescue, as indicated by the analytical results from oxidation-reduction (Eh) analysis, two types of total lead analyses (one using nitric and the other using hydrofluoric acid); analysis for total phosphates; and analysis for leachable phosphates by the SPLP. (It should be noted that the tests involving two types of total lead analysis were extremely aggressive tests, thus meeting the acceptance criteria established for these tests; but they were not as important as meeting the acceptance criteria of other tests involving long-term chemical stability.)

Evaluation of Objective S2

SITE Program personnel collected air samples during pre-demonstration operations (sod removal, tilling and soil sampling) and calculated exposure based on the total lead analysis of the air sampling filters. However, since the Soil Rescue reagent is normally injected into the soil and does not require sod removal and tilling, the data collected under this objective may not be typical of the ambient air quality during application of the Soil Rescue process. Ten out of 11 samples did not indicate the presence of lead above the detection limit of 0.004 mg/m³. The result above the detection limit, 0.024 mg/m³, was found to be within applicable exposure guidelines, which include the Occupational Health and Safety Administration Permissible Exposure Limits (OSHA PELs), the American Conference of Governmental Industrial Hygiene Threshold Limit Values (ACGIH TLVs), the National Institute for Occupational Safety and Health Recommended Exposure Limits (NIOSH RELs), and the National Ambient Air Quality Standards Program (NAAQS) limits. Based on these results, the risk to public health and worker exposure was not increased due to the demonstration activities.

Evaluation of Objective S3

Soil samples from the experimental units at both demonstration sites were analyzed for plasticity, moisture content, predominant clay type of the soil, the presence of volatile organic compounds (VOC), semivolatile organic compounds (SVOC), oil and grease content, and humic and fulvic acid concentrations.

Table 4 lists the plastic index, liquid limit, and soil type from the analyses of the soil samples from both sites using the American Society for Testing and Materials (ASTM) Method D 2487-93, Standard Classification of Soils for Engineering Purposes.

The VOC analytical results did not indicate the presence of any volatile organics in the soils at either site. The SVOC analysis indicated the presence of the following SVOCs in the soils at the inactive pottery factory site: benz(a)anthracene (0.82 mg/kg), benzo(b)fluoranthene (0.91 mg/kg), benzo(k)fluoranthene (0.77 mg/kg), benzo(a)pyrene

Site	Plastic Index	Liquid Limit	Soil Type
Trailer Park	8	42	Sandy Silt
Inactive Pottery Factory	11	46	Sandy Silt

(0.69 mg/kg), chrysene (1.0 mg/kg) fluoranthene (1.9 mg/kg), and pyrene (1.9 mg/kg). These SVOCs are typically found in crude oil, gasoline, or used motor oil.

The soil in this area did show signs of staining that may be the result of the disposal of a small quantity of waste oil. Based on these concentrations and the current state regulations for petroleum releases, it does not appear that the SVOCs present at the site require remediation. Also, the technology developer indicated that these SVOCs will not interfere with the Soil Rescue remediation fluid. The analytical results for the inactive pottery factory indicate the presence of oil and grease at a concentration of 3,680 mg/kg. The analytical results for the trailer park site did not indicate the presence of oil and grease.

The concentration of humic acid at the trailer park site was 2,400 mg/L, and the mean concentration of humic acid at the inactive pottery factory site is 1,400 mg/L. The concentration of fulvic acid at the trailer park site was 600 mg/L, and the mean concentration of fulvic acid at the inactive pottery factory site is less than 500 mg/L.

Evaluation of Objective S4

An economic analysis used information obtained from the SITE evaluation, Star Organics, and other sources. The analysis examined 12 cost categories for a scenario in which the Soil Rescue remediation fluid was applied at full scale to treat lead-contaminated soil at the CRPAC site. The cost estimate assumed the site was 1 acre in size and that the treatment was applied to a depth of 6 inches, which results in an estimated treated volume of approximately 807 cubic yards. Based on these assumptions, the total costs were estimated to be \$32,500 per acre, and an estimated cost of \$40.27 per yd³. Costs for application of the Soil Rescue remediation fluid may vary significantly from this estimate, depending on site-specific factors.

Technology Status

Star Organics is currently performing several bench-scale studies and pilot-scale tests on soil and debris contaminated with heavy metals and radionuclides.

References

Canadian Society of Soil Science. 1993. "Soil Sampling and Methods of Analysis". Chapters 19 and 38. Lewis Publishers. 1993.

- Evans, G. 1990. "Estimating Innovative Treatment Technology Costs for the SITE Program." *Journal of Air and Waste Management Association*. Volume 40, Number 7. July.
- Environment Canada Method Number 7.
- Interstate Technology and Regulatory Cooperation (ITRC) Work Group. 1997. "Emerging Technologies for the Remediation of Metals in Soils: Insitu Stabilization/Inplace Inactivation." December.
- R.S. Means, Company, Inc. 1998. Environmental Restoration Assemblies Cost Book. R.S. Means Company, Inc., Kingston, Massachusetts.
- Northern Kentucky University (NKU). 1999. Letter Regarding Technical Review of Soil Amendment Technologies, Cation Exchange Capacity Assessment. From Lee Otte, Senior Consultant. To David Gilligan, Project Manager, Tetra Tech EM Inc. (Tetra Tech) October 7.
- Ohio Environmental Protection Agency. 1998. "Interim Report and Proposal for Additional Work, Crooksville/Roseville Pottery Area of Concern Geographic Initiative." March. Prepared for Environmental Protection Agency.
- Solubility/Bioavailability Research Consortium (SBRC). 1998. "Simplified In Vitro Method for Determination of Lead and Arsenic Bioaccessibility" Unpublished.
- Star Organics, L.L.C. (Star Organics) 2000. Facsimile Regarding Soil Rescue uses since SITE demonstration in September 1998. From Kevin Walsh, Star Organics. To David Gilligan, Tetra Tech. August.
- Tessier, A. 1979. "Sequential Extraction Procedure for the Speciation of Particulate Trace Metals." *Analytical Chemistry*. Volume 51, Number 7. Pages 844-850.
- Tetra Tech EM Inc. (Tetra Tech) 1998. "Evaluation of Soil Amendment Technologies at the Crooksville/Roseville Pottery Area of Concern: SITE Program Final Quality Assurance Project Plan." Prepared for EPA under Contract No. 68-35-0037. November.
- Tetra Tech. 2001. "Star Organics, L.L.C. "Evaluation of Soil Amendment Technologies at the Crooksville/Roseville Pottery Area of Concern: SITE Program Demonstration Technology Evaluation Report." Prepared for EPA under Contract No. 68-35-0037. December.
- U.S. Environmental Protection Agency (EPA). 2000. EPA Region 9 Preliminary Remediation Goals (PRG 2000) November <http://www.epa.gov/region09/waste/sfund/prg/index.htm>
- EPA. 1988. Protocol for a Chemical Treatment Demonstration Plan. Hazardous Waste Engineering Research Laboratory. Cincinnati, Ohio. April.
- EPA. 1996. Test Methods for Evaluating Solid Waste, Volumes IA-IC: Laboratory Manual, Physical/Chemical Methods; and Volume II: Field Manual, Physical/Chemical Methods, SW-846, Third Edition, Update III, Office of Solid Waste and Emergency Response, Washington D.C. December.
- EPA. 1983. Methods for Chemical Analysis of Water and Wastes EPA-600/4-79-020, Environmental Monitoring and Support Laboratory, Cincinnati, Ohio, and subsequent EPA-600/4 technical additions.

Sources of Further Information

EPA SITE Program

Edwin Barth, EPA Project Manager
U.S. Environmental Protection Agency
Office of Research and Development
26 W. Martin Luther King Drive
Cincinnati, Ohio 45268
(513) 569-7669
(513) 569-7676 (fax)
E-mail: barth.ed@epa.gov

Technology Developer

Kevin Walsh
Star Organics
5 Mustang Circle
Forney, TX 75126
(972) 552-1423
(972) 552-2531 (fax)
E-mail: remediate@starorganics.com



National Risk Management
Research Laboratory
Cincinnati, OH 45268

Official Business
Penalty for Private Use
\$300

EPA/540/R-99/501a
April 2003

Please make all necessary changes on the below label, detach or copy, and return to the address in the upper left-hand corner.

If you do not wish to receive these reports CHECK HERE ; detach, or copy this cover, and return to the address in the upper left-hand corner.

PRESORTED STANDARD
POSTAGE & FEES PAID
EPA
PERMIT No. G-35