

# Use of Tracer-Injection and Synoptic-Sampling Studies to Quantify Effects of Metal Loading from Mine Drainage

By Briant A. Kimball, Robert L. Runkel, Kenneth E. Bencala, and Katherine Walton-Day

## ABSTRACT

Thousands of abandoned and inactive mines are located in environmentally sensitive mountain watersheds. Cost-effective remediation of the effects of metals from mining in these watersheds requires knowledge of the most significant sources of metals. The significance of a given source not only depends on the concentration of a toxic metal, but also on the load (or mass) of metal added to a stream. An approach that has worked well for mountain watersheds combines tracer-injection methods, to provide reliable discharge measurements on a watershed scale, with synoptic sampling, to provide spatially detailed concentration data. Multiplying concentration and discharge gives a profile of sampled instream load from which we calculate a cumulative sum of load along a study reach. Part of that cumulative total load that can be attributed to visible inflows, and another calculation gives a maximum load due to visible inflows. Comparisons of these different views of load profiles provide important characteristics of a stream that are useful for remediation planning.

## INTRODUCTION


Thousands of abandoned and inactive mines are located in environmentally sensitive mountain watersheds. Cost-effective remediation of the effects of metals from mining in these watersheds requires science-based knowledge of metal sources, transport, and effects. Regulatory and land management agencies need the answers to some basic questions to plan cost-effective remediation. First, which sources of mine drainage in a watershed have the greatest effect on the stream? Second, what natural processes or instream chemical reactions move metals from the water column to the streambed where the metals can affect aquatic organisms? Finally, does a remediation plan for an individual site need to account for the complexity of surface- and ground-water sources of metals?

The purpose of this discussion is to present an approach that represents a practical

application of the research methods and models that have been developed as part of the Upper Arkansas Surface-Water Toxics Project as part of the Toxic Substances Hydrology Program. A recent study in Cement Creek, Colorado, a tributary of the Animas River, illustrates the approach used to provide pre-remediation information as part of the Abandoned Mine Lands Initiative. Because Cement Creek receives mine drainage from many sources in the watershed it is a good watershed to demonstrate the complexity of mine-drainage inflows and the availability of solutions (fig. 1).

## AN APPROACH FOR MOUNTAIN STREAMS


Because of the work of many local, State, and Federal agencies, much is known about the location and chemical character of mine drainage in the Western United States. Information about

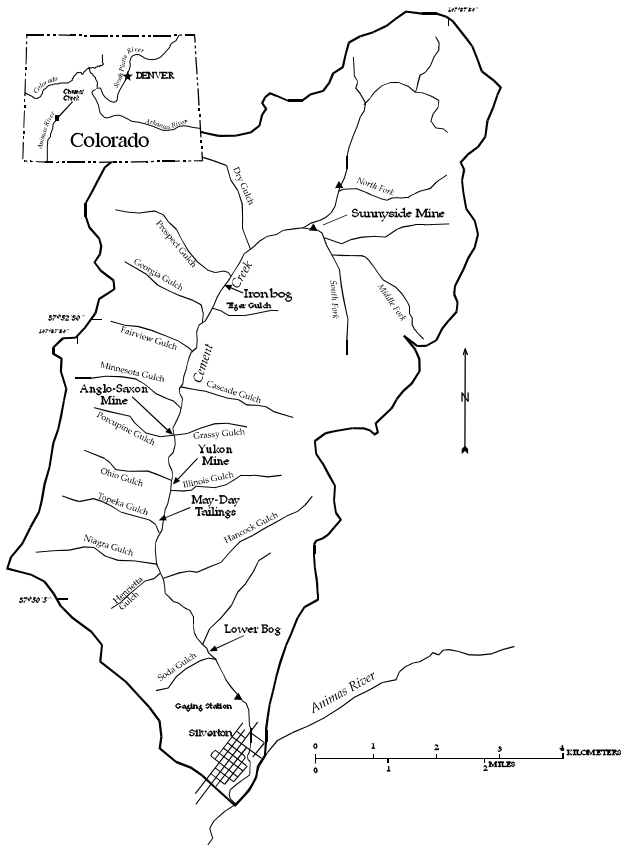

**Figure 1.** Location of Cement Creek, Colorado, watershed. Cement Creek is a tributary of the Animas River. There are many sources of metal-rich drainage from mines in tributaries and from natural sources. Remediation was underway at the Sunnyside Mine at the time of the study (Sept., 1996).

individual mines can indicate potentially toxic sources of metals to streams but does not necessarily provide the complete picture for making decisions about remediation on a watershed scale. The complete picture of the effects of metals on a stream is not just the metal concentration, which directly relates to acute toxicity, but also the metal load, which relates to chronic toxicity. Calculating load requires both chemical concentrations and discharge. Discharge measurements in mountain streams, however, are difficult, even under the best of conditions, because much of the flow in mountain streams is among the streambed cobbles. The Cement Creek study illustrates the combination of a tracer-

dilution study for discharge determinations, with synoptic sampling for detailed chemical composition of stream and inflow sites. Synoptic samples provide a “snapshot” of the changes

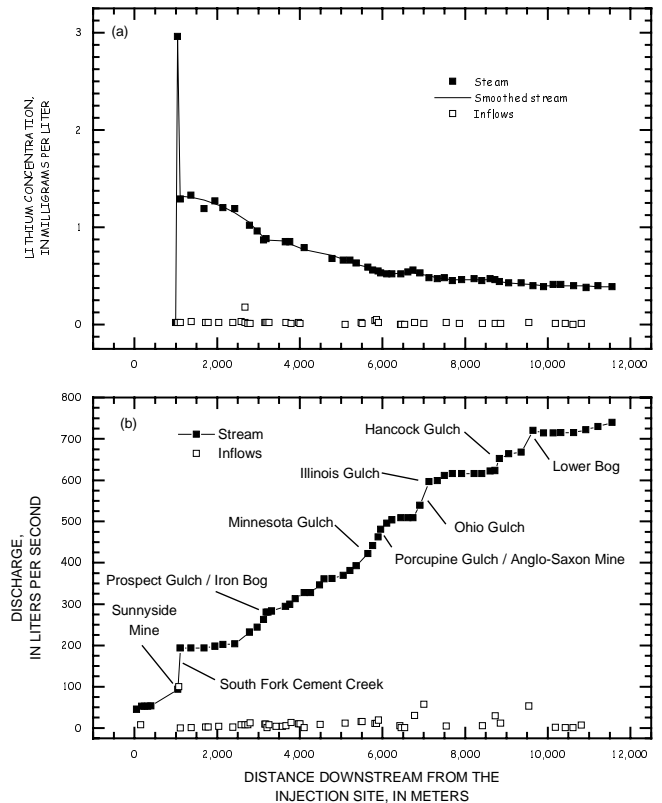

**Figure 2.** (a) Variation of lithium concentration with distance downstream from the injection site. The relatively low concentration of lithium in inflow samples indicates that lithium was an effective tracer. (b) Variation of calculated discharge with distance. Some major tributaries are indicated.

along a stream at a given point in time.

### Adding a tracer: Discharge by dilution

Discharge in mountain streams can be measured precisely by adding a conservative dye or salt tracer to a stream and calculating discharge from the amount of dilution as the tracer moves downstream (Bencala and others, 1990; Kimball,

1997). Because we know the concentration of the injected tracer and the rate at which it is added to the stream, we know the mass added to the stream (Zellweger and others, 1988). By using the conservation of mass, we can calculate the discharge by measuring the concentration of the tracer upstream and downstream from the injection point. A 12-kilometer reach of Cement Creek was separated into two separate injection reaches because there was active remediation at the Sunnyside Mine. A sodium chloride tracer was added upstream from the mine and a lithium chloride tracer was added downstream from the mine. After the tracers had reached a steady state along the stream reaches, synoptic samples were collected at sites downstream from the injection points to document the incremental decrease of tracer concentration due to water entering the stream (fig. 2a). The profile of lithium concentration allows the calculation of discharge at the synoptic sites (fig. 2b). With the tracer measurement, a change in discharge between two stream sites represents the total amount of water entering the stream from surface- and ground-water sources in that stream segment.


### Synoptic sampling

Synoptic sampling includes both stream and inflow sites. Before the injection study, every visible inflow is identified for sampling. Stream sites for sampling are chosen upstream and downstream from each inflow, giving three points to make a mass-balance calculation for each inflow (points A, B, and I, fig. 3). Additional stream sites are chosen along the study reach to quantify ground-water inflows where there are no visible inflows (point C, fig. 3). Chemical analyses of synoptic samples provide a detailed profile of metal concentrations along the study reach.

### Load profiles: A “snapshot” in time

Zinc concentrations of stream and inflow samples illustrate the spatial detail along the 12-kilometer stream reach (fig. 4a). The instream concentration of zinc did not vary greatly, despite

the large range of zinc concentration among the inflows. The profile of sampled instream load was calculated from the concentrations and the discharge values (fig. 4b). The profiles of concentration and load help answer the basic questions about the sources of metals and the effectiveness of remediation. First, although there are many sources of mine drainage, the principal sources are indicated by the sharp increases in the sampled instream load (fig. 4b).

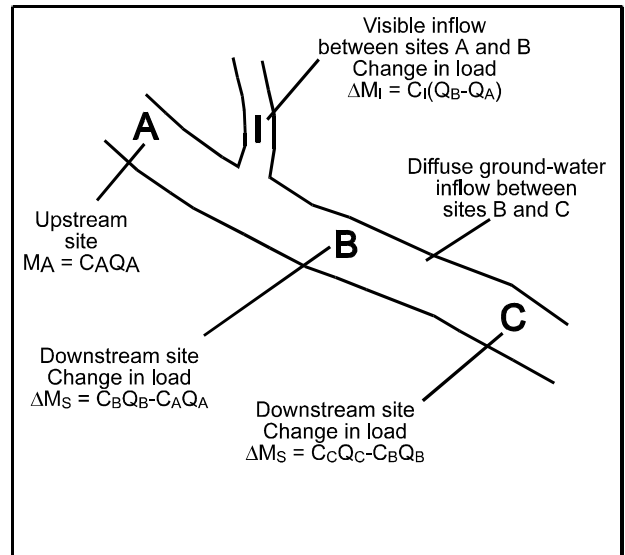

**Figure 3.** Schematic diagram showing mass-balance calculations around an inflow to a stream.

### Identifying important sources of metals

To rank the relative importance of the load from a particular stream segment or a group of stream segments requires another view of the load information. The net change in load between any two stream sampling sites can be positive, indicating an increase of load, or negative, indicating a loss through physical or chemical processes (fig. 3). The net change is:

$$\Delta M_S = C_B Q_B - C_A Q_A \quad (1)$$

where

$\Delta M_S$  is the net change in load for a stream segment, in milligrams per second,

$C_B$  is the solute concentration at the downstream site, in milligrams per liter,


$Q_B$  is the stream discharge at the downstream site, in liters per second,

$C_A$  is the solute concentration at the upstream site, in milligrams per liter,

$Q_A$  is the stream discharge at the upstream site, in liters per second.

Calculation of the minimum total load entering the stream along a study reach is the cumulative sum of all the positive values of  $\Delta M_S$  for individual stream segments. The percentage of the cumulative total load that is contributed by any one segment is found by dividing the value of  $\Delta M_S$  for that segment by the cumulative sum (fig. 4b). For example, the contribution from Ohio Gulch between 6,447 meters and 6,907 meters is about 14 percent of the cumulative total load. This calculation points out the five largest loads to Cement Creek (fig. 4b).

The sampled instream load also indicates the effectiveness of remediation at the Sunnyside

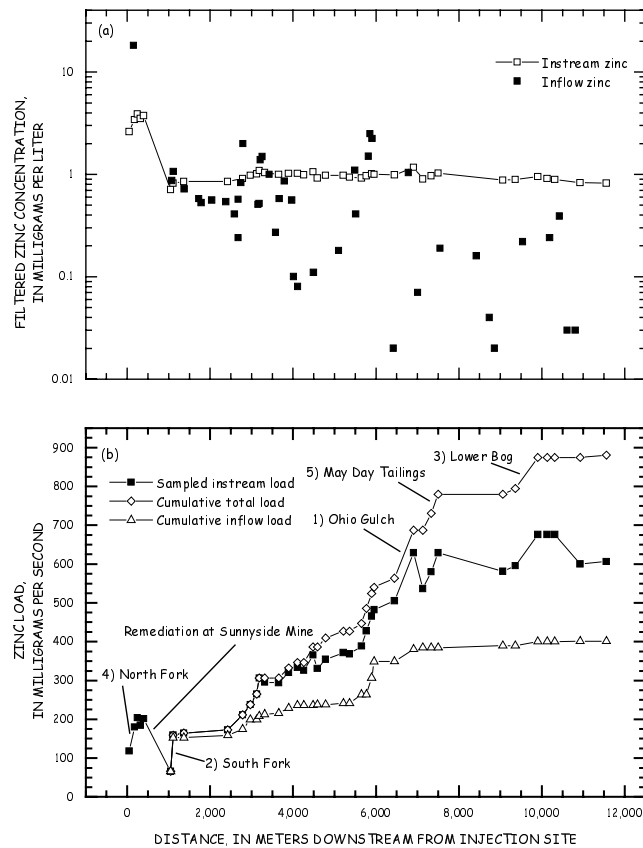

**Figure 4.** Variation of (a) zinc concentration and (b) zinc load with distance in samples from Cement Creek, Colorado. The five largest inflows are indicated by name and a number for its rank. The sampled instream load represents the calculated load at each stream site. The cumulative total load represents a summation of the entire load entering the stream. The cumulative inflow load represents the part of the total load that can be attributed to sampled inflows.

Mine (fig. 4b). Almost all the zinc load that was present upstream from the mine was removed. The remediation decreased the zinc load that Cement Creek contributes to the Animas River, but substantial loads downstream from the Sunnyside Mine add a large zinc load.

The profile of sampled instream load indicates that there were many small sources of zinc load all along the study reach. All these relatively small sources add up to a substantial percentage of the cumulative total load. This “dispersed” loading complicates plans for remediation because even if the major sources can be controlled, the many small sources may still contribute too much zinc to allow adequate stream recovery. So a remediation plan for this stream would be immense. The load profile indicates that there may be some cost-effective targets for remediation that may decrease the input of zinc to the Animas River. This may be a more reasonable objective than trying to lower zinc concentrations to aquatic standards in Cement Creek itself.

### Identifying effects on the stream

The difference between the sampled instream load and the cumulative total load indicates how much zinc was removed from the stream through chemical and physical processes (fig. 4b). If there were no instream losses of load, then the sampled instream load and the cumulative total load would be exactly the same. The two accounts of load only differ if there are stream segments with negative values of  $\Delta M_s$ . Where the net change in load decreased, zinc was removed from the stream and added to the streambed. In those stream segments, metals should be more available to benthic invertebrates and the likelihood that metals enter the food chain is great. For example, between 6,907 meters and 7,131 meters, a large amount of zinc was removed and there was visual evidence of the precipitate on the streambed. Stream segments where metals are added to the streambed will be the most affected parts of the stream.

### Identifying ground-water inflow

A second way to view the net change in zinc load is possible if there is a sampled inflow in a stream segment. The change in mass can be expressed as:

$$\Delta M_I = C_I Q_B - Q_A g \quad (2)$$

where

$\Delta M_I$  is the net change in load for a stream segment, assuming that the inflow concentration represents the average concentration of water entering the stream in that stream segment,

$C_I$  is the solute concentration in the inflow sample, in milligrams per liter, and

$Q_B$  and  $Q_A$  are as defined previously.

The cumulative sum of  $\Delta M_I$  values is the cumulative inflow load and represents that part of the cumulative total load that can be attributed to sampled inflows (fig. 4b).

If  $C_I$  is an accurate representation of the concentration for all the water entering the stream in that segment, then  $\Delta M_I$  will equal  $\Delta M_s$ . If  $\Delta M_s$  is greater than  $\Delta M_I$ , the difference between them may be due to the diffuse seepage of ground-water inflow. This could result from an average concentration of water entering the stream that is greater than the concentration sampled in the inflow. Although this is not proof of ground-water inflow, it likely indicates that there is ground water with a higher concentration entering the stream in that segment. Thus, differences between the cumulative total load and the cumulative inflow load could indicate zones of ground-water inflow. For the Cement Creek data in the stream reach around Ohio Gulch, from 6,447 meters to 6,907 meters, meters shows a substantial difference between the two calculations. Although there was loading from the visible inflow of Ohio

Gulch, the total load was greater, so there must have been zinc load from ground-water input.

This information is important for evaluating specific sites for remediation. A remediation plan must account for visible and dispersed sources of metal load, and this likely is the easiest way to identify the presence of dispersed ground-water inflow. It assumes that the average concentration of water entering the stream is the same as the sampled inflow concentration. If the sampled inflows completely accounted for the entire load entering the stream, then the cumulative total and the cumulative inflow loads would be the same.

The load profile answers important questions about sources of mine drainage, where the streambed is affected, and inputs of ground water. The load profile summarizes the effects of particular sources on the stream. These are important answers needed for effective remediation planning.

## REFERENCES CITED

- Bencala, K.E., McKnight, D.M., and Zellweger, G.W., 1990, Characterization of transport in an acidic and metal-rich mountain stream based on a lithium tracer injection and simulations of transient storage: *Water Resources Research*, v. 26, no. 5, p. 989-1000.
- Kimball, B.A., 1997, Use of tracer injections and synoptic sampling to measure metal loading from acid mine drainage: U.S. Geological Survey Fact Sheet FS-245-96.
- Zellweger, G.W., Bencala, K.E., McKnight, D.M., Hirsch, R.M., and Kimball, B.A., 1988, Practical aspects of tracer experiments in acidic, metal enriched streams, *in* Mallard, G.E., ed., U.S. Geological Survey Toxic Substances Hydrology Program—Surface-Water Contamination, Open-File Report 87-764, p. 125-130.

## AUTHOR INFORMATION

Briant A. Kimball, U.S. Geological Survey, Salt Lake City, Utah ([bkimball@usgs.gov](mailto:bkimball@usgs.gov))

Robert L. Runkel, U.S. Geological Survey, Denver, Colorado ([runkel@usgs.gov](mailto:runkel@usgs.gov))

Kenneth E. Bencala, U.S. Geological Survey, Menlo Park, California ([kbencala@usgs.gov](mailto:kbencala@usgs.gov))

Katherine Walton-Day, U.S. Geological Survey, Denver, Colorado ([kwaltond@usgs.gov](mailto:kwaltond@usgs.gov))