

Fourth Annual Conference on Carbon Capture & Sequestration

*Developing Potential Paths Forward Based on the
Knowledge, Science and Experience to Date*

Sequestration Policy and Feasibility Studies (2)

Alternative Approaches to Reducing Petroleum Use and CO₂
Emissions By Means of a Hydrogen Economy: Technology and
Economic Modeling and Scenario Analysis

Peter C. Balash, NETL

May 2-5, 2005, Hilton Alexandria Mark Center, Alexandria Virginia



Acknowledgements/Disclaimer

- I would like to thank my co-authors and colleagues:
- Donald Hanson, ANL John Ruether, NETL
- Dave Schmalzer, ANL Dale Keairns, NETL
- John Molburg, ANL Kathy Stirling, NETL
- John Marano, ANL/NETL Ken Kern, NETL
- Jeffrey Price, Bwres consultants
- And other colleagues for their helpful comments along the way

All views expressed are those of the authors and should not be construed to reflect the policies or views of the United States Department of Energy, the National Energy Technology Laboratory, or Argonne National Laboratory.




Primary Drivers: Oil and Carbon

Presidential Goals

- Reduction of Petroleum Consumption
 - 11 million barrels per day, by 2040
- Reduction of Carbon Equivalent
 - 500 million metric tons per year, by 2040




US Energy Consumption by Fuel 1949-2025

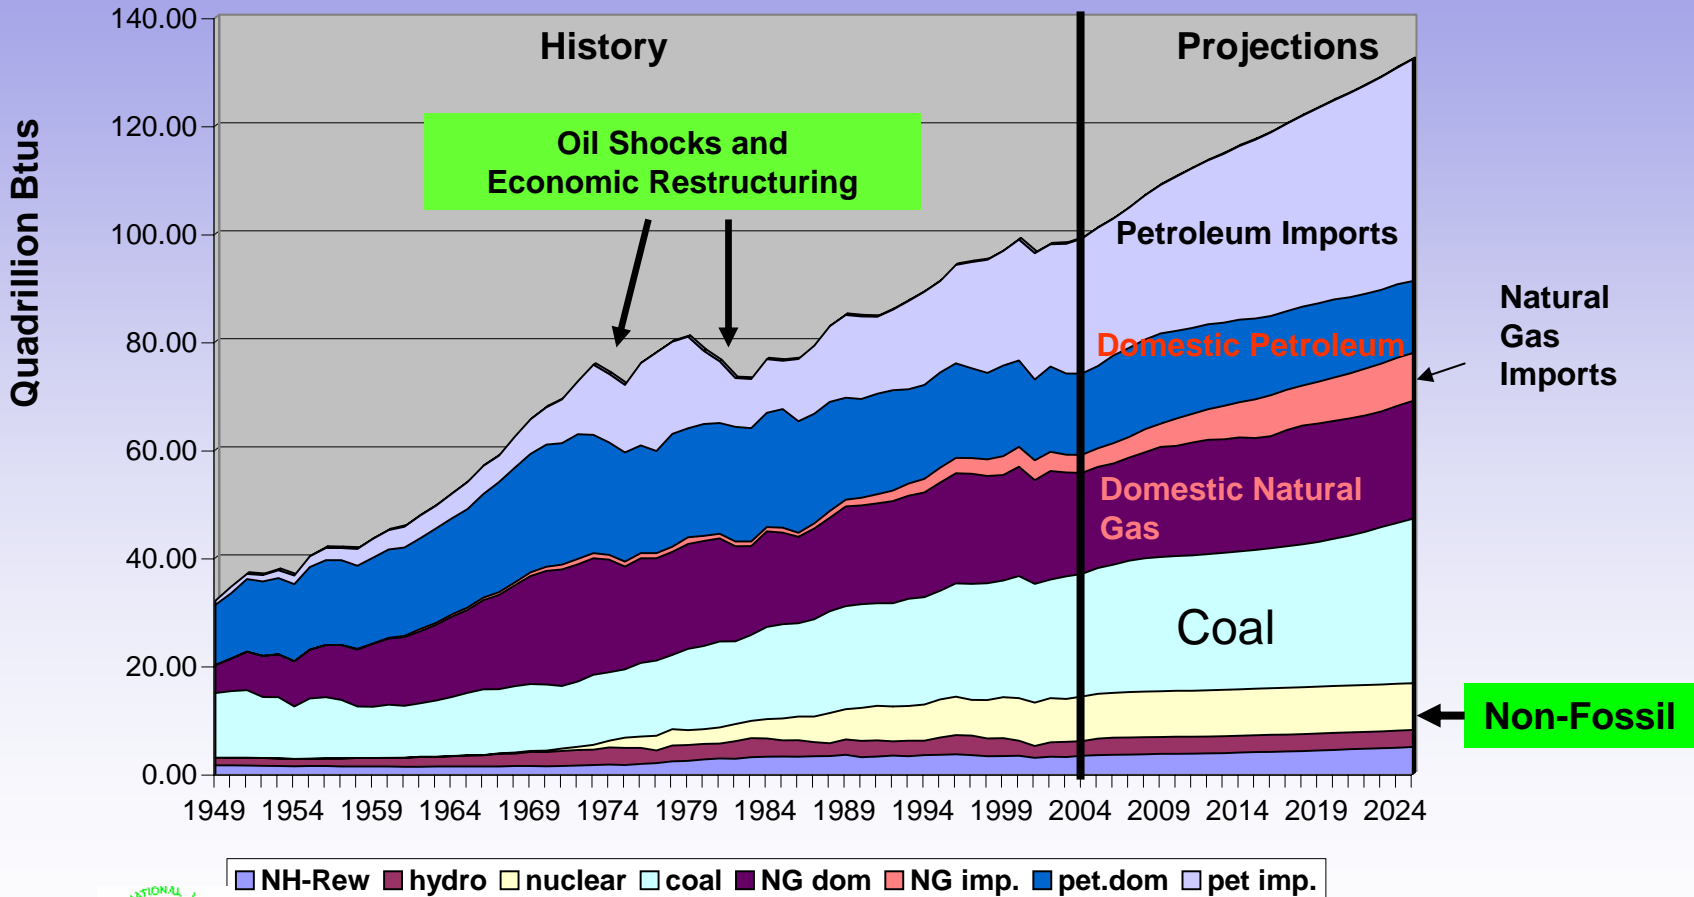


Source: EIA; 1948-2003: *Annual Energy Review 2003*, Table 1.3; 2004-2025: *Annual Energy Outlook 2005*, Tables 1,2, and 17

US Petroleum Trends, 1949-2004

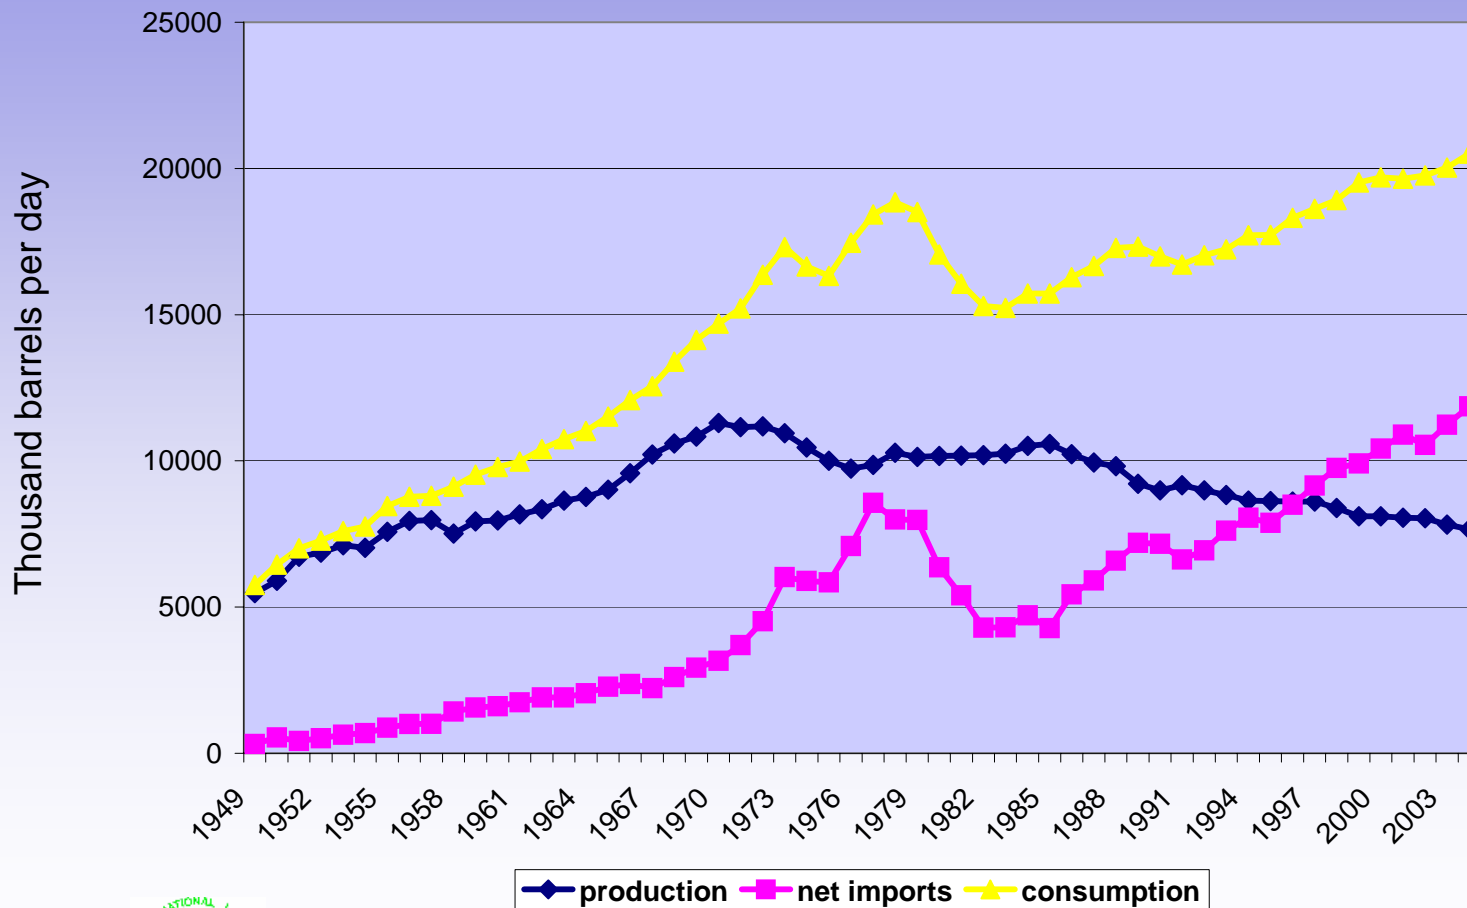


Note: Figures include crude oil, natural gas liquids, merchant oxygenates, and imported petroleum products. Source: EIA, *AER 2003*, Table 5.1 Petroleum Overview, 1949-2003; *Petroleum Supply Monthly*, January 2005, Table S1

US GHG Emissions, 1990-2002

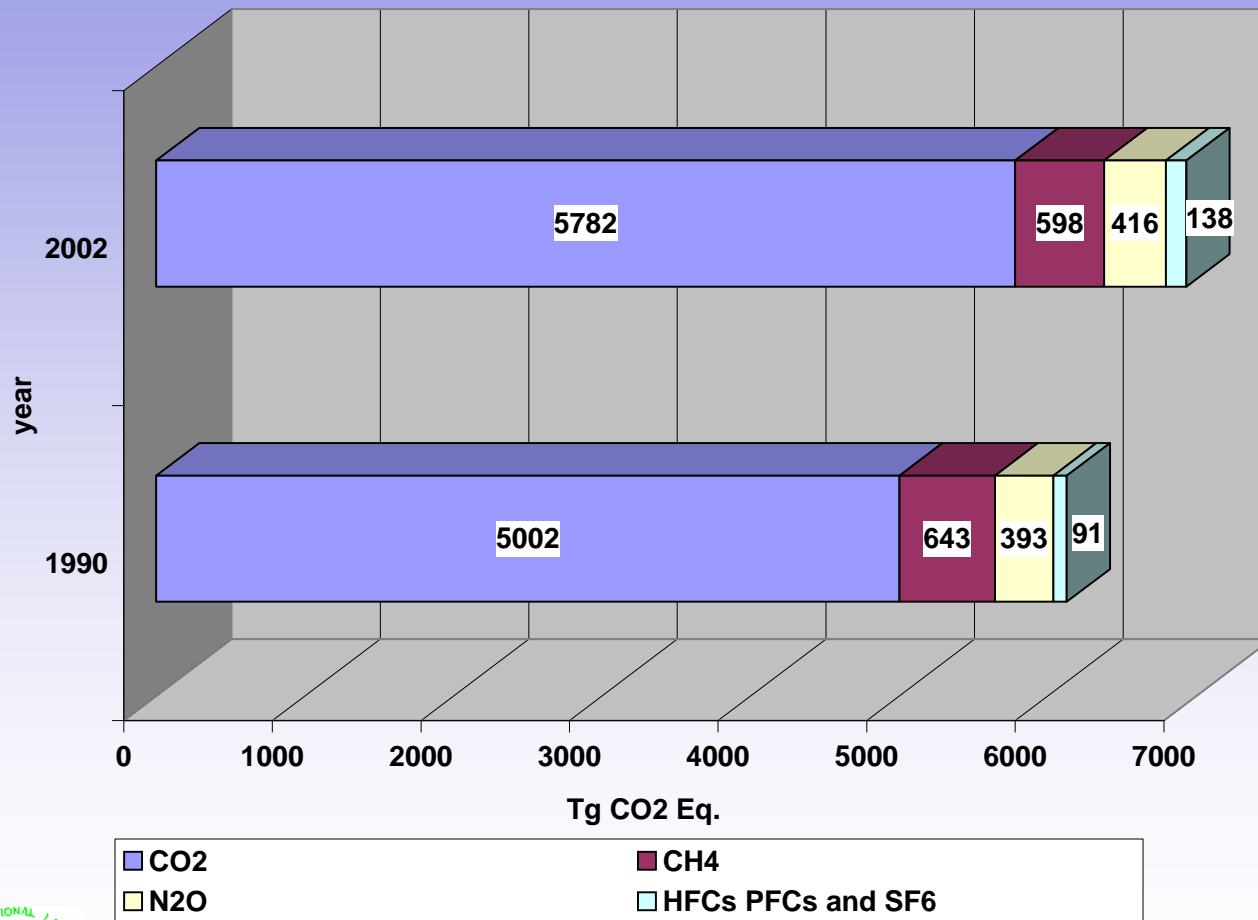

Source: EPA, 2004 Greenhouse Gas Inventory, National Inventory Tables, Table ES-2

2002 US CO₂ Emissions from Fossil Fuel Combustion, by Sector

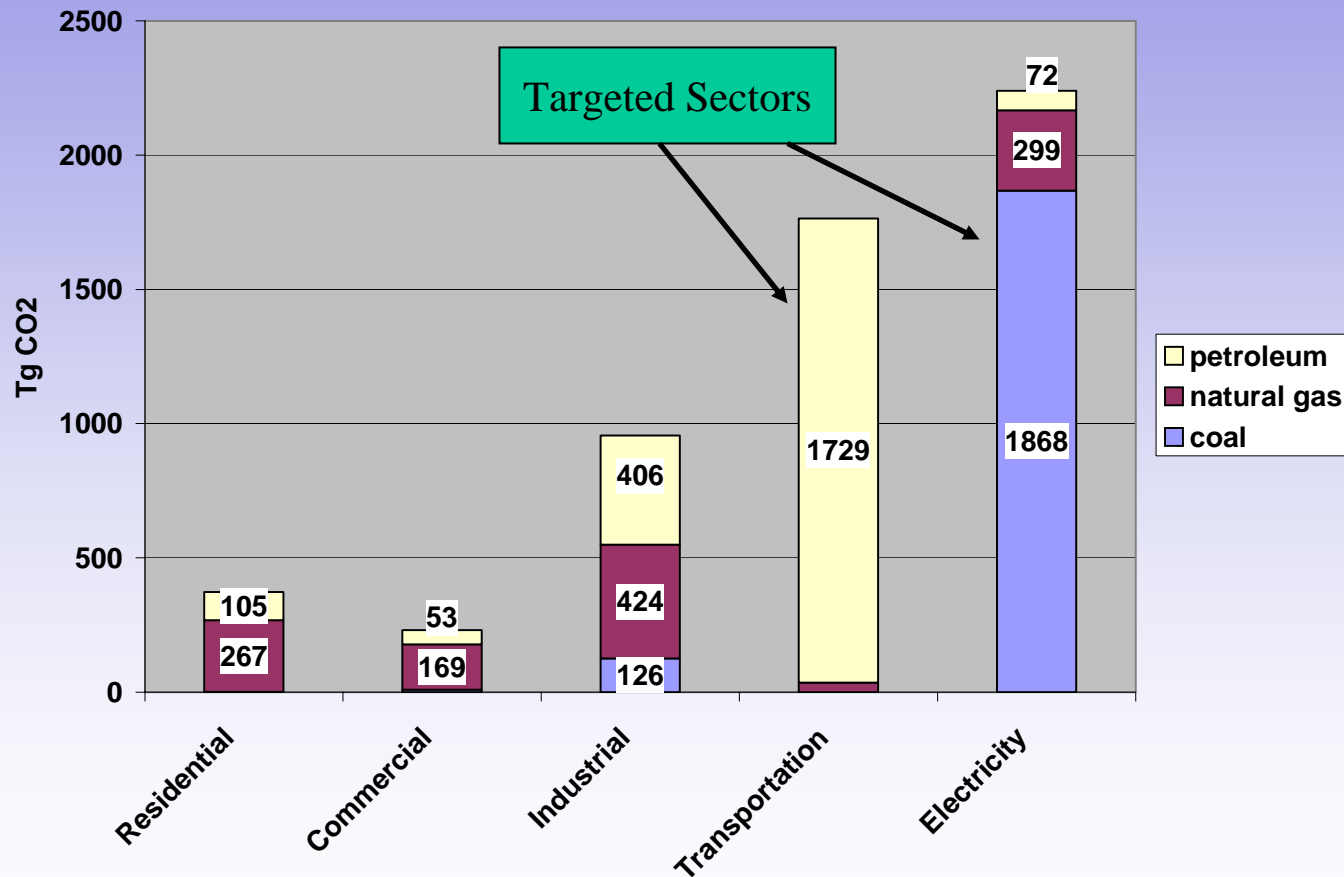

Source: EPA, 2004 Greenhouse Gas Inventory, National Inventory Tables, Table 3.3




How to Achieve Cuts

Reference Case: “Business as usual”	“Chemical H ₂ ” Hybrid-electric vehicles and Clean Hydrocarbons	Gaseous H ₂ (preliminary) Hydrogen Production for Fuel Cell Vehicles
Oil Prices From \$37/b in 2010; Gas Prices from \$6/mmBtu	Coal Power/Fischer- Tropsch Co-Production Plants	DOE H ₂ Posture Plan guidelines
“Clear Skies”-Like Emissions Targets	Energy Security Charges on premium fuels from 2010	H ₂ A program (DOE EE) H ₂ cost data
Gasification, Hydrotreating and Clean fuels Refinery Modeling	Carbon Charges on Electricity generation from 2015	More stringent clean air regulations begin in California
Nuclear Generating Capacity Constant	Four size categories of Hybrids; eventual Plug-Ins	Technological “breakthroughs” assumed




Petroleum Target

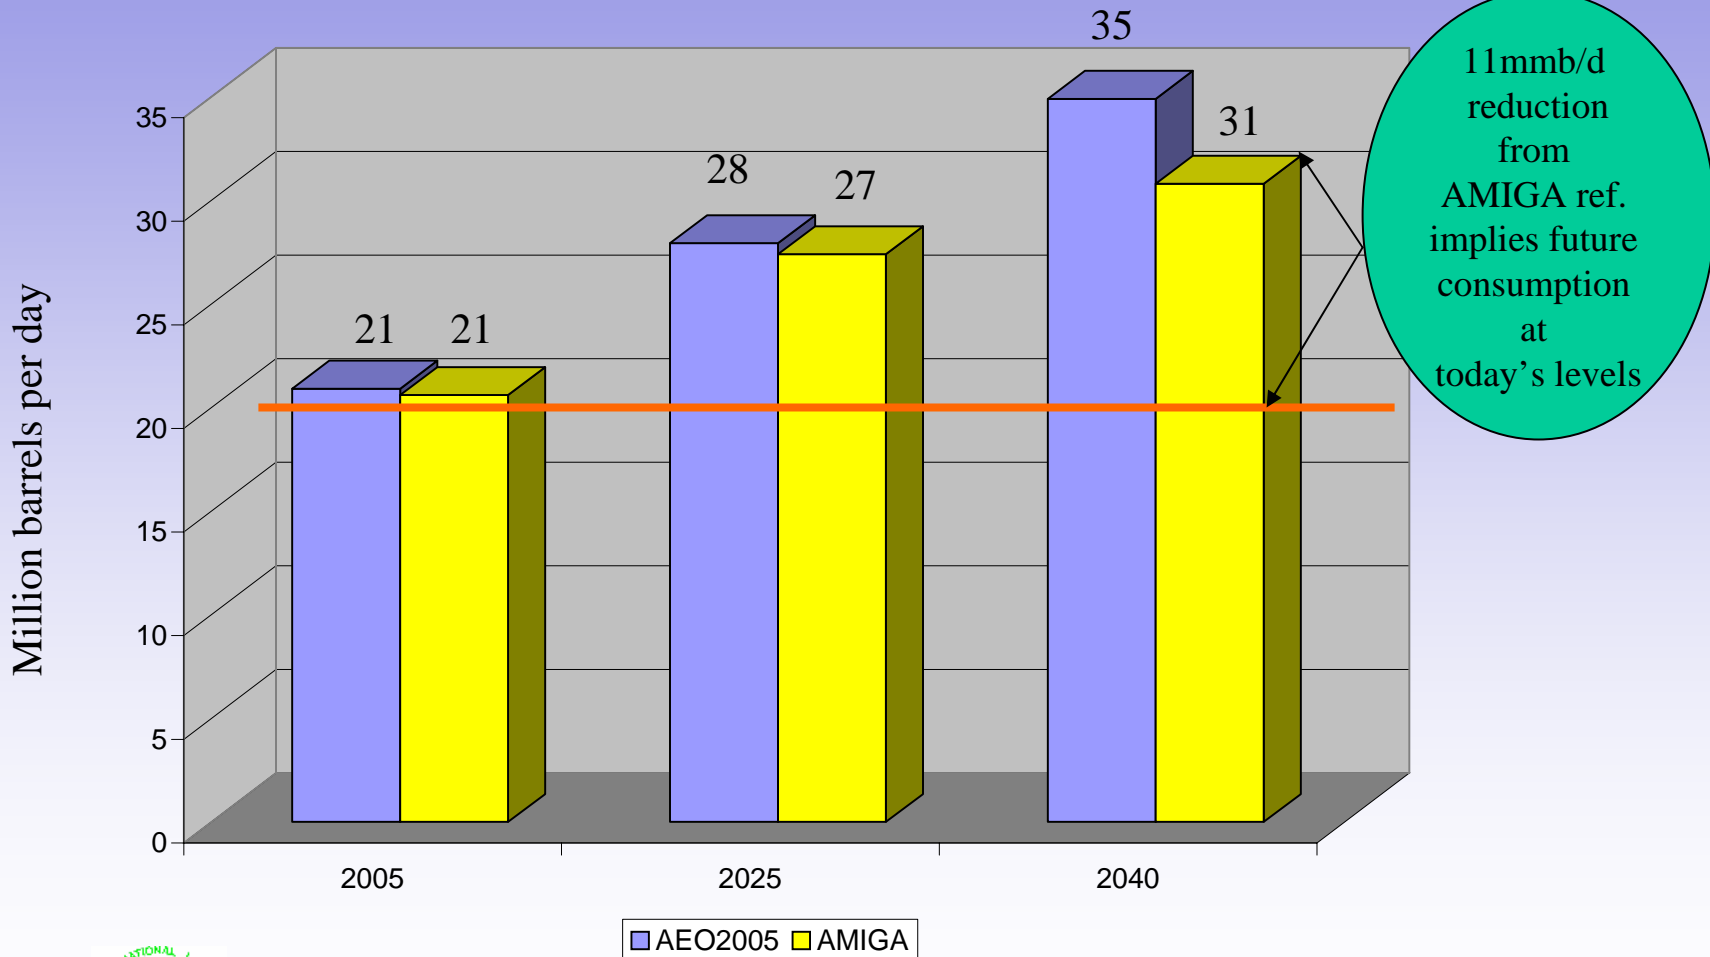


Source: EIA AEO2005 Yearly Table 11; author extrapolation;
AMIGA reference run

Carbon Emissions Target

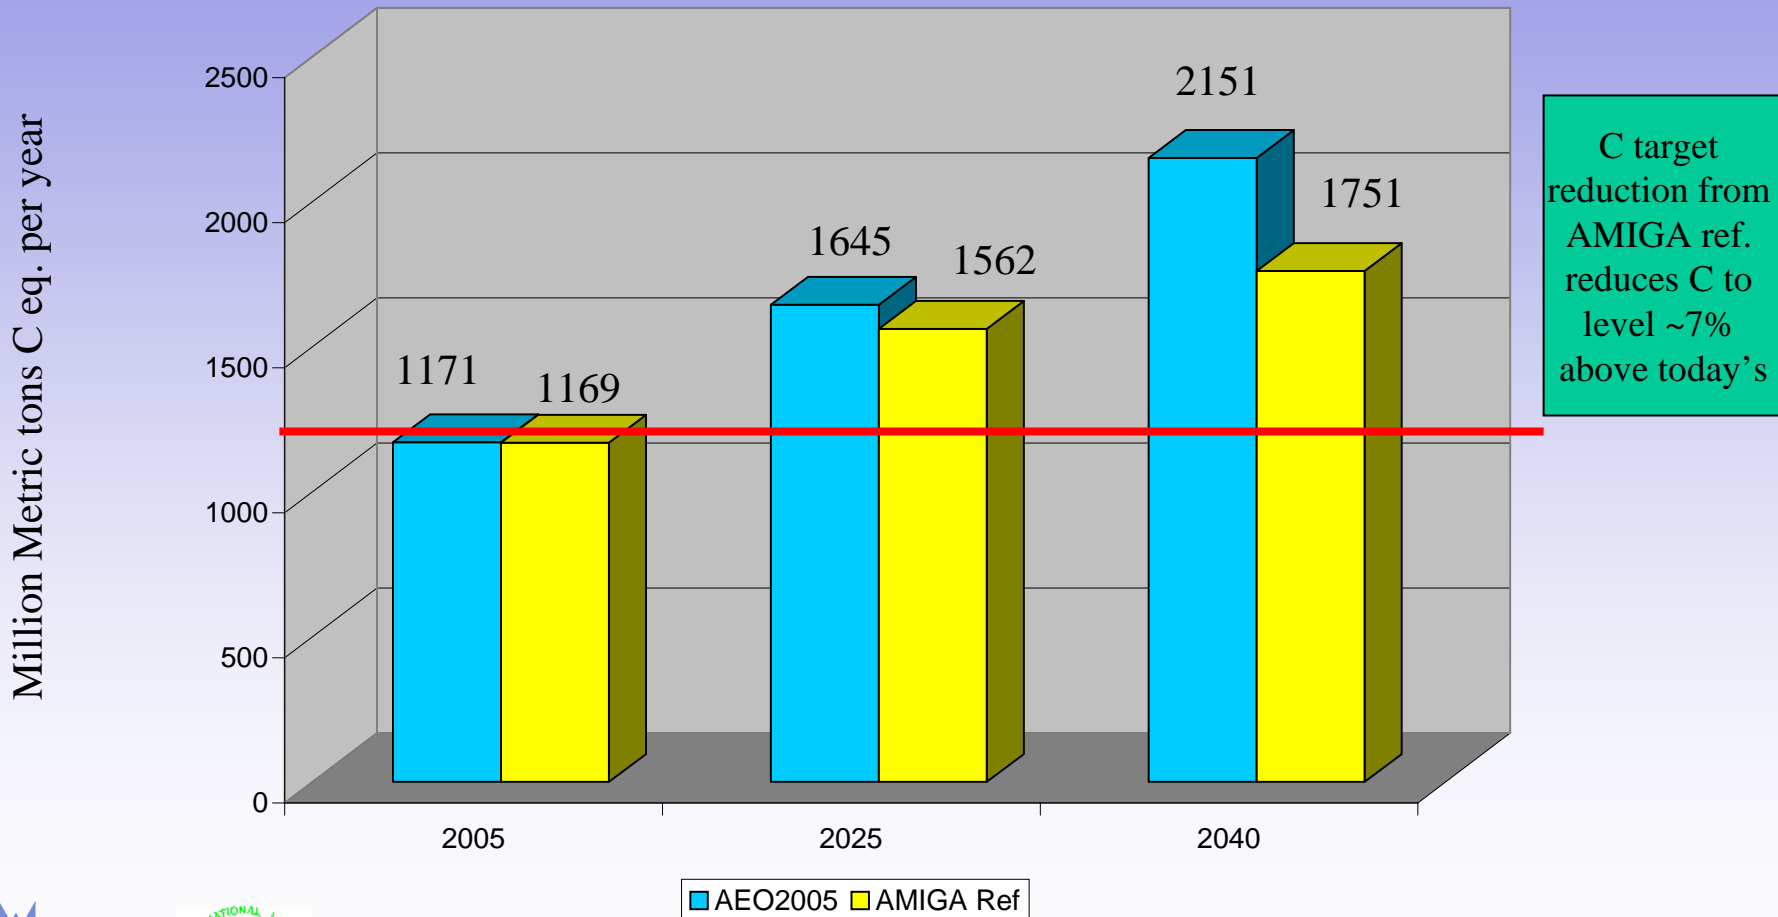

Source: EIA AEO2005 Yearly Table 18 (transport petroleum; electric power); author extrapolation; AMIGA reference run

Externality Charges

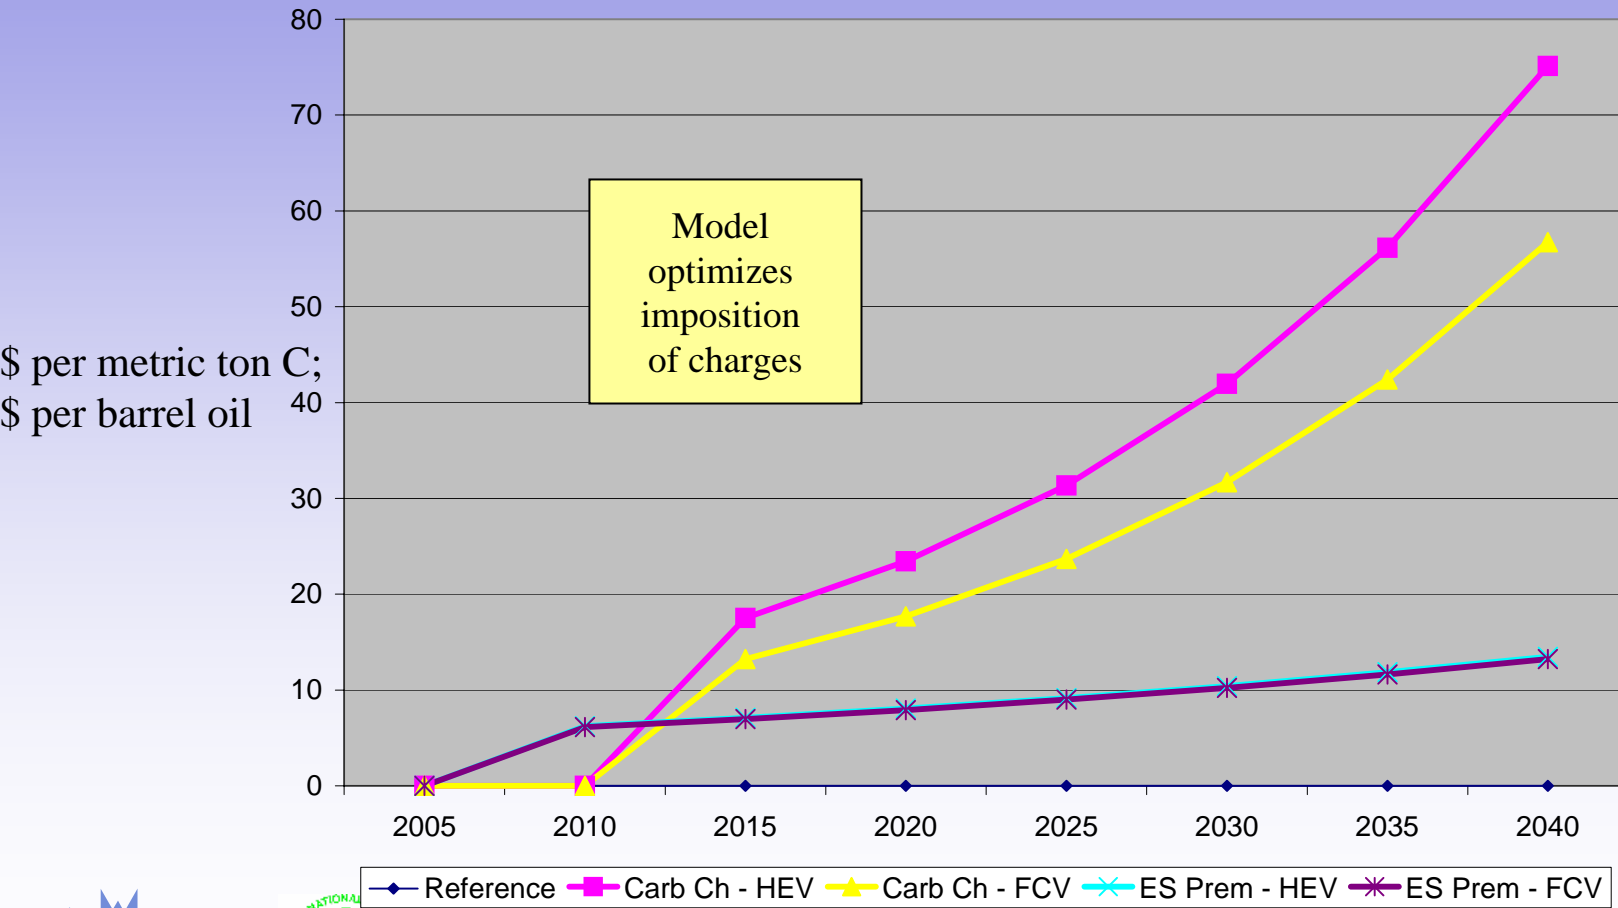


More stringent anti-smog measures + higher fuel economy implies lower C charge for FCV case



Source: AMIGA Presidential Goals Scenario Runs

Effective Oil Prices

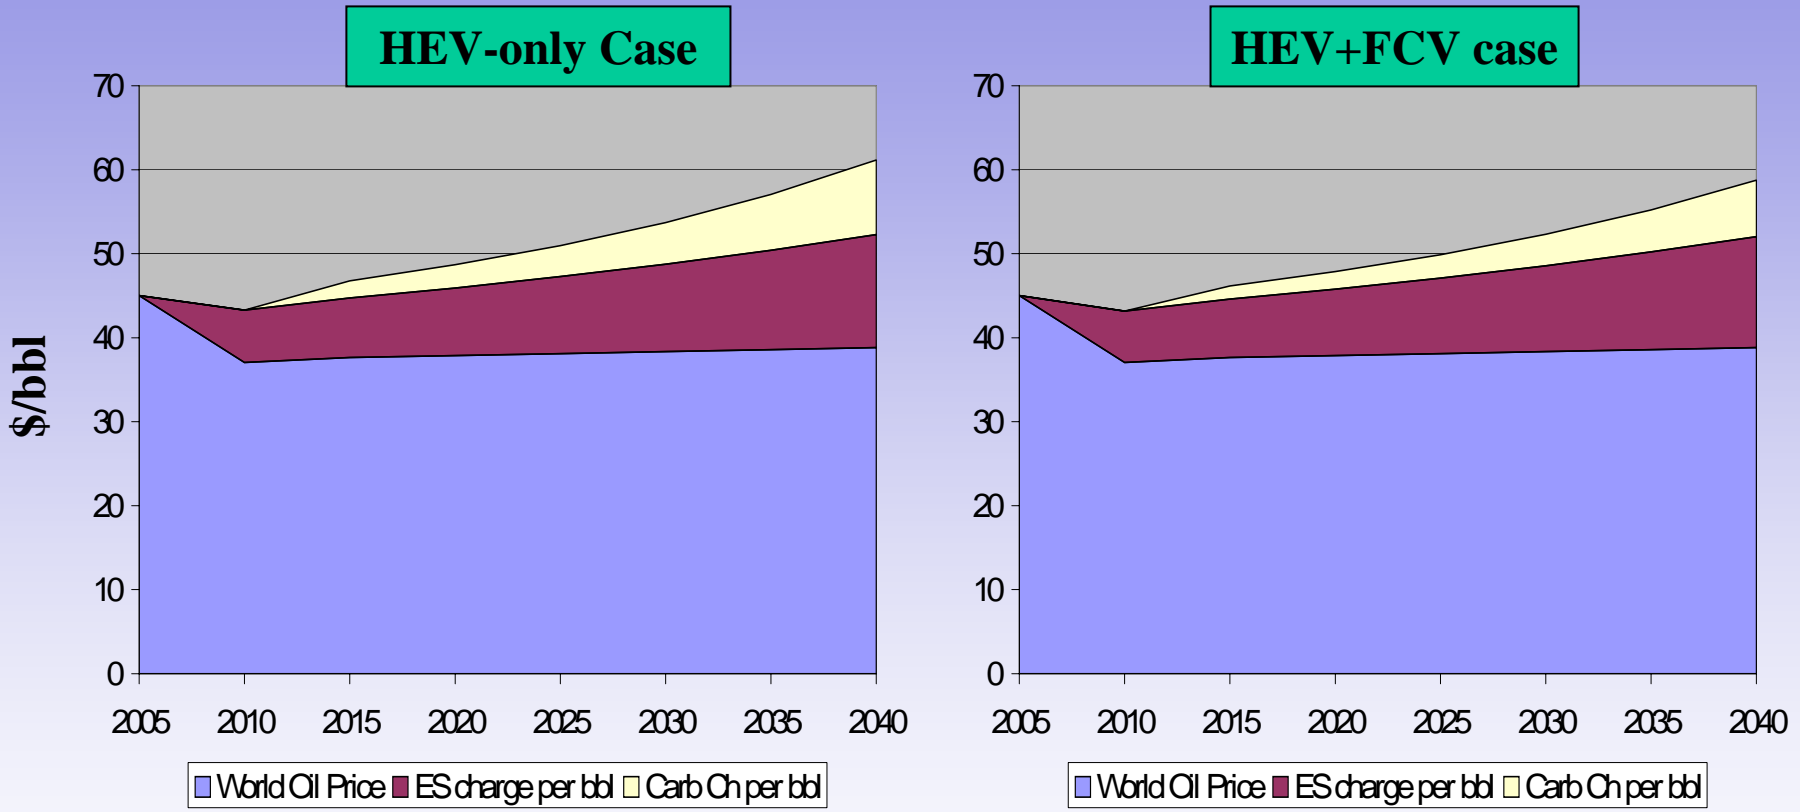

Externality charges result in higher effective than nominal oil prices;
Slightly higher imputed carbon and energy security charges in HEV-only case



Source: AMIGA Presidential Goals Scenario Runs

Coal Power/Fischer-Tropsch Fuels Co-Production

- Plants Optimized for Fuels Production
- Plant products: 33 kWe/ton per day of dry coal feed and 1.63 bpd of F-T liquid fuel precursors/ton per day of dry coal feed
- Capital cost: \$135,000 per ton per day of dry coal feed including carbon capture; this cost includes carbon capture but not carbon transport and sequestration.
- The carbon sequestered in the CO₂ stream is 53% of the carbon in the coal feed.
- Return on investment projections show > 15% ROI when the power selling price is > \$40/MW-hr and the selling price of the F-T liquids is > \$60/bbl



Source: Dale Keairns and Richard Newby, 2005, "Fuels and Electric Co-Production Plant Cost and Performance Projections,"
NETL working paper

Coal Power/FT Fuels II


- **Capture of CO₂ from the F-T liquids co-production plant will be lower cost than capture from a power-only plant**
 - CO₂ capture requirements should be achieved first from Power/FT liquids plants with additional capture from power-only plants
 - The off-gas from the F-T reactor has a very high CO₂ content (>60 vol%) and relatively low CO content (< 10 vol%). Thus, little shift is needed to maximize the CO₂ content in the gas.
- Accounting:
 - FT fuel counts against petroleum consumption
 - 95% of C from co-production plants is captured.




Source: Dale Keairns and Richard Newby, 2005, "Fuels and Electric Co-Production Plant Cost and Performance Projections,"
NETL working paper

Sectoral Carbon Reductions

Transport Sector Emissions

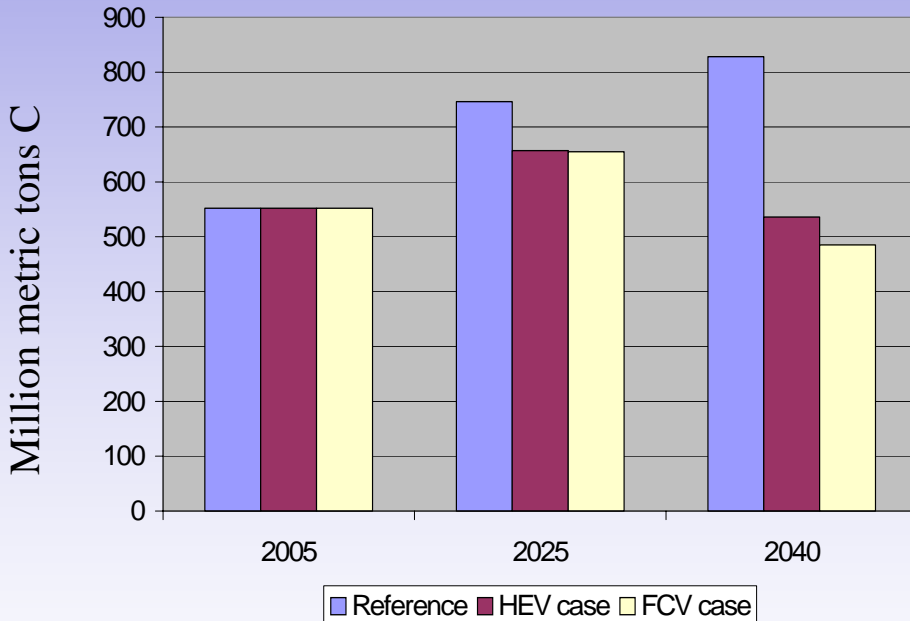

Electricity Generation Sector Emissions

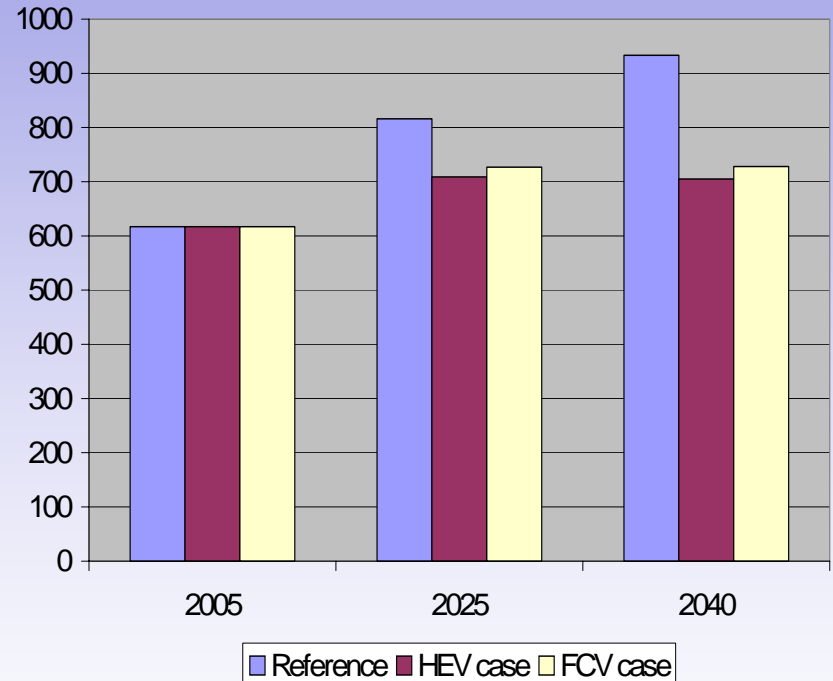

Greater C reductions from FCV+HEV case


More FT C capture in HEV-only case




Source: AMIGA Presidential Goals Scenario Runs

Vehicle Stocks

HEV –only case

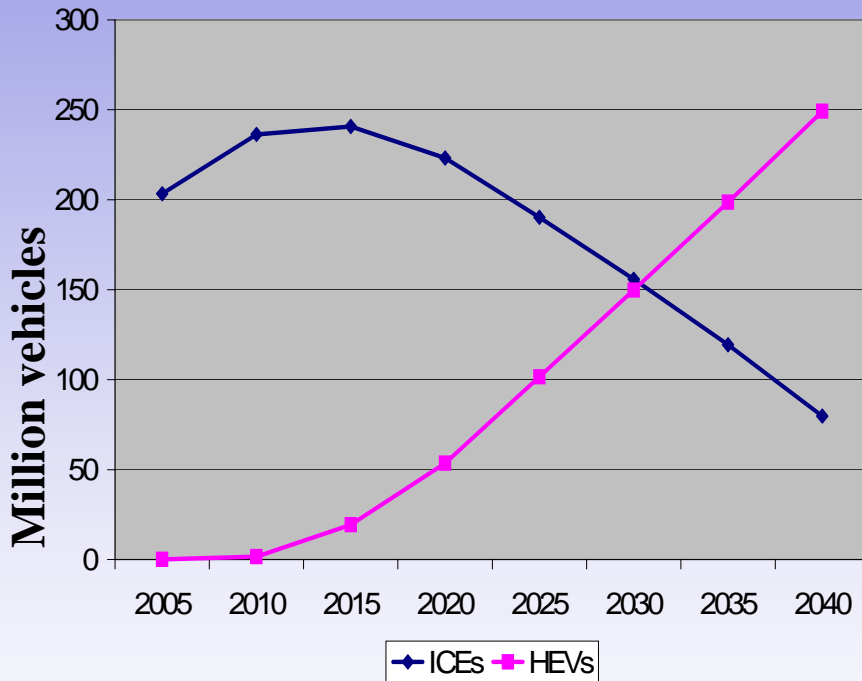


HEV+FCV case

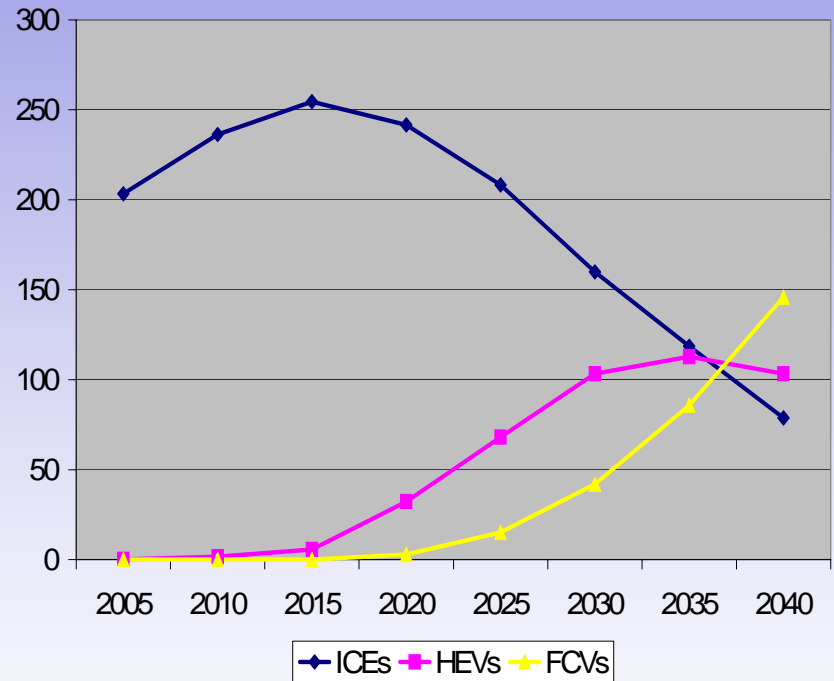

Internal Combustion Engines decline but remain; externality charges drive adoption of alternative vehicles




Reduced Petroleum Consumption

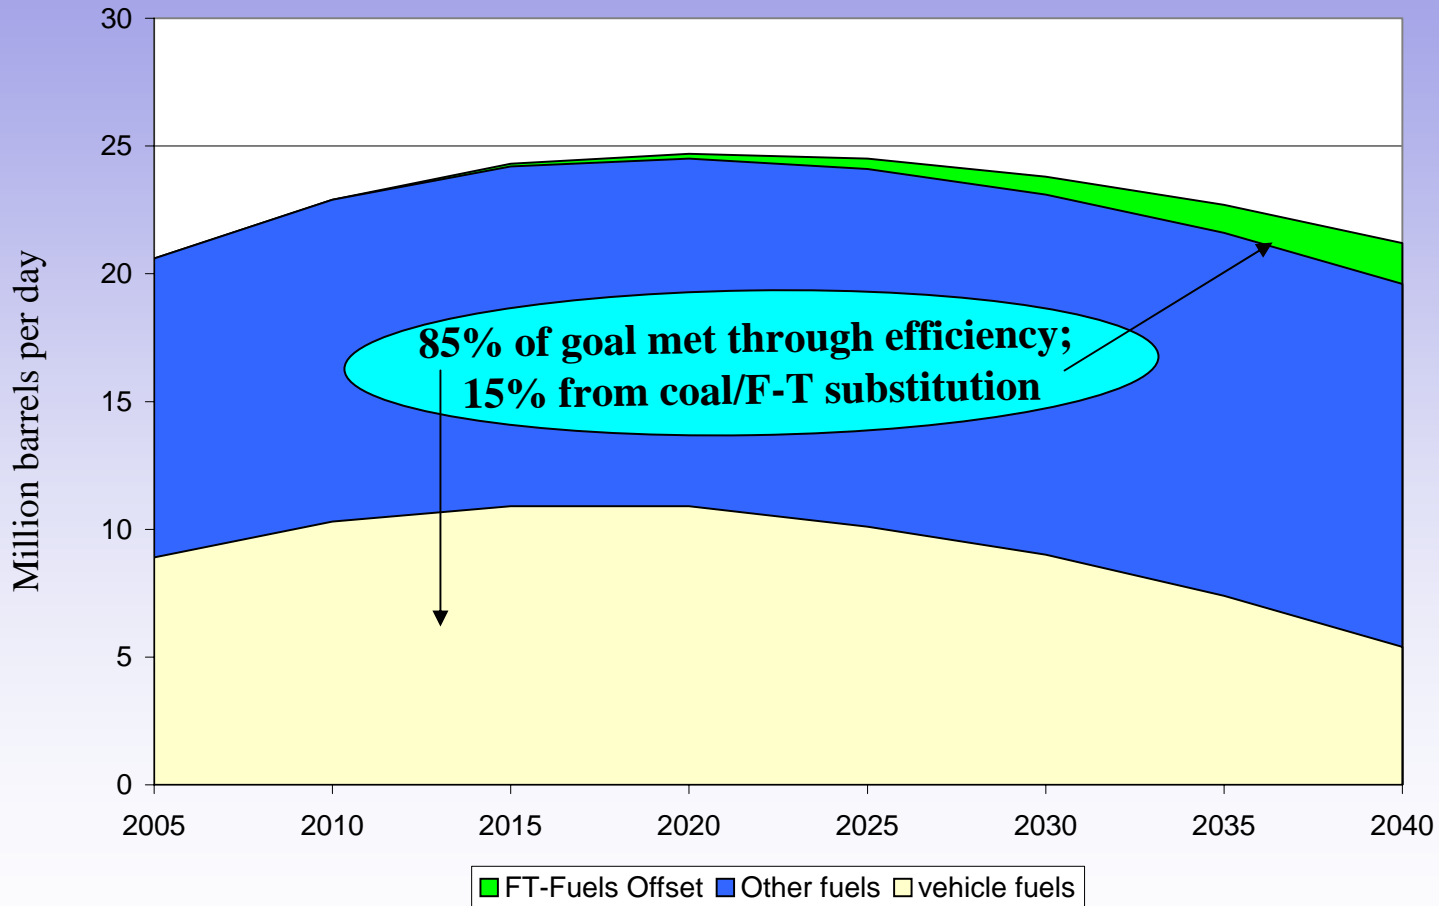


Source: AMIGA Presidential Goals Scenario Runs - HEV case

Energy Supply to Vehicles, HEV Case

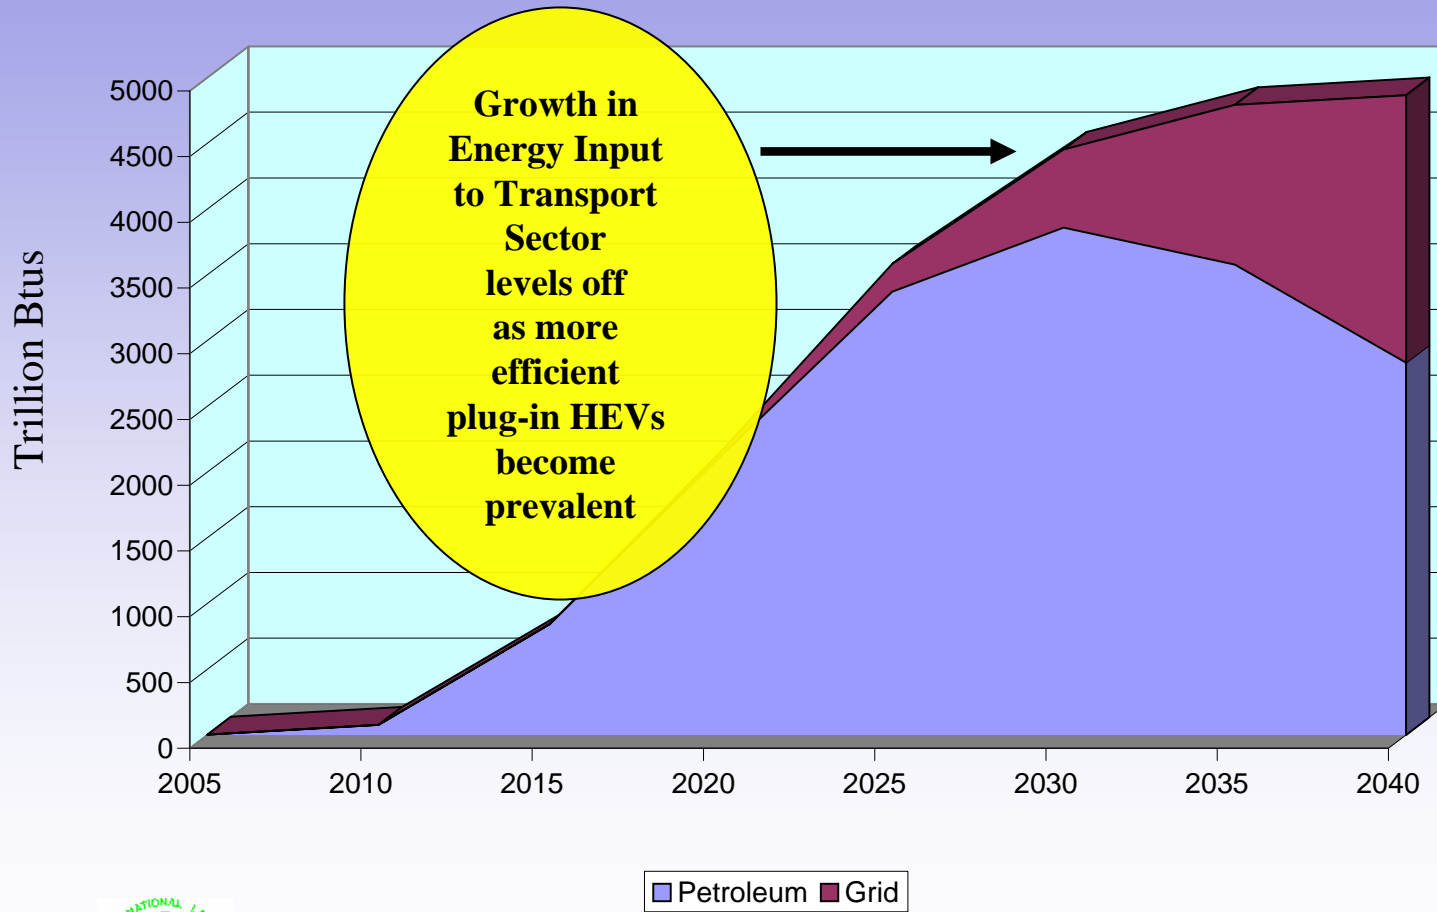


Source: AMIGA Presidential Goals Scenario Runs - HEV case

Energy Supply by HEV Size Type, 2040

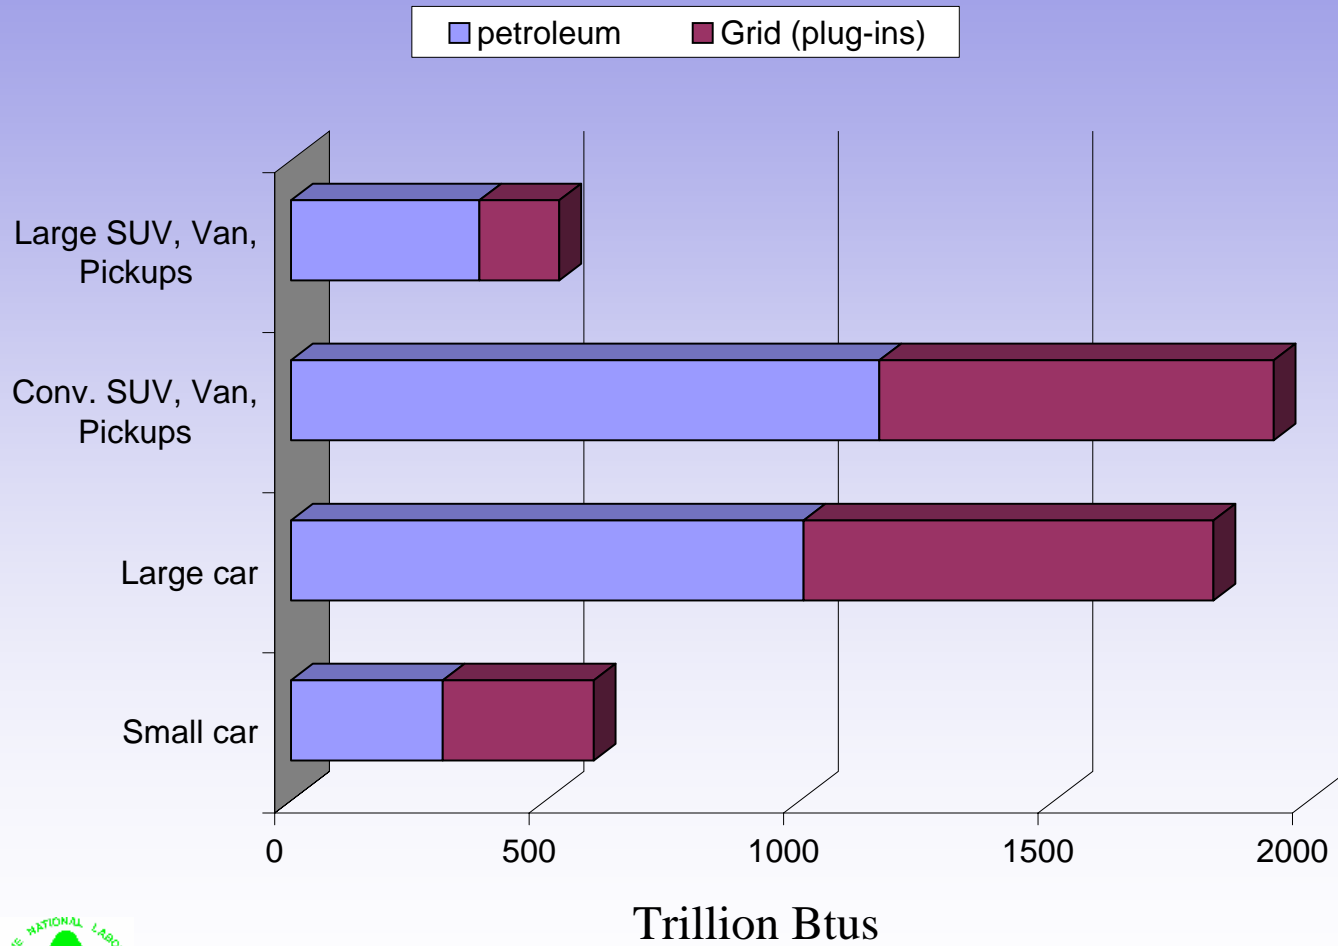

Source: AMIGA Presidential Goals Scenario Runs - HEV case

Electricity Generation by Fuel Type, HEV Case

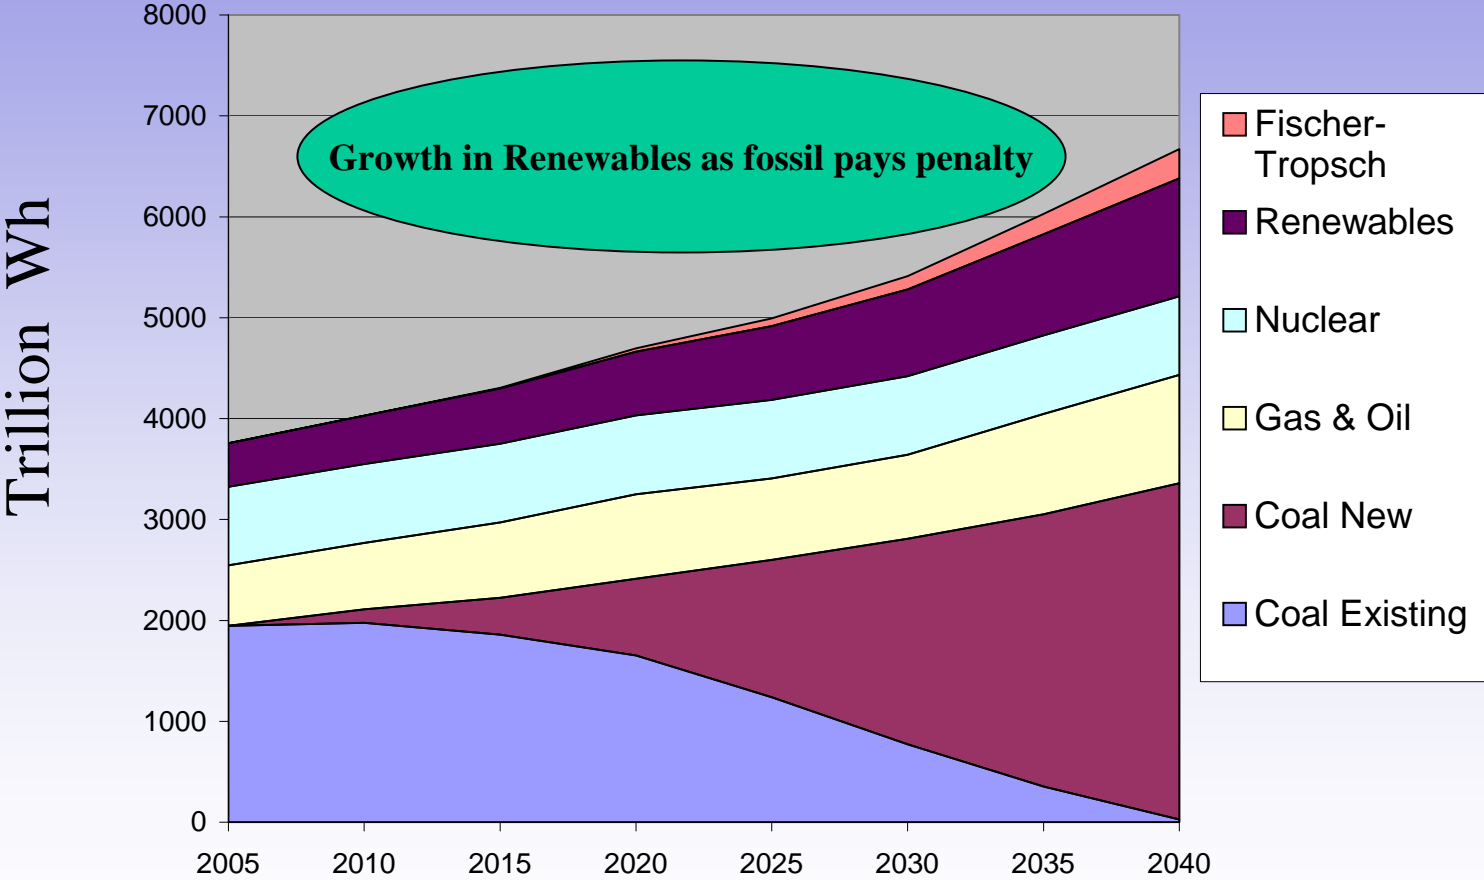

Source: AMIGA Presidential Goals Scenario Runs - HEV case

Concluding Remarks

- **Both Scenarios Meet Goals**

- Advent of plug-In HEVs ties Electricity and Transport Sectors
- To meet goals, significant amount of CO₂ capture and sequestration needed
 - HEV case C reduction: 56% from Transport, 46% from Power
 - FCV case C reduction: 62% from Transport, 37% from Power
 - ~95% of Power/FT plants' CO₂ captured
 - 10 % of new IGCC coal fleet captures ~20% of target reduction.
- Higher C goal with constant petroleum goal will increase level of required power sector sequestration

- **Modeling Challenges**

- At early stage of implementing DOE EE's H2A efforts