

NOTES:

- 1. CONCRETE: Structural concrete Class A(AE), with a specified minimum 28-day compressive strength F'c=4.35 kips/in. Vibrate all concrete. Chamfer exposed edges 3/4" unless otherwise shown. Do not use calcium chloride additives in the concrete.
- 2. The minimum concrete covering to the face of any bar is $1\frac{1}{2}$ " unless otherwise shown. All bars are #4.
- 3. FINISHING CONCRETE: Give all concrete surfaces a Class 1 finish except as specified in the Special Contract Requirements.

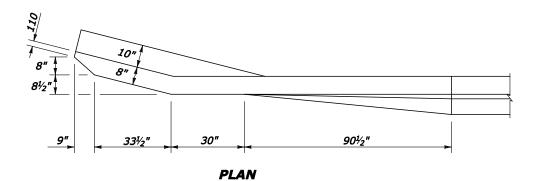


WINGWALL ISOMETRIC

Shape to match bridge rail

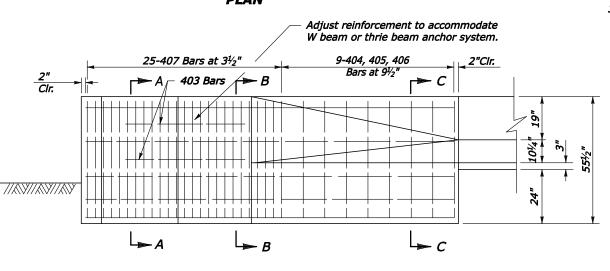

ELEVATION

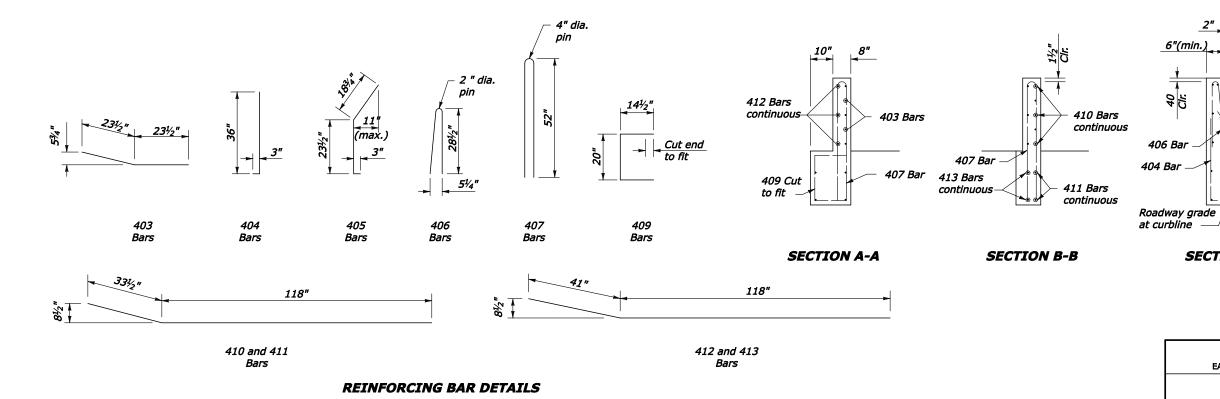

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION

405 Bar

field bend

as required

| //&\\Y//A | |

U.S. CUSTOMARY DETAIL

G4 W BEAM GUARDRAIL FLARED BACK PARAPET WALL AND SAFETY SHAPE TRANSITION

	DETAIL APPROVED FOR USE	DETAIL
3/08		F617-32

NO SCALE

SECTION C-C