DETAIL A

Single Solid White Striping (edge striping)


4" wide


broken white striping

Double Solid Yellow Striping (centerline)


30 ft

10 ft

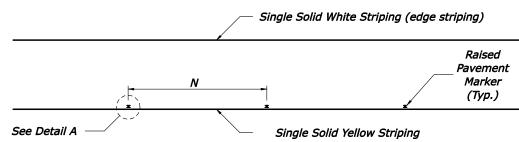

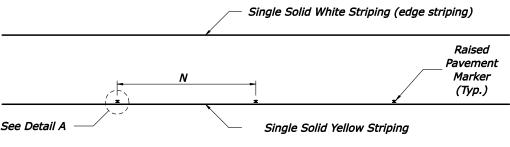




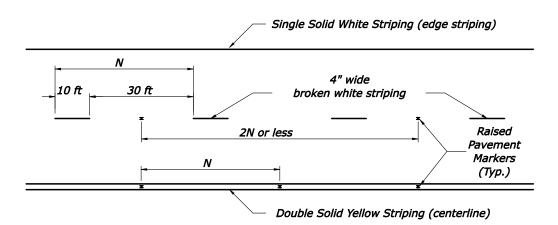


BROKEN SINGLE WHITE AND DOUBLE SOLID YELLOW STRIPING



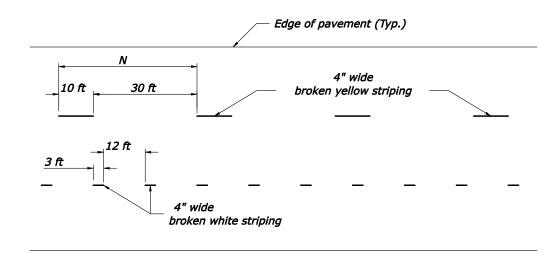

BROKEN SINGLE YELLOW AND DOTTED WHITE STRIPING

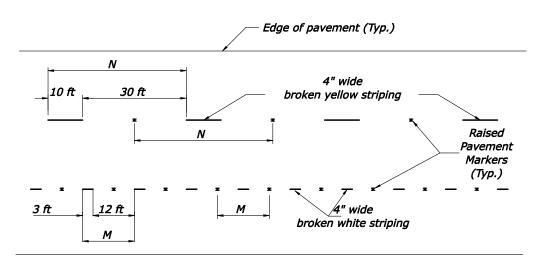

BROKEN SINGLE YELLOW AND DOTTED WHITE STRIPING WITH RAISED PAVEMENT MARKERS U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION

U.S. CUSTOMARY DETAIL

PAVEMENT MARKINGS WITH AND WITHOUT RAISED PAVEMENT MARKERS

DETAIL APPROVED FOR USE 10/94 VISED: 11/94 03/2007

STATE

LA

1. All striping shall be in accordance with the Manual on Uniform Traffic Control Devices (MUTCD) latest

2. Space and install Raised Pavement

Markers in accordance with the MUTCD and as shown in this detail

or as directed by the CO.

SE

edition.

NOTES:

PROJECT

RRP-LOP 10(2)

SHEET NO.

NO SCALE

DETAIL E634-03