
(SUPPLEMENTAL INFORMATION) PRIVATE DRIVE BEYOND THIS POINT R, O, W. Æ P. MIN. 12' WIDTH MAX. 25' 4" CONC RIPRAP WITH *9 WELDED WIRE MESH PIPE CENTERLINE Α Α 5' MIN. RADIUS SF-RESIDENTIAL 10' MIN. RADIUS ALL OTHERS EDGE OF PAVEMENT SHOULDER

PLAN VIEW

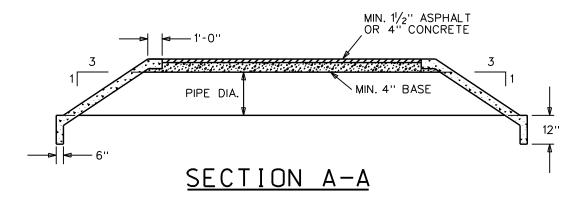

NOT TO SCALE

NOTES:

A) 4" BASE AND $1/_2$ " ASPHALT OR 4" CONCRETE, 9" OR MORE COVER RECOMMENDED.

B) 4" CONCRETE RIPRAP WITH *9 WELDED WIRE MESH FOR ALL SAFETY END TREATMENTS.

C) INSTALL CULVERT PIPE TO MATCH FLOWLINE OF DITCH.

D) ENGINEERED DRAWINGS MUST BE SUBMITTED FOR COMMERCIAL DRIVEWAYS.

E) SPECIAL CONDITIONS MAY APPLY TO ARCH PIPES LARGER THAN DES 3 AND ROUND PIPES LARGER THAN 30".

FILE: Q:\Project\Environmental\Driveway_Stds\culvert_style.dgn DATE: 18-Auq-06 16:17



TRAVIS COUNTY, TEXAS

TRANSPORTATION and NATURAL RESOURCES DEPARTMENT

RESIDENTIAL DRIVEWAY WITH CULVERT PIPE