

## CHAPTER 8

### NATIONAL DATA BUOY CAPABILITIES AND REQUIREMENTS

#### 8.1. General.

**8.1.1. Automated Reporting Stations.** The National Data Buoy Center (NDBC) maintains automated reporting stations in the coastal and deep ocean areas of the Gulf of Mexico, the Atlantic and Pacific Oceans, and in the Great Lakes. These data acquisition systems collect real-time meteorological and oceanographic measurements for operational and research purposes. Moored buoys are deployed in the Southern Gulf of Mexico, the Caribbean and the Atlantic Ocean east of the Lesser Antilles for the primary purpose of supporting National Hurricane Center operations. NDBC also quality controls and releases meteorological data from the National Ocean Service Water Level Observing Network and from moorings and coastal stations operated by cooperating Regional Ocean Observing Systems. The NDBC website at [www.ndbc.noaa.gov](http://www.ndbc.noaa.gov) provides locations, latest operating status, and site-specific information for NDBC stations and provides links to details on partner organization stations. Specific questions may be addressed to NDBC Data Management and Communications Branch, Stennis Space Center, Mississippi 39529-6000, phone 228-688-2835.

**8.1.2. Data Acquisition.** Moored buoy and Coastal-Marine Automated Network (C-MAN) stations routinely acquire, store, and transmit data every hour; a few selected stations report more frequently. Data obtained operationally include sea level pressure, wind speed and direction, peak wind, and air temperature. Sea surface temperature and wave spectra data are measured by all moored buoys and a limited number of C-MAN stations. Relative humidity is measured at several stations. Ocean currents and salinity are measured at a few coastal stations.

NDBC acquires, encodes, and distributes data from partner organizations via NWS dissemination systems. Data from partner organizations pass through NDBC data quality control procedures prior to NWS dissemination. Frequency and timeliness of transmissions from these stations varies by organization.

#### 8.1.3. Drifting Buoys.

**8.1.3.1. NDBC.** NDBC is capable of acquiring, preparing, and deploying drifting buoys; however, an operational drifting buoy requirement has not been identified or funded.

**8.1.3.2. Navy.** Since 1998, the Naval Oceanographic Office (NAVOCEANO) has deployed meteorological drifting buoys to report surface meteorological and oceanographic measurements, for operational purposes, as tropical systems move through data sparse regions tracking toward the U.S. East Coast. Additionally, Navy drifting buoys have been deployed in the Intertropical Convergence Zone (ITCZ). The drifting buoy measurements, which are available to tropical forecasters, provide invaluable input for defining tropical storm movement and intensity, improve forecast model initialization, and give tropical forecasters a much better sense of storm characteristics and track as they approach the fleet concentration areas of Jacksonville, FL, and Norfolk, VA. Drifting buoys typically have a life span of 1 to 2 years, and

the data are available through the NAVOCEANO homepage and through standard World Meteorological Organization (WMO) data sources.

NAVOCEANO acquires, prepares, and deploys drifting meteorological buoys based on operational requirements identified by Commander-in-Chief, Atlantic Fleet (CINCLANTFLT). Currently, CINCLANTFLT has identified the Navy's drifting buoy support as a standing requirement to support fleet safety, assist in fleet sortie decisions, and enhance tropical weather preparedness.

**8.2. Requests for Drifting Buoy Deployment.** Drifting buoy deployments should be coordinated through the Department of Commerce (DOC), National Oceanic and Atmospheric Administration (NOAA). Deployments will be requested through the Office of the Federal Coordinator for Meteorology (OFCM) to HQ Air Force Reserve Command (AFRC). Deployments in advance of a U.S. land-threatening hurricane require a 36- to 48-hour notification.

**8.2.1. CARCAH.** CARCAH will issue, through the Tropical Cyclone Plan of the Day (TCPOD), an alert or outlook for drifting buoy deployment 48 hours before the planned deployment. Hard tasking for the deployment will be issued via the TCPOD at least 16 hours, plus flying time to the deployment location, before the event.


**8.2.2. Deployment of Buoys.** DOC may request the deployment of a drifting buoy and subsurface float array with up to 40 elements at a distance of 200 to 400 nm from the storm center, depending on the dynamics of the storm system. DOC will ensure the buoys and mission-related DOC personnel are delivered to AFRC. The specific DOC request for placement of the buoys will depend on several factors, including:

- Characteristics of the storm, including size, intensity, and velocity.
- Storm position relative to the coast and population centers.
- Availability of aircraft and *Loadmasters (LM)* certified for buoy deployment.

**8.2.3. Deployment Position.** The final deployment position will be provided before the flight crew briefing. An example of a possible buoy and float deployment pattern from the recent CLBAST Experiment is shown in Figure 8-1.

**8.3. Communications.** Moored buoy and C-MAN data are transmitted via NOAA Geostationary Operational Environmental Satellite (GOES) to the National Environmental Satellite, Data, and Information Service (NESDIS) or via the Iridium satellite communication system and then are relayed to the NWS Telecommunications Gateway (NWSTG) for processing and dissemination. Data from partner organizations acquired by NDBC are relayed to the NWSTG for processing and dissemination. Moored buoy observations are formatted into the World Meteorological Organization (WMO) FM13 SHIP code. C-MAN and other partner organization coastal station data are formatted into C-MAN code, which is very similar to the WMO FM12 SYNOP code. Drifting buoys transmit data via NOAA's Polar Orbiting Environmental Satellites (POES) to the U.S. Argos Global Processing Center, Largo, Maryland.

Service Argos processes and formats the data into WMO FM18 BUOY code. The messages are then routed to the NWSTG for distribution. The formats for WMO encoded messages may be found in the WMO Manual on Codes Volume One, WMO-No. 306.

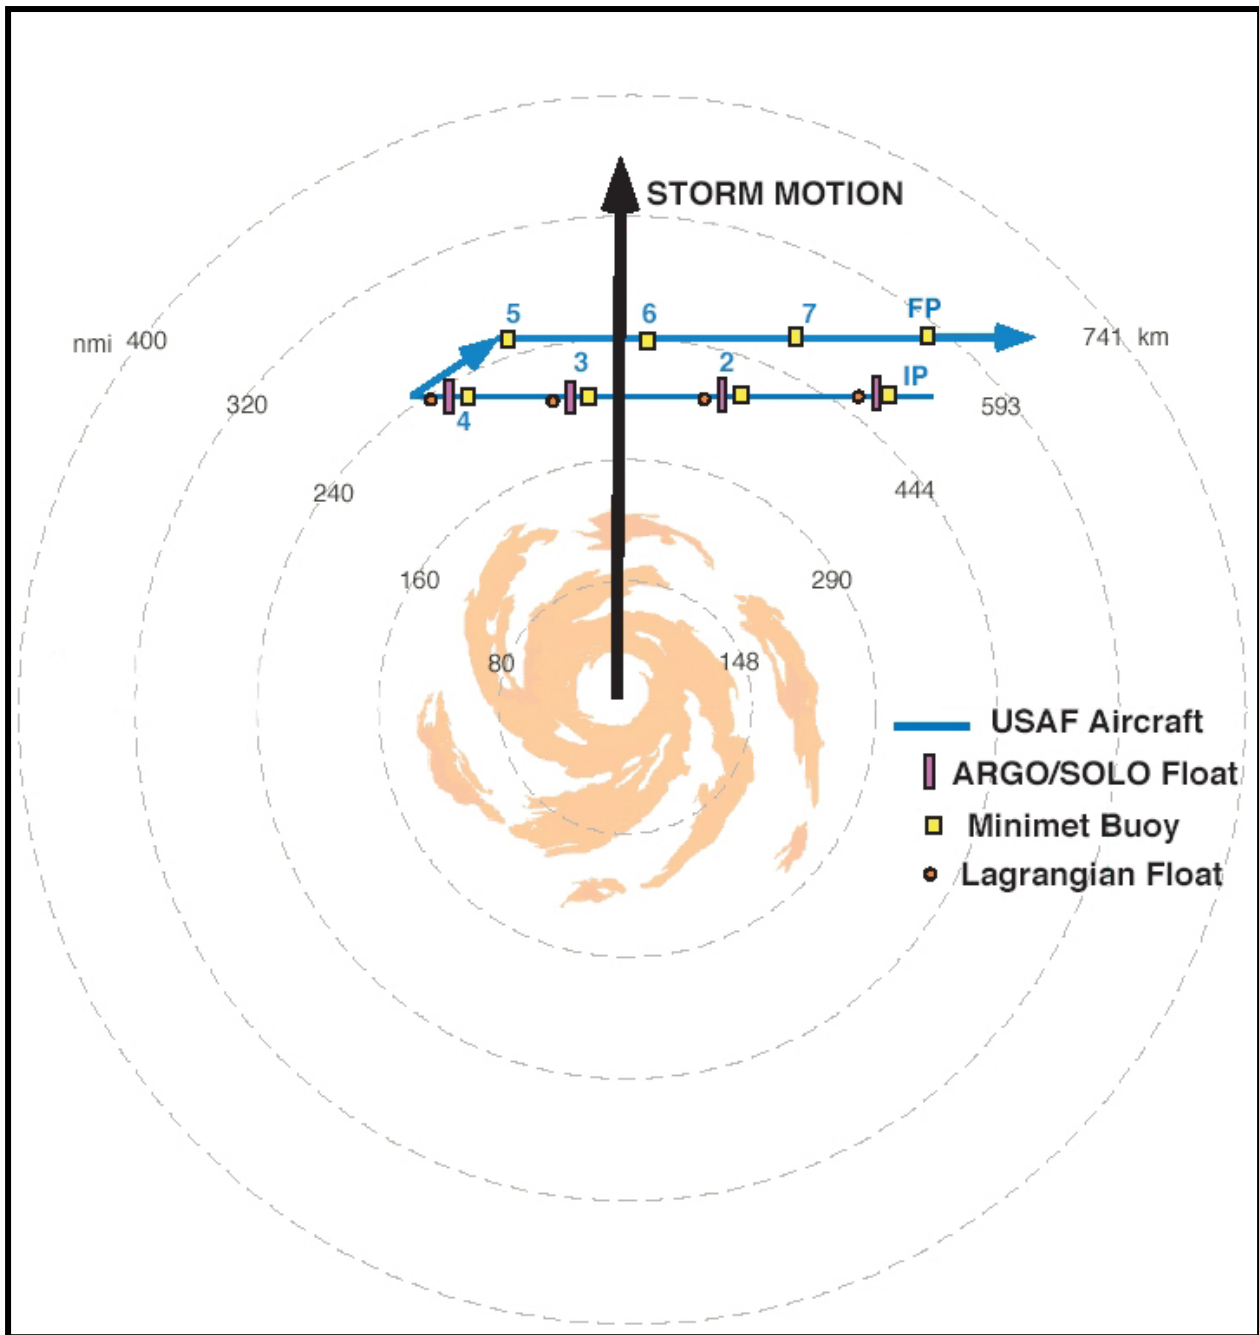

**Figure 8-1. Example Buoy and Float Deployment Pattern**

