



# **Review and Assessment of the Technical Basis of 40CFR190**

**John E. Kelly  
Sr. Manager, Advanced Nuclear Energy Programs  
Sandia National Laboratories**

Sandia is a multiprogram operated by Sandia Corporation, a Lockheed Martin Company  
for the United States Department of Energy's National Nuclear Security Administration  
under contract DE-AC04-94AL85000.





# Outline

## Why is 40CFR190 Important?

### Technical Bases for 40CFR190

- Dose and Health Effects
- Cost Analysis
- Risk Integration

### Changes Since EPA's 1976 Final Environmental Statement

### Observations

### Summary





# 40CFR190: Environmental Protection Standards for Nuclear Power Operations

## Limits for Normal Operations - Subpart A

### Dose Limit

**190.10(a):** “...annual dose equivalent dose not exceed 25 mrem to whole body, 75 mrem to thyroid and 25 mrem to any other organ of any member of public...”

EPA concerned that the previous standard was unnecessarily high and could be reduced without burdening industry.

***Historical evidence suggests that this standard will not be difficult to meet***





## 40CFR190: Environmental Protection Standards for Nuclear Power Operations

### Limits for Normal Operations - Subpart B

#### Release Limit

**190.10(b):** "...total quantity of radioactive materials entering general environment...per gigawatt-year of electrical energy...contains less than 50,000 Ci Kr-85, 5mCi I-129, and 0.5 mCi Pu-239..."

EPA concerned about build-up of persistent isotopes (I-129, Kr-85, etc) especially in light of growth projections for nuclear power

**I-129 produced – 1000mCi/GWe-yr**

**Kr-85 produced – 300,000Ci/GWe-yr**


**Release limits for I-129 & Kr-85 could be difficult to meet in a cost-effective manner**





# Global Build-up of Kr-85

“Actual” environmental burden uses historic global growth, no controls

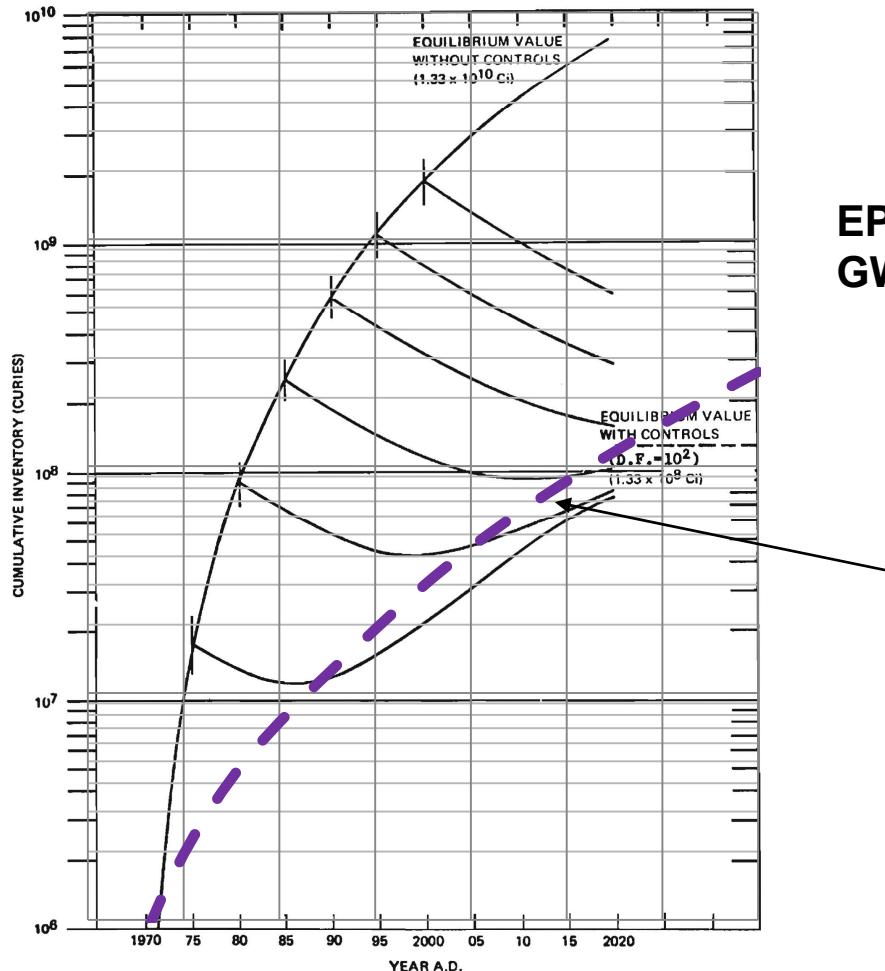

EPA Assumed 2700 GWe in US by 2020

“ACTUAL” ENVIRONMENTAL BURDEN

FIGURE 8. PROJECTED ENVIRONMENTAL BURDENS OF KRYPTON-85 FROM THE UNITED STATES NUCLEAR POWER INDUSTRY FOR CONTROL INITIATED IN VARIOUS YEARS. THE EQUILIBRIUM VALUES ARE THOSE FOR MAXIMUM POWER PRODUCTION EQUAL TO THAT PROJECTED FOR THE YEAR 2020.

July 2010

Actual global capacity growth From [www.eia.doe.gov](http://www.eia.doe.gov), Table 27





# Envisioned Benefit of “New” Standard

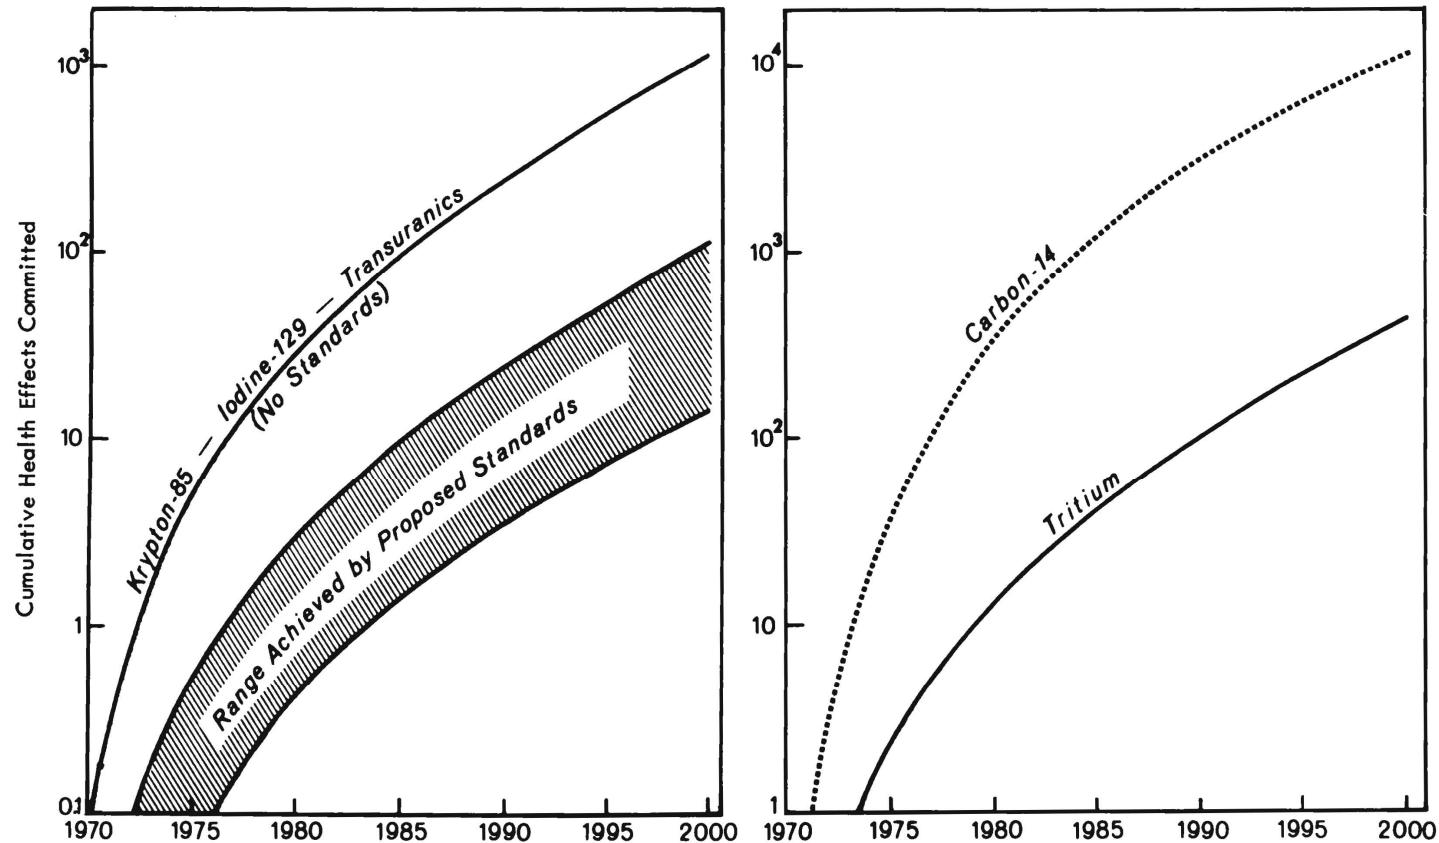


Figure 11. Projected health effects attributable to releases of long-lived radionuclides. Health effects are projected for 100 years following release only, and the exclusive use of uranium fuel is assumed.






# EPA Methodology

- Final Environmental Statement and supporting technical documents provide basis for rule (1976)
- EPA developed model for estimating health effect
  - 1500 MT/yr reprocessing plant used as basic unit
  - Developed release, transport, and health effects model for isotopes of interest
    - Parametrically varied decontamination factors
- Determined cost of decontamination systems
  - Wide range of technologies assessed
- Evaluated cost versus effectiveness (as measured by health effects avoided)





# Overview of EPA Methodology

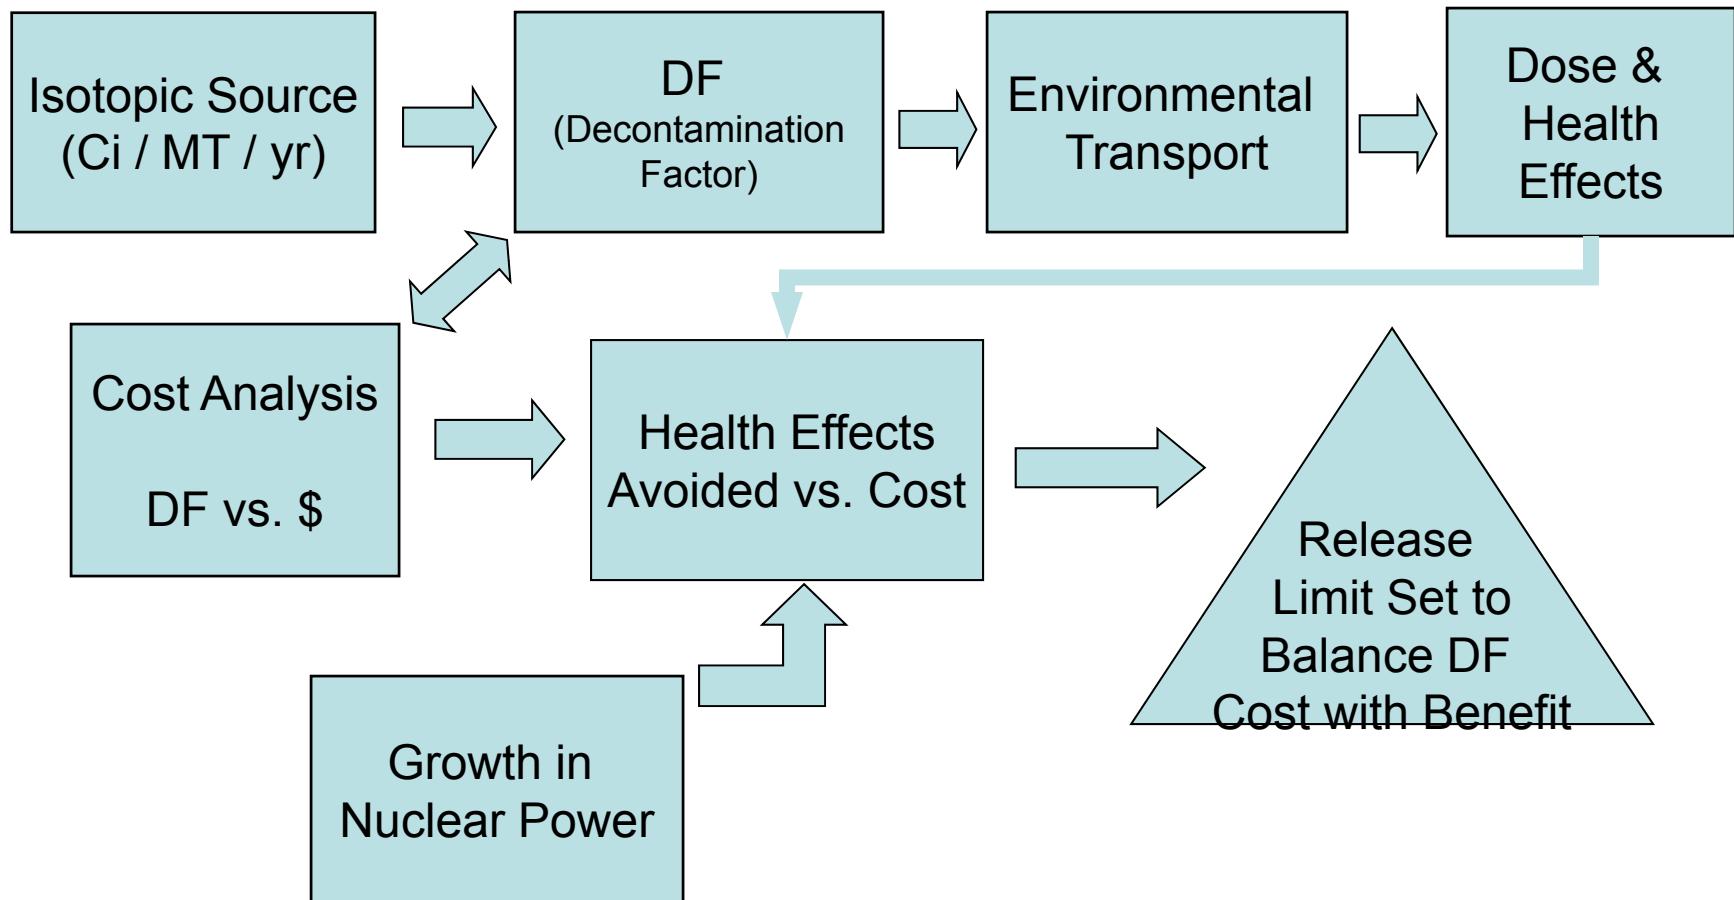



# General Form of Dose and Risk Calculations

$$D \sim Q \cdot 1/DF \cdot TF \cdot DCF \cdot P$$


$$HE = RF \cdot D$$

Symbol	Description	Units
D	Dose	rem or person-rem
Q	Isotopic Source (Material at Risk)	Ci
DF	Decontamination Factor	dimensionless
TF	Environmental Transport Factor	dimensionless
DCF	Dose Conversion Factor	Rem/Ci
P	Population	Persons
HE	Health Effects	Cancers, fatalities, etc.
RF	Risk Factors	Health Effects/rem





# Radionuclide Pathways

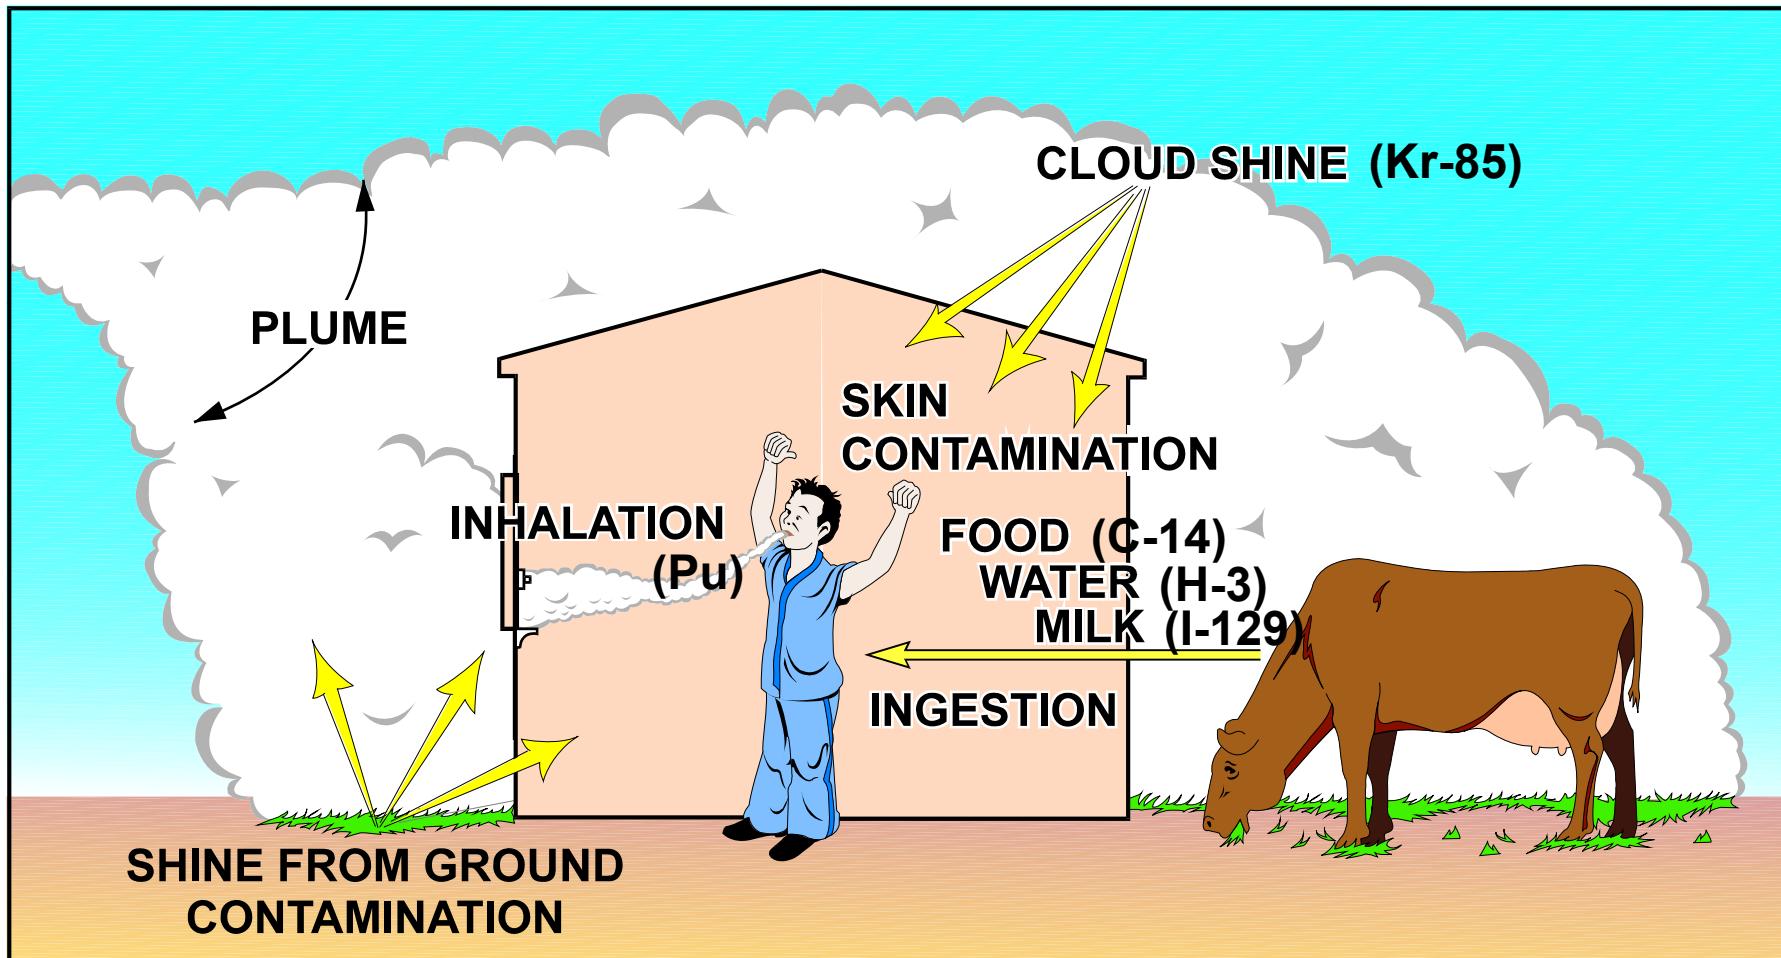




# Fission Product Transport in Region Surrounding Plant

- Annual-average dilution factors (X/Q) used to determine

- Dose at 3 km (2 mi) from plant (nearest population)
  - Average dose within 80 km (50 mi) from plant

- Assumptions

- Continuous release from 1500 tonne/yr plant
  - Population doubles over plant lifetime of 40 years
  - Lifetime doses are constructed by integrating over 40 years
  - Health effects are proportional to dose ( $HE = RF \cdot D$ )

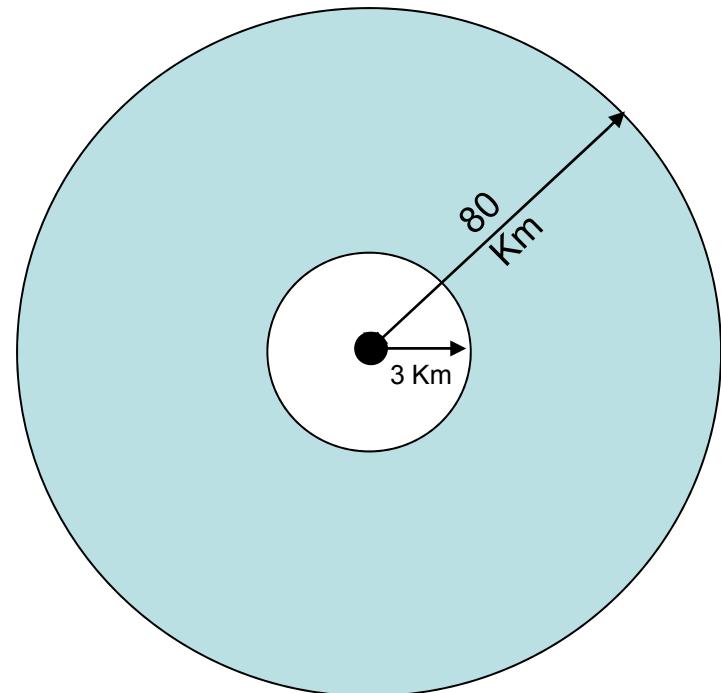

Initially (1980) 1.5 million people in surrounding region






## Health Effects for U.S. Population from Kr-85

**Assumes Kr “cloud” makes one pass over Eastern U.S.**

- Effects are uniform
- Exposure pathway is immersion

**Accounts for population growth in U.S.**

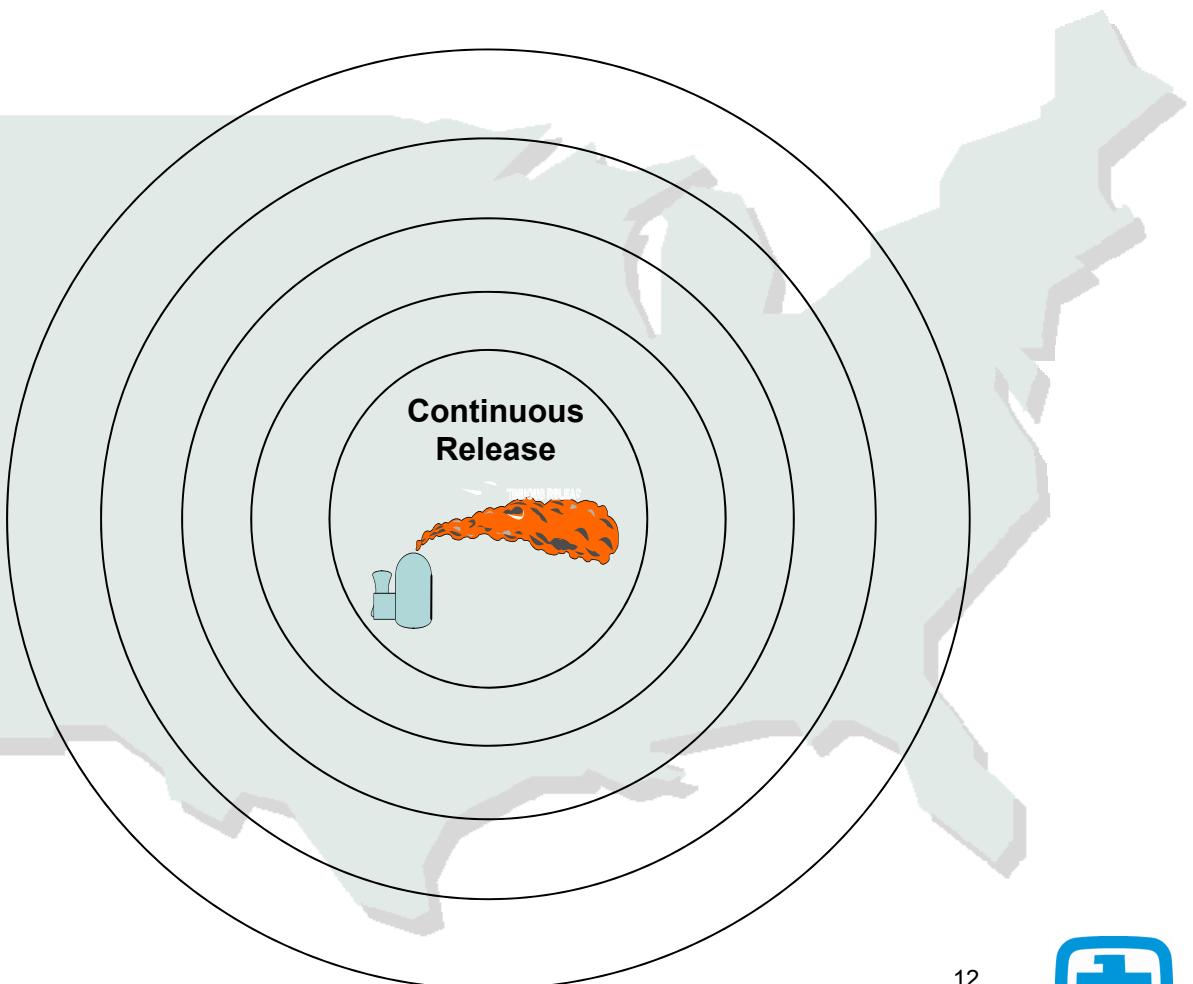



## Health Effects for World from Kr-85



Kr uniformly dispersed in entire atmosphere.

World population is exposed by immersion

Includes growth in world population and Kr decay.





## Calculated Health Effects for 1500 MT/yr Plant

		<i>Estimated Health Effects Based on LNT from 40 Years of Operation of 1500 Tonne/Yr Plant</i>				
<i>Radionuclide</i>	<i>Organ</i>	<i>3 km</i>	<i>Regional</i>	<i>US</i>	<i>World</i>	<i>Total</i>
Kr-85	Effective	6.0 E-6	0.38	6.4	130	140
H-3	Effective	5.2 E-5	3.2	62	24	90
I-129	Thyroid Adult	7.4 E-5	0.02	0.12		
(DF=1000 for I-129)						






# Individual and Collective Doses

Individual and Collective Annual Doses from 1500-tonne/yr Plant								
<i>Radionuclide</i>	<i>Organ</i>	<i>3 km</i>	<i>Regional</i>	<i>Regional</i>	<i>US</i>	<i>US</i>	<i>World</i>	<i>World</i>
		<i>mrem/yr</i>	<i>Person-rem/yr</i>	<i>μrem/yr</i>	<i>Person-rem/yr</i>	<i>μrem/yr</i>	<i>Person-rem/yr</i>	<i>μrem/yr</i>
Kr-85	Effective	0.37	24	10	560	2	7900	2
H-3	Effective	3.2	200	89	3900	16	1000	0.2
I-129	Thyroid Infant	1.4	28	12				
	Thyroid Adult	0.4	12	5				

(DF=1000 for I-129)



# Cost Effectiveness of Decontamination Technologies

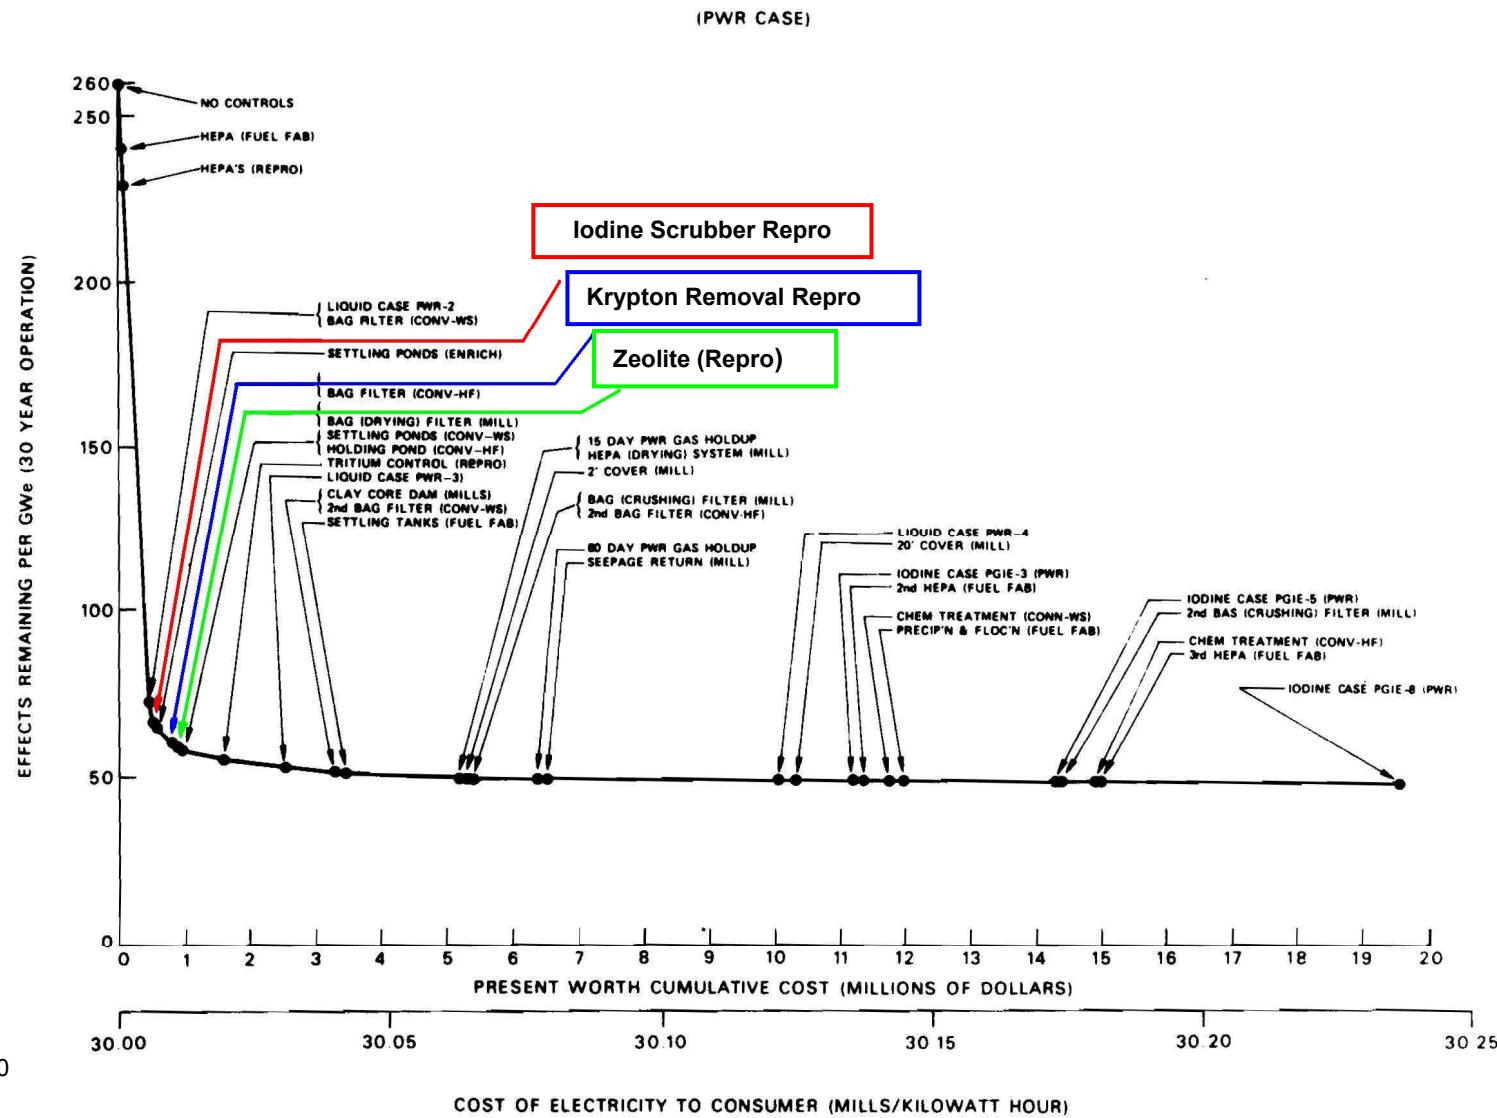

July 2010





## DFs Implied by EPA Standard

- Based on this analysis EPA concluded that the following would be appropriate
  - DF=1000 for Iodine
  - DF=10 for Kr
  - DF=1 for T and C-14 because of insufficient control measures at that time
- It appears that actual limits added margin
  - Required DF for I ~200
  - Required DF for Kr ~5





# What's Changed Since 1976?

- Dose Conversion Factors
- Health Effects Modeling
- Cooling Time Assumptions
- Decontamination System Costs





# Evolution of Dose Conversion Factors

## Dose Conversion Factors (rem•cm<sup>3</sup>/yr/μCi)

	<i>ICRP- 8 (1970)</i>	<i>ICRP-72 (2008)</i>	<i>Ratio</i>
Kr	15,000	28,000	2
H-3 (ingestion)	100	55	1/2





# Evolution of Health Effects Modeling

DOCUMENT	DATE	"NATURAL" U.S. BACKGROUND	Kr-85 EXPOSURE ESTIMATES (MREM)	DOSE RESPONSE MODEL –EXPOSURE
Second Life Style Symposium	1941			0.1 µg Ra body burden 1E-11 Ci/liter in surrounding air
Chalk River Meeting	1953			15 mrem/year uniformly distributed throughout the body
ICRP 8	1965	80 to 100 mrem/year		
BEIR I	1972	180 mrem/year natural+medical +fallout+nuclear power	4E-4/person in 1970 4E-2/person in 2000	5.68E-4 LCF per rem-year per LCF in general population; 1.15E-4LCF per rem-year
Fuel Cycle EIS	1973	200 mrem/year natural+medical +fallout+nuclear power	0.38 mrem/y whole body; 13 mrem/y skin; PROJECTED	1.5E-3/rem/year to U.S. population
UNSCEAR	1977			4.03E-4/ rem/year: relative; 1.58E-4 absolute
BEIR III	1980	210 mrem/year natural+medical +fallout+nuclear power	2.1E-2/person in 1970 1.7/person in 2000	1.69E-4/ rem/year: relative; 0.67E-4 absolute
BEIR V	1990	360 mrem/year natural+medical +fallout+nuclear power		5.6E-4/ rem/year relative
ISCORS Technical Report 1	2002			6E-4/ rem/year relative
BEIR VII	2006	365 mrem/year natural+medical +fallout+nuclear power		<b>6.1E-4/ rem/year relative</b>





# Effect of Fuel Cooling Time

Longer Cooling Time is Beneficial for Kr

<i>Isotope</i>	<i>Fuel Cooling Time (yrs)</i>	<i>mCi per GWY(e) in Fuel</i>	<i>40CFR190 Quantity Limit (mCi)</i>	<i>Required DF to meet Standard</i>
Kr-85	4	2.21E+08	5.00E+07	4.5
Kr-85	10	1.50E+08	5.00E+07	3
Kr-85	27	5.00E+07	5.00E+07	1
I-129	27	9.32E+02	5.00E+00	190

Table assumes 50 GWd fuel burn-up





# Financial cost of compliance (2008 dollars)

		EPA 1500 MTHM/yr		INRA 800 MTHM/yr
Isotope	Technology	Annual Operating Cost Estimate	Capital Cost Estimate	Capital Cost Estimate
I-129	Silver zeolite beds & voloxidation	\$ 1.8 M	\$ 16 M	\$ 300 M
Kr-85	Cryogenic Distillation	\$ 6.1 M	\$ 120 M	\$ 1.0 B

*Industry cost estimate is greater than 10 times that of EPA's*





# Observations on EPA Methodology

- EPA dose and health effects model is conservative, but is not significantly different from current methods
- Obviously the growth in nuclear power projected in 1970 has not been met (10x less)
- There has been no major change in assessing biological effects of radiation
- Need realistic cooling time assumptions (Kr-85)
- Cost basis for decontamination technologies seems overly optimistic (10X)
- EPA results are dominated by collective dose model





## Collective Dose Model

- Collective dose calculated with linear no-threshold dose response is frequently used in studies comparing technology options (e.g., PEIS)
- However, its use in an absolute sense leads to unrealistically high number of cancers and has been a subject of debate for decades.
- For dose standards, it is preferable to use Maximum Exposed Individual as the metric





## What would be acceptable effluent management approaches?

- **25 mrem/yr at site boundary would still seem to be relevant**
- **Some degree of sequestration of I-129, H-3, C-14 might be advisable**
  - Ocean disposal probably not an option
  - Public concern about H-3 releases might be raised
  - Capture, store, and geologically store majority and release some fraction might be an option
  - Worker doses may become a problem without radiological controls
- **Recycling of older fuel helps mitigate expected doses**
  - Kr-85 no longer is an issue (probably is not a real issue in any case)
  - Tritium decay would also be significant
  - Unlikely that industry could build enough recycling plants to even deal with backlog
- **Issues with recycling older fuel**
  - Utilities might desire hotter fuel removed first
  - Fissile quality of recycle product degrades with build up of Am-241





# Summary

- **Collective dose method drives the regulation and is an issue**
  - This is especially true for world-wide projections
  - Need to develop an alternate approach
- **Cost estimates for decontamination systems should be re-evaluated**
- **Realistic growth curves for nuclear power should be incorporated into analysis**
- **Need to develop a holistic approach for effluent control**

