Identifier: SOP-5137

(Formally ENV-MAQ-706, R6)

Revision: 0

Effective Date: 2/26/2008



Waste and Environmental Services

Standard Operating Procedure

for PROCESSING BIOTA SAMPLES FOR ANALYSIS

APPROVAL SIGNATURES:

Subject Matter Expert:	Organization	Signature	Date
Philip Fresquez	WES-GS	Signature on file	1-25-2008
Quality Assurance Specialist:	Organization	Signature	Date
Laura Ortega	QA-IQ	Signature on file	1-25-2008
Responsible Line Manager:	Organization	Signature	Date
Craig Eberhart	WES-GS	Signature on file	2-5-2008

Title: Processing Biota Samples	No.: SOP-5137	Page 2 of 12
	Revision: 0	Effective Date: 2/26/2008

1.0 PURPOSE AND SCOPE

This procedure describes the methods of processing (i.e., preparing samples for analysis) foodstuff (produce, eggs, honey, fish, and game animals) and non-foodstuff (vegetation, mice, bees, birds) biota samples for the analysis of radionuclides, target analyte list (TAL) elements, and PCBs. Detection levels for radionuclide and TAL elements and method specs are given in Attachment 1.

2.0 BACKGROUND AND PRECAUTIONS

2.1 Background

This document establishes the basic requirements for processing biota samples for analysis and applies to all personnel performing laboratory procedures described in this document. Work performed under this procedure by LANL personnel will occur only after required training to applicable documents has been completed and documented.

2.2 Precautions

See Hazard Review (Attachment 2) for any precautions during processing of samples.

3.0 EQUIPMENT AND TOOLS

- Cutting boards and knives;
- Balance:
- Glass beakers (50-mL, 100-mL, 1-L, and 2-L volumes);
- Aluminum foil;
- · Hot-mitts/pot holders;
- · Hot plate;
- Watch glass;
- Plastic wrap (e.g., Saran wrap[™]);
- Ice cubes;
- Small paper bags;

- · Wiley mill with a 40-mm screen;
- Drying and ashing ovens;
- Polyethylene bottles (20-mL and 500-mL volumes; one for each sample);
- Ziplock[™] bags (gallon size) and labeling pens;
- Chain-of-custody tape;
- · Laboratory notebook;
- Personal Protective Equipment (e.g., safety glasses, safety shoes, lab coat, rubber gloves, cut-resistant [Kevlar] gloves when using knife, and face shield when cutting up game samples).

4.0 STEP-BY-STEP PROCESS DESCRIPTION

4.1 F	1 Processing Biota Samples for Tritium Analysis					
Analyst 1.		Don safety glasses, lab coat, and heavy rubber gloves.				
	2.	Water is distilled from a sample and collected. There are various distillation vessels to achieve this, but a simple setup is as follows. Place a 100-mL beaker upside-down in the center of a 1L sample beaker, with a 50-mL beaker right-side-up on top of it. Then place samples in the 1L beaker. Refer to Schematic of Distillation Setup (Attachment 3).				
	3.	Cover the top of the large 1L beaker with a watch glass and seal with plastic wrap.				

Title: Processing Biota Samples		a Samples	No.: SOP-5137	Page 3 of 12		
			Revision: 0	Effective Date: 2/26/2008		
	4.	To aid in condensation of t the watch glass.	he water sample, fill a beaker with i	ce and place it on top of		
	5.	Place the sample on a hot plate, warming at a low temperature until water begins to condense on the watch glass. Be certain that the condensation drips into the 50-mL sampling beaker. CAUTION!! Hot plate and glassware will become hot! Use care when handling these items.				
	6.	Collect about 15mL of distillate from each sample, and carefully place sample into labeled 20-mL polyethylene bottles.				
	7.	Seal each bottle with chair chain-of-custody form.	sample on the appropriate			
	8.	8. Place all tritium samples and the chain-of-custody form into a labeled Ziplock refrigerate. Maintain chain-of-custody on the samples (see chapter <i>Chain-of-samples</i>).				
4.2 Pr	ocessing B	iota Samples for TAL Analys	is			
Analyst	Pro	oduce and Vegetation				
	1.	and rinse as though being	0 g (fresh weight) of produce from e washed for human consumption. Pa o pieces to facilitate oven drying. Pl	at the produce dry with		
		and cut or break vegetation	0 g (fresh weight) of vegetation from n into smaller pieces to facilitate ove Place individual samples into label	en drying. (Note: native		
	2.		ng oven and dry the samples in the p to 5 days for certain sample types			
	3.	After initial drying, weigh the samples to the nearest 0.01 g. Continue drying and weighing the beakers each day until sample weights are constant (+10%) in two successive weighings—samples are dry.				
	4.		the oven, and grind each through a sses, lab coat, and heavy rubber gland Il vacuum cleaner.	_		
		CAUTION : Do not operate previously trained group m	mill unless you have received pers ember.	onal instruction from a		
	5.	Place ground samples into bottles with chain-of-custon	labeled 20-mL polyethylene bottles dy tape.	s, and then seal the		
	6.	Place the sealed bottles in	to a labeled Ziplock™ bag			
	7.	Record all samples on a ch	nain-of-custody form, and maintain p	oroper chain-of-custody		

Title: Processing Biota Samples	No.: SOP-5137	Page 4 of 12
	Revision: 0	Effective Date: 2/26/2008
		_,,

on the samples until submitted to the analytical laboratory. See chapter *Chain-of-custody for samples*.

Fish, Game Animals, Mice and Birds

1. Fish

Clean and rinse fish with water.

Game Animals

Thoroughly wash muscle, bone, and organs to remove excess blood and/or debris. (Wear face mask when cutting up game samples.) Use paper towels to pat-dry.

2. Fish

Remove a 10-g (fresh weight) sample of meat (fillet) from fish.

Game Animals

Remove a 10-g (fresh weight) sample of muscle, bone, or organ.

Mice

Mice are submitted whole.

Birds

Birds are submitted whole

- 3. Put samples into individually labeled Ziplock™ bags and place in freezer. Keep samples frozen until analysis.
- 4. Record all samples on a chain-of-custody form, and maintain proper chain-of-custody on the samples. See chapter *Chain-of-custody for samples*.

4.3 Processing Biota Samples for Radiochemical Analysis

Analyst

- 1. Prepare the sample beakers by labeling (with pencil) and weighing the 2-L beaker to determine the tare weight and record this value in the laboratory notebook.
- 2. Place ~ 500 to 2,000 g of produce (sliced), fish (head and viscera removed), game animal (muscle, bone, or organ meat), vegetation, honey, mice (whole body), and birds (whole body) into labeled 2-L tared beakers and weigh to the nearest 0.01 g to determine gross weight.
- 3. Record the fresh weight of the samples (subtract the tare weight from the gross weight) in the laboratory notebook.
- 4. Cover each beaker with vented aluminum foil. Poke holes into the aluminum foil to aid the venting processes and place in the drying oven. Carefully note or map the placement-order of the beakers in the lab notebook (this is important because during the ashing process the labeling may burn off.)
- 5. Dry the samples in the beakers at about 75°C a minimum of 48 hours, or up to 5 days for certain sample types.
- 6. After initial drying, weigh the samples to the nearest 0.01 g. Continue drying and weighing the beakers each day until sample weights are constant (+10%) in two successive weighings—samples are dry.

Title: Process	Title: Processing Biota Samples		No.: SOP-5137	Page 5 of 12		
			Revision: 0	Effective Date: 2/26/2008		
	7.	Remove dry samples from the or original tare weight from this grossample. Enter this data in the lab	ss weight to calculate the dry v	_		
	8.	Place samples in the ashing ove samples for about 5 days to an a step-wise from 75°C to 500°C to the early stages of the process.	sh. During ashing, raise the te	emperature slowly and		
	9.	After ashing is complete (sample should look white) and samples have cooled, reweighted the samples to the nearest 0.01 g. Calculate ash weights by subtracting tare weights from gross ash-weights. Record all data and calculations in the laboratory notebook.				
	10.	Transfer each ash sample to a 500-mL polyethylene bottle and label the bottle.				
	11.	Seal the bottles with chain-of-custody form. See chapter Chair		oles on a chain-of-		
4.4 Proce	essing F	ish Samples for Organic (PCB) An	alysis			
Sampler	1.	Record fish weight and length.				
and Analyst	2.	Gut and separate viscera (organs, fatty deposit).				
	3.	Cut a fillet sample containing both meat and skin.				
	4.	Put fillet sample in pre-labeled 500mL amber screw-top jars and place in refrigerator or freezer until analysis.				
	5.	Record all samples on a chain-of-custody form, and maintain proper chain-of-custody on the samples. See chapter <i>Chain-of-custody for samples</i> .				
4.5 Proce	essing N	lice and Bird Samples for Organic	(PCB) Analysis			
Sampler and Analyst	1.	Place whole body mice and bird samples into pre-labeled 500mL amber screw-top jars and place in refrigerator or freezer until analysis.				
	2.	Record all samples on a chain-o on the samples. See chapter <i>Ch</i>		proper chain-of-custody		
4.6 Main	taining C	Custody of Samples				
Sampler	1.	Document chain-of-custody for a	Il samples used to demonstra	te compliance.		
and Analyst	2.	 In one's physical poswith it; or 	in custody if it is one of the followers. Seession; Seing in one's physical possess Seession and then locked up so Seession and the locked up so	owing: ion; o that no one can tamper		
		A secured area is an area that is	•	vehicle, or refrigerator).]		

Title: Process	sing Biota Samples		No.: SOP-5137	Page 6 of 12	
			Revision: 0	Effective Date: 2/26/2008	
	3.	If the area cannot be secured, us container.	se a custody seal to secure th	e area or the sample	
4.7 Trans	sferring (Custody of Samples			
Sampler and Analyst	1.	Whenever samples are transferre complete the "relinquished by/red	•	. •	
		[NOTE: These sections of the for samples from collection to transform			
4.8 Broke	en Chain	-of-Custody			
Sampler and Analyst	·				
	2.	Document the occurrence, evalu- propose a fix to prevent recurren		y) on the samples, and	
4.9 Emer	gency A	ctions to Take in the Event of Cont	rol Failure		
Sampler	1.	Perform First Aid for cuts, as app	propriate.		
and Analyst 2. For all injuries, provide first aid and see that the injured person is taken to Occup medicine (only if immediate medical attention is not required) or to the nearest h					
	3.	Notify the individual's supervisor	and group office as soon as p	possible.	
4.10 Reco	rds				
Sampler 1. Submit the following records generated by this procedure to the Records Property and Analyst Facility:				ne Records Processing	
		 Completed Chain of 	Custody form.		
 Copy of Shipping Manifest. 					

5.0 PROCESS FLOW CHART

Flow chart is to be included at a later date.

6.0 ATTACHMENTS

Attachment 1 Reporting limits for radionuclides and TAL elements required for analysis.

Attachment 2 Hazard Review for Processing Samples for the Foodstuffs and Nonfoodstuffs Monitoring Program.

Attachment 3 Schematic of Distillation Setup.

Title: Processing Biota Samples	No.: SOP-5137	Page 7 of 12
	Revision: 0	Effective Date:
		2/26/2008

7.0 REVISION HISTORY

Author: Phil Fresquez

Revision No. [Enter current revision number, beginning with Rev.0]	Effective Date [DCC inserts effective date for revision]	Description of Changes [List specific changes made since the previous revision]	Type of Change [Technical (T) or Editorial (E)]
0	10/4/96	New Document	Т
1	3/99	Reformatted in accordance with LIR300-00-01, Safe Work Practices.	Е
2	4/01	Added new Section 9.0, Training.	Т
3	4/02	Change in directorate.	Е
4	4/03	Team name change to Environmental Surveillance.	Е
5	7/13/04	Updated and reformatted document to conform with MAQ procedures.	Е
6	11/20/04	Add instructions for oven temperature setting and ventilation, added HR to replace HCP.	Т
0	1/30/08	Changed title, renumbered, and reformatted to WES Division.	E

Using a CRYPTOCard, click here to record "self-study" training to this procedure.

If you do not possess a CRYPTOCard or encounter problems, contact the ERSS training specialist.

Title: Processing Biota Samples	No.: SOP-5137	Page 8 of 12
	Revision: 0	Effective Date:
		2/26/2008

Appendix 1.

MDC for Radionuclides and Reporting limits for metals and method specs for BIOTA (tissue)

Element	MDC or Reporting limits	Media	Method	MDC or RL	Special considerations
H-3	0.50 pCi/mL	water	906.0 LSC	0.50 pCi/mL	5ml min volume with long count. 10ml volume uses normal count.
Am-241	0.01 pCi/g	ash	ASTM-D3972- mod Alpha spec	0.01 pCi/g	7 gram minimum, with 1000 min. count. (note 3g gives 0.03 MDC)
Cs-137	1 pCi/g	ash	901.1 mod Gamma	1 pCi/g	8 gram minimum, with 1000 min count
Sr-90	0.05 pCi/g	ash	ASTM-D5811- mod GFP	0.05 pCi/g	5 gram minimum with 1000 min count
Pu isotopes	0.01 pCi/g	ash	ASTM-D3972- mod Alpha spec	0.01 pCi/g	7 gram minimum, with 1000 min. count. (note 3g gives 0.03 MDC)
U isotopes	0.01 pCi/g	ash	ASTM-D3972- mod Alpha spec	0.01 pCi/g	7 gram minimum, with 1000 min. count. (note 3g gives 0.03 MDC)
			SW 6010	RL (ppm) 1 gram aliquot	RL (ppm) 5 gram aliquot (if feasible *)
Al	2 ppm	tissue	ICP	10	2
Ba	0.05 ppm	tissue	ICP	0.2	0.04
Be	0.02 ppm	tissue	ICP	0.1	0.02
Ca	10 ppm	tissue	ICP	50	10
Cr	0.1 ppm	tissue	ICP	0.5	0.1
Co	0.1 ppm	tissue	ICP	0.2	0.04
Cu	0.05 ppm	tissue	ICP	0.2	0.04
Fe	1 ppm	tissue	ICP	5	1
Mg	10 ppm	tissue	ICP	50	10
Mn	0.1 ppm	tissue	ICP	0.2	0.04
Ni	0.1 ppm	tissue	ICP	0.5	0.1
K	500 ppm	tissue	ICP	50	10
Na	5 ppm	tissue	ICP	50	10

Title: Processing Biota Samples	No.: SOP-5137	Page 9 of 12
	Revision: 0	Effective Date:
		2/26/2008

V	0.1 ppm	tissue	ICP	0.5	0.1
Zn	0.1 ppm	tissue	ICP	0.5	0.1
Hg	0.01 ppm	tissue	Cold vapor AA	0.01	NA
			SW 6020	RL (ppb) 1 gram aliquot	RL (ppb) 5 gram aliquot (if feasible *)
Sb	5 ppb	tissue	ICPMS	30	6
As	30 ppb	tissue	ICPMS	200	40
Cd	5 ppb	tissue	ICPMS	30	6
Pb	8 ppb	tissue	ICPMS	50	10
Se	20 ppb	tissue	ICPMS	100	20
Ag	2 ppb	tissue	ICPMS	10	2
Tl	3 ppb	tissue	ICPMS	20	4

Title: Processing Biota Samples	No. SOP-5137	Page 10 of 12
	Revision: 0	Effective Date: 2/26/008

ATTACHMENT 2: HAZARD REVIEW FOR PROCESSING AND SUBMITTING SAMPLES FOR THE FOODSTUFFS MONITORING PROGRAM

Records Use only

Hazard Review for Processing and Submitting Samples for the Foodstuffs and Nonfoodstuffs Monitoring Program



Work Tasks/Steps	Hazards, Concerns, and Potential Accidents; Likelihood/Severity	Controls, Preventive Measures (e.g., safety equipment, administrative controls, etc.)	Hazard Level (from IMP 300-00-00, Hazard Grading Matrix)
Steps to process samples in chapter <i>Processing samples for organics analysis</i> : use electrical appliances such as hot plates	Burns from hot surfaces (occasional/moderate = low)	Wear safety glasses, lab coat, and rubber gloves. Be familiar with the operator's manuals for each piece of equipment.	Low
Handle hot glassware when removing from ovens or hot plates	Hot glass (occasional/moderate = low)	Use hot mits when handling hot equipment or parts.	Low
Handle hot glassware—breakage is possible	Broken glass edges can cause cuts (occasional/moderate = low)	Wear safety glasses, lab coat, and cut-resistant (Kevlar) gloves	Low
Process samples in steps in chapter <i>Processing samples for tritium analysis</i>	Splattering of hot water (occasional/moderate = low)	Wear safety glasses, lab coat, and heavy rubber gloves.	Low
Turn on oven and raise temperature (steps in chapter Operating the drying/ashing oven	Smoke and smell can cause irritation to other building residents (occasional/moderate = low)	Ensure hood fan is turned on to create negative pressure in lab room—any time oven is to be used.	Low

Title: Processing Biota Samples	No. SOP-5137	Page 11 of 12
	Revision: 0	Effective Date: 2/26/008

Work Tasks/Steps	Hazards, Concerns, and Potential Accidents; Likelihood/Severity	Controls, Preventive Measures (e.g., safety equipment, administrative controls, etc.)	Hazard Level (from IMP 300-00-00, Hazard Grading Matrix)
Steps to dry and ash samples in chapter Operating the drying/ashing oven	Burns from hot surfaces of drying and ashing ovens (occasional/ moderate = low)	Use hot-mitts or pot holders when working with the ovens, hot plates, or hot beakers.	Low
Grind samples using the Wiley Mill in chapter <i>Processing</i> samples for heavy metal analysis	The Wiley Mill (remote/ negligible = minimal)	Receive instruction on use of mill. Wear safety glasses, lab coat, and heavy rubber gloves. Be familiar with the operator's manual.	Low
Cut and process samples in steps in chapters <i>Processing</i> samples for tritium analysis and <i>Processing</i> samples for heavy metal analysis	Use of knives (improbable/moderate = minimal)	When knives are being used, wear cut-resistant (Kevlar) gloves to prevent injuries	Low
Cut and process samples in steps in chapter <i>Processing</i> samples for tritium analysis	Ergonomic injuries (repetitive motion) (remote/negligible = low)	Take a short break every hour.	Low
Cut and process samples in steps in chapter <i>Processing</i> samples for tritium analysis	Exposure to potential blood- borne pathogens (improbable/critical = low)	Wear a face shield.	Low

Wastes or Residual Materials

Take all waste foodstuffs and animal parts directly to the County Landfill. Do not dispose in dumpsters at TA-21.


Emergency Actions to Take in Event of Control Failure

For cuts and burns, perform First Aid as appropriate. Go to hospital for serious injuries. Go to HSR-2 for evaluation. Notify supervisor ASAP.

Title: Processing and Submitting Samples for the No.: SOP-5137 **Foodstuffs Monitoring Program** Revision: 0 Effective Date:

Appendix 3. **Schematic of Distillation Setup**

For processing samples for tritium analysis

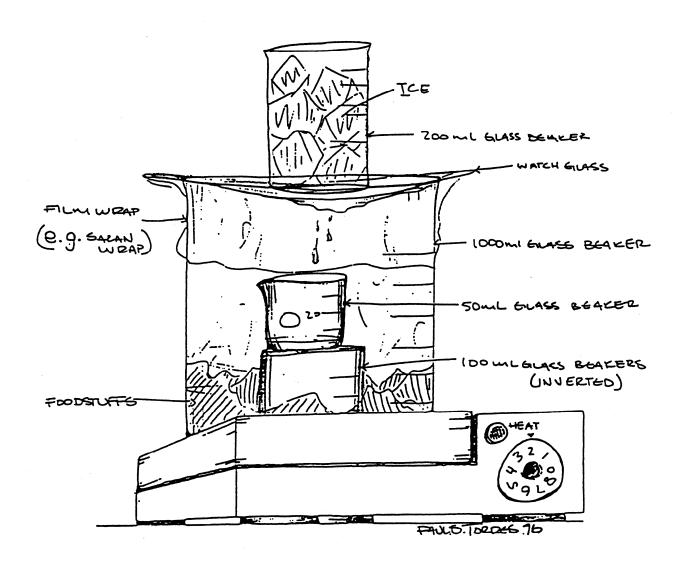

Page 12 of 12

2/26/2008